

FCC/IC - TEST REPORT

Report Number : **68.950.17.455.01** Date of Issue: July 6, 2017

Model : **AC017**

Product Type : Baby Monitor

Applicant : Angelcare Monitors Inc.

Address : 201 Boul. De l'industrie, Local 104, Candiac, Quebec,
J5R 6A6 Canada

Production Facility : Dongguan Artcom Electronics Limited

Address : Qiaocheng Industrial District, Qiaozhi,
Changping, 523572 Dongguan, Guangdong Province,
PEOPLE'S REPUBLIC OF CHINA

Test Result : **Positive** **Negative**

Total pages including Appendices : 27

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval



1 Table of Contents

- 1 Table of Contents 2
- 2 Details about the Test Laboratory 3
- 3 Description of the Equipment Under Test..... 4
- 4 Summary of Test Standards..... 5
- 5 Summary of Test Results 6
- 6 General Remarks 7
- 7 Test Setups 8
- 8 Systems test configuration 9
- 9 Technical Requirement 10
 - 9.1 Conducted peak output power 10
 - 9.2 6 dB Bandwidth and 99% Occupied Bandwidth..... 12
 - 9.3 Power spectral density..... 14
 - 9.4 Spurious RF conducted emissions 16
 - 9.5 Band edge 20
 - 9.6 Spurious radiated emissions for transmitter..... 22
- 10 Test Equipment List 26
- 11 System Measurement Uncertainty 27

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 502708

IC Registration No.: 10320A-1

3 Description of the Equipment Under Test

Product:	Baby Monitor
Model no.:	AC017
FCC ID:	N7TAC017T
IC ID:	5786A-AC017T
Brand Name:	Angelcare®
Options and accessories:	NIL
Rating:	3.0VDC (powered by 2 pcs non-rechargeable AAA alkaline battery)
RF Transmission Frequency:	2402-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Description of the EUT:	1.The Equipment Under Test (EUT) is a Baby Monitor (the nursery unit) with Bluetooth4.0 function operating at 2.4GHz. 2.Baby Monitor (the nursery unit) is communicated with the sensor pad via Bluetooth.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2016 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 4 November 2014	General Requirements and Information for the Certification of Radio Apparatus
RSS-247 Issue 2 February 2017	RSS-247 — Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB558074 DTS Measurement Guidance and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C, RSS-Gen, RSS-247					
Test Condition			Pages	Test Site	Test Result
§15.207	RSS-GEN A7.2.4	Conducted emission AC power port	---	---	N/A
§15.247(b)(1)	RSS-247 Clause 5.4(d)	Conducted peak output power	10	Site 1	Pass
§15.247(a)(2)	RSS-247 Clause 5.2(a)	6dB bandwidth	12	Site 1	Pass
§15.247(a)(1)	RSS-247 Clause 5.1(a)	20dB bandwidth and 99% Occupied Bandwidth	---	---	N/A
§15.247(a)(1)	RSS-247 Clause 5.1(b)	Carrier frequency separation	---	---	N/A
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(d)	Number of hopping frequencies	---	---	N/A
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(d)	Dwell Time	---	---	N/A
§15.247(e)	RSS-247 Clause 5.2(b)	Power spectral density*	14	Site 1	Pass
§15.247(d)	RSS-247 Clause 5.5	Spurious RF conducted emissions	16	Site 1	Pass
§15.247(d)	RSS-247 Clause 5.5	Band edge	20	Site 1	Pass
§15.247(d) & §15.209 &	RSS-247 Clause 5.5 & RSSGEN 6.13	Spurious radiated emissions for transmitter	22	Site 1	Pass
§15.203	RSSGEN 7.1.2	Antenna requirement	See note 2		Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Internal antenna, which gain is 0dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: N7TAC017T, IC ID: 5786A-AC017T complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules and RSS-247.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: June 22, 2017

Testing Start Date: June 26, 2017

Testing End Date: June 27, 2017

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

Prepared by:

Tested by:



Phoebe Hu
EMC Section Manager



Trevor You
EMC Senior Project Engineer




Endy Xie
EMC Test Engineer


7 Test Setups

7.1 radiated emissions test setups


Below 1GHz

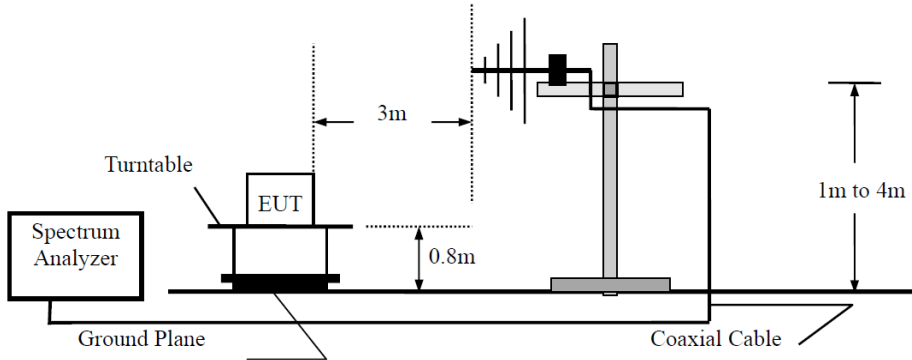

Above 1GHz

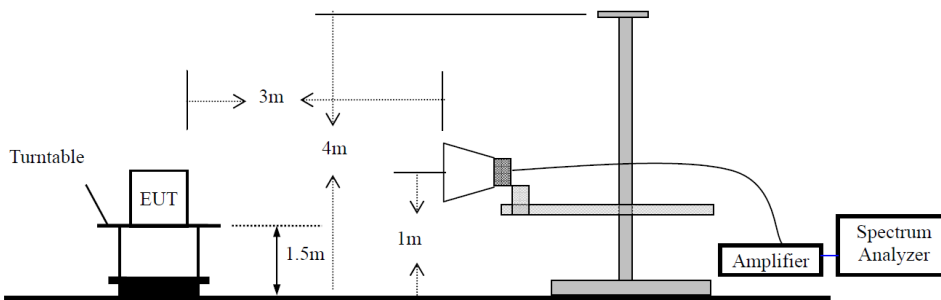

7.2 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenovo	X220	---

Test software: SSCOME32E.exe, which used to control the EUT in continues transmitting mode.

The system was configured to channel 0, 19, and 39 for the test.

9 Technical Requirement

9.1 Conducted peak output power

Test Method


1. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW,
 Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

Limits

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30


Test result as below table

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	-0.16	Pass
Middle channel 2440MHz	0.37	Pass
High channel 2480MHz	0.29	Pass

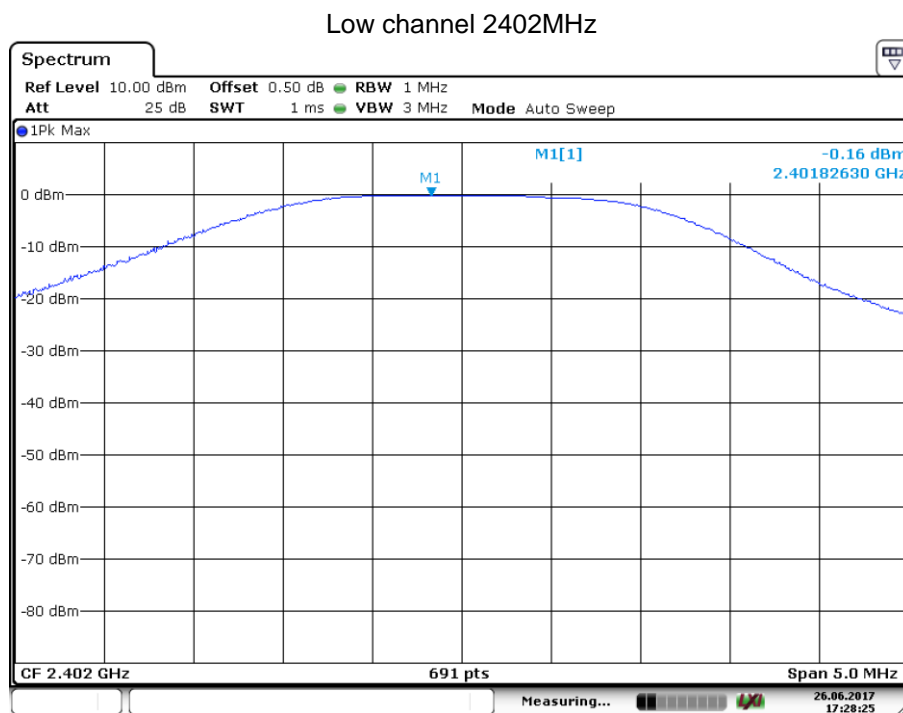


Date: 26.JUN.2017 17:28:25

Middle channel 2440MHz

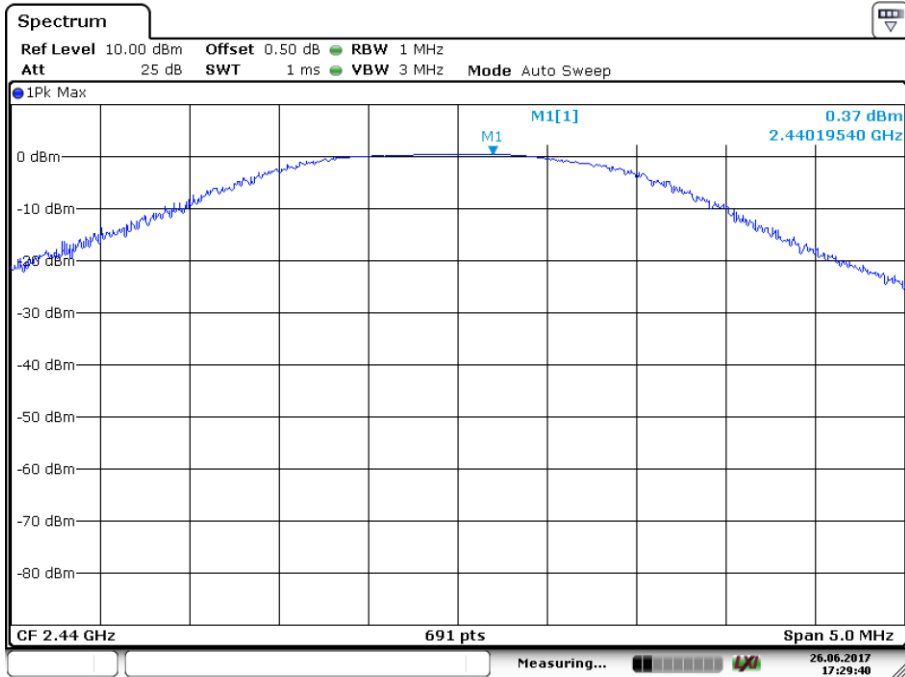

Date: 26 JUN.2017 17:29:40

High channel 2480MHz

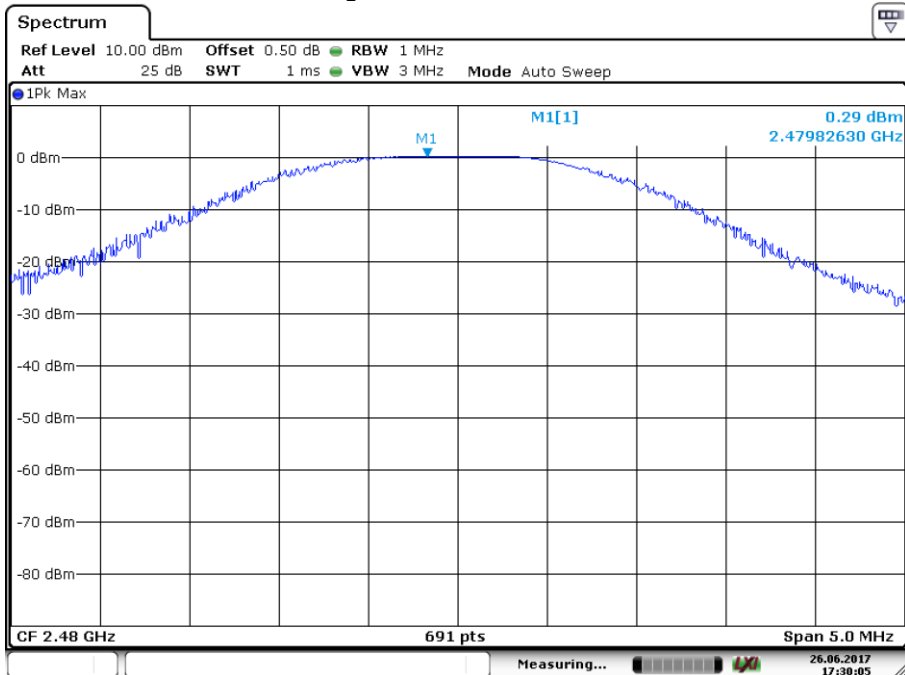

Date: 26 JUN.2017 17:30:05

9.2 6 dB Bandwidth and 99% Occupied Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
 RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

≥500

Test result


Frequency MHz	6dB bandwidth kHz	99 bandwidth kHz	Result
Low channel 2402MHz	833.6	1719.25	Pass
Middle channel 2440MHz	677.3	1706.22	Pass
High channel 2480MHz	599.1	1415.34	Pass

Low channel 2402MHz

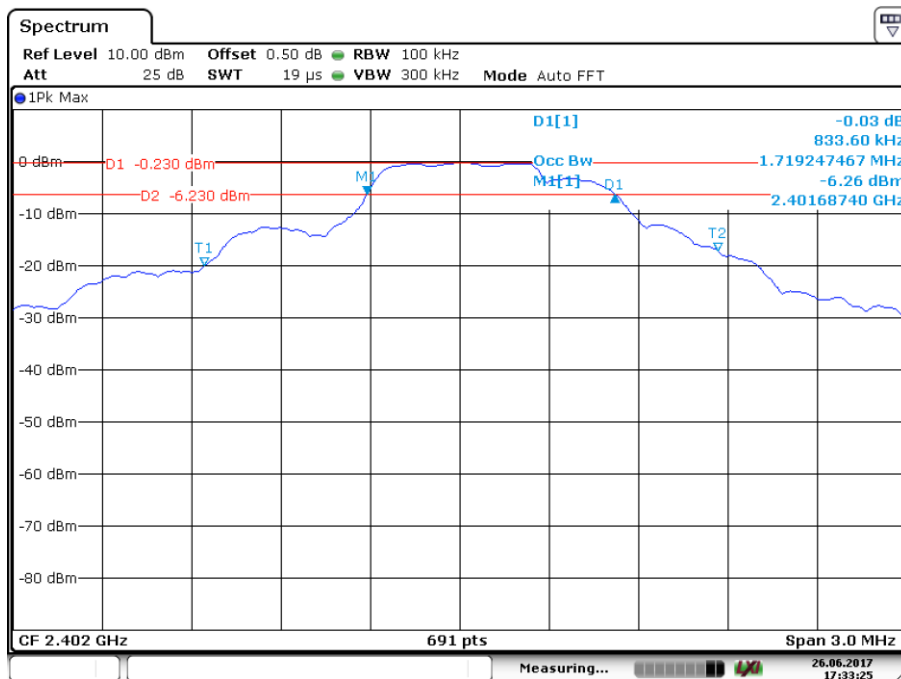


Date: 26 JUN.2017 17:33:25

Middle channel 2440MHz

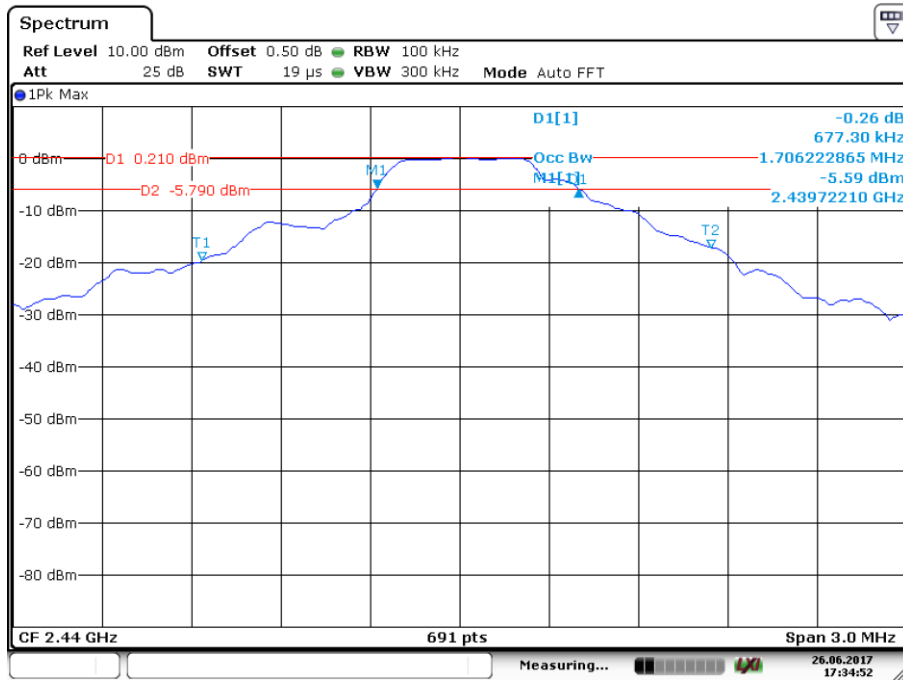

Date: 26 JUN.2017 17:34:52

High channel 2480MHz

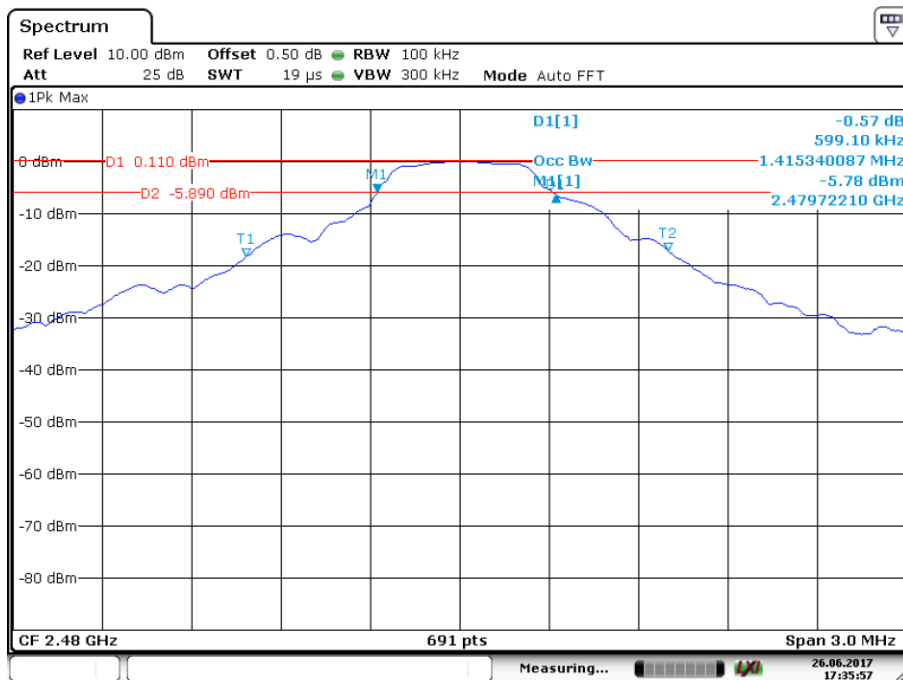

Date: 26 JUN.2017 17:35:57

9.3 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm]

≤8

Test result


Frequency MHz	Power spectral density dBm	Result
Low channel 2402MHz	-10.35	Pass
Middle channel 2440MHz	-10.23	Pass
High channel 2480MHz	-8.05	Pass

Low channel 2402MHz

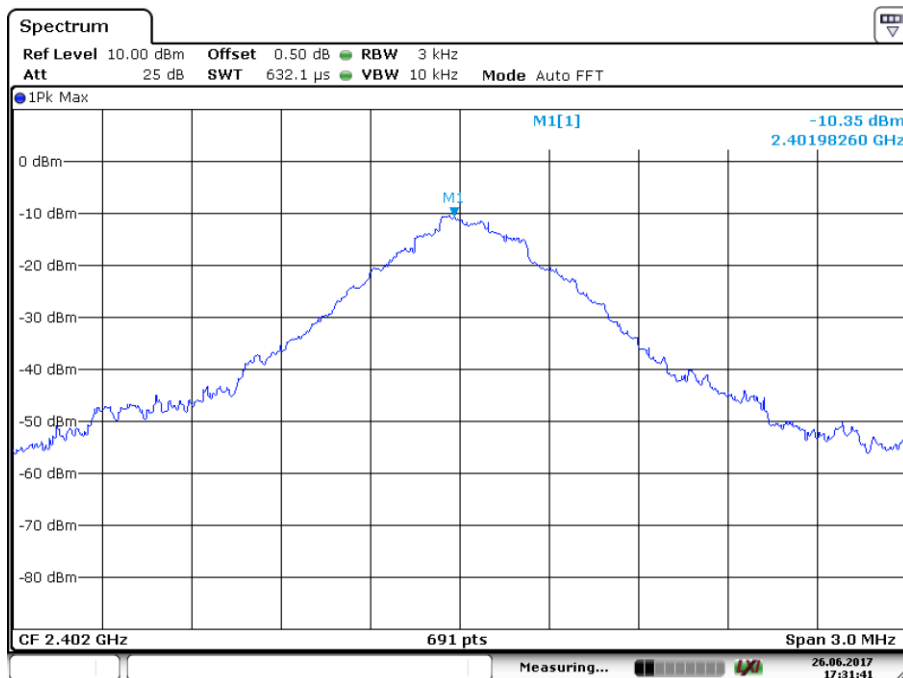


Date: 26 JUN.2017 17:31:42

Middle channel 2440MHz

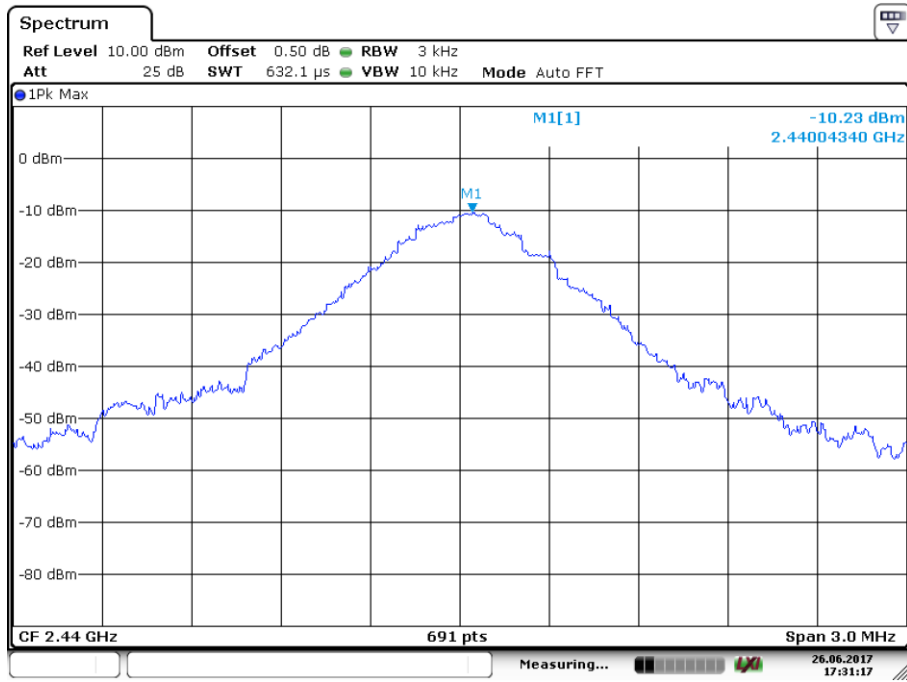

Date: 26.JUN.2017 17:31:18

High channel 2480MHz

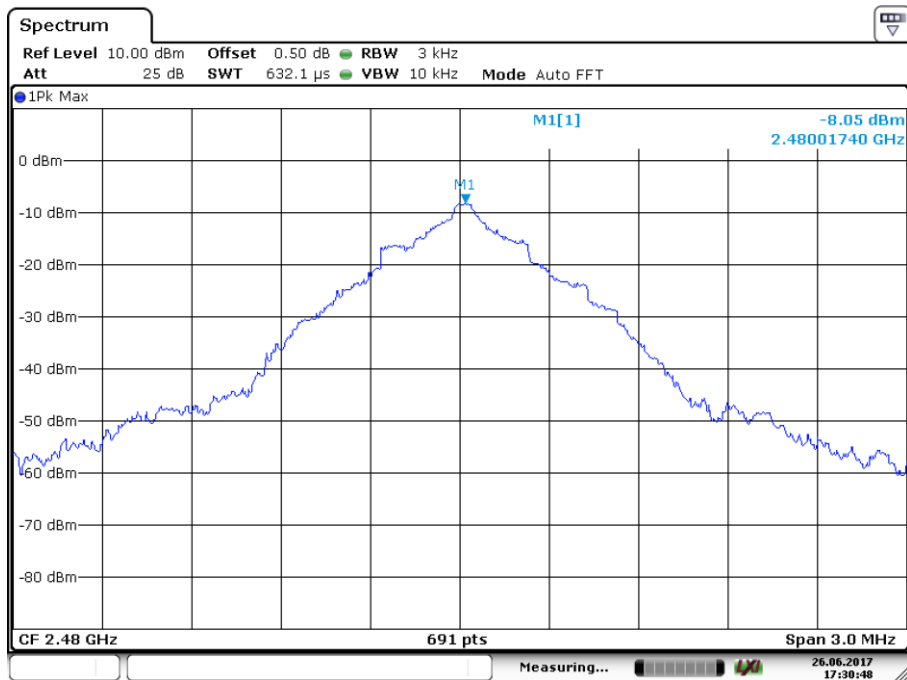

Date: 26.JUN.2017 17:30:48

9.4 Spurious RF conducted emissions

Test Method


1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions

2402MHz

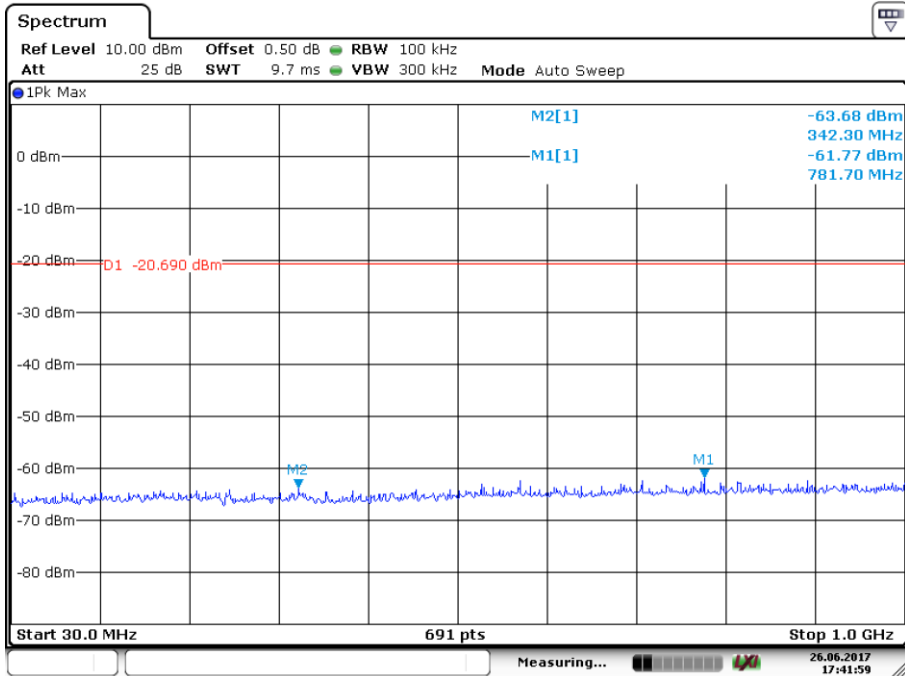


Date: 26 JUN.2017 17:41:59

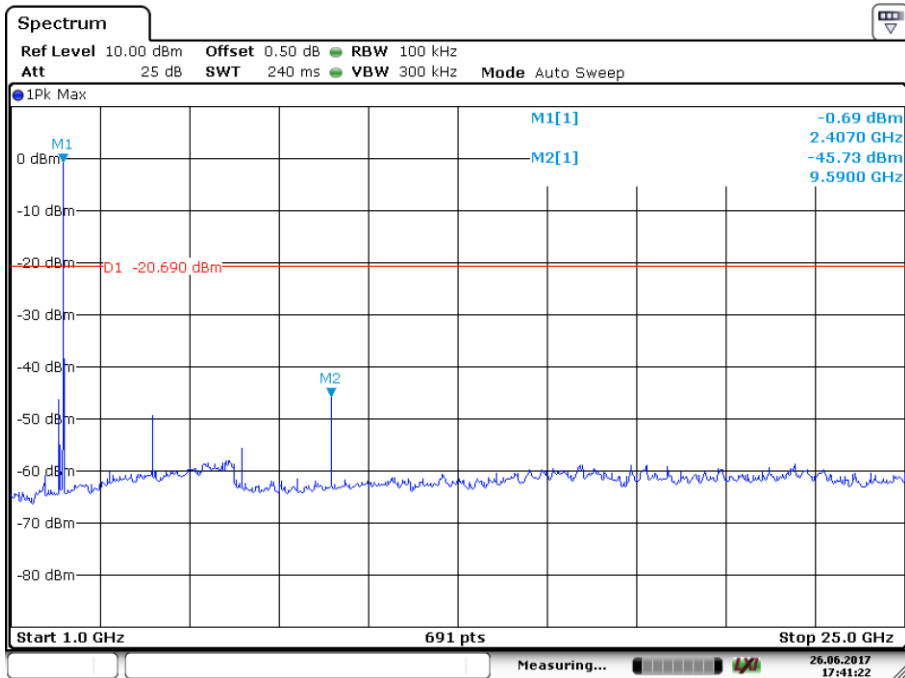


Date: 26 JUN.2017 17:41:23

2440MHz

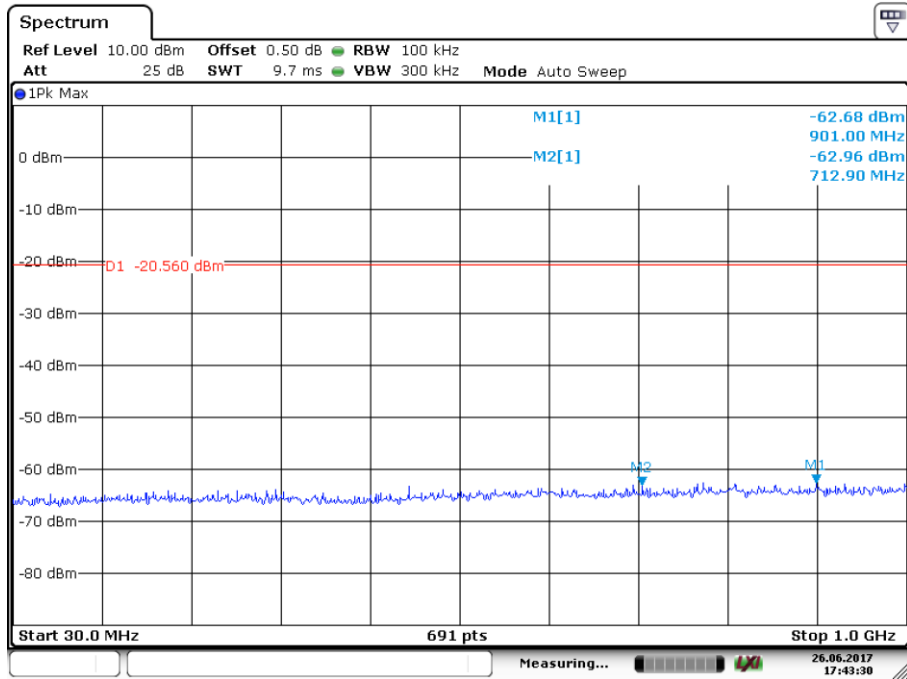


Date: 26 JUN.2017 17:43:30

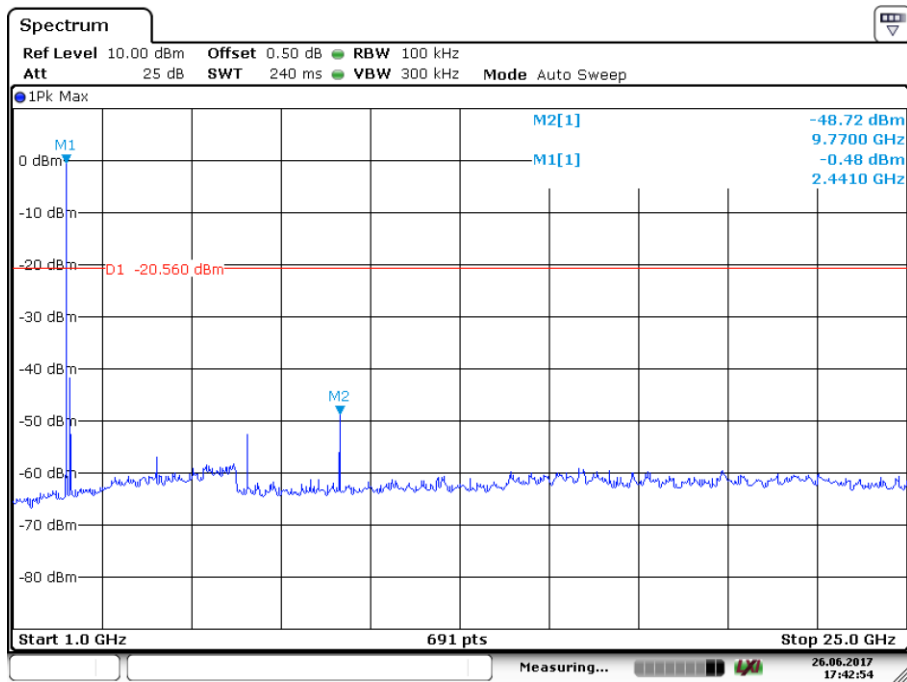


Date: 26 JUN.2017 17:42:54

2480MHz

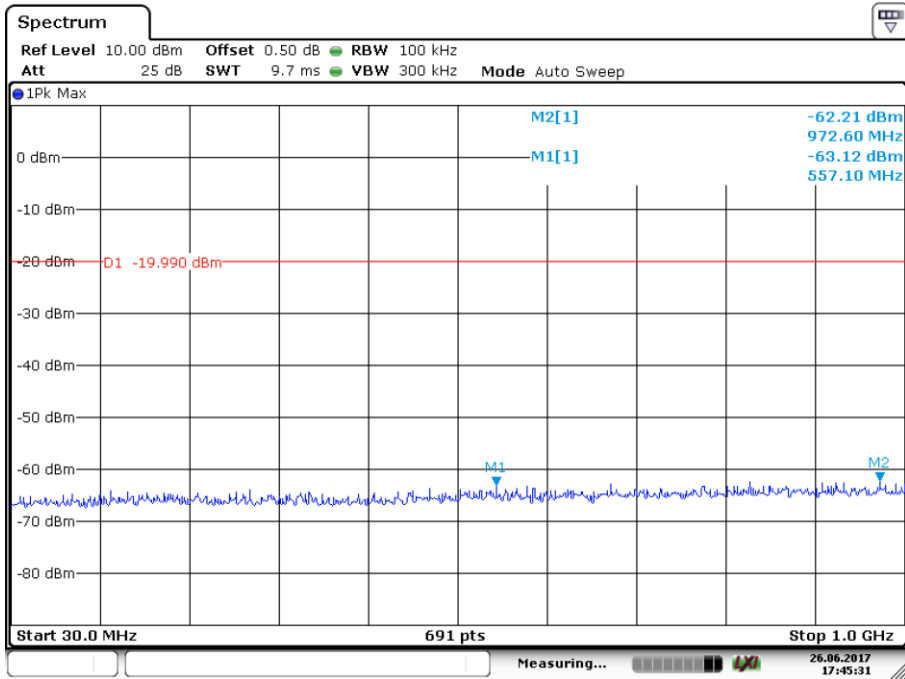

Date: 26.JUN.2017 17:45:31

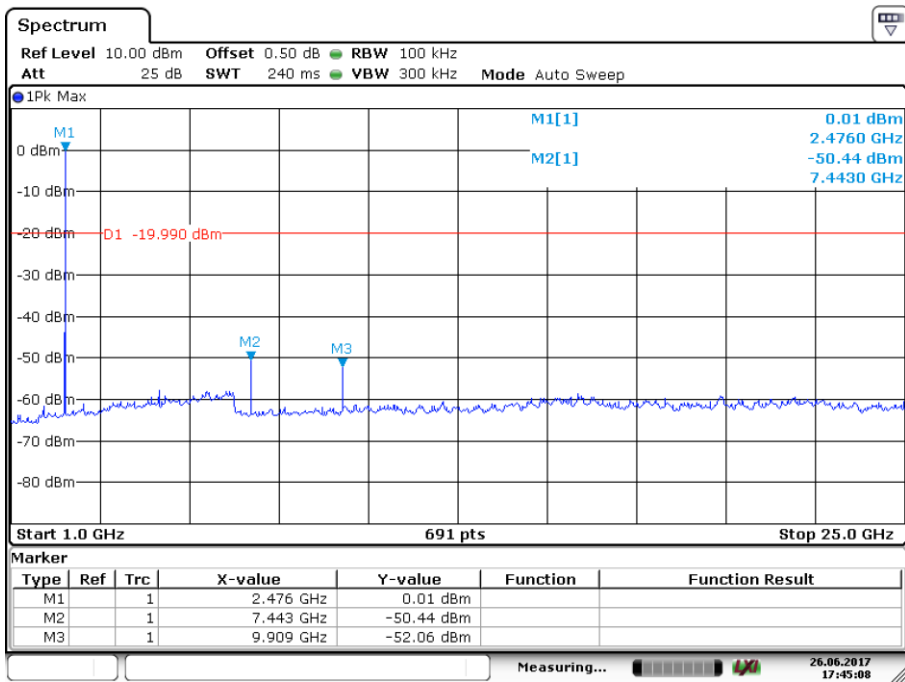

Date: 26.JUN.2017 17:45:08

9.5 Band edge

Test Method


- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Band edge testing

2402MHz

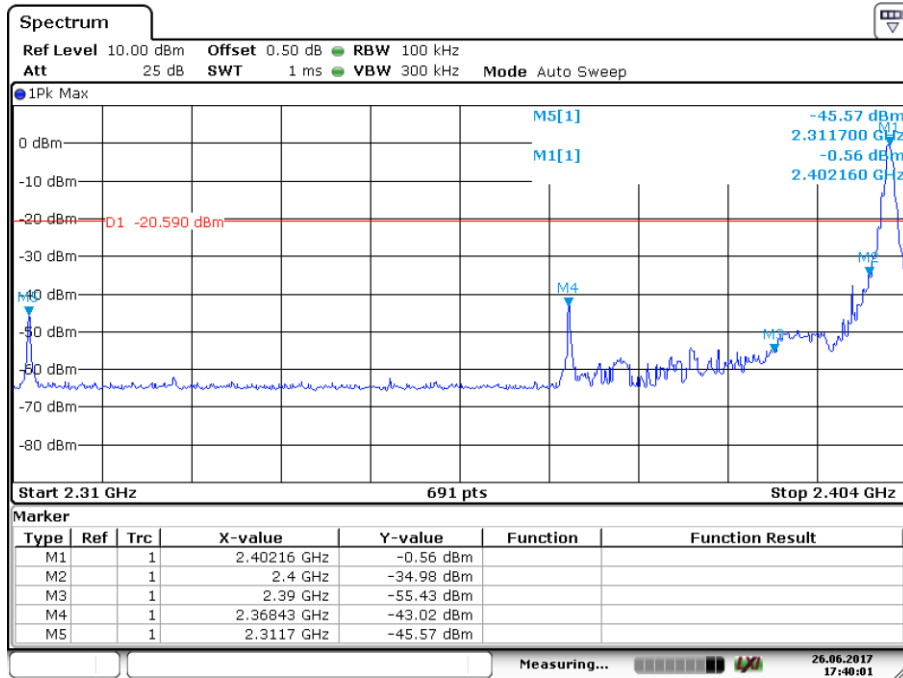

Date: 26 JUN.2017 17:40:01

2480MHz

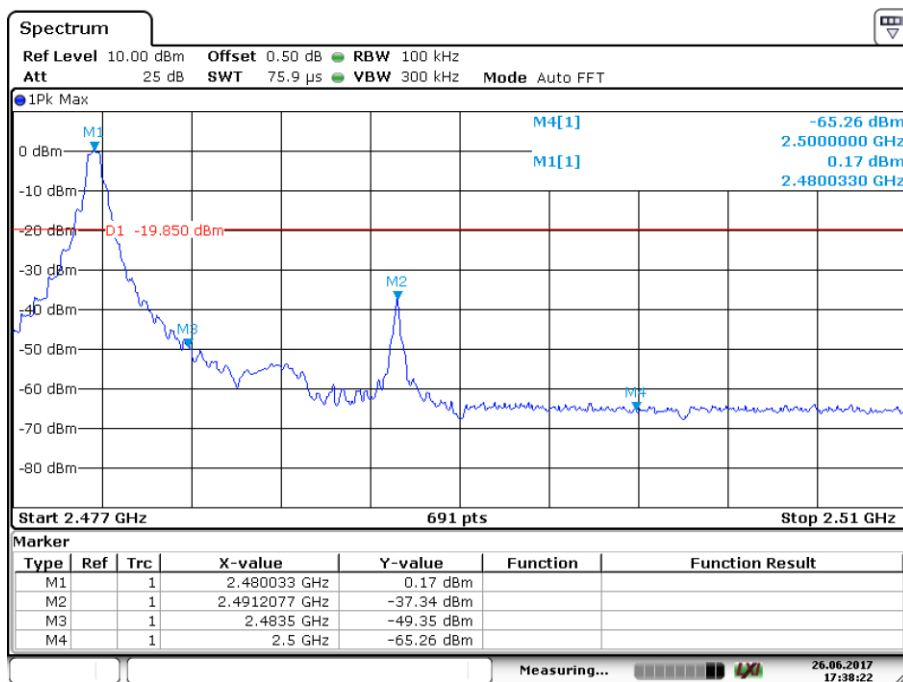

Date: 26 JUN.2017 17:38:22

9.6 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

Low channel 2402MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	43.47	17.42	H	40	QP	22.58	Pass
	31.72	18.41	V	40	QP	21.59	Pass
1000-25000MHz	2347.87	32.82	H	74	PK	41.18	Pass
	--	--	H	54	AV	--	Pass
	9608.91	49.35	H	74	PK	24.65	Pass
	--	--	H	54	AV	--	Pass
	2276.31	34.15	V	74	PK	39.85	Pass
	--	--	V	54	AV	--	Pass
	9607.50	48.37	V	74	PK	25.63	Pass
	--	--	V	54	AV	--	Pass

Middle channel 2440MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	--	--	H	43.5	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	1197.31	30.49	H	74	PK	43.51	Pass
	--	--	H	54	AV	--	Pass
	2298.19	35.62	H	74	PK	38.38	Pass
	--	--	H	54	AV	--	Pass
	2397.06	36.12	V	74	PK	37.88	Pass
	--	--	V	54	AV	--	Pass
	9579.84	47.59	V	74	PK	26.41	Pass
	--	--	V	54	AV	--	Pass

High channel 2480MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	--	--	H	43.5	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	2589.50	36.14	H	74	PK	37.86	Pass
	--	--	H	54	AV	--	Pass
	9920.62	48.61	H	74	PK	25.39	Pass
	--	--	H	54	AV	--	Pass
	2389.94	34.66	V	74	PK	39.34	Pass
	--	--	V	54	AV	--	Pass
	9919.22	46.60	V	74	PK	27.40	Pass
	--	--	V	54	AV	--	Pass

Remark:

- (1) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.

10 Test Equipment List

List of Test Instruments

Spurious RF conducted emissions test *

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Generator	Rohde & Schwarz	SMB100A	108272	2017-7-15
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2017-7-15
Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	2017-7-15
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2017-7-15
Power Splitter	Weinschel	1580	SC319	2017-7-15
10dB Attenuator	Weinschel	56-10	58764	2017-7-15
10dB Attenuator	R&S	DNF	DNF-001	2017-7-15
10dB Attenuator	R&S	DNF	DNF-002	2017-7-15
10dB Attenuator	R&S	DNF	DNF-003	2017-7-15
10dB Attenuator	R&S	DNF	DNF-004	2017-7-15
Test software	Rohde & Schwarz	EMC32	Version 9.26.01	N/A

Spurious radiated emissions for transmitter

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2017-7-15
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-3
Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-15
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2017-7-15
3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-3
Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-15

Remark: “*” TS8997 Test System

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.98dB; Vertical: 5.06dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.95dB; Vertical: 4.94dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 5.14dB; Vertical: 5.12dB;
Uncertainty for Conducted RF test with TS 8997	Power level test involved: 2.06dB Frequency test involved: 1.16×10 ⁻⁷