

FCC Part 15C Measurement and Test Report

For

Smart Technologies & Investment Ltd.

21/F Fun Tower, 35 Hung To Road, Kwun Tong, Kowloon, Hong Kong

FCC ID: N9KSMARTPGD728F

FCC Rule(s): FCC Part 15.247

Product Description: Electronic lock with BLE & fingerprint

Tested Model: PGD728F

Report No.: STR18068375I

Sample Receipt Date: 2018-06-29

Tested Date: 2018-07-02 to 2018-07-10

Issued Date: 2018-07-10

Tested By: Mike Shi/ Engineer

Mike Shi

Reviewed By: Silin Chen / EMC Manager

Silin Chen

Approved & Authorized By: Jandy So / PSQ Manager

Jandy So

Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION	9
5. POWER SPECTRAL DENSITY	10
5.1 STANDARD APPLICABLE.....	10
5.2 TEST PROCEDURE.....	10
5.3 SUMMARY OF TEST RESULTS/PLOTS	10
6. 6DB BANDWIDTH	12
6.1 STANDARD APPLICABLE.....	12
6.2 TEST PROCEDURE.....	12
6.3 SUMMARY OF TEST RESULTS/PLOTS	12
7. RF OUTPUT POWER	14
7.1 STANDARD APPLICABLE.....	14
7.2 TEST PROCEDURE.....	14
7.3 SUMMARY OF TEST RESULTS/PLOTS	14
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
8.1 STANDARD APPLICABLE.....	16
8.2 TEST PROCEDURE.....	16
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
8.4 SUMMARY OF TEST RESULTS/PLOTS	17
9. OUT OF BAND EMISSIONS.....	25
9.1 STANDARD APPLICABLE.....	25
9.2 TEST PROCEDURE.....	25
9.3 SUMMARY OF TEST RESULTS/PLOTS	26

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Smart Technologies & Investment Ltd.
Address of applicant: 21/F Fun Tower, 35 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Manufacturer: Smart Electronic Industrial (Dong Guan) Co., Ltd.
Address of manufacturer: Qing Long Road, Long Jian Tian Village, Huang Jiang Town, Dong Guan, Guang Dong, China

General Description of EUT	
Product Name:	Electronic lock with BLE & fingerprint
Brand Name:	LOCKLY
Model No.:	PGD728F
Adding Model(s):	/
Rated Voltage:	Input:6Vdc, "AA"x4
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	-0.49dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	"Inverted-F" printed antenna
Antenna Gain:	0dBi
Lowest Internal Frequency:	32.768kHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A*
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

*Remark: The AC Line Conducted Emissions testing is exempted because it is powered solely by batteries. Thus, the AC Line Conducted Emissions testing is not applicable.



3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an “Inverted-F” printed antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Summary of Test Results/Plots

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	Low	-14.93	8
	Middle	-15.91	8
	High	-16.55	8

Please refer to the following test plots:

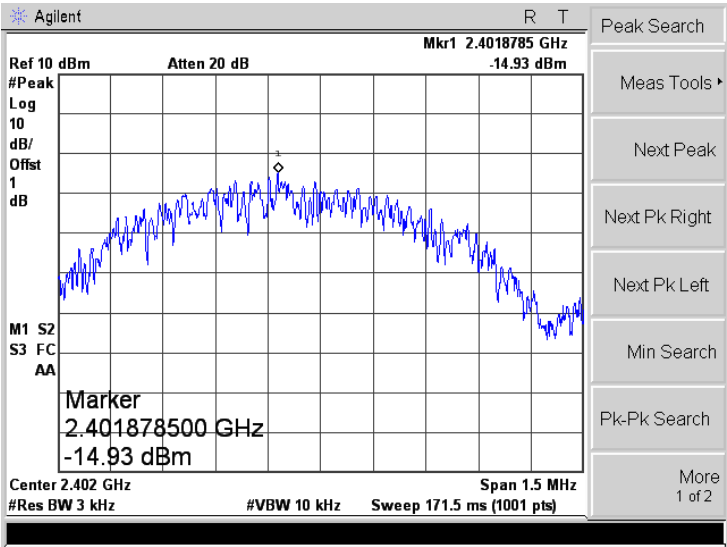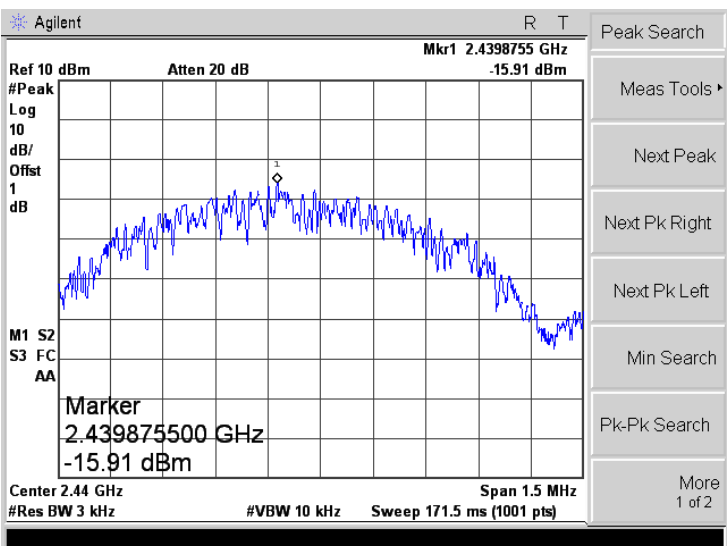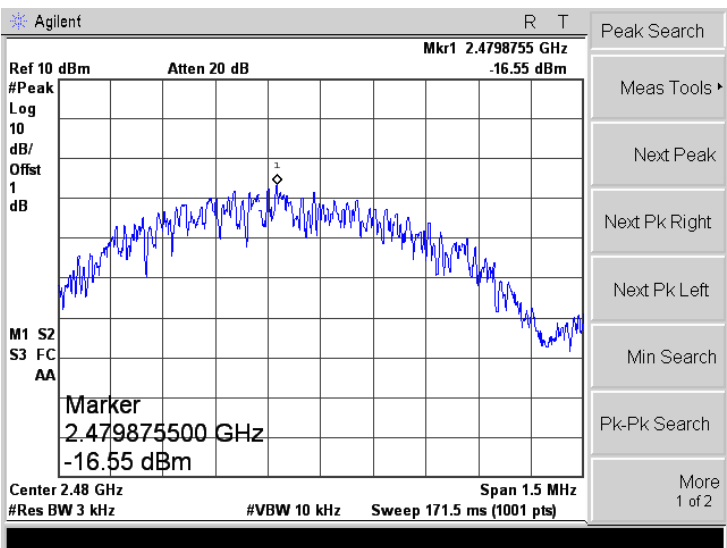Low	
Middle	
High	

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)	Low	712.292	≥ 500
	Middle	691.326	≥ 500
	High	693.976	≥ 500

Please refer to the following test plots:

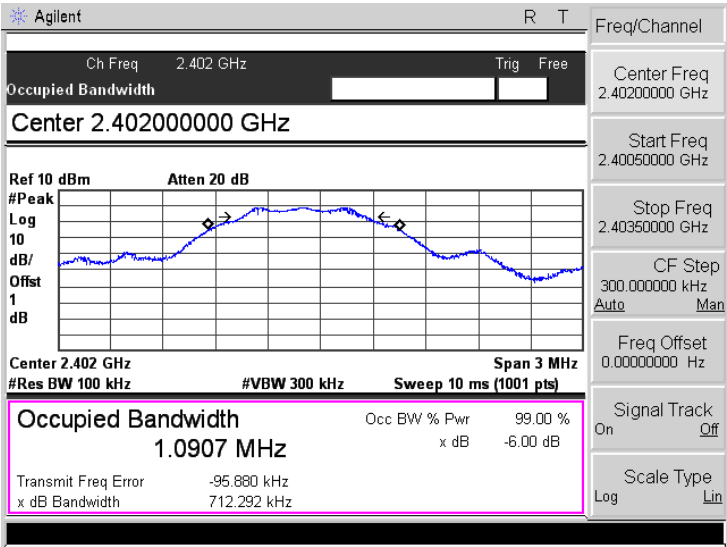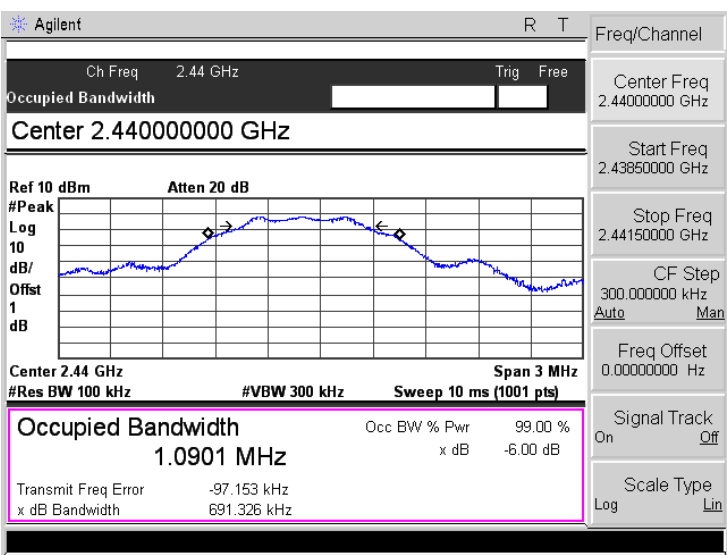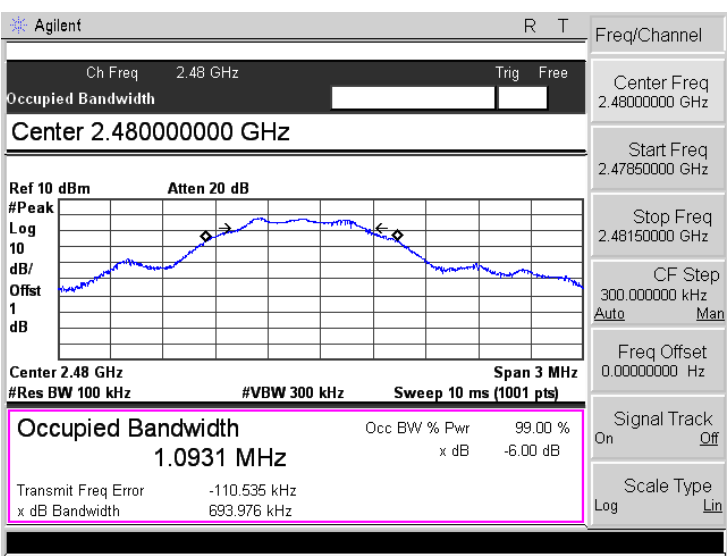Low	 Agilent R T Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Center 2.40200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 1.0907 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -95.880 kHz x dB Bandwidth 712.292 kHz Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
Middle	 Agilent R T Ch Freq 2.44 GHz Trig Free Occupied Bandwidth Center 2.44000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 1.0901 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -97.153 kHz x dB Bandwidth 691.326 kHz Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
High	 Agilent R T Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Center 2.48000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 1.0931 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -110.535 kHz x dB Bandwidth 693.976 kHz Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure




According to section KDB-558074 D01 v04 section 9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

7.3 Summary of Test Results/Plots

Test Mode	Test Channel	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	Low	-0.49	0.89	1000
	Middle	-1.36	0.73	1000
	High	-2.45	0.57	1000

Note: the antenna gain of 0dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

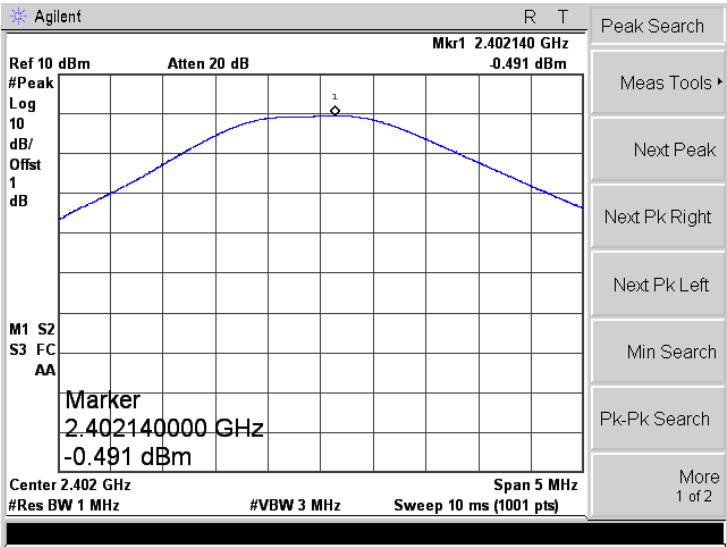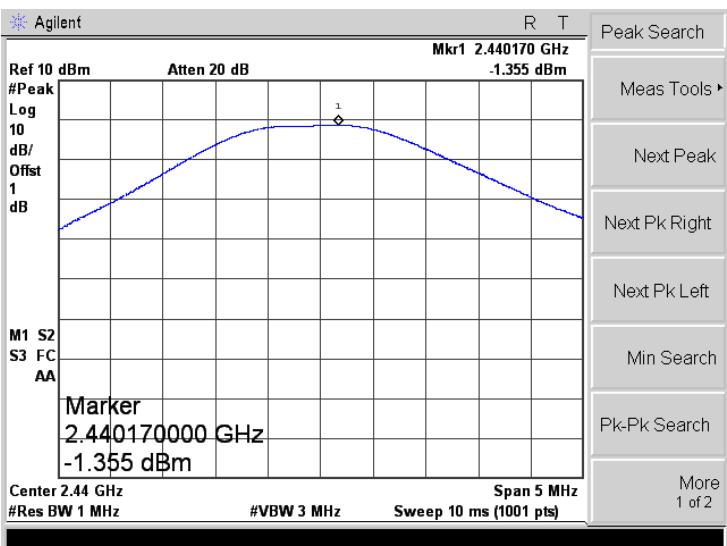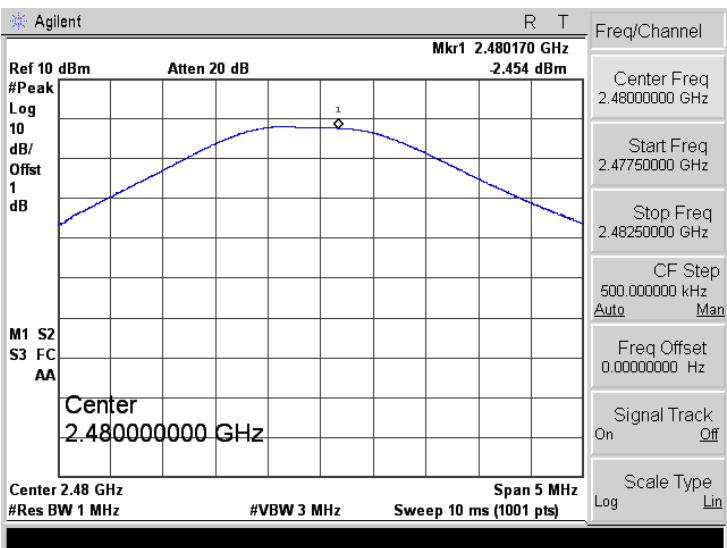Low	
Middle	
High	

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

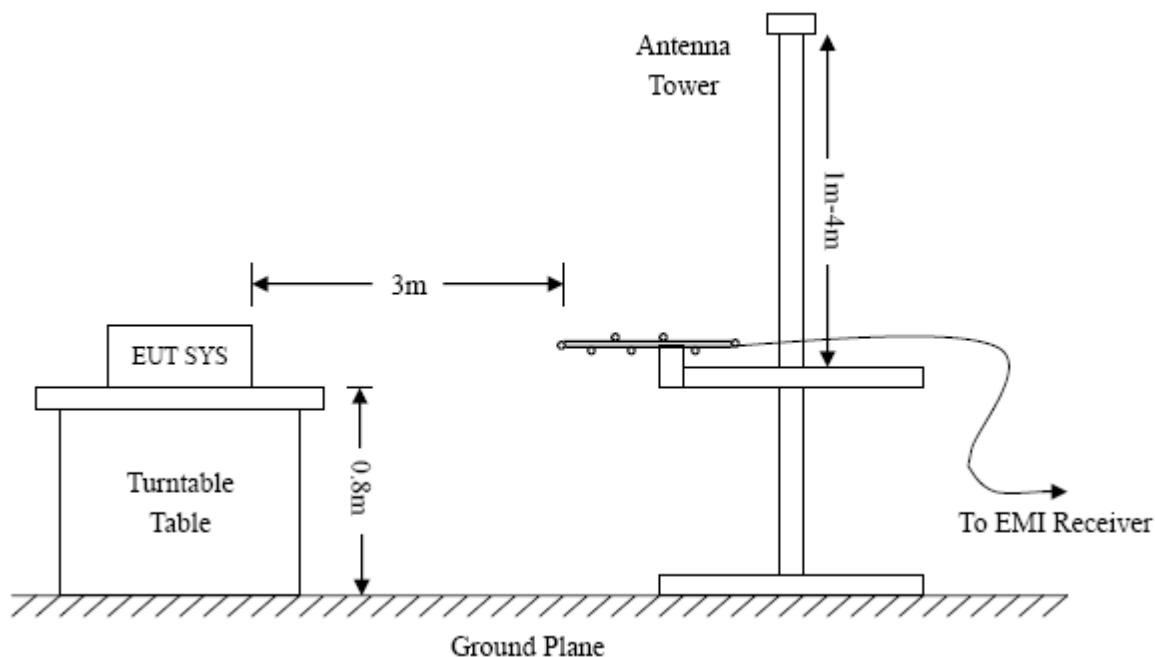

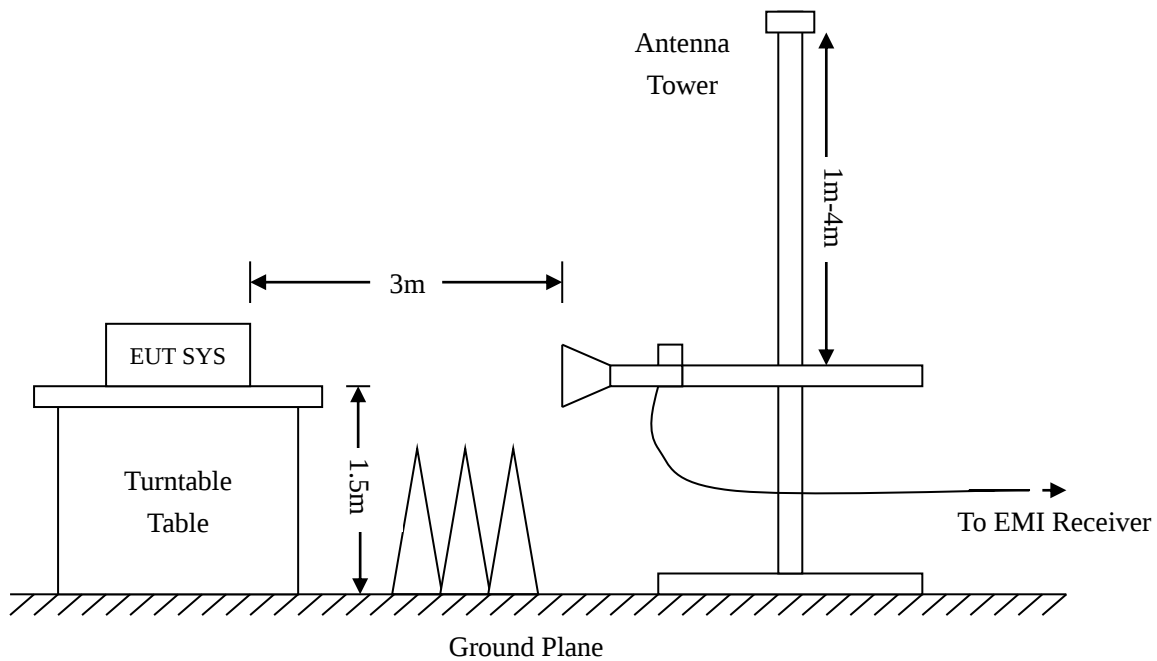

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

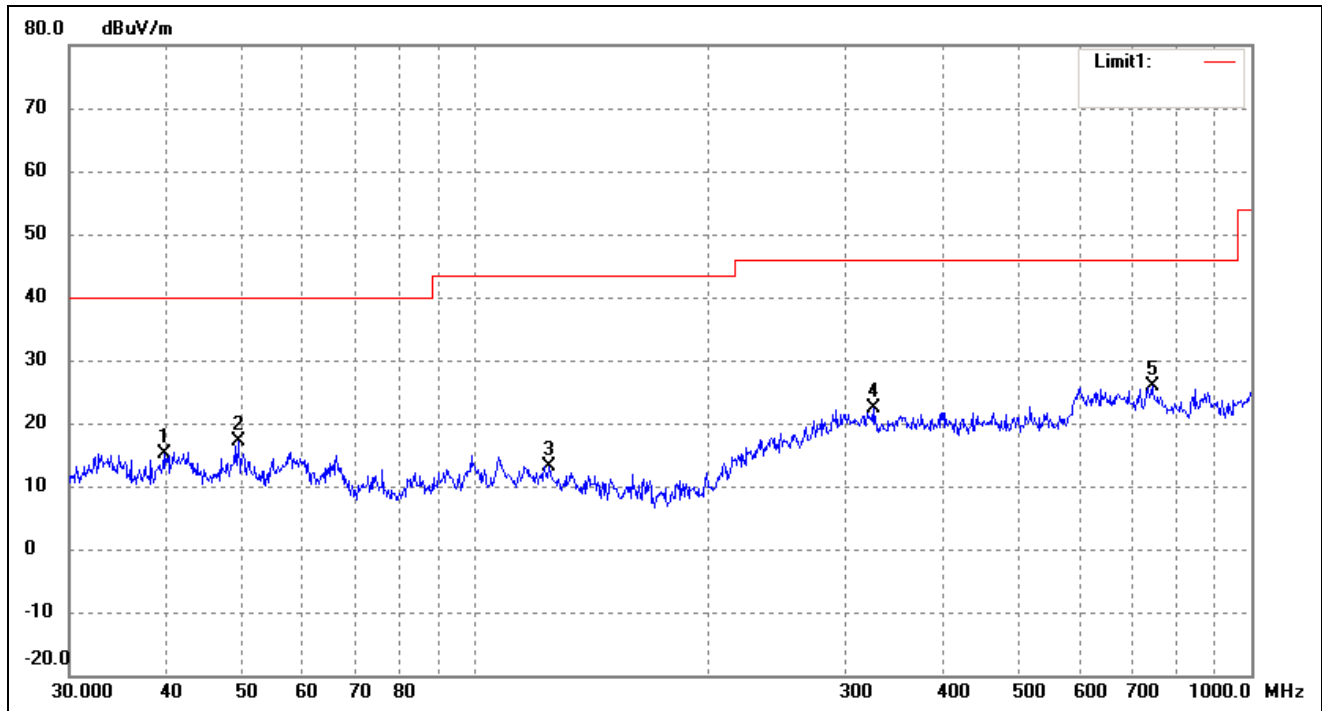


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.7147	33.78	-18.57	15.21	40.00	-24.79	350	100	peak
2	49.5328	35.61	-18.60	17.01	40.00	-22.99	93	100	peak
3	124.5690	31.32	-18.16	13.16	43.50	-30.34	87	100	peak
4	325.5958	30.40	-8.13	22.27	46.00	-23.73	103	100	peak
5	744.8661	28.55	-2.59	25.96	46.00	-20.04	161	100	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

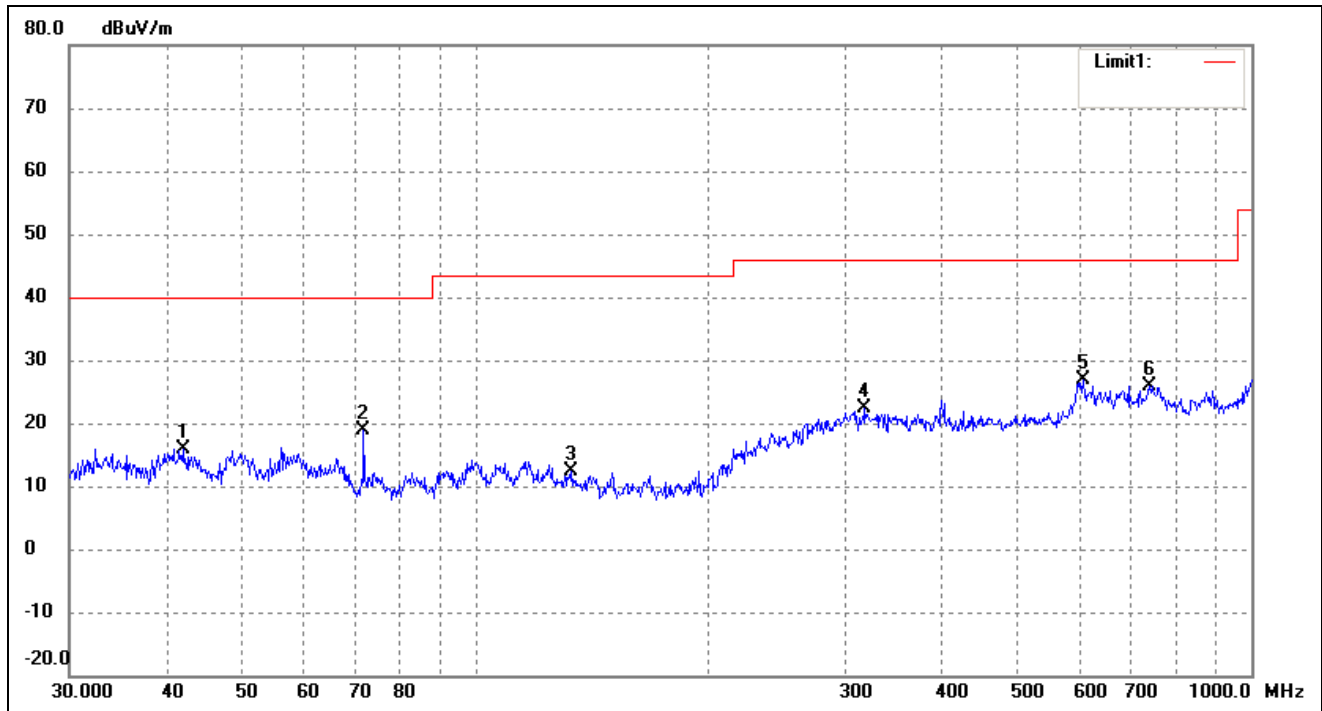


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0066	34.50	-18.54	15.96	40.00	-24.04	350	100	peak
2	71.8320	39.52	-20.66	18.86	40.00	-21.14	93	100	peak
3	133.1511	30.97	-18.70	12.27	43.50	-31.23	87	100	peak
4	317.7011	30.31	-7.92	22.39	46.00	-23.61	103	100	peak
5	607.7867	29.94	-3.10	26.84	46.00	-19.16	161	100	peak
6	739.6605	28.26	-2.39	25.87	46.00	-20.13	227	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

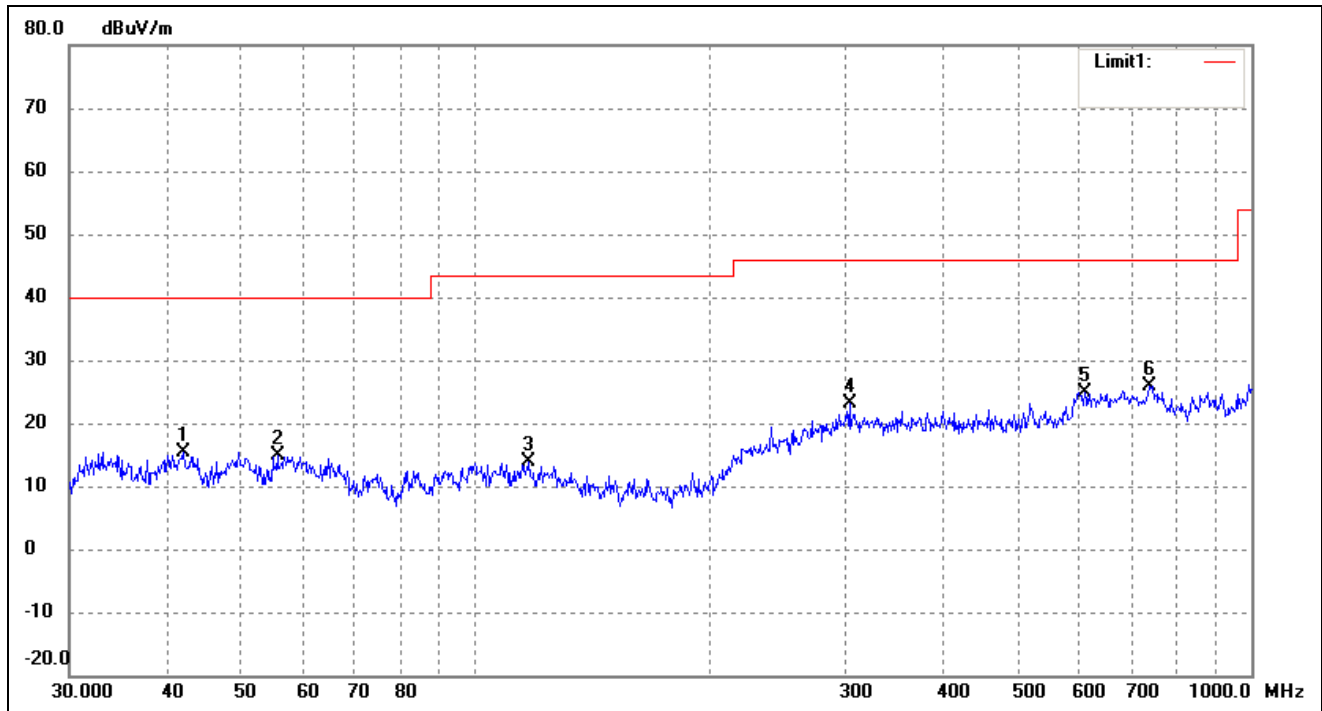


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0066	34.01	-18.54	15.47	40.00	-24.53	222	100	peak
2	55.6094	33.13	-18.37	14.76	40.00	-25.24	166	100	peak
3	117.3603	31.78	-17.89	13.89	43.50	-29.61	72	100	peak
4	303.5437	31.16	-7.92	23.24	46.00	-22.76	116	100	peak
5	609.9217	28.21	-3.25	24.96	46.00	-21.04	102	100	peak
6	739.6605	28.37	-2.39	25.98	46.00	-20.02	241	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

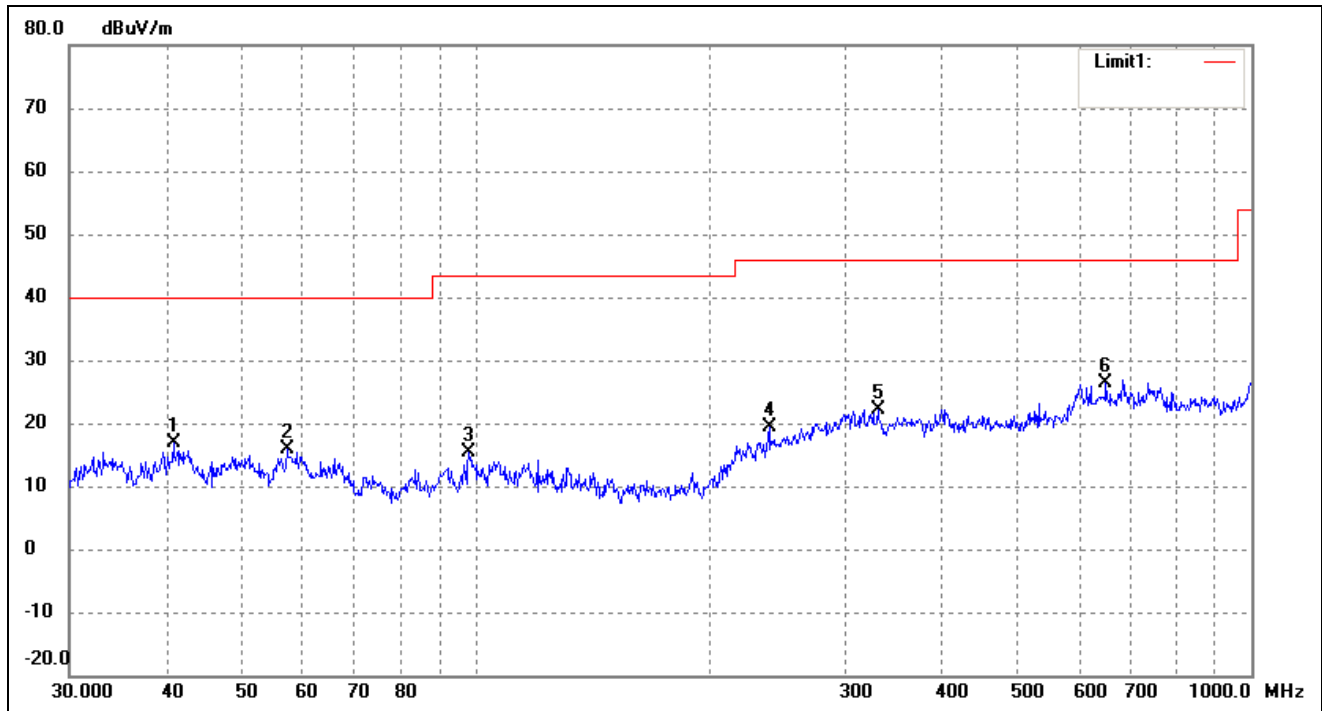


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.8446	35.52	-18.53	16.99	40.00	-23.01	324	100	peak
2	57.1914	34.14	-18.32	15.82	40.00	-24.18	99	100	peak
3	98.1419	33.87	-18.41	15.46	43.50	-28.04	115	100	peak
4	239.1473	31.35	-12.00	19.35	46.00	-26.65	94	100	peak
5	330.1949	30.38	-8.28	22.10	46.00	-23.90	340	100	peak
6	649.6597	29.86	-3.49	26.37	46.00	-19.63	254	100	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

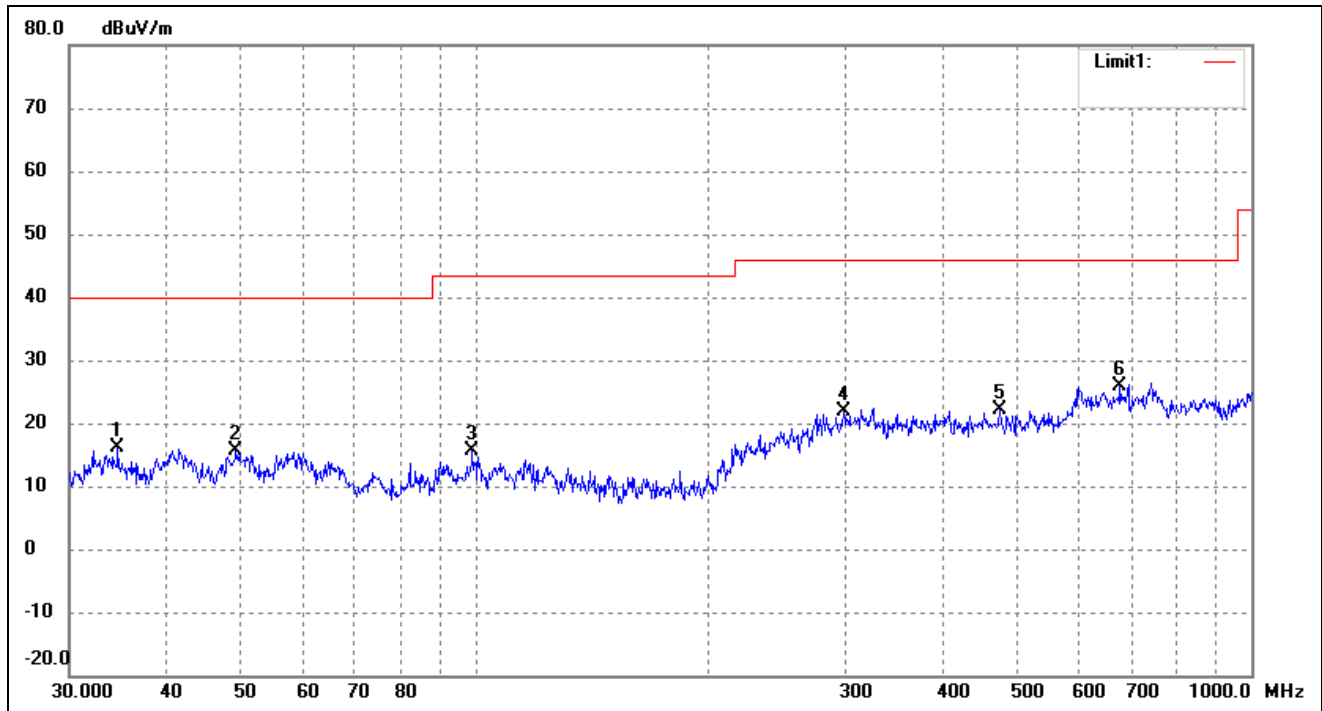

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.6385	35.55	-19.39	16.16	40.00	-23.84	192	100	peak
2	49.1866	34.13	-18.59	15.54	40.00	-24.46	128	100	peak
3	99.1797	33.83	-18.23	15.60	43.50	-27.90	87	100	peak
4	298.2681	29.93	-8.01	21.92	46.00	-24.08	135	100	peak
5	473.8347	30.16	-8.12	22.04	46.00	-23.96	55	100	peak
6	677.5798	28.66	-2.77	25.89	46.00	-20.11	207	100	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

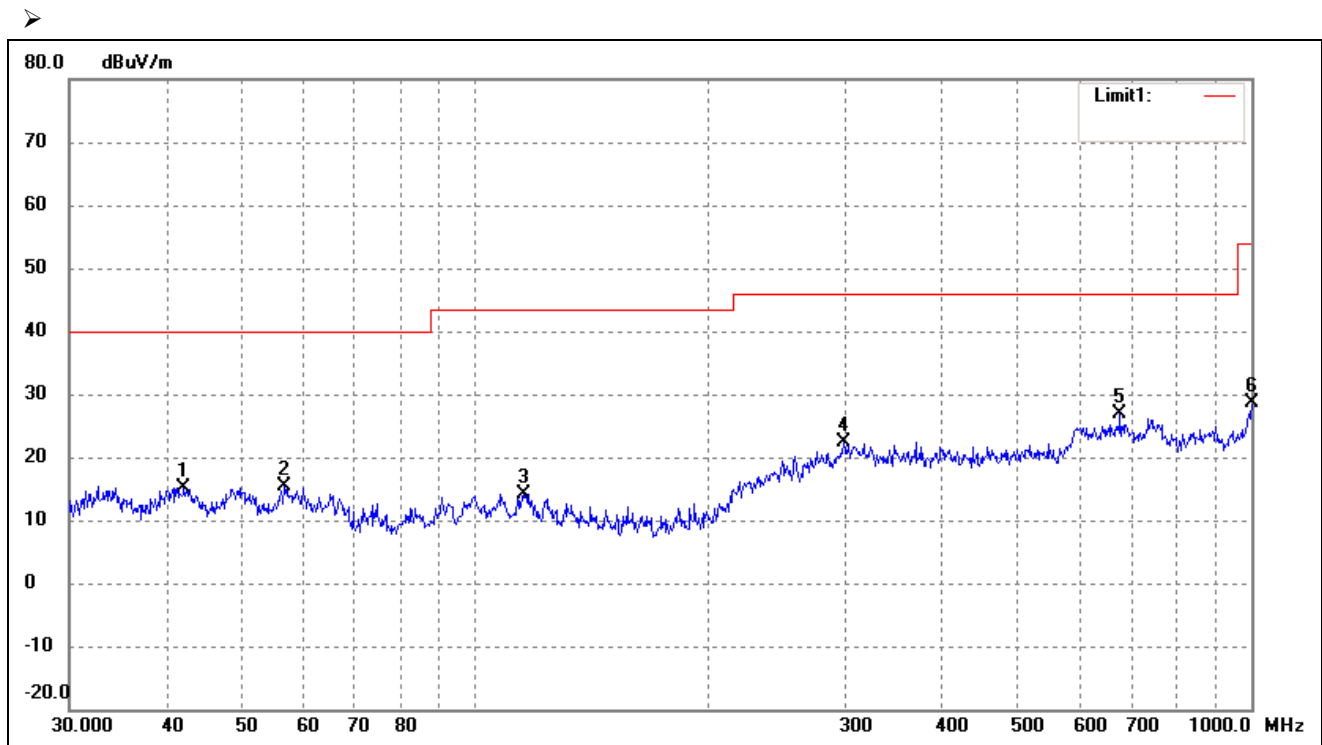

➤

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.1542	33.72	-18.54	15.18	40.00	-24.82	71	100	peak
2	56.7917	33.78	-18.33	15.45	40.00	-24.55	126	100	peak
3	115.3205	32.14	-17.91	14.23	43.50	-29.27	121	100	peak
4	298.2681	30.36	-8.01	22.35	46.00	-23.65	147	100	peak
5	677.5798	29.56	-2.77	26.79	46.00	-19.21	262	100	peak
6	1000.0000	29.51	-0.89	28.62	54.00	-25.38	216	100	peak

➤ Spurious Emissions Below 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	57.36	-3.59	53.77	74	-20.23	H	PK
4804	43.90	-3.59	40.31	54	-13.69	H	AV
7206	57.88	-0.52	57.36	74	-16.64	H	PK
7206	44.61	-0.52	44.09	54	-9.91	H	AV
4804	59.61	-3.59	56.02	74	-17.98	V	PK
4804	43.68	-3.59	40.09	54	-13.91	V	AV
7206	65.60	-0.52	65.08	74	-8.92	V	PK
7206	43.17	-0.52	42.65	54	-11.35	V	AV
Middle Channel-2440MHz							
4880	56.35	-3.49	52.86	74	-21.14	H	PK
4880	45.62	-3.49	42.13	54	-11.87	H	AV
7320	55.76	-0.47	55.29	74	-18.71	H	PK
7320	41.86	-0.47	41.39	54	-12.61	H	AV
4880	64.76	-3.49	61.27	74	-12.73	V	PK
4880	43.19	-3.49	39.70	54	-14.30	V	AV
7320	60.88	-0.47	60.41	74	-13.59	V	PK
7320	44.55	-0.47	44.08	54	-9.92	V	AV
High Channel-2480MHz							
4960	61.46	-3.41	58.05	74	-15.95	H	PK
4960	45.44	-3.41	42.03	54	-11.97	H	AV
7440	57.15	-0.42	56.73	74	-17.27	H	PK
7440	42.80	-0.42	42.38	54	-11.62	H	AV
4960	60.95	-3.41	57.54	74	-16.46	V	PK
4960	46.39	-3.41	42.98	54	-11.02	V	AV
7440	62.80	-0.42	62.38	74	-11.62	V	PK
7440	43.83	-0.42	43.41	54	-10.59	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074 D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW $\geq$ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


➤ Radiated test

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

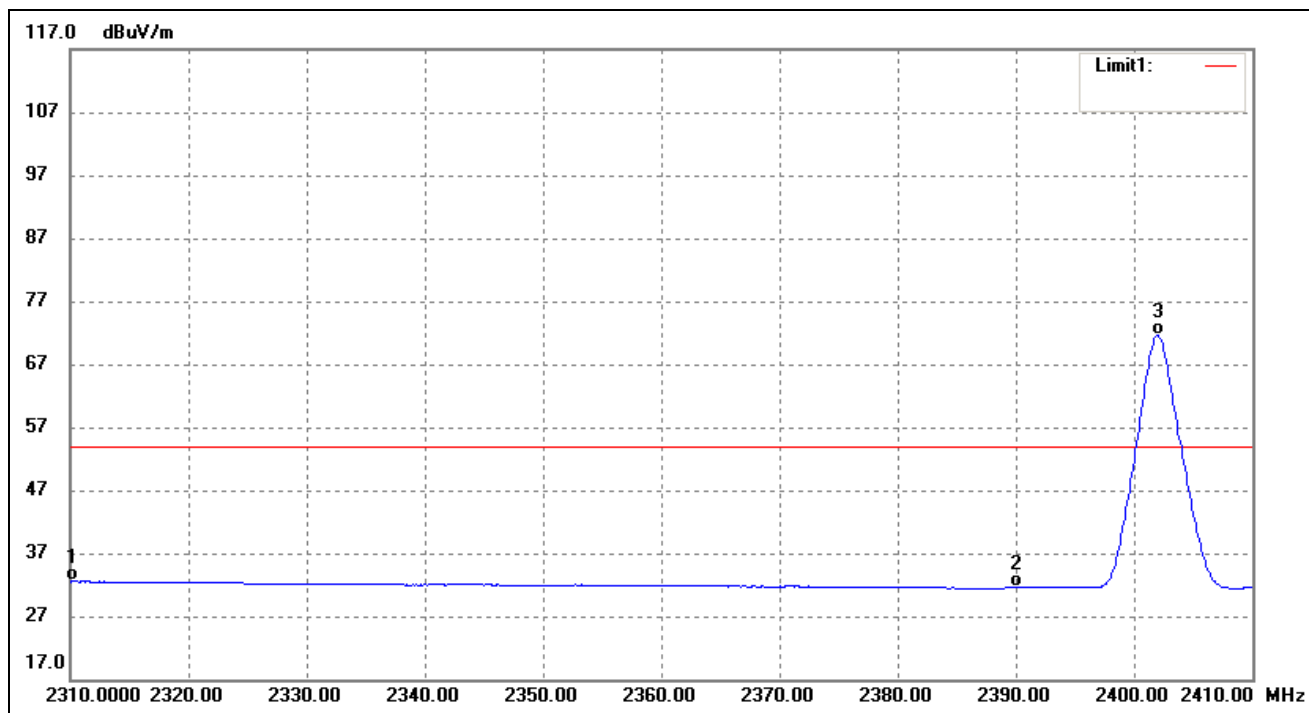

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.82	-5.28	32.54	54.00	-21.46	Average Detector
	2310.000	50.25	-5.28	44.97	74.00	-29.03	Peak Detector
2	2390.000	37.70	-6.12	31.58	54.00	-22.42	Average Detector
	2390.000	50.33	-6.12	44.21	74.00	-29.79	Peak Detector
3	2402.000	77.81	-6.24	71.57	/	/	Average Detector
	2402.100	89.70	-6.24	83.46	/	/	Peak Detector



Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

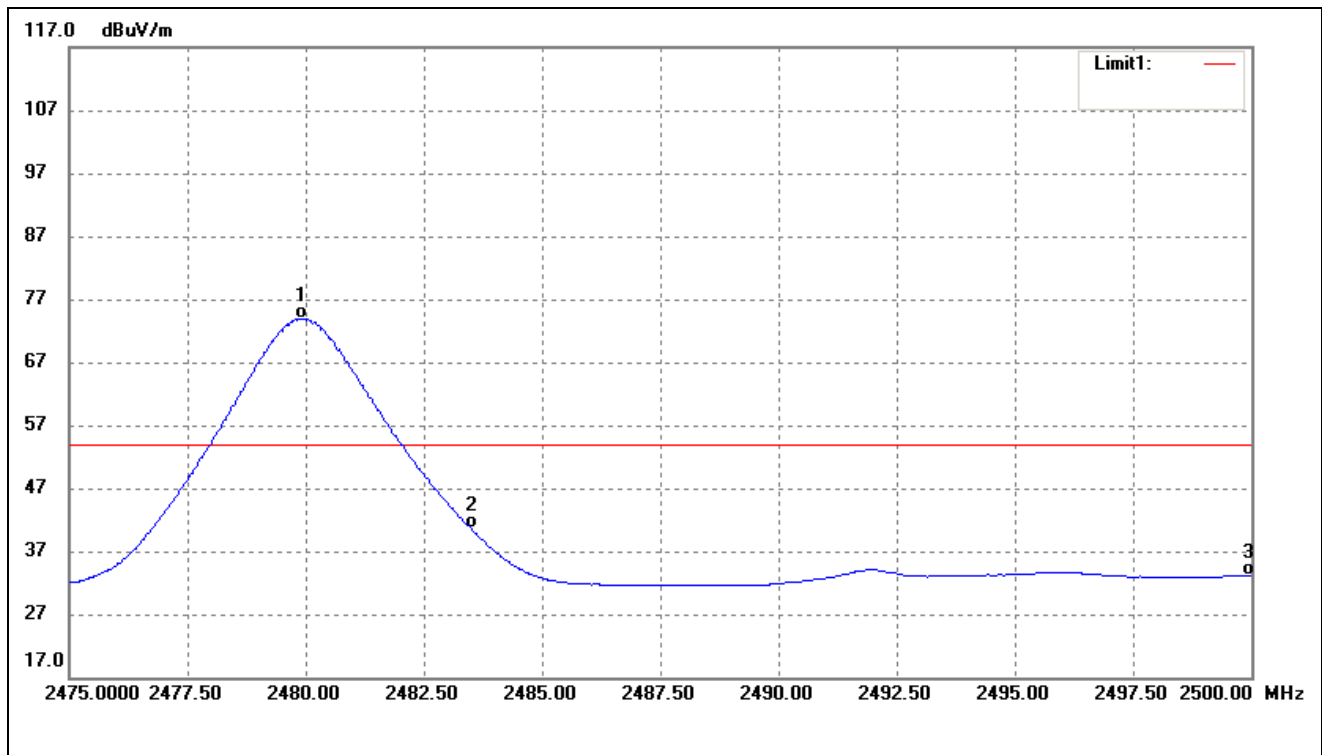



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.900	80.03	-6.08	73.95	/	/	Average Detector
	2479.775	92.43	-6.08	86.35	/	/	Peak Detector
2	2483.500	46.64	-6.08	40.56	54.00	-13.44	Average Detector
	2483.500	55.55	-6.08	49.47	74.00	-24.53	Peak Detector
3	2500.000	39.14	-6.04	33.10	54.00	-20.90	Average Detector
	2500.000	54.19	-6.04	48.15	74.00	-25.85	Peak Detector

➤ Conducted test



Low

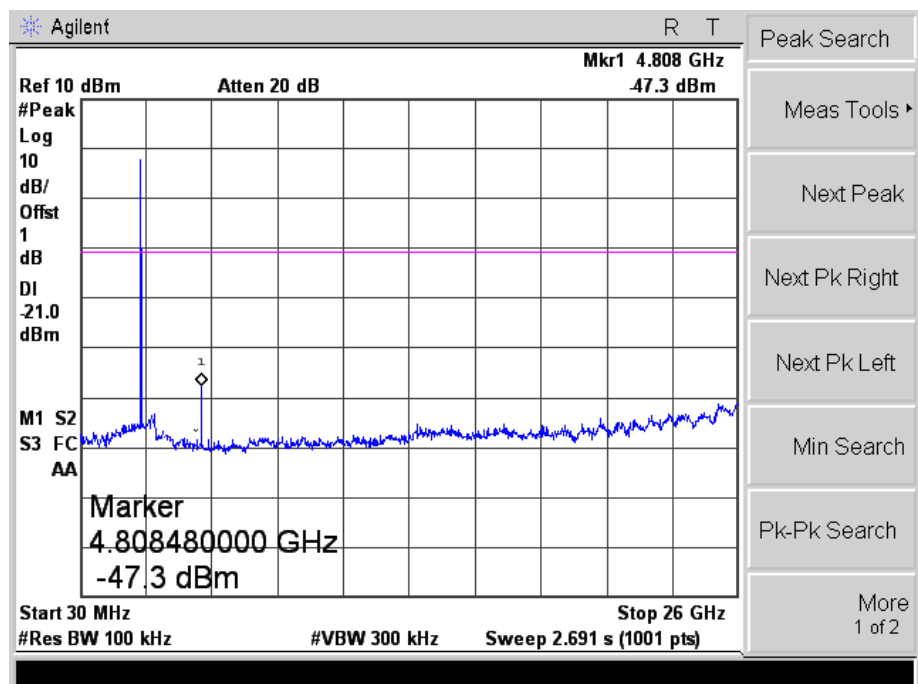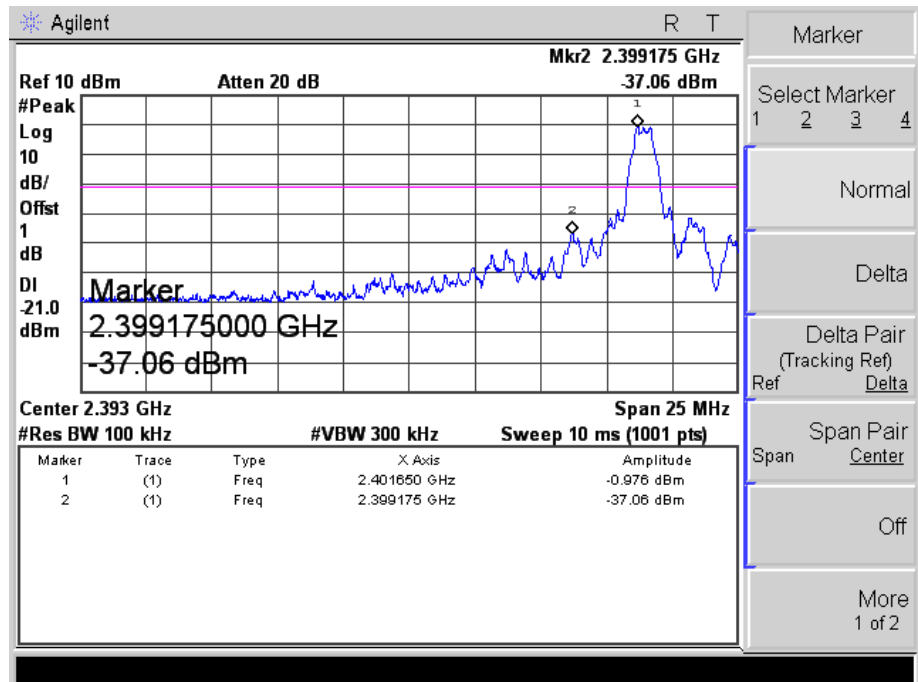

Middle

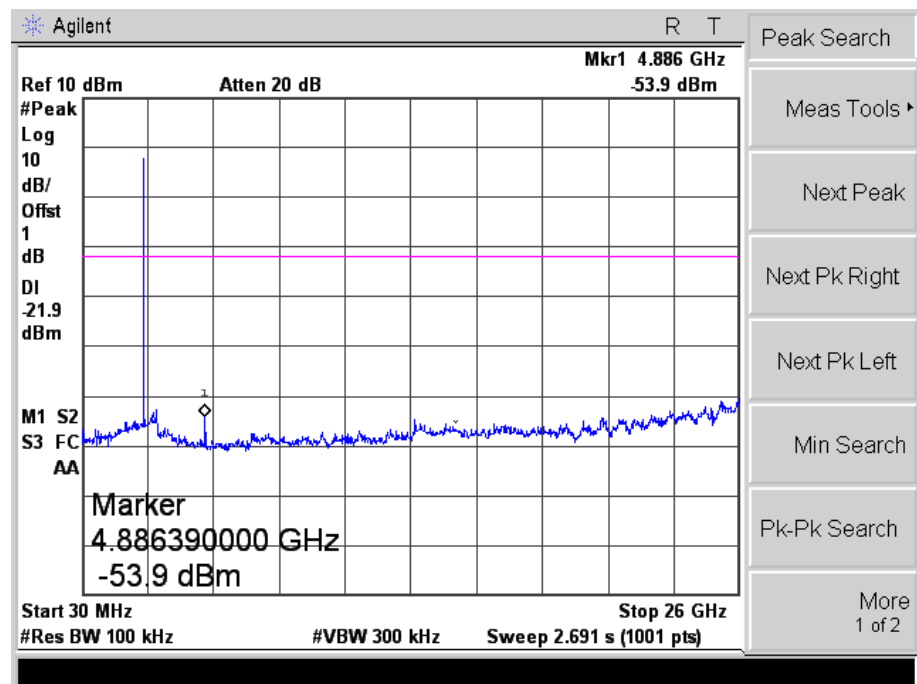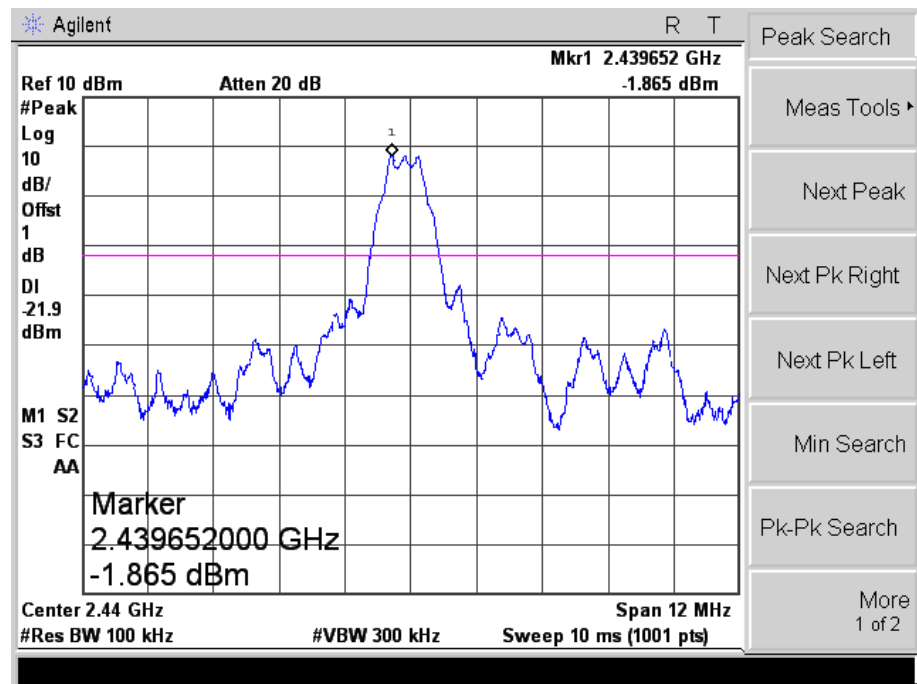

High

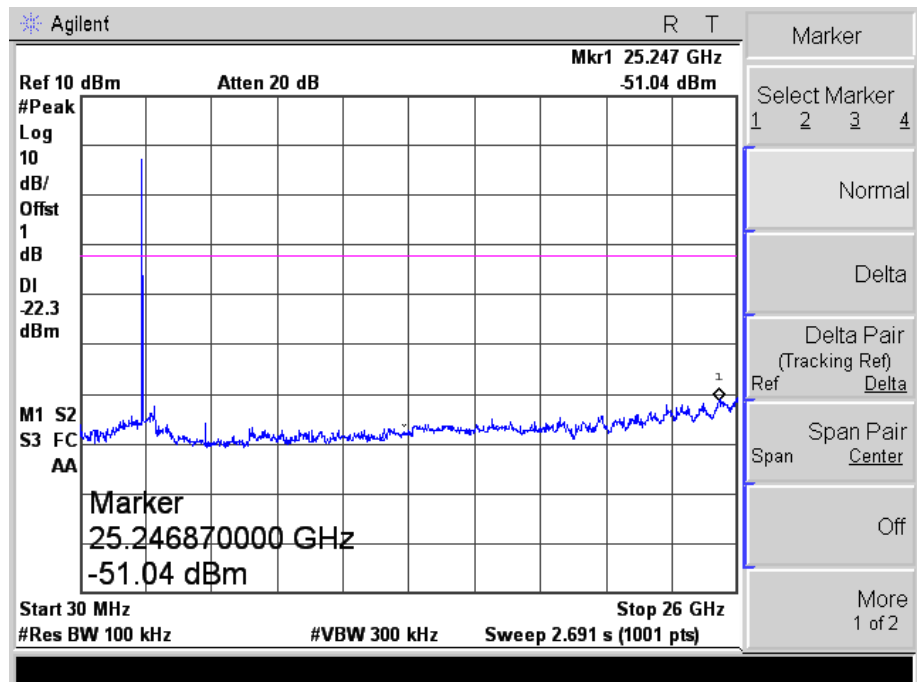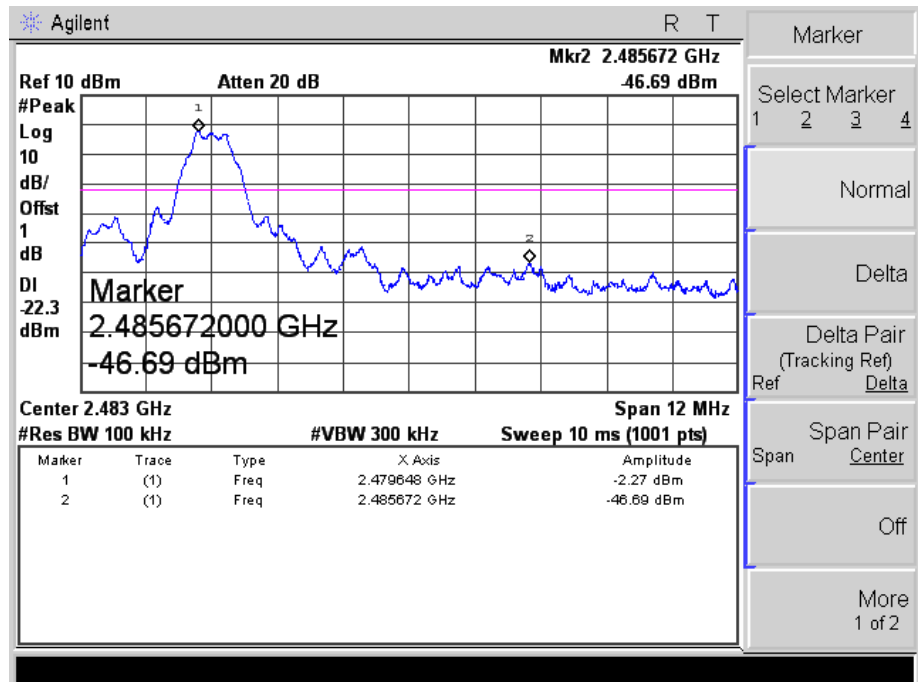

***** END OF REPORT *****