



BUREAU
VERITAS

Test Report No.: RF130508N028



Test Lab
Cert 2951.01

TEST REPORT

Applicant	Guillemot Corporation S. A.
Address	Place Du Granier – B.P. 97143, 35571 CHANTEPIE CEDEX, FRANCE

Manufacturer or Supplier	--
Address	--
Product	Speaker
Brand Name	Hercules, WAE
Model	BTP03
Additional Model & Model Difference	N/A
Date of tests	May 08 ~ May 23, 2013

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C (Section 15.249)

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Glyn He
Project Engineer / EMC Department

Approved by Sam Tung
Manager / EMC Department

Date: May 27, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD 3

1 SUMMARY OF TEST RESULTS..... 4

2 MEASUREMENT UNCERTAINTY 4

3 GENERAL INFORMATION 5

3.1 GENERAL DESCRIPTION OF EUT 5

3.2 DESCRIPTION OF TEST MODES 6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 7

3.4 DESCRIPTION OF SUPPORT UNITS 8

4 TEST TYPES AND RESULTS..... 9

4.1 CONDUCTED EMISSION MEASUREMENT 9

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 9

4.1.2 TEST INSTRUMENTS..... 9

4.1.3 TEST PROCEDURES 10

4.1.4 DEVIATION FROM TEST STANDARD 10

4.1.5 TEST SETUP11

4.1.6 EUT OPERATING CONDITIONS11

4.1.7 TEST RESULTS 12

4.2 RADIATED EMISSION MEASUREMENT 14

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 14

4.2.2 TEST INSTRUMENTS 15

4.2.3 TEST PROCEDURES..... 16

4.2.4 DEVIATION FROM TEST STANDARD 16

4.2.5 TEST SETUP 17

4.2.6 EUT OPERATING CONDITIONS..... 17

4.2.7 TEST RESULTS..... 18

4.3 20dB BANDWIDTH MEASUREMENT 29

4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT 29

4.3.2 TEST INSTRUMENTS 29

4.3.3 TEST PROCEDURE 29

4.3.4 DEVIATION FROM TEST STANDARD 29

4.3.5 TEST SETUP 30

4.3.6 EUT OPERATING CONDITIONS 30

4.3.7 TEST RESULTS 31

5 PHOTOGRAPHS OF THE TEST CONFIGURATION 37

**6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE
EUT BY THE LAB..... 38**



BUREAU
VERITAS

Test Report No.: RF130508N028

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RC130508N028	Original release	May 27, 2013



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	Compliant
§15.207 (a)	Conducted Emission	PASS	Compliant
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44dB
Radiated emissions	30MHz ~1GHz	3.64dB
	1GHz ~ 18GHz	2.2dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Speaker
MODEL NO.	BTP03
FCC ID	NAM5059946
NOMINAL VOLTAGE	DC 5V from adapter or host equipment DC 3.7V from battery
MODULATION TECHNOLOGY	FHSS, DTS
MODULATION TYPE	GFSK, 8DPSK, $\pi/4$ DQPSK, BT-LE(GFSK) for DTS
OPERATING FREQUENCY	2402-2480MHz
ANTENNA TYPE	Integral PCB Antenna with 0dBi antenna gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: Shielded, Detachable 1.0m

NOTE:

1. The EUT was powered by the following adapter:

ADAPTER	
BRAND:	GVE
MODEL:	GM-050200
INPUT:	AC 100-240V, 50/60Hz, 0.5A
OUTPUT:	DC 5V, 2A
DC LINE:	Unshielded, non-detachable, 1.8m

2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on X axis for radiated emission. The EUT was tested under the following modes, and the final worst is marked in boldface and recorded in the report.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
A	-	-	-	-	Battery (Powered by battery)
B	-	-	-	√	Charging (Powered by PC)
C	√	√	√	-	Charging (Powered by Adapter)

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
BW: 20db bandwidth

Following channel(s) was (were) selected for the test as listed below:

For BT2.1+EDR:

TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	PACKET TYPE
Low, Middle, High	FHSS	GFSK	1M	DH1/3/5
Low, Middle, High	FHSS	$\pi/4$ DQPSK	2M	DH1/3/5
Low, Middle, High	FHSS	8DPSK	3M	DH1/3/5

CHANNEL NUMBER	TESTED CHANNEL	TESTED FREQUENCY
0	Low	2402 MHz
39	Middle	2441 MHz
78	High	2480 MHz

After estimating all the combination of every test mode, the result shown as below is the worst case

TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	PACKET TYPE
Low, Middle, High	FHSS	GFSK	1M	DH5
Low, Middle, High	FHSS	8DPSK	3M	DH5



For BT4.0:

Forty channels are provided for BT-LE(GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0,19,39	DSS	GFSK	1

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.249)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Verification). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E6420	9H12FS1	N/A
2	iPhone 4	APPLE	A1332	CP7P0NTT79X9TN1	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line :Unshielded, Detachable 1.5m
3	USB Cable: Unshielded, Detachable 1.2m



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1.The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
EMI Test Receiver Rohde&Schwarz	ESU 26	100005	May 14,13	May 13,14
Artificial Mains Network Rohde&Schwarz	ENV216	101173	May 14,13	May 13,14
Artificial Mains Network Rohde&Schwarz	ESH2-Z5	100071	May 14,13	May 13,14
Test software	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA
 2. The test was performed in Dongguan Shielded Room 553.



4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

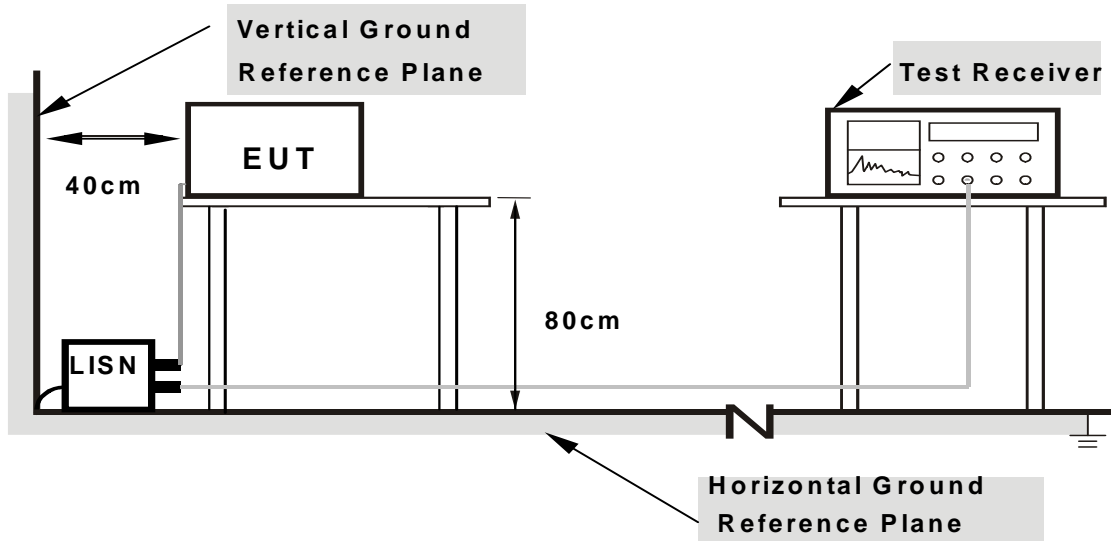

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: GFSK

PHASE	Line 1	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.77393	10.01	35.78	25.35	45.79	35.36	56	46	-10.21	-10.64
2	1.68663	9.9	35.71	25.24	45.61	35.14	56	46	-10.39	-10.86
3	1.92123	9.9	30.96	19.51	40.86	29.41	56	46	-15.14	-16.59
4	3.45501	9.88	37.94	26.4	47.82	36.28	56	46	-8.18	-9.72
5	5.4285	9.85	35.72	25.75	45.57	35.6	60	50	-14.43	-14.4
6	25.32649	10.81	43.99	32.7	54.8	43.51	60	50	-5.2	-6.49

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

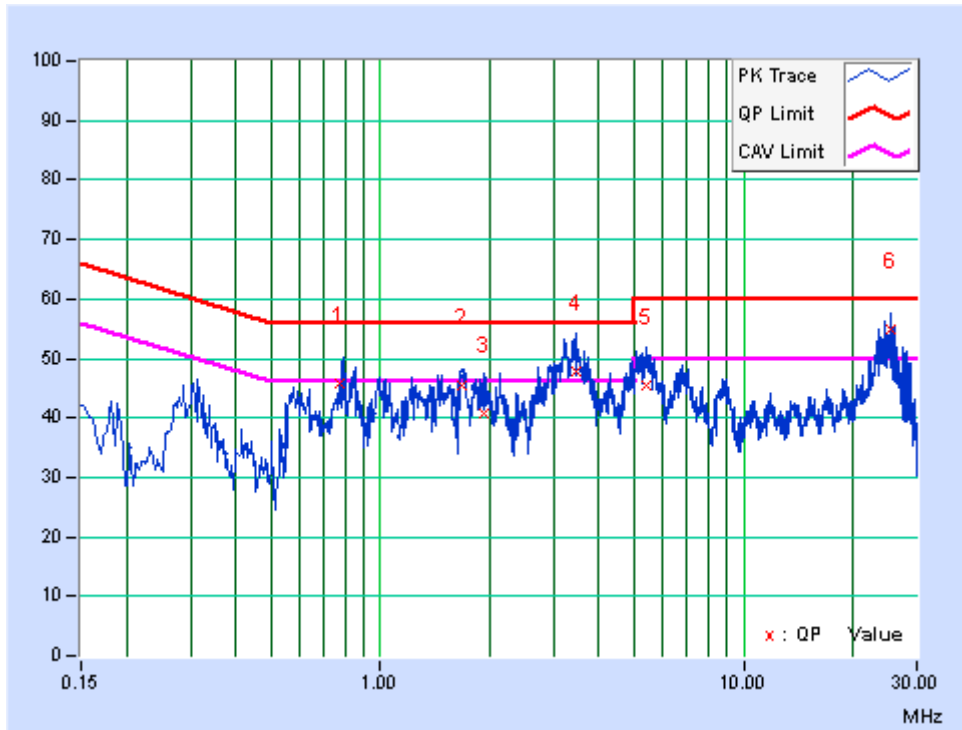




PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.56055	10.29	36.05	23.52	46.34	33.81	56	46	-9.66	-12.19
2	0.82643	9.8	37.56	25.07	47.36	34.87	56	46	-8.64	-11.13
3	1.69836	9.54	38.96	26.82	48.5	36.36	56	46	-7.5	-9.64
4	3.32101	9.56	37.01	28.29	46.57	37.85	56	46	-9.43	-8.15
5	5.233	9.69	39.77	29.14	49.46	38.83	60	50	-10.54	-11.17
6	24.92767	10.79	42.17	30.58	52.96	41.37	60	50	-7.04	-8.63

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

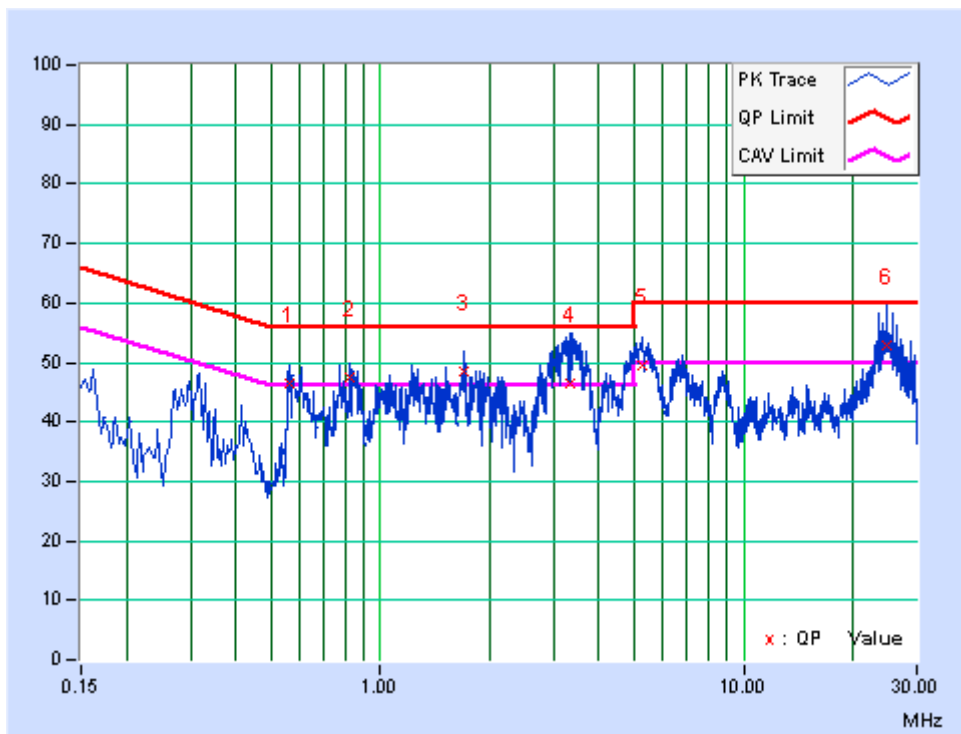



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	Apr. 24,13	Apr. 23,14
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 14,13	May 13,14
Bilog Antenna (25MHz-2GHz)	Teseq	CBL 6111D	27089	Jul. 16,12	Jul. 15,13
Bilog Antenna	Teseq	CBL 6111D	25757	Nov. 22,12	Nov. 21,13
Horn Antenna (1GHz -18GHz)	EMCO	3117	00062558	Oct.18,12	Oct.17,13
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 02,12	Nov.01,13
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14,13	May 13,14
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8 .8m	NSEMC006	Mar. 24,13	Mar. 23,14
Digital Multimeter	FLUKE	15B	A1220010D G	Oct. 31,12	Oct. 30,13
Test Software	ADT	ADT_Radiated _V7.6.15	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA.

2. The test was performed in 10m Chamber



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation



4.2.5 TEST SETUP

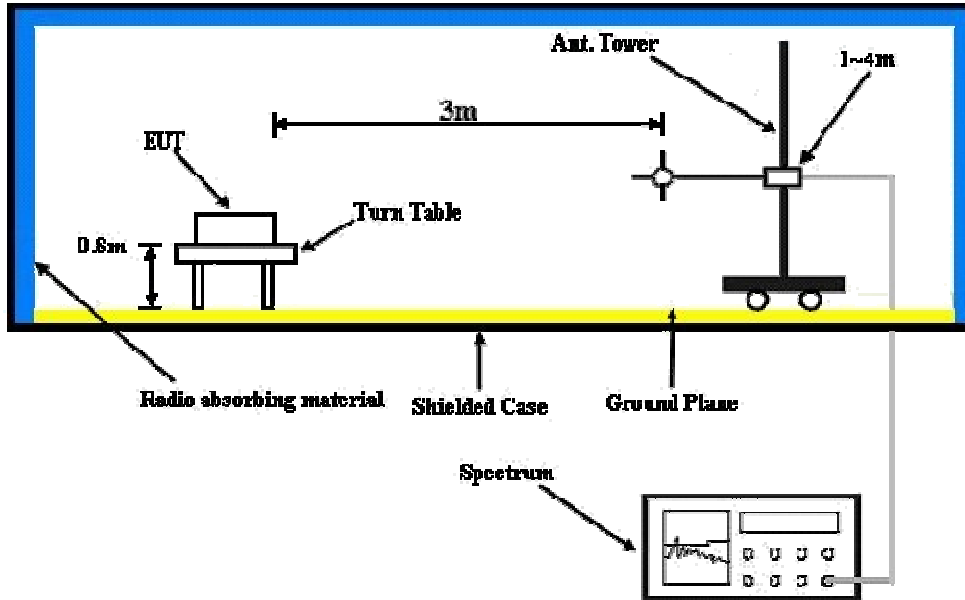

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.



4.2.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA: GFSK

CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	67.09	28.6 QP	40.0	-11.5	1.30 H	211	21.54	7.01
2	99.43	33.3 QP	43.5	-10.3	1.15 H	194	22.09	11.16
3	167.34	23.8 QP	43.5	-19.7	1.93 H	282	12.54	11.30
4	240.11	25.1 QP	46.0	-20.9	1.48 H	231	11.74	13.33
5	366.24	27.0 QP	46.0	-19.0	1.65 H	251	9.42	17.58
6	463.26	26.1 QP	46.0	-20.0	2.14 H	307	5.55	20.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

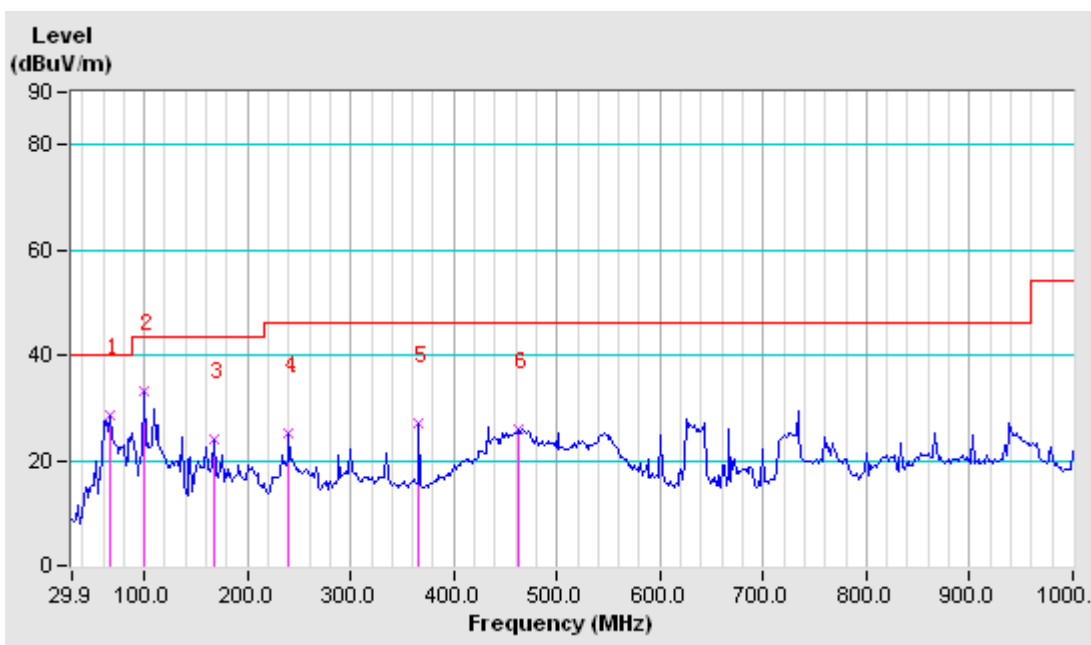




CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.43	32.3 QP	43.5	-11.3	1.00 V	321	21.09	11.16
2	133.39	28.3 QP	43.5	-15.2	1.01 V	295	15.29	13.03
3	172.20	23.6 QP	43.5	-19.9	1.09 V	279	12.31	11.25
4	199.69	23.7 QP	43.5	-19.8	2.10 V	164	12.73	10.99
5	447.09	26.2 QP	46.0	-19.8	1.23 V	263	6.07	20.09
6	484.28	26.1 QP	46.0	-20.0	1.62 V	219	5.21	20.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

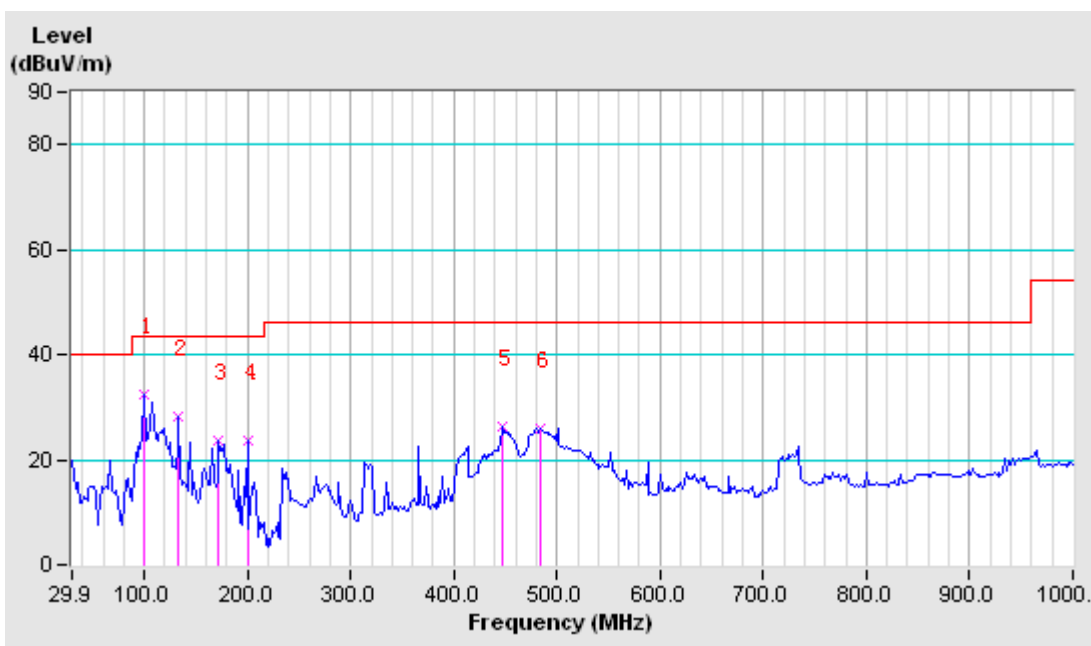



ABOVE 1GHZ WORST-CASE DATA: GFSK DH5

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
TEST VOLTAGE	DC 5V by Notebook	DETECTOR FUNCTION	Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	48.3 PK	74.0	-25.7	1.00 H	141	11.03	37.27
2	2400.00	18.2 AV	54.0	-35.8	1.00 H	141	-19.07	37.27
3	*2402.00	83.9 PK	114.0	-30.1	1.00 H	141	46.63	37.27
4	*2402.00	53.8 AV	94.0	-40.2	1.00 H	141	16.53	37.27
5	4804.00	55.6 PK	74.0	-18.4	1.25 H	323	13.99	41.61
6	4804.00	25.5 AV	54.0	-28.5	1.25 H	323	-16.11	41.61

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	49.3 PK	74.0	-24.7	1.00 V	250	12.03	37.27
2	2400.00	19.2 AV	54.0	-34.8	1.00 V	250	-18.07	37.27
3	*2402.00	84.8 PK	114.0	-29.2	1.00 V	252	47.53	37.27
4	*2402.00	54.7 AV	94.0	-39.3	1.00 V	252	17.43	37.27
5	4804.00	55.8 PK	74.0	-18.2	1.00 V	185	14.19	41.61
6	4804.00	25.7 AV	54.0	-28.3	1.00 V	185	-15.91	41.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1dB
7. Average value = peak reading + 20log(duty cycle).



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
TEST VOLTAGE	DC 5V by Notebook	DETECTOR FUNCTION	Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	84.4 PK	114.0	-29.6	1.00 H	145	47.06	37.34
2	*2441.00	54.3 AV	94.0	-39.7	1.00 H	145	16.96	37.34
3	4882.00	58.7 PK	74.0	-15.3	1.20 H	320	17.00	41.70
4	4882.00	28.6 AV	54.0	-25.4	1.20 H	320	-13.10	41.70
5	7323.00	53.4 PK	74.0	-20.6	1.04 H	130	7.61	45.79
6	7323.00	23.3 AV	54.0	-30.7	1.04 H	130	-22.49	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	85.3 PK	114.0	-28.7	1.00 V	251	47.96	37.34
2	*2441.00	55.2 AV	94.0	-38.8	1.00 V	251	17.86	37.34
3	4882.00	56.4 PK	74.0	-17.6	1.02 V	190	14.70	41.70
4	4882.00	26.3 AV	54.0	-27.7	1.02 V	190	-15.40	41.70
5	7323.00	52.8 PK	74.0	-21.2	1.00 V	217	7.01	45.79
6	7323.00	22.7 AV	54.0	-31.3	1.00 V	217	-23.09	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
TEST VOLTAGE	DC 5V by Notebook	DETECTOR FUNCTION	Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	84.8 PK	114.0	-29.2	1.00 H	150	47.39	37.41
2	*2480.00	54.7 AV	94.0	-39.3	1.00 H	150	17.29	37.41
3	2483.50	46.8 PK	74.0	-27.2	1.00 H	150	9.39	37.41
4	2483.50	16.7 AV	54.0	-37.3	1.00 H	150	-20.71	37.41
5	4960.00	58.4 PK	74.0	-15.6	1.10 H	318	16.60	41.80
6	4960.00	28.3 AV	54.0	-25.7	1.10 H	318	-13.50	41.80
7	7440.00	53.7 PK	74.0	-20.3	1.00 H	128	7.88	45.82
8	7440.00	23.6 AV	54.0	-30.4	1.00 H	128	-22.22	45.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	85.9 PK	114.0	-28.1	1.00 V	255	48.49	37.41
2	*2480.00	55.8 AV	94.0	-38.2	1.00 V	255	18.39	37.41
3	2483.50	47.5 PK	74.0	-26.5	1.00 V	255	10.09	37.41
4	2483.50	17.4 AV	54.0	-36.6	1.00 V	255	-20.01	37.41
5	4960.00	57.4 PK	74.0	-16.6	1.05 V	187	15.60	41.80
6	4960.00	27.3 AV	54.0	-26.7	1.05 V	187	-14.50	41.80
7	7440.00	53.6 PK	74.0	-20.4	1.00 V	220	7.78	45.82
8	7440.00	23.5 AV	54.0	-30.5	1.00 V	220	-22.32	45.82

REMARKS:

- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
- Average value = peak reading + $20\log(\text{duty cycle})$



BT_8DPSK DH5

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
TEST VOLTAGE	DC 5V by Notebook	DETECTOR FUNCTION	Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	47.9 PK	74.0	-26.1	1.00 H	143	10.63	37.27
2	2400.00	17.8 AV	54.0	-36.2	1.00 H	143	-19.47	37.27
3	*2402.00	83.5 PK	114.0	-30.5	1.00 H	143	46.23	37.27
4	*2402.00	53.4 AV	94.0	-40.6	1.00 H	143	16.13	37.27
5	4804.00	55.4 PK	74.0	-18.6	1.22 H	326	13.79	41.61
6	4804.00	25.3 AV	54.0	-28.7	1.22 H	326	-16.31	41.61

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	48.8 PK	74.0	-25.2	1.00 V	254	11.53	37.27
2	2400.00	18.7 AV	54.0	-35.3	1.00 V	254	-18.57	37.27
3	*2402.00	84.2 PK	114.0	-29.8	1.00 V	254	46.93	37.27
4	*2402.00	54.1 AV	94.0	-39.9	1.00 V	254	16.83	37.27
5	4804.00	55.4 PK	74.0	-18.6	1.00 V	190	13.79	41.61
6	4804.00	25.3 AV	54.0	-28.7	1.00 V	190	-16.31	41.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
TEST VOLTAGE	DC 5V by Notebook	DETECTOR FUNCTION	Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	84.1 PK	114.0	-29.9	1.00 H	152	46.76	37.34
2	*2441.00	54.0 AV	94.0	-40.0	1.00 H	152	16.66	37.34
3	4882.00	56.2 PK	74.0	-17.8	1.16 H	324	14.50	41.70
4	4882.00	26.1 AV	54.0	-27.9	1.16 H	324	-15.60	41.70
5	7323.00	52.8 PK	74.0	-21.2	1.09 H	136	7.01	45.79
6	7323.00	22.7 AV	54.0	-31.3	1.09 H	136	-23.09	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	84.9 PK	114.0	-29.1	1.00 V	148	47.56	37.34
2	*2441.00	54.8 AV	94.0	-39.2	1.00 V	148	17.46	37.34
3	4882.00	56.3 PK	74.0	-17.7	1.00 V	188	14.60	41.70
4	4882.00	26.2 AV	54.0	-27.8	1.00 V	188	-15.50	41.70
5	7323.00	53.1 PK	74.0	-20.9	1.24 V	220	7.31	45.79
6	7323.00	23.0 AV	54.0	-31.0	1.24 V	220	-22.79	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
TEST VOLTAGE	DC 5V by Notebook	DETECTOR FUNCTION	Peak (PK) Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	84.6 PK	114.0	-29.4	1.00 H	157	47.19	37.41
2	*2480.00	54.5 AV	94.0	-39.5	1.00 H	157	17.09	37.41
3	2483.50	46.5 PK	74.0	-27.5	1.00 H	157	9.09	37.41
4	2483.50	16.4 AV	54.0	-37.6	1.00 H	157	-21.01	37.41
5	4960.00	57.6 PK	74.0	-16.4	1.07 H	320	15.80	41.80
6	4960.00	27.5 AV	54.0	-26.5	1.07 H	320	-14.30	41.80
7	7440.00	53.4 PK	74.0	-20.6	1.00 H	132	7.58	45.82
8	7440.00	23.3 AV	54.0	-30.7	1.00 H	132	-22.52	45.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	85.6 PK	114.0	-28.4	1.00 V	258	48.19	37.41
2	*2480.00	55.5 AV	94.0	-38.5	1.00 V	258	18.09	37.41
3	2483.50	47.3 PK	74.0	-26.7	1.00 V	258	9.89	37.41
4	2483.50	17.2 AV	54.0	-36.8	1.00 V	258	-20.21	37.41
5	4960.00	57.2 PK	74.0	-16.8	1.10 V	182	15.40	41.80
6	4960.00	27.1 AV	54.0	-26.9	1.10 V	182	-14.70	41.80
7	7440.00	52.8 PK	74.0	-21.2	1.03 V	214	6.98	45.82
8	7440.00	22.7 AV	54.0	-31.3	1.03 V	214	-23.12	45.82

REMARKS:

- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.5. " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB.
- Average value = peak reading + 20log(duty cycle).



BT-LE

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	50.4 PK	74.0	-23.6	1.08 H	156	13.13	37.27
2	2400.00	29.4 AV	54.0	-24.6	1.08 H	156	-7.91	37.27
3	*2402.00	90.3 PK	114.0	-23.7	1.08 H	156	53.03	37.27
4	*2402.00	72.2 AV	94.0	-21.8	1.08 H	156	34.88	37.27
5	4804.00	55.1 PK	74.0	-18.9	1.10 H	248	13.49	41.61
6	4804.00	31.2 AV	54.0	-22.8	1.10 H	248	-10.37	41.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	50.8 PK	74.0	-23.2	1.23 V	36	13.53	37.27
2	2400.00	28.4 AV	54.0	-25.6	1.23 V	36	-8.86	37.27
3	*2402.00	90.8 PK	114.0	-23.2	1.23 V	36	53.53	37.27
4	*2402.00	73.6 AV	94.0	-20.4	1.23 V	36	36.35	37.27
5	4804.00	56.2 PK	74.0	-17.8	1.00 V	172	14.59	41.61
6	4804.00	31.4 AV	54.0	-22.6	1.00 V	172	-10.20	41.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	90.4 PK	114.0	-23.6	1.00 H	152	53.06	37.34
2	*2440.00	68.6 AV	94.0	-25.4	1.00 H	152	31.24	37.34
3	4880.00	54.7 PK	74.0	-19.3	1.15 H	250	13.00	41.70
4	4880.00	30.1 AV	54.0	-23.9	1.15 H	250	-11.58	41.70
5	7320.00	60.8 PK	74.0	-13.2	1.00 H	286	15.01	45.79
6	7320.00	43.5 AV	54.0	-10.5	1.00 H	286	-2.27	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	91.2 PK	114.0	-22.8	1.30 V	35	53.86	37.34
2	*2440.00	79.3 AV	94.0	-14.7	1.30 V	35	41.98	37.34
3	4880.00	54.1 PK	74.0	-19.9	1.07 V	180	12.40	41.70
4	4880.00	28.7 AV	54.0	-25.3	1.07 V	180	-13.02	41.70
5	7320.00	60.3 PK	74.0	-13.7	1.16 V	227	14.51	45.79
6	7320.00	44.5 AV	54.0	-9.5	1.16 V	227	-1.27	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.8 PK	114.0	-23.2	1.04 H	146	53.39	37.41
2	*2480.00	73.4 AV	94.0	-20.6	1.04 H	146	36.01	37.41
3	2483.50	49.5 PK	74.0	-24.5	1.04 H	146	12.09	37.41
4	2483.50	26.4 AV	54.0	-27.6	1.04 H	146	-11.01	37.41
5	4960.00	53.8 PK	74.0	-20.2	1.12 H	245	12.00	41.80
6	4960.00	29.5 AV	54.0	-24.5	1.12 H	245	-12.33	41.80
7	7440.00	61.5 PK	74.0	-12.5	1.05 H	290	15.68	45.82
8	7440.00	43.9 AV	54.0	-10.1	1.05 H	290	-1.95	45.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.9 PK	114.0	-22.1	1.28 V	31	54.49	37.41
2	*2480.00	72.5 AV	94.0	-21.5	1.28 V	31	35.09	37.41
3	2483.50	50.1 PK	74.0	-23.9	1.28 V	31	12.69	37.41
4	2483.50	36.2 AV	54.0	-17.8	1.28 V	31	-1.21	37.41
5	4960.00	55.5 PK	74.0	-18.5	1.02 V	175	13.70	41.80
6	4960.00	29.5 AV	54.0	-24.5	1.02 V	175	-12.28	41.80
7	7440.00	60.2 PK	74.0	-13.8	1.10 V	230	14.38	45.82
8	7440.00	44.7 AV	54.0	-9.4	1.10 V	230	-1.17	45.82

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.



4.3 20dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	EMCO	3117	00062558	Oct. 18,12	Oct. 17,13
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 04,11	Jan. 03,14
Spectrum Analyzer	Agilent	E4446A	MY46180622	Apr. 24,13	Apr. 23,14
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14,13	May 13,14
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,12	Nov. 03,13
Test Software	ADT	ADT_Radiated _V7.6.15	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA

2. The test was performed in Dongguan Chamber 10m.

4.2.3 TEST PROCEDURE


The EUT was placed on a turn table which was 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 to 4 m for horizontal and vertical polarizations. The spectrum analyzer was receiving the maximum emission level. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



4.2.5 TEST SETUP

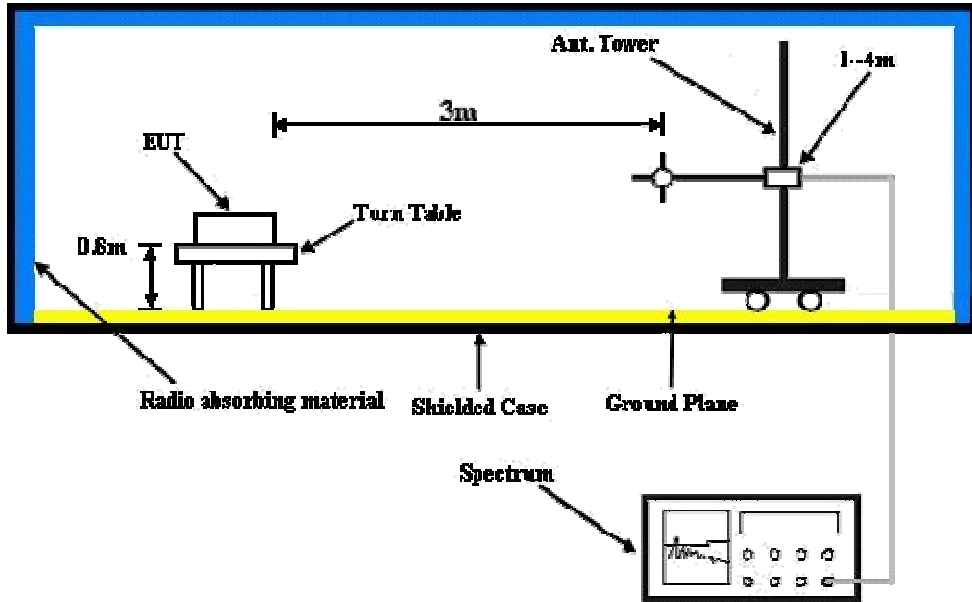

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.2.7 TEST RESULTS

GFSK DH5

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2402	0.79576
Middle	2441	0.93372
High	2480	0.81805

Test Data: Low channel

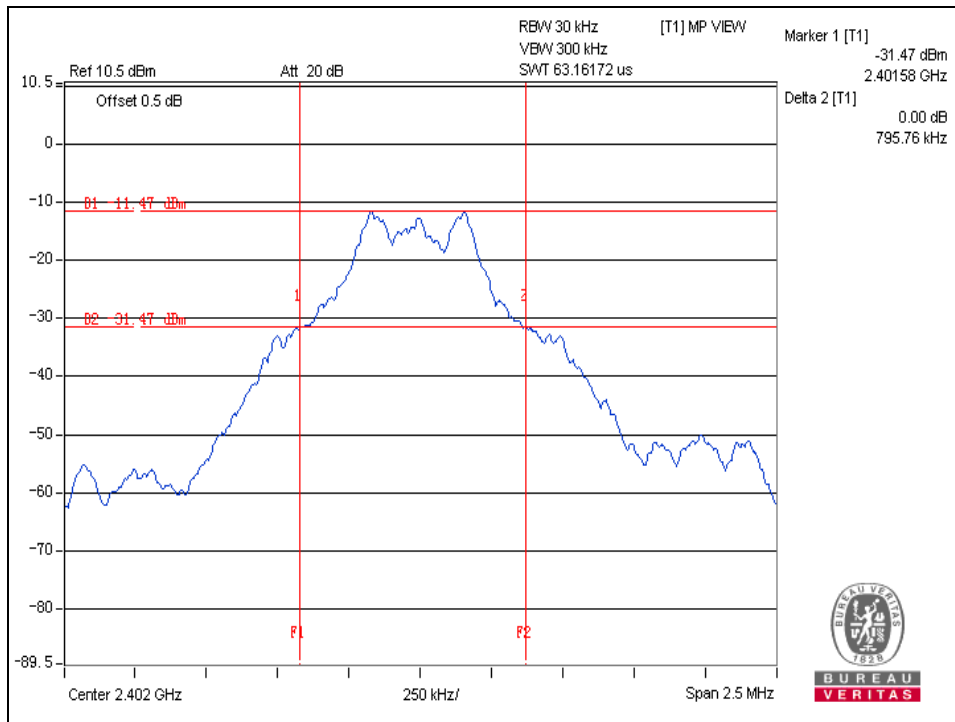





BUREAU VERITAS

Test Report No.: RF130508N028

Test Data: Middle channel

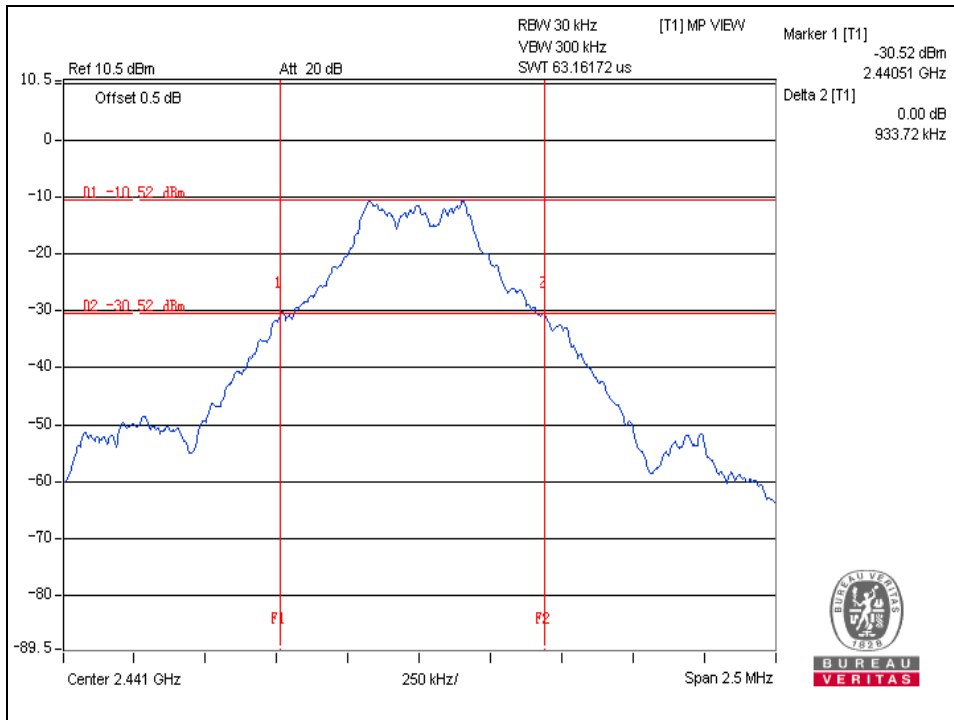

Test Data: High channel

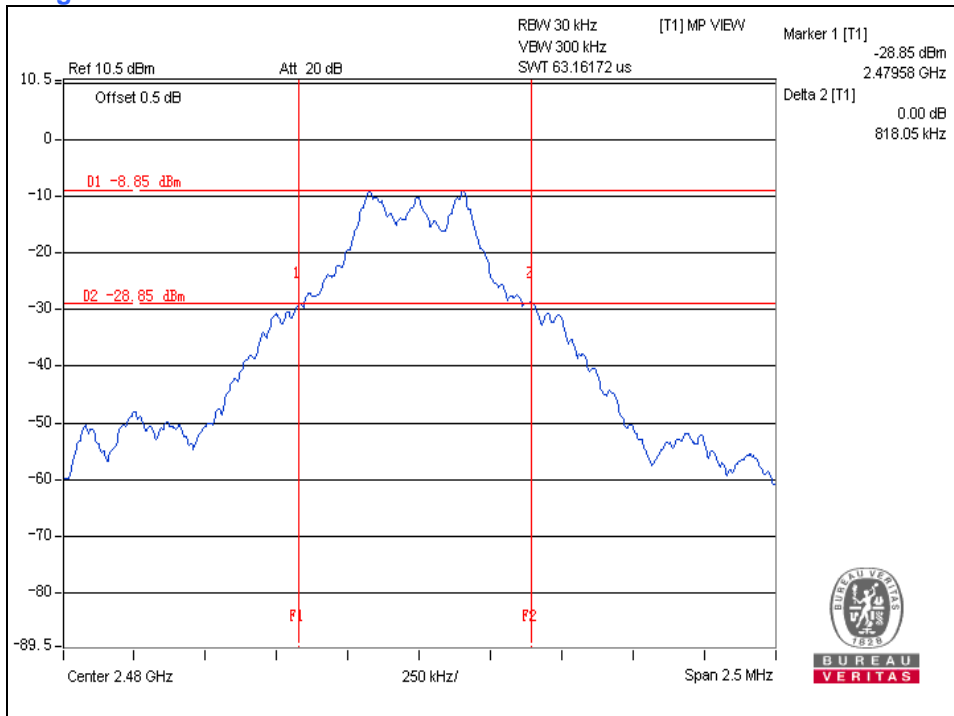

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: RF130508N028

8DPSK DH5

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2402	1.23
Middle	2441	1.22
Hight	2480	1.23

Test Data: Low channel

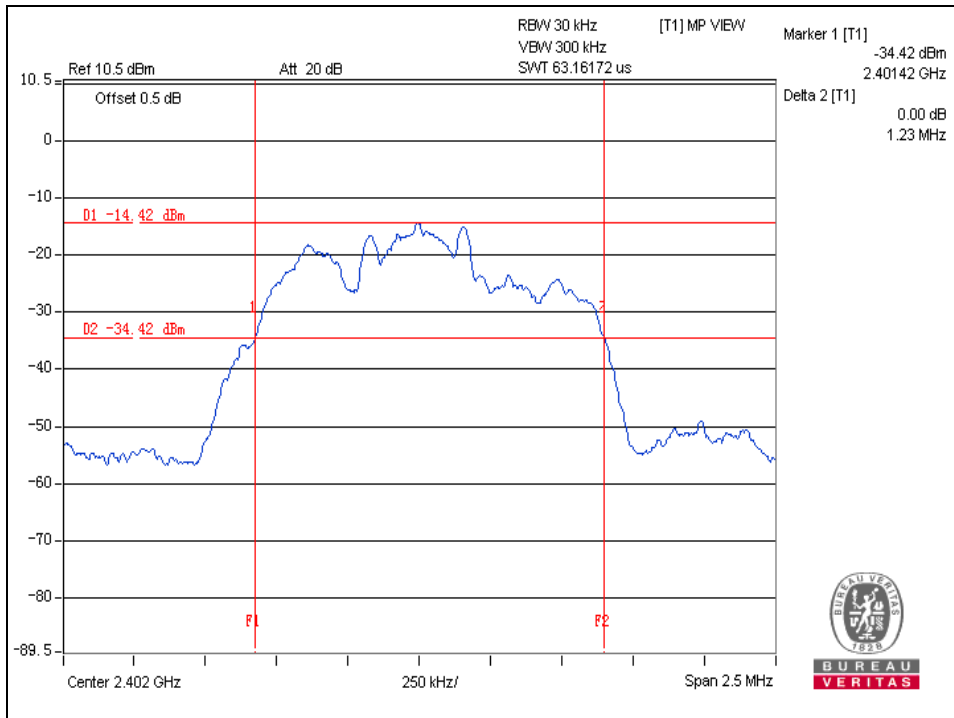





**BUREAU
VERITAS**

Test Report No.: RF130508N028

Test Data: Middle channel

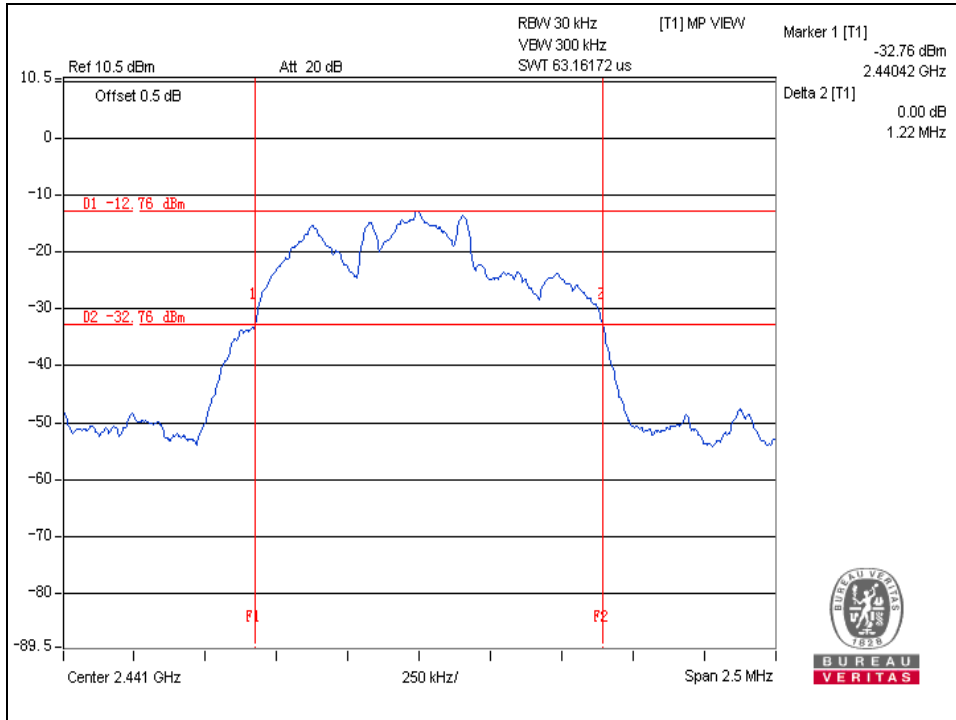

Test Data: High channel

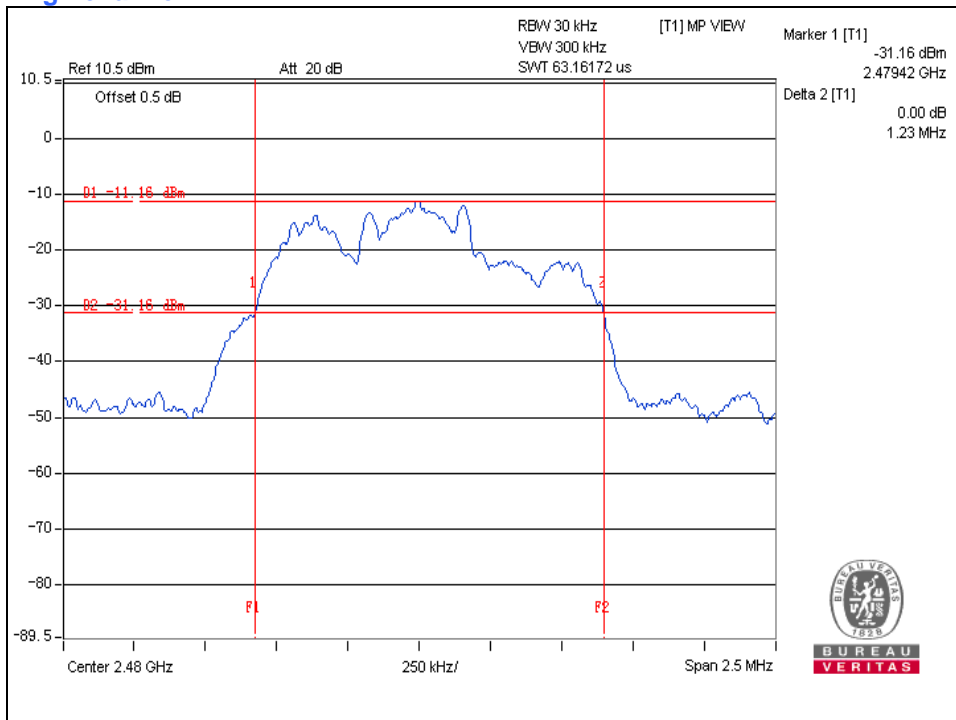

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: RF130508N028

BT-LE

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2402	1.20
Middle	2440	1.20
High	2480	1.20

Test Data: Low channel

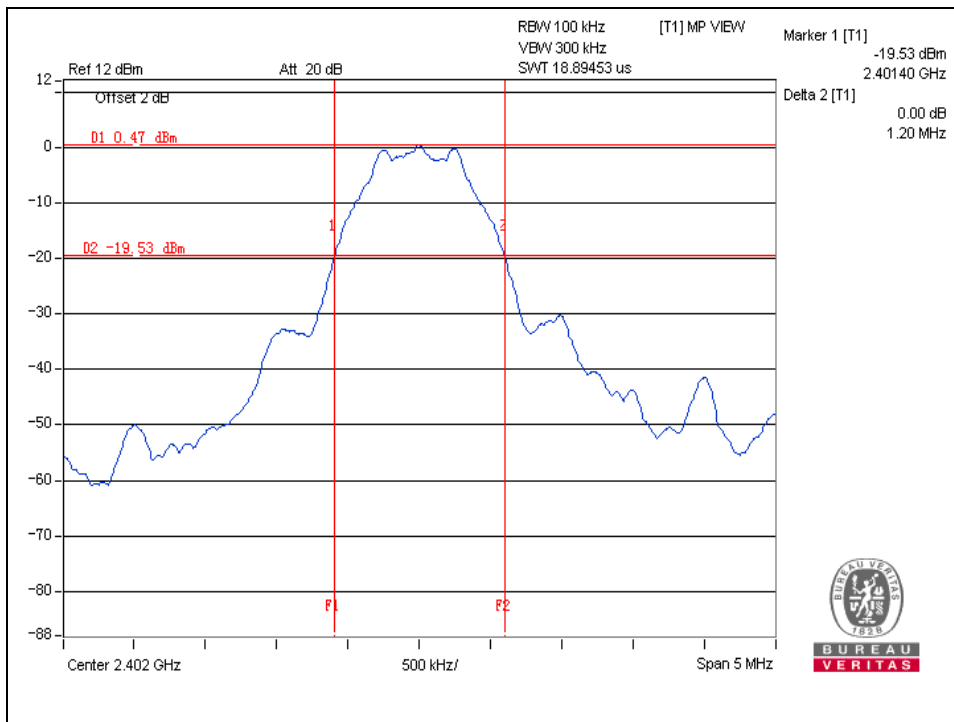





**BUREAU
VERITAS**

Test Report No.: RF130508N028

Test Data: Middle channel

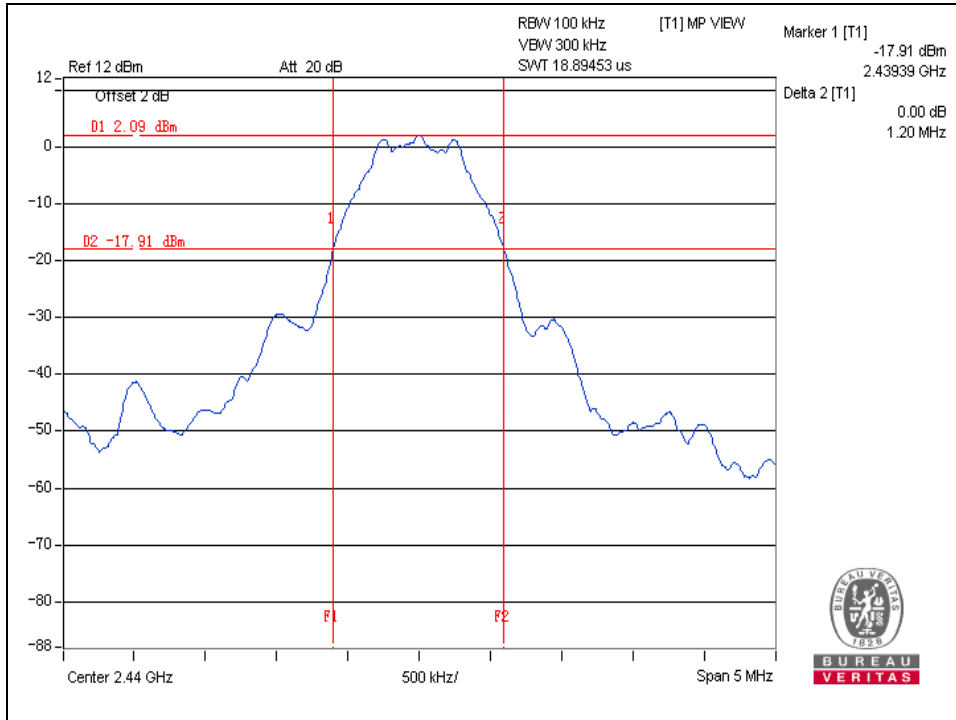

Test Data: High channel

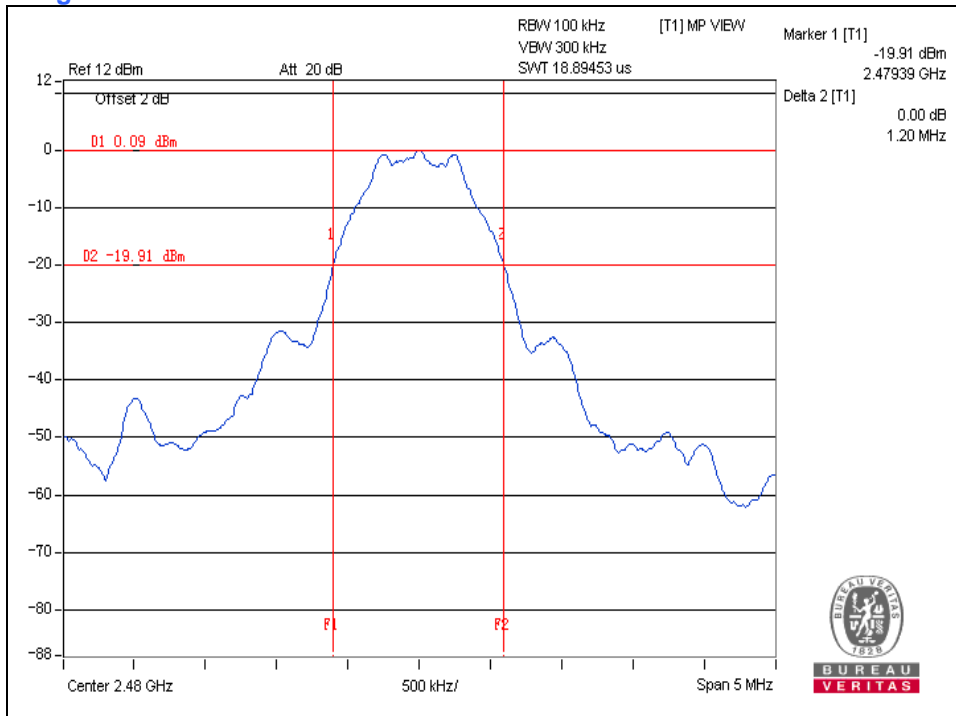

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF130508N028

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF130508N028

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---