



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

433.92 MHz VALVE TRANSMITTER

MODEL NUMBER: 200.0173

FCC ID: NATTX433TV-2

REPORT NUMBER: 05U3630-1

ISSUE DATE: AUGUST 10, 2005

Prepared for
**SMARTIRE SYSTEMS INC.
#150 13151 VANIER PLACE
RICHMOND, BC
CANADA**

Prepared by
**COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
A	8/10/05	Initial Issue	Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY.....	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.3. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.4. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	8
7. LIMITS AND RESULTS.....	9
7.1. <i>20dB BANDWIDTH</i>	<i>9</i>
7.2. <i>MAXIMUM MODULATION PERCENTAGE (M%).....</i>	<i>11</i>
7.3. <i>TRANSMITTER RADIATED EMISSIONS.....</i>	<i>18</i>
7.4. <i>POWERLINE CONDUCTED EMISSIONS</i>	<i>22</i>
8. SETUP PHOTOS.....	23

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SMARTIRE SYSTEMS INC.
#150 13151 VANIER PLACE
RICHMOND, BC
CANADA

EUT DESCRIPTION: 433.92 MHz VALVE TRANSMITTER

MODEL: 200.0173

SERIAL NUMBER: CS 01573

DATE TESTED: AUGUST 4, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

FRANK IBRAHIM
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment Type	433.92 MHz Transmitter
Fundamental Frequency	433.92 MHz
Power Source	3V Battery
Transmitting Time	Periodic \leq 5 seconds

5.2. SOFTWARE AND FIRMWARE

The software that controls the transmitter resides in EEPROM Chipset.

5.3. WORST-CASE CONFIGURATION AND MODE

Continuous transmission mode was investigated, three orthogonal orientations X, Y and Z were investigated and it was determined that X- axis is the worst orientation for horizontal polarization, while, Y- axis is the worst orientation for vertical polarization, worst case means getting the highest fundamental field strength.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

NOT APPLICABLE; there was no support equipment to the EUT.

I/O CABLES

NOT APPLICABLE; there was no support equipment to the EUT.

TEST SETUP

The EUT is stand-alone unit, and it's powered by internal 3 VDC battery.

SETUP DIAGRAM FOR TESTS

The EUT is stand-alone unit, and it's powered by internal 3 VDC battery.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/29/2006
RF Filter Section	HP	85420E	3705A00256	3/29/2006
Bilog Antenna	Sunol Sciences	JB1 Antenna	A121003	3/3/2006
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29301	9/12/2005
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-44	646456	8/17/2005

7. LIMITS AND RESULTS

7.1. 20dB BANDWIDTH

LIMIT

§15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.


20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 100 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

RESULTS

No non-compliance noted:

Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
433.92	462.5	1084.8	-622.3

20dB BANDWIDTH

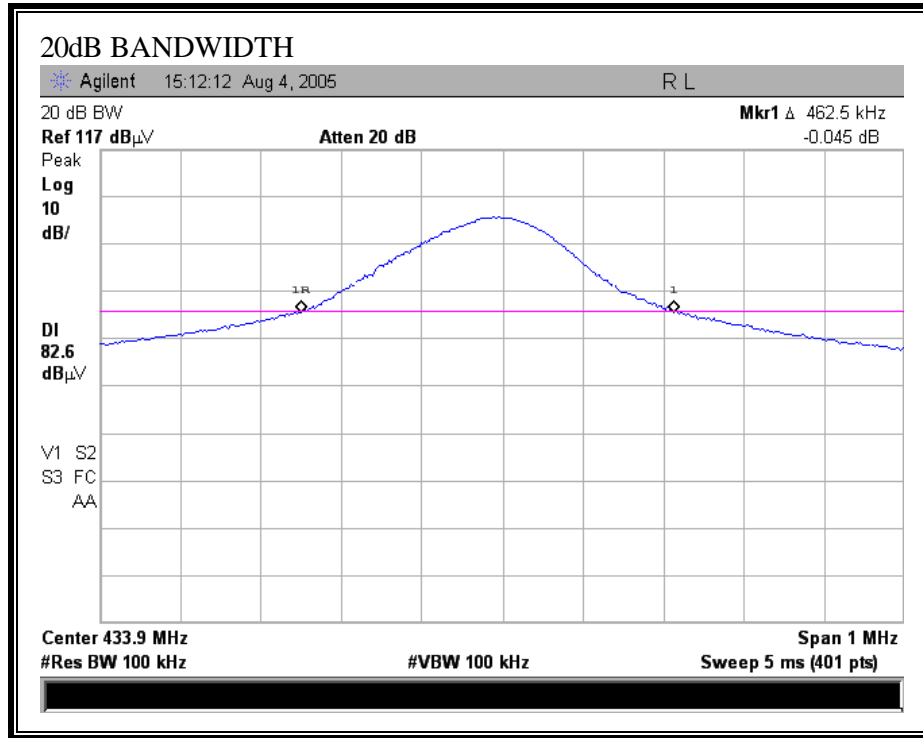

7.2. MAXIMUM MODULATION PERCENTAGE (M%)

LIMIT

§15.35 (c) the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

CALCULATION:

Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is
(# of long pulses * long pulse width) + (# of short pulses * short pulse width) / 100 or T


RESULTS

No non-compliance noted:


MAXIMUM MODULATION PERCENTAGE

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Medium Width (ms)	# of Short Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
69.25	0.4625	1	0.2875	9	0.14	36	0.12	-18.75


ONE PERIOD

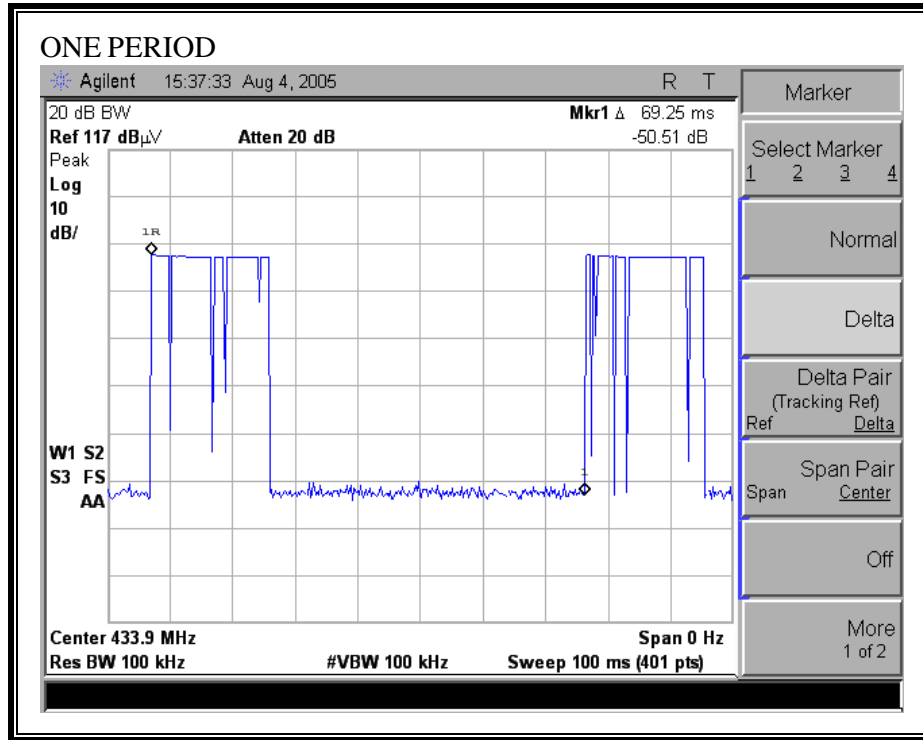


NUMBER OF PULSES

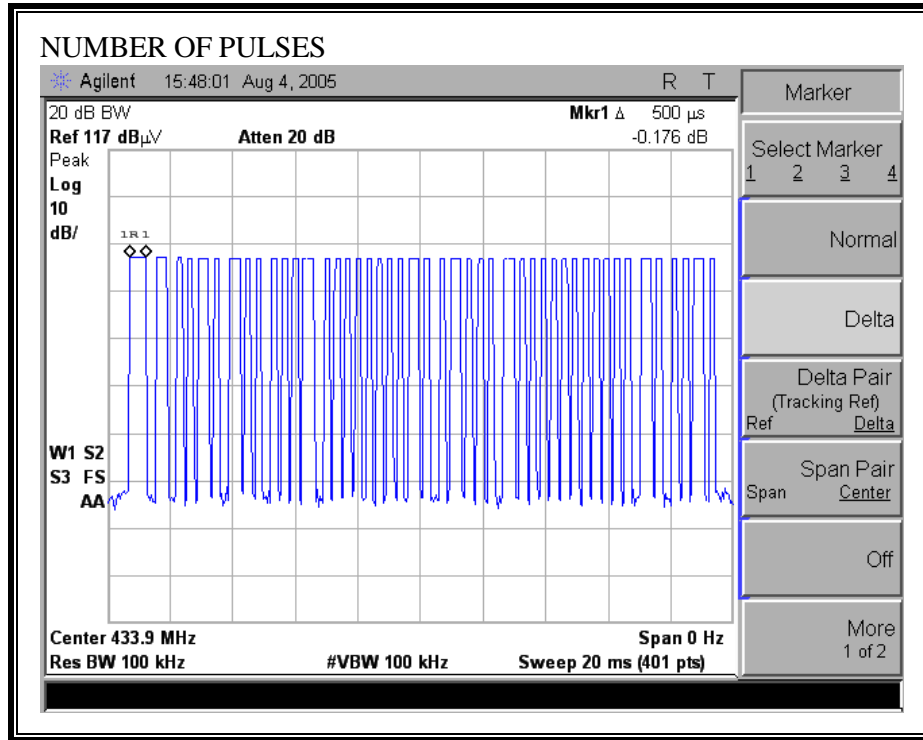


LONG PULSE WIDTH

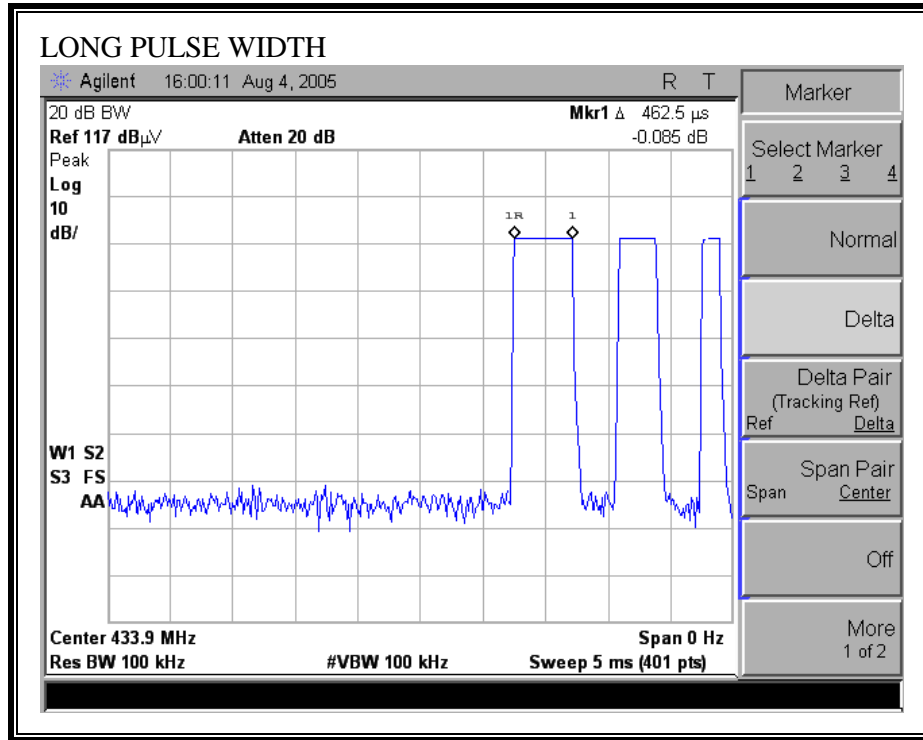

MEDIUM PULSE WIDTH

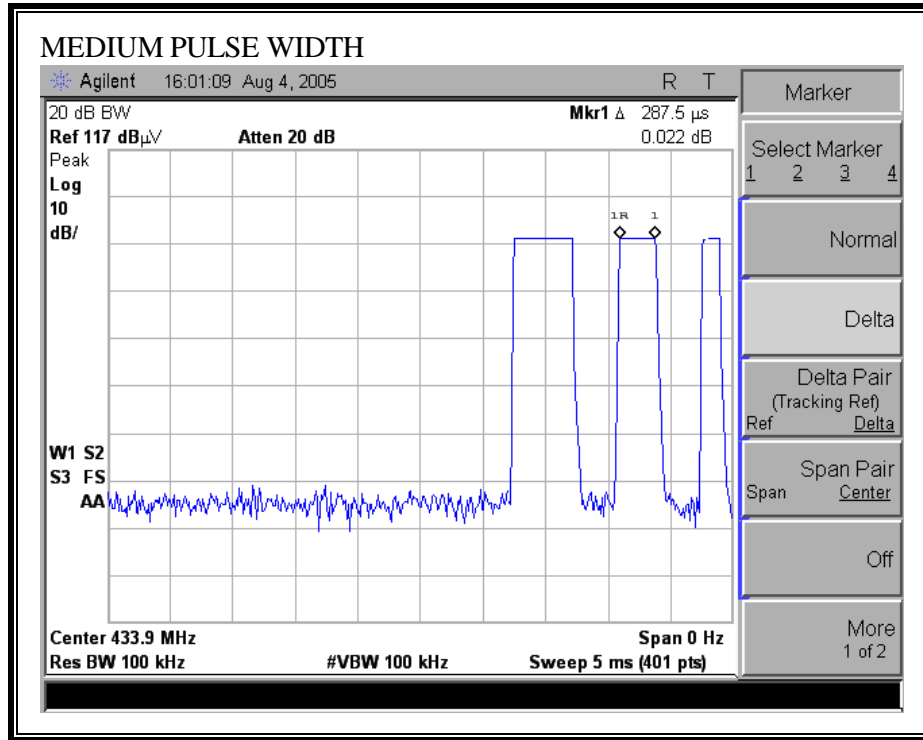

SHORT PULSE WIDTH

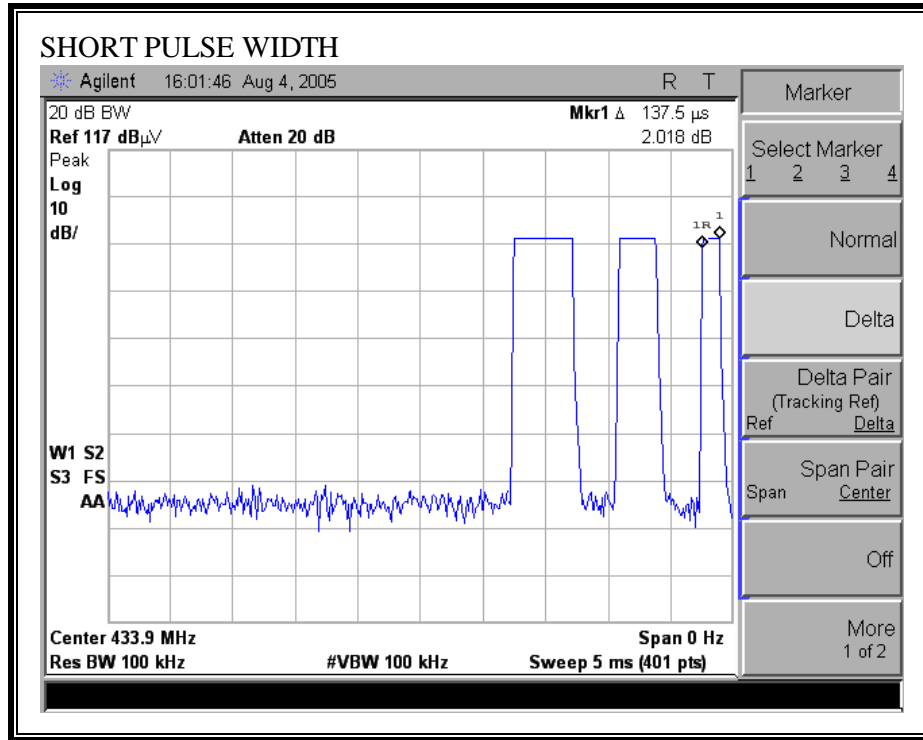

7.3. TRANSMITTER RADIATED EMISSIONS

LIMITS

§15.231 (b) In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 ¹	50 to 150 ¹
174 - 260	1,500	150
260 - 470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

¹ Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE


The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

FUNDAMENTAL & HARMONICS EMISSIONS 30 – 1000 MHz



FCC, VCCI, CISPR, CE, AUSTEL, NZ
 UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001
 PHONE: (408) 463-0885 FAX: (408) 463-0888

Project #: 05U3630-1
Report #: 050804C1
Date & Time: 8/4/2005
Test Engr: Frank Ibrahim

Company: SmarTire
EUT Description: 433.92 MHz Valve Transmitter
Test Configuration: Stand-alone EUT
Type of Test: FCC 15.231e
Mode of Operation: Continuous Transmission

M% = ((t1+t2+t3+...)/T)*100% = 11.55%

Av Reading = Pk Reading + 20*log(M%)
20*log(M%) = -18.7484

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Notes
EUT at Y Position										
433.92	68.09	49.34	16.90	1.83	0.00	68.07	72.87	-4.80	3mV	Fundamental
433.92	65.30	46.55	16.90	1.83	0.00	65.28	72.87	-7.59	3mH	Fundamental
EUT at X Position										
433.92	68.83	50.08	16.90	1.83	0.00	68.81	72.87	-4.06	3mH	Fundamental
433.92	64.49	45.74	16.90	1.83	0.00	64.47	72.87	-8.40	3mV	Fundamental
EUT at Z Position										
433.92	64.77	46.02	16.90	1.83	0.00	64.75	72.87	-8.12	3mV	Fundamental
433.92	67.35	48.60	16.90	1.83	0.00	67.33	72.87	-5.54	3mH	Fundamental
Y position is worst case for vertical polarization, and X position is worst case for horizontal polarization										
Harmonics and Spurious Emissions										
867.84	17.82	-0.93	22.60	2.90	0.00	24.57	52.87	-28.30	3mV	Y orientation
867.84	17.54	-1.21	22.70	2.90	0.00	24.39	52.87	-28.48	3mH	X orientation
EUT scanned between 30 MHz and 1000 MHz, no other emissions were found above the noise floor level.										

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHZ

08/04/05 **High Frequency Measurement**
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 05U3630-1
Company: SmarTire
EUT Descrip.: 433.92 MHz Valva Transmitter
EUT M/N: 200.0173
Test Target: FCC 15.231
Mode Oper: Continuous Transmission

Test Equipment:

EMCO Horn 1-18GHz
T119; S/N: 29301 @ 3m

Pre-amplifier 1-26GHz
T63 Miteq 646456

Pre-amplifier 26-40GHz

Horn > 18GHz

2 foot cable
2_Frank

3 foot cable

4 foot cable

12 foot cable
12_Frank

HPF

Reject Filter

Peak Measurements
RBW=VBW=1MHz

Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.300	3.0	53.6	34.8	28.6	1.5	-38.5	0.0	0.0	45.2	26.5	74	54	-28.8	-27.5	V, Y Orientation
1.730	3.0	63.2	44.5	30.4	1.8	-38.7	0.0	0.0	56.7	37.9	74	54	-17.3	-16.1	V, Y Orientation
3.470	3.0	62.4	43.7	33.1	2.6	-38.4	0.0	0.0	59.7	40.9	74	54	-14.3	-13.1	V, Y Orientation
3.904	3.0	60.6	41.9	33.4	2.8	-38.2	0.0	0.0	58.6	39.8	74	54	-15.4	-14.2	V, Y Orientation
4.338	3.0	50.9	32.1	33.7	3.0	-38.1	0.0	0.0	49.4	30.7	74	54	-24.6	-23.3	V, Y Orientation
1.300	3.0	55.3	36.5	28.6	1.5	-38.5	0.0	0.0	46.9	28.2	74	54	-27.1	-25.8	H, X Orientation
1.730	3.0	62.1	43.3	30.4	1.8	-38.7	0.0	0.0	55.5	36.8	74	54	-18.5	-17.2	H, X Orientation
2.169	3.0	66.8	48.0	31.7	2.0	-38.9	0.0	0.0	61.5	42.8	74	54	-12.5	-11.2	H, X Orientation
3.037	3.0	52.4	33.6	32.8	2.4	-38.6	0.0	0.0	49.0	30.3	74	54	-25.0	-23.7	H, X Orientation
3.904	3.0	59.9	41.2	33.4	2.8	-38.2	0.0	0.0	57.9	39.1	74	54	-16.1	-14.9	H, X Orientation
4.338	3.0	50.6	31.8	33.7	3.0	-38.1	0.0	0.0	49.2	30.4	74	54	-24.8	-23.6	H, X Orientation

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


Note: EUT scanned till 5 GHz, no other emissions above noise floor were detected. Three orientations were investigated; X orientation was found to be worst case for horizontal polarization, and Y orientation was found to be worst case for vertical polarization..

7.4. POWERLINE CONDUCTED EMISSIONS

The EUT is battery-powered; therefore, this test was not performed.

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION

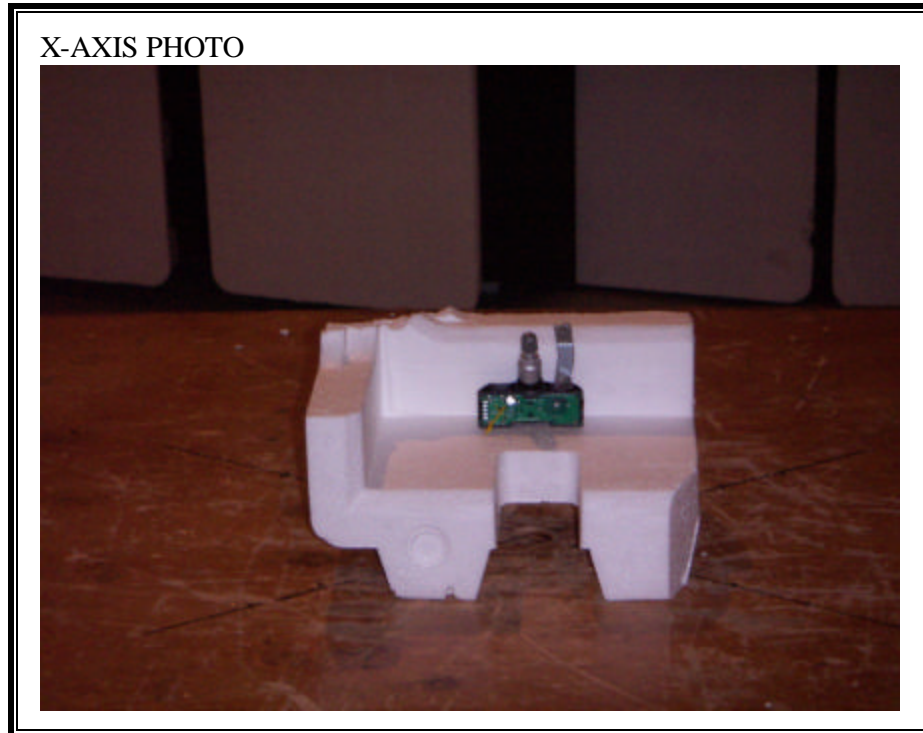

Y-AXIS PHOTO



Z-AXIS PHOTO



END OF REPORT