

ISED CABid: ES1909

Test Report No:

Lab. Company Number: 4621A

75856RRF.006

Partial Test Report

USA FCC Part 15.31, 15.225, 15.247, 15.209

CANADA RSS-210, RSS-247, RSS-Gen

(*) Identification of item tested	GAT ECO.Lock Series including all mechanical variants
(*) Trademark	GANTNER
(*) Model and /or type reference	GAT ECO.Lock 7102 NW F/ISO
Other identification of the product	FCC ID: NC4-LM100 IC: 11873A-LM100
(*) Features	Bluetooth LE HW version: 1.2 SW version: 0221 (Control FW) + 0186 (FUS FW) + 0187 (BLE FW)
Applicant	SALTO SYSTEMS, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Gipuzkoa, SPAIN
Test method requested, standard	USA FCC Part 15.31 (10-1-21 Edition): Measurement standard. USA FCC Part 15.225 (10-1-21 Edition): Operation within the band 13.110 -14.010. USA FCC Part 15.247 (10-1-21) Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-21) Edition: Radiated emission limits; general requirements. CANADA RSS-210 Issue 10 (December 2019). CANADA RSS-247 Issue 3 (August 2023). CANADA RSS-Gen Issue 5 Amendment 2 (February 2021) Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2024-04-25
Report template No	FDT08_24 (*) "Data provided by the client"

Index

Competences and guarantees3

General conditions3

Uncertainty3

Data provided by the client3

Usage of samples4

Test sample description5

Identification of the client7

Testing period and place7

Document history7

Environmental conditions7

Remarks and comments7

Testing verdicts9

Summary9

Appendix A: Test results10

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 9 kHz to 30 MHz is:
Measurement uncertainty $\leq \pm 3.08$ dB (with factor $k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:
Measurement uncertainty $\leq \pm 5.35$ dB (with factor $k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:
Measurement uncertainty $\leq \pm 4.32$ dB (with factor $k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:
Measurement uncertainty $\leq \pm 5.51$ dB (with factor $k = 2$).

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a GAT ECO.Lock Series with RFID Mifare (ISO 14443A & ISO 15693 standard based) and Bluetooth LE technology.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	75856B_5.1	GAT ECO.Lock	GAT ECO.Lock 7102 NW F/ISO	2344070022	2023-12-12	Element Under Test

Notes referenced to samples during the project:

Id	Type
S/01	Sample used for radiated test

Test sample description

Ports..... :	Port name and description		Cable				
			Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾	
			[]	[]	[]	[]	
Supplementary information to the ports..... :	N/A						
Rated power supply	Voltage and Frequency			Reference poles			
				L1	L2	L3	N
	[]	AC:	[]	[]	[]	[]	[]
[X]	DC: 4.5 Vdc (3 x LR6 batteries)						
Rated Power	N/A						
Clock frequencies.....	32MHz, 32.768 kHz, 27.12 MHz						
Other parameters	N/A						
Software version	0221 (Control FW) + 0186 (FUS FW) + 0187 (BLE FW)						
Hardware version	1.2						
Dimensions in cm (W x H x D)	External part: 10.9 x 10.9 x 8.0 cm						
Mounting position	[]	Table top equipment					
	[]	Wall/Ceiling mounted equipment					
	[]	Floor standing equipment					
	[]	Hand-held equipment					
	[X]	Other: Door mounting					
Modules/parts..... :	Module/parts of test item			Type		Manufacturer	
	SoC + Antenna			BLE		ST + JOHANSON	
							
Accessories (not part of the test item)	Description			Type		Manufacturer	
							
Documents as provided by the applicant..... :	Description			File name		Issue date	
	User manual						
	FW Explanation						
							

⁽³⁾ Only for Medical Equipment

Identification of the client

SALTO SYSTEMS, S.L.
Arkotz 9, Polígono Lanbarren
20180, Oiartzun, Gipuzkoa, SPAIN

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2024-01-09
Date (finish)	2024-01-17

Document history

Report number	Date	Description
75856RRF.006	2024-04-25	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Rafael Fernandez.

Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
06791	SEMIANECHOIC ABSORBER LINED CHAMBER IV	FACT 3 200 STP	ETS LINDGREN	N/A
06792	SHIELDED ROOM	S101	ETS LINDGREN	N/A
06609	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2024-04-25
06615	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2024-04-25
00242	ACTIVE LOOP ANTENNA 9 KHZ-30 MHz	11966A	HEWLETT PACKARD	2024-08-18
03541	HYBRID BILOG ANTENNA 30MHz-6GHz	JB6	SUNOL SCIENCES CORPORATION	2024-11-15
06144	PRE-AMPLIFIER G>40dB 10MHz-6GHz	BLNA 0160-01N	BONN ELEKTRONIK	2024-07-25
06496	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK	2026-12-01
03783	PRE-AMPLIFIER G>30dB 1GHz-18GHz	BLMA 0118-3A	BONN ELEKTRONIK	2025-02-07
04657	HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2026-06-12
08856	PRE-AMPLIFIER G>30dB 18-40GHz	BLMA 1840-4A	BONN ELEKTRONIK	2025-01-12
02942	EMI TEST RECEIVER 20Hz-40GHz	ESU40	ROHDE AND SCHWARZ	2026-02-22
04716	SIGNAL AND SPECTRUM ANALYZER 2Hz-50GHz	FSW50	ROHDE AND SCHWARZ	2024-08-12
04848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

FCC PART 15 PARAGRAPH / RSS-Gen/ RSS-210/ RSS-247		
Requirement – Test case	Verdict	Remark
FCC 15.31 (h), FCC 15.209 (a), 15.225 (d), 15.247 (d) / RSS-Gen 8.9, RSS-210 B.6 (a)(iv), RSS-247 5.5: - Emission limitations radiated (Transmitter)	P	(1)
<u>Supplementary information and remarks:</u> (1) Only simultaneous mode radiated spurious emission test was requested.		

Appendix A: Test results.

INDEX

TEST CONDITIONS12

Radiated emissions17

TEST CONDITIONS

(*) Declared by the Applicant

POWER SUPPLY (*):

Vnominal: 4.5Vdc
Type of Power Supply: 3 x LR6 batteries

ANTENNA (*):

Modulation	Maximum Declared Antenna Gain	Type of Antenna
Bluetooth Low Energy	+0.5 dBi	Integral antenna (Chip)
RFID	N/A	Integral antenna (PCB)

RADIOS AND CHANNELS TESTED (worst case):

Bluetooth Low Energy / DTS		
Mode:	1Mbit/s	
Channel Spacing:	2 MHz	
Frequency Range:	2402 MHz to 2480 MHz	
Transmit Channel:	Channel	Channel Frequency (MHz)
	17	2440

RFID 13.56 MHz ISO 14443A / ASK 100%, OOK (subcarrier fc/16)		
Mode:	ISO 14443A	
Channel Spacing:	Not Applicable	
Frequency Range:	13.553 - 13.567 MHz	
Transmit Channel:	Channel	Channel Frequency (MHz)
	Single Channel	13.56

RFID 13.56 MHz ISO 15693 / ASK 10% - 30%, OOK (subcarrier fc/32)		
Mode:	ISO 15693	
Channel Spacing:	Not Applicable	
Frequency Range:	13.553 - 13.567 MHz	
Transmit Channel:	Channel	Channel Frequency (MHz)
	Single Channel	13.56

TESTED SIMULTANEOUS TRANSMISSION MODES:

The EUT was tested in the following operating mode:

- Continuous transmission with a modulated carrier at maximum power in all required channels selecting the supported data rates/modulations types.

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

Operation mode 1:

*** Simultaneous transmission mode, Bluetooth Low Energy and RFID 13.56 MHz ISO 14443A**, with the EUT configured to simultaneously transmit two signals at maximum output power:

- Bluetooth Low Energy / Middle Channel (2440 MHz, GFSK 1Mbit/s)
- RFID 13.56 MHz ISO 14443A Single Channel

Operation mode 2:

*** Simultaneous transmission mode, Bluetooth Low Energy and RFID 13.56 MHz ISO 15693**, with the EUT configured to simultaneously transmit two signals at maximum output power:

- Bluetooth Low Energy / Middle Channel (2440 MHz, GFSK 1Mbit/s)
- RFID 13.56 MHz ISO 15693 Single Channel

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m (Loop antenna for the range between 9 kHz to 30 MHz, Bilog antenna for 30 MHz to 1000 MHz, Double ridge horn antenna 1 GHz-17 GHz) and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (horn antenna).


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

A resolution bandwidth / video bandwidth of 100 kHz / 300 kHz was used for frequencies between 30 MHz up to 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup $f < 30$ MHz:

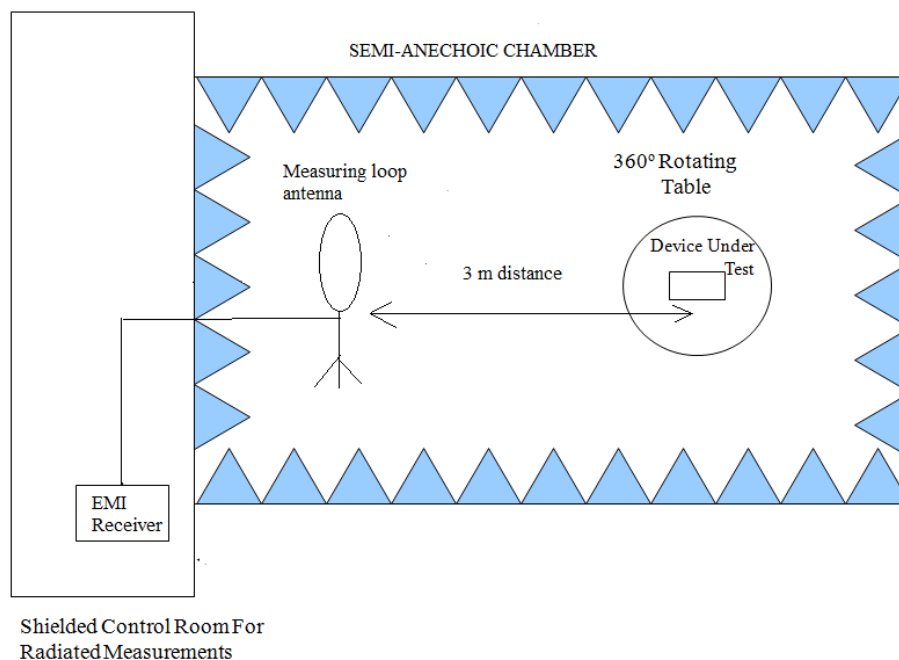


Radiated measurements setup $30\text{ MHz} < f < 1\text{ GHz}$:

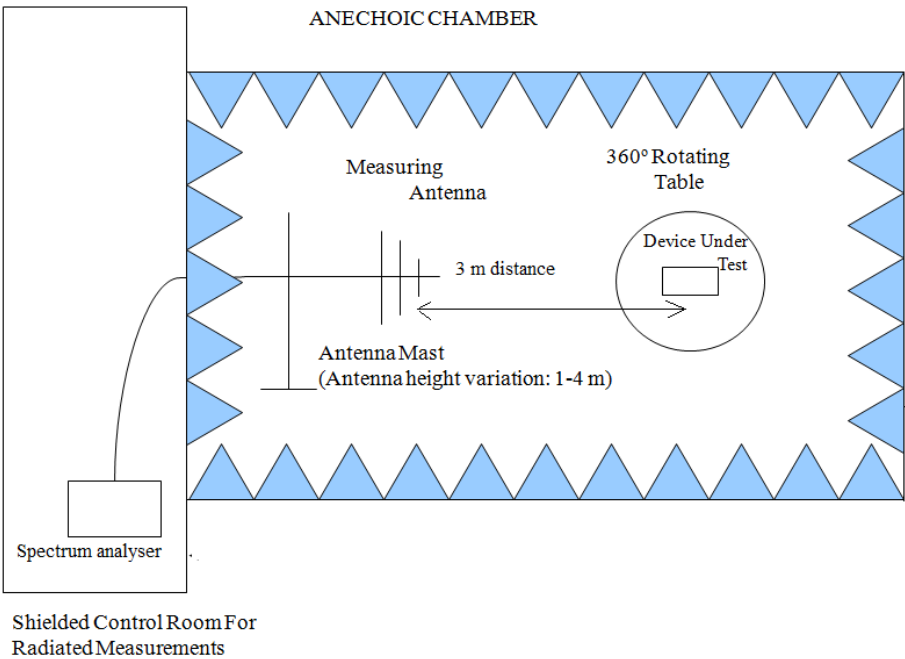

Radiated measurements setup $f > 1\text{ GHz}$ up to 17 GHz :

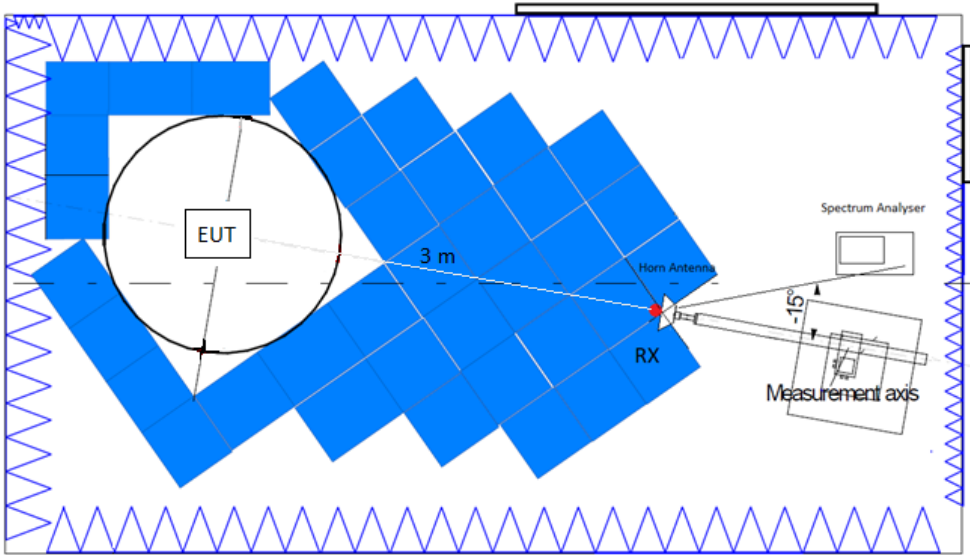

Radiated measurements setup $f > 17$ GHz:

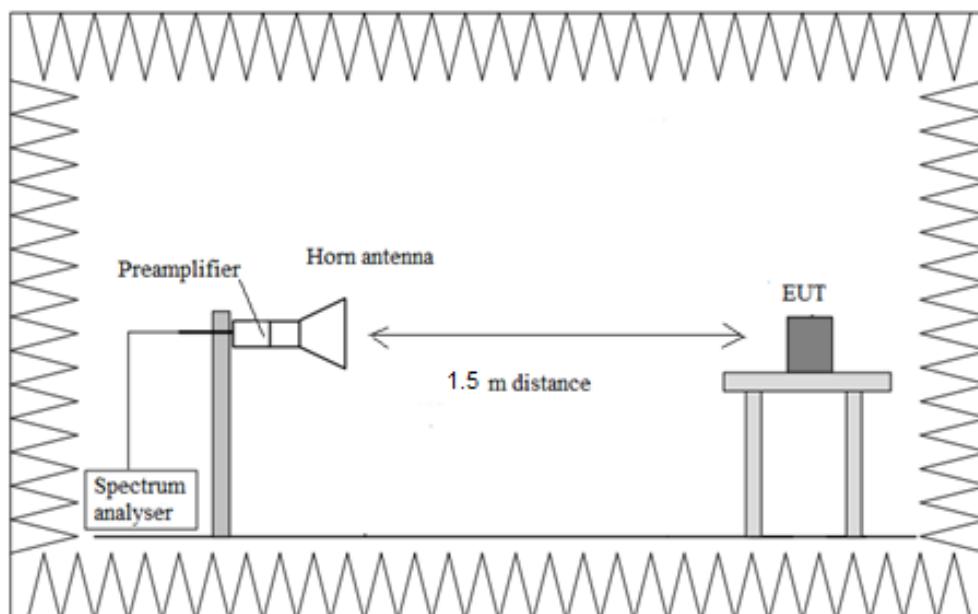

Radiated emissions

Specification:

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), appearing outside of the band 13.110 MHz - 14.010 MHz band must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30		30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Results:

- Operation mode 1:

Frequency range 9 kHz - 30 MHz:

No spurious frequencies detected at less than 20 dB below the limit.

Frequency range 30 MHz - 1 GHz

No spurious frequencies detected at less than 20 dB below the limit:

Frequency range 1 - 26 GHz

Spurious frequencies with peak levels above the average limit (54 dBµV/m at 3 m) are measured with average detector for checking compliance with the average limit.

Spurious frequencies detected:

Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector
4880.6200	46.22	H	PK
7320.4000	48.29	H	PK

- **Operation mode 2:**

Frequency range 9 kHz - 30 MHz:

No spurious frequencies detected at less than 20 dB below the limit.

Frequency range 30 MHz - 1 GHz

No spurious frequencies detected at less than 20 dB below the limit:

Frequency range 1 - 26 GHz

Spurious frequencies with peak levels above the average limit (54 dBµV/m at 3 m) are measured with average detector for checking compliance with the average limit.

Spurious frequencies detected:

Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector
4879.9200	49.71	V	PK
7319.5600	52.04	V	PK
12200.9400	51.71	H	PK

Verdict
Pass


Attachments

Spectrum Analyzer Parameters:

9 kHz - 150 kHz	50 Hz	PK+	200 Hz	0,1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	PK+	9 kHz	0,1 s	0 dB
30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	1 s	0 dB
1 GHz - 3 GHz	30,769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	30 dB
17 GHz - 26 GHz	300 kHz	PK+ ; AVG	1 MHz	1 s	0 dB


- Operation mode 1

FREQUENCY RANGE 9 kHz - 30 MHz:

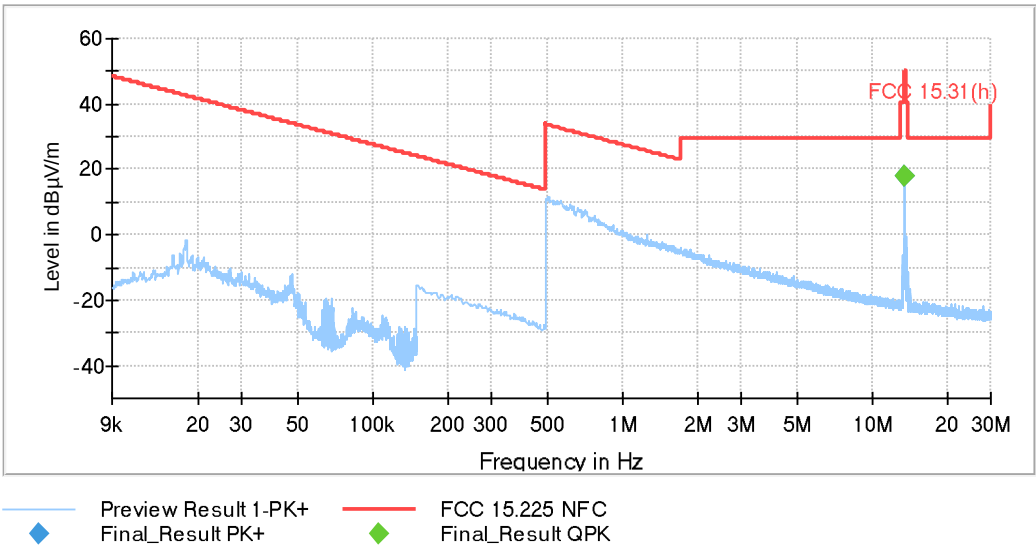


The highest peak is the RFID 13.56 MHz carrier frequency.

FREQUENCY RANGE 30 MHz - 1 GHz:

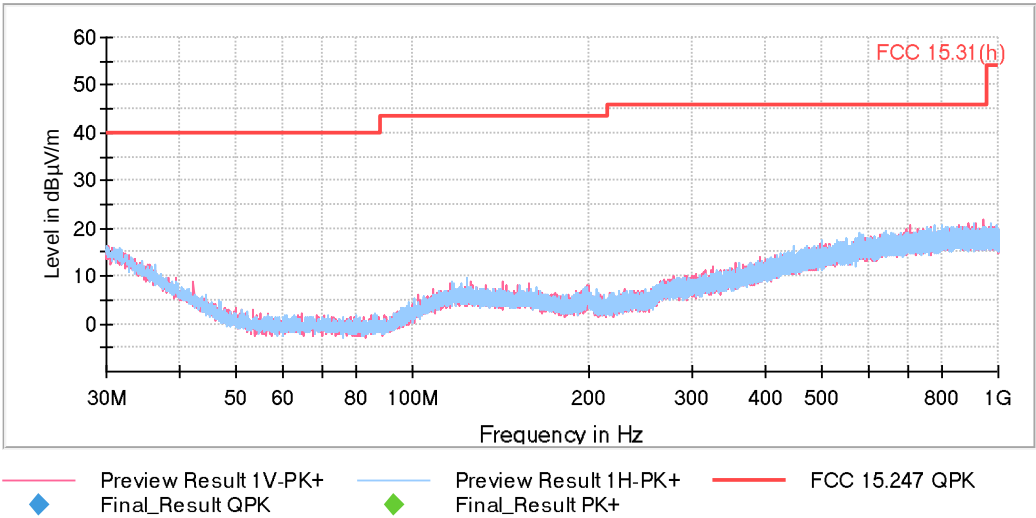


FREQUENCY RANGE 1 - 3 GHz:

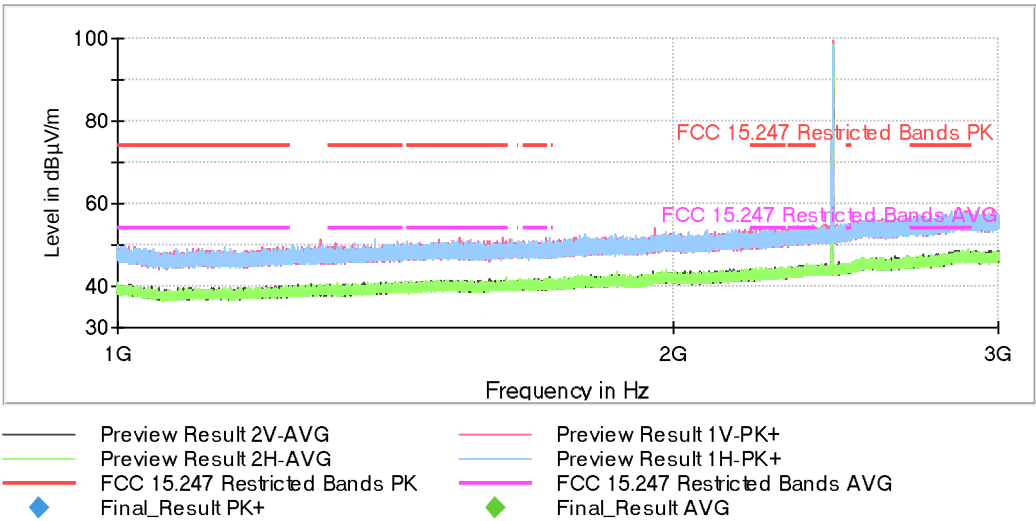


The peak above the limit is the Bluetooth LE carrier frequency.

FREQUENCY RANGE 3 - 17 GHz:

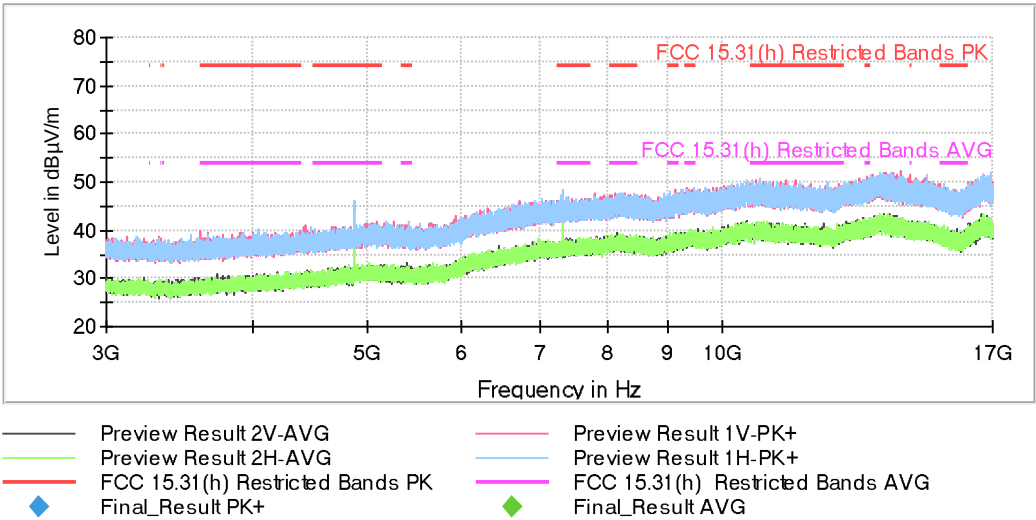


FREQUENCY RANGE 17 - 26 GHz:

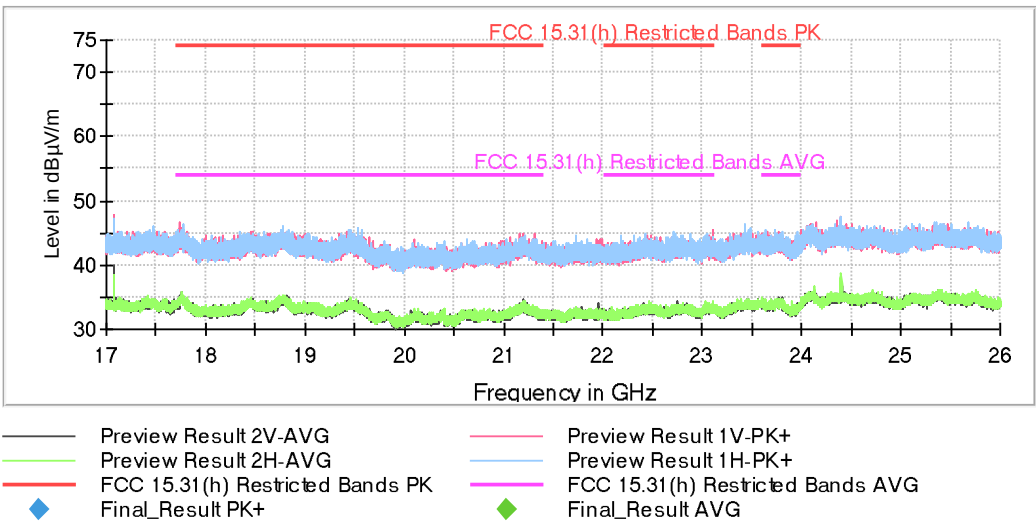


• Operation mode 2

FREQUENCY RANGE 9 kHz - 30 MHz:

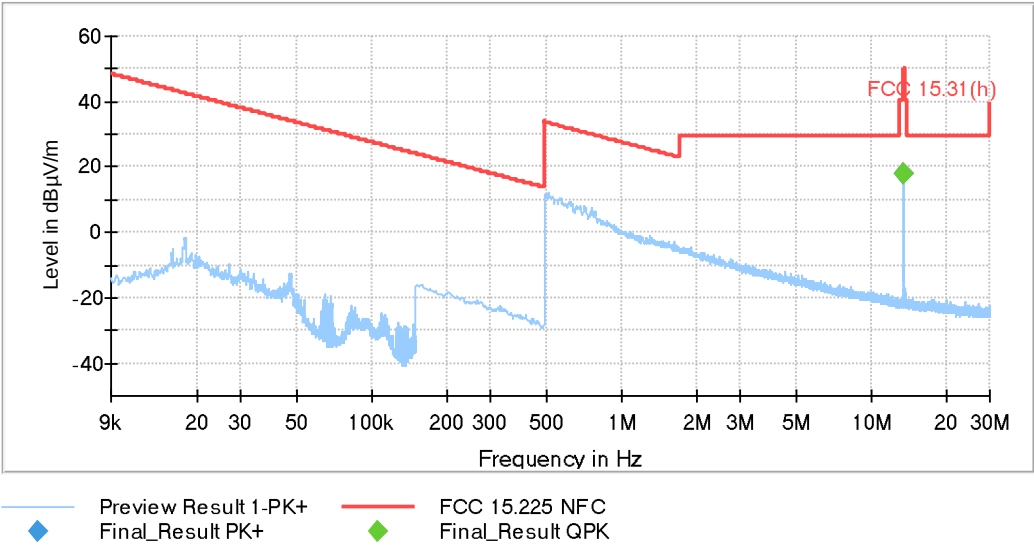


The highest peak is the RFID 13.56 MHz carrier frequency.

FREQUENCY RANGE 30 MHz - 1 GHz:

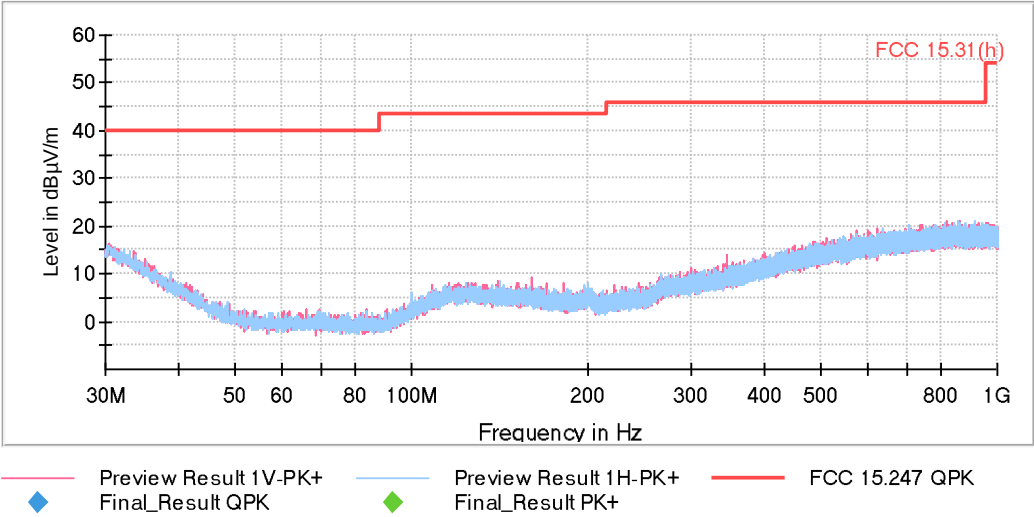


FREQUENCY RANGE 1 - 3 GHz:

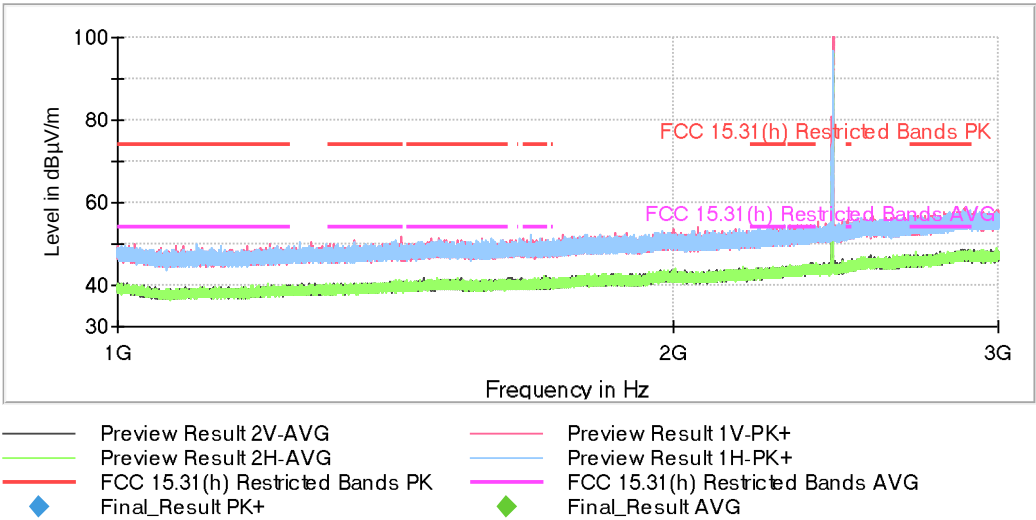

The peak above the limit is the Bluetooth LE carrier frequency.

FREQUENCY RANGE 3 - 17 GHz:

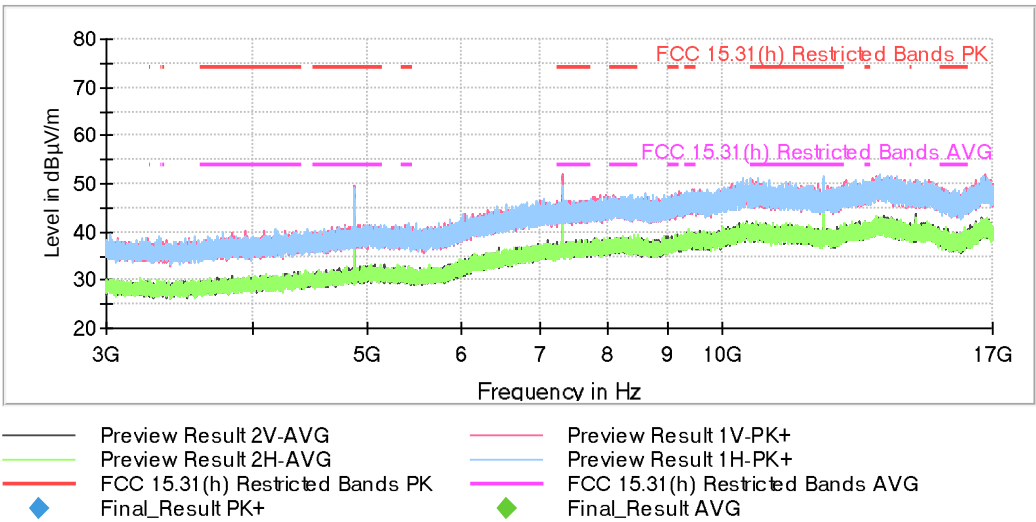

FREQUENCY RANGE 17 - 26 GHz:

