



# FCC SAR Test Report

APPLICANT : Option nv  
EQUIPMENT : GTM671W  
BRAND NAME : Option  
MODEL NAME : MO6712  
FCC ID : NCMOMO6712  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
IEEE C95.1-1991  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was received on Jul. 08, 2011 and completely tested on Jul. 13, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



Testing Laboratory  
1190

## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

Revision History..... 3
1. Statement of Compliance ..... 4
2 Administration Data ..... 5
2.1 Testing Laboratory ..... 5
2.2 Applicant..... 5
2.3 Manufacturer ..... 5
2.4 Application Details ..... 5
3 General Information ..... 6
3.1 Description of Device Under Test (DUT)..... 6
3.2 Applied Standards ..... 7
3.3 Device Category and SAR Limits ..... 7
3.4 Test Conditions ..... 7
3.4.1 Ambient Condition ..... 7
3.4.1 Test Configuration ..... 7
4 Specific Absorption Rate (SAR)..... 9
4.1 Introduction..... 9
4.2 SAR Definition ..... 9
5 SAR Measurement System.....10
5.1 E-Field Probe.....11
5.1.1 E-Field Probe Specification.....11
5.1.2 E-Field Probe Calibration.....12
5.2 Data Acquisition Electronics (DAE).....12
5.3 Robot.....12
5.4 Measurement Server .....13
5.5 Phantom .....14
5.6 Device Holder .....15
5.7 Data Storage and Evaluation .....17
5.7.1 Data Storage.....17
5.7.2 Data Evaluation .....17
5.8 Test Equipment List .....19
6 Tissue Simulating Liquids.....20
7 Uncertainty Assessment .....22
8 SAR Measurement Evaluation .....25
8.1 Purpose of System Performance check .....25
8.2 System Setup .....25
8.3 Validation Results .....26
9 DUT Testing Position .....27
10 Measurement Procedures .....28
10.1 Spatial Peak SAR Evaluation.....28
10.2 Area & Zoom Scan Procedures .....29
10.3 Volume Scan Procedures .....29
10.4 SAR Averaged Methods .....29
10.5 Power Drift Monitoring .....29
11 SAR Test Configurations.....30
11.1 Exposure Positions Consideration.....30
11.2 Simultaneous Transmitting Configurations .....31
12 SAR Test Results .....32
12.1 Conducted Power (Unit: dBm).....32
12.2 Test Records for Body SAR Test .....34
12.3 Simultaneous Multi-band Transmission .....35
12.4 Simultaneous analysis - SPLSR calculation .....36
13 References.....38
Appendix A. Plots of System Performance Check
Appendix B. Plots of SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Product Photos
Appendix E. Test Setup Photos
Appendix F. FCC 3G SAR Measurement Procedures



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA171128	Rev. 01	Initial issue of report	Aug. 05, 2011
FA171128	Rev. 02	Revise SW version	Aug. 16, 2011
FA171128	Rev. 03	Update report of revising Applicant information and antenna location	Sep. 02, 2011



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Option nv GTM671W** **Option MO6712** are as follows (with expanded uncertainty 21.4 % for 300 MHz to 3 GHz).

Band	Position	SAR <sub>1g</sub> (W/kg)
GSM850	Body (0cm Gap)	1.3
GSM1900	Body (0cm Gap)	0.963
WCDMA Band V	Body (0cm Gap)	1.07
WCDMA Band II	Body (0cm Gap)	1.23
802.11 b/g/n	Body (0cm Gap)	0.344
Bluetooth	Body (0cm Gap)	N/A

**Note:**

1. BT SAR not tested due to that average power is below the FCC procedure thresholds, per KDB 447498.
2. The SAR was evaluated, with the DUT installed in the Tablet Host, which FCC ID = A3LXE700T1A and with NFC function enabled.
3. The SAR test distance is the distance from Tablet Host Edge/Surface to the phantom.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



## 2 Administration Data

### 2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

### 2.2 Applicant

Company Name	Option nv
Address	Gaston Geenslaan 14, 3001 Leuven, Belgium

### 2.3 Manufacturer

Company Name	Option nv
Address	Gaston Geenslaan 14, 3001 Leuven, Belgium

### 2.4 Application Details

Date of Receipt of Application	Jul. 08, 2011
Date of Start during the Test	Jul. 08, 2011
Date of End during the Test	Jul. 13, 2011



### 3 General Information

#### 3.1 Description of Device Under Test (DUT)

Product Feature & Specification	
DUT Type	GTM671W
Brand Name	Option
Model Name	MO6712
FCC ID	NCMOMO6712
Host Tablet PC	Brand Name : Samsung Model Name : XE700T1A Marketing Name : Series 7 HW Version : MP1.0 SW Version : Windows
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz 802.11b/g/n : 2400 MHz ~ 2483.5 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz 802.11b/g/n : 2400 MHz ~ 2483.5 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz
Maximum Output Power to Antenna	GSM850 : 32.32 dBm GSM1900 : 29.62 dBm WCDMA Band V : 22.53 dBm WCDMA Band II : 23.87 dBm 802.11b : 14.60 dBm 802.11g : 11.81 dBm 802.11n (BW 20MHz) : 8.87 dBm 802.11n (BW 40MHz) : 9.04 dBm Bluetooth: 4.27 dBm(peak power)
HW Version	3.1
SW Version	1.8.1.0
Type of Modulation	GSM : GMSK WCDMA : QPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
DUT Stage	Identical Prototype



**Remark:**

The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

**3.2 Applied Standards**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- IEEE C95.1-1991
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 616217 D03 v01
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D04 v01
- FCC KDB 248227 D01 v01r02

**3.3 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

**3.4 Test Conditions**

**3.4.1 Ambient Condition**

<b>Ambient Temperature</b>	20 to 24 °C
<b>Humidity</b>	< 60 %

**3.4.1 Test Configuration**

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.

For WWAN SAR testing, the DUT is in GPRS or WCDMA link mode.

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.



In general, the crest factor is 8.3 for GSM and GPRS/EDGE multi-slot class 8, 4 for GPRS/EDGE multi-slot class 10, and 1 for WCDMA/HSDPA/HSUPA.



## **4 Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = c \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5 SAR Measurement System

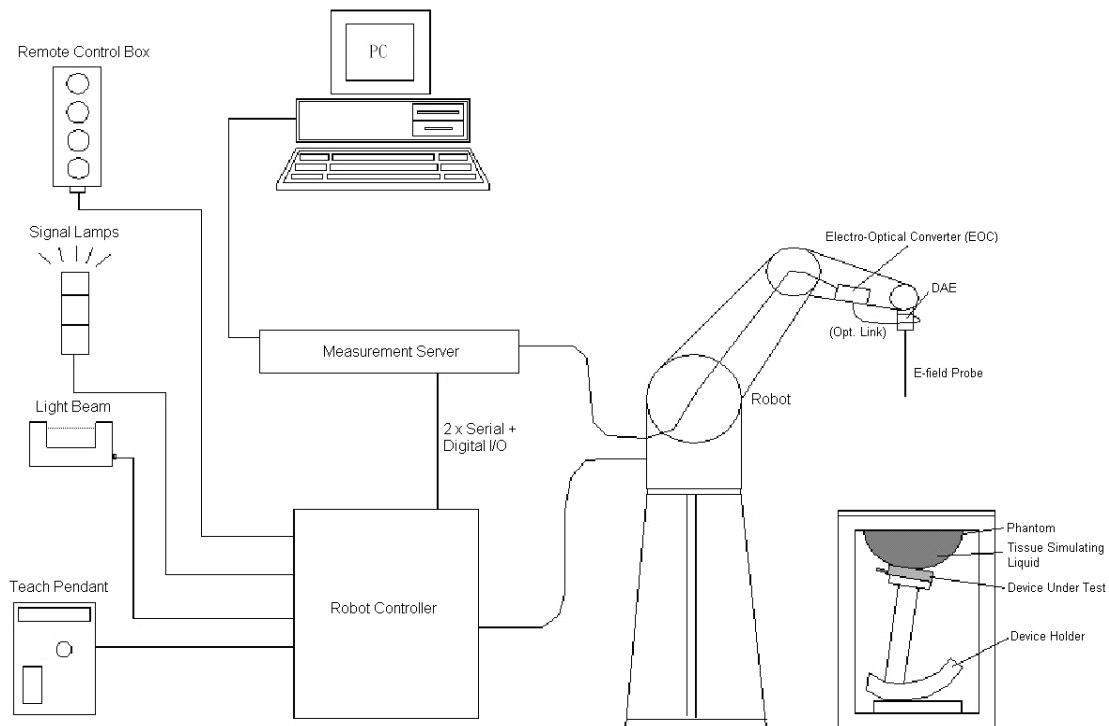

**Fig 5.1 SPEAG DASY4 or DASY5 System Configurations**

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.


**5.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**5.1.1 E-Field Probe Specification**

**<ET3DV6 Probe >**


<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm

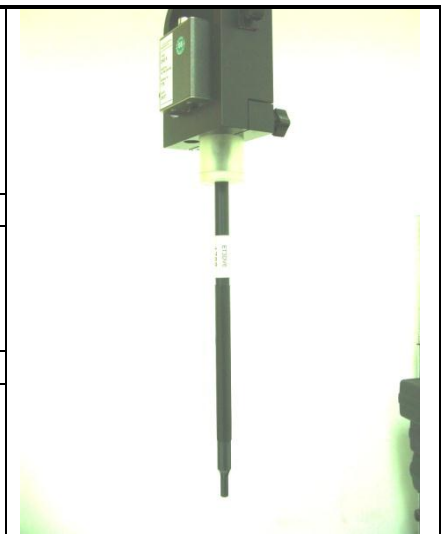

**Fig 5.2 Photo of ET3DV6**

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

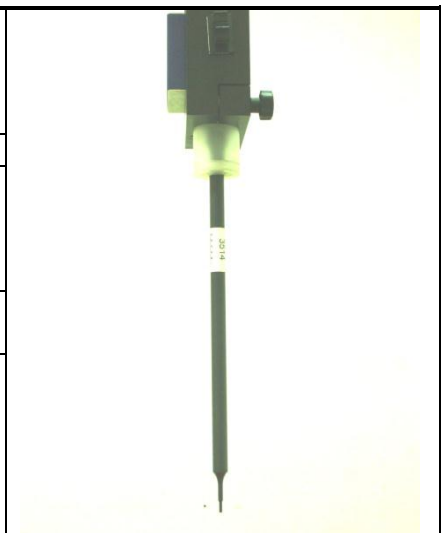

**Fig 5.3 Photo of EX3DV4**

### 5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

## 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4



Fig 5.6 Photo of DASY5

#### 5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



Fig 5.9 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm



Fig 5.10 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.


The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

**<Laptop Extension Kit>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

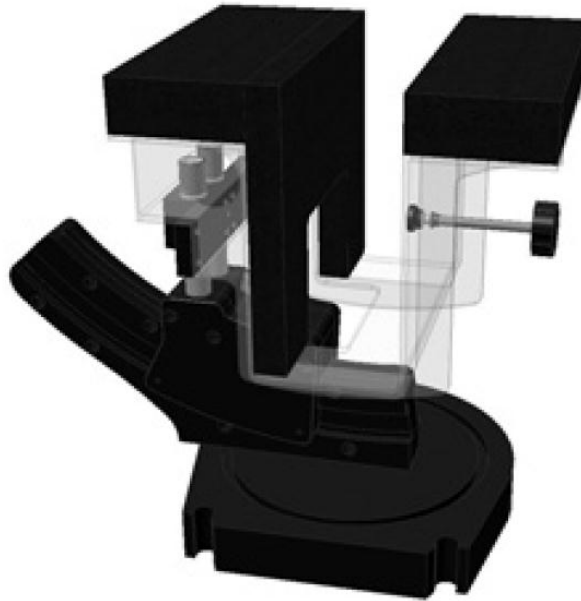

**Fig 5.12 Laptop Extension Kit**





## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	$dcp_i$
<b>Device parameters :</b>	- Frequency	$f$
	- Crest factor	$cf$
<b>Media parameters :</b>	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V}/\text{m})^2$  for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	ET3DV6	1787	May 20, 2011	May 19, 2012
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Nov. 23, 2010	Nov. 22, 2011
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 22, 2010	Mar. 21, 2012
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 23, 2010	Mar. 22, 2012
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 20, 2009	Jul. 19, 2011
SPEAG	Data Acquisition Electronics	DAE3	577	Jun. 20, 2011	Jun. 19, 2012
SPEAG	Data Acquisition Electronics	DAE3	495	Apr. 28, 2011	Apr. 27, 2012
SPEAG	SAM Phantom	QD 0VA 001 BA	1029	NCR	NCR
Agilent	SAM Phantom	E5071C	MY46100746	Jun. 10, 2011	Jun. 09, 2012
Agilent	SAM Phantom	E5515C	MY48360820	Jan. 12, 2010	Jan. 11, 2012
Agilent	SAM Phantom	E5515C	GB46311322	Mar. 23, 2011	Mar. 22, 2013
Agilent	SAM Phantom	E5515C	MY50264370	Apr. 19, 2011	Apr. 18, 2013
Agilent	SAM Phantom	E8358A	US40260131	May 17, 2011	May 16, 2012
R&S	SAM Phantom	CMU200	114256	Feb. 08, 2010	Feb. 07, 2012
Agilent	SAM Phantom	85070D	US01440205	NCR	NCR
Agilent	SAM Phantom	778D	50422	NCR	NCR
AR	SAM Phantom	5S1G4M2	0328767	NCR	NCR
R&S	SAM Phantom	FSP30	101329	May 03, 2011	May 02, 2012

**Table 5.1 Test Equipment List**

**Note:** The calibration certificate of DASy can be referred to appendix C of this report.

## 6 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

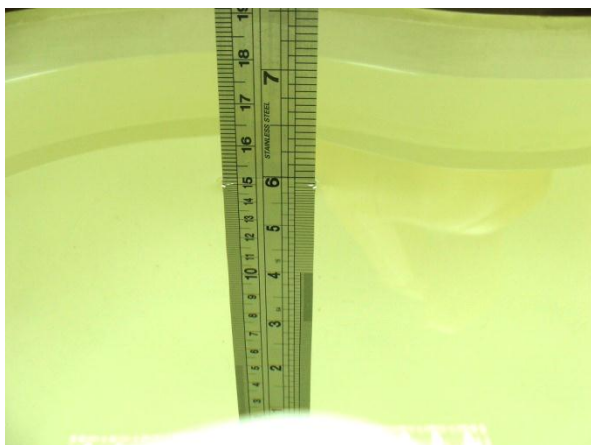


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The following table gives the targets for tissue simulating liquid.

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon_r$ )	$\pm 5\%$ Range
750	Head	0.89	0.85 ~ 0.93	41.9	39.8 ~ 44.0
835	Head	0.90	0.86 ~ 0.95	41.5	39.4 ~ 43.6
900	Head	0.97	0.92 ~ 1.02	41.5	39.4 ~ 43.6
1800, 1900, 2000	Head	1.40	1.33 ~ 1.47	40.0	38.0 ~ 42.0
2450	Head	1.80	1.71 ~ 1.89	39.2	37.2 ~ 41.2
750	Body	0.96	0.91 ~ 1.01	55.5	52.7 ~ 58.3
835	Body	0.97	0.92 ~ 1.02	55.2	52.4 ~ 58.0
900	Body	1.05	1.00 ~ 1.10	55.0	52.3 ~ 57.8
1800, 1900, 2000	Body	1.52	1.44 ~ 1.60	53.3	50.6 ~ 56.0
2450	Body	1.95	1.85 ~ 2.05	52.7	50.1 ~ 55.3

**Table 6.2 Targets of Tissue Simulating Liquid**

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Temperature ( $^{\circ}\text{C}$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Measurement Date
850	Body	21.3	0.996	54.8	Jul. 08, 2011
1900	Body	21.6	1.54	53.9	Jul. 07, 2011
2450	Body	21.6	2.02	54	Jul. 13, 2011

**Table 6.3 Measuring Results for Simulating Liquid**

## 7 Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 7.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
<b>Measurement System</b>					
Probe Calibration	5.5	Normal	1	1	± 5.5 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	± 0.6 %
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	± 1.5 %
<b>Combined Standard Uncertainty</b>					± 10.7 %
<b>Coverage Factor for 95 %</b>					K = 2
<b>Expanded Uncertainty</b>					± 21.4 %

Table 7.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (10g)	Standard Uncertainty (10g)
<b>Measurement System</b>					
Probe Calibration	6.55	Normal	1	1	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %



Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$
Linearity	4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$
Readout Electronics	0.3	Normal	1	1	$\pm 0.3 \%$
Response Time	0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.5 \%$
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.5 \%$
Probe Positioning	9.9	Rectangular	$\sqrt{3}$	1	$\pm 5.7 \%$
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	$\pm 2.9 \%$
Device Holder	3.6	Normal	1	1	$\pm 3.6 \%$
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.43	$\pm 1.2 \%$
Liquid Conductivity (Meas.)	2.5	Normal	1	0.43	$\pm 1.1 \%$
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.49	$\pm 1.4 \%$
Liquid Permittivity (Meas.)	2.5	Normal	1	0.49	$\pm 1.2 \%$
<b>Combined Standard Uncertainty</b>					$\pm 12.6 \%$
<b>Coverage Factor for 95 %</b>					K = 2
<b>Expanded Uncertainty</b>					$\pm 25.2 \%$

**Table 7.3 Uncertainty Budget of DASY for frequency range 3 GHz to 6 GHz**



## 8 SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2 System Setup


In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:



Fig 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

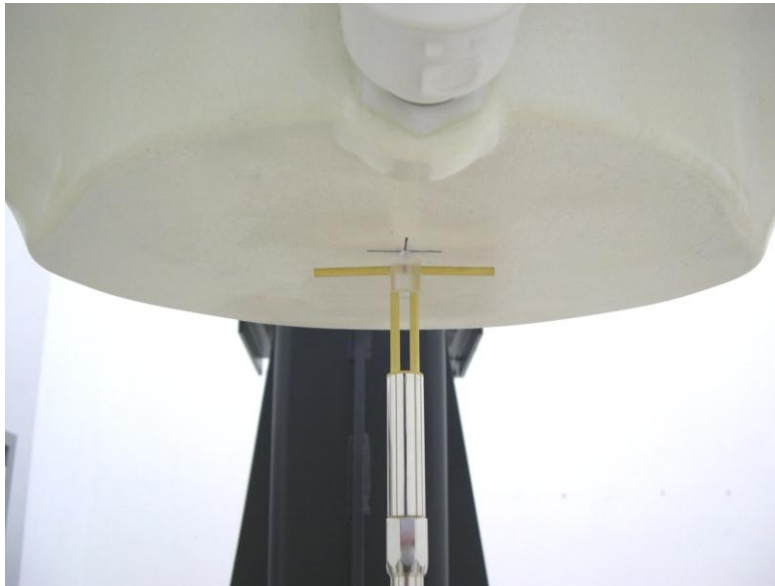

**Fig 8.2 Photo of Dipole Setup**

**8.3 Validation Results**

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Targeted SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	Normalized SAR <sub>1g</sub> (W/kg)	Deviation (%)
Jul. 08, 2011	850	9.820	2.460	9.84	0.20
Jul. 07, 2011	1900	40.000	10.100	40.40	1.00
Jul. 13, 2011	2450	53.000	13.100	52.40	-1.13

**Table 8.1 Target and Measurement SAR after Normalized**

## 9 DUT Testing Position

This DUT was tested in four different positions. They are bottom face of tablet PC, Primary Landscape, Secondary Landscape, and Primary Portrait. In these positions, the surface of DUT is touching with phantom 0 cm gap. Please refer to Appendix E for the test setup photos.

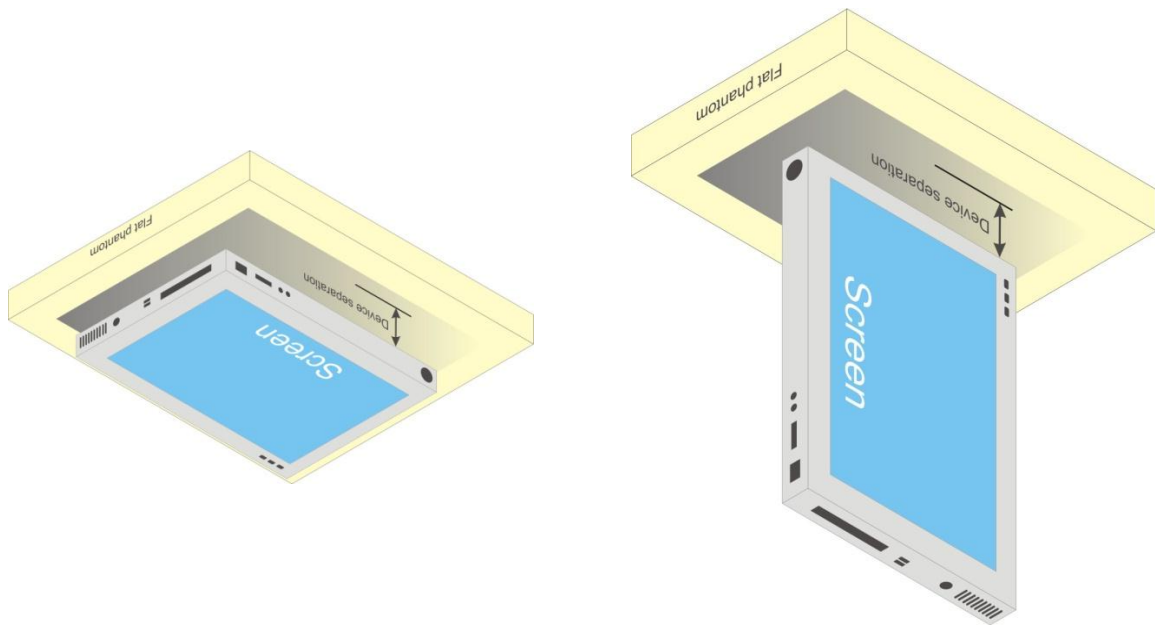


Fig 9.1 Illustration for Lap-touching Position

## **10 Measurement Procedures**

The measurement procedures are as follows:

- (a) For WWAN function, link DUT with base station emulator in highest power channel
- (b) Set base station emulator to allow DUT to radiate maximum output power
- (c) For WLAN function, using engineering software to transmit RF power continuously (continuous Tx) in the middle channel
- (d) Measure output power through RF cable and power meter
- (e) Place the DUT in the positions described in the last section
- (f) Set scan area, grid size and other setting on the DASY software
- (g) Taking data for the middle channel on each testing position
- (h) Find out the largest SAR result on these testing positions of each band
- (i) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **10.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



### **10.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### **10.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **10.4 SAR Averaged Methods**

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.


### **10.5 Power Drift Monitoring**

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 11 SAR Test Configurations

### 11.1 Exposure Positions Consideration

#### Secondary Landscape

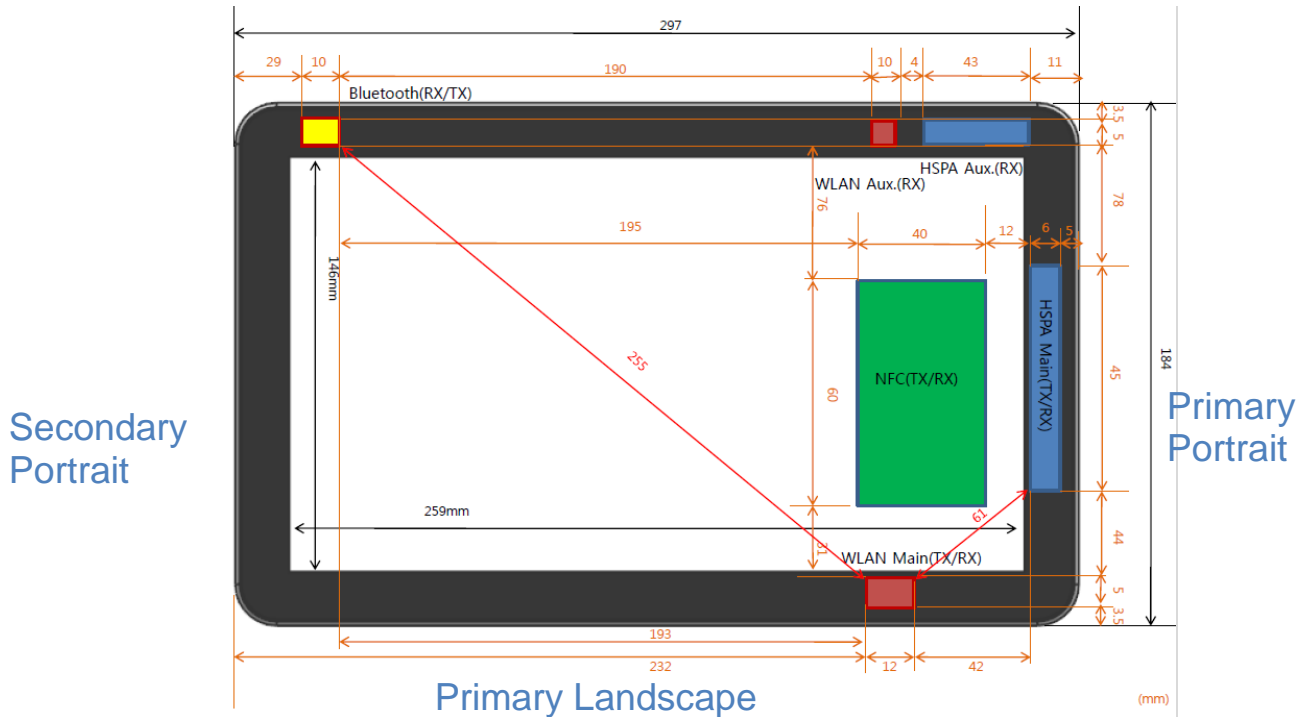

#### Rear Face View

Antenna	Length	Width
WLAN Main (TX/RX)	1.2cm	0.5cm
WLAN Aux. (TX/RX)	1.0cm	0.5cm
HSPA Main (TX/RX)	4.5cm	0.6cm
HSPA Aux. (TX/RX)	4.3cm	0.5cm
Bluetooth (TX/RX)	1.0cm	0.5cm
NFC (TX/RX)	6.0 cm	4.0cm

<b>HSPA antenna</b>	GSM850: UL:824~849MHz/DL:869~894MHz PCS : UL:1850~1910MHz/DL:1930~1990MHz WCDMA Band II: UL:1852.5~1907.6MHz/ DL:1932.5~1987.6MHz WCDMA Band V: UL:826.5~846.6MHz/ DL:871.5~891.6MHz
<b>WLAN antenna</b>	802.11 b/g/n: 2.4GHz
<b>BT antenna</b>	Bluetooth: 2.4GHz

Sides for SAR tests; Tablet mode						
	Bottom Face	Front Face	Secondary Landscape	Primary Landscape	Secondary Portrait	Primary Portrait
UMTS	✓ (0 mm)	x	✓ (0 mm)	✓ (0 mm)	x	✓ (0 mm)
WLAN	✓ (0 mm)	x	x	✓ (0 mm)	x	✓ (0 mm)

**Note:**

1. The DUT diagonal dimension is 349 mm; per KDB 941225 D07, the DUT diagonal > 20 cm and Mini-Tablet procedure is not applied. Therefore, SAR tests follow the Tablet Mode in KDB447498.
2. There is no screen orientation limitation in DUT; that is 4 orientations are supported. The power reduction for SAR compliance is not triggered by the screen orientation.
3. As in (1), the test distance is 0 mm to the flat phantom; SAR evaluation is required for Bottom Face and each applicable Edge with the antenna within 5 cm to the user.
4. DUT does not support voice call function; therefore GSM SAR is not required.
5. There is no screen orientation limitation in DUT; that is 4 orientations are supported.
6. Per KDB 447498 4)b)ii)2), SAR evaluation is performed for the Bottom Face and the edge with antenna within 5cm. Screen orientation is not considered in SAR evaluation, and the most conservative exposure condition is considered.

**11.2 Simultaneous Transmitting Configurations**

< Simultaneous Transmission – Body SAR >

Multi-band combination	GSM/GPRS/EDGE	UMTS	WLAN	Bluetooth
2G + WLAN + Bluetooth	✓	x	✓	✓
3G + WLAN + Bluetooth	x	✓	✓	✓

**Note:**Bluetooth output power is < 60/f; per KDB 447498 the standalone SAR is not required.



## 12 SAR Test Results

### 12.1 Conducted Power (Unit: dBm)

<GSM>

GSM/GPRS/EDGE Burst Average Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) – CS1	31.82	32.07	32.32	29.62	29.54	29.42
GPRS 10 (2 Uplink) – CS1	30.35	30.39	30.21	29.13	29.06	29.05
EDGE 8 (GMSK, 1 Uplink) – MCS1	31.30	31.18	31.06	29.61	29.59	29.39
EDGE 10 (GMSK, 2 Uplink) – MCS1	30.38	30.01	30.21	29.13	29.10	28.90
EDGE 8 (8PSK, 1 Uplink) – MCS9	27.36	26.96	27.00	26.19	26.11	26.21
EDGE 10 (8PSK, 2 Uplink) – MCS9	26.00	25.80	25.86	24.60	25.00	25.02

Note: Maximum burst average power in the table above.

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) – CS1	22.82	23.07	23.32	20.62	20.54	20.42
GPRS 10 (2 Uplink) – CS1	24.35	24.39	24.21	23.13	23.06	23.05
EDGE 8 (GMSK, 1 Uplink) – MCS1	22.30	22.18	22.06	20.61	20.59	20.39
EDGE 10 (GMSK, 2 Uplink) – MCS1	24.38	24.01	24.21	23.13	23.10	22.90
EDGE 8 (8PSK, 1 Uplink) – MCS9	18.36	17.96	18.00	17.19	17.11	17.21
EDGE 10 (8PSK, 2 Uplink) – MCS9	20.00	19.80	19.86	18.60	19.00	19.02

Note:

The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6 dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) - 3 dB

Note: For GSM/GPRS/EDGE body SAR testing, the DUT was set in GPRS multi-slot class 10 with 2 uplink slots due to maximum source-based time-averaged output power.





<WCDMA>

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	22.02	22.51	22.19	22.61	23.80	23.15
HSDPA Subtest-1	21.97	22.42	22.47	22.89	23.59	23.13
HSDPA Subtest-2	22.19	22.53	22.11	23.02	23.87	23.28
HSDPA Subtest-3	21.53	21.93	22.05	22.44	23.00	22.49
HSDPA Subtest-4	21.60	22.03	21.64	22.53	23.51	22.79
HSUPA Subtest-1	21.30	21.55	21.31	22.49	22.60	22.37
HSUPA Subtest-2	20.23	20.08	20.45	21.45	21.04	21.25
HSUPA Subtest-3	20.79	20.51	20.61	21.50	21.88	21.38
HSUPA Subtest-4	20.30	20.54	20.42	21.72	21.86	21.21
HSUPA Subtest-5	21.87	22.15	21.99	23.14	23.24	23.06

Note: For SAR testing, only RMC12.2kbps is tested due to HSDPA/HSUPA power is less than 1/4dB higher, per KDB 941225 D01.

<WLAN>

Band	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Power	14.47	14.60	14.40	11.81	11.77	11.72

Band	802.11n (BW 20MHz)			802.11n (BW 40MHz)		
Channel	1	6	11	3	6	9
Frequency (MHz)	2412	2437	2462	2422	2437	2452
Power	8.60	8.87	8.82	8.77	7.84	9.04

Channel	Frequency	Bluetooth RF Peak Output Power	
		Data Rate / Modulation	
		GFSK	$\pi/4$ -DQPSK
		1Mbps	2Mbps
Ch00	2402MHz	1.25	3.62
Ch39	2441MHz	2.03	4.27
Ch78	2480MHz	2.08	4.24

Note:

1. The data rates for WLAN SAR testing were set in 1Mbps for 802.11b and 6Mbps for 802.11g, mcs0 for 802.11n (BW 20MHz) and MCS7 for 802.11n (BW 40MHz) due to the highest RF output power.
2. Per KDB 248227, choose 11b mode to test SAR; 11g and 11n output power is less than 11b mode, and SAR can be excluded.
3. Per 2010/4 TCB workshop, choose the highest output power channel to test SAR and determine further SAR exclusion, and 11b CH06 is chosen here.
4. Bluetooth standalone SAR is not required because the Bluetooth peak power (4.27 dBm) is less than 60/f. Bluetooth average power will be smaller than peak power.

**12.2 Test Records for Body SAR Test**

**<GSM>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Ear-phone	SAR <sub>1g</sub> (W/kg)
20	GSM850	GPRS10	Primary Portrait	0	189	v	1.11
22	GSM850	GPRS10	Bottom Face	0	189	v	1.27
31	GSM850	GPRS10	Secondary Landscape	0	189	v	0.055
32	GSM850	GPRS10	Primary Landscape	0	189	v	0.148
19	GSM850	GPRS10	Primary Portrait	0	128	v	1.27
24	GSM850	GPRS10	Primary Portrait	0	251	v	1.13
<b>21</b>	<b>GSM850</b>	<b>GPRS10</b>	<b>Bottom Face</b>	<b>0</b>	<b>128</b>	<b>v</b>	<b>1.3</b>
23	GSM850	GPRS10	Bottom Face	0	251	v	1.09
13	GSM1900	GPRS10	Primary Portrait	0	512	v	0.87
15	GSM1900	GPRS10	Bottom Face	0	512	v	0.935
27	GSM1900	GPRS10	Secondary Landscape	0	512	v	0.097
28	GSM1900	GPRS10	Primary Landscape	0	512	v	0.03
14	GSM1900	GPRS10	Primary Portrait	0	661	v	0.824
<b>18</b>	<b>GSM1900</b>	<b>GPRS10</b>	<b>Primary Portrait</b>	<b>0</b>	<b>810</b>	<b>v</b>	<b>0.963</b>
16	GSM1900	GPRS10	Bottom Face	0	661	v	0.885
17	GSM1900	GPRS10	Bottom Face	0	810	v	0.925

**<WCDMA>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Ear-phone	SAR <sub>1g</sub> (W/kg)
8	WCDMA Band V	RMC12.2K	Primary Portrait	0	4182	v	0.986
10	WCDMA Band V	RMC12.2K	Bottom Face	0	4182	v	0.736
29	WCDMA Band V	RMC12.2K	Secondary Landscape	0	4182	v	0.023
30	WCDMA Band V	RMC12.2K	Primary Landscape	0	4182	v	0.084
<b>7</b>	<b>WCDMA Band V</b>	<b>RMC12.2K</b>	<b>Primary Portrait</b>	<b>0</b>	<b>4132</b>	<b>v</b>	<b>1.07</b>
12	WCDMA Band V	RMC12.2K	Primary Portrait	0	4233	v	0.805
2	WCDMA Band II	RMC12.2K	Primary Portrait	0	9400	v	1.07
4	WCDMA Band II	RMC12.2K	Bottom Face	0	9400	v	0.926
25	WCDMA Band II	RMC12.2K	Secondary Landscape	0	9400	v	0.13
26	WCDMA Band II	RMC12.2K	Primary Landscape	0	9400	v	0.045
1	WCDMA Band II	RMC12.2K	Primary Portrait	0	9262	v	1.2
<b>6</b>	<b>WCDMA Band II</b>	<b>RMC12.2K</b>	<b>Primary Portrait</b>	<b>0</b>	<b>9538</b>	<b>v</b>	<b>1.23</b>
3	WCDMA Band II	RMC12.2K	Bottom Face	0	9262	v	0.867
5	WCDMA Band II	RMC12.2K	Bottom Face	0	9538	v	0.812

**<WLAN>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Ear- phone	SAR <sub>1g</sub> (W/kg)
33	802.11b	-	Primary Portrait	0	6	v	0.067
34	802.11b	-	Bottom Face	0	6	v	0.335
35	802.11b	-	Primary Landscape	0	6	v	<b>0.344</b>

**12.3 Simultaneous Multi-band Transmission**

**<Maximum SAR list for each band and position>**

	GSM 850	GSM 1900	WCDMA Band V	WCDMA Band II	802.11 b/g	Max. SAR Summation	Hot Spot Separation (cm)	SPLSR
Primary Portrait (Gap 0cm)	1.27	0.963	1.07	1.23	<b>0.067</b>	1.337	N/A	N/A
Bottom Face (Gap 0cm)	<b>1.3</b>	0.935	0.736	0.926	<b>0.335</b>	<b>1.635</b>	<b>11.80</b>	<b>0.139</b>
Secondary Landscape (Gap 0cm)	0.055	0.097	0.023	<b>0.13</b>	N/A	0.130	N/A	N/A
Primary Landscape (Gap 0cm)	<b>0.148</b>	0.03	0.084	0.045	<b>0.344</b>	0.492	N/A	N/A

**Note:**

- 1 The maximum SAR summation is calculated based on the same configuration and test position.
- 2 For 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary
- 3 If SAR >1.6W/kg, SPLSR calculation is necessary. SPLSR < 0.3, so volume scan is not necessary; referring to KDB 648474

The simultaneous transmission SAR for WLAN and Bluetooth was not required because the closest separation distance of these antennas (25.5 cm) is larger than 5 cm and the output power of Bluetooth (4.27 dBm) is less than 2P<sub>Ref</sub> (13.8 dBm).

The GPRS/EDGE and WCDMA share the same WWAN transmitting antenna, and GPRS/EDGE will not transmit simultaneously with WCDMA.


According to KDB 648474, the simultaneous transmission SAR for WWAN and BT was not required, because the closest separation distance of these antennas (20.4 cm) is larger than 5 cm and the output power of Bluetooth (4.27 dBm) is less than 2P<sub>Ref</sub> (13.8 dBm).


According to the KDB 447498, the BT standalone SAR and simultaneous transmission SAR for WWAN and BT were not required, because the BT maximum power is less than 60/f.

**12.4 Simultaneous analysis - SPLSR calculation**

Body	TX		SAR peak location (m)			SAR (W/kg)	Ant Pair	Peak distance (cm)	pair SAR sum (W/kg)	SPLSR
			X	Y	Z					
Bottom Face	1	GSM 850, CH 128	-0.0205	0.143	-0.174	1.3	2+1	11.8	1.635	0.139
	2	WLAN, CH 06	0.087	0.095	-0.173	0.335				
Bottom Face	3	GSM 850, CH 189	-0.018	0.145	-0.174	1.27	2+3	11.6	1.605	0.138
	2	WLAN, CH 06	0.087	0.095	-0.173	0.335				

<The peak location is shown in the overlapped SAR plots>

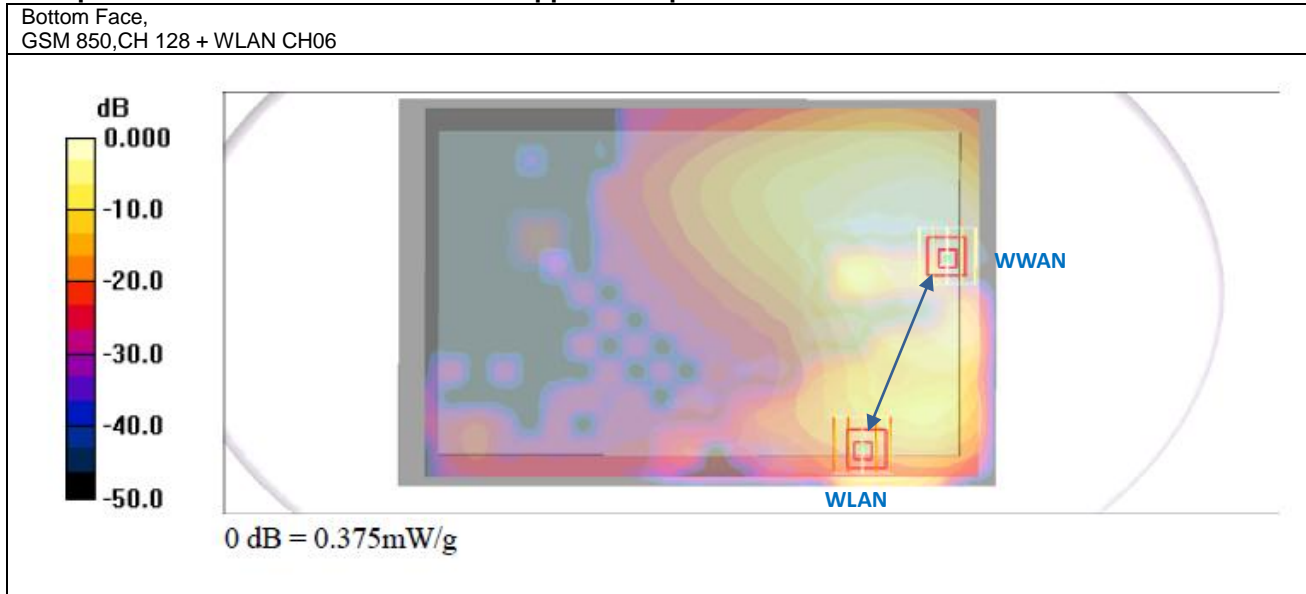

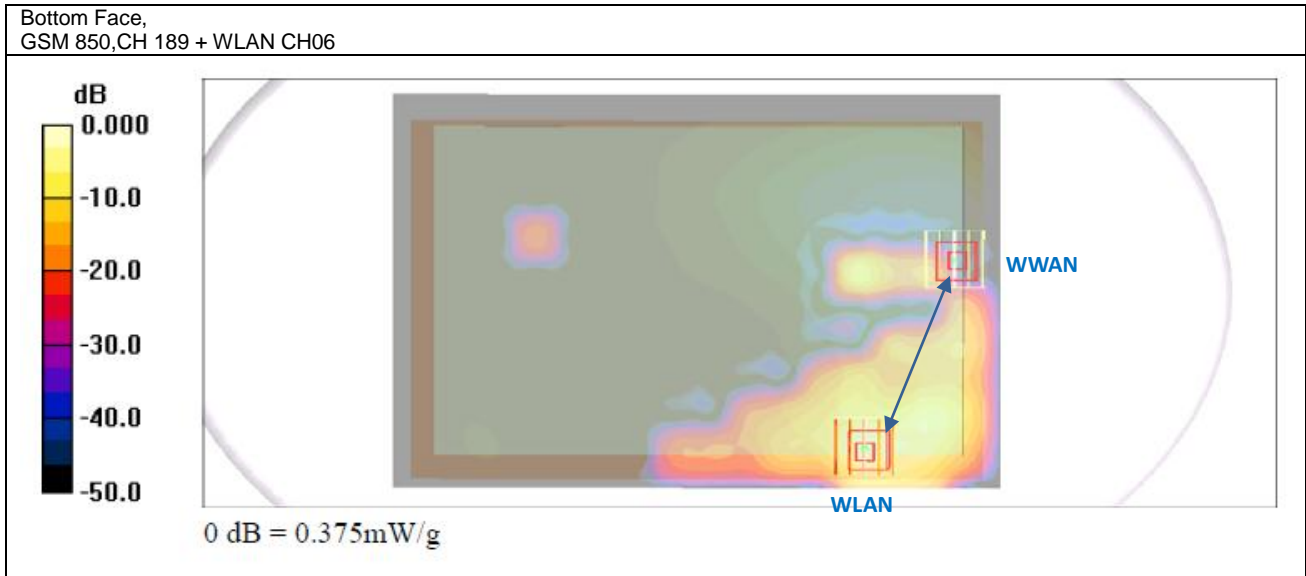

**Note:**

1. Considering SPLSR analysis, for GSM850 + WLAN at Bottom Face position, the 2 GSM850 channels resulting 1g-SAR summation  $\geq 1.6W/kg$  are analyzed here.
2. The SAR peak coordinates and SAR peaks distance are extracted and calculated following Speag TN-110209.

**Test Engineer :** Nick Tour and Ted Sun and Jack Wu



## **13 References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] IEEE Std. C95.1-1991, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1991
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 447498 D02 v02, "SAR Measurement Procedures for USB Dongle Transmitters", November 2009
- [9] FCC KDB 616217 D01 v01r01, "SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens", November 2009
- [10] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009
- [11] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [12] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [13] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [14] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 27 2010



## ***Appendix A. Plots of System Performance Check***

The plots are shown as follows.



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.





## **Appendix C. DASYS Calibration Certificate**

The DASYS calibration certificates are shown as follows.