

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Industrial Radio Remote Controller (Transmitter)
Model No. : SAGA1-J
FCC ID : NCTSAGA1-J
Filing Type : Certification
Applicant : **GAIN ELECTRONIC CO., LTD.**
4F-1, No. 288-5, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	6
2.4. A plot shows the EUT meet the requirement of 15.231(c)	7
3. Test Software	8
4. General Information of Test	10
4.1. Test Facility	10
4.2. Standard for Methods of Measurement	10
4.3. Test in Compliance with	10
4.4. Frequency Range Investigated	10
4.5. Test Distance	10
5. Test of Conducted Powerline	11
6. Test of Radiated Emission	12
6.1. Major Measuring Instruments	12
6.2. Test Procedures	13
6.3. Typical Test Setup Layout of Radiated Emission	14
6.4. Test Result of Radiated Emission	15
7. Antenna Factor & Cable Loss	18
8. List of Measuring Equipments Used	Error! Bookmark not defined.
9. Uncertainty of Test Site	24
Appendix A. Photographs of EUT	A1 ~ A8

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Industrial Radio Remote Controller (Transmitter)


Model No. : SAGA1-J

FCC ID : NCTSAGA1-J

Applicant : **GAIN ELECTRONIC CO., LTD.**
4F-1, No. 288-5, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on May 10, 2001 at **SPORTON International Inc.** LAB. in Lin Kou.


K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

GAIN ELECTRONIC CO., LTD.
4F-1, No. 288-5, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: Industrial Radio Remote Controller (Transmitter)
Model No.	: SAGA1-J
FCC ID	: NCTSAGA1-J
Trade Name	: GAIN
Power Supply Type	: From Battery (AA size x 6)
Power Cord	: N/A

1.4. Feature of Equipment under Test

- **Modulation type is Super Heterodyne.**
- Operation Frequency: 433.05~434.79MHz (set by software)
Ø The operation frequency of the EUT may be set from 433.05 to 434.79MHz, but each equipment will be set to only a fixed frequency, such as 433.1MHz, or 434.5MHz, not a frequency range.
- Power Supply: Four 1.5volts Alkaline or Rechargeable Batteries (AA size)
- RF Power: <7.85 nW (3m)
- Modulation: $\phi \pm 2.5\text{KHz}$; NBFM
- Joystick Type: Proportional Joystick with mechanical feeling
- Dimensions: 230x95x110mm (excluding protrusion)
- Weight: about 870g (including batteries)

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been tested pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. A receiver, which is designed to be used for EUT when marketed, was used during testing.
- c. The GAIN Receiver was to used for EMI test.
- d. Frequency range investigated: conduction 450 KHz to 30 MHz, radiation 30 MHz to 4,330 MHz.
- e. The radiated emissions testing was made by rotating three orthogonal axes.(Normal mode, Horizontal mode, Vertical mode).
- f. The operation frequency of the EUT may be set from 433.05 to 434.79MHz. But each equipment will be set to only a fixed frequency, such as 433.1MHz, or 434.5MHz, not a frequency range. The actual operation frequency of these two EUTs are 433.088MHz and 434.78MHz.
- g. The EUT employs a switch that will automatically deactivate the transmitter within no more than 5 seconds of being relased.
- h. The EUT has no periodic transmission at regular predetermined interval.
- i. Pursuant to 15.231(c) of Part 15. Subpart C, the bandwidth of the emission at the 20dB point shall be no wider than 0.25% of the center frequency for EUT.

The carrier frequency of EUT is 433MHz and 434.78MHz
 $433\text{MHz} * 0.25\% = 1082.5\text{KHz}$. $434.78\text{MHz} * 0.25\% = 1086.95\text{KHz}$.

For 433.08MHz, the bandwidth is 325KHz (as shown in section 2.4.1 of this test report), which is less than 1082.7KHz.

For 434.78MHz, the bandwidth is 596KHz (as shown in section 2.4.2 of this test report), which is less than 1086.95KHz;

The EUT meet the 20dB point bandwidth requirement.

2.2. Description of Test System

Support Unit 1. -- Receiver (GAIN)

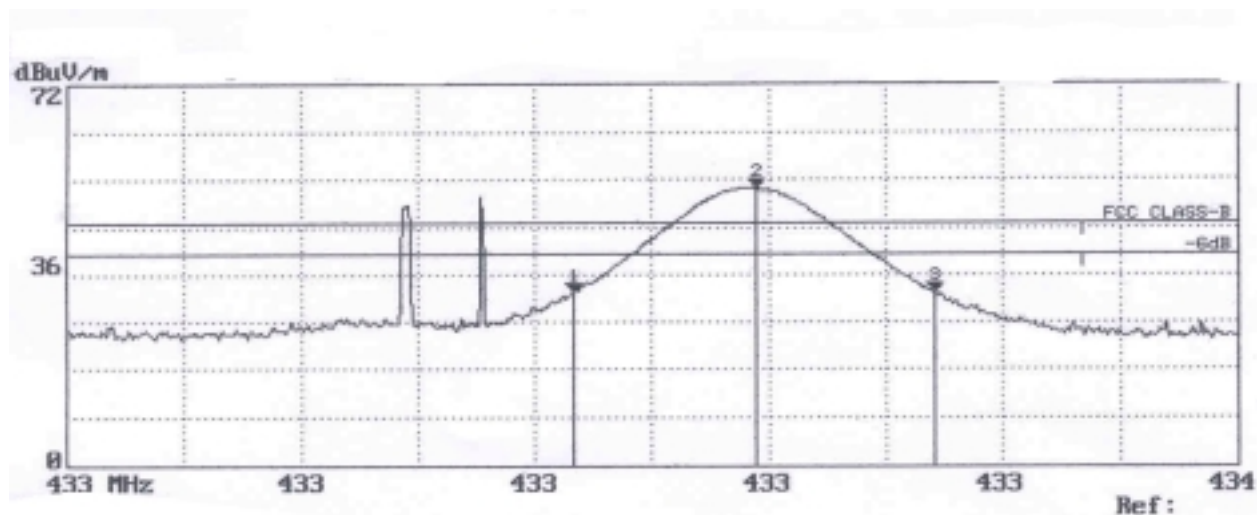
FCC ID	: N/A
Model No.	: SAGA1-D2
Serial No.	: SP0368

2.3. Connection Diagram of Test System

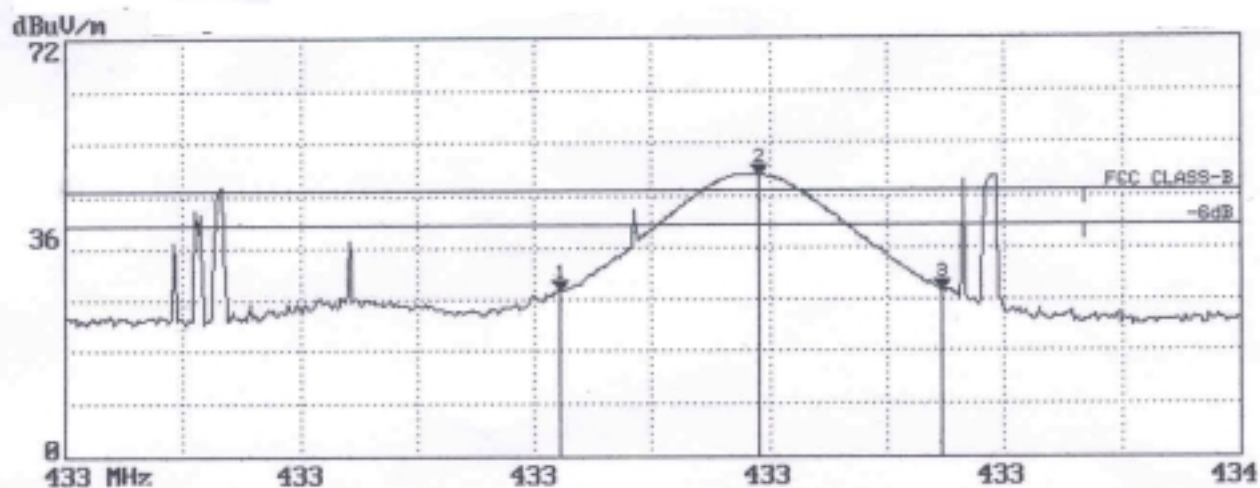


2.4. A plot shows the EUT meet the requirement of 15.231(c)

2.4.1. EUT with 433.08MHz



HORIZONTAL 20dB: 309K



VERTICAL 20dB: 325KHz

2.4.2. EUT with 434.78MHz



the bandwidth of the emission at the 20dB point is 596KHz

3. Test Software

No test software was used during testing.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

FCC Part 15, Subpart C

4.4. Frequency Range Investigated

- a. Conduction: from 450 kHz to 30 MHz
- b. Radiation : from 30 MHz to 4,348 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Test of Conducted Powerline

The power supply of the EUT is from battery.

So Conducted Powerline test is not applicable to this equipment.

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 4,348 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

6.1.1. from 30MHz to 1GHz

- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 20 dB
 - Signal Input 10 MHz to 3 GHz
- Spectrum Analyzer (ADVANTEST R3261C)
 - Attenuation 0 Db
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9KHz to 2.6 GHz
- Test Receiver (R&S ESEC30)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 KHz to 2.75 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

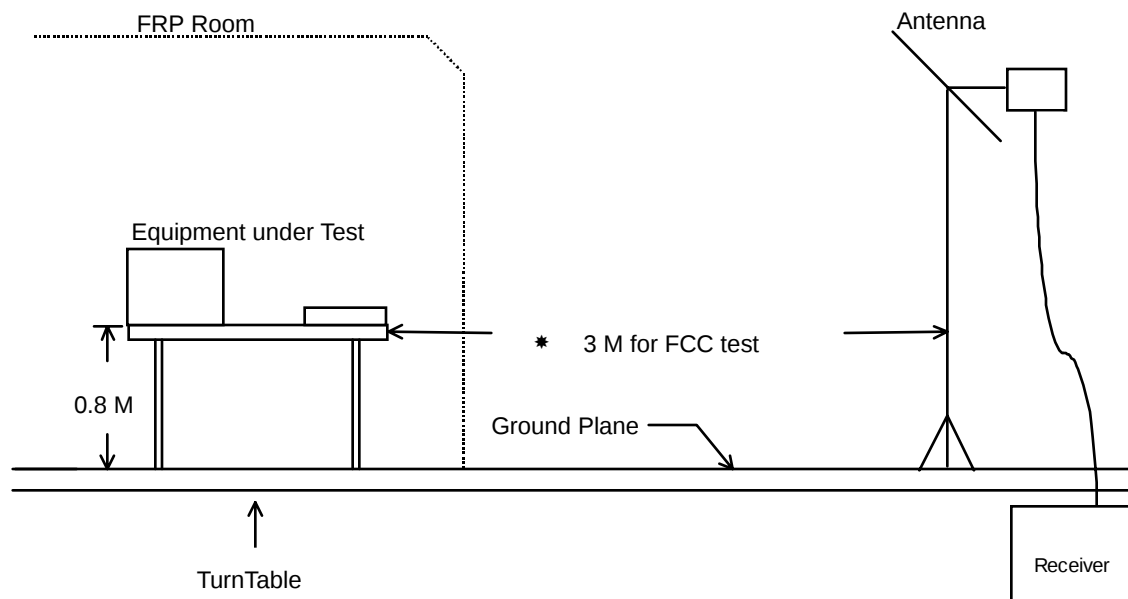
6.1.2. from 1GHz to 4.348GHz

- Receiver (HP 8546A)
 - Attenuation 0 dB
 - Start Frequency 1000 MHz
 - Stop Frequency 4,348 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 6.5 GHz

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission



6.4. Test Result of Radiated Emission

6.4.1. EUT with 433.08MHz

6.4.1.1 Test mode : NORMAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 28°C
- Relative Humidity : 60 %
- Test Date : Feb. 13, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission


The Radiated Emission test was passed at minimum margin

563.000 MHz / 40.90 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 70 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
130.70	V	12.73	1.50	4.86	43.50 150	19.09	9.01	-24.41	Peak
563.00	V	18.72	3.34	14.84	46.00 200	36.90	69.98	-9.10	Peak
130.70	H	12.73	1.50	2.94	43.50 150	17.17	7.22	-26.33	Peak
563.00	H	18.72	3.34	18.84	46.00 200	40.90	110.92	-5.10	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
433.08	V	16.78	2.72	31.82	80.79 10952	51.32	368.13	-29.47	Q.P.
866.00	V	20.43	4.49	6.18	60.79 1095	31.10	35.89	-29.69	Q.P.
433.08	H	16.78	2.72	42.82	80.79 10952	62.32	1306.17	-18.47	Q.P.
866.00	H	20.43	4.49	5.85	60.79 1095	30.77	34.55	-30.02	Q.P.

Test Engineer : 

Benny Lee

6.4.1.2 Test mode : HORIZONTAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 28°C
- Relative Humidity : 60 %
- Test Date : Feb. 13, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

563.000 MHz / 39.23 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 65 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
130.30	V	12.79	1.50	2.27	43.50 150	16.56	6.73	-26.94	Peak
563.00	V	18.72	3.34	13.50	46.00 200	35.56	59.98	-10.44	Peak
130.20	H	12.79	1.50	1.18	43.50 150	15.47	5.94	-28.03	Peak
563.00	H	18.72	3.34	17.17	46.00 200	39.23	91.52	-6.77	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
433.08	V	16.78	2.72	40.16	80.79 10952	59.66	961.61	-21.13	Q.P.
866.00	V	20.43	4.49	3.52	60.79 1095	28.44	26.42	-32.35	Q.P.
433.08	H	16.78	2.72	40.49	80.79 10952	59.99	998.85	-20.80	Q.P.
866.00	H	20.43	4.49	5.18	60.79 1095	30.10	31.99	-30.69	Q.P.

Test Engineer : Benny
Benny Lee

6.4.1.3 Test mode : VERTICAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 28°C
- Relative Humidity : 60 %
- Test Date : Feb. 13, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission


The Radiated Emission test was passed at minimum margin

563.000 MHz / 39.56 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 40 °.

Frequency	Polarity	Antenna Factor	Cable Loss	Reading	Limits	Emission	Level	Margin	Detect Mode	
(MHz)		(dB/m)	(dB)	(dBuV) (dBuV/m) (uV/m)	(dBuV/m) (uV/m)	(dBuV/m) (uV/m)	(dBuV/m) (uV/m)	(dB)		
130.20	V	12.79	1.50	5.52	43.50	150	19.81	9.78	-23.69	Peak
563.00	V	18.72	3.34	15.17	46.00	200	37.23	72.69	-8.77	Peak
130.30	H	12.79	1.50	1.27	43.50	150	15.56	6.00	-27.94	Peak
563.00	H	18.72	3.34	17.50	46.00	200	39.56	95.06	-6.44	Peak

Fundamental Frequency and Spurious Emissions :

Frequency	Polarity	Antenna Factor	Cable Loss	Reading	Limits	Emission	Level	Margin	Detect Mode	
(MHz)		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
433.08	V	16.78	2.72	40.99	80.79	10952	60.49	1058.03	-20.30	Q.P.
866.00	V	20.43	4.49	4.35	60.79	1095	29.27	29.07	-31.52	Q.P.
433.08	H	16.78	2.72	41.99	80.79	10952	61.49	1187.13	-19.30	Q.P.
866.00	H	20.43	4.49	3.86	60.79	1095	28.78	27.48	-32.01	Q.P.

Test Engineer : 

Benny Lee

6.4.2. Frequency Range of Test : from 1,000 MHz to 4,331 MHz

Remark: Frequency from 1000MHz to 4,331MHz, the emission emitted by the EUT is too low to be measured

6.4.3. EUT with 434.78MHz

6.4.2.1 Test mode : NORMAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 24°C
- Relative Humidity : 52 %
- Test Date : May 10, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

434.78 MHz / 59.69 dBuV (Horizontal) Antenna Height 1.1 Meter, Turntable Degree 360 °.


Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss						Mode		
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)		
131.40	V	11.27	1.60	0.75	43.50	150	13.62	4.80	-29.88	Peak
294.40	V	12.84	2.46	3.06	46.00	200	18.36	8.28	-27.64	Peak
129.80	H	11.33	1.58	0.63	43.50	150	13.54	4.75	-29.96	Peak
299.20	H	12.95	2.50	2.42	46.00	200	17.87	7.83	-28.13	Peak

Fundamental Frequency and Spurious Emissions :

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss						Mode		
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)		
434.78	V	16.08	3.18	36.59	80.85	11028	55.85	620.15	-25.00	Q.P.
869.50	V	20.21	4.86	6.64	60.85	1103	31.71	38.50	-29.14	Q.P.
434.78	H	16.08	3.18	40.43	80.85	11028	59.69	964.94	-21.16	Q.P.
869.50	H	20.21	4.86	11.47	60.85	1103	36.54	67.14	-24.31	Q.P.

- Frequency Range of Test : from 1,000 MHz to 4348 MHz

Remark: Frequency from 1000MHz to 4348 MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : 

Benny Lee

6.4.1.2 Test mode : HORIZONTAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 24°C
- Relative Humidity : 52 %
- Test Date : May 10, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

434.70MHz / 61.93dBuV (VERTICAL) Antenna Height 1.3 Meter, Turntable Degree 360 °.


Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
131.90	V	11.27	1.60	3.03	43.50 150	15.90	6.24	-27.60	Peak
308.80	V	13.15	2.53	2.83	46.00 200	18.51	8.42	-27.49	Peak
132.10	H	11.27	1.60	1.05	43.50 150	13.92	4.97	-29.58	Peak
310.40	H	13.20	2.54	0.99	46.00 200	16.73	6.86	-29.27	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
434.78	V	16.08	3.18	42.67	80.85 11028	61.93 1248.82	-18.92		Q.P.
869.50	V	20.21	4.86	11.00	60.85 1103	36.07 63.61	-24.78		Q.P.
434.78	H	16.08	3.18	41.00	80.85 11028	60.26 1030.39	-20.85		Q.P.
869.50	H	20.21	4.86	11.50	60.85 1103	36.57 67.38	-24.28		Q.P.

- Frequency Range of Test : from 1,000 MHz to 4348 MHz

Remark: Frequency from 1000MHz to 4348 MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : 
Benny Lee

6.4.1.3 Test mode : VERTICAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 24°C
- Relative Humidity : 52 %
- Test Date : May 10, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

434.70MHz / 63.52dBuV (VERTICAL) Antenna Height 1.1 Meter, Turntable Degree 20 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
131.20	V	11.30	1.59	0.78	43.50 150	13.67	4.83	-29.83	Peak
304.00	V	13.04	2.51	2.23	46.00 200	18.78	8.69	-27.22	Peak
132.20	H	11.27	1.60	1.85	43.50 150	14.72	5.45	-28.78	Peak
308.80	H	13.15	2.53	1.50	46.00 200	17.18	7.23	-28.82	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin (dB)	Detect Mode
434.70	V	16.08	3.18	44.26	80.85 11028	63.52 1499.68	-17.33		Q.P.
869.50	V	20.21	4.86	7.47	60.85 1103	32.54 42.36	-28.31		Q.P.
434.70	H	16.08	3.18	38.67	80.85 11028	57.93 787.95	-22.92		Q.P.
869.50	H	20.21	4.86	8.66	60.85 1103	33.73 48.58	-27.12		Q.P.

- Frequency Range of Test : from 1,000 MHz to 4348 MHz

Remark: Frequency from 1000MHz to 4348 MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : Benny
Benny Lee

7. Antenna Factor & Cable Loss

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.8	0.8
35	16.9	0.8
40	16.2	0.8
45	13.2	0.8
50	10.9	0.8
55	9.0	1.0
60	7.2	1.0
65	6.8	1.0
70	6.5	1.0
75	7.1	1.2
80	7.8	1.2
85	9.1	1.0
90	10.4	1.2
95	10.7	1.2
100	11.0	1.3
110	12.3	1.3
120	13.5	1.3
130	12.9	1.5
140	11.6	1.5
150	10.6	1.7
160	9.5	1.8
170	9.6	1.8
180	9.8	1.7
190	9.8	1.7
200	9.8	1.7
220	11.2	1.8
240	12.6	1.8
260	13.5	2.0
280	13.6	2.0
300	13.8	2.2
320	14.5	2.3
340	15.2	2.4
360	15.8	2.5
380	16.1	2.5
400	16.5	2.5
450	16.9	2.8
500	17.7	3.0
550	18.6	3.3
600	19.1	3.3
650	19.8	3.5
700	18.8	3.7
750	18.6	4.0
800	20.3	4.2
850	20.9	4.3
900	19.4	4.8
950	21.9	4.7
1000	20.2	4.8
1000	24.3	4.1
2000	28.1	5.8
3000	30.3	7.2
4000	32.8	8.6
5000	33.6	10.0

LKOP6

8. EMI Suppression Component List

1. Add three cores on internal power cable (as shown on internal photos page 2 page 3).

9. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer (Site 6)	ADVANTEST	R3261C	71720760	9KHz – 2.6GHz	Mar. 08, 2000	Radiation
Receiver (Site 6)	R&S	ESCS30	847793/003	9 K – 2.75 GHz	Dec. 27, 2000	Radiation
Amplifier (Site 6)	HP	87405A	3207A01437	100K - 3GHz	Aug. 03, 2000	Radiation
Bilog Antenna (Site 6)	CHASE	CBL6112A	2442	30MHz -2GHz	Jun. 23, 2000	Radiation
Half-wave dipole antenna (Site 6)	EMCO	3121C	9705-1285	28 M - 1GHz	May 17, 2000	Radiation
Turn Table (site 6)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 6)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation

Calibration Interval of instruments listed above is one year.

10. Uncertainty of Test Site

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2.5
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.4

$$U = \{(0.3/2)^2 + (2.5^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}^{1/2} = 1.7$$

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m	10m
Antenna factor calibration	normal(k=2)	±1.6	±1.6
cable loss calibration	normal(k=2)	±0.3	±0.3
RCV/SPA specification	rectangular	±2.5	±2.5
Antenna Directivity	rectangular	±3	±0.5
Antenna Factor V.S. Height	rectangular	±2	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25	±0.25
site imperfection	rectangular	±2	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54	±0.54
combined standard uncertainty Ue(y)	normal	±2.9	±2.4
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.8	±4.8

$$U = \{(1.6/2)^2 + (0.3/2)^2 + (3^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}^{1/2} = 2.4 \text{ for 10m test distance}$$

$$U = \{(1.6/2)^2 + (0.3/2)^2 + (3^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}^{1/2} = 2.9 \text{ for 3m test distance}$$