



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

WIRELESS INTERNET ACCESS SUBSCRIBER UNIT

MODEL NUMBER: M5580M-FSU

FCC ID: NCYM5580MFSU

REPORT NUMBER: 05U3577-1

ISSUE DATE: OCTOBER 31, 2005

Prepared for

**TRANGO SYSTEMS, INC
15070 AVENUE OF SCIENCE, SUITE 200
SAN DIEGO, CA 92128**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	10/31/05	Initial Issue	MH

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND	10
7.1.1. 6 dB BANDWIDTH	10
7.1.2. 99% BANDWIDTH.....	17
7.1.3. PEAK OUTPUT POWER	24
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	32
7.1.5. AVERAGE POWER.....	35
7.1.6. PEAK POWER SPECTRAL DENSITY	36
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	43
1. RADIATED EMISSIONS.....	56
2. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	56
7.1.8. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND	59
3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	63
7.2. POWERLINE CONDUCTED EMISSIONS	67
8. SETUP PHOTOS	71

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: TRANGO SYSTEMS, INC
15070 AVENUE OF SCIENCE, SUITE 200
SAN DIEGO, CA 92128

EUT DESCRIPTION: Wireless Internet Access Subscriber Unit

MODEL: M5580M-FSU

SERIAL NUMBER: 1p0a2D05092101

DATE TESTED: OCTOBER 25-28, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE
ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

JOSEPH CHUNG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Wireless Internet Access Subscriber Unit, 5.8 GHz Transceiver.

The radio module is manufactured by TRANGO SYSTEMS, INC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

5725 to 5850 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5736 - 5836	OFDM mode	24.84	304.79
5736 - 5836	CCK mode	24.91	309.74

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a single patch, which could be set to either horizontal or vertical, both orientations have a maximum gain of 8dB. With a parabolic reflector added, the maximum gain is 25dB.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 1p0a2.

The test utility software used during testing was telnet.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 5386 MHz.

The worst-case data rate for this channel is determined to be 11 Mb/s.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	HON-KWANG	D12-10-1000-10	N/A	DOC
J-Box	trangobroadbandnetworks	N/A	N/A	N/A
Laptop	SONY	PCG-643L	28360230 3525912	DOC
Docking Station	SONY	PCGA-DSM51	A8059873A	DOC
AC/DC Adapter	SONY	PCGA-AC19V1	0044 D 0183529	DOC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Unshielded	1.8m	
2	RJ45	1	RJ45	Shielded	4.3m	
3	RJ45	1	RJ45	Unshielded	3.0m	
4	DC	1	DC	Unshielded	1.8m	
5	AC	1	AC	Unshielded	0.8m	
N/A	RJ45	1	RJ45	Shielded	33m	for 30M-1GHz measurement

TEST SETUP

The EUT is connected through a RJ45 cable that is powered by the J-Box.

SETUP DIAGRAM FOR TESTS

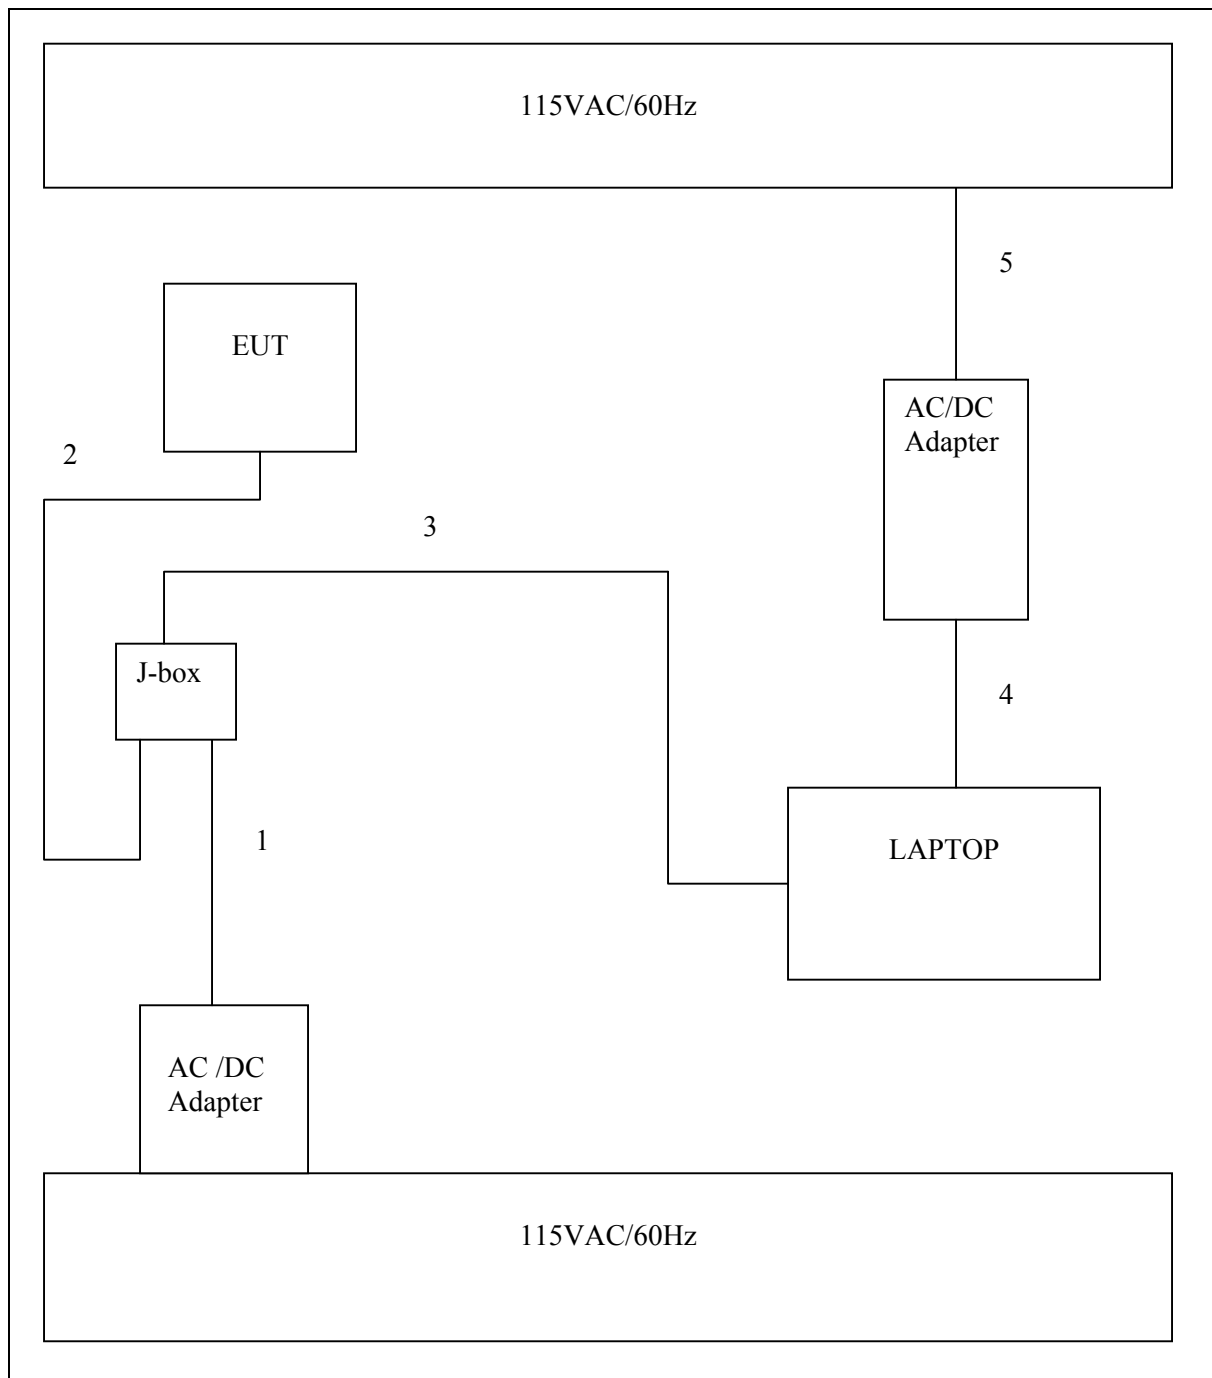

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/2006
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/2006
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42510266	10/19/2006
Antenna, Horn 1 ~ 18 GHz	Ertco	3115	6717	4/22/2006
Antenna, Horn, 18 ~ 26 GHz	ARA	MWH-1826/B	1013	9/12/2006
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2006
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	12/29/2005
PreAmplifier 26-40 GHz	Miteq	NSP4000-SP2	924343	8/18/2006
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	8/30/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/29/2006
RF Filter Section	HP	85420E	3705A00256	3/29/2006
Antenna, Bilog 30MHz ~ 2Ghz	Solar	JB1	A121003	3/3/2006

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


OFDM Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5736	16330	500	15830
Middle	5776	15670	500	15170
High	5836	16250	500	15750


CCK Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5736	11750	500	11250
Middle	5776	13000	500	12500
High	5836	12920	500	12420


6 DB BANDWIDTH (OFDM MODE)

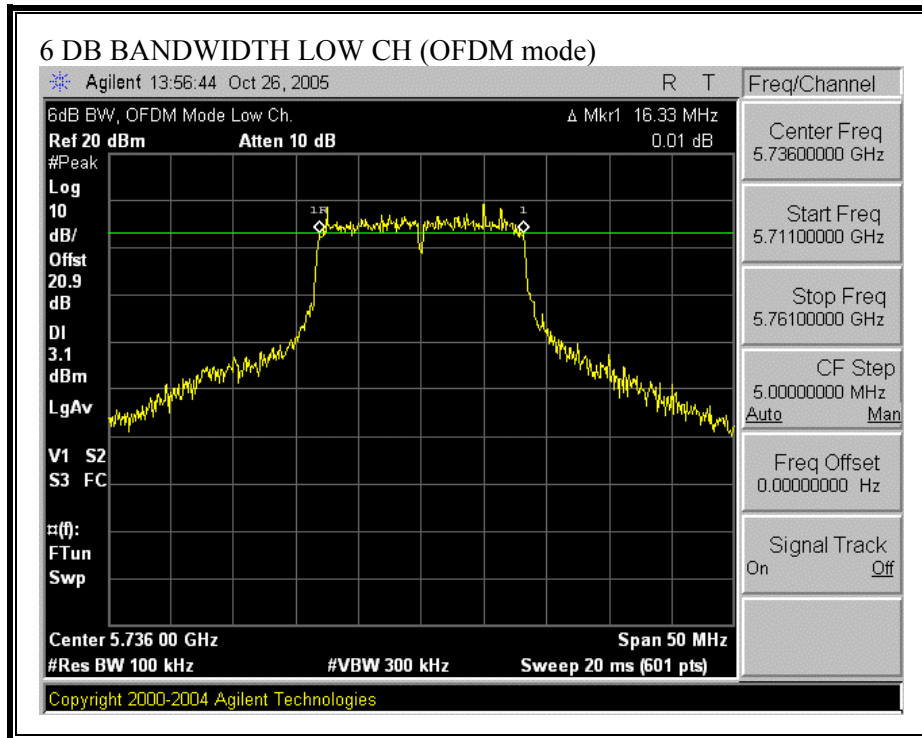


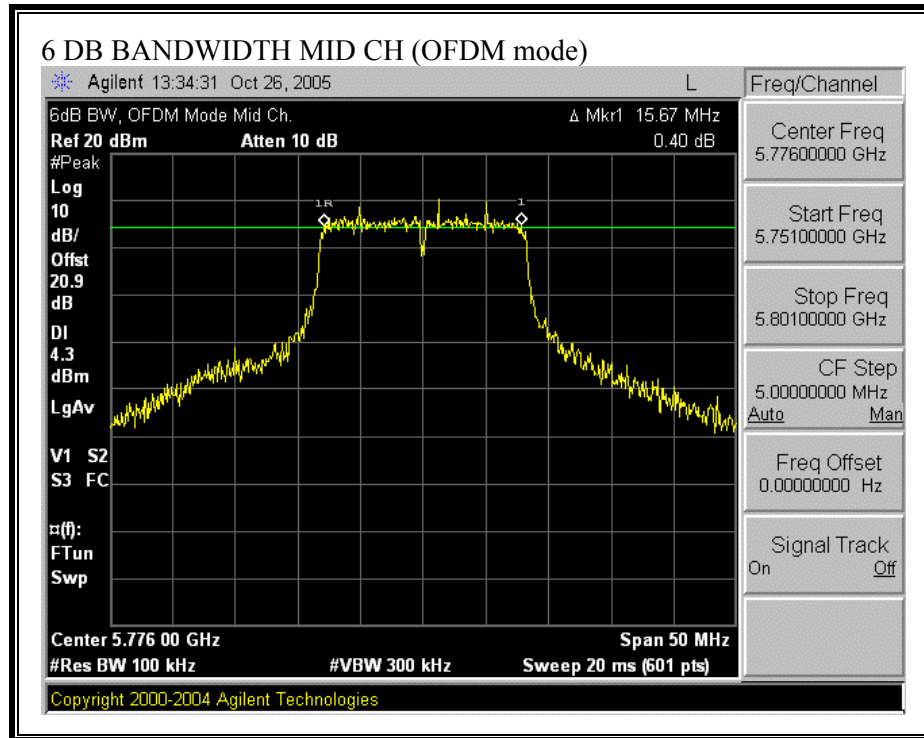


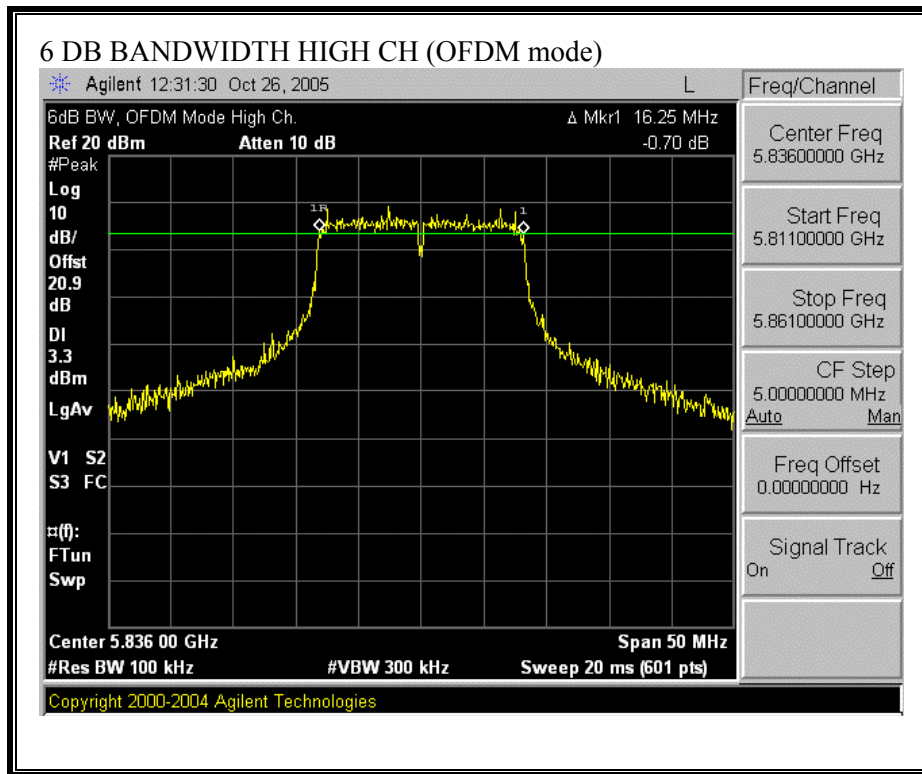

6 DB BANDWIDTH (CCK Mode)

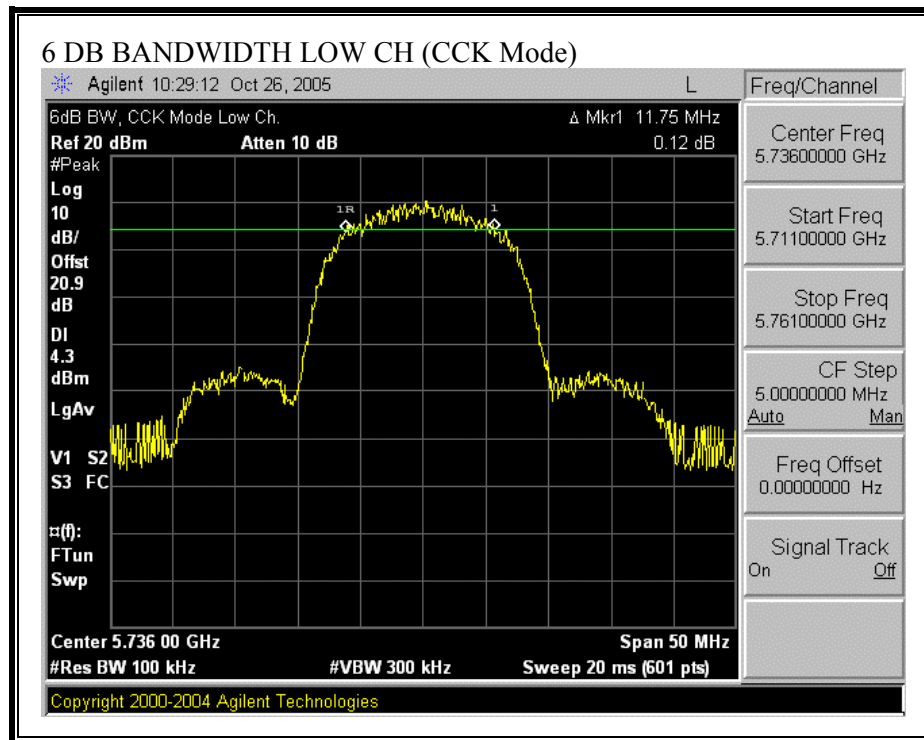

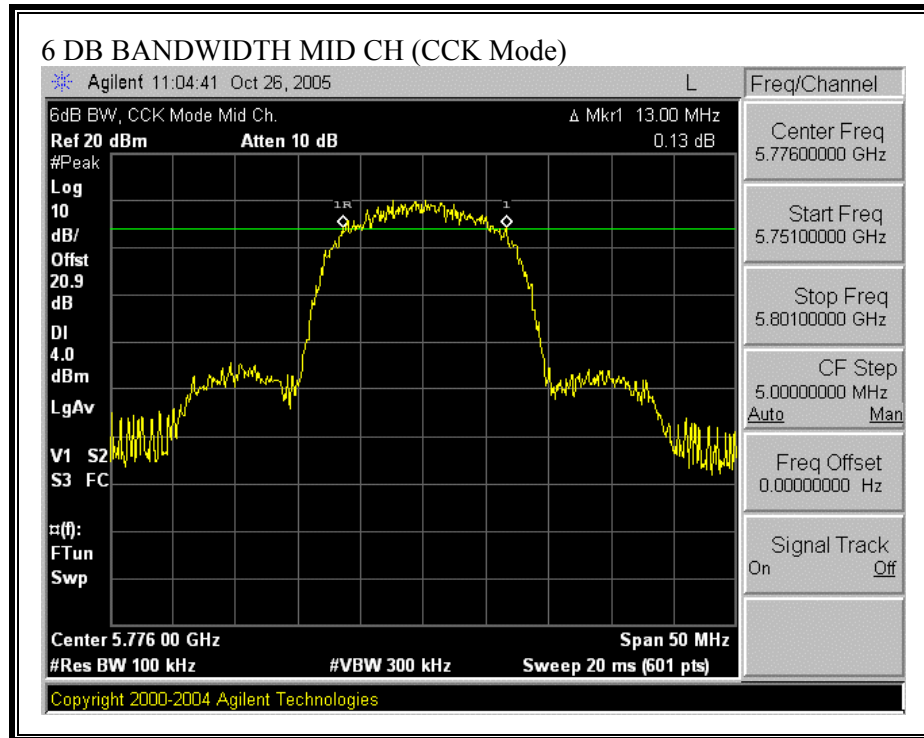

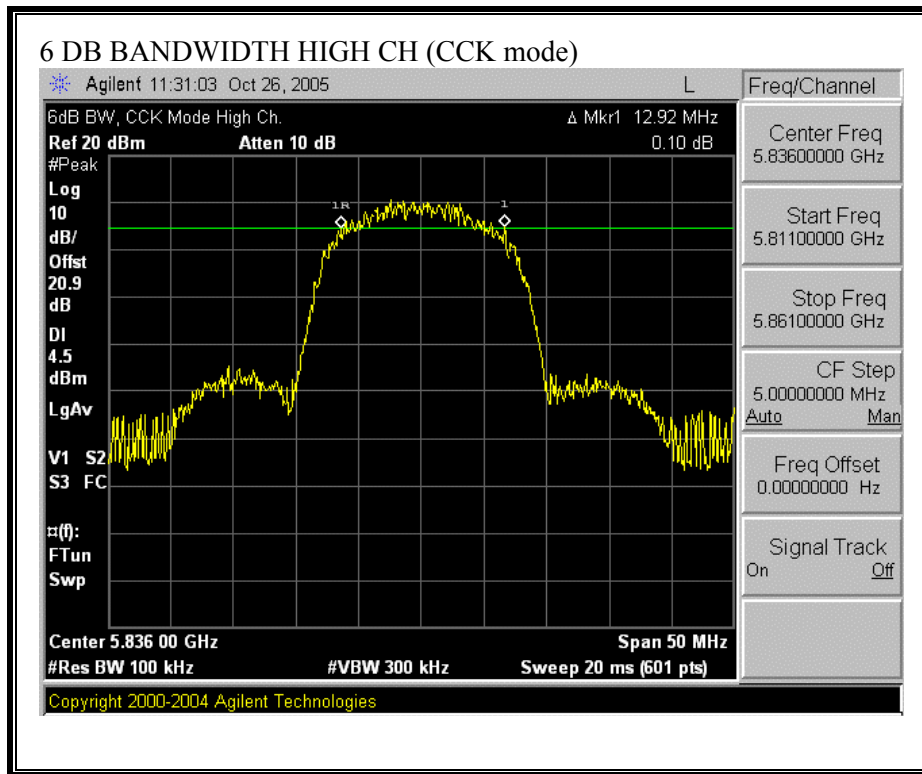

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


OFDM Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5736	16.4643
Middle	5776	16.4690
High	5836	16.4878


CCK Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5736	15.2635
Middle	5776	15.2653
High	5836	15.2620


99% BANDWIDTH (OFDM Mode)

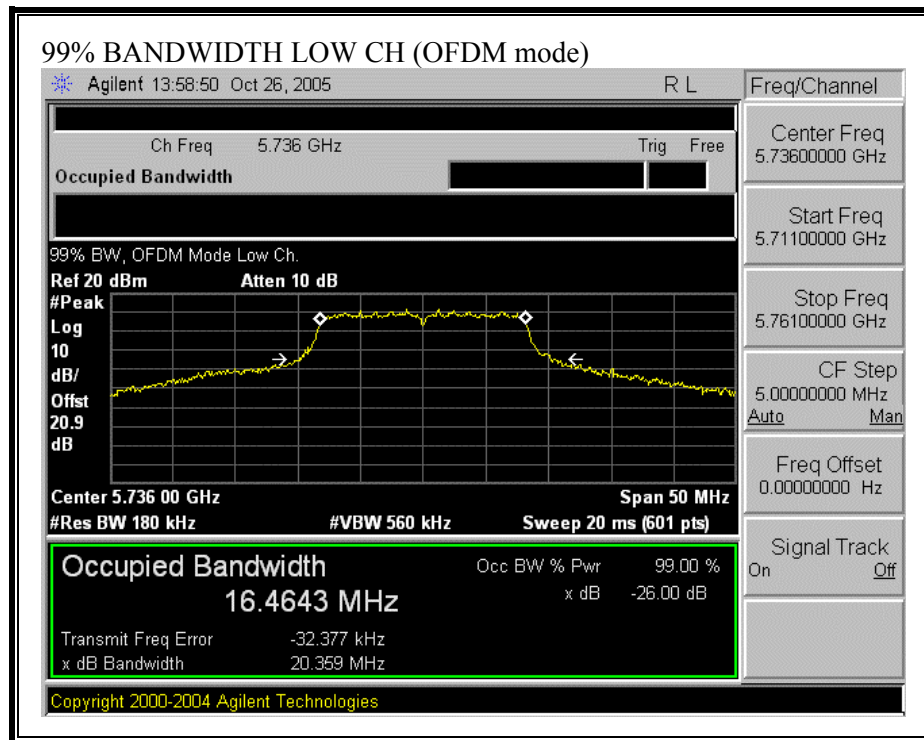


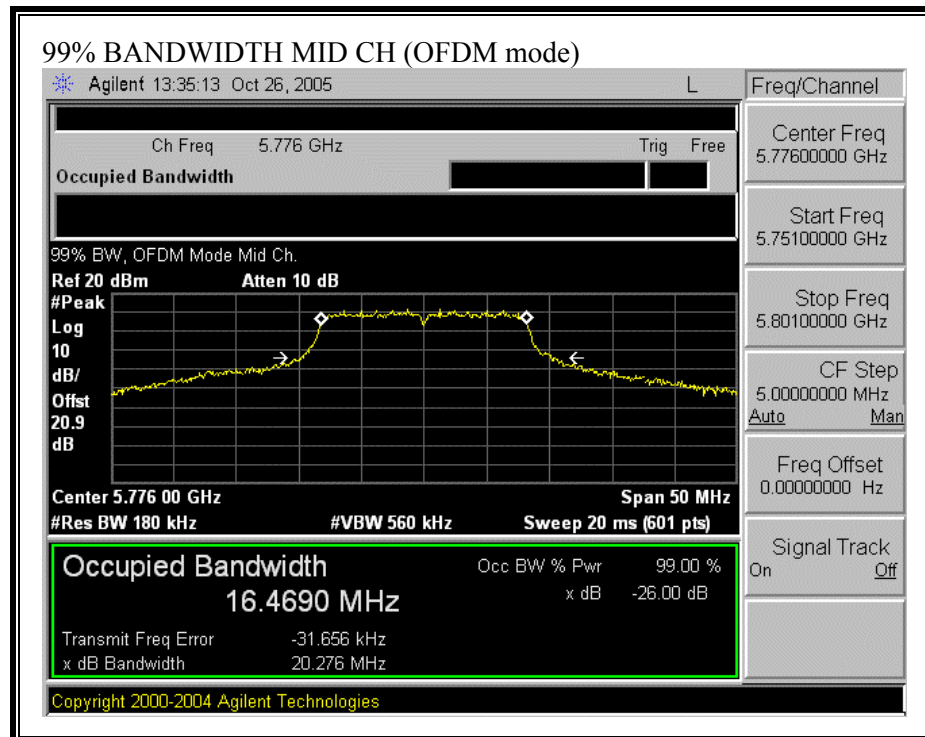


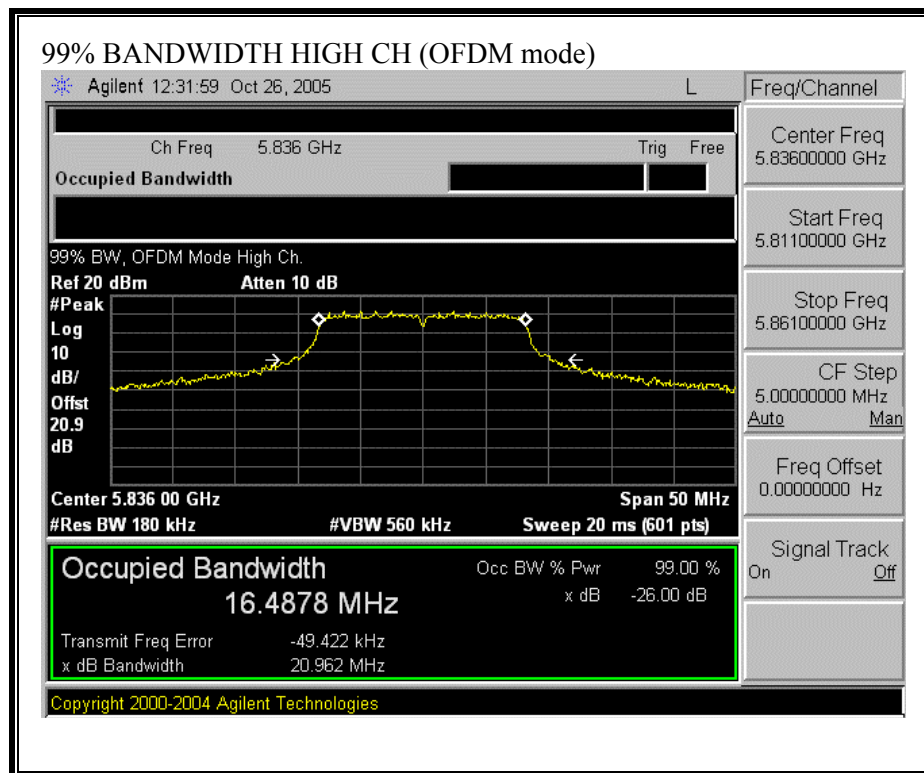

99% BANDWIDTH (CCK Mode)

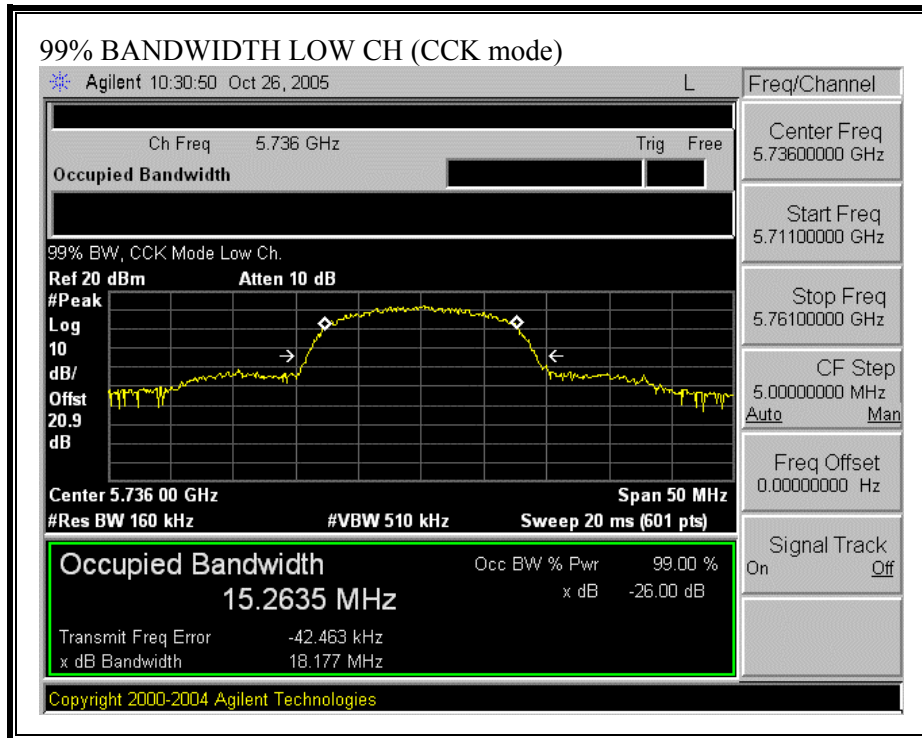

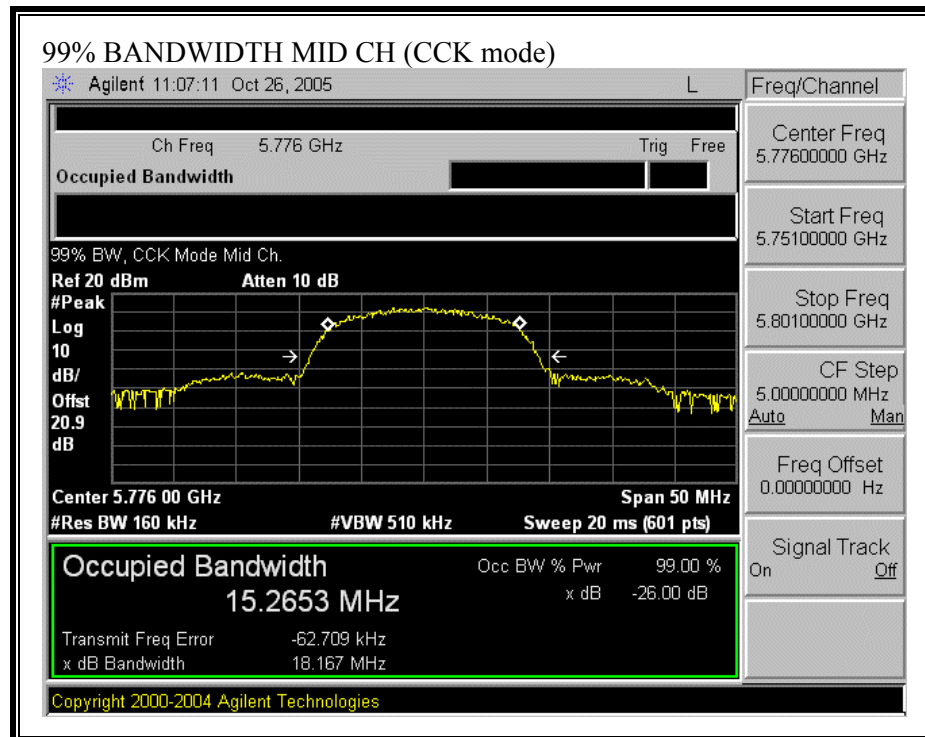

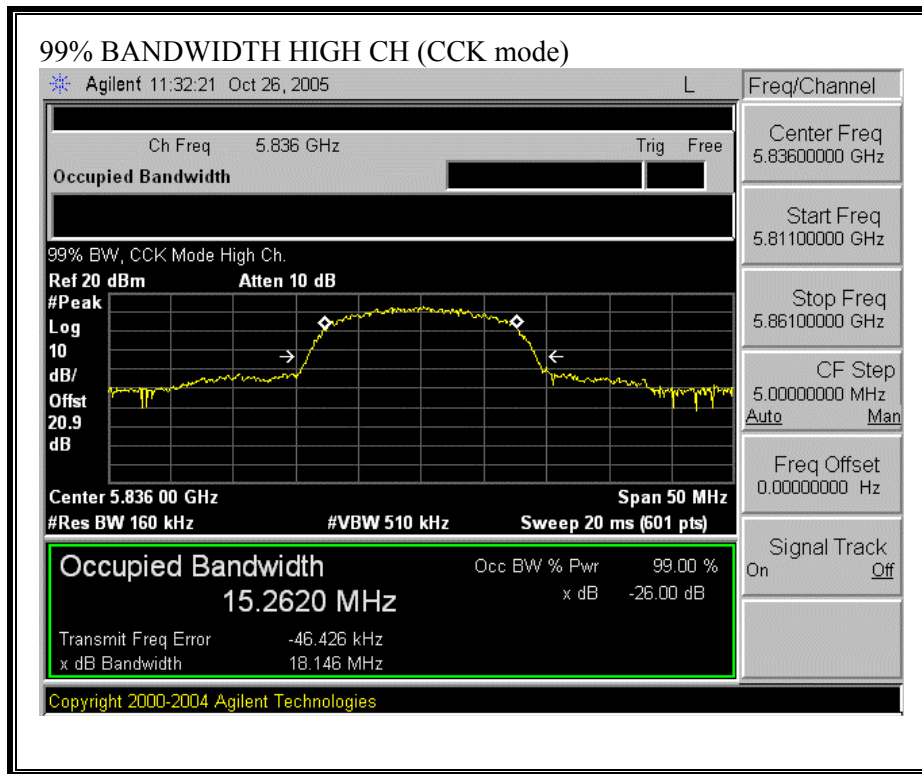

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 24 dBi exclusively for fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


OFDM Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5736	24.27	30	-5.73
Middle	5776	24.51	30	-5.49
High	5836	24.84	30	-5.16


CCK Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5736	24.14	30	-5.86
Middle	5776	24.46	30	-5.54
High	5836	24.91	30	-5.09


OUTPUT POWER (OFDM Mode)

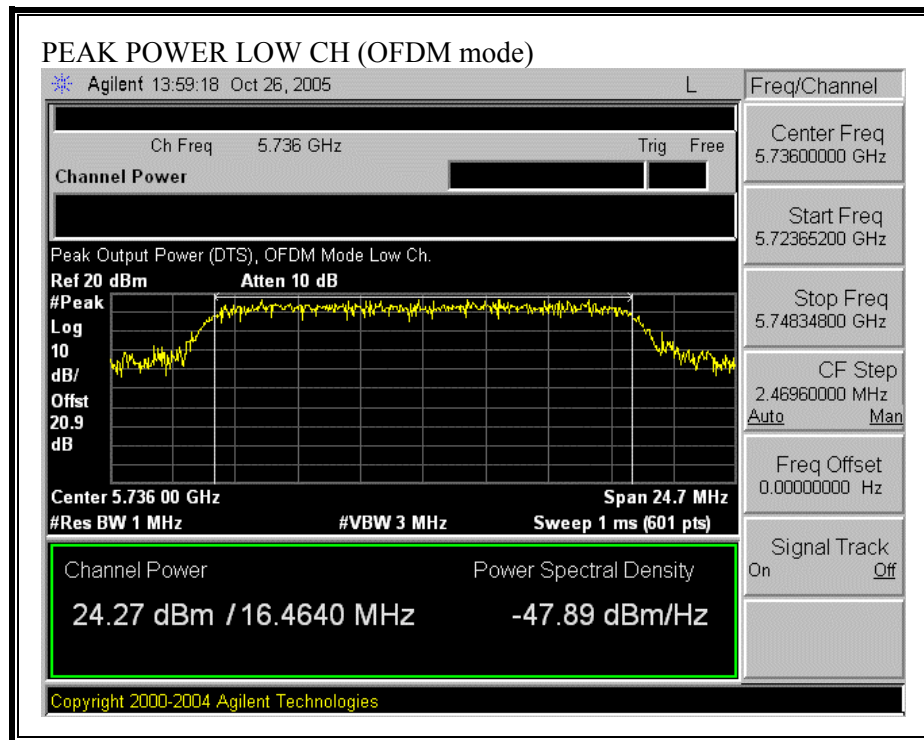


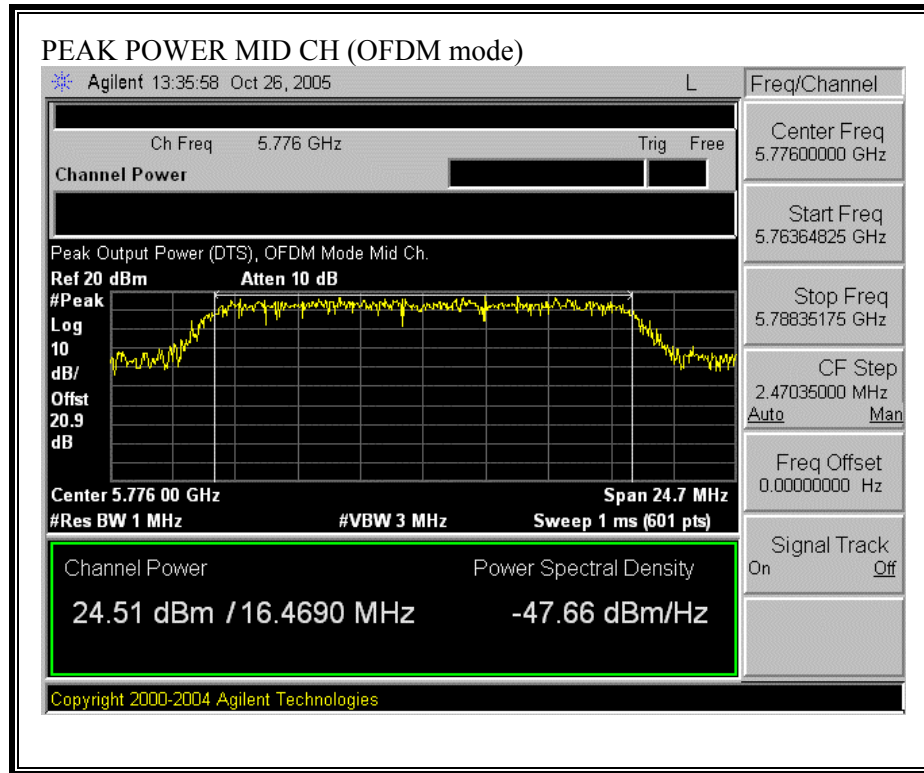


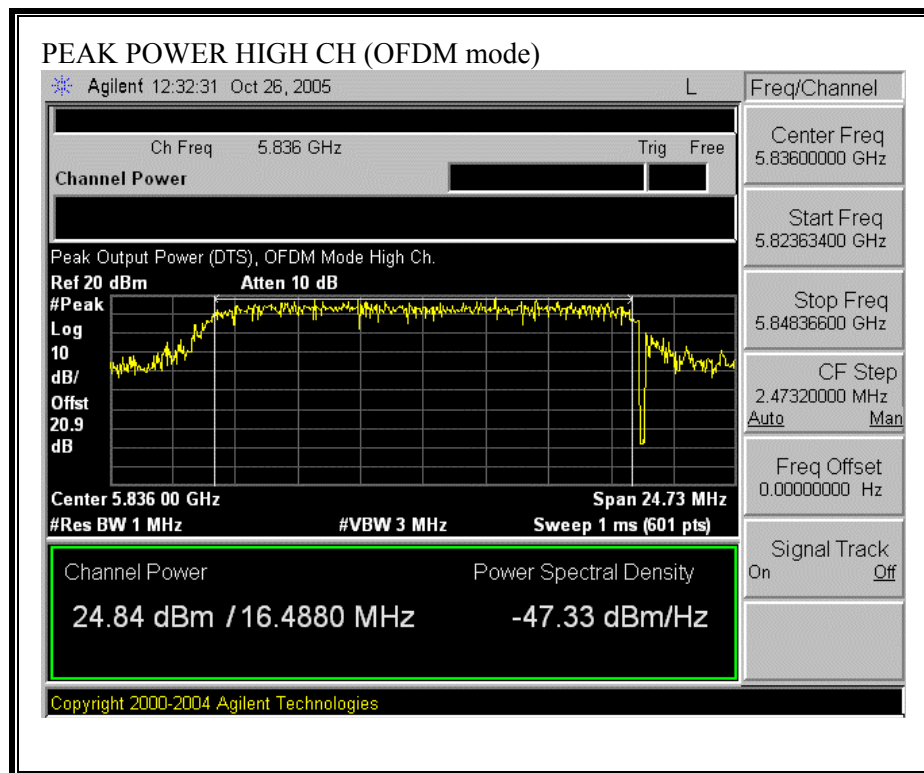

OUTPUT POWER (CCK Mode)

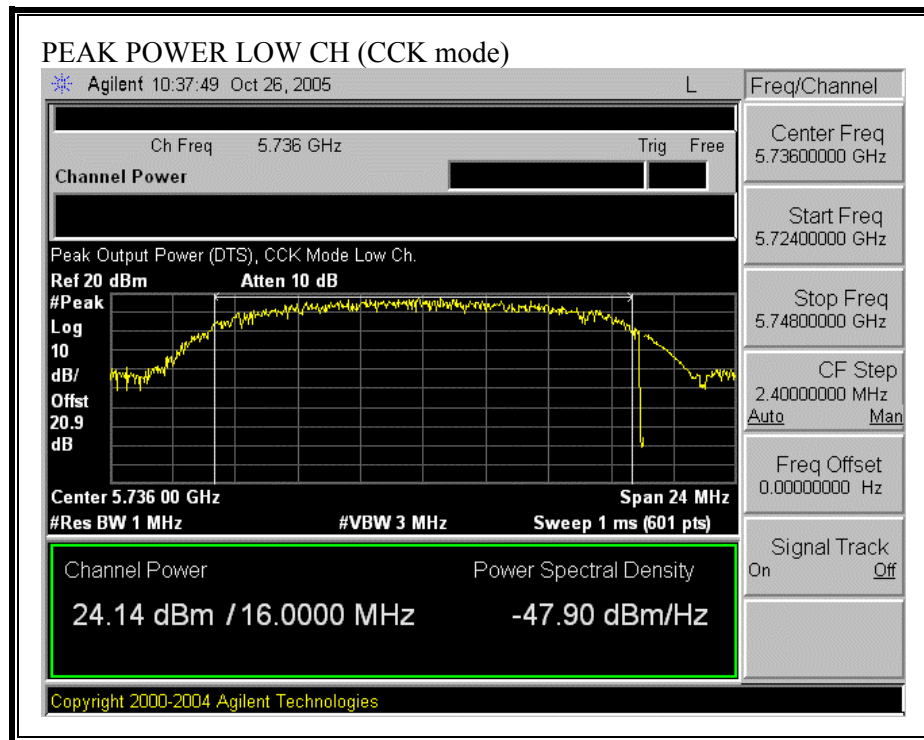

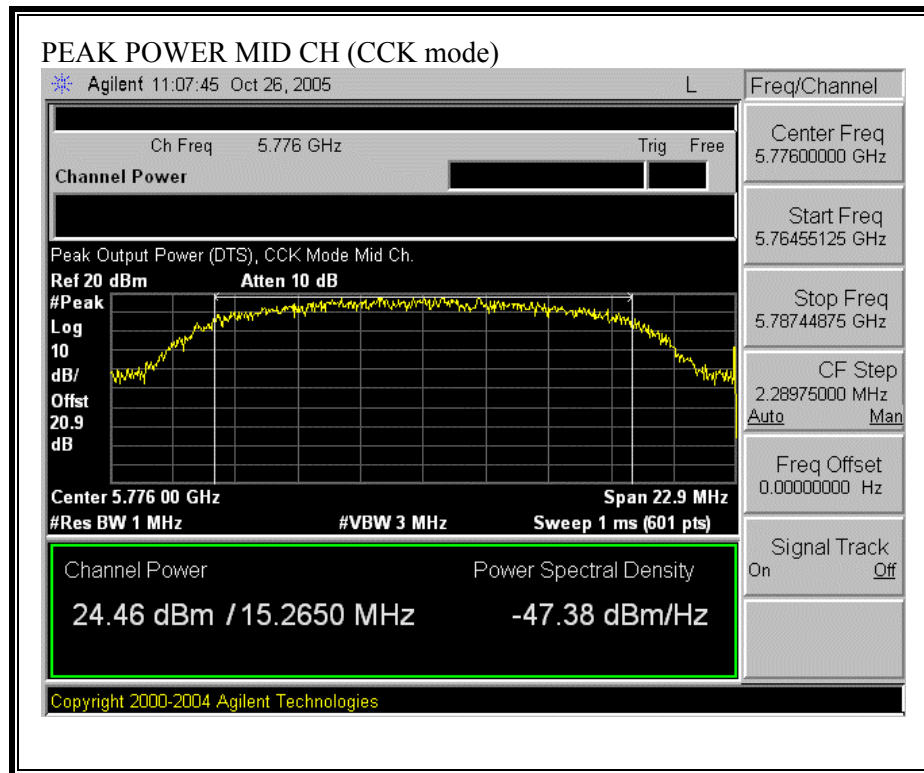

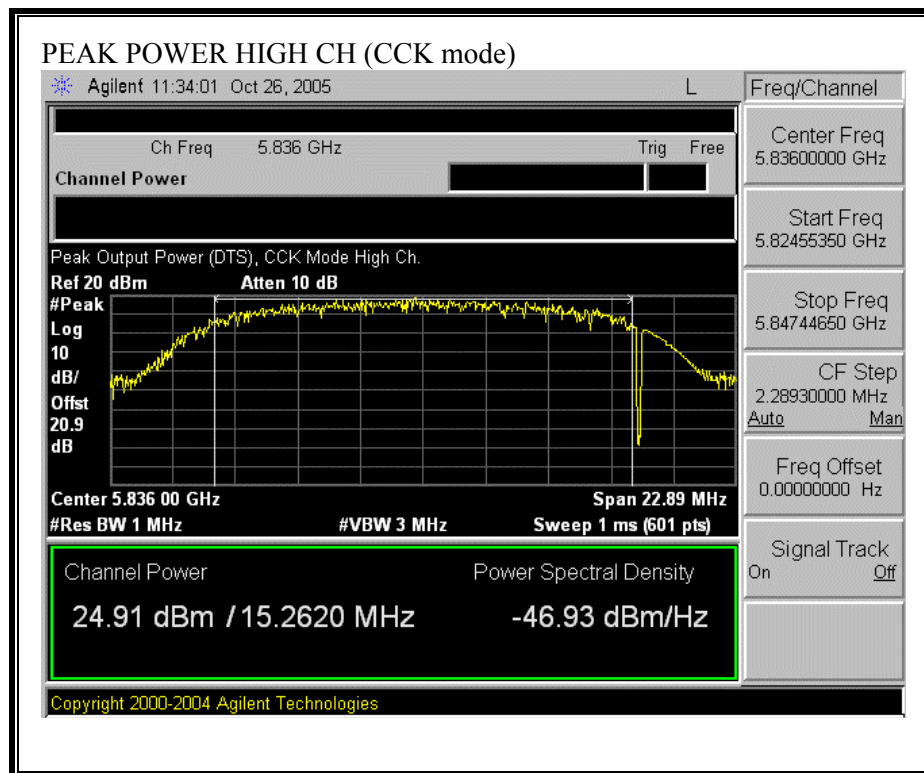

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted: (MPE distance is greater than 20 cm)

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
OFDM Mode	1.0	24.84	24.00	78.03
CCK Mode	1.0	24.91	24.00	78.66

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 20.9 dB (including 20 dB pad and 0.9 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

OFDM Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5736	20.52
Middle	5776	21.40
High	5836	21.44

CCK Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5736	21.04
Middle	5776	21.08
High	5836	21.90

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


OFDM Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5736	-5.26	8	-13.26
Middle	5776	-4.83	8	-12.83
High	5836	-4.37	8	-12.37


CCK Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5736	-2.34	8	-10.34
Middle	5776	-2.04	8	-10.04
High	5836	-2.54	8	-10.54


PEAK POWER SPECTRAL DENSITY (OFDM Mode)

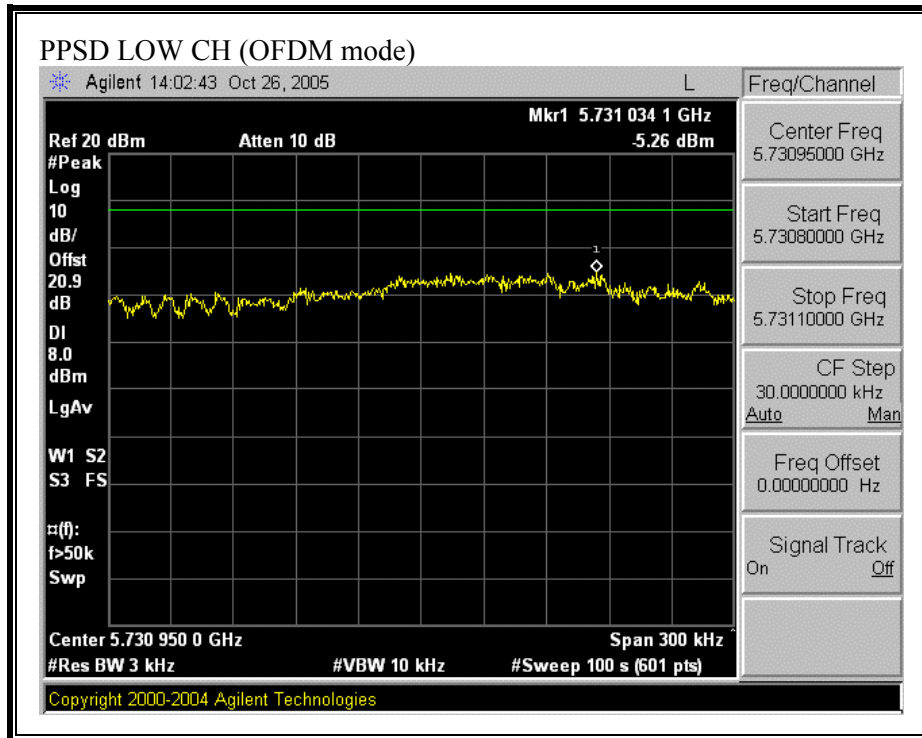


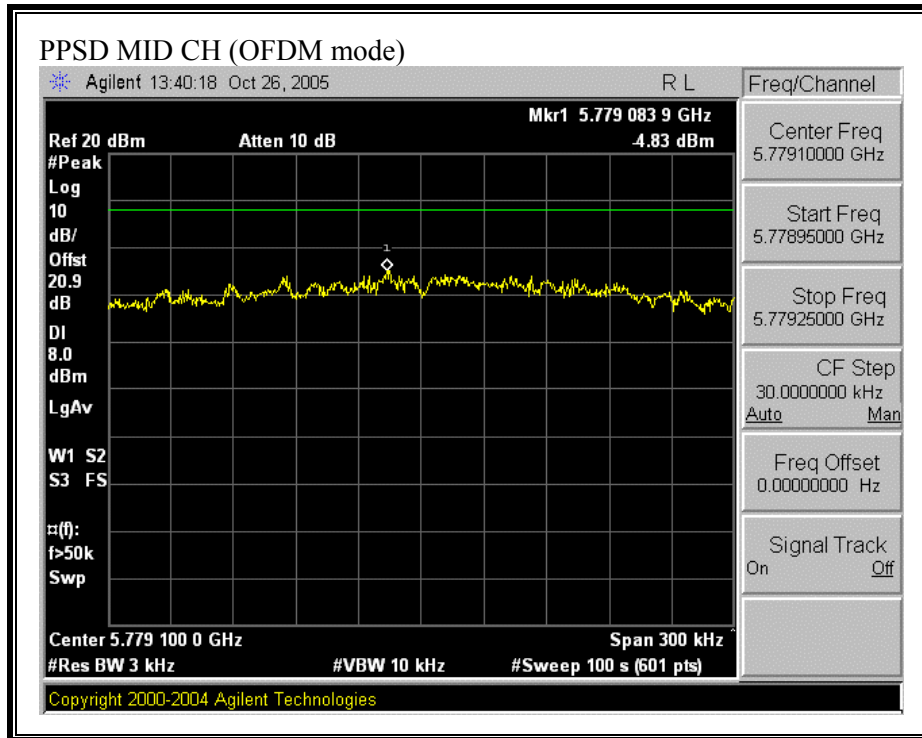


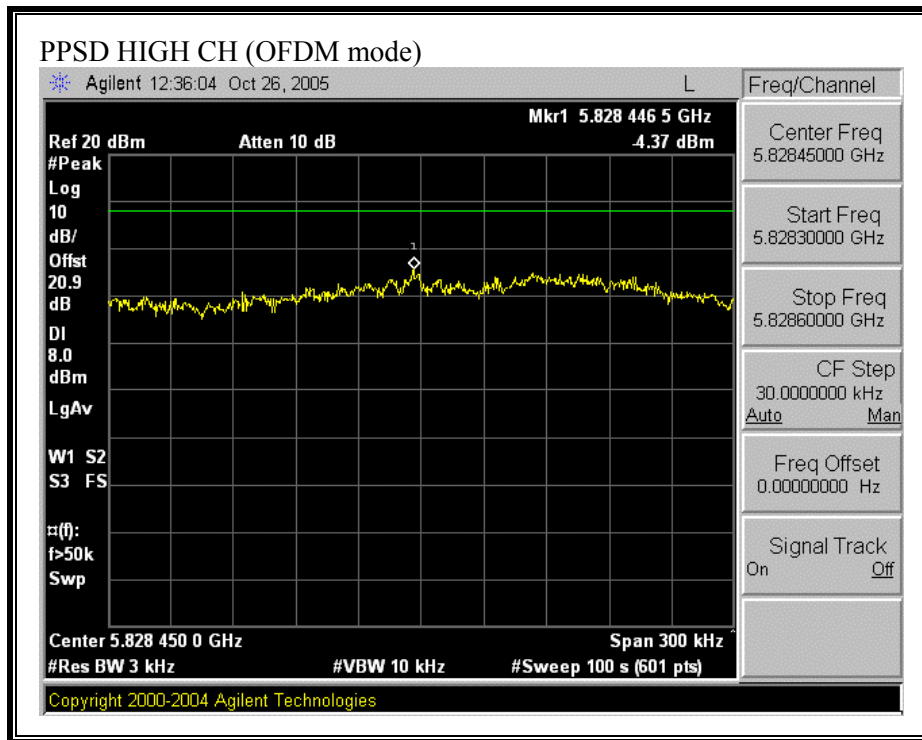

PEAK POWER SPECTRAL DENSITY (CCK Mode)

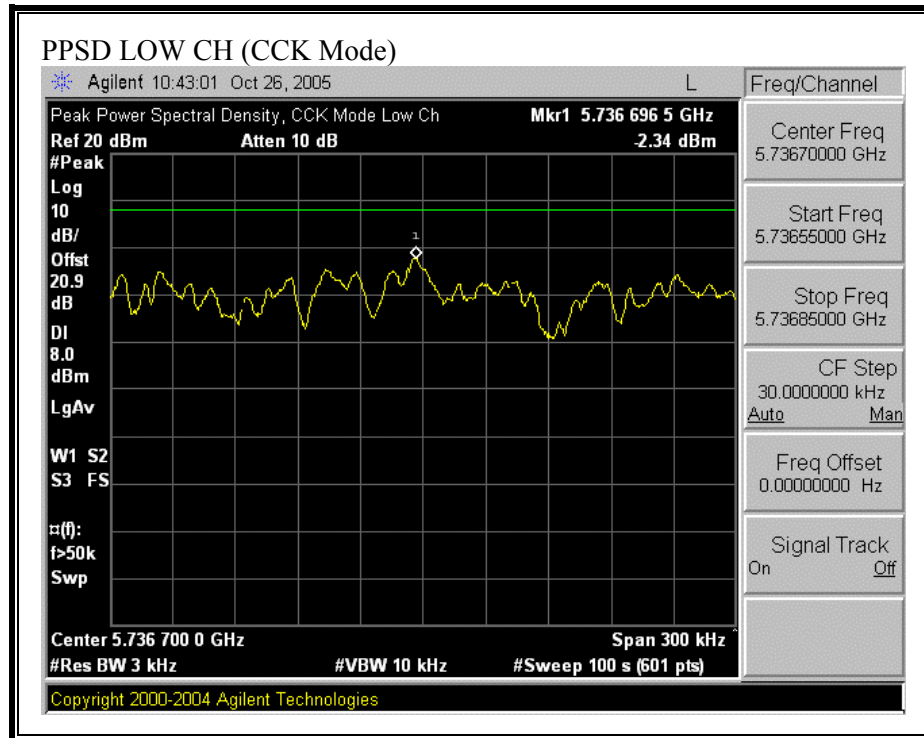

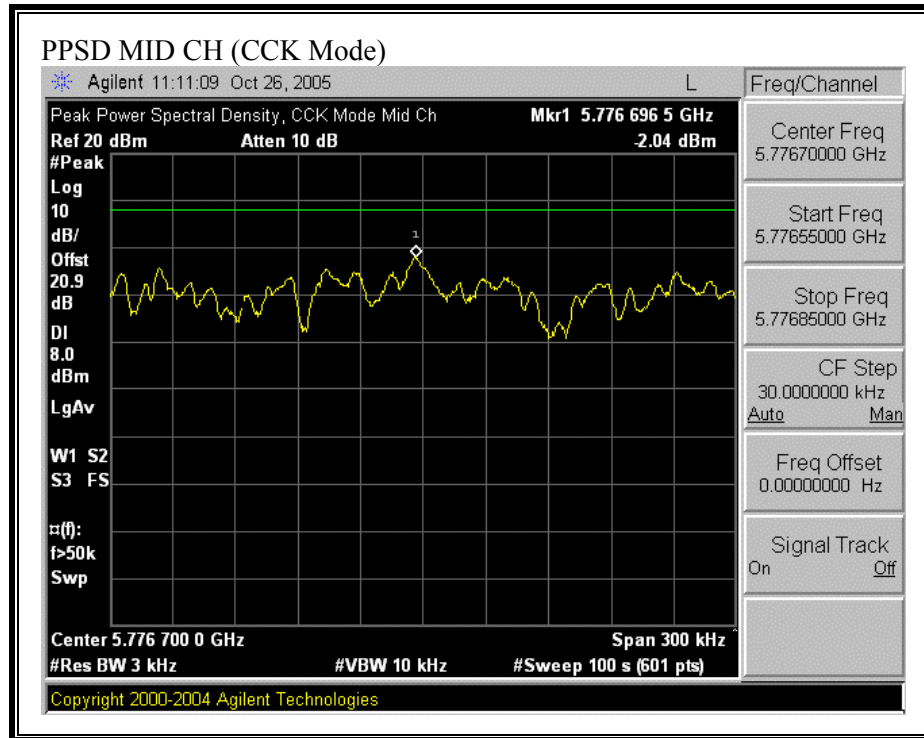

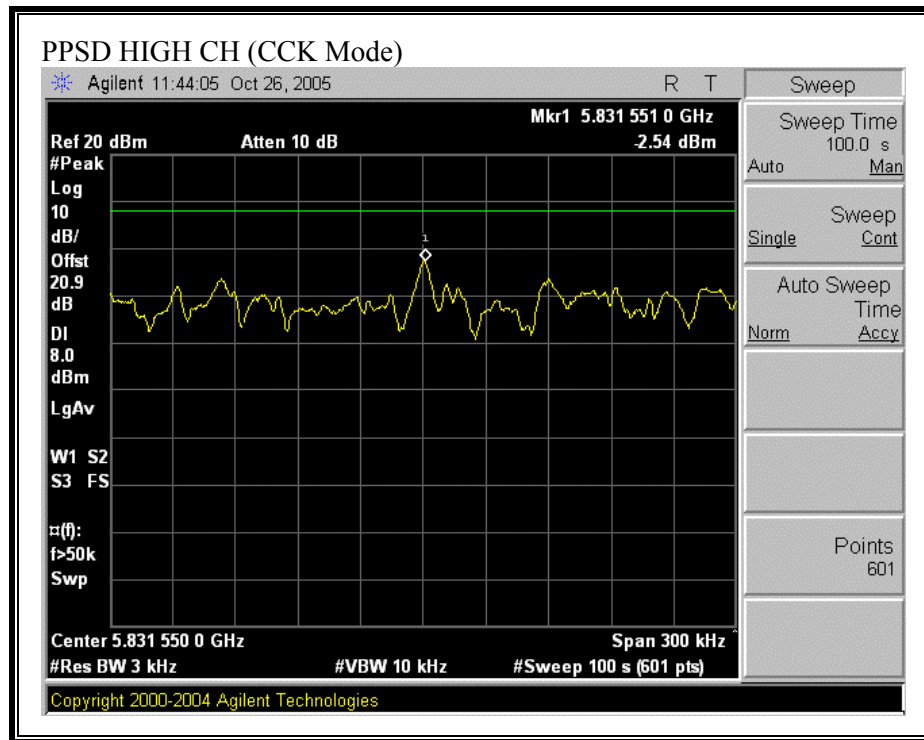

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (OFDM Mode)

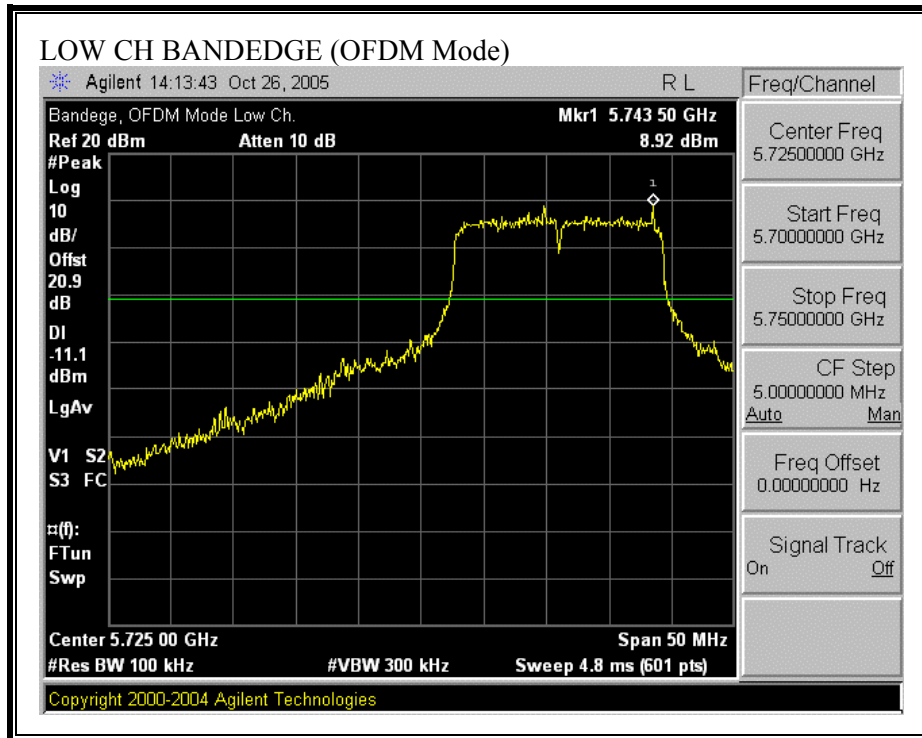

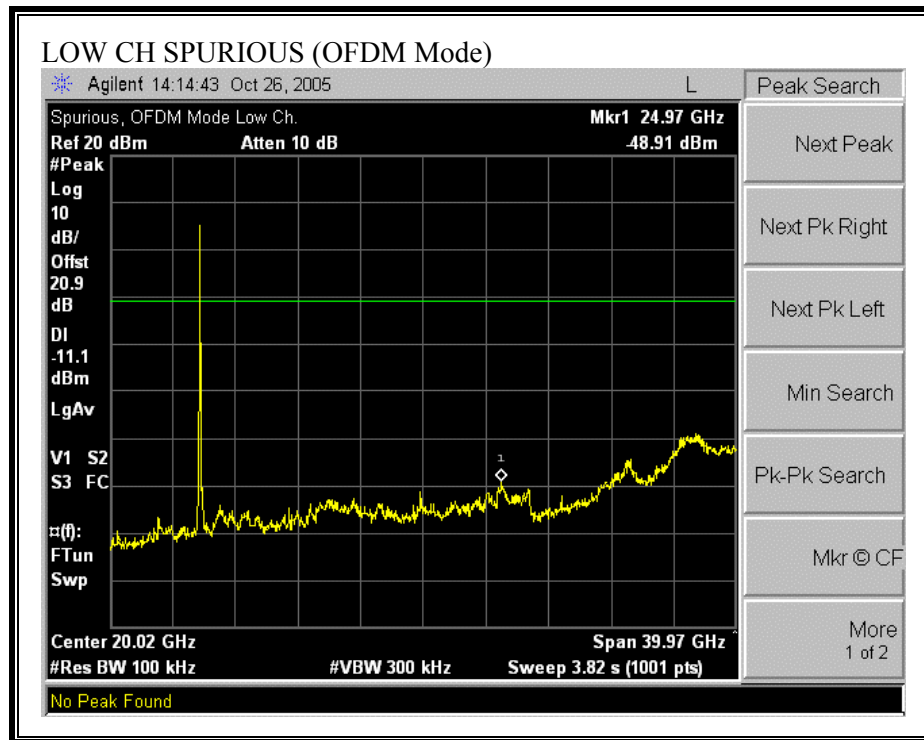



SPURIOUS EMISSIONS, MID CHANNEL (OFDM Mode)

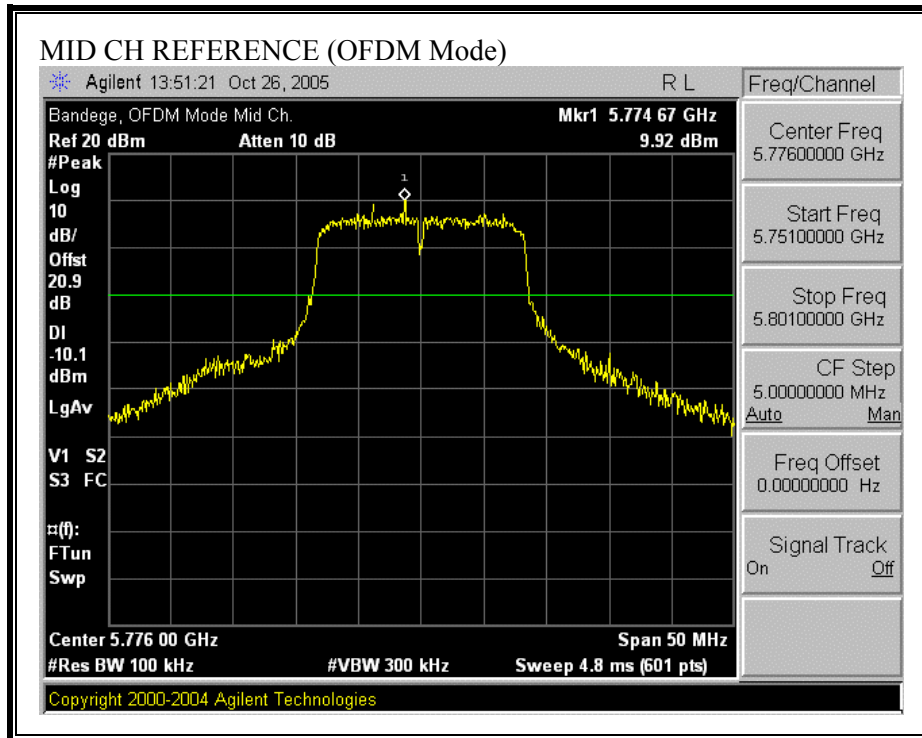

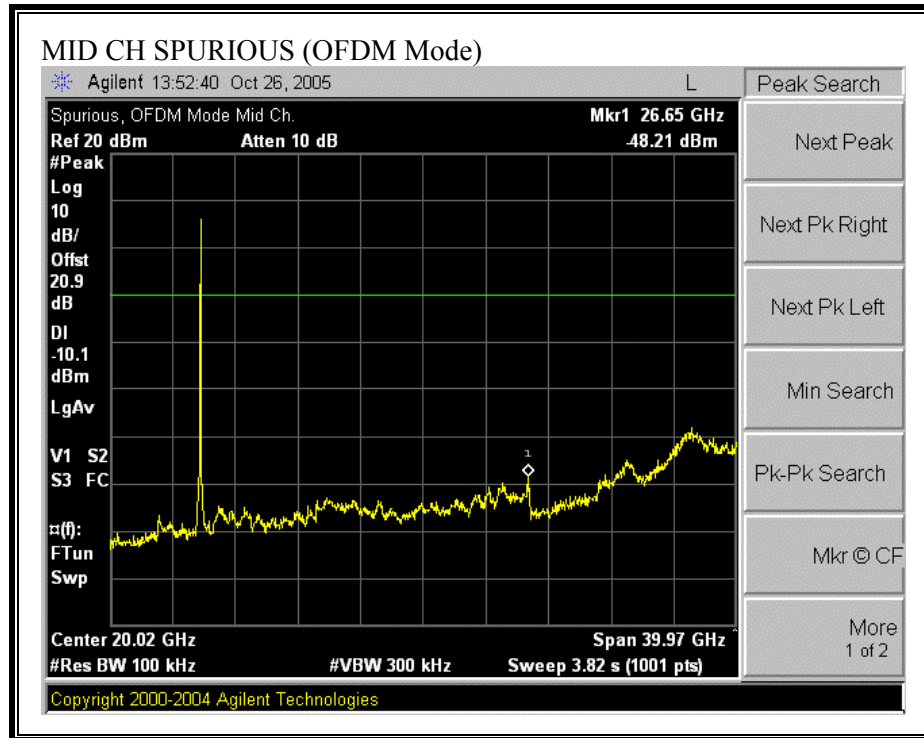



SPURIOUS EMISSIONS, HIGH CHANNEL (OFDM Mode)

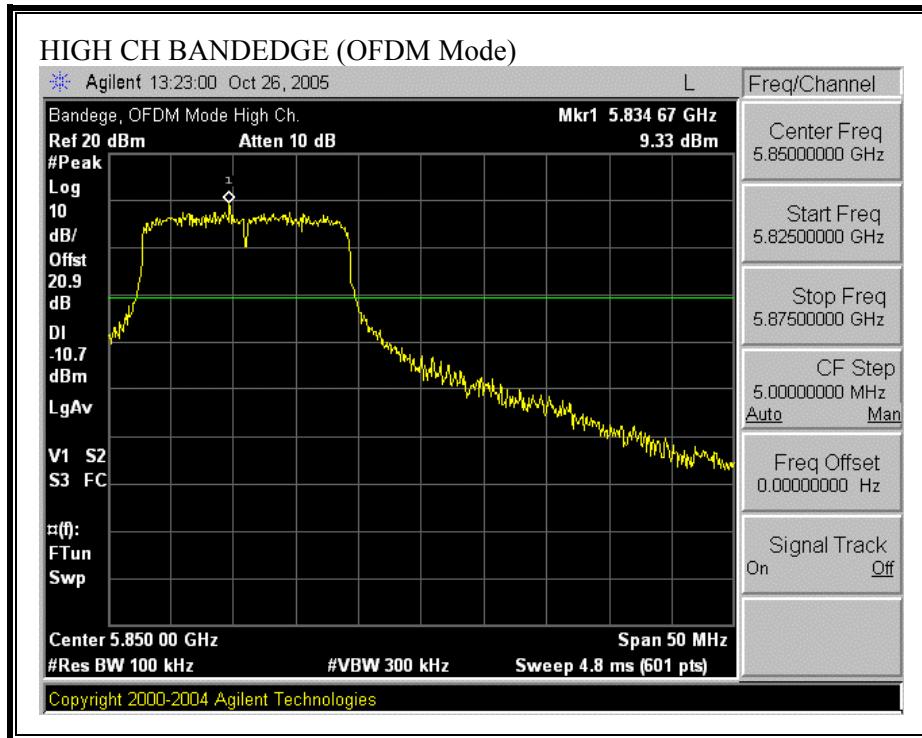

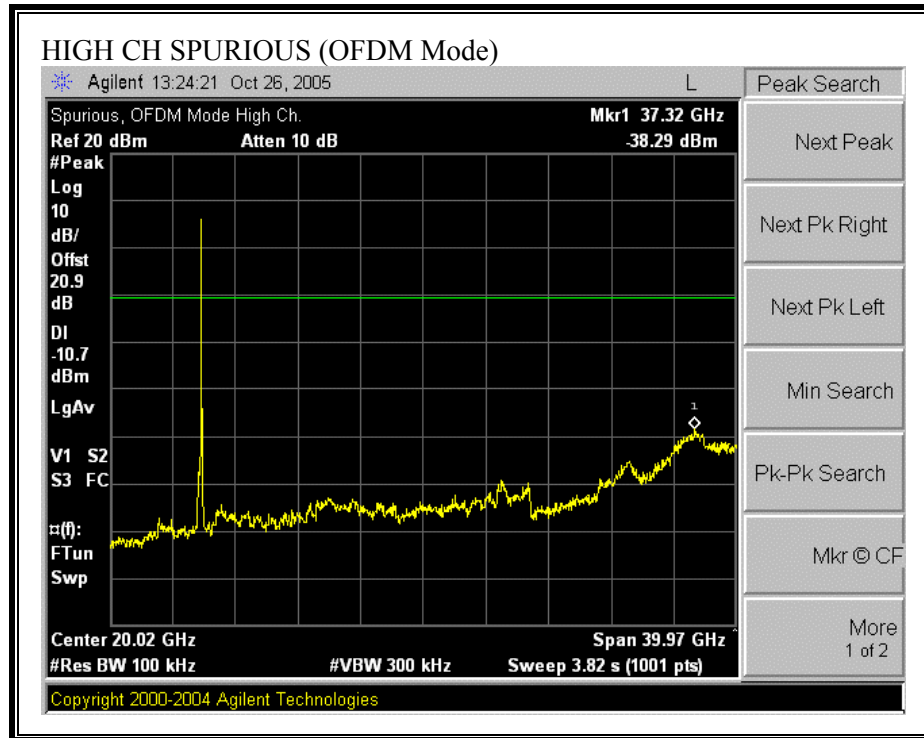



SPURIOUS EMISSIONS, LOW CHANNEL (CCK Mode)

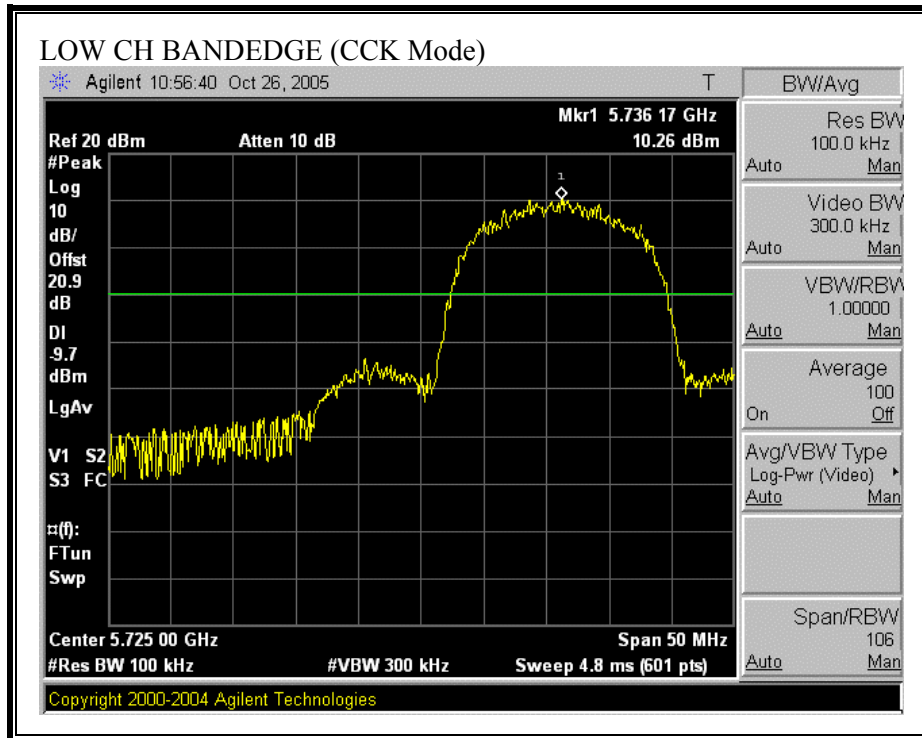

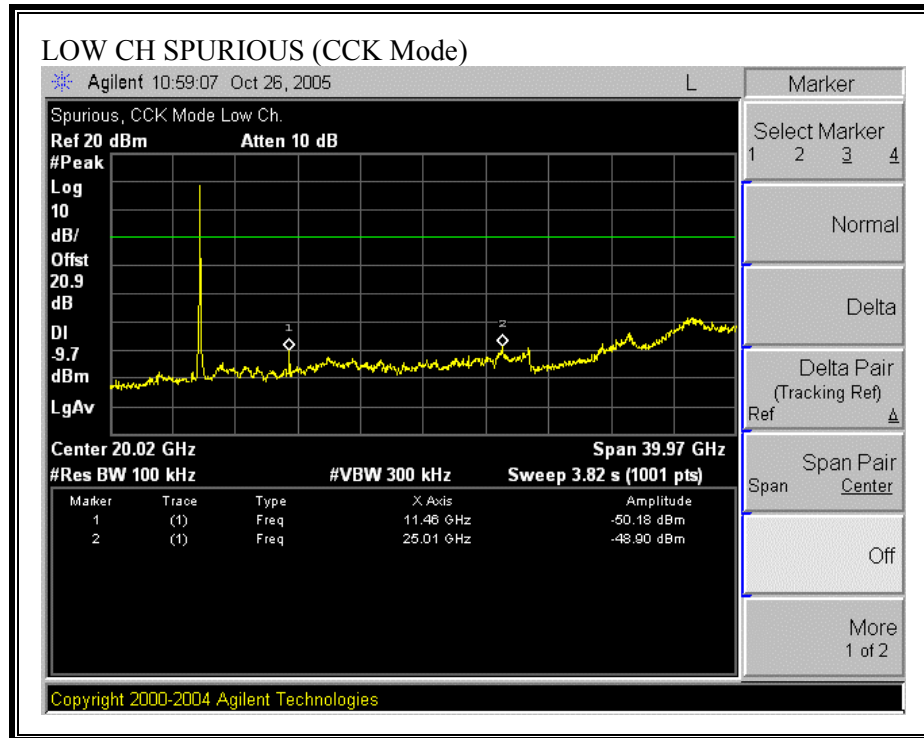



SPURIOUS EMISSIONS, MID CHANNEL (CCK Mode)

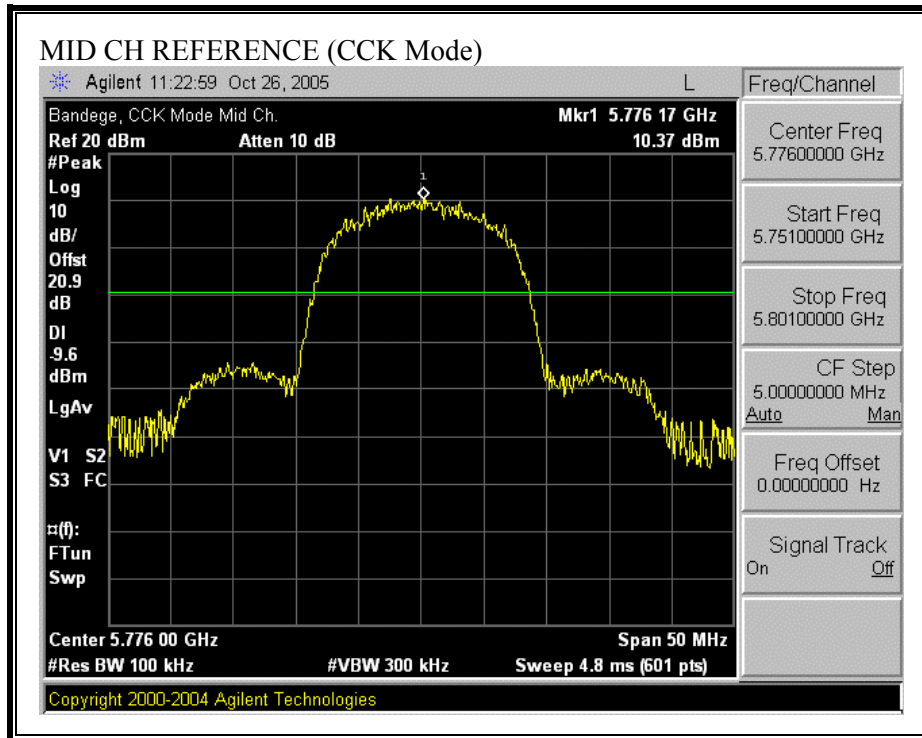

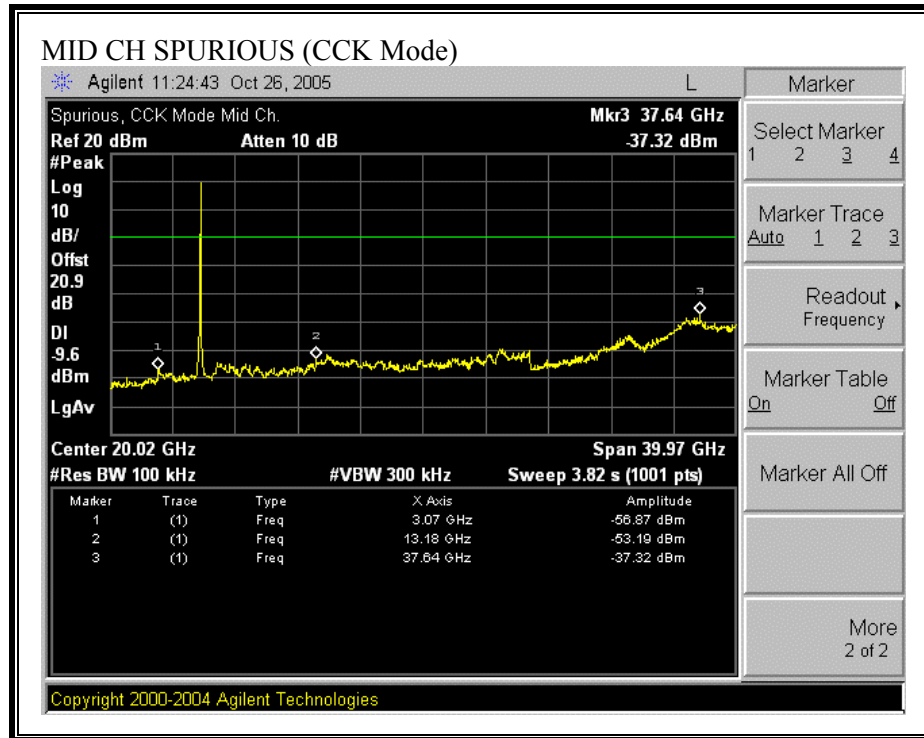

SPURIOUS EMISSIONS, HIGH CHANNEL (CCK Mode)

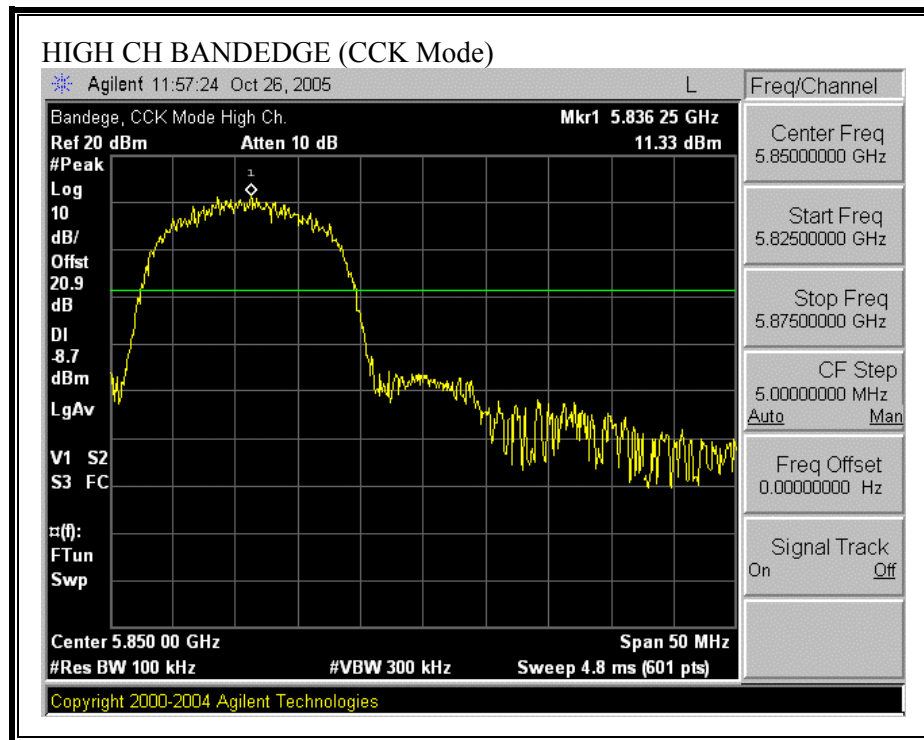

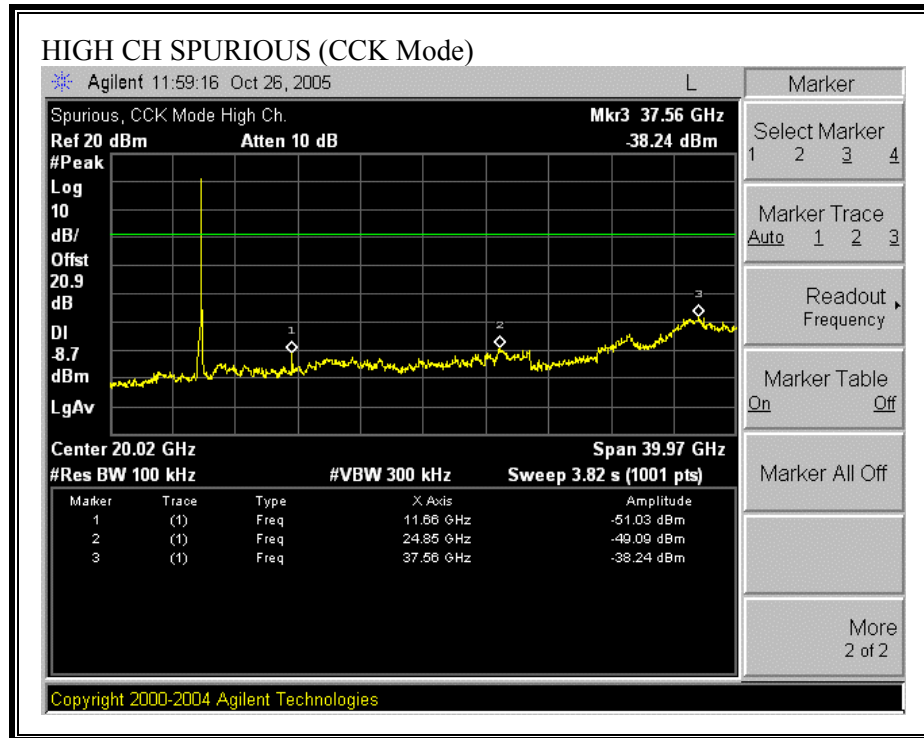

1. RADIATED EMISSIONS

2. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

7.1.8. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (CCK MODE) PATCH ANTENNA

10/26/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engr: Joseph Chung Project #: 05U3577 Company: Trango Systems EUT Descr.: 5.8 GHz Wireless Internet Access Subscriber Unit EUT M/N: M5580M-FSU Test Target: FCC 15.209 Mode Oper: TX CCK Mode Average Power Meter: Low = 21.04 dBm, Mid = 21.08 dBm, High = 21.9 dBm															
Test Equipment:															
Horn 1-18GHz T60; S/N: 2238 @3m		Pre-amplifier 1-26GHz T34 HP 8449B		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.209							
Hi Frequency Cables															
2 foot cable Joseph 187207005		3 foot cable		12 foot cable Joseph 208946001		HPF HPF_4.0GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Patch antenna (Horizontal Polarity), Mid Ch															
11.552	3.0	42.0	29.9	38.2	4.0	-32.5	0.0	0.9	52.6	40.5	74	54	-21.4	-13.5	H
17.328	3.0	43.8	30.6	43.8	5.5	-32.1	0.0	1.5	62.6	49.4	74	54	-11.4	-4.6	H
11.552	3.0	41.0	29.4	38.2	4.0	-32.5	0.0	0.9	51.6	40.0	74	54	-22.4	-14.0	V
17.328	3.0	43.8	30.3	43.8	5.5	-32.1	0.0	1.5	62.6	49.1	74	54	-11.4	-4.9	V
Patch antenna (Vertical Polarity), Mid Ch															
11.552	3.0	42.1	30.0	38.2	4.0	-32.5	0.0	0.9	52.7	40.6	74	54	-21.3	-13.4	V
17.328	3.0	43.9	30.7	43.8	5.5	-32.1	0.0	1.5	62.7	49.5	74	54	-11.3	-4.5	V
11.552	3.0	41.2	29.1	38.2	4.0	-32.5	0.0	0.9	51.8	39.7	74	54	-22.2	-14.3	H
17.328	3.0	43.2	29.6	43.8	5.5	-32.1	0.0	1.5	62.0	48.4	74	54	-12.0	-5.6	H
Worst Case Polarities for Low and High															
Patch antenna (Horizontal Polarity) with parabolic reflector, Low Ch															
11.472	3.0	41.2	28.7	38.2	4.0	-32.5	0.0	0.9	51.8	39.3	74	54	-22.2	-14.7	H
17.208	3.0	42.9	29.1	43.5	5.5	-32.0	0.0	1.5	61.3	47.5	74	54	-12.7	-6.5	H
Patch antenna (Vertical Polarity) with parabolic reflector, Low Ch															
11.472	3.0	41.6	28.8	38.2	4.0	-32.5	0.0	0.9	52.2	39.4	74	54	-21.8	-14.6	V
17.208	3.0	43.1	29.3	43.5	5.5	-32.0	0.0	1.5	61.5	47.7	74	54	-12.5	-6.3	V
Patch antenna (Horizontal Polarity), High Ch															
11.672	3.0	41.0	28.6	38.3	4.0	-32.5	0.0	0.9	51.7	39.3	74	54	-22.3	-14.7	H
17.508	3.0	41.7	28.9	44.4	5.6	-32.1	0.0	1.5	61.1	48.3	74	54	-12.9	-5.7	H
Patch antenna (Vertical Polarity), High Ch															
11.672	3.0	41.2	29.0	38.3	4.0	-32.5	0.0	0.9	51.9	39.7	74	54	-22.1	-14.3	V
17.508	3.0	42.7	30.1	44.4	5.6	-32.1	0.0	1.5	62.1	49.5	74	54	-11.9	-4.5	V
Note: No other emissions detected above noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

HARMONICS AND SPURIOUS EMISSIONS (CCK MODE) PATCH AND REFLECTOR ANTENNA

10/26/05 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Joseph Chung															
Project #: 05U3577															
Company: Trango Systems															
EUT Descr.: 5.8 GHz Wireless Internet Access Subscriber Unit															
EUT M/N: M5580M-FSU															
Test Target: FCC 15.209															
Mode Oper: TX with Parabolic Reflector in CCK mode															
Average Power Meter: Low = 21.04 dBm, Mid = 21.08 dBm, High = 21.9 dBm															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T60; S/N: 2238 @3m		T34 HP 8449B						FCC 15.209							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz					
Joseph 187207005				Joseph 208946001		HPF_4.0GHz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Patch antenna (Horizontal Polarity) with parabolic reflector, Low Ch															
11.472	3.0	42.3	28.9	38.2	4.0	-32.5	0.0	0.9	52.9	39.5	74	54	-21.1	-14.5	H
17.208	3.0	43.1	29.3	43.5	5.5	-32.0	0.0	1.5	61.5	47.7	74	54	-12.5	-6.3	H
11.472	3.0	41.6	28.5	38.2	4.0	-32.5	0.0	0.9	52.2	39.1	74	54	-21.8	-14.9	V
17.208	3.0	42.8	29.0	43.5	5.5	-32.0	0.0	1.5	61.2	47.4	74	54	-12.8	-6.6	V
Patch antenna (Vertical Polarity) with parabolic reflector, Low Ch															
11.472	3.0	42.0	28.9	38.2	4.0	-32.5	0.0	0.9	52.6	39.5	74	54	-21.4	-14.5	V
17.208	3.0	43.3	29.4	43.5	5.5	-32.0	0.0	1.5	61.7	47.9	74	54	-12.3	-6.1	V
11.472	3.0	41.6	28.8	38.2	4.0	-32.5	0.0	0.9	52.2	39.4	74	54	-21.8	-14.6	H
17.208	3.0	41.9	28.9	43.5	5.5	-32.0	0.0	1.5	60.3	47.3	74	54	-13.7	-6.7	H
Patch antenna (Horizontal Polarity) with parabolic reflector, Mid Ch															
11.552	3.0	42.1	30.1	38.2	4.0	-32.5	0.0	0.9	52.7	40.7	74	54	-21.3	-13.3	H
17.328	3.0	44.0	30.7	43.8	5.5	-32.1	0.0	1.5	62.8	49.5	74	54	-11.2	-4.5	H
11.552	3.0	41.2	29.5	38.2	4.0	-32.5	0.0	0.9	51.8	40.1	74	54	-22.2	-13.9	V
17.328	3.0	43.9	30.6	43.8	5.5	-32.1	0.0	1.5	62.7	49.4	74	54	-11.3	-4.6	V
Patch antenna (Vertical Polarity) with parabolic reflector, Mid Ch															
11.552	3.0	42.2	30.2	38.2	4.0	-32.5	0.0	0.9	52.8	40.8	74	54	-21.2	-13.2	V
17.328	3.0	44.1	30.8	43.8	5.5	-32.1	0.0	1.5	62.9	49.6	74	54	-11.1	-4.4	V
11.552	3.0	41.3	29.3	38.2	4.0	-32.5	0.0	0.9	51.9	39.9	74	54	-22.1	-14.1	H
17.328	3.0	43.5	29.7	43.8	5.5	-32.1	0.0	1.5	62.3	48.5	74	54	-11.7	-5.5	H
Patch antenna (Horizontal Polarity) with parabolic reflector, High Ch															
11.672	3.0	41.2	28.9	38.3	4.0	-32.5	0.0	0.9	51.9	39.6	74	54	-22.1	-14.4	H
17.508	3.0	42.9	29.1	44.4	5.6	-32.1	0.0	1.5	62.3	48.5	74	54	-11.7	-5.5	H
11.672	3.0	40.7	27.4	38.3	4.0	-32.5	0.0	0.9	51.4	38.1	74	54	-22.6	-15.9	V
17.508	3.0	41.6	28.2	44.4	5.6	-32.1	0.0	1.5	61.0	47.6	74	54	-13.0	-6.4	V
Patch antenna (Vertical Polarity) with parabolic reflector, High Ch															
11.672	3.0	41.4	29.2	38.3	4.0	-32.5	0.0	0.9	52.1	39.9	74	54	-21.9	-14.1	V
17.508	3.0	41.5	28.9	44.4	5.6	-32.1	0.0	1.5	60.8	48.2	74	54	-13.2	-5.8	V
11.672	3.0	40.9	28.8	38.3	4.0	-32.5	0.0	0.9	51.6	39.5	74	54	-22.4	-14.5	H
17.508	3.0	41.2	29.1	44.4	5.6	-32.1	0.0	1.5	60.6	48.5	74	54	-13.4	-5.5	H
Note: No other emissions detected above noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

HARMONICS AND SPURIOUS EMISSIONS (OFDM MODE), PATCH ANTENNA

10/26/05 High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Test Engr: Joseph Chung																			
Project #: 05U3577																			
Company: Trango Systems																			
EUT Descrip.: 5.8 GHz Wireless Internet Access Subscriber Unit																			
EUT M/N: M5580M-FSU																			
Test Target: FCC 15.209																			
Mode Oper: TX in OFDM Mode																			
Average Power Meter: Low = 20.52 dBm, Mid = 21.4 dBm, High = 21.44 dBm																			
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit			
T60; S/N: 2238 @3m				T34 HP 8449B												FCC 15.209			
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
Joseph 187207005								Joseph 208946001				HPF_4.0GHz							
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Patch antenna (Horizontal Polarity), Mid Ch																			
11.552	3.0	43.1	30.9	38.2	4.0	-32.5	0.0	0.9	53.7	41.5	74	54	-20.3	-12.5	H				
17.328	3.0	44.6	31.2	43.8	5.5	-32.1	0.0	1.5	63.4	50.0	74	54	-10.6	-4.0	H				
11.552	3.0	42.2	30.7	38.2	4.0	-32.5	0.0	0.9	52.8	41.3	74	54	-21.2	-12.7	V				
17.328	3.0	44.5	31.2	43.8	5.5	-32.1	0.0	1.5	63.3	50.0	74	54	-10.7	-4.0	V				
Patch antenna (Vertical Polarity), Mid Ch																			
11.552	3.0	43.6	31.2	38.2	4.0	-32.5	0.0	0.9	54.2	41.8	74	54	-19.8	-12.2	V				
17.328	3.0	44.2	31.9	43.8	5.5	-32.1	0.0	1.5	63.0	50.7	74	54	-11.0	-3.3	V				
11.552	3.0	42.4	30.6	38.2	4.0	-32.5	0.0	0.9	53.0	41.2	74	54	-21.0	-12.8	H				
17.328	3.0	44.5	30.4	43.8	5.5	-32.1	0.0	1.5	63.3	49.2	74	54	-10.7	-4.8	H				
Worst Case Polarities for Low and High																			
Patch antenna (Horizontal Polarity) with parabolic reflector, Low Ch																			
11.472	3.0	40.2	27.8	38.2	4.0	-32.5	0.0	0.9	50.8	38.4	74	54	-23.2	-15.6	H				
17.208	3.0	41.7	28.6	43.5	5.5	-32.0	0.0	1.5	60.1	47.0	74	54	-13.9	-7.0	H				
Patch antenna (Vertical Polarity) with parabolic reflector, Low Ch																			
11.472	3.0	40.3	27.9	38.2	4.0	-32.5	0.0	0.9	50.9	38.5	74	54	-23.1	-15.5	V				
17.208	3.0	42.5	28.4	43.5	5.5	-32.0	0.0	1.5	60.9	46.8	74	54	-13.1	-7.2	V				
Patch antenna (Horizontal Polarity), High Ch																			
11.672	3.0	40.1	27.4	38.3	4.0	-32.5	0.0	0.9	50.8	38.1	74	54	-23.2	-15.9	H				
17.508	3.0	40.4	28.0	44.4	5.6	-32.1	0.0	1.5	59.8	47.4	74	54	-14.2	-6.6	H				
Patch antenna (Vertical Polarity), High Ch																			
11.672	3.0	40.3	28.3	38.3	4.0	-32.5	0.0	0.9	51.0	39.0	74	54	-23.0	-15.0	V				
17.508	3.0	42.1	29.5	44.4	5.6	-32.1	0.0	1.5	61.5	48.9	74	54	-12.5	-5.1	V				
Note: No other emissions detected above noise floor.																			
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss			HPF	High Pass Filter														

HARMONICS AND SPURIOUS EMISSIONS (OFDM MODE) PATCH AND REFLECTOR ANTENNA

10/26/05 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Joseph Chung
Project #: 05U3577
Company: Trango Systems
EUT Descrip.: 5.8 GHz Wireless Internet Access Subscriber Unit
EUT M/N: M5580M-FSU
Test Target: FCC 15.209
Mode Oper: TX with Parabolic Reflector in OFDM mode
Average Power Meter: Low = 20.52 dBm, Mid = 21.4 dBm, High = 21.44 dBm

Test Equipment:

Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T34 HP 8449B	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit FCC 15.209						
Hi Frequency Cables <table border="1"> <tr> <td>2 foot cable Joseph 187207005</td> <td>3 foot cable</td> <td>12 foot cable Joseph 208946001</td> <td>HPF HPF_4.0GHz</td> <td>Reject Filter</td> <td> Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz </td> </tr> </table>					2 foot cable Joseph 187207005	3 foot cable	12 foot cable Joseph 208946001	HPF HPF_4.0GHz	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz
2 foot cable Joseph 187207005	3 foot cable	12 foot cable Joseph 208946001	HPF HPF_4.0GHz	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz					

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Patch antenna (Horizontal Polarity) with parabolic reflector, Low Ch															
11.472	3.0	41.8	28.0	38.2	4.0	-32.5	0.0	0.9	52.4	38.6	74	54	-21.6	-15.4	H
17.208	3.0	42.1	28.7	43.5	5.5	-32.0	0.0	1.5	60.5	47.1	74	54	-13.5	-6.9	H
11.472	3.0	40.1	27.9	38.2	4.0	-32.5	0.0	0.9	50.7	38.5	74	54	-23.3	-15.5	V
17.208	3.0	41.6	28.1	43.5	5.5	-32.0	0.0	1.5	60.0	46.5	74	54	-14.0	-7.5	V
Patch antenna (Vertical Polarity) with parabolic reflector, Low Ch															
11.472	3.0	41.2	28.1	38.2	4.0	-32.5	0.0	0.9	51.8	38.7	74	54	-22.2	-15.3	V
17.208	3.0	42.7	28.9	43.5	5.5	-32.0	0.0	1.5	61.1	47.3	74	54	-12.9	-6.7	V
11.472	3.0	40.6	27.9	38.2	4.0	-32.5	0.0	0.9	51.2	38.5	74	54	-22.8	-15.5	H
17.208	3.0	41.0	28.4	43.5	5.5	-32.0	0.0	1.5	59.4	46.8	74	54	-14.6	-7.2	H
Patch antenna (Horizontal Polarity) with parabolic reflector, Mid Ch															
11.552	3.0	43.2	31.2	38.2	4.0	-32.5	0.0	0.9	53.8	41.8	74	54	-20.2	-12.2	H
17.328	3.0	45.3	31.7	43.8	5.5	-32.1	0.0	1.5	64.1	50.5	74	54	-9.9	-3.5	H
11.552	3.0	42.1	30.3	38.2	4.0	-32.5	0.0	0.9	52.7	40.9	74	54	-21.3	-13.1	V
17.328	3.0	44.8	31.3	43.8	5.5	-32.1	0.0	1.5	63.6	50.1	74	54	-10.4	-3.9	V
Patch antenna (Vertical Polarity) with parabolic reflector, Mid Ch															
11.552	3.0	43.5	31.8	38.2	4.0	-32.5	0.0	0.9	54.1	42.4	74	54	-19.9	-11.6	V
17.328	3.0	45.4	31.2	43.8	5.5	-32.1	0.0	1.5	64.2	50.0	74	54	-9.8	-4.0	V
11.552	3.0	42.7	30.6	38.2	4.0	-32.5	0.0	0.9	53.3	41.2	74	54	-20.7	-12.8	H
17.328	3.0	44.2	30.9	43.8	5.5	-32.1	0.0	1.5	63.0	49.7	74	54	-11.0	-4.3	H
Patch antenna (Horizontal Polarity) with parabolic reflector, High Ch															
11.672	3.0	40.7	28.0	38.3	4.0	-32.5	0.0	0.9	51.4	38.7	74	54	-22.6	-15.3	H
17.508	3.0	41.7	28.3	44.4	5.6	-32.1	0.0	1.5	61.1	47.7	74	54	-12.9	-6.3	H
11.672	3.0	39.1	27.2	38.3	4.0	-32.5	0.0	0.9	49.8	37.9	74	54	-24.2	-16.1	V
17.508	3.0	41.3	28.0	44.4	5.6	-32.1	0.0	1.5	60.7	47.4	74	54	-13.3	-6.6	V
Patch antenna (Vertical Polarity) with parabolic reflector, High Ch															
11.672	3.0	40.5	27.9	38.3	4.0	-32.5	0.0	0.9	51.2	38.6	74	54	-22.8	-15.4	V
17.508	3.0	40.4	28.6	44.4	5.6	-32.1	0.0	1.5	59.8	48.0	74	54	-14.2	-6.0	V
11.672	3.0	39.7	28.0	38.3	4.0	-32.5	0.0	0.9	50.4	38.7	74	54	-23.6	-15.3	H
17.508	3.0	40.1	28.3	44.4	5.6	-32.1	0.0	1.5	59.5	47.7	74	54	-14.5	-6.3	H
Note: No other emissions detected above noise floor.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 23 File#: Below 1 GHz.EMI Date: 10-28-2005 Time: 17:34:30

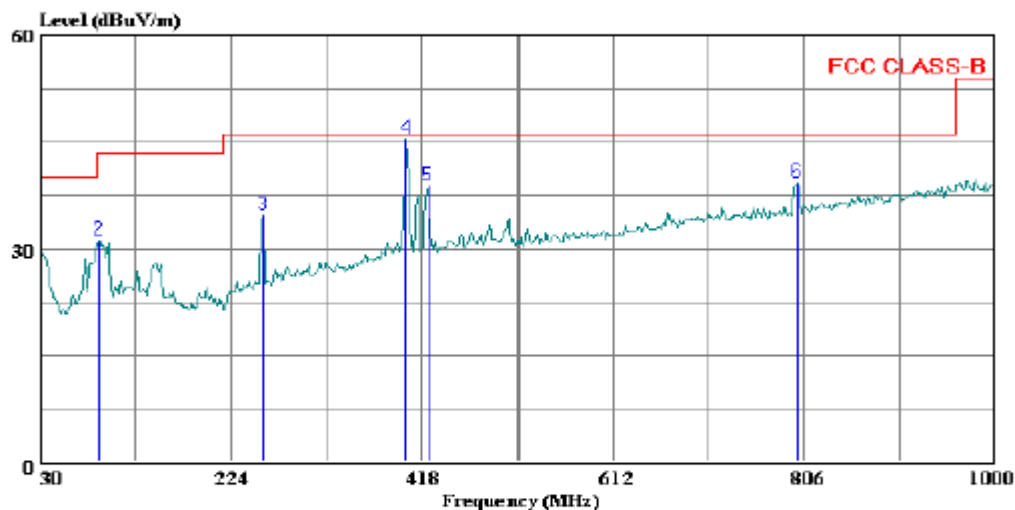

(Auxiliary ATC)

Trace: 22

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Joseph Chung
Project #: : 05U3577-1
Company: : Trango Systems, INC.
EUT: : 5.8 GHz Transciever
Model No. : M5580M-FSU
Configuration : EUT with Reflector and J-Box
Target of Test : FCC
Mode of Operation: Worst case TX

HORIZONTAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	31.940	9.45	19.94	29.39	40.00	-10.61	Peak
2	90.140	22.27	8.79	31.06	43.50	-12.44	Peak
3	256.980	20.45	14.21	34.66	46.00	-11.34	Peak
4	402.480	27.36	18.11	45.47	46.00	-0.53	Peak
5	424.790	20.10	18.64	38.74	46.00	-7.26	Peak
6	798.240	14.68	24.53	39.21	46.00	-6.79	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 21 File#: Below 1 GHz.EMI Date: 10-28-2005 Time: 17:26:23

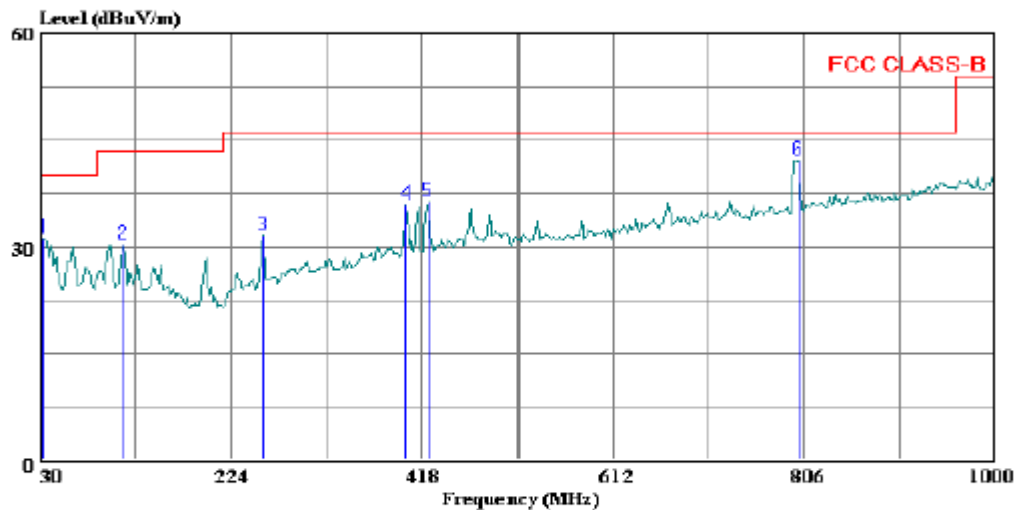

(Auxiliary ATC)

Trace: 20

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Joseph Chung
Project #: : 05U3577-1
Company: : Trango Systems, INC.
EUT: : 5.8 GHz Transceiver
Model No. : M5580M-FSU
Configuration : EUT with Reflector and J-Box
Target of Test : FCC
Mode of Operation: Worst case TX

VERTICAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	33.880	12.13	19.05	31.18	40.00	-8.82	Peak
2	114.390	15.92	14.46	30.38	43.50	-13.12	Peak
3	256.980	17.29	14.21	31.50	46.00	-14.50	Peak
4	402.480	17.89	18.11	36.00	46.00	-10.00	Peak
5	424.790	17.66	18.64	36.30	46.00	-9.70	Peak
6	800.180	17.64	24.58	42.22	46.00	-3.78	Peak

7.2. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	60.16	--	21.97	0.00	66.00	56.00	-5.84	-34.03	L1
18.24	35.84	--	30.88	0.00	60.00	50.00	-24.16	-19.12	L1
23.14	40.00	--	35.17	0.00	60.00	50.00	-20.00	-14.83	L1
0.15	58.96	--	20.86	0.00	65.89	55.89	-6.93	-35.03	L2
17.57	37.14	--	31.71	0.00	60.00	50.00	-22.86	-18.29	L2
23.14	37.40	--	33.15	0.00	60.00	50.00	-22.60	-16.85	L2
6 Worst Data									

LINE 1 RESULTS

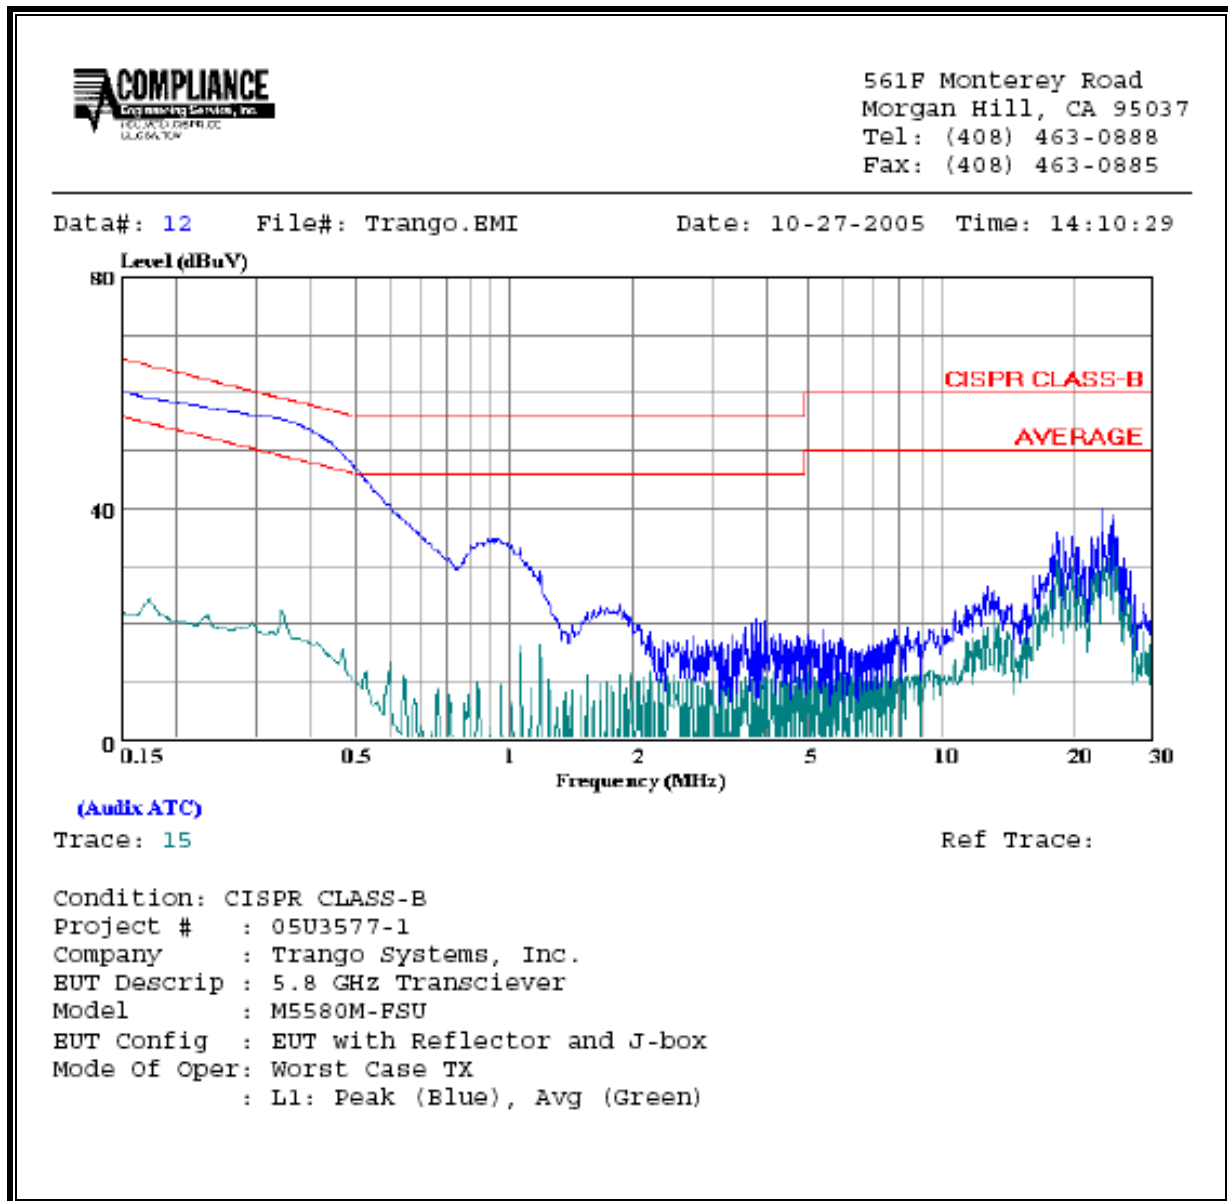


LINE 2 RESULTS

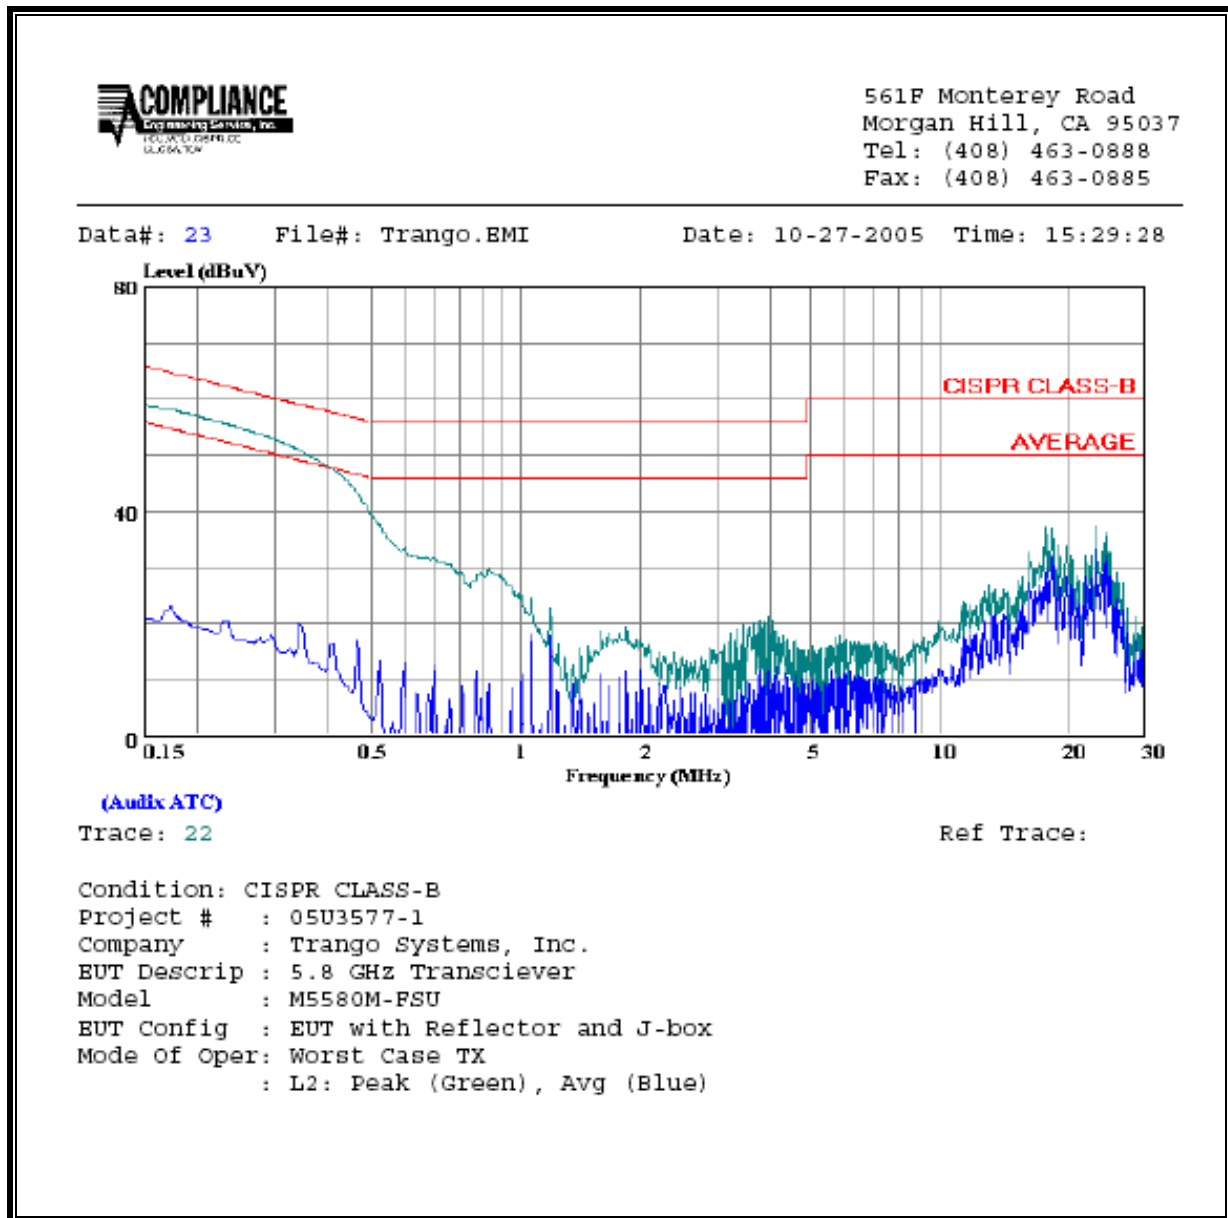

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

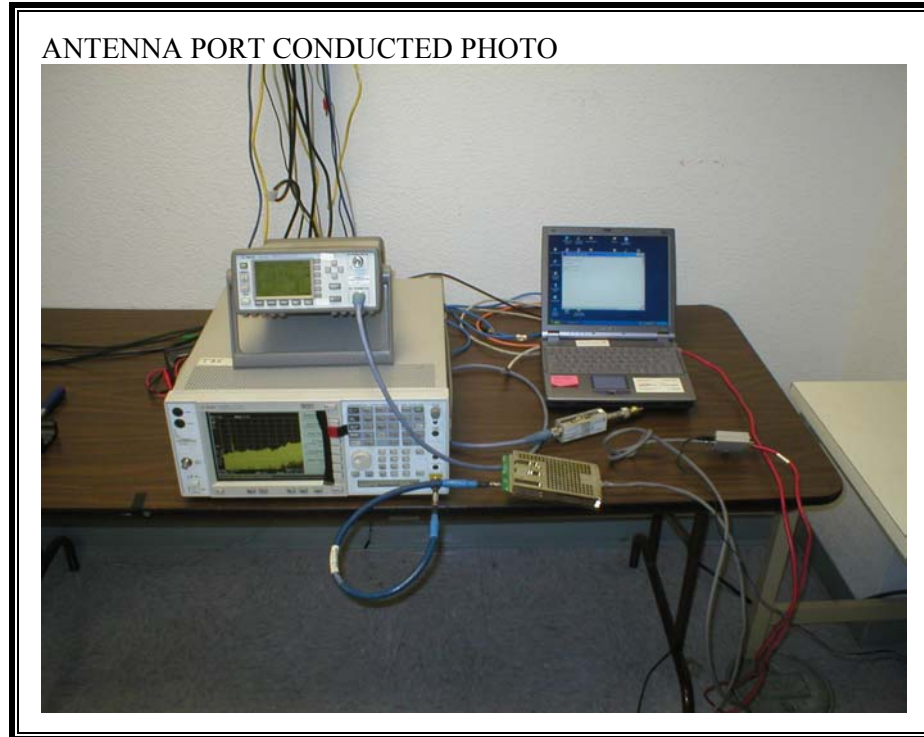

RADIATED RF MEASUREMENT SETUP



RADIATED BACK PHOTO, EUT ONLY



RADIATED FRONT PHOTO, EUT WITH REFLECTOR



RADIATED BACK PHOTO, EUT WITH REFLECTOR



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT