

RF Test Report

Applicant : Edimax Technology Co., Ltd.
Product Type : Indoor Air Quality Detector
Trade Name : EDIMAX
Model Number : AI-2004W, AI-2003W
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Aug. 01, 2019
Test Period : Aug. 29 ~ Sep. 10, 2019
Issue Date : Sep. 26, 2019

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Sep. 26, 2019	Initial Issue	Tobey Cheng

Verification of Compliance

Issued Date: Sep. 26, 2019

Applicant : Edimax Technology Co., Ltd.
Product Type : Indoor Air Quality Detector
Trade Name : EDIMAX
Model Number : AI-2004W, AI-2003W
FCC ID : NDD9520041907
EUT Rated Voltage : DC 12 V, 1 A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Jet Lu Reviewed By : Ken Yang
(Manager) (Jet Lu) (Testing Engineer) (Ken Yang)



TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty.....	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step	8
3.3.	Configuration of Test System Details	9
3.4.	Test Instruments	10
3.5.	Test Site Environment.....	11
4	Measurement Procedure	12
4.1.	AC Power Line Conducted Emission Measurement.....	12
4.2.	Radiated Emission Measurement.....	14
4.3.	Maximum Conducted Output Power Measurement.....	18
4.4.	6 dB RF Bandwidth Measurement	19
4.5.	Maximum Power Density Measurement	20
4.6.	Out of Band Conducted Emissions Measurement.....	21
4.7.	Antenna Measurement	21
5	Test Results.....	22
Annex A.	Conducted Emission	22
Annex B.	Conducted Test Results	24
Annex C.	Radiated Emission Measurement	31



1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	----
15.247(d)	Transmitter Radiated Emissions	PASS	----
15.247(b)(3)	Max. Output Power	PASS	----
15.247(a)(2)	6 dB RF Bandwidth	PASS	----
15.247(e)	Maximum Power Spectral Density	PASS	----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	----
15.203	Antenna Requirement	PASS	----

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	150 kHz ~ 30 MHz	2.8
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.6
	18000 MHz ~ 26500 MHz	4.9
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

2 EUT Description

Applicant	Edimax Technology Co., Ltd. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan		
Manufacturer	Edimax Technology Co., Ltd. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan		
Product Type	Indoor Air Quality Detector		
Trade Name	EDIMAX		
Model No.	AI-2004W, AI-2003W		
Difference description of model number	AI-2004W has a carbon monoxide sensor. AI-2003W has no carbon monoxide sensor.		
FCC ID	NDD9520041907		
Frequency Range	2402 ~ 2480 MHz		
Modulation Type	GFSK		
Operate Temp. Range	0 ~ +40 °C		
Antenna information	Model	Type	Max. Gain (dBi)
	STBT40-XXX	PCB Antenna	0
RF Output Power	0.00180 W		

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.


3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	Turn on TX function.
4	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Conducted Emission

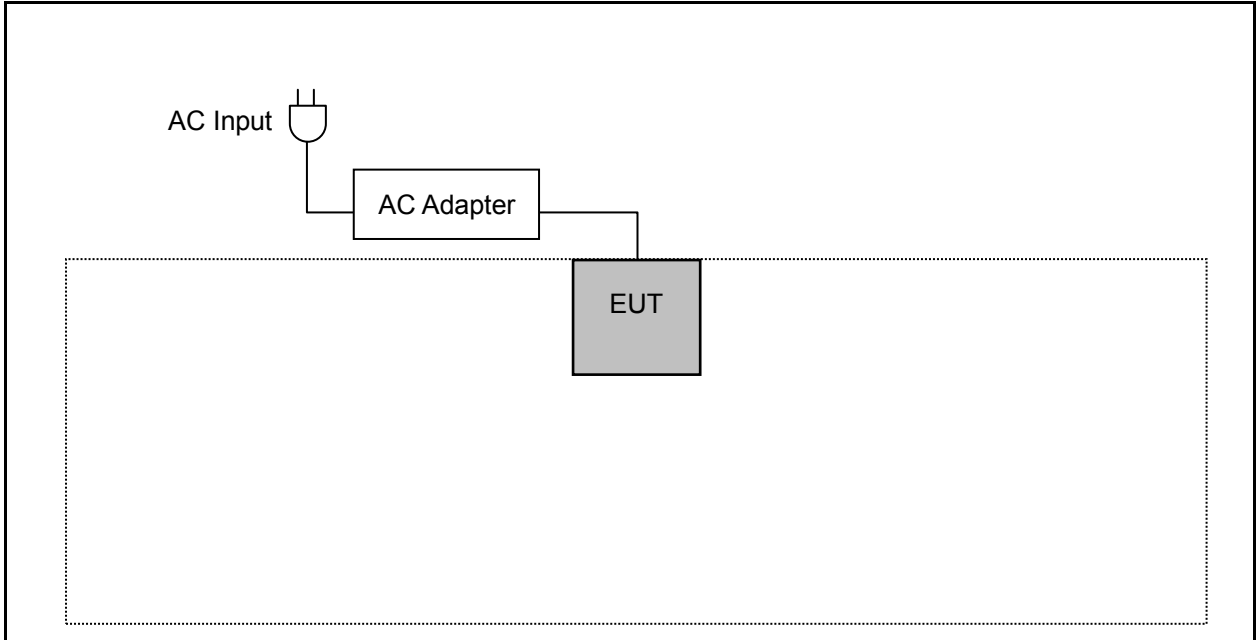

Radiated Emissions

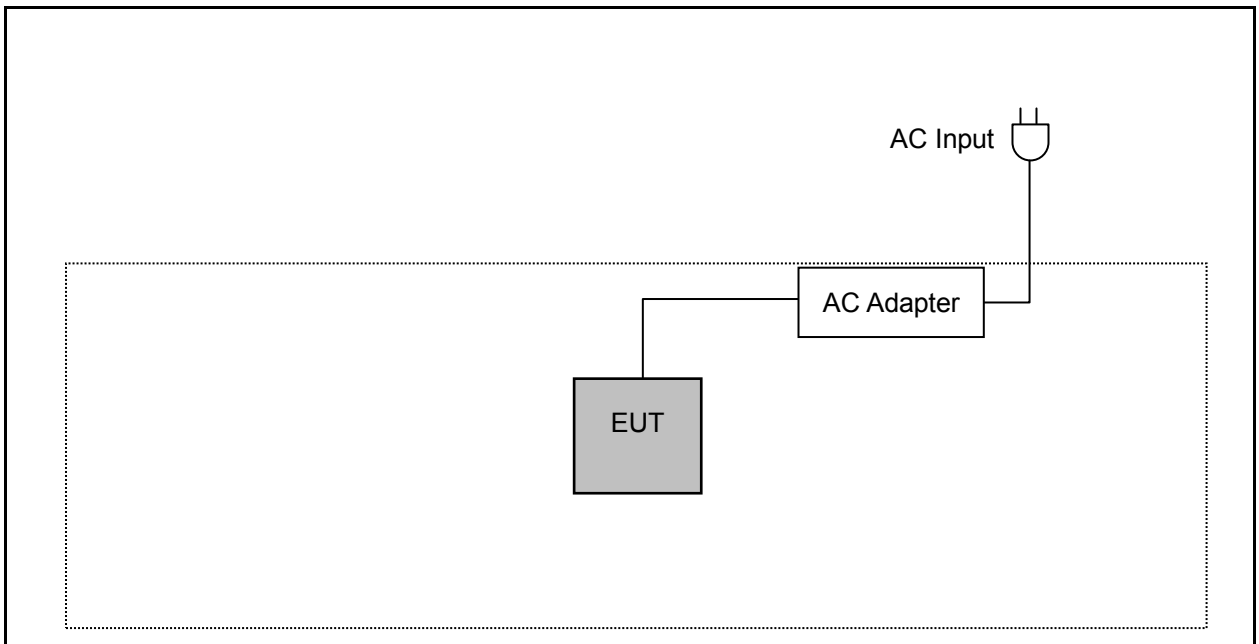

Devices Description				
Product	Manufacturer	Model Number	Serial Number	Power Cord
---	---	---	---	---



3.4. Test Instruments

For Conducted Emission

Test Period: Aug. 29, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/25/2018	1 year
Power Sensor	Agilent	N1921A	MY45241957	12/13/2018	1 year
Power Meter	Agilent	N1911A	MY45101619	12/13/2018	1 year
Microwave Cable	EMCI	EMC102-SM- SM1500	001	11/21/2018	1 year
Test Site	ATL	TE05	TE05	N.C.R.	----

For Radiated Emissions

Test Period: Aug. 29, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/14/2019	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/14/2019	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/19/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/22/2019	1 year
Broadband Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/14/2019	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/29/2019	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2019	1 year
Microwave Cable	EMCI	EMC104-SM- SM-13000	170814	10/30/2018	1 year
Microwave Cable	EMCI	EMC102-KM- KM-14000	151001	02/20/2019	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Sep. 10, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/23/2019	1 year
LISN	R&S	ENV216	101040	04/03/2019	1 year
LISN	R&S	ENV216	101041	03/28/2019	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/23/2019	1 year

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

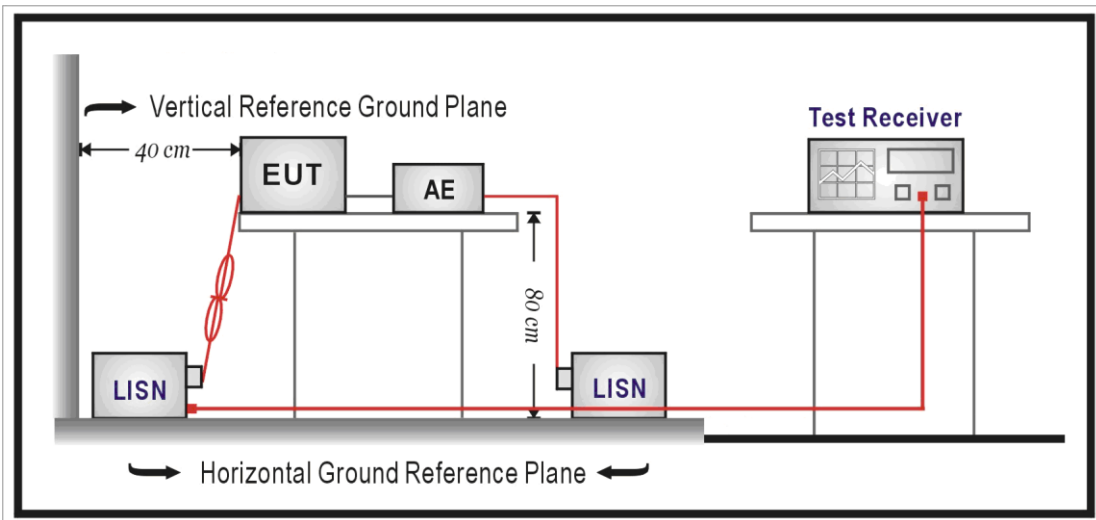

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

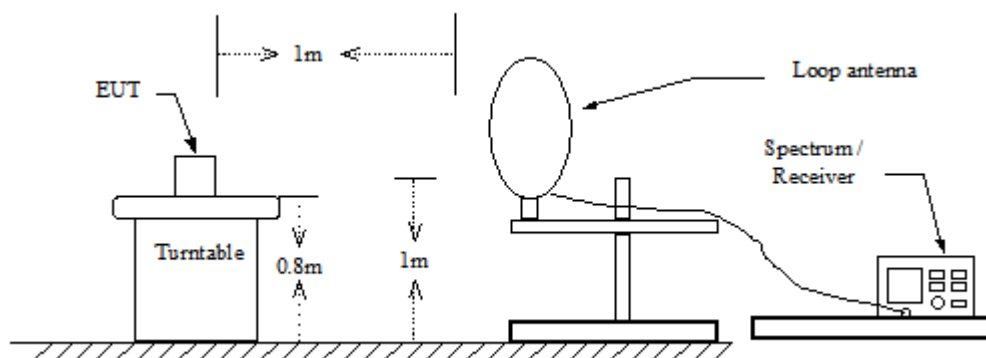

Below 1 GHz

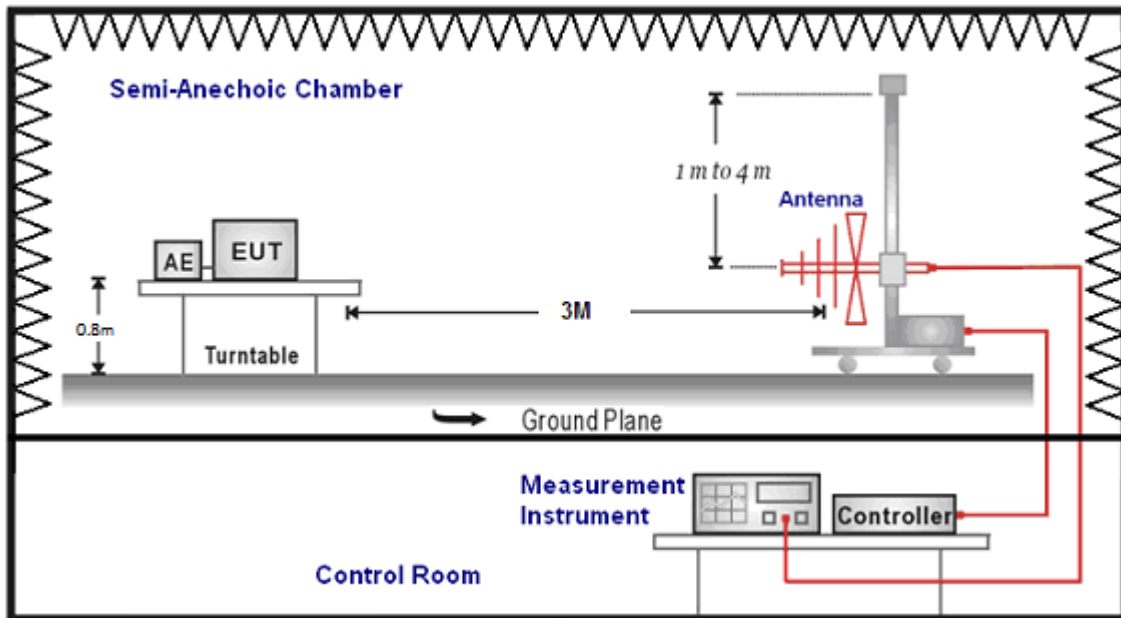

Above 1 GHz

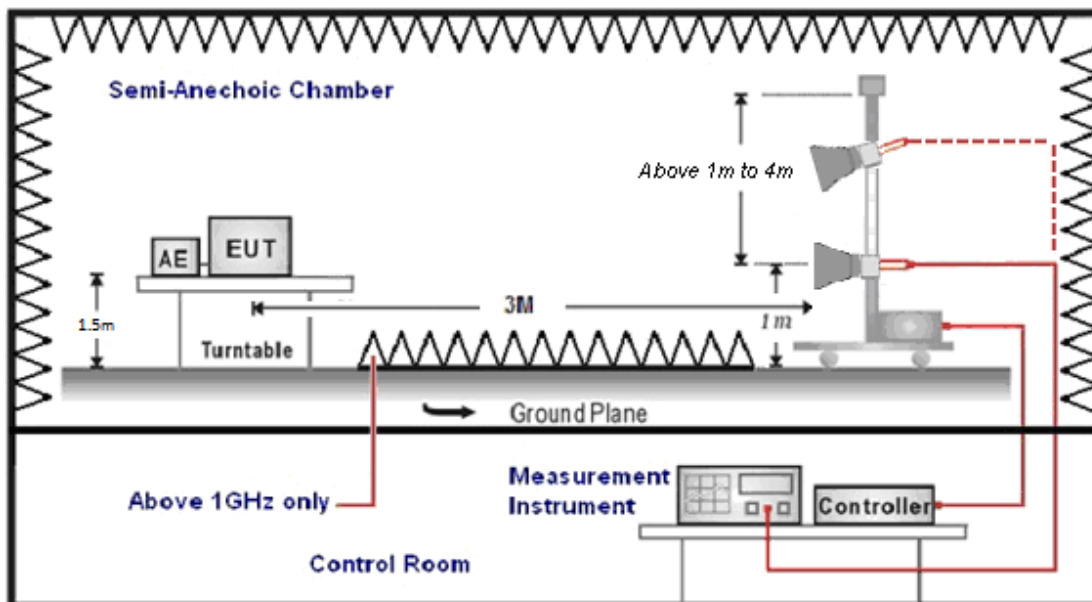

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter ($\mu\text{V}/\text{m}$).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

■ Test Setup

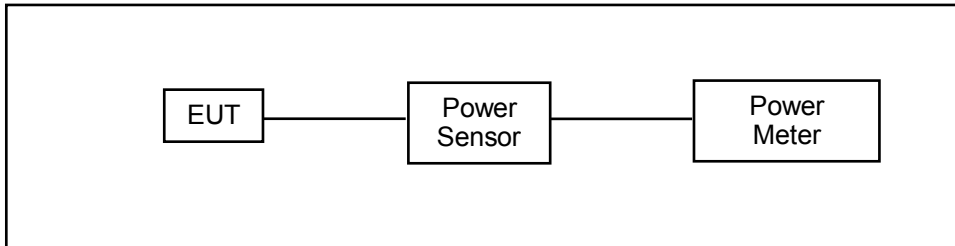

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ **Test Setup**

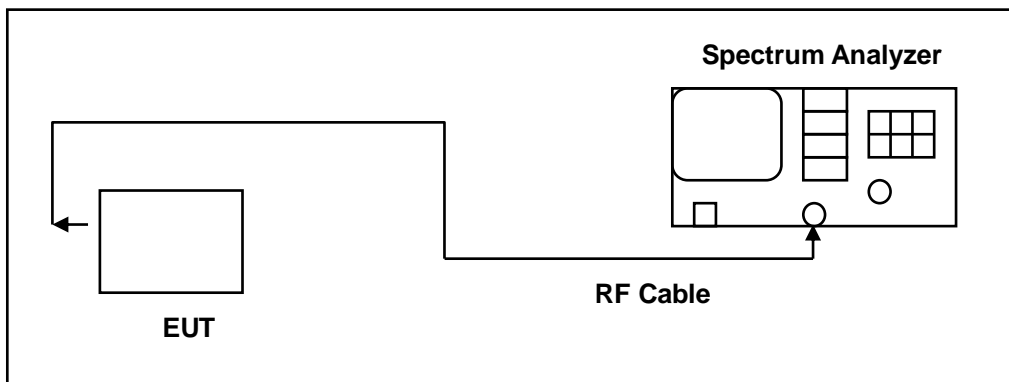

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10-2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

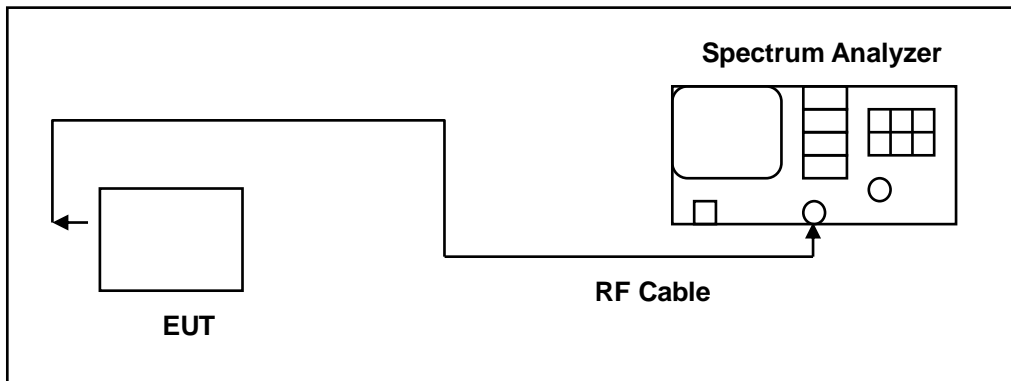

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

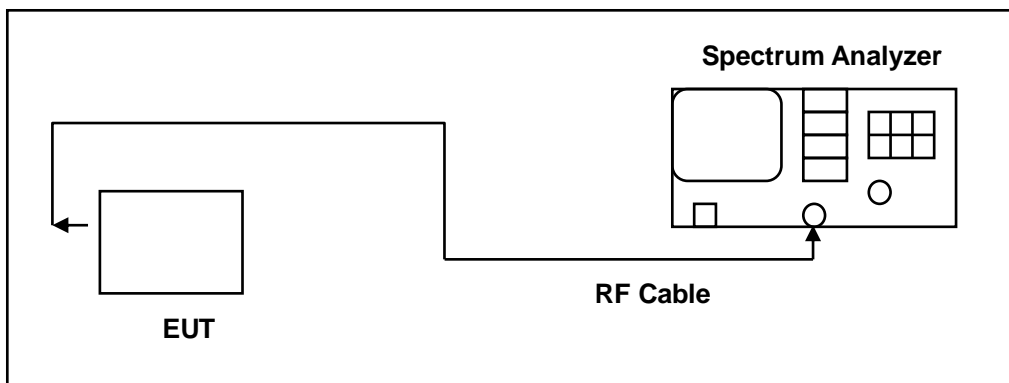

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction


See section 2 – antenna information.



5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test Mode:	Mode 1	Power:	AC 120 V/60 Hz
Description:		Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH

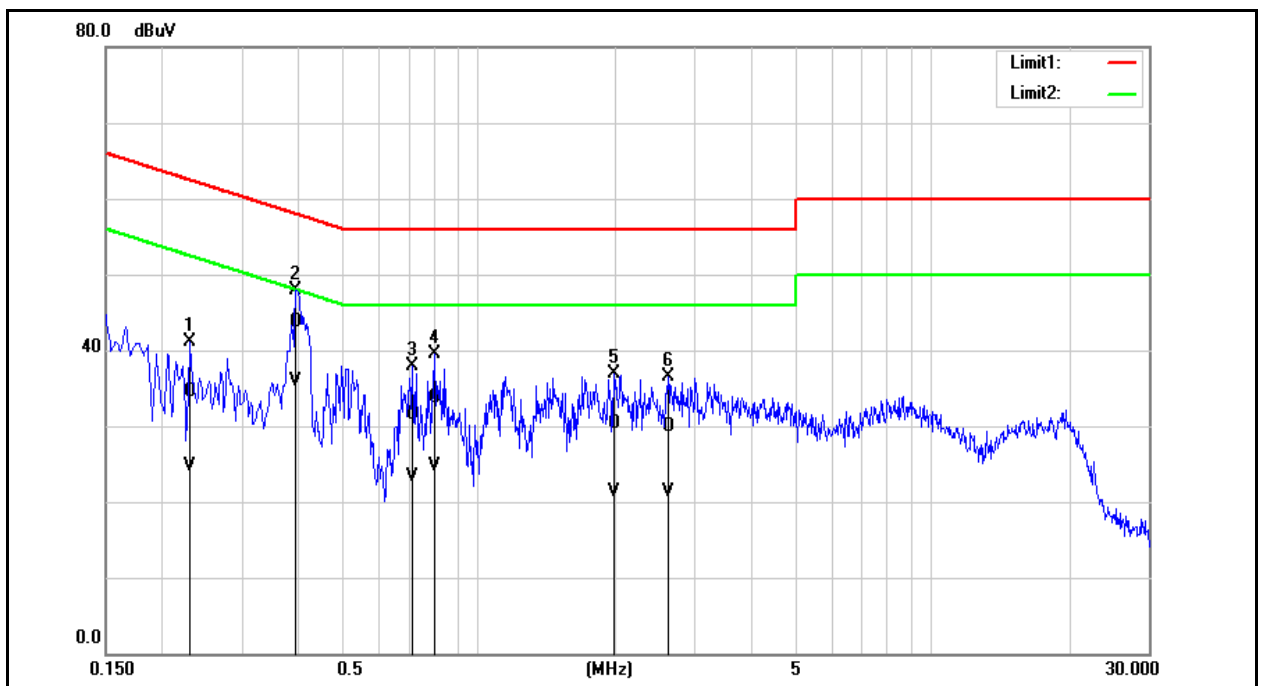


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2300	24.91	14.98	9.64	34.55	24.62	62.45	52.45	-27.90	-27.83	Pass
2	0.3940	34.04	26.25	9.65	43.69	35.90	57.98	47.98	-14.29	-12.08	Pass
3	0.7140	21.82	13.68	9.67	31.49	23.35	56.00	46.00	-24.51	-22.65	Pass
4	0.7980	24.09	15.12	9.68	33.77	24.80	56.00	46.00	-22.23	-21.20	Pass
5	1.9820	20.58	11.63	9.72	30.30	21.35	56.00	46.00	-25.70	-24.65	Pass
6	2.6140	20.19	11.58	9.74	29.93	21.32	56.00	46.00	-26.07	-24.68	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15.247	Line:	N
Test Mode:	Mode 1	Power:	AC 120 V/60 Hz
		Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

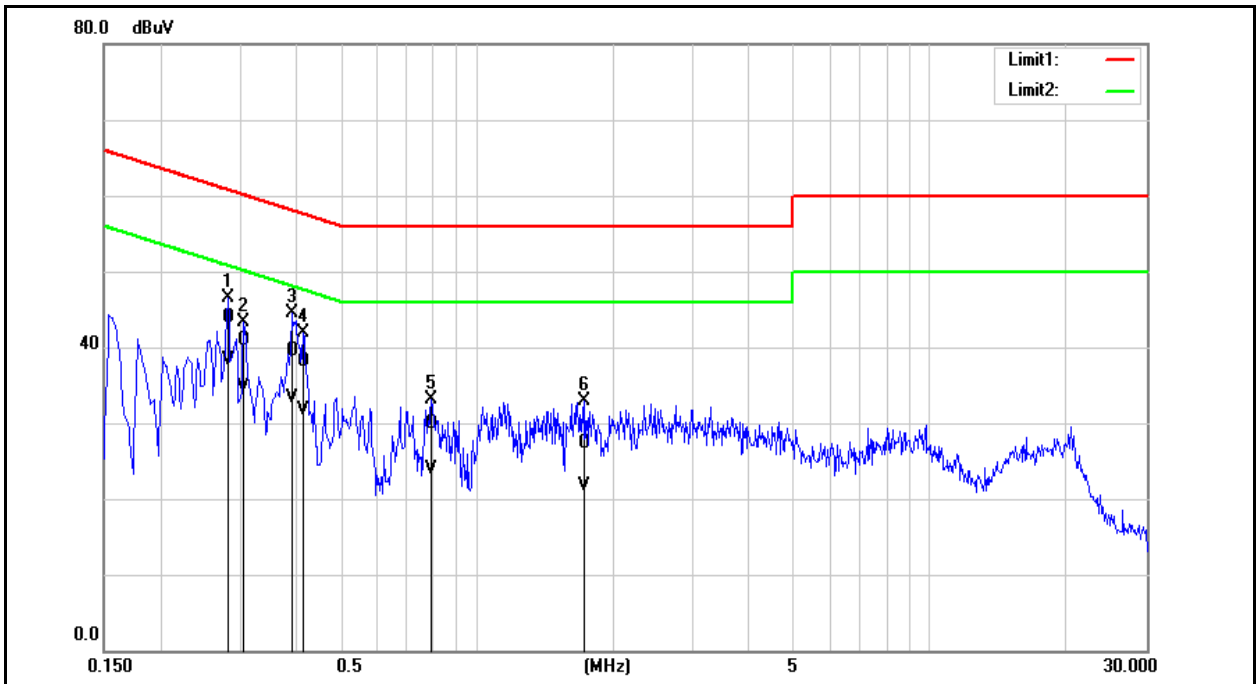

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2820	34.19	28.53	9.68	43.87	38.21	60.76	50.76	-16.89	-12.55	Pass
2	0.3060	31.18	25.04	9.68	40.86	34.72	60.08	50.08	-19.22	-15.36	Pass
3	0.3900	29.91	23.54	9.68	39.59	33.22	58.06	48.06	-18.47	-14.84	Pass
4	0.4140	28.42	21.97	9.68	38.10	31.65	57.57	47.57	-19.47	-15.92	Pass
5	0.7940	20.20	14.11	9.70	29.90	23.81	56.00	46.00	-26.10	-22.19	Pass
6	1.7300	17.63	12.02	9.74	27.37	21.76	56.00	46.00	-28.63	-24.24	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	1.83	0.00152	2.25	0.00168	≤ 30
2440	2.14	0.00164	2.55	0.00180	≤ 30
2480	1.93	0.00156	2.35	0.00172	≤ 30

Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	623.400	≥ 500
2440	615.200	≥ 500
2480	619.800	≥ 500



■ Test Graphs

Mode 2	
2402 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 10 dB Avg/Hold: 10/10 Radio Device: BTS</p> <p>Ref Offset: 1.5 dB Ref: 20.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 1.0792 MHz Total Power: 8.62 dBm</p> <p>Transmit Freq Error: -810 Hz OBW Power: 99.00 % x dB Bandwidth: 623.4 kHz x dB: -6.00 dB</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.440000000 GHz Trig: Free Run #Atten: 10 dB Avg/Hold: 10/10 Radio Device: BTS</p> <p>Ref Offset: 1.5 dB Ref: 20.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 1.1762 MHz Total Power: 8.97 dBm</p> <p>Transmit Freq Error: 19.351 kHz OBW Power: 99.00 % x dB Bandwidth: 615.2 kHz x dB: -6.00 dB</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 10 dB Avg/Hold: 10/10 Radio Device: BTS</p> <p>Ref Offset: 1.5 dB Ref: 20.00 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 1.2687 MHz Total Power: 9.14 dBm</p> <p>Transmit Freq Error: 17.405 kHz OBW Power: 99.00 % x dB Bandwidth: 619.8 kHz x dB: -6.00 dB</p>



Maximum Power Density Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-7.332	≤ 8
2440	-6.787	≤ 8
2480	-6.877	≤ 8



■ Test Graphs

Mode 2	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 1.5 dB Ref: 20.00 dBm</p> <p>Mkr1 2.402 000 9 GHz -7.332 dBm</p> <p>Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 98.60 ms (1001 pts)</p> <p>Frequency: 2.40200000 GHz Auto Tune Center Freq: 2.40200000 GHz Start Freq: 2.401632450 GHz Stop Freq: 2.402467550 GHz CF Step: 93.510 kHz Auto Man Freq Offset: 0 Hz</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 1.5 dB Ref: 20.00 dBm</p> <p>Mkr1 2.440 000 0 GHz -6.787 dBm</p> <p>Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 97.33 ms (1001 pts)</p> <p>Frequency: 2.44000000 GHz Auto Tune Center Freq: 2.44000000 GHz Start Freq: 2.439638600 GHz Stop Freq: 2.440461400 GHz CF Step: 92.280 kHz Auto Man Freq Offset: 0 Hz</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 1.5 dB Ref: 20.00 dBm</p> <p>Mkr1 2.480 000 9 GHz -6.877 dBm</p> <p>Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 98.07 ms (1001 pts)</p> <p>Frequency: 2.48000000 GHz Auto Tune Center Freq: 2.48000000 GHz Start Freq: 2.479636150 GHz Stop Freq: 2.480464850 GHz CF Step: 92.970 kHz Auto Man Freq Offset: 0 Hz</p>

Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

Mode 2	
2402 MHz	
2440 MHz	
2480 MHz	



Out of Band Conducted Emissions

Mode 2	
2402 MHz	
2440 MHz	
2480 MHz	

Conducted Band Edge

Mode 2																																																																																																	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.40200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.933 ms (1001 pts)</p> <p>Mkr2 2.401 98 GHz 2.316 dBm</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td></td> <td></td> <td>-38.742 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 98 GHz</td> <td></td> <td></td> <td>2.316 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400 00 GHz			-38.742 dBm	2	N	1	f	2.401 98 GHz			2.316 dBm	3	N	1	f					4	N	1	f					5	N	1	f					6	N	1	f					7	N	1	f					8	N	1	f					9	N	1	f					10	N	1	f					11	N	1	f				
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.400 00 GHz			-38.742 dBm																																																																																										
2	N	1	f	2.401 98 GHz			2.316 dBm																																																																																										
3	N	1	f																																																																																														
4	N	1	f																																																																																														
5	N	1	f																																																																																														
6	N	1	f																																																																																														
7	N	1	f																																																																																														
8	N	1	f																																																																																														
9	N	1	f																																																																																														
10	N	1	f																																																																																														
11	N	1	f																																																																																														
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.48000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.933 ms (1001 pts)</p> <p>Mkr1 2.480 00 GHz 2.833 dBm</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 00 GHz</td> <td></td> <td></td> <td>2.833 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 60 GHz</td> <td></td> <td></td> <td>-43.884 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 68 GHz</td> <td></td> <td></td> <td>-42.992 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 00 GHz			2.833 dBm	2	N	1	f	2.483 60 GHz			-43.884 dBm	3	N	1	f	2.483 68 GHz			-42.992 dBm	4	N	1	f					5	N	1	f					6	N	1	f					7	N	1	f					8	N	1	f					9	N	1	f					10	N	1	f					11	N	1	f				
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.480 00 GHz			2.833 dBm																																																																																										
2	N	1	f	2.483 60 GHz			-43.884 dBm																																																																																										
3	N	1	f	2.483 68 GHz			-42.992 dBm																																																																																										
4	N	1	f																																																																																														
5	N	1	f																																																																																														
6	N	1	f																																																																																														
7	N	1	f																																																																																														
8	N	1	f																																																																																														
9	N	1	f																																																																																														
10	N	1	f																																																																																														
11	N	1	f																																																																																														



Annex C. Radiated Emission Measurement

Harmonic

Below 1 GHz

Standard:		FCC Part 15.247		Test Distance:		3 m	
Test Mode:		Mode 2		Power:		AC 120 V/60 Hz	
Frequency:		2480 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60 %RH	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
48.4300	53.62	-6.40	47.22	49.00	-1.78	QP	H
90.1400	59.65	-12.29	47.36	53.50	-6.14	QP	H
240.4900	55.81	-6.39	49.42	56.00	-6.58	QP	H
264.7400	54.48	-5.52	48.96	56.00	-7.04	QP	H
312.2700	53.93	-3.83	50.10	56.00	-5.90	QP	H
336.5200	53.58	-3.42	50.16	56.00	-5.84	QP	H
72.6800	53.64	-9.29	44.35	49.00	-4.65	QP	V
90.1400	54.50	-12.29	42.21	53.50	-11.29	QP	V
144.4600	51.89	-6.16	45.73	53.50	-7.77	QP	V
191.9900	54.94	-7.87	47.07	53.50	-6.43	QP	V
264.7400	49.21	-5.52	43.69	56.00	-12.31	QP	V
288.0200	50.05	-4.48	45.57	56.00	-10.43	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 47.22 = -6.40 + 53.62

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

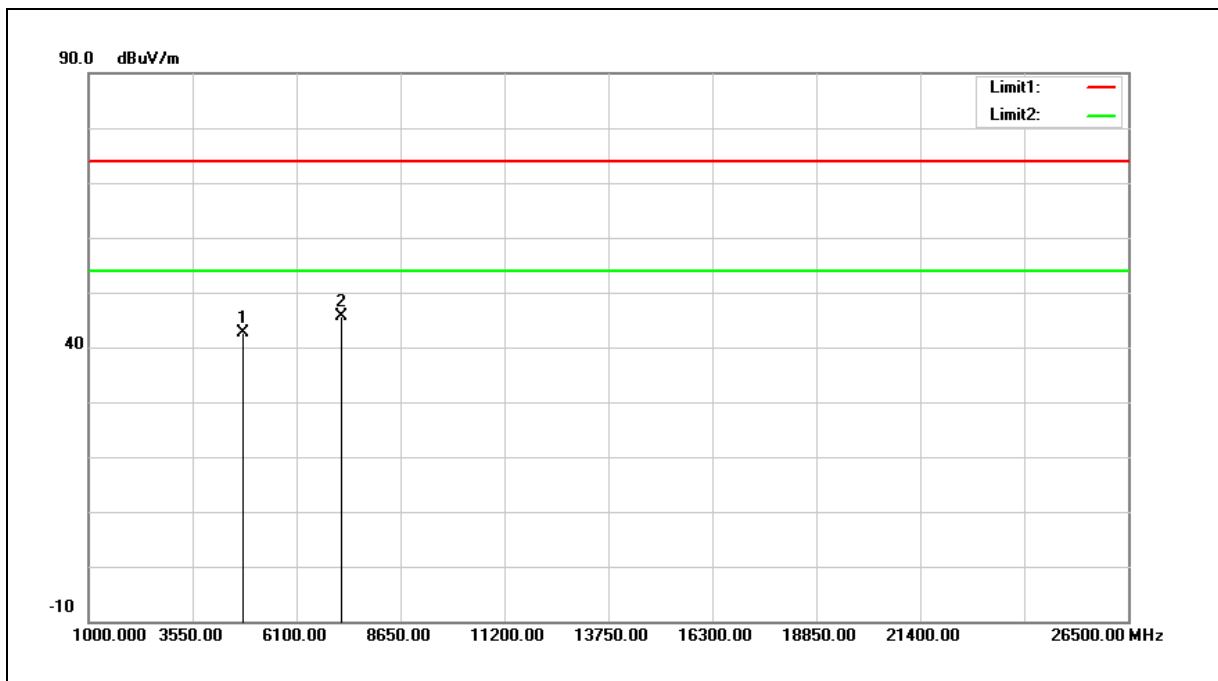

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	36.83	5.90	42.73	74.00	-31.27	peak
2	7206.000	33.55	12.16	45.71	74.00	-28.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 42.73 = 5.90 + 36.83

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

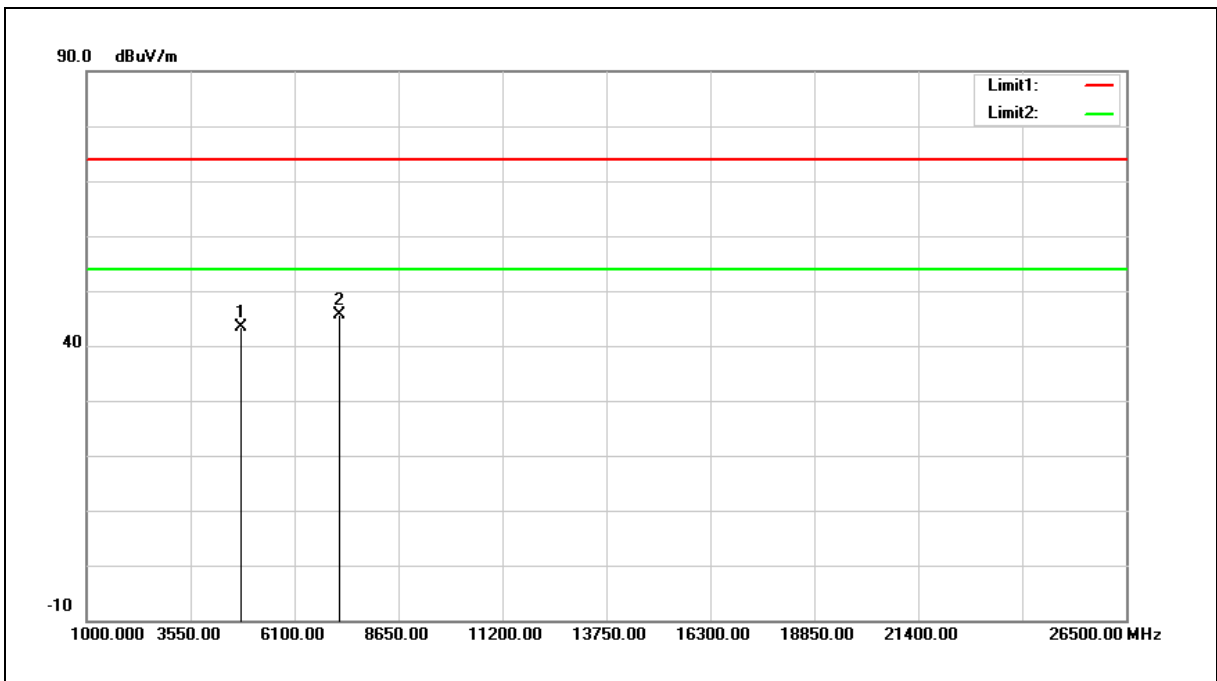

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	37.43	5.90	43.33	74.00	-30.67	peak
2	7206.000	33.36	12.16	45.52	74.00	-28.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 43.33 = 5.90 + 37.43

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

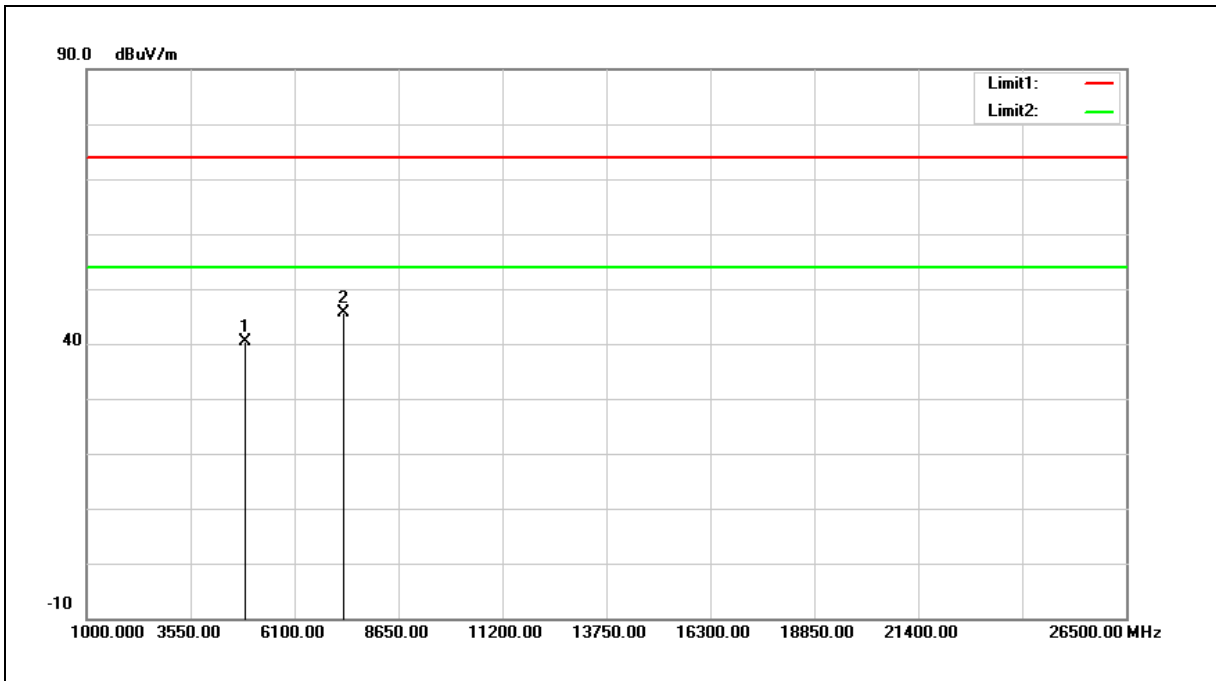

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	34.24	6.06	40.30	74.00	-33.70	peak
2	7320.000	33.14	12.41	45.55	74.00	-28.45	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

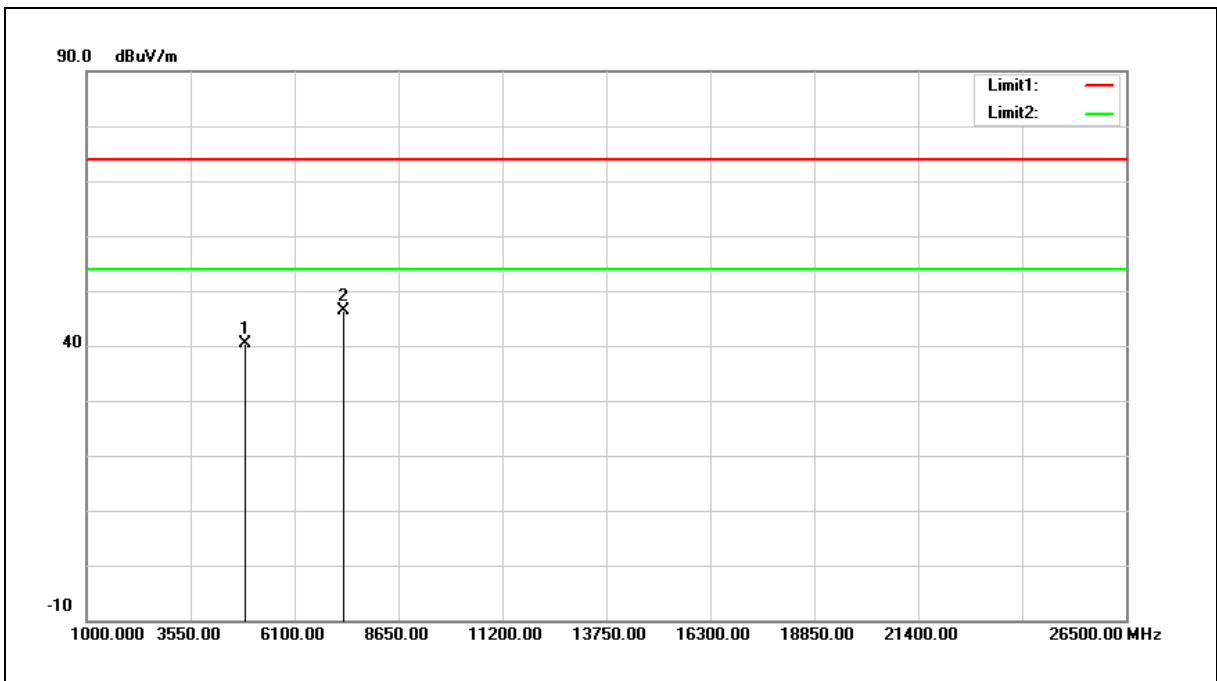

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	34.32	6.06	40.38	74.00	-33.62	peak
2	7320.000	34.08	12.41	46.49	74.00	-27.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

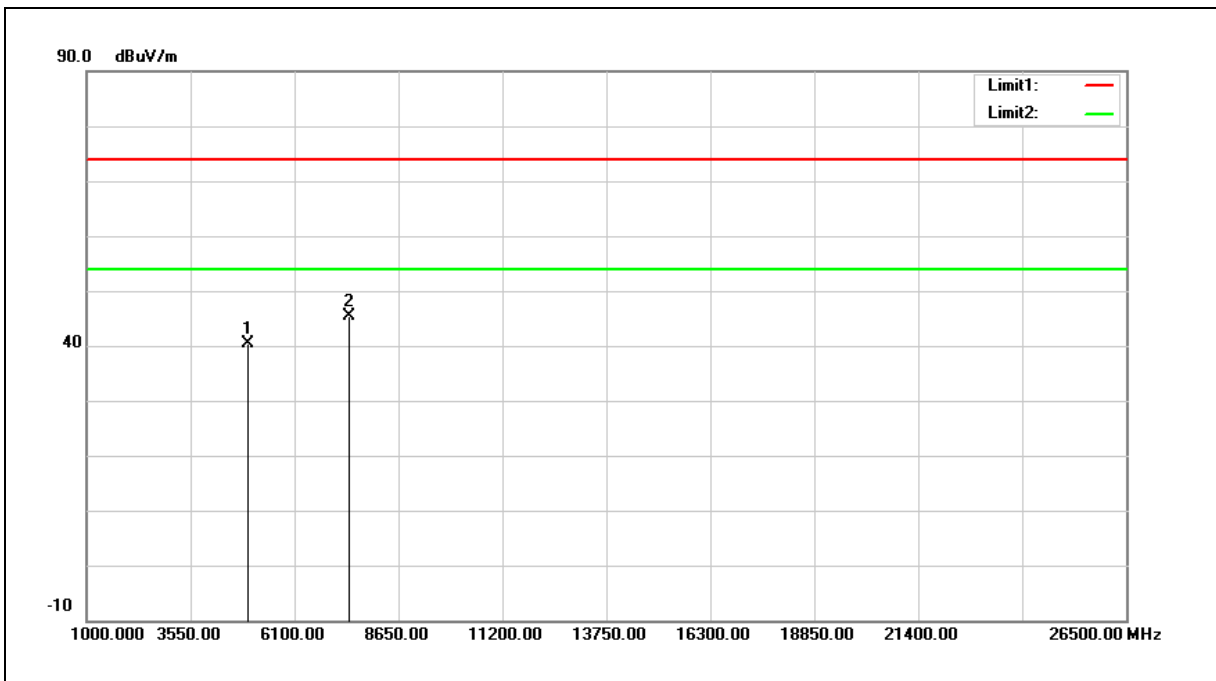


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	34.22	6.22	40.44	74.00	-33.56	peak
2	7440.000	32.81	12.68	45.49	74.00	-28.51	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

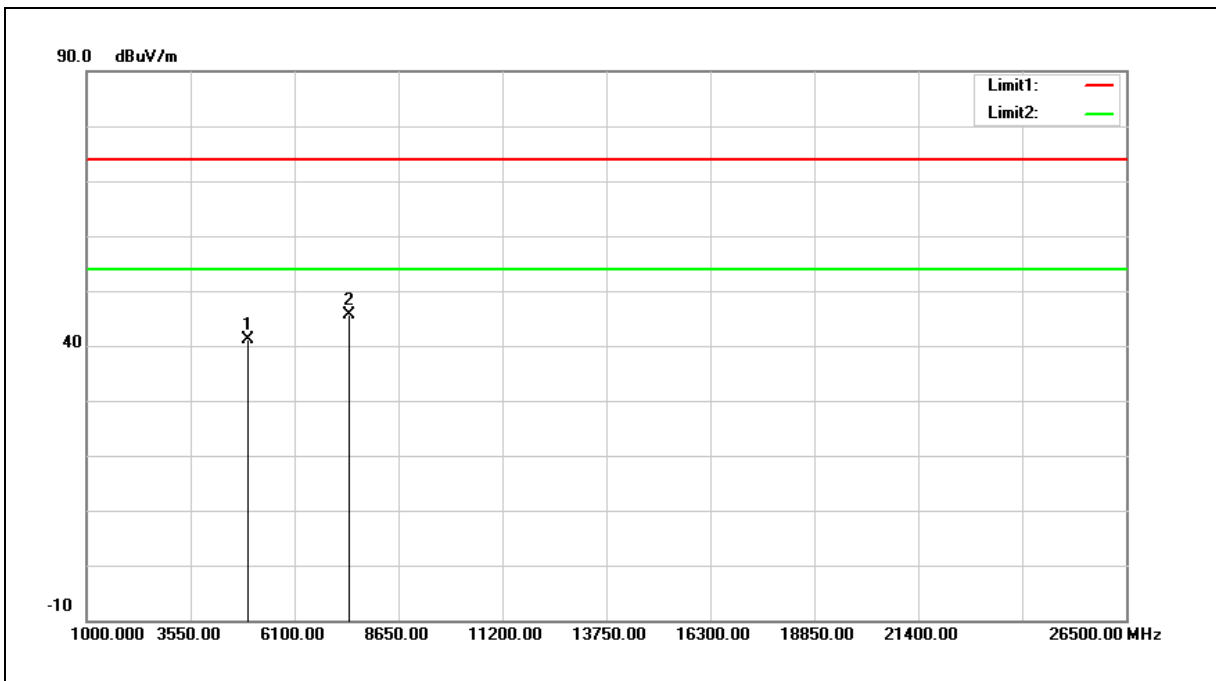


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	34.86	6.22	41.08	74.00	-32.92	peak
2	7440.000	33.04	12.68	45.72	74.00	-28.28	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

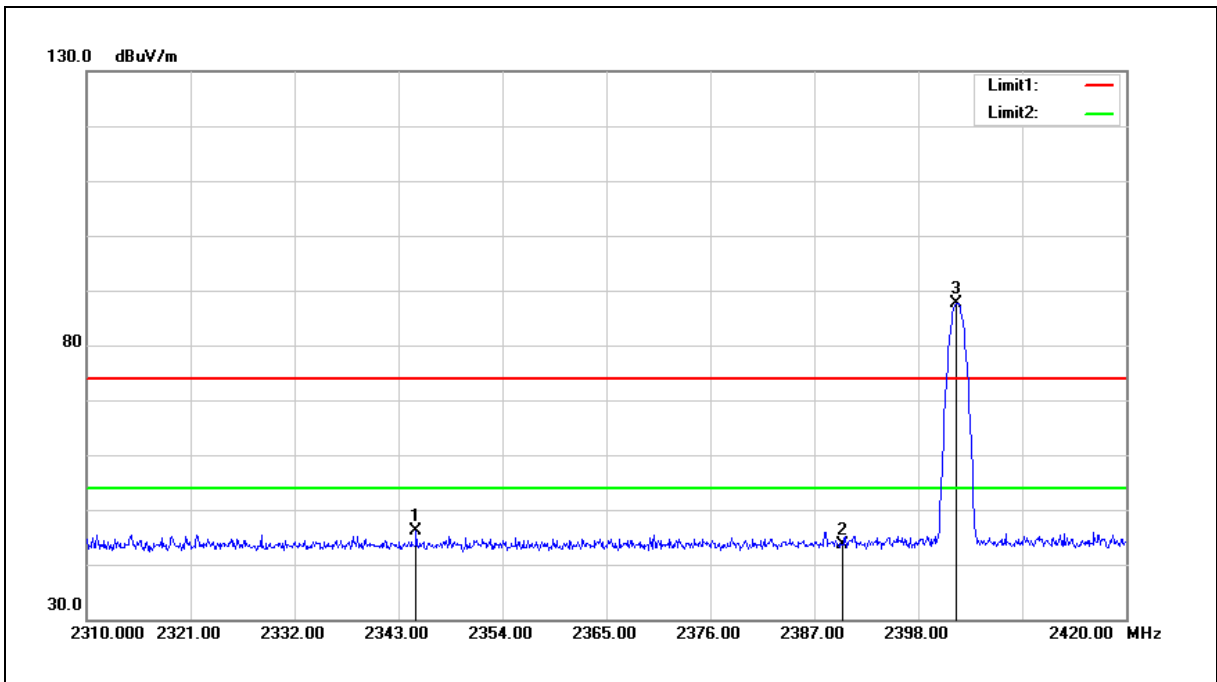

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2344.870	47.25	-1.24	46.01	74.00	-27.99	peak
2	2390.000	44.75	-1.03	43.72	74.00	-30.28	peak
3	2402.070	88.69	-0.98	87.71	--	--	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

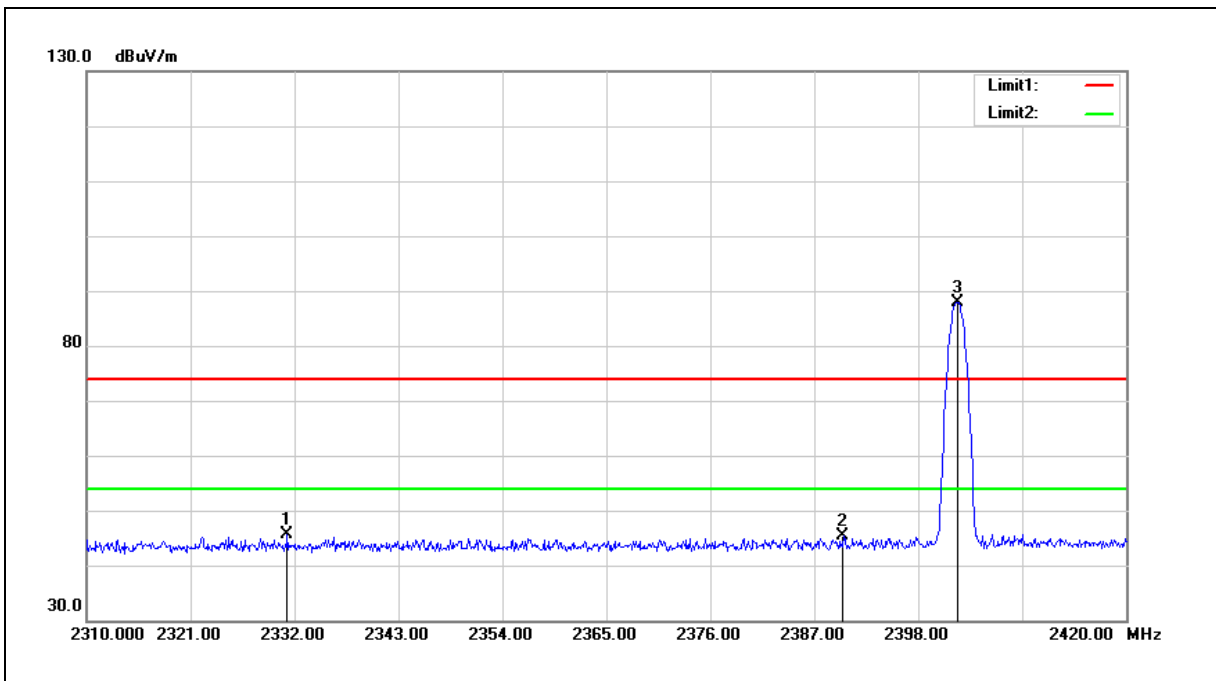


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2331.230	46.97	-1.29	45.68	74.00	-28.32	peak
2	2390.000	46.30	-1.03	45.27	74.00	-28.73	peak
3	2402.180	88.98	-0.98	88.00	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

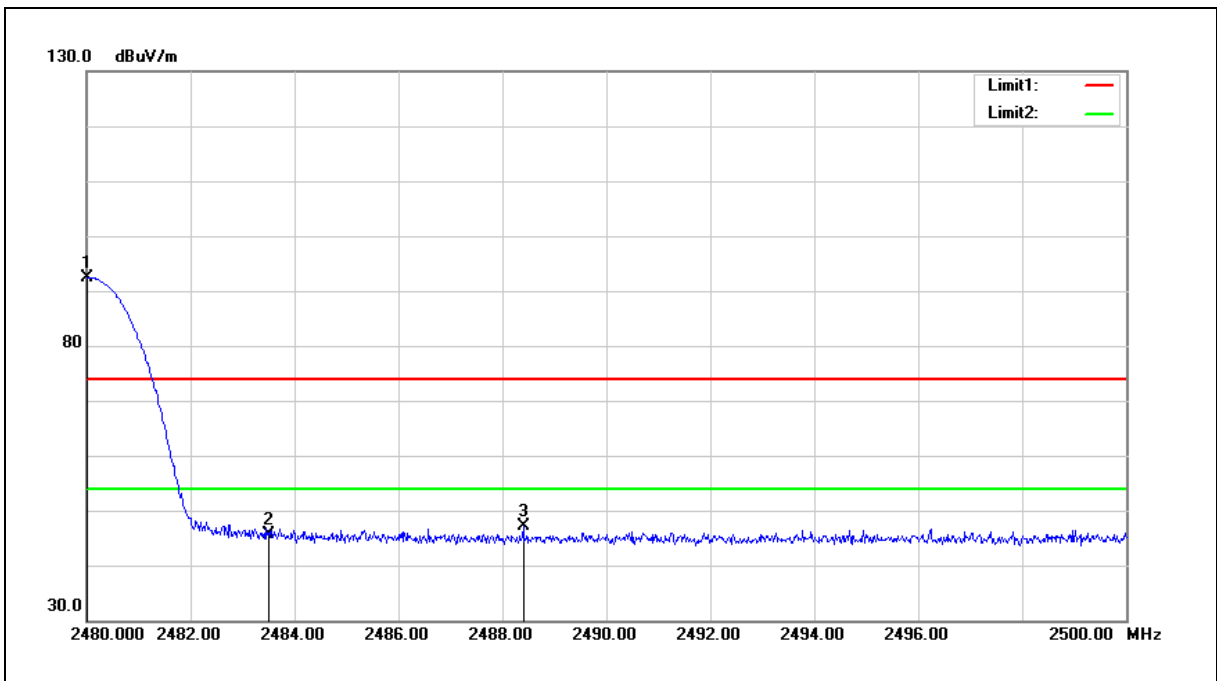


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	93.10	-0.63	92.47	--	--	peak
2	2483.500	46.26	-0.62	45.64	74.00	-28.36	peak
3	2488.400	47.62	-0.59	47.03	74.00	-26.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

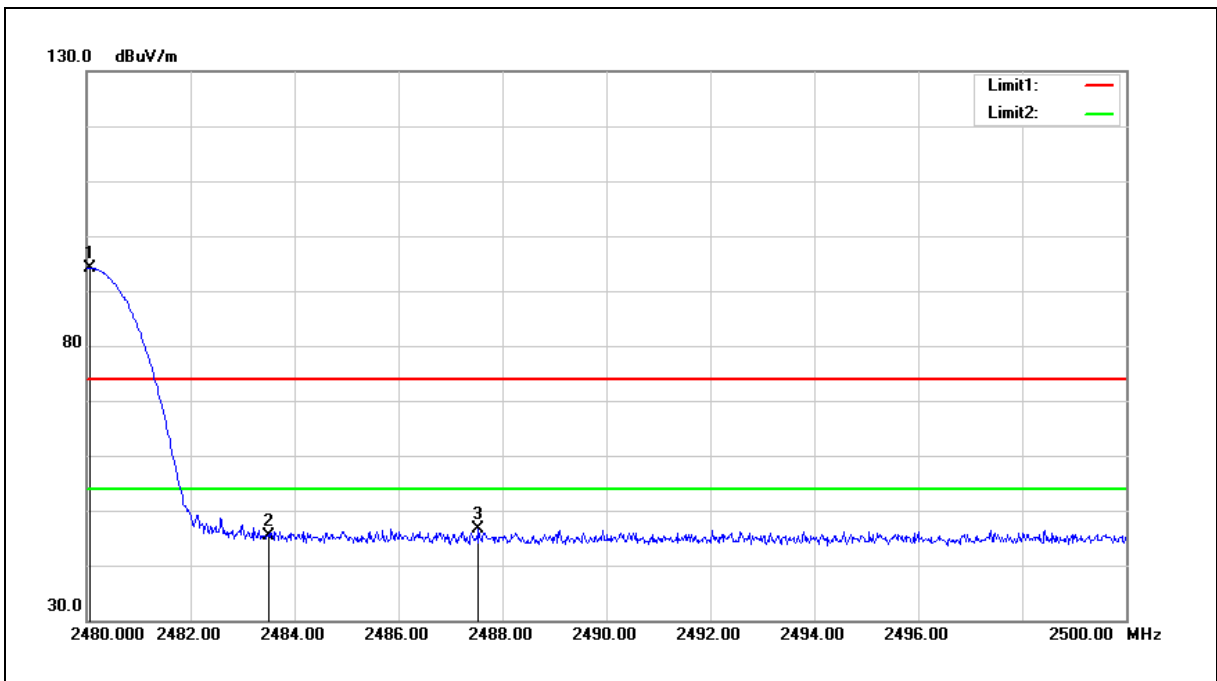

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	94.88	-0.63	94.25	--	--	peak
2	2483.500	46.09	-0.62	45.47	74.00	-28.53	peak
3	2487.540	47.32	-0.59	46.73	74.00	-27.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

--- END---