

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 3T3R Wireless LAN Concurrent Dual Band Gigabit Router
Brand Name : EDIMAX
Model No. : BR-6675ND / GR-675ND / BR-6676nD
Filing Type : New Application
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Manufacturer : No.3, Wu Chuan 3rd Road, Wu-Ku Industrial Park.
Taipei Hsien, Taiwan
FCC ID : NDD9566751028
Received Date : Apr. 01, 2011
Final Test Date : Jul. 14, 2011

Statement

Test result included is only for the 802.11a/n (5725~5850 MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT	2
2 GENERAL INFORMATION.....	3
2.1 Product Details.....	3
2.2 Accessories.....	3
2.3 Table for Filed Antenna.....	3
2.4 Table for Carrier Frequencies	6
2.5 Table for Test Modes	6
2.6 Table for Testing Locations.....	6
2.7 Table for Supporting Units	7
2.8 Table for Parameters of Test Software Setting.....	7
2.9 EUT Operation during Test	8
2.10 Test Configuration.....	9
3 TEST RESULT	10
3.1 AC Power Line Conducted Emissions Measurement	10
3.2 Maximum Peak Output Power Measurement	16
3.3 Power Spectral Density Measurement.....	19
3.4 6dB Spectrum Bandwidth Measurement	33
3.5 Radiated Emissions Measurement	47
3.6 Band Edge and Fundamental Emissions Measurement.....	71
3.7 Antenna Requirements	82
4 LIST OF MEASURING EQUIPMENTS.....	83
5 TEST LOCATION.....	85
6 TAF CERTIFICATE OF ACCREDITATION.....	86
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B36

History of This Test Report

Original Issue Date: Oct. 05, 2011

Report No.: FR121509AI

■ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 3T3R Wireless LAN Concurrent Dual Band Gigabit Router

Brand Name : EDIMAX

Model No. : BR-6675ND / GR-675ND / BR-6676nD

Applicant : EDIMAX TECHNOLOGY CO., LTD.

No.3, Wu Chuan 3rd Road, Wu-Ku Industrial Park.
Taipei Hsien, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 01, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	9.60 dB
3.2	15.247(b)(3)	Maximum Peak Output Power	Complies	9.69 dB
3.3	15.247(e)	Power Spectral Density	Complies	15.81 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	2.55 dB
3.6	15.247(d)	Band Edge and Fundamental Emissions	Complies	-
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

There are 4 types of the EUT. The differences between these four types are antenna connector and USB connector. Only the radio detail of IEEE 802.11a/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	12Vdc from adapter
Data Modulation Data Rate (Mbps)	OFDM for IEEE 802.11a (BPSK / QPSK / 16QAM / 64QAM) (6/9/12/18/24/36/48/54) See the below table for IEEE 802.11n
Frequency Range	5725 ~ 5850MHz
Channel Number	5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	802.11a : 16.40 MHz 802.11n : MCS 16 (20MHz) : 18.12 MHz ; MCS 16 (40MHz) : 35.68 MHz
Conducted Output Power	802.11a : 17.46 dBm 802.11n : MCS 16 (20MHz) : 20.31 dBm ; MCS 16 (40MHz) : 20.17 dBm

2.2 Accessories

Power	Brand	Model	Rating
Switching Adapter 1	DVE	DSA -15P-12 US 120150	INPUT : 100-240V~50/60Hz 0.5A OUTPUT : +12V 1.25A
Switching Adapter 2	DVE	DSA -24PFD-15 FUS 120200	INPUT : 100-240V~50/60Hz 0.8A OUTPUT : +12V 2A

2.3 Table for Filed Antenna

Antenna Category Information (2.4GHz/5GHz Band)	
☐	Equipment placed on the market without antennas
☐	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☐	No temporary RF connector provided
☒	External antenna (dedicated antennas)
☐	Single power level with corresponding antenna(s)
☐	Multiple power settings and corresponding antenna(s)
☐	Professional Install
☒	Unique antenna connector
☐	BIOS lock.

Antenna General Information (2.4GHz/5GHz Band)					
Ant. No.	Category	Type	Brand	Model	Gain (dBi)
1	External	Dipole	ARISTOTLE	RFA-25-C52M3-B32-25	3
2	External	Dipole	ENTERPRISES	RFA-25-L14H1-70B105P	3
3	External	Dipole		RFA-25-C52M3-B32-25	3
☐ EUT is consist of single model antenna assembly for spatial multiplexing MIMO configuration. ☒ EUT is consist of multiple model antennas assembly (secondary source multiple model antennas regardless of spatial multiplexing MIMO configuration), the test (except DFS test) should be performed with highest antenna gain of each antenna type. Then Ant. No. <u>1</u> shall be performed the test. ☐ EUT is consist of multiple model antennas assembly for spatial multiplexing MIMO configuration (e.g. model A shall be installed in port 1 and model B shall be installed in port 2...).					

Transmitter Outputs & Receiver Inputs Information				
Modulation	Transmitter Outputs	Receiver Inputs	Transmitter Output Signals	Co-location
802.11a	1	1	Correlated	No
802.11n HT20	3 (SM)	3	Uncorrelated	No
802.11n HT40	3 (SM)	3	Uncorrelated	No

Note 1: CDD - Cyclic Delay Diversity (CDD) modes (e.g., legacy modes in 802.11n devices). In CDD modes, the same digital data is carried by each transmit antenna, but with different cyclic delays.

Note 2: STBC - Space Time Block Codes (STBC) for which different digital data is carried by each transmit antenna during any symbol period.

Note 3: SM - Spatial Multiplexing MIMO (SM-MIMO), for which independent data streams are sent to each transmit antenna.

Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other.

Antenna Directional Gain (2.4GHz/5GHz Band)					
Ant. No.	Modulation	Transmitter Outputs Signals Correlated	Transmitter Outputs (N)	Antenna Gain Combination (dBi)	Directional Gain (dBi)
1	802.11a	Correlated	1	3	3
1	802.11n HT20	Uncorrelated	3	3, 3, 3	3
1	802.11n HT40	Uncorrelated	3	3, 3, 3	3

☒ For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows

- Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N)$ dBi
- All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

☐ For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N]$ dBi
- All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N]$ dBi

IEEE 802.11n Modulation Scheme

MCS	Spatial	Modulation	Coding Rate	Data rate(Mbps)	
Index	Streams	Type	Type	20 MHz channel 800nsGI	40 MHz channel 800nsGI
0	1	BPSK	1/2	6.5	13.5
1	1	QPSK	1/2	13	27
2	1	QPSK	3/4	19.5	40.5
3	1	16-QAM	1/2	26	54
4	1	16-QAM	3/4	39	81
5	1	64-QAM	2/3	52	108
6	1	64-QAM	3/4	58.5	121.5
7	1	64-QAM	5/6	65	135
8	2	BPSK	1/2	13	27
9	2	QPSK	1/2	26	54
10	2	QPSK	3/4	39	81
11	2	16-QAM	1/2	52	108
12	2	16-QAM	3/4	78	162
13	2	64-QAM	2/3	104	216
14	2	64-QAM	3/4	117	243
15	2	64-QAM	5/6	130	270
16	3	BPSK	1/2	19.5	40.5
17	3	QPSK	1/2	39	81
18	3	QPSK	3/4	58.5	121.5
19	3	16-QAM	1/2	78	162
20	3	16-QAM	3/4	117	243
21	3	64-QAM	2/3	156	324
22	3	64-QAM	3/4	175.5	364.5
23	3	64-QAM	5/6	195	405

2.4 Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency (20MHz)	Channel No.	Frequency (40MHz)
5725~5850 MHz	149	5745 MHz	151	5755 MHz
	153	5765 MHz	159	5795 MHz
	157	5785 MHz	-	-
	161	5805 MHz	-	-
	165	5825 MHz	-	-

2.5 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Ant. No.
AC Power Line Conducted Emissions	Normal Mode	Auto	-	-
Radiated Emissions Below 1GHz				
Maximum Peak Output Power				
Power Spectral Density	11a/BPSK	6 Mbps	149/157/165	1
	MCS 16 (20MHz)	19.5 Mbps	149/157/165	1
	MCS 16 (40MHz)	40.5 Mbps	151/159	
6dB Spectrum Bandwidth	11a/BPSK	6 Mbps	149/157/165	1
	MCS 16 (20MHz)	19.5 Mbps	149/157/165	1
	MCS 16 (40MHz)	40.5 Mbps	151/159	
Radiated Emissions Above 1GHz	11a/BPSK	6 Mbps	149/157/165	1
Fundamental Emissions	MCS 16 (20MHz)	19.5 Mbps	149/157/165	1
	MCS 16 (40MHz)	40.5 Mbps	151/159	
Band Edge Emissions	11a/BPSK	6 Mbps	149/165	1
	MCS 16 (20MHz)	19.5 Mbps	149/165	1
	MCS 16 (40MHz)	40.5 Mbps	151/159	

Note: If EUT is consist of multiple antennas assembly (regardless of spatial multiplexing MIMO), the radiated test should be performed with highest antenna gain of each antenna type.

2.6 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

2.7 Table for Supporting Units

Support Unit	Brand	Model	FCC ID	Remark
Notebook	DELL	E5500	DoC	Conducted Emissions
(USB) Mouse	Microsoft	1004	N/A	
iPod nano	Apple	A1199	N/A	
Modem	ACEEX	DM1414	IFAXDM1414	
Personal computer (Remote Workstation)	HP	DC579AV	N/A	
LCD Monitor (Remote Workstation)	DELL	2408WFPb	DoC	
(PS/2) Mouse (Remote Workstation)	HP	M-S69	N/A	
(PS/2) Keyboard (Remote Workstation)	HP	KB-0133	N/A	
Notebook	DELL	E5500	DoC	Radiated Emissions

2.8 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11a

Test Software Version	RT 3883 QA		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	05	07	08

For Three Chain:

Power Parameters of IEEE 802.11n Port 1+ Port 2 + Port 3

Test Software Version	RT 3883 QA		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	06;06;07	05;07;06	06;09;08
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	00;03;06	01;06;06	-

2.9 EUT Operation during Test

For Conducted Emissions :

An executive program, "EMCTEST.EXE" under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The NB reads the test program from the hard disk drive and runs it.
- c. The NB sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
- d. The NB sends messages to the modem.
- e. The NB sends "H" messages to the internal hard disk, and the hard disk reads and writes the message.
- f. Repeat the steps from c to e.

At the same time, the following programs were executed:

- Executed "Winthrax.exe" to read and write data from iPod Nano.
- Executed "Ping.exe" to link with the remote workstation to receive and transmit data by RJ45 cable.
- Open the "Wireless" to link with the remote workstation to receive and transmit data
- Open the "WiFi" to link with the remote workstation to receive and transmit data


For Radiated Emissions :

- Executed "RT 3883 QA" to keep transmitting signals at fixed frequency.


2.10 Test Configuration

2.10.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

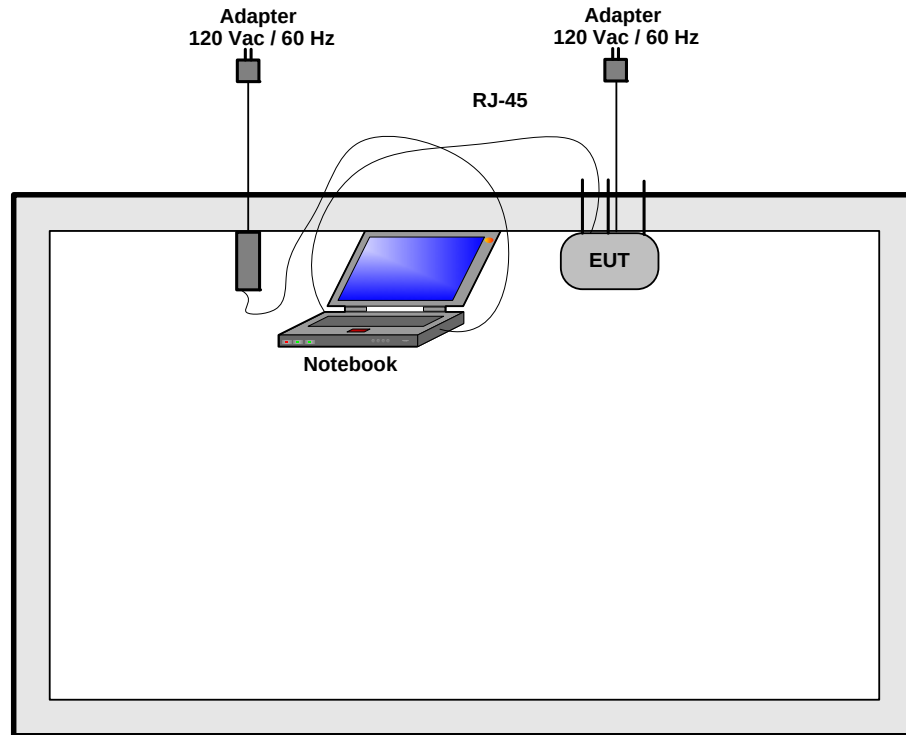

For radiated emissions above 1GHz

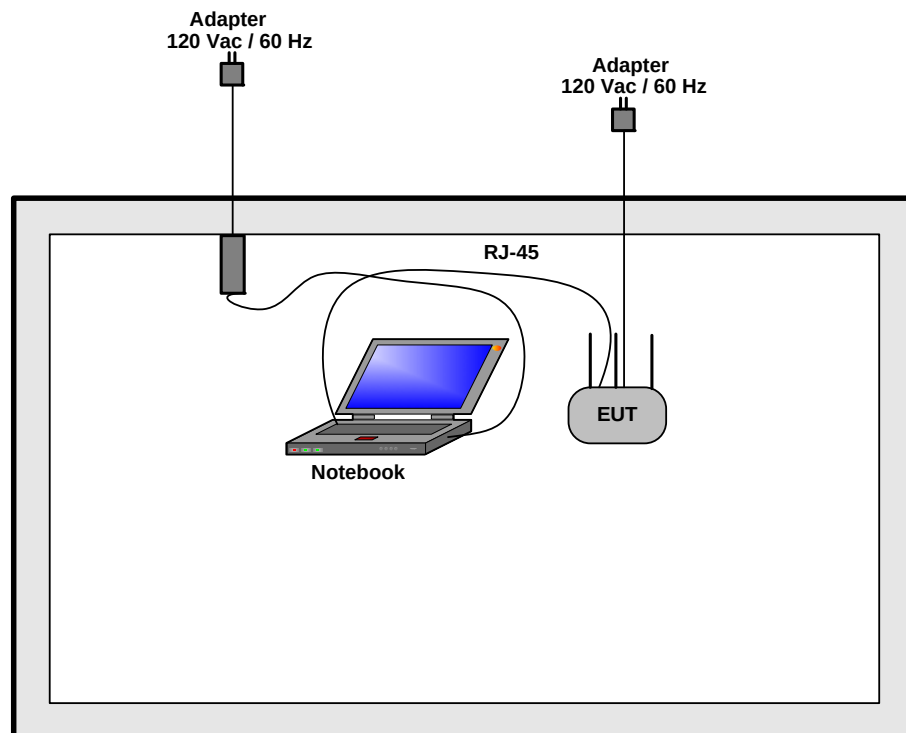

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

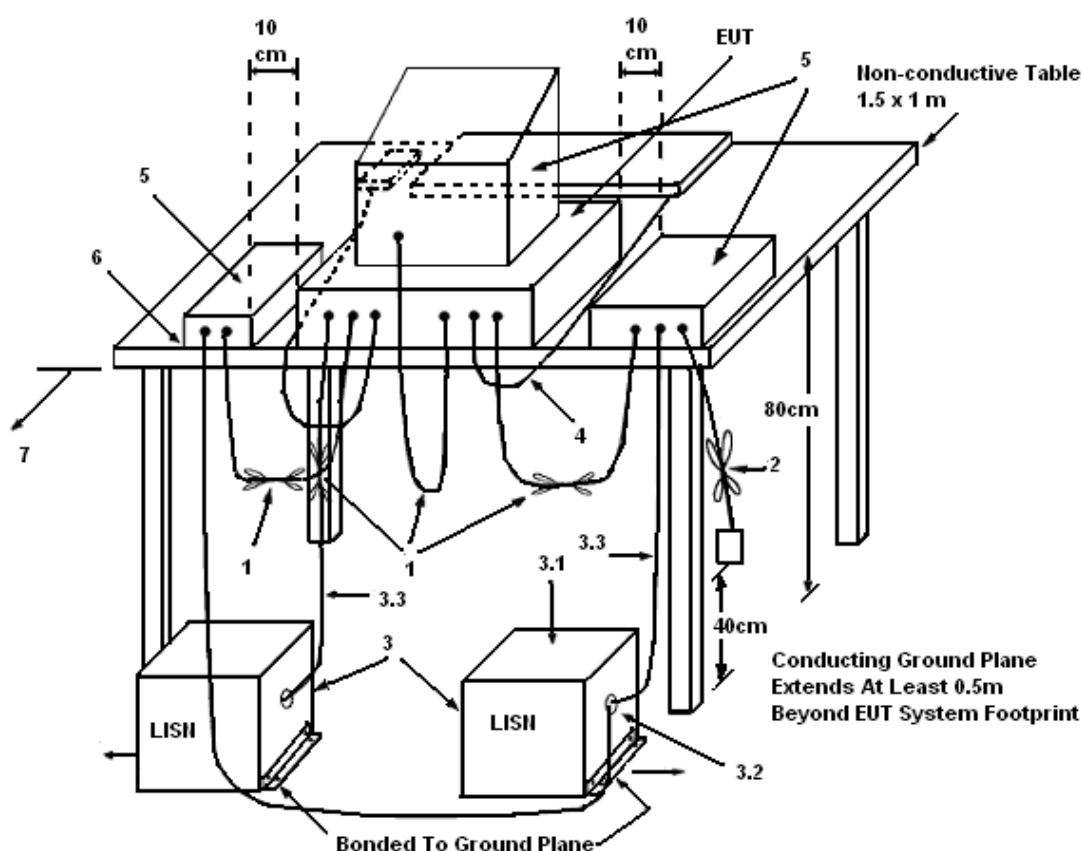

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	Jul. 14, 2011	Test Site No.	CO04-HY
Temperature	26.4°C	Humidity	57.1%
Test Engineer	Jason	Configuration	Normal Mode (Adapter 1)

Line

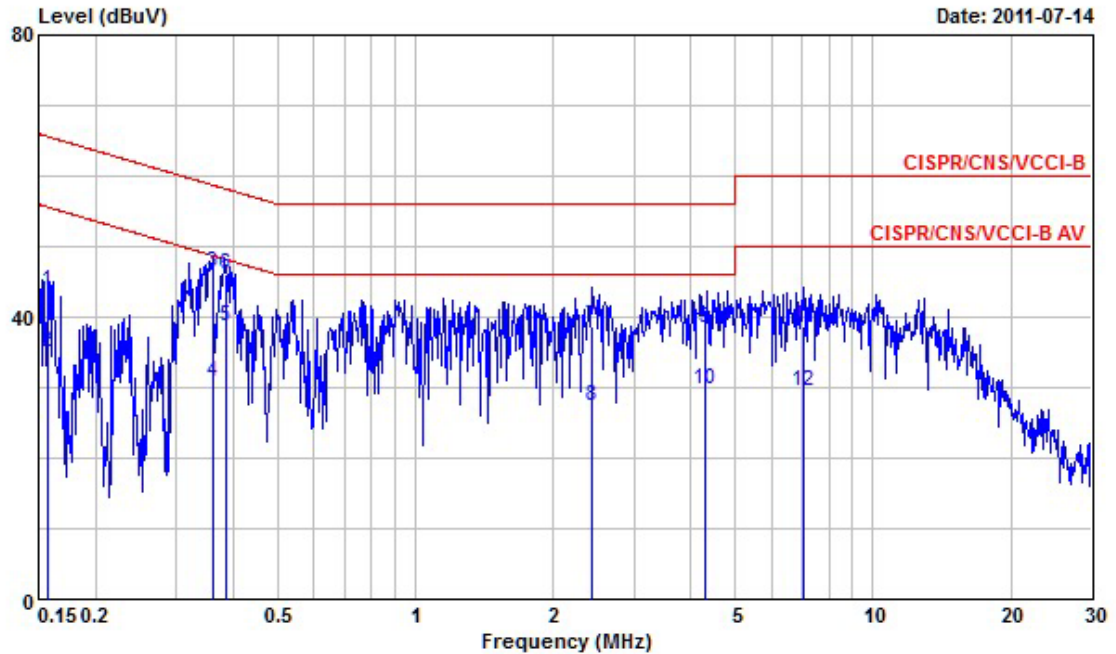

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1564950	43.58	-22.07	65.65	43.43	0.09	0.06	QP
2	0.1564950	34.93	-20.72	55.65	34.78	0.09	0.06	Average
3	0.3595520	46.33	-12.41	58.74	45.97	0.09	0.27	QP
4	0.3595520	30.84	-17.90	48.74	30.48	0.09	0.27	Average
5	0.3837540	38.60	-9.60	48.20	38.22	0.09	0.29	Average
6	0.3837540	46.18	-12.02	58.20	45.80	0.09	0.29	QP
7	2.437	38.62	-17.38	56.00	37.98	0.14	0.50	QP
8	2.437	27.25	-18.75	46.00	26.61	0.14	0.50	Average
9	4.305	38.34	-17.66	56.00	37.67	0.17	0.50	QP
10	4.305	29.63	-16.37	46.00	28.96	0.17	0.50	Average
11	7.060	38.76	-21.24	60.00	38.03	0.23	0.50	QP
12	7.060	29.58	-20.42	50.00	28.85	0.23	0.50	Average

Neutral

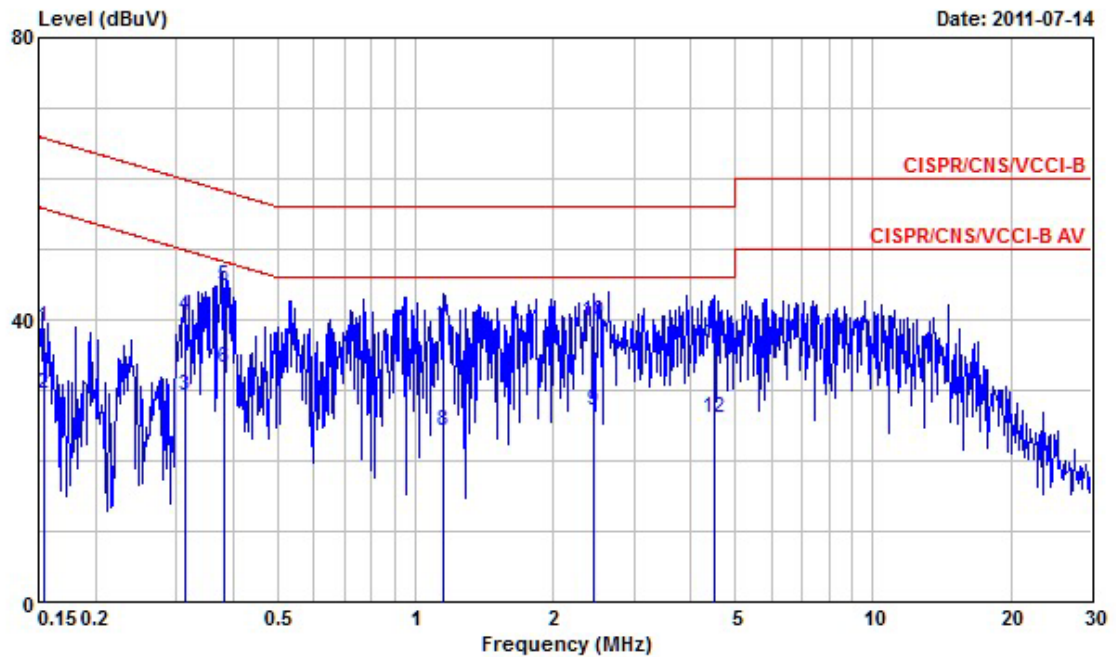

0.15 0.2 0.5 1 2 5 10 20 30


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1540030	38.92	-26.86	65.78	38.78	0.08	0.06	QP
2	0.1540030	29.45	-26.33	55.78	29.31	0.08	0.06	Average
3	0.3139920	29.18	-20.68	49.86	28.87	0.08	0.23	Average
4	0.3139920	40.42	-19.44	59.86	40.11	0.08	0.23	QP
5	0.3801190	44.83	-13.45	58.28	44.47	0.08	0.28	QP
6	0.3801190	33.09	-15.19	48.28	32.73	0.08	0.28	Average
7	1.150	38.71	-17.29	56.00	38.11	0.10	0.50	QP
8	1.150	24.27	-21.73	46.00	23.67	0.10	0.50	Average
9	2.460	27.19	-18.81	46.00	26.57	0.12	0.50	Average
10	2.460	39.66	-16.34	56.00	39.04	0.12	0.50	QP
11	4.488	36.62	-19.38	56.00	35.96	0.16	0.50	QP
12	4.488	26.00	-20.00	46.00	25.34	0.16	0.50	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

Final Test Date	Jul. 14, 2011	Test Site No.	CO04-HY
Temperature	26.4°C	Humidity	57.1%
Test Engineer	Jason	Configuration	Normal Mode (Adapter 2)


Line

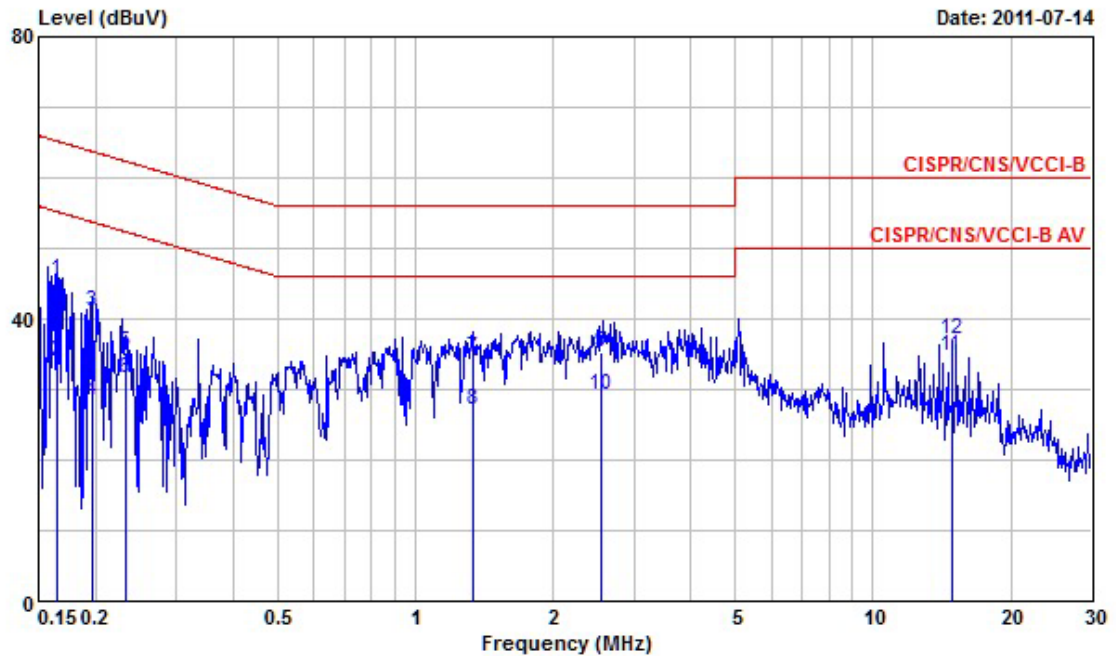

0.15 0.2 0.5 1 2 5 10 20 30

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1641380	45.44	-19.81	65.25	45.28	0.09	0.07	QP
2	0.1641380	33.91	-21.34	55.25	33.75	0.09	0.07	Average
3	0.1975810	41.02	-22.69	63.71	40.84	0.08	0.10	QP
4	0.1975810	28.49	-25.22	53.71	28.31	0.08	0.10	Average
5	0.2319670	35.27	-27.11	62.38	35.05	0.08	0.14	QP
6	0.2319670	31.68	-20.70	52.38	31.46	0.08	0.14	Average
7	1.330	34.49	-21.51	56.00	33.87	0.12	0.50	QP
8	1.330	27.01	-18.99	46.00	26.39	0.12	0.50	Average
9	2.536	35.31	-20.69	56.00	34.67	0.14	0.50	QP
10	2.536	29.15	-16.85	46.00	28.51	0.14	0.50	Average
11	14.875	34.63	-15.37	50.00	33.71	0.32	0.60	Average
12	14.875	37.15	-22.85	60.00	36.23	0.32	0.60	QP

Neutral

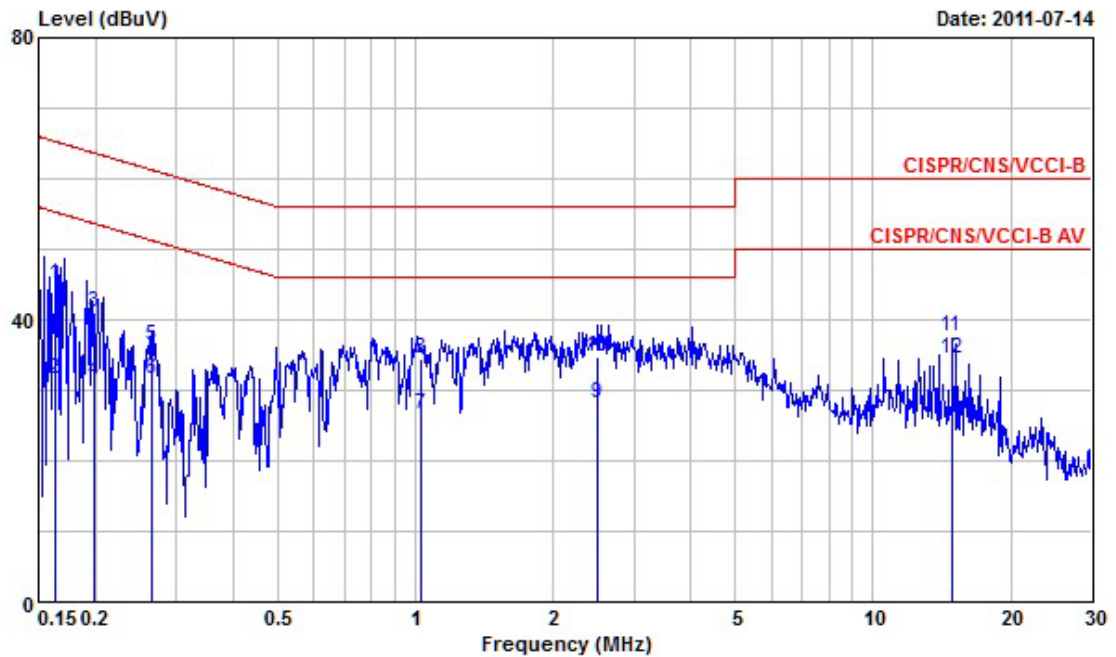

2011-07-14 10:00:00

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1632450	44.91	-20.39	65.30	44.76	0.08	0.07	QP
2	0.1632450	31.62	-23.68	55.30	31.47	0.08	0.07	Average
3	0.1984650	40.94	-22.73	63.67	40.76	0.08	0.10	QP
4	0.1984650	31.34	-22.33	53.67	31.16	0.08	0.10	Average
5	0.2646610	36.37	-24.91	61.28	36.11	0.08	0.18	QP
6	0.2646610	31.64	-19.64	51.28	31.38	0.08	0.18	Average
7	1.024	26.45	-19.55	46.00	25.85	0.10	0.50	Average
8	1.024	34.53	-21.47	56.00	33.93	0.10	0.50	QP
9	2.509	28.06	-17.94	46.00	27.44	0.12	0.50	Average
10	2.509	34.63	-21.37	56.00	34.01	0.12	0.50	QP
11	14.877	37.69	-22.31	60.00	36.76	0.33	0.60	QP
12	14.877	34.49	-15.51	50.00	33.56	0.33	0.60	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Peak Output Power Measurement

3.2.1 Limit

For systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.
4. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.2.4 Test Setup Layout

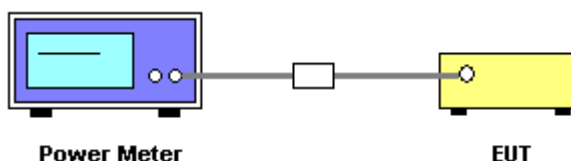

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Peak Output Power

Final Test Date	May 14, 2011	Test Site No.	TH01-HY
Temperature	26°C	Humidity	62%
Test Engineer	Ian	Configurations	802.11a/n

For Single Chain:

Configuration of IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	17.08	30	Complies
157	5785 MHz	17.27	30	Complies
165	5825 MHz	17.46	30	Complies

For Three Chain:

Configuration of IEEE 802.11n Port 1 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.90	30	Complies
157	5785 MHz	15.78	30	Complies
165	5825 MHz	15.38	30	Complies

Configuration of IEEE 802.11n Port 2 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.57	30	Complies
157	5785 MHz	15.32	30	Complies
165	5825 MHz	15.72	30	Complies

Configuration of IEEE 802.11n Port 3 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.11	30	Complies
157	5785 MHz	15.08	30	Complies
165	5825 MHz	15.42	30	Complies

Configuration of IEEE 802.11n Port 1+ Port 2 + Port 3 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	20.31	30	Complies
157	5785 MHz	20.17	30	Complies
165	5825 MHz	20.28	30	Complies

Configuration of IEEE 802.11n Port 1 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.45	30	Complies
159	5795 MHz	15.13	30	Complies

Configuration of IEEE 802.11n Port 2 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.33	30	Complies
159	5795 MHz	15.12	30	Complies

Configuration of IEEE 802.11n Port 3 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.42	30	Complies
159	5795 MHz	15.52	30	Complies

Configuration of IEEE 802.11n Port 1+ Port 2 + Port 3 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.17	30	Complies
159	5795 MHz	20.03	30	Complies

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.3.4 Test Setup Layout

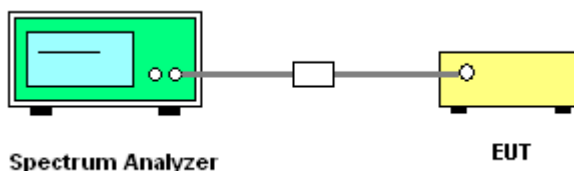

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

Final Test Date	May 14, 2011	Test Site No.	TH01-HY
Temperature	26°C	Humidity	62%
Test Engineer	Ian	Configurations	802.11a/n

For Single Chain:**Configuration of IEEE 802.11a**

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-19.89	8	Complies
157	5785 MHz	-18.98	8	Complies
165	5825 MHz	-19.06	8	Complies

For Three Chain:**Configuration of IEEE 802.11n Port 1 (20MHz)**

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-11.20	8	Complies
157	5785 MHz	-12.54	8	Complies
165	5825 MHz	-13.72	8	Complies

Configuration of IEEE 802.11n Port 2 (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-12.80	8	Complies
157	5785 MHz	-13.56	8	Complies
165	5825 MHz	-13.57	8	Complies

Configuration of IEEE 802.11n Port 3 (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-14.30	8	Complies
157	5785 MHz	-15.06	8	Complies
165	5825 MHz	-16.00	8	Complies

Configuration of IEEE 802.11n Port 1+ Port 2 + Port 3 (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-7.81	8	Complies
157	5785 MHz	-8.83	8	Complies
165	5825 MHz	-9.53	8	Complies

Configuration of IEEE 802.11n Port 1 (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-23.37	8	Complies
159	5795 MHz	-23.27	8	Complies

Configuration of IEEE 802.11n Port 2 (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-24.98	8	Complies
159	5795 MHz	-24.88	8	Complies


Configuration of IEEE 802.11n Port 3 (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-23.77	8	Complies
159	5795 MHz	-24.88	8	Complies

Configuration of IEEE 802.11n Port 1+ Port 2 + Port 3 (40MHz)


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-19.19	8	Complies
159	5795 MHz	-19.50	8	Complies

For Single Chain:
Power Density Plot on Configuration IEEE 802.11a / 5745 MHz

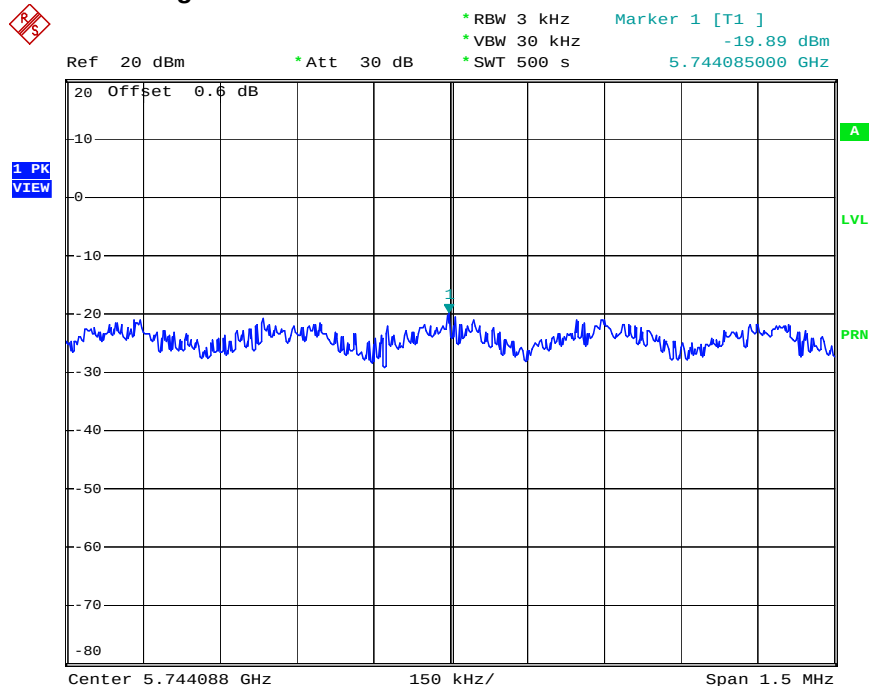


Date: 12.MAY.2011 18:17:55

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz

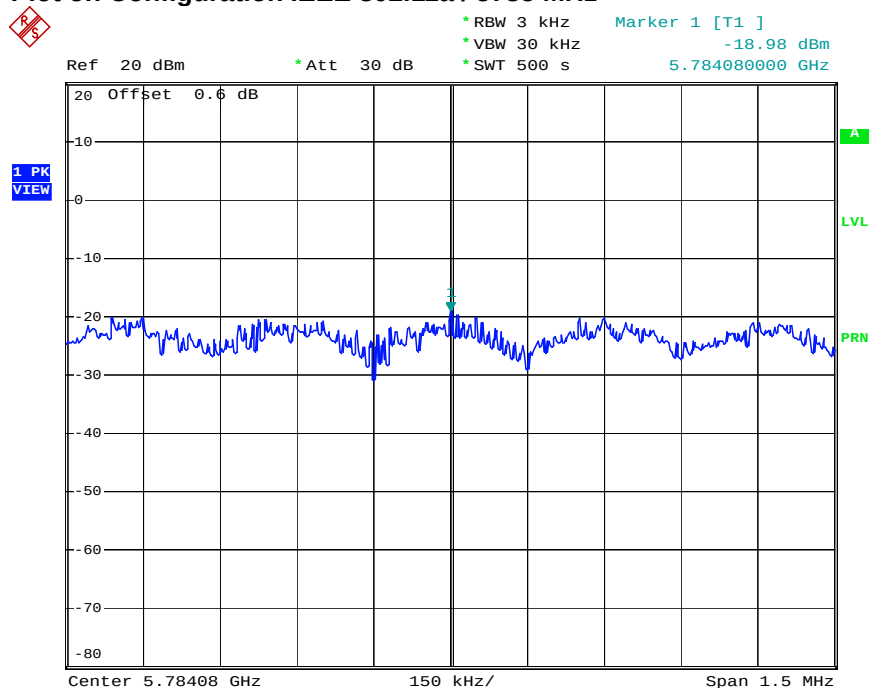


Date: 12.MAY.2011 18:22:54

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz

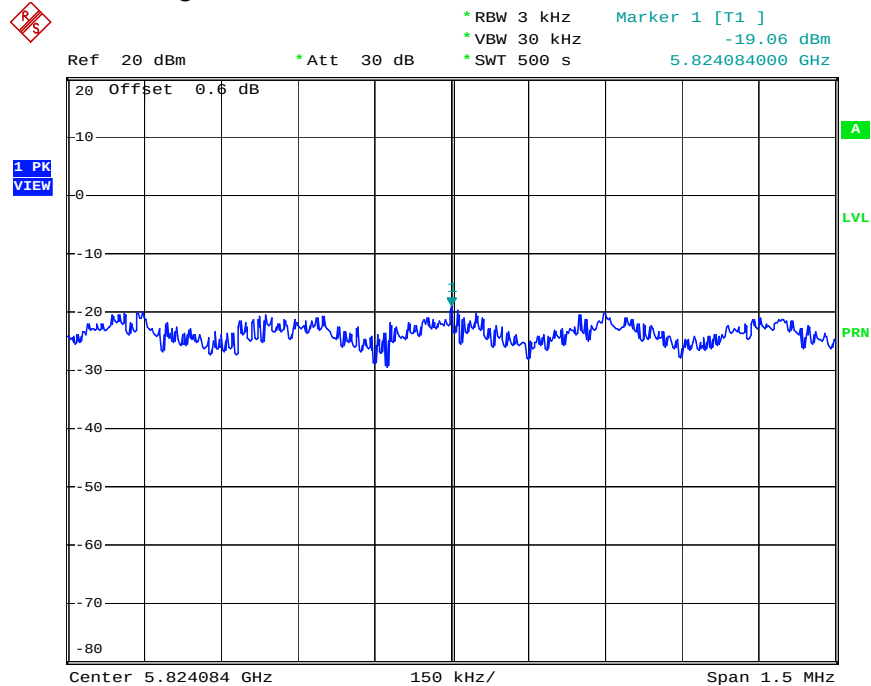


Date: 12.MAY.2011 18:27:29

For Three Chain:
Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5745 MHz

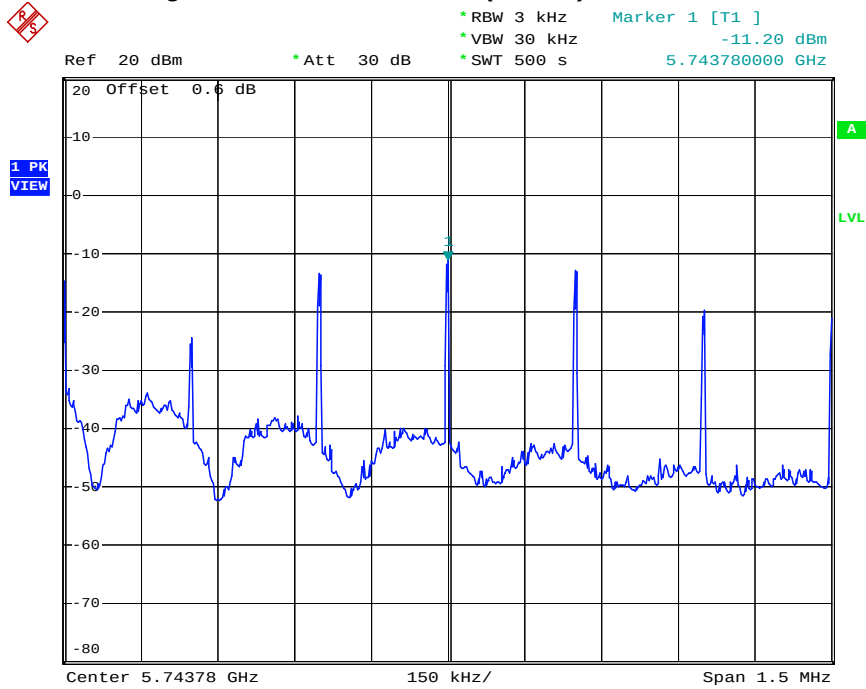


Date: 13.MAY.2011 20:18:42

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5785 MHz

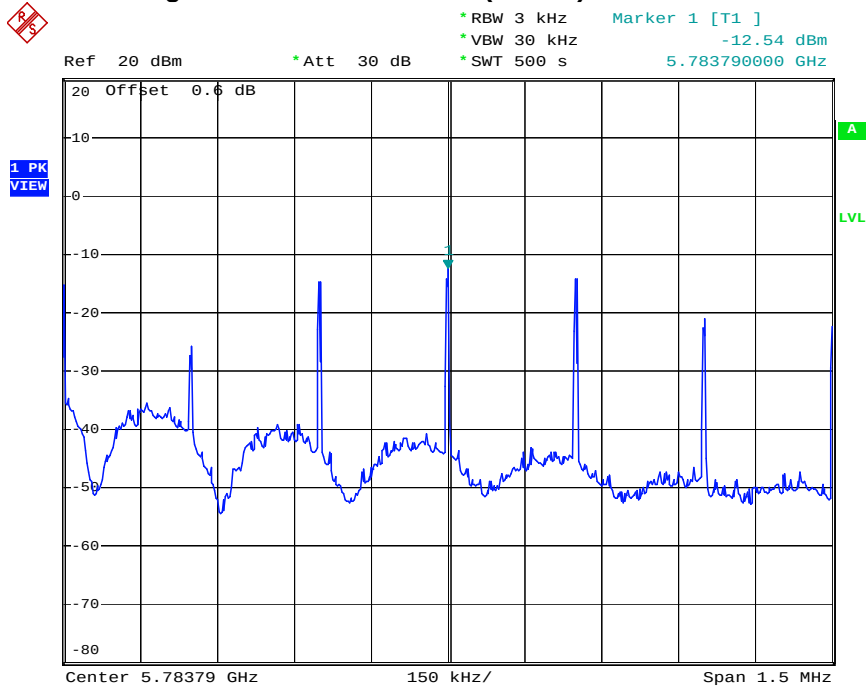


Date: 13.MAY.2011 20:21:26

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5825 MHz

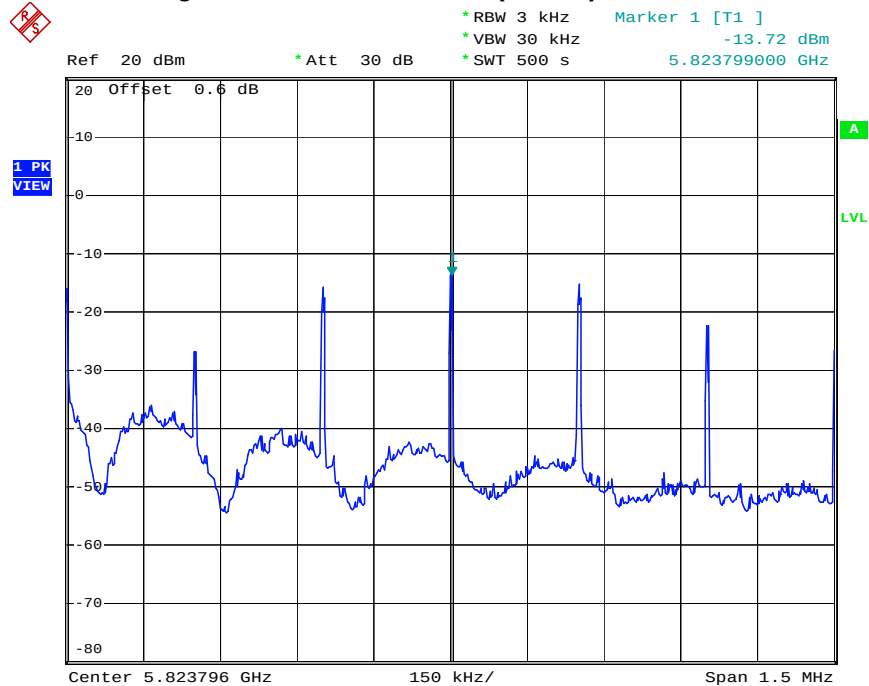


Date: 13.MAY.2011 20:24:26

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5745 MHz

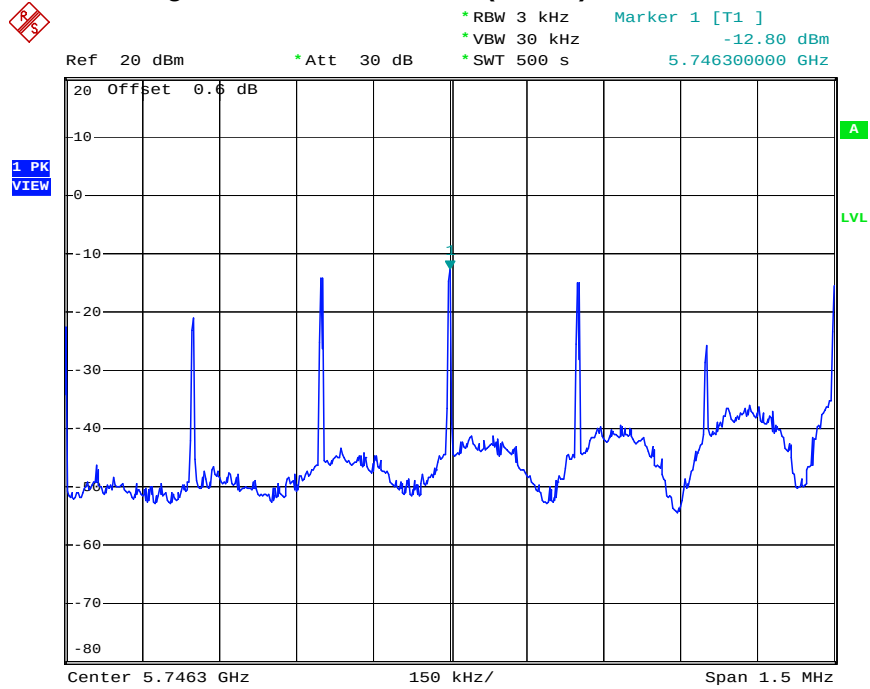


Date: 13.MAY.2011 20:27:45

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5785 MHz

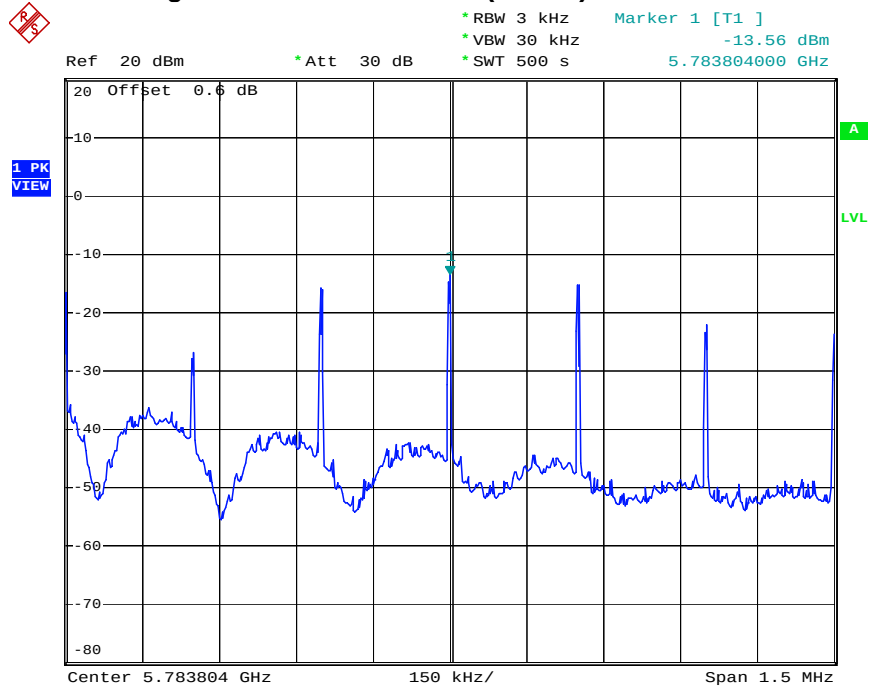


Date: 13.MAY.2011 20:29:52

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5825 MHz

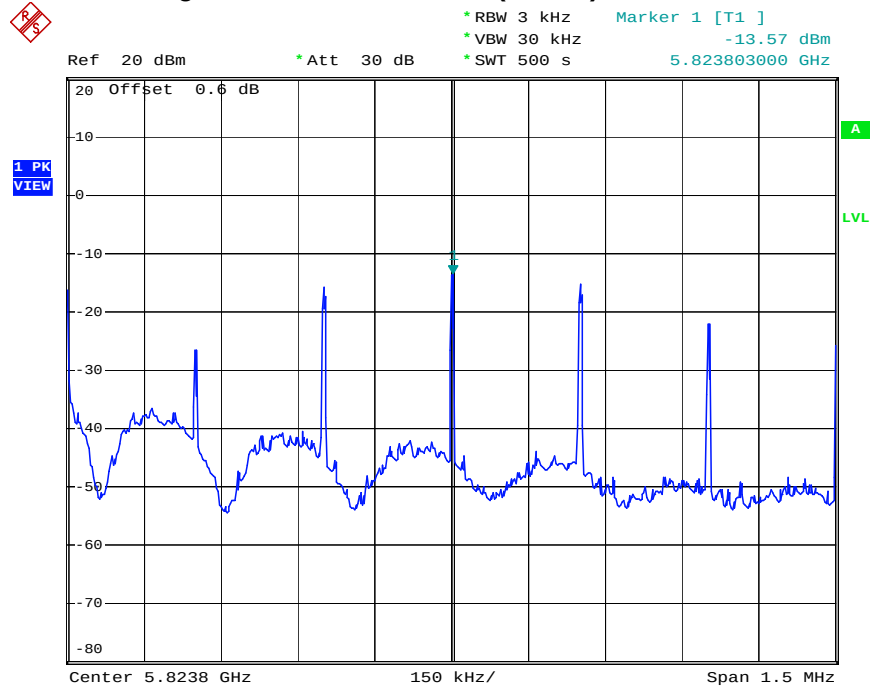


Date: 13.MAY.2011 20:34:18

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5745 MHz

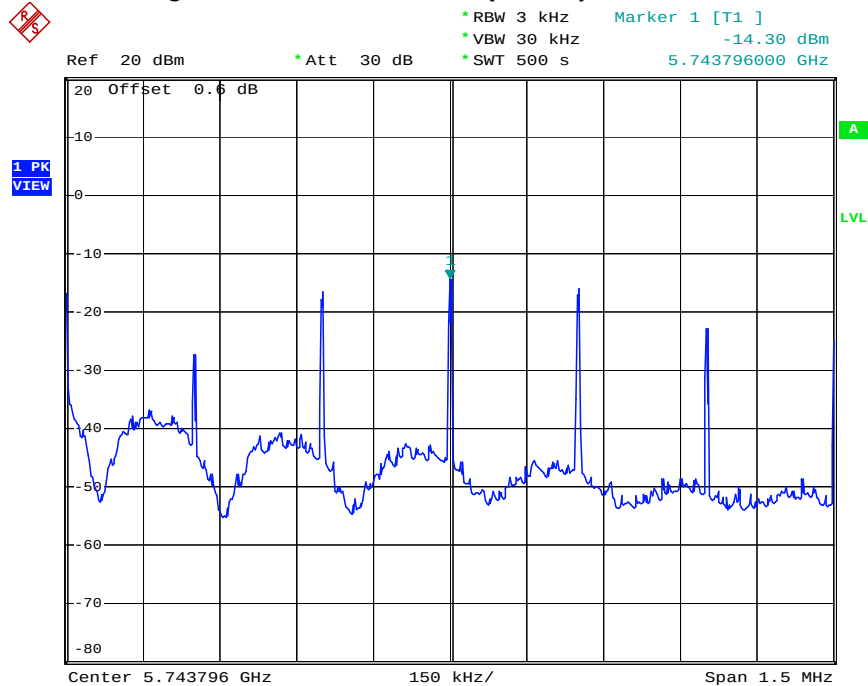


Date: 13.MAY.2011 20:39:36

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5785 MHz

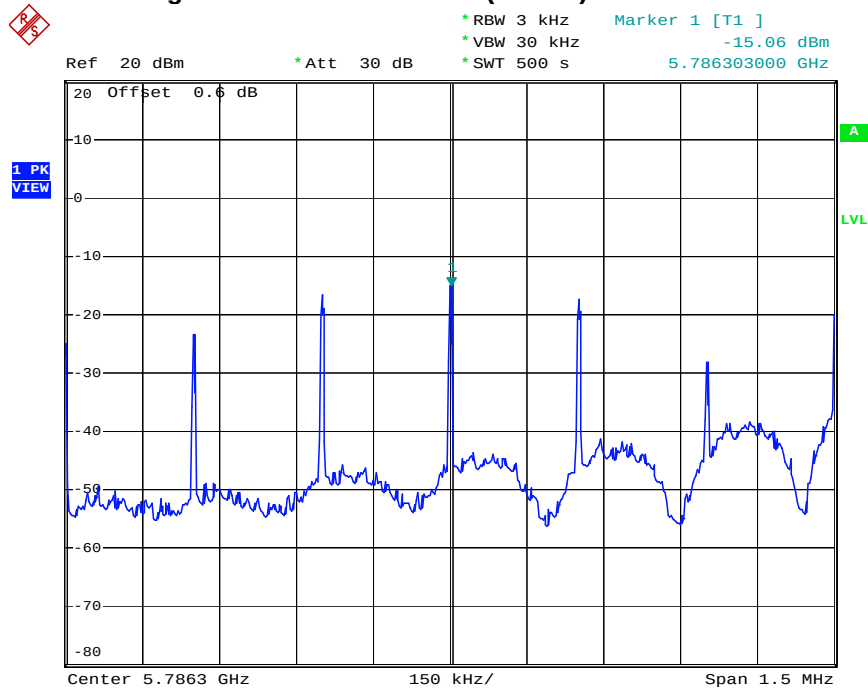


Date: 13.MAY.2011 20:41:29

Power Density Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5825 MHz

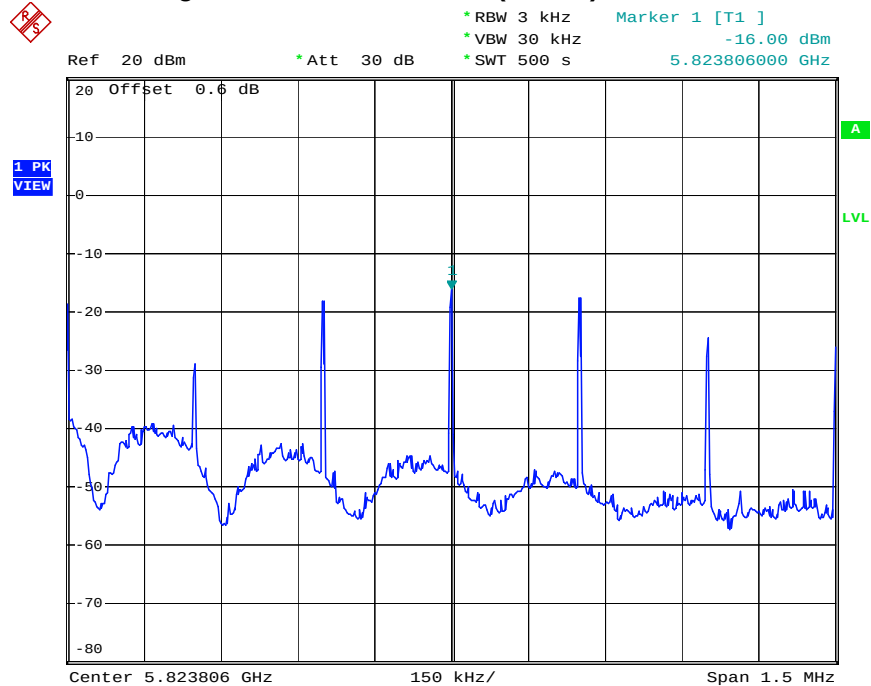


Date: 13.MAY.2011 20:44:28

Power Density Plot on Configuration of IEEE 802.11n (40MHz) Port 1 / 5755 MHz

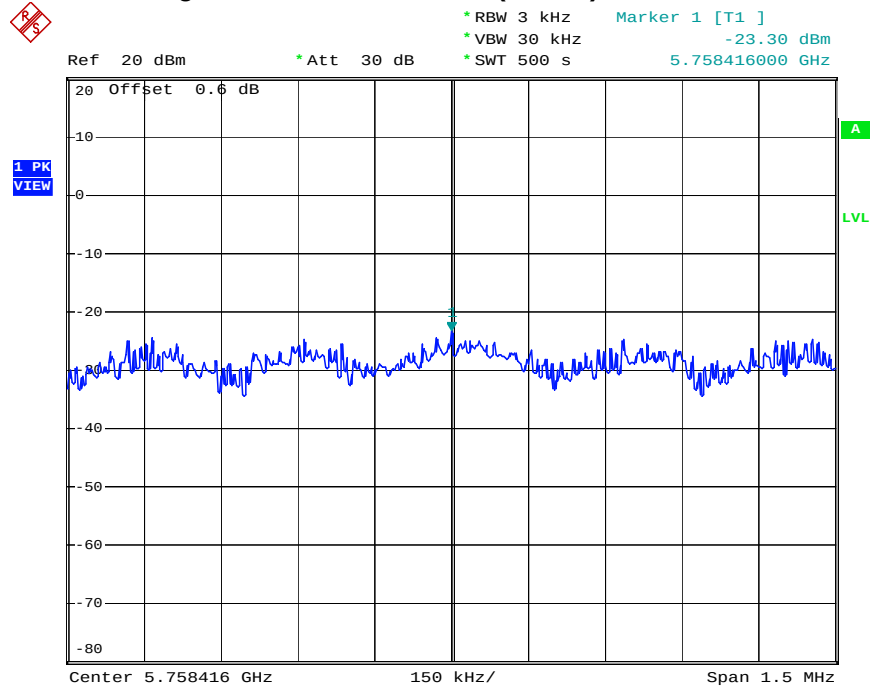


Date: 14.MAY.2011 15:00:44

Power Density Plot on Configuration of IEEE 802.11n (40MHz) Port 1 / 5795 MHz

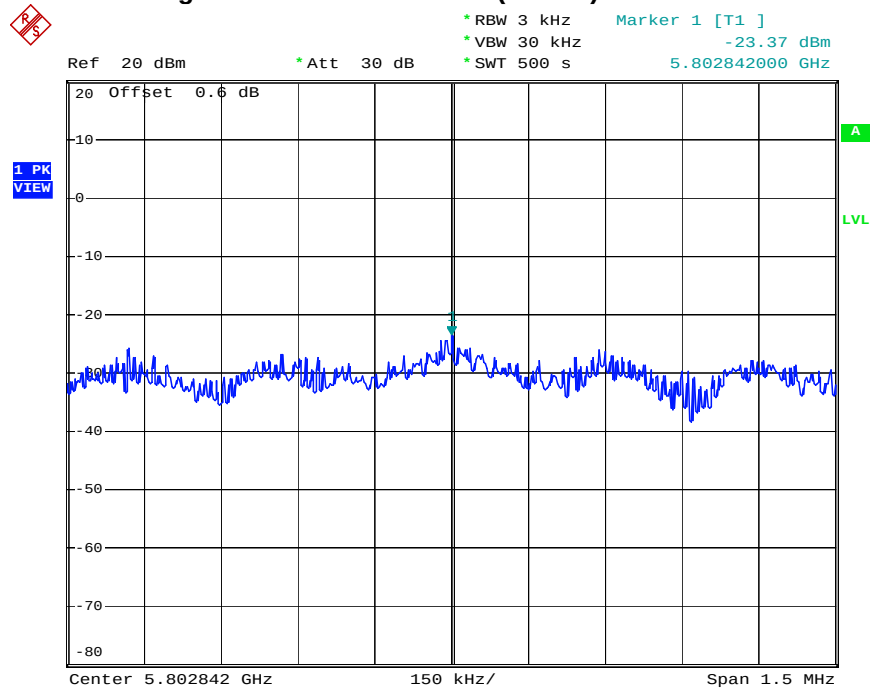


Date: 14.MAY.2011 15:04:13

Power Density Plot on Configuration of IEEE 802.11n (40MHz) Port 2 / 5755 MHz

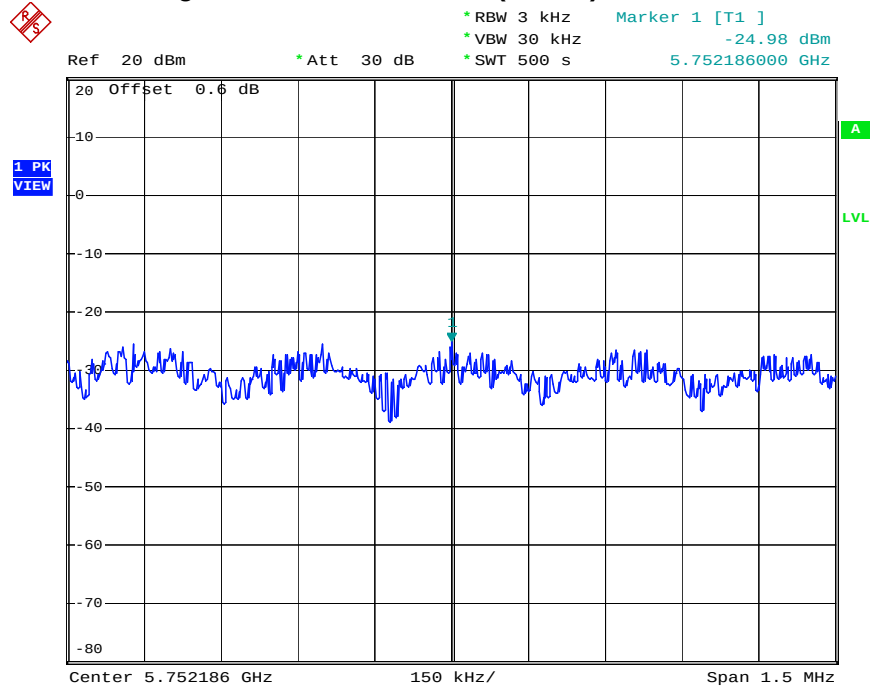


Date: 14.MAY.2011 15:07:40

Power Density Plot on Configuration of IEEE 802.11n (40MHz) Port 2 / 5795 MHz

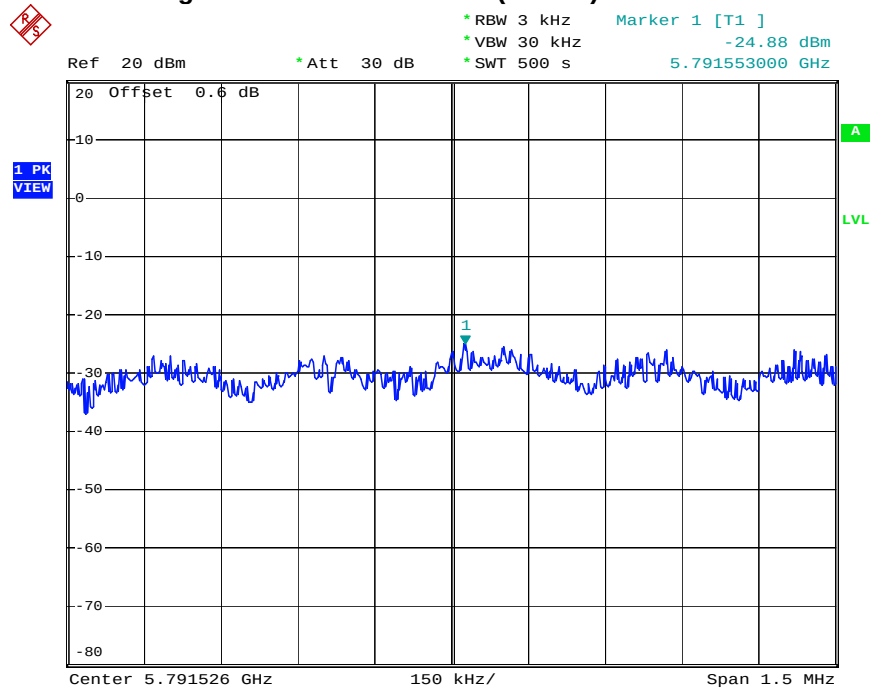


Date: 14.MAY.2011 15:11:04

Power Density Plot on Configuration of IEEE 802.11n (40MHz) Port 3 / 5755 MHz

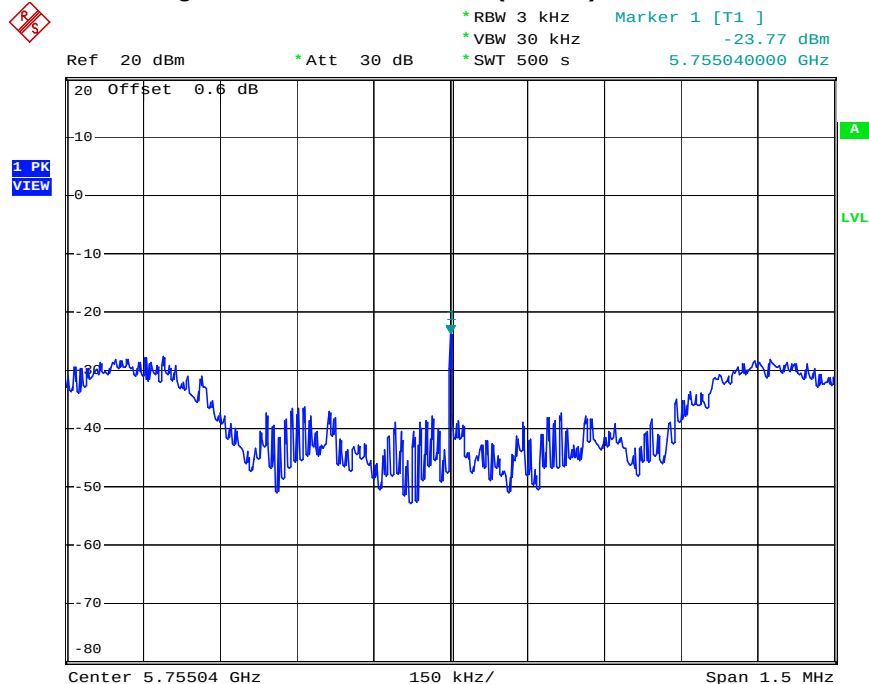

Date: 14.MAY.2011 15:15:01

Power Density Plot on Configuration of IEEE 802.11n (40MHz) Port 3 / 5795 MHz

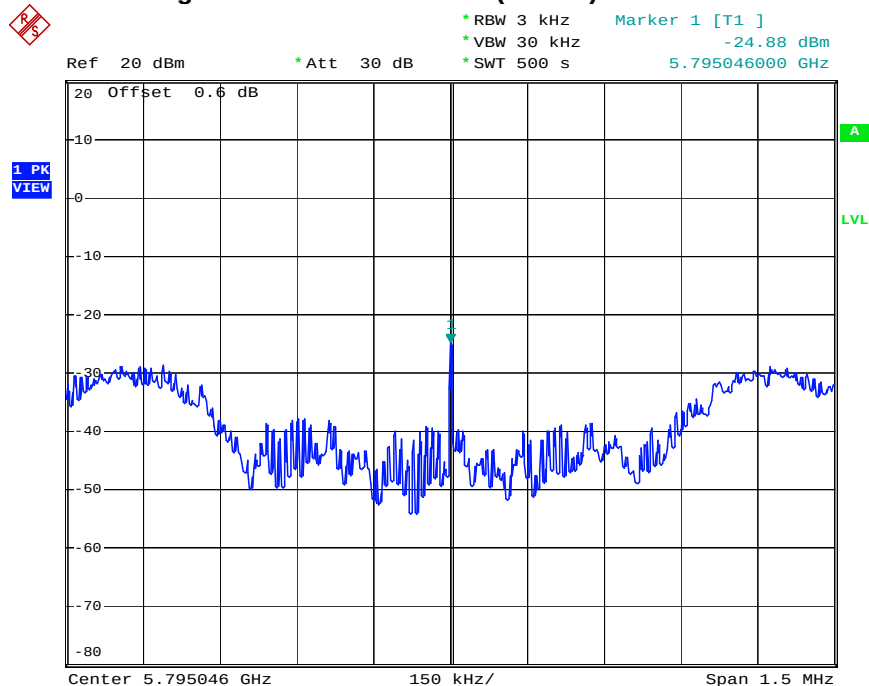

Date: 14.MAY.2011 15:18:04

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

3.4.4 Test Setup Layout

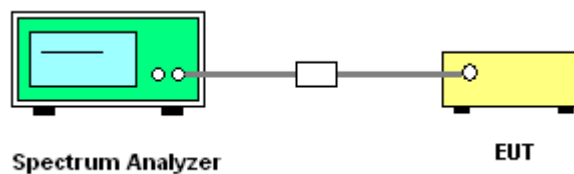

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test Date	May 14, 2011	Test Site No.	TH01-HY
Temperature	26°C	Humidity	62%
Test Engineer	Ian	Configurations	802.11a/n

For Single Chain:

Configuration of IEEE 802.11a

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.52	16.40	500	Complies
157	5785 MHz	16.52	16.40	500	Complies
165	5825 MHz	16.52	16.40	500	Complies

For Three Chain:

Configuration of IEEE 802.11n Port 1 (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.08	18.04	500	Complies
157	5785 MHz	15.08	18.04	500	Complies
165	5825 MHz	15.08	18.04	500	Complies

Configuration of IEEE 802.11n Port 2 (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	13.36	17.92	500	Complies
157	5785 MHz	14.20	18.00	500	Complies
165	5825 MHz	15.08	18.00	500	Complies

Configuration of IEEE 802.11n Port 3 (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.08	18.12	500	Complies
157	5785 MHz	15.12	18.08	500	Complies
165	5825 MHz	16.08	18.04	500	Complies

Configuration of IEEE 802.11n Port 1 (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.44	35.60	500	Complies
159	5795 MHz	35.76	35.68	500	Complies


Configuration of IEEE 802.11n Port 2 (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.36	35.52	500	Complies
159	5795 MHz	35.20	35.68	500	Complies

Configuration of IEEE 802.11n Port 3 (40MHz)


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.36	35.52	500	Complies
159	5795 MHz	35.28	35.52	500	Complies

For Single Chain:
6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz

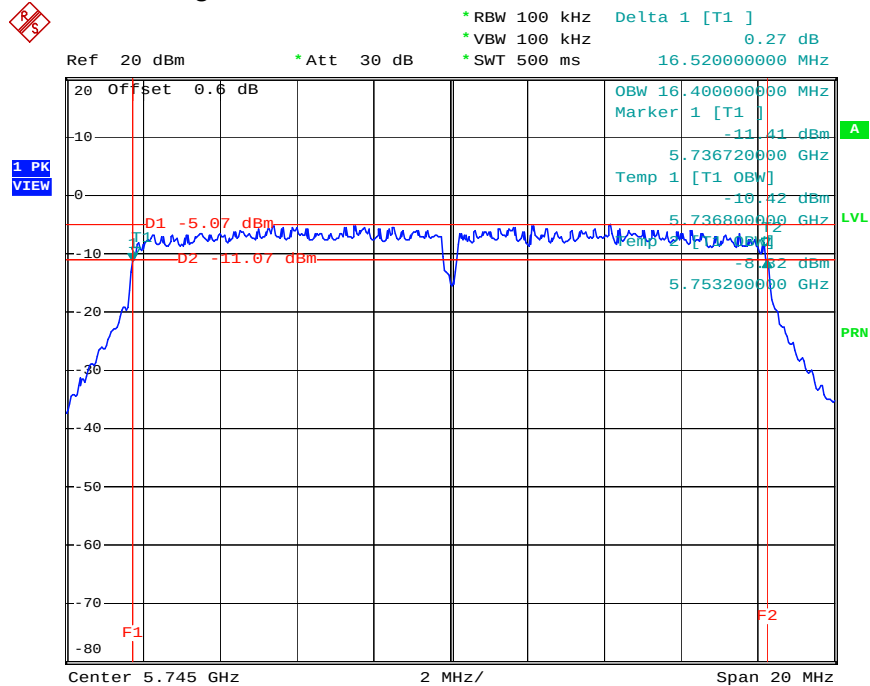


Date: 12.MAY.2011 18:14:01

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz

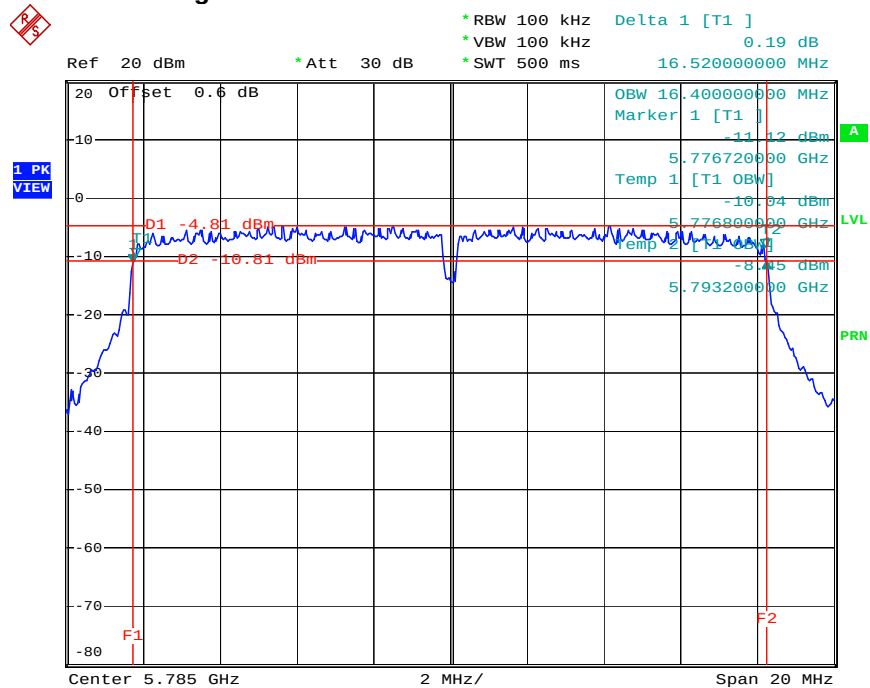

Date: 12.MAY.2011 18:21:30


6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz

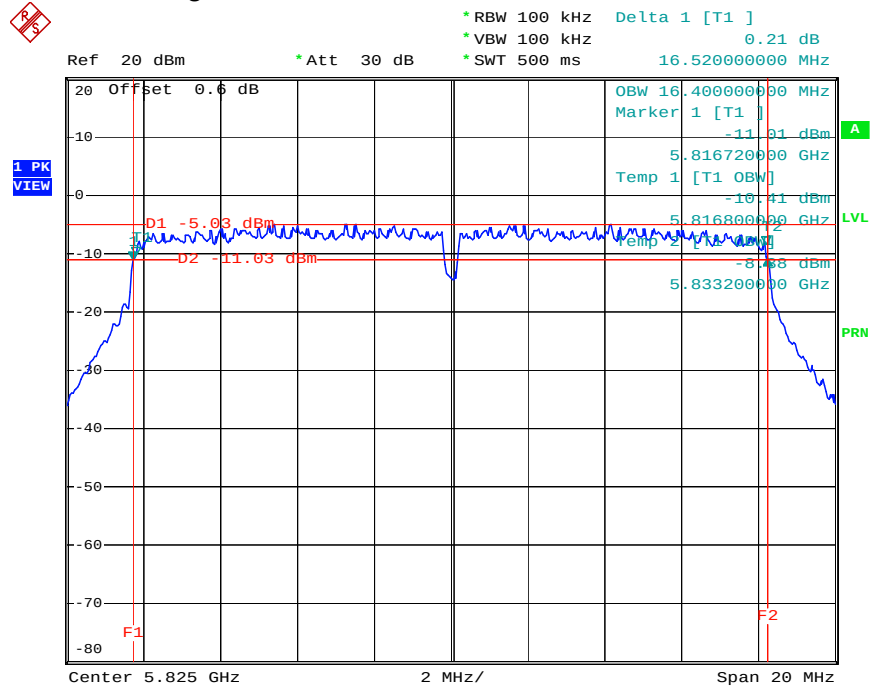

Date: 12.MAY.2011 18:24:47


For Three Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5745 MHz

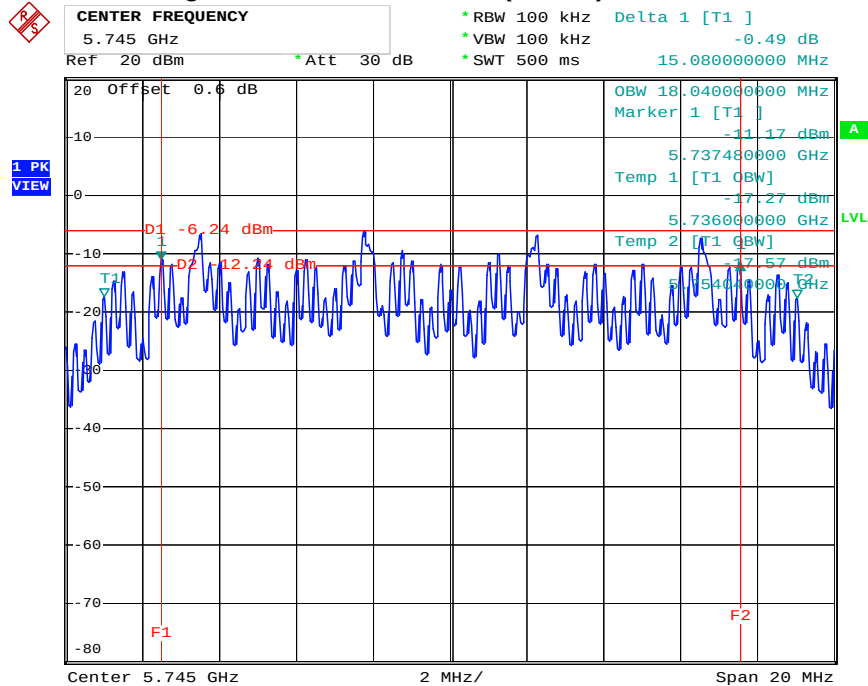


Date: 13.MAY.2011 20:17:01

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5785 MHz

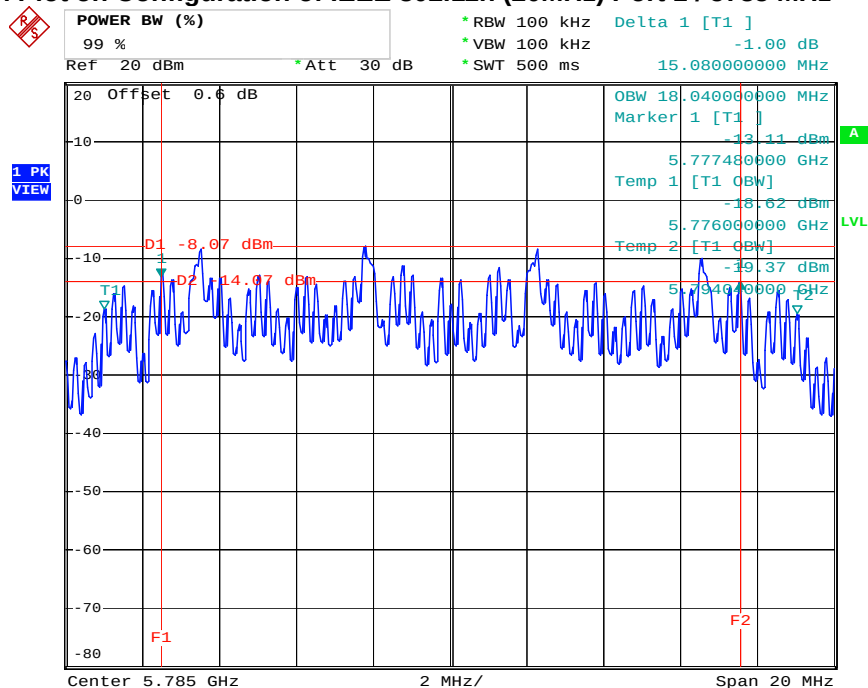


Date: 13.MAY.2011 20:20:34

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5825 MHz

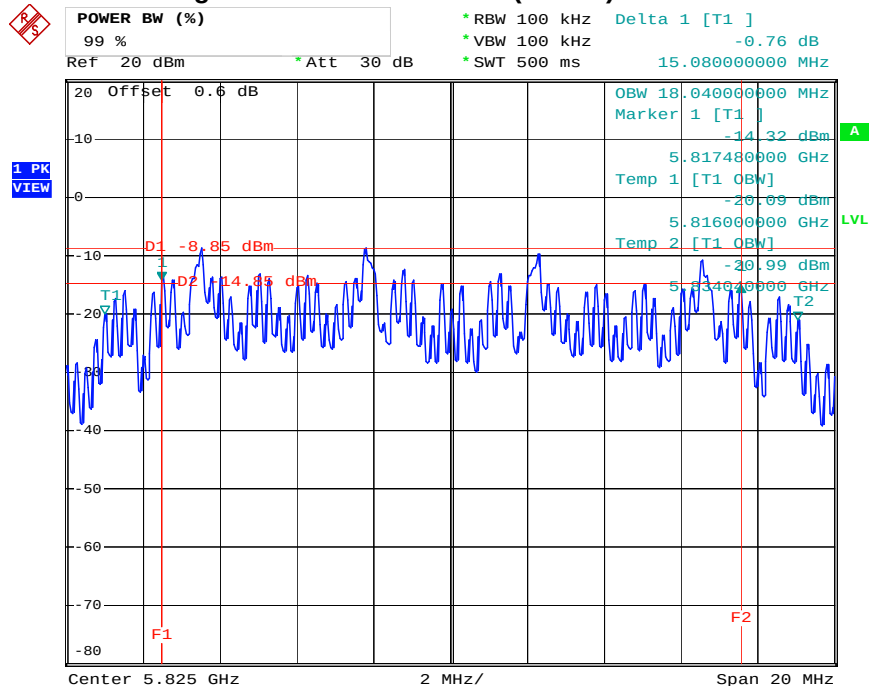


Date: 13.MAY.2011 20:22:49

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5745 MHz

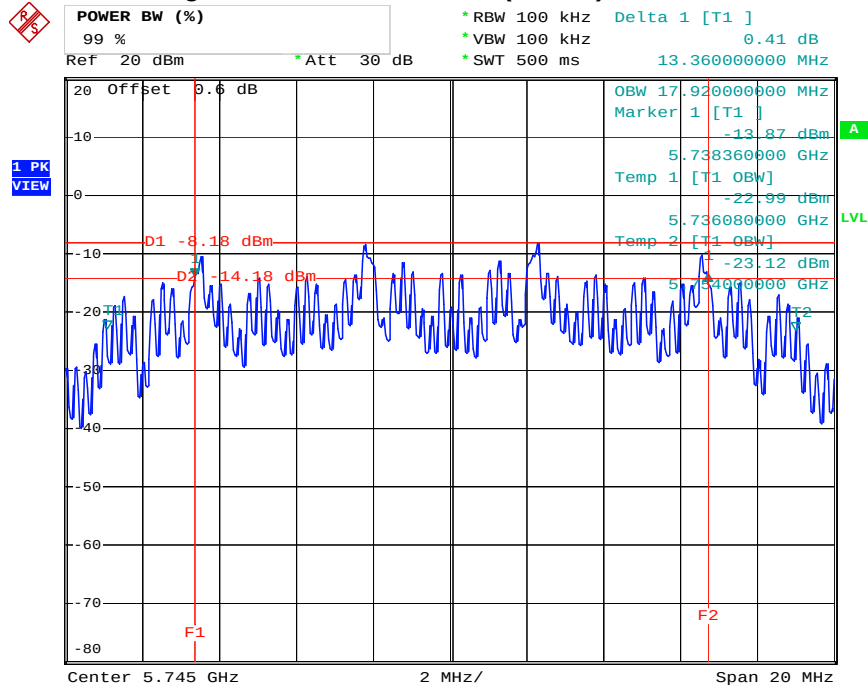


Date: 13.MAY.2011 20:26:05

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5785 MHz

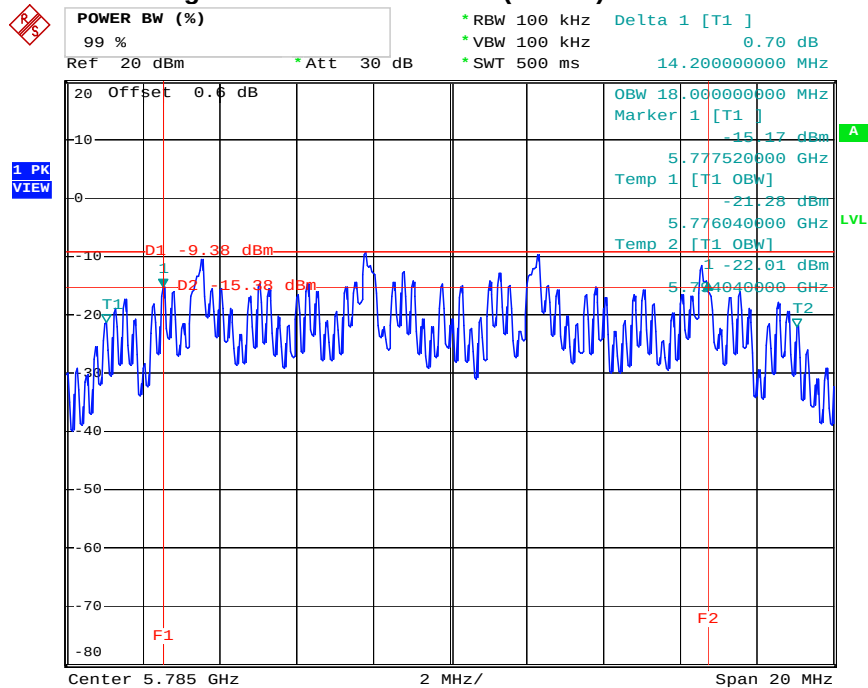


Date: 13.MAY.2011 20:29:04

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5825 MHz

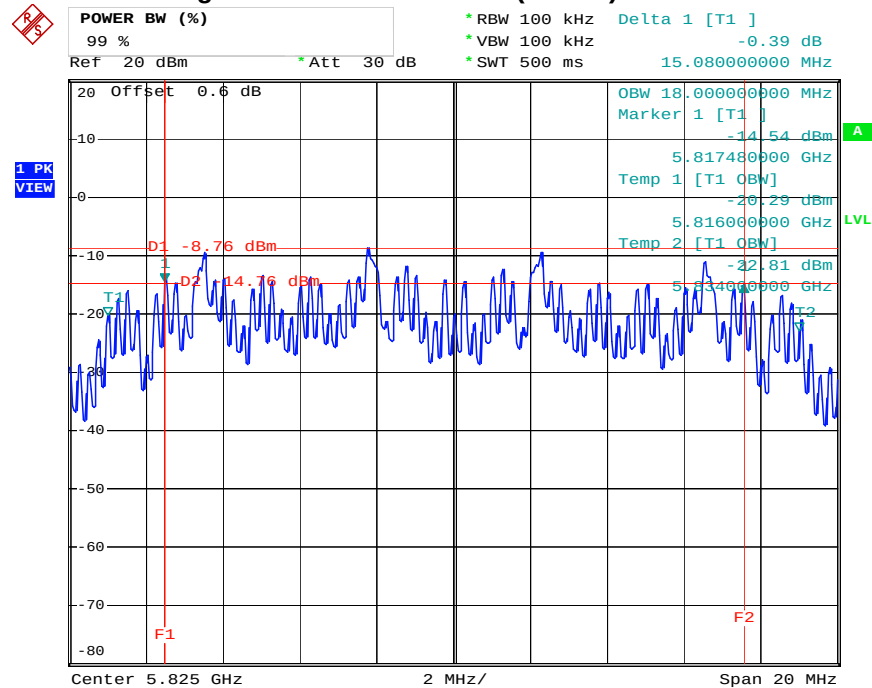


Date: 13.MAY.2011 20:32:43

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5745 MHz

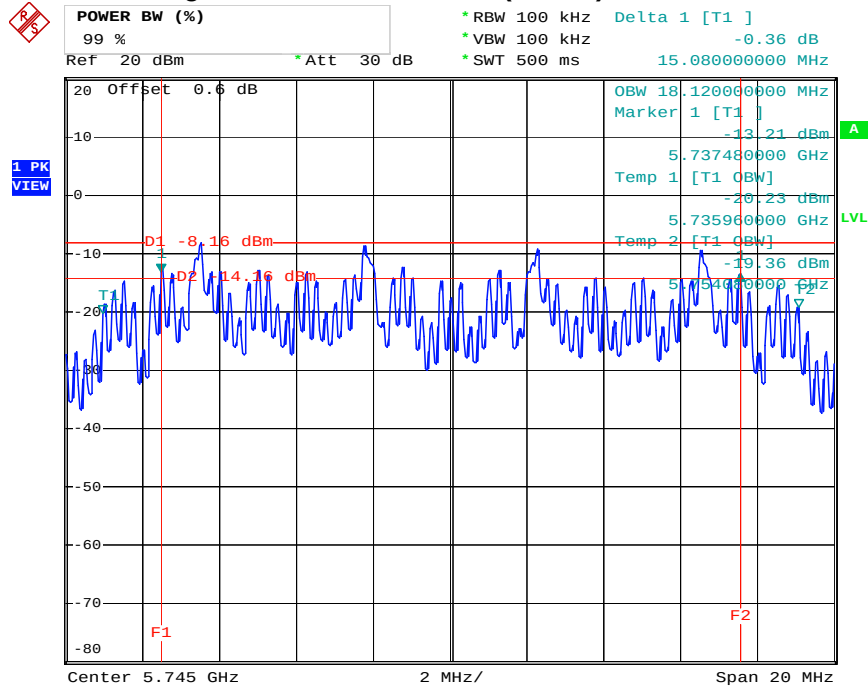


Date: 13.MAY.2011 20:38:06

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5785 MHz

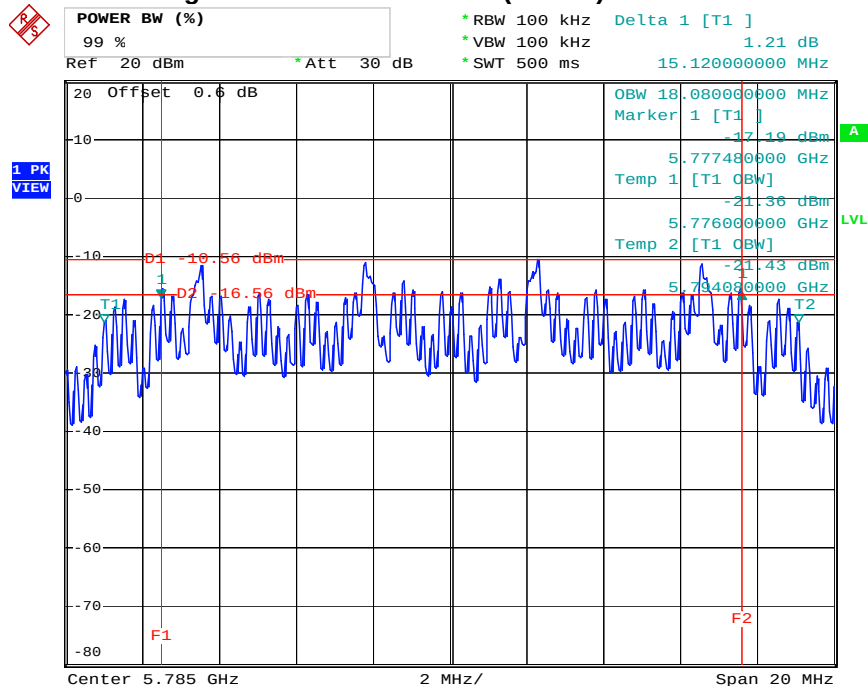

Date: 13.MAY.2011 20:40:42

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5825 MHz

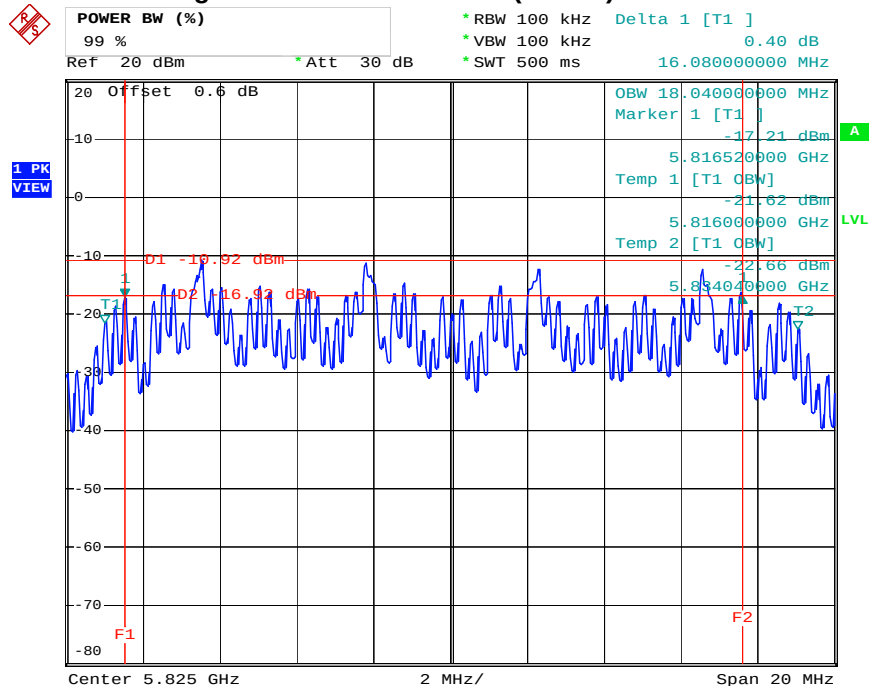

Date: 13.MAY.2011 20:42:47

POWER BW (%) 99 %
 Ref 20 dBm * Att 30 dB
 Delta 1 [T1] 0.56 dB
 * RBW 100 kHz
 * VBW 100 kHz
 * SWT 500 ms
 35.440000000 MHz

Offset 0.6 dB

OBW 35.600000000 MHz
 Marker 1 [T1] -14.07 dBm
 5.737080000 GHz
 Temp 1 [T1 OBW] -13.64 dBm
 5.737160000 GHz
 Temp 2 [T1 OBW] -14.21 dBm
 5.772760000 GHz

D1 -8.3 dBm
 D2 -14.3 dBm

F1 F2

Center 5.755 GHz 4 MHz/
 Span 40 MHz

POWER BW (%) 99 %

Ref 20 dBm

* Att 30 dB

* RBW 100 kHz

* VBW 100 kHz

* SWT 500 ms

Delta 1 [T1] 0.54 dB

35.760000000 MHz

Offset 0.6 dB

1 PK VIEW

Marker 1 [T1] -16.41 dBm

Temp 1 [T1 OBW] 5.777080000 GHz -16.61 dBm

Temp 2 [T1 OBW] 5.777160000 GHz -15.88 dBm

5.812840000 GHz

D1 -10.57 dBm

D2 -16.57 dBm

F1

F2


Center 5.795 GHz

4 MHz/

Span 40 MHz


FCC ID : NDD9566751028

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (40MHz) Port 2 / 5755 MHz

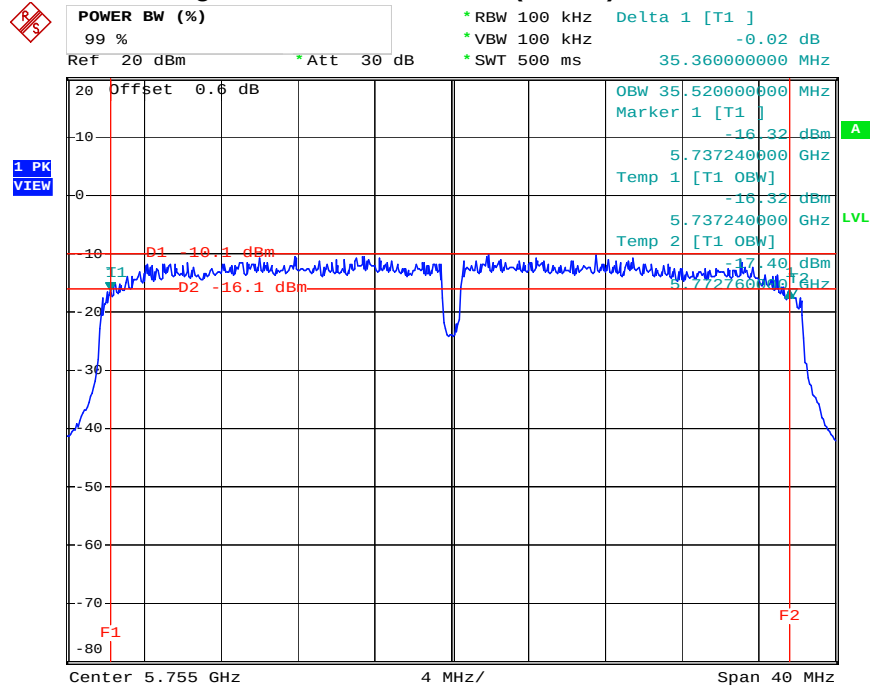


Date: 14.MAY.2011 15:05:56

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (40MHz) Port 2 / 5795 MHz

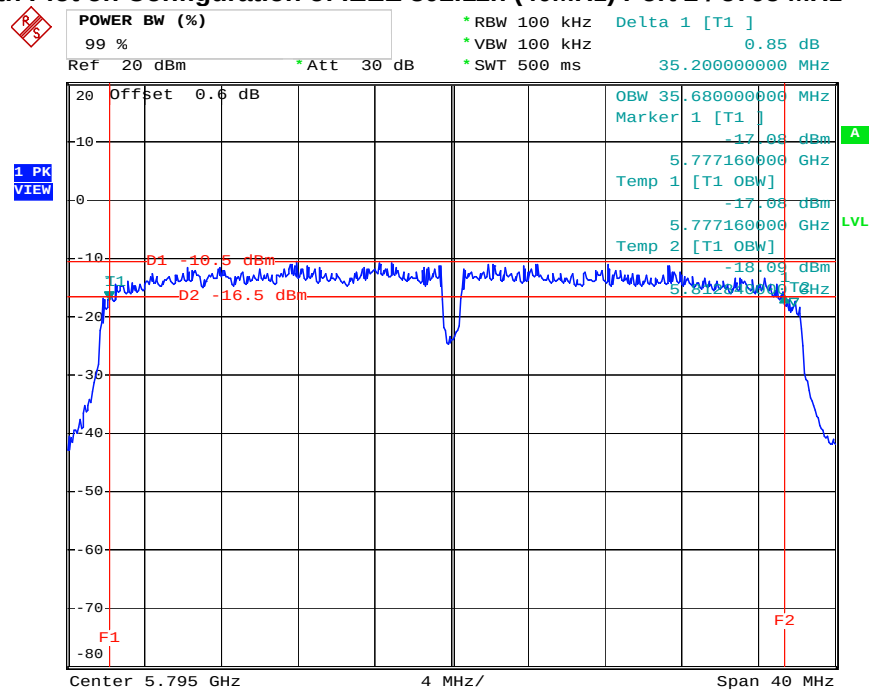


Date: 14.MAY.2011 15:09:11

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (40MHz) Port 3 / 5755 MHz

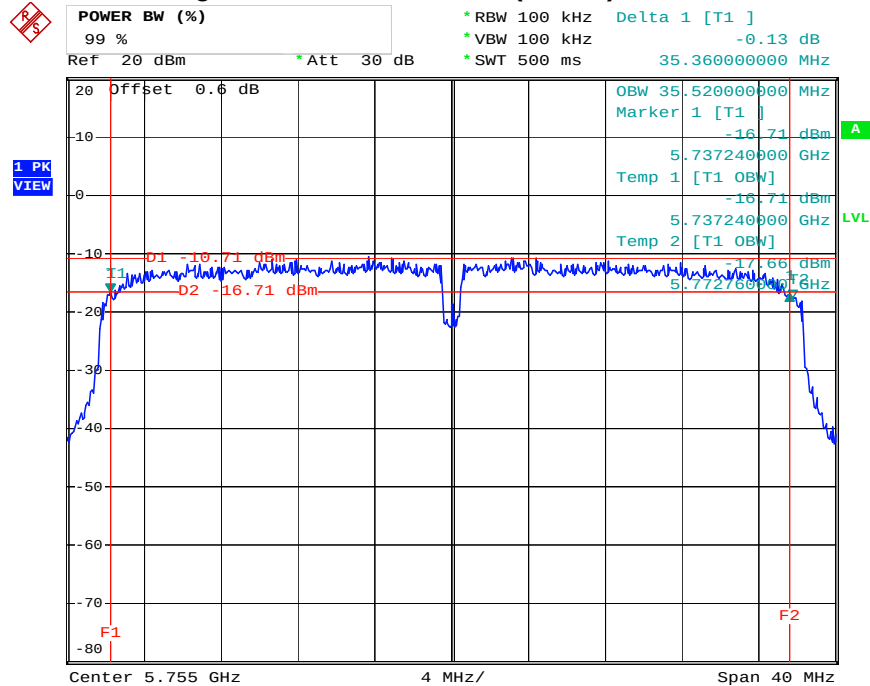

Date: 14.MAY.2011 15:13:17

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (40MHz) Port 3 / 5795 MHz

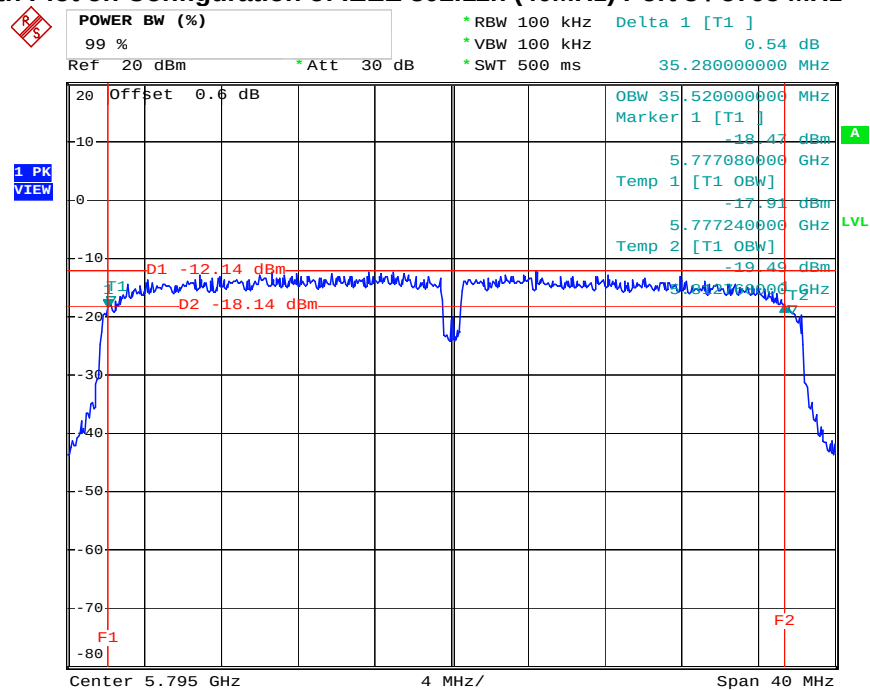

Date: 14.MAY.2011 15:16:13

3.5 Radiated Emissions Measurement

3.5.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

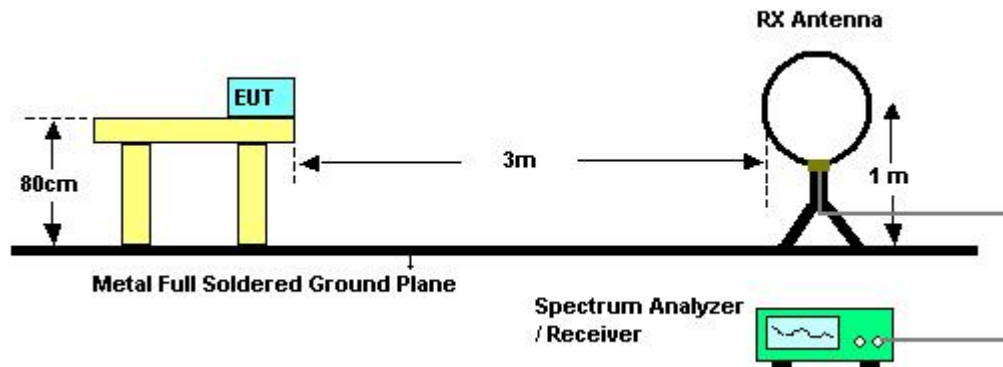

For radiated emissions above 30MHz

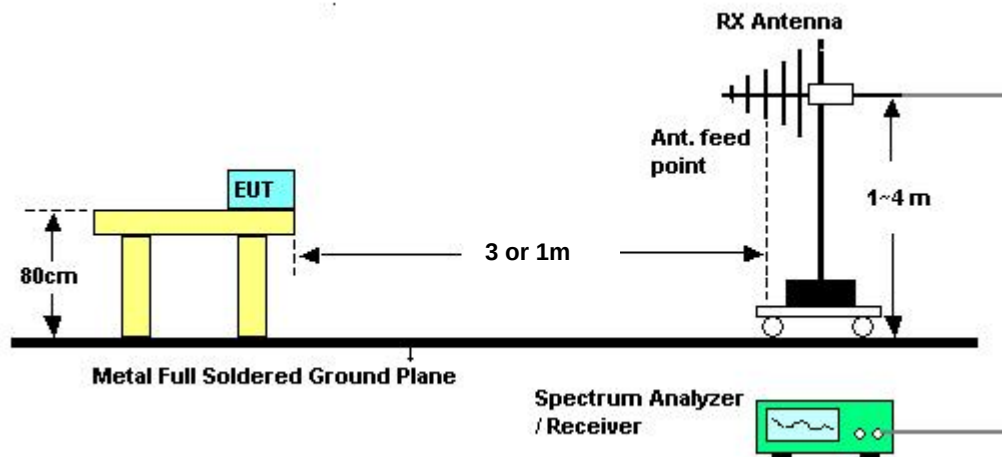

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Apr. 02, 2011	Test Site No.	03CH02-HY
Temperature	22℃	Humidity	52%
Test Engineer	Daniel		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Apr. 02, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	Normal Mode (Adapter 1)

Horizontal

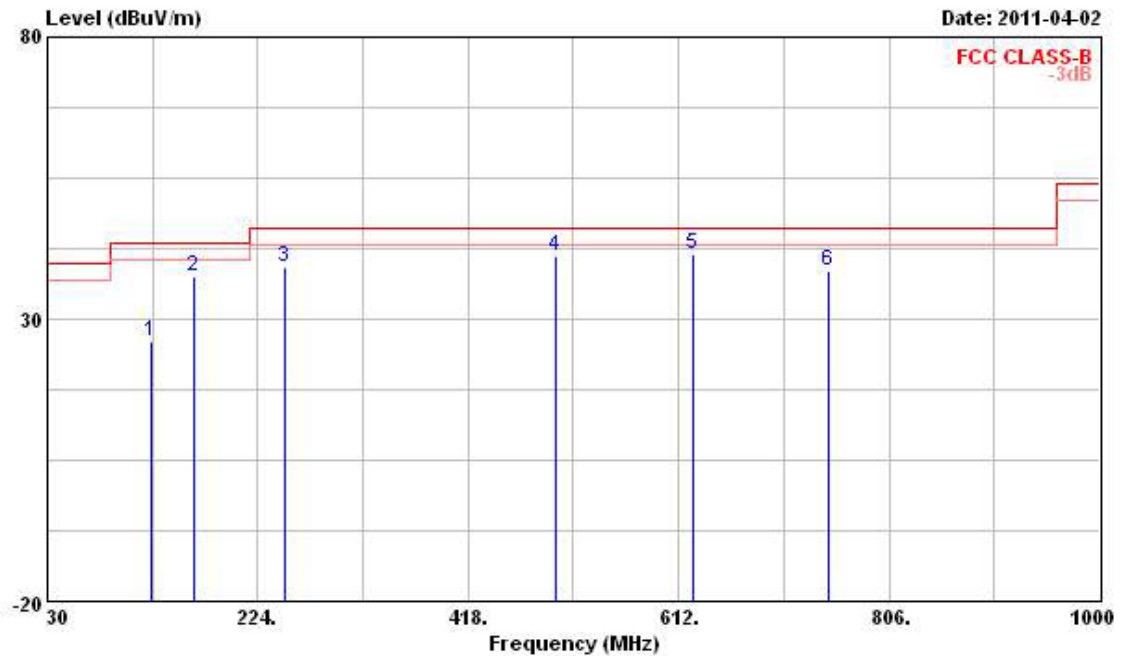

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	125.060	26.14	-17.36	43.50	38.67	13.18	1.82	27.53	Peak
2	164.830	37.66	-5.84	43.50	52.55	10.34	2.11	27.34	Peak
3	249.220	39.20	-6.80	46.00	50.37	12.97	2.68	26.82	Peak
4	498.510	41.05	-4.95	46.00	48.19	17.26	3.78	28.18	Peak
5	625.580	41.60	-4.40	46.00	45.75	19.84	4.14	28.13	Peak
6	749.740	38.39	-7.61	46.00	42.15	19.55	4.57	27.88	Peak

Vertical

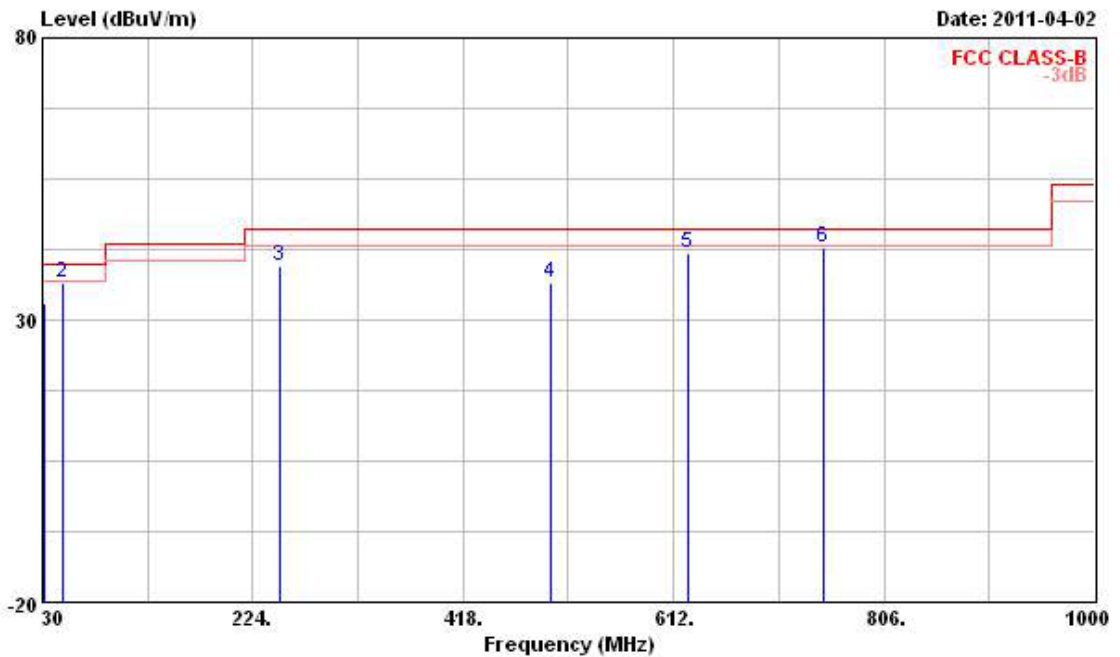

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	31.940	32.98	-7.02	40.00	44.58	15.48	0.78	27.86	Peak
2	48.430	36.42	-3.58	40.00	52.77	10.34	1.10	27.79	Peak
3	249.220	39.45	-6.55	46.00	50.62	12.97	2.68	26.82	Peak
4	498.510	36.42	-9.58	46.00	43.56	17.26	3.78	28.18	Peak
5	625.580	41.72	-4.28	46.00	45.87	19.84	4.14	28.13	Peak
6	749.740	42.99	-3.01	46.00	46.75	19.55	4.57	27.88	Peak


Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Apr. 02, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	Normal Mode (Adapter 2)

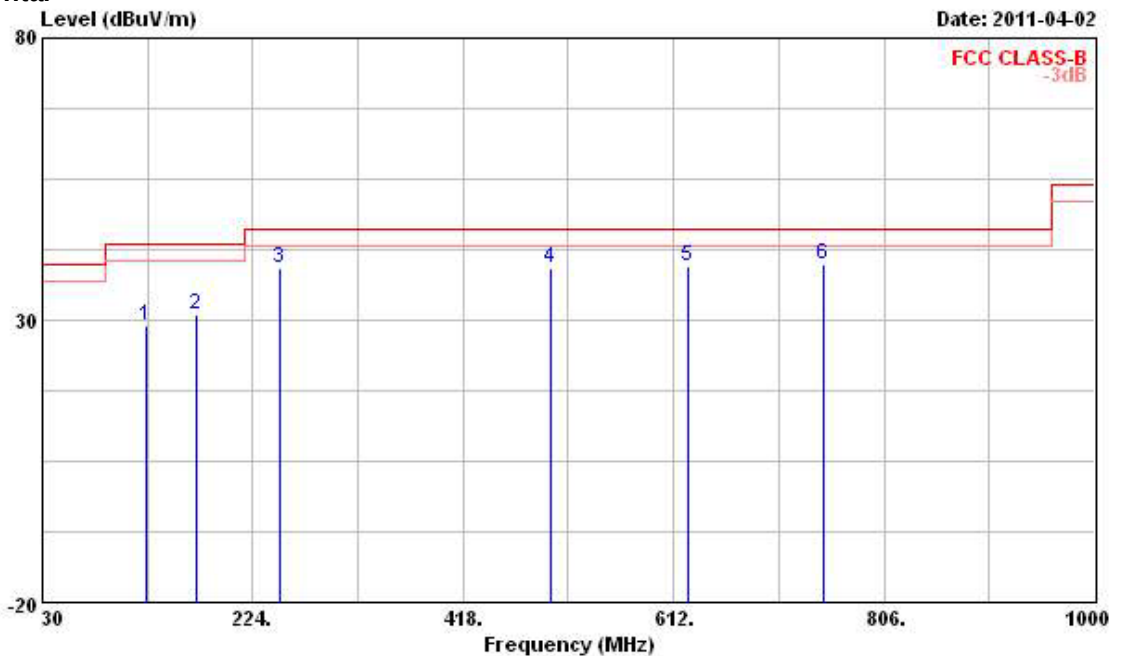Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	125.060	28.85	-14.65	43.50	41.38	13.18	1.82	27.53	Peak
2	171.620	31.01	-12.49	43.50	46.11	10.05	2.15	27.30	Peak
3	249.220	39.16	-6.84	46.00	50.33	12.97	2.68	26.82	Peak
4	498.510	39.05	-6.95	46.00	46.19	17.26	3.78	28.18	Peak
5	625.580	39.42	-6.58	46.00	43.57	19.84	4.14	28.13	Peak
6	749.740	39.76	-6.24	46.00	43.52	19.55	4.57	27.88	Peak

Vertical

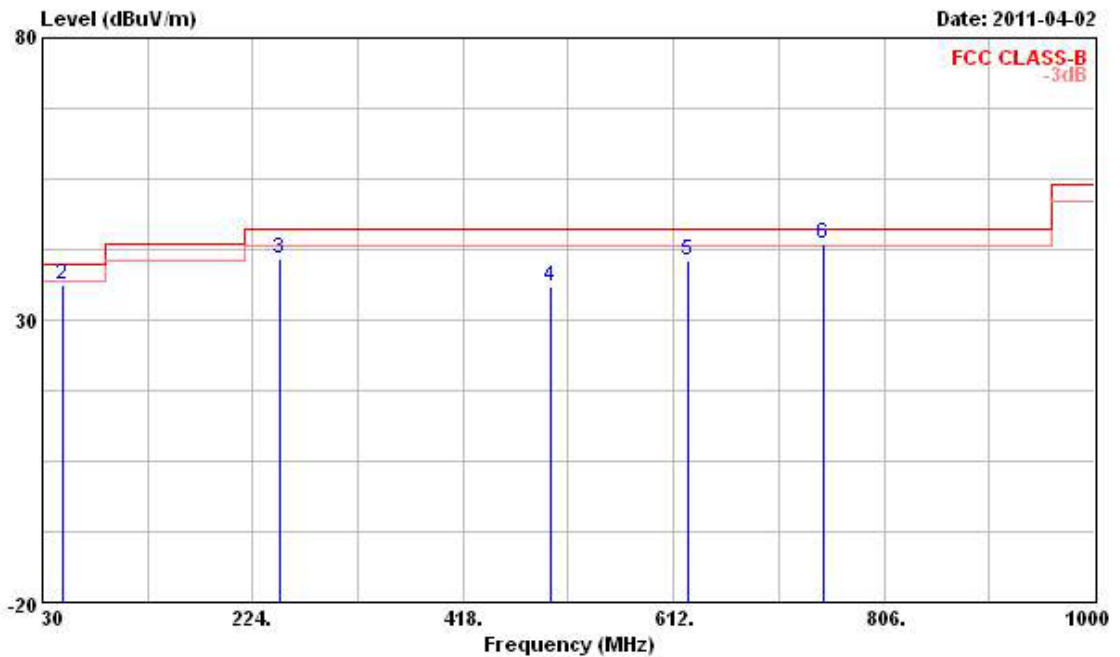

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	31.37	-8.63	40.00	42.31	16.22	0.72	27.88	Peak
2	48.430	36.10	-3.90	40.00	52.45	10.34	1.10	27.79	Peak
3	249.220	40.85	-5.15	46.00	52.02	12.97	2.68	26.82	Peak
4	498.510	35.77	-10.23	46.00	42.91	17.26	3.78	28.18	Peak
5	625.580	40.56	-5.44	46.00	44.71	19.84	4.14	28.13	Peak
6	749.740	43.45	-2.55	46.00	47.21	19.55	4.57	27.88	OP

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

For Single Chain:

Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11a Ch. 149


Horizontal

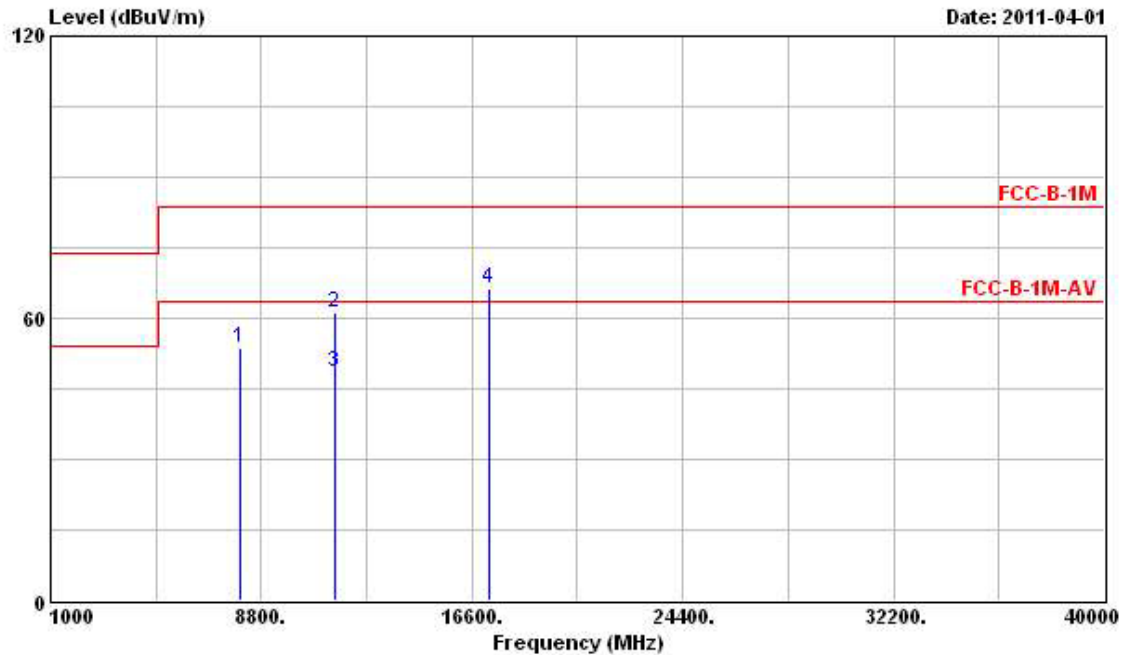

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8016.000	53.51			43.86	38.21	5.81	34.37	Peak
2	11490.000	61.13	-22.41	83.54	47.55	40.59	6.63	33.64	Peak
3	11490.000	48.65	-14.89	63.54	35.07	40.59	6.63	33.64	Average
4	17235.000	66.33			46.45	43.56	8.55	32.23	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

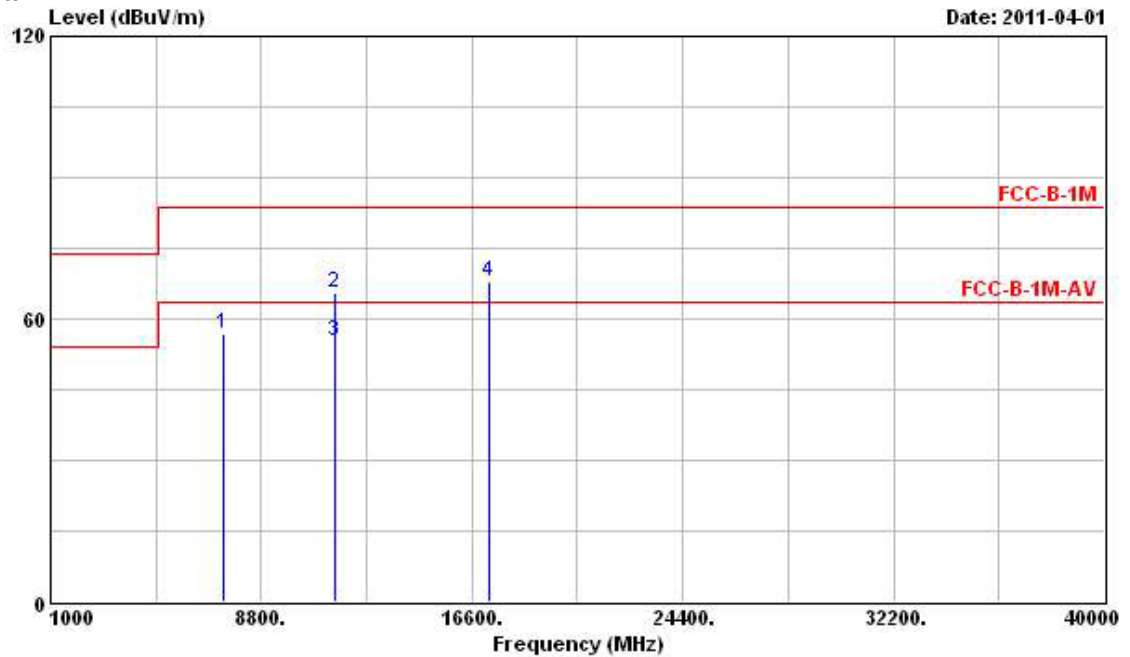

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7388.000	56.83	-6.71	63.54	47.59	37.88	5.65	34.29	PK
2	11490.000	65.54	-18.00	83.54	51.96	40.59	6.63	33.64	Peak
3	11490.000	55.28	-8.26	63.54	41.70	40.59	6.63	33.64	Average
4	17235.000	68.03			48.15	43.56	8.55	32.23	Peak

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11a Ch. 157

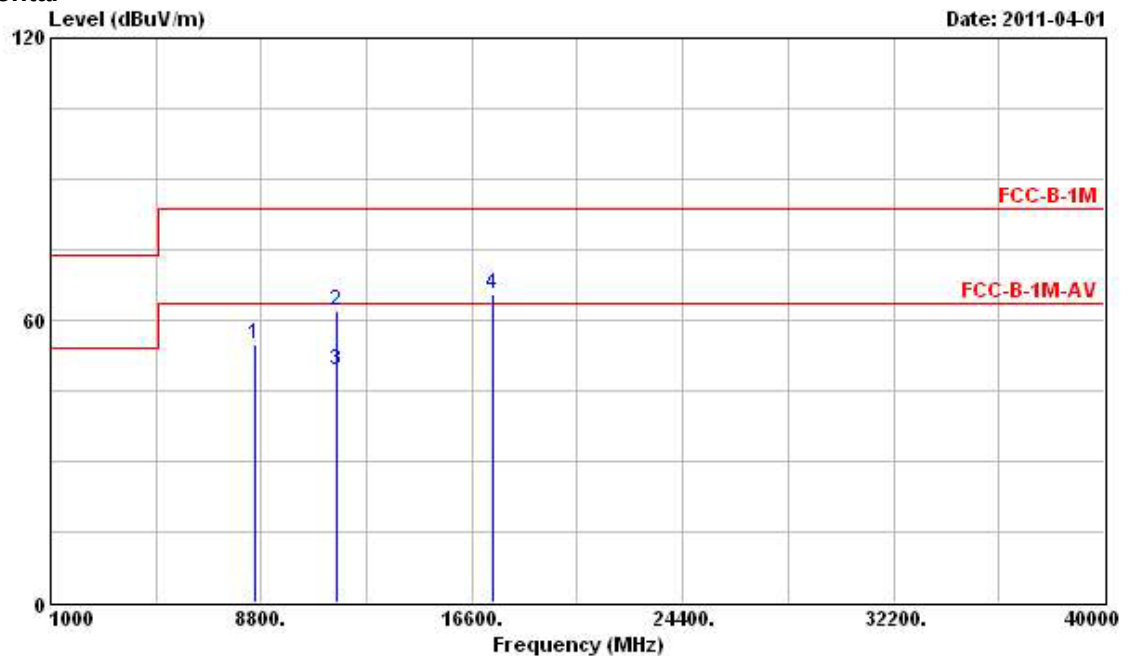Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8556.000	55.06			44.89	38.46	5.97	34.26	Peak
2	11570.000	61.89	-21.65	83.54	48.26	40.63	6.63	33.63	Peak
3	11570.000	49.36	-14.18	63.54	35.73	40.63	6.63	33.63	Average
4	17355.000	65.52			45.73	43.49	8.50	32.20	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

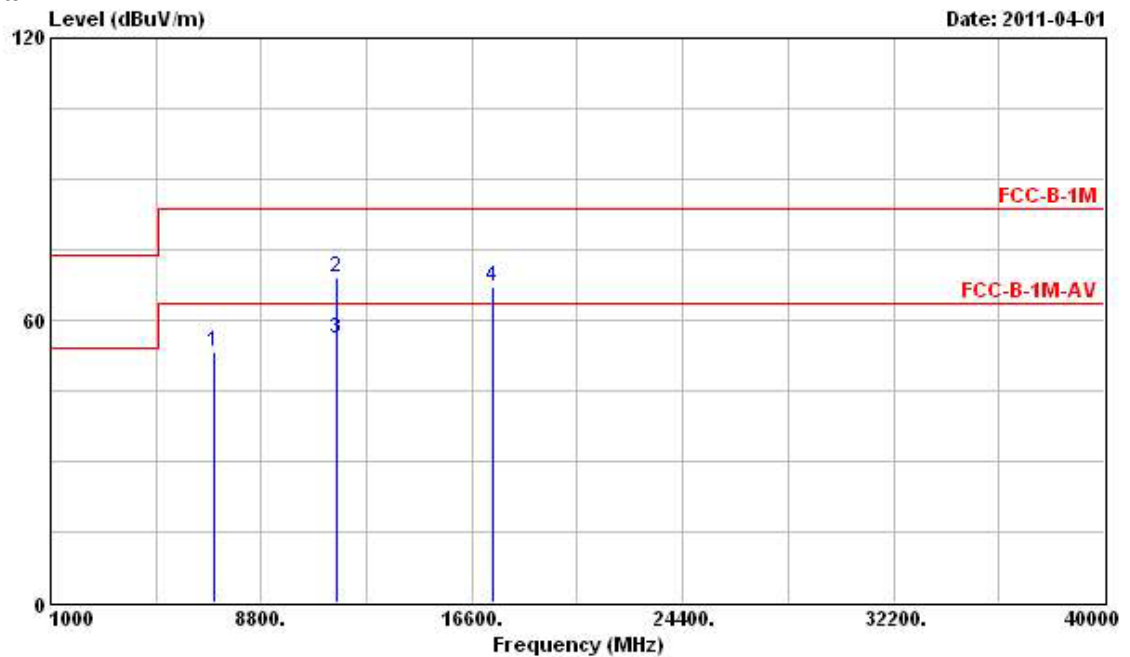

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7080.000	53.32			44.17	37.82	5.61	34.28	Peak
2	11570.000	68.91	-14.63	83.54	55.28	40.63	6.63	33.63	Peak
3	11570.000	56.15	-7.39	63.54	42.52	40.63	6.63	33.63	Average
4	17355.000	67.00			47.21	43.49	8.50	32.20	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11a Ch. 165

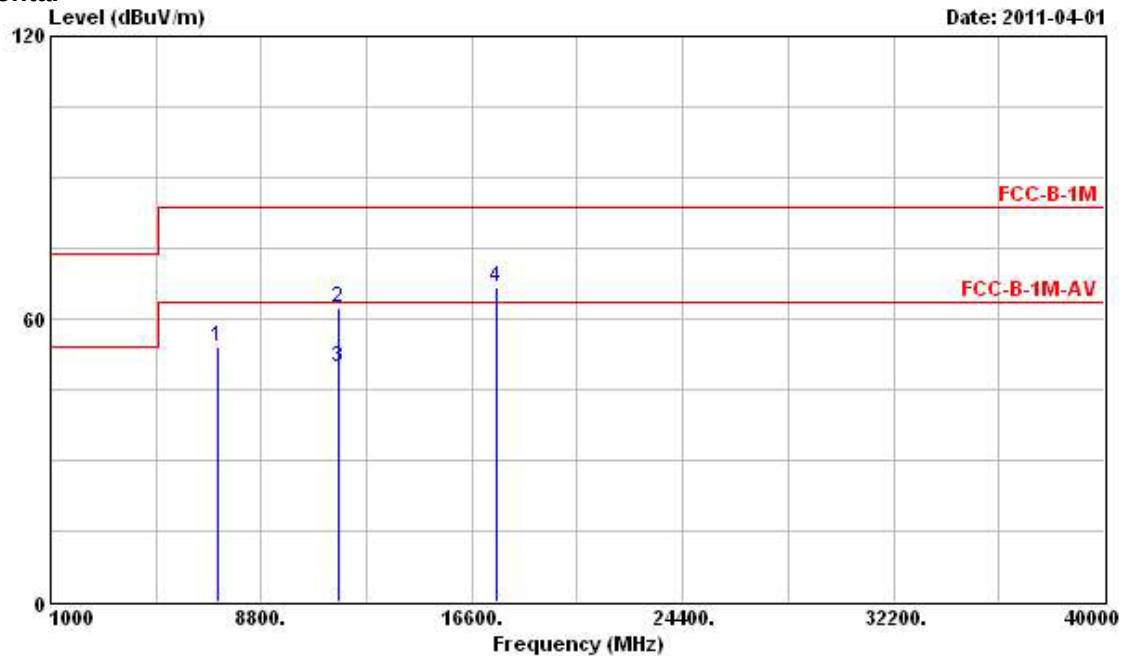Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7212.000	54.04			44.87	37.84	5.62	34.29	Peak
2	11650.000	62.19	-21.35	83.54	48.49	40.66	6.64	33.60	Peak
3	11650.000	49.61	-13.93	63.54	35.91	40.66	6.64	33.60	Average
4	17475.000	66.53			46.83	43.42	8.44	32.16	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

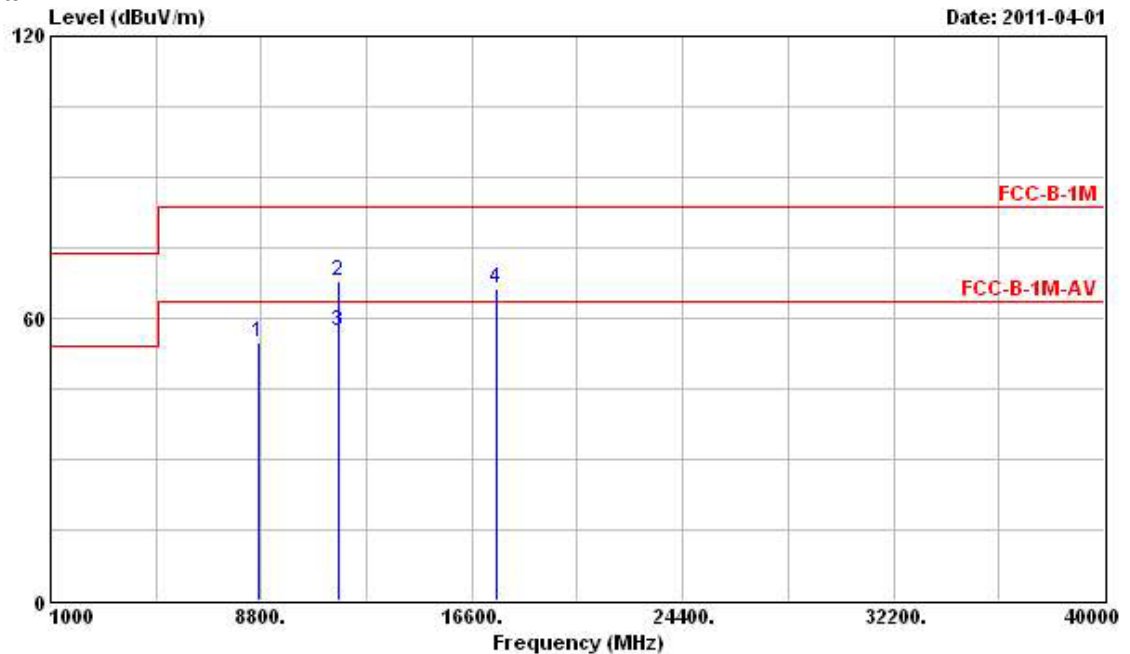


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8708.000	54.90			44.94	38.34	6.04	34.42	Peak
2	11650.000	67.96	-15.58	83.54	54.26	40.66	6.64	33.60	Peak
3	11650.000	57.29	-6.25	63.54	43.59	40.66	6.64	33.60	Average
4	17475.000	66.47			46.77	43.42	8.44	32.16	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

For Three Chain:

Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n Ch. 149 (20MHz)


Horizontal

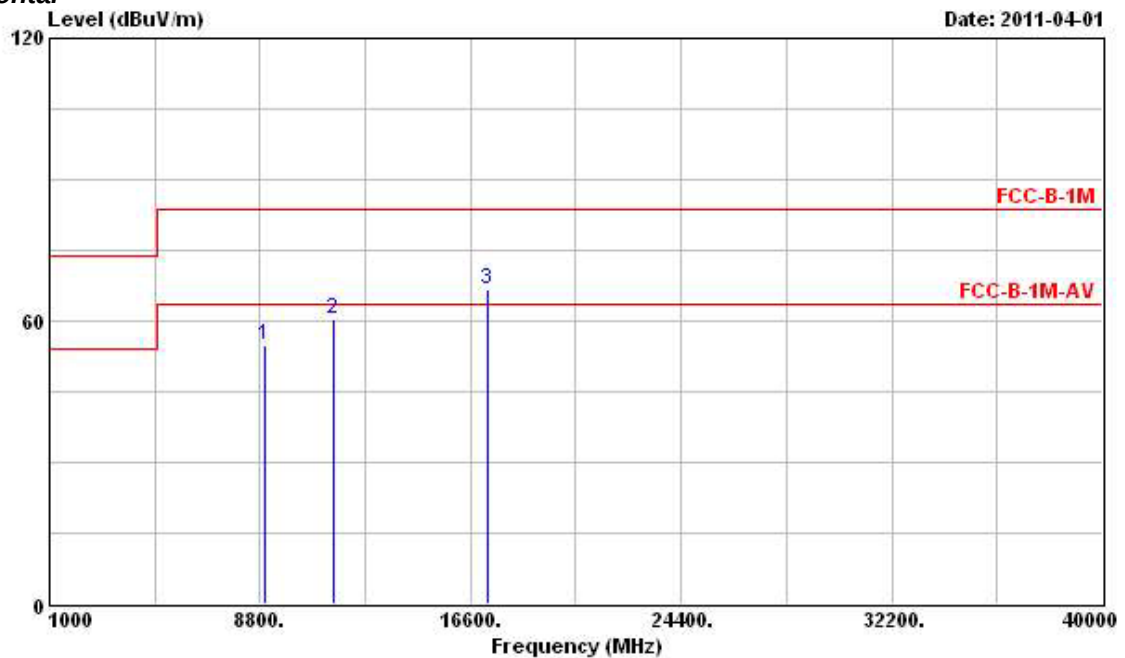

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8992.000	54.84			45.28	38.11	6.16	34.71	Peak
2	11490.000	60.49	-3.05	63.54	46.91	40.59	6.63	33.64	PK
3	17235.000	66.79			46.91	43.56	8.55	32.23	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

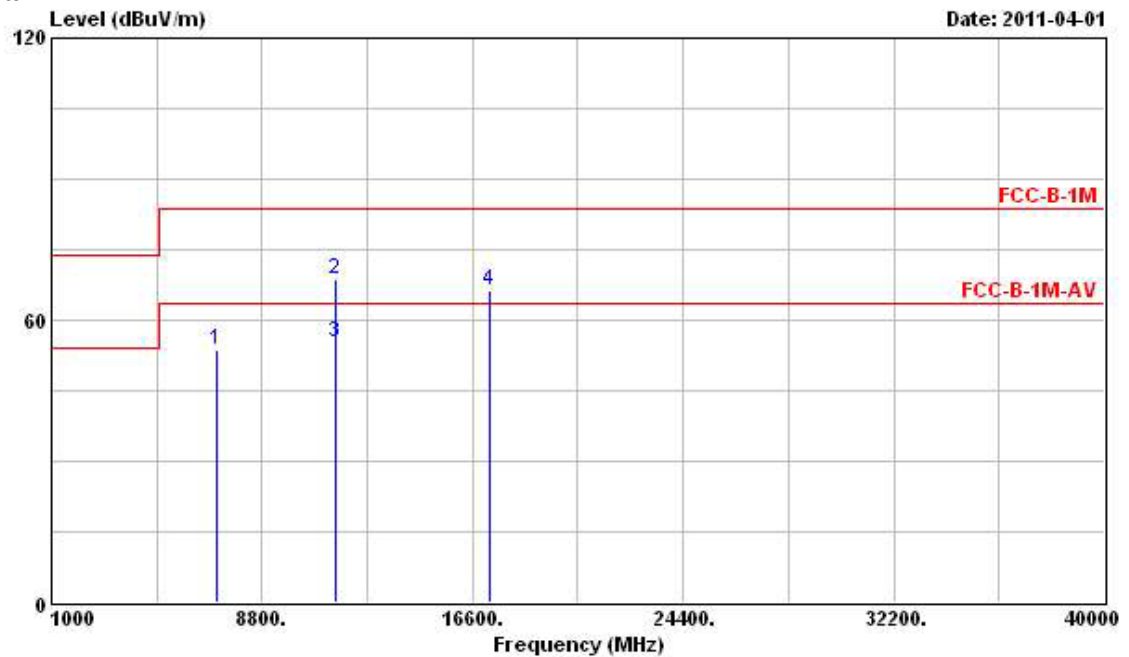

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	7144.000	53.78			44.61	37.83	5.62	34.28 Peak
2	11490.000	68.65	-14.89	83.54	55.07	40.59	6.63	33.64 Peak
3	11490.000	55.33	-8.21	63.54	41.75	40.59	6.63	33.64 Average
4	17235.000	66.49			46.61	43.56	8.55	32.23 Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n Ch. 157 (20MHz)

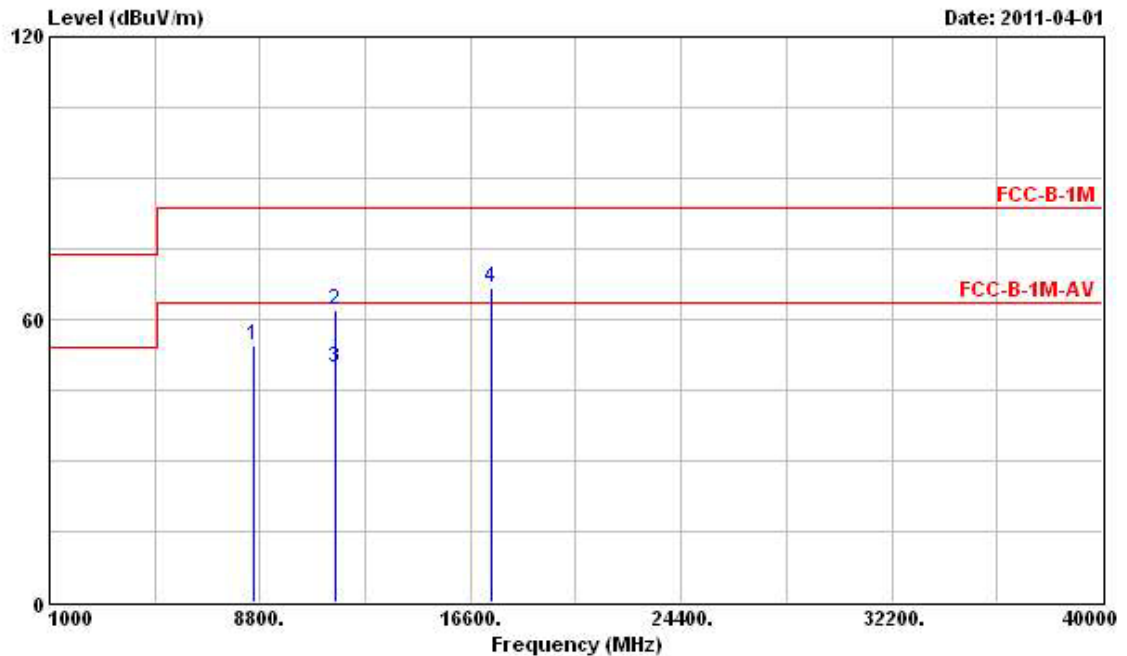Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	54.54			44.40	38.45	5.97	34.28	Peak
2	11570.000	62.02	-21.52	83.54	48.39	40.63	6.63	33.63	Peak
3	11570.000	49.66	-13.88	63.54	36.03	40.63	6.63	33.63	Average
4	17355.000	66.58			46.79	43.49	8.50	32.20	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

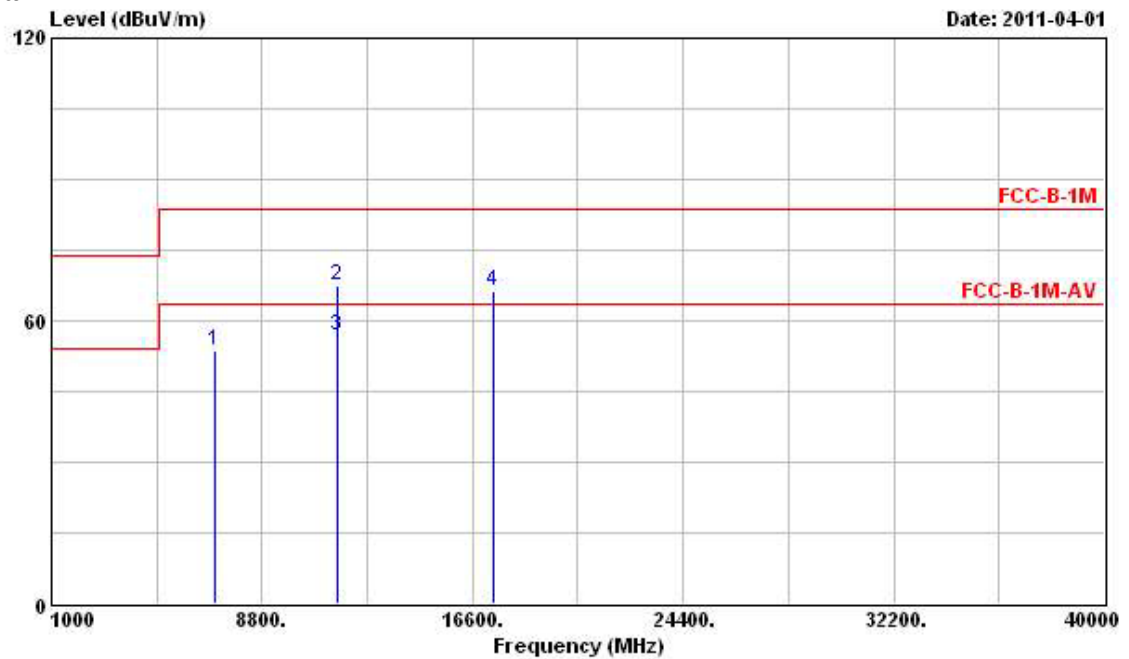

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7028.000	53.72			44.59	37.81	5.60	34.28
2	11570.000	67.53	-16.01	83.54	53.90	40.63	6.63	33.63
3	11570.000	56.90	-6.64	63.54	43.27	40.63	6.63	33.63
4	17355.000	66.42			46.63	43.49	8.50	32.20

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n Ch. 165 (20MHz)

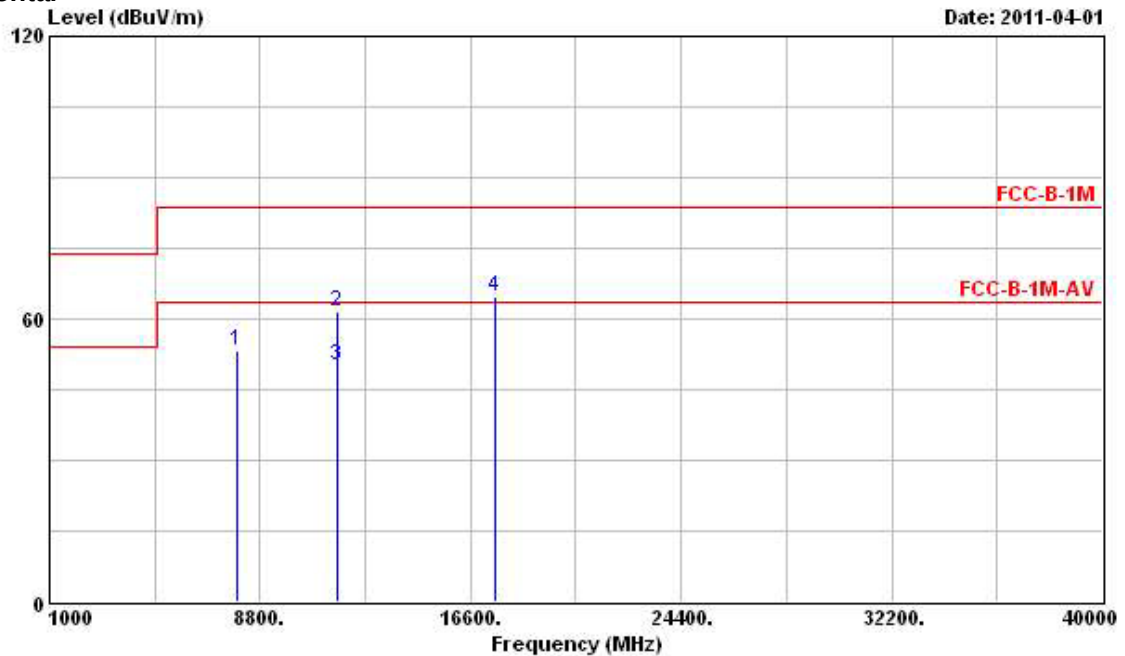Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7972.000	53.45			43.83	38.18	5.80	34.36	Peak
2	11650.000	61.70	-21.84	83.54	48.00	40.66	6.64	33.60	Peak
3	11650.000	50.28	-13.26	63.54	36.58	40.66	6.64	33.60	Average
4	17475.000	64.93			45.23	43.42	8.44	32.16	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

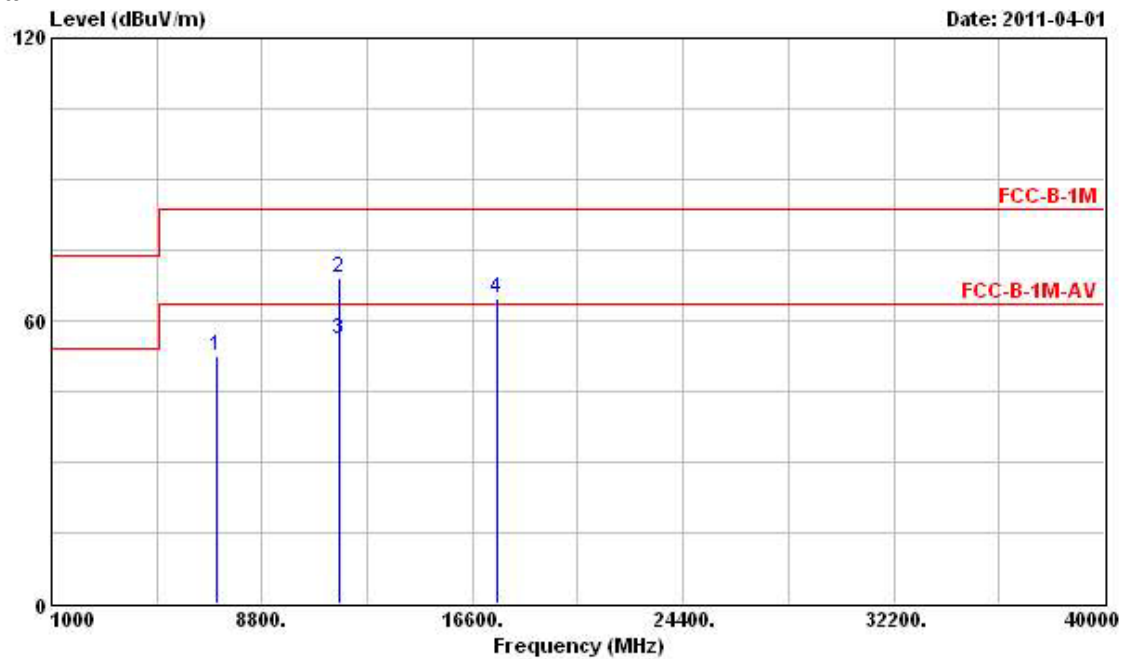

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7156.000	52.52			43.35	37.83	5.62	34.28	Peak
2	11650.000	68.93	-14.61	83.54	55.23	40.66	6.64	33.60	Peak
3	11650.000	56.22	-7.32	63.54	42.52	40.66	6.64	33.60	Average
4	17475.000	64.78			45.08	43.42	8.44	32.16	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n Ch. 151 (40MHz)

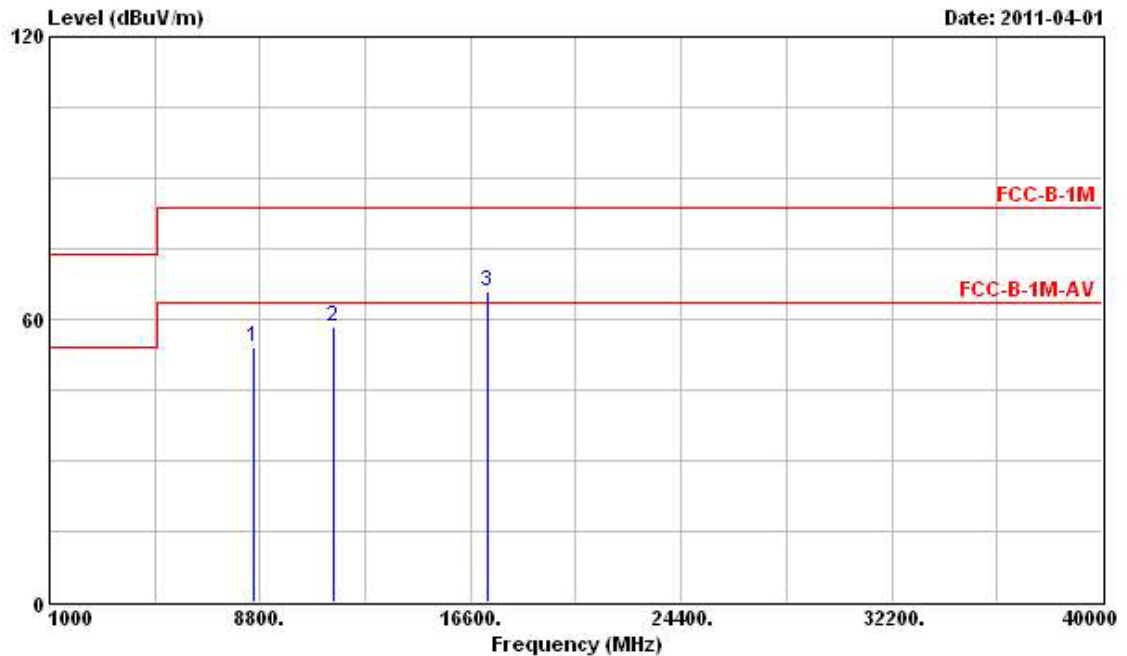Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8580.000	54.00			43.88	38.43	5.97	34.28	Peak
2	11510.000	58.44	-5.10	63.54	44.87	40.60	6.63	33.66	PK
3	17265.000	65.85			46.00	43.54	8.54	32.23	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

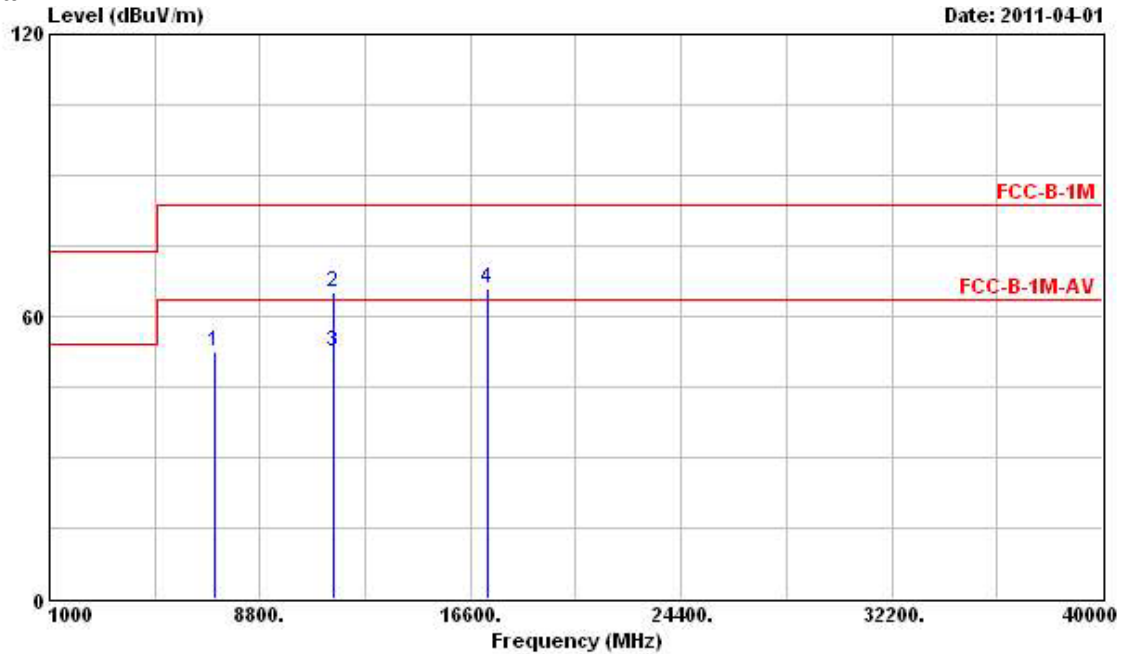

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7128.000	52.65	-12.36	65.01	43.50	37.82	5.61	34.28	Peak
2	11510.000	65.18	-18.36	83.54	51.61	40.60	6.63	33.66	Peak
3	11510.000	52.33	-11.21	63.54	38.76	40.60	6.63	33.66	Average
4	17265.000	65.90			46.05	43.54	8.54	32.23	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n Ch. 159 (40MHz)

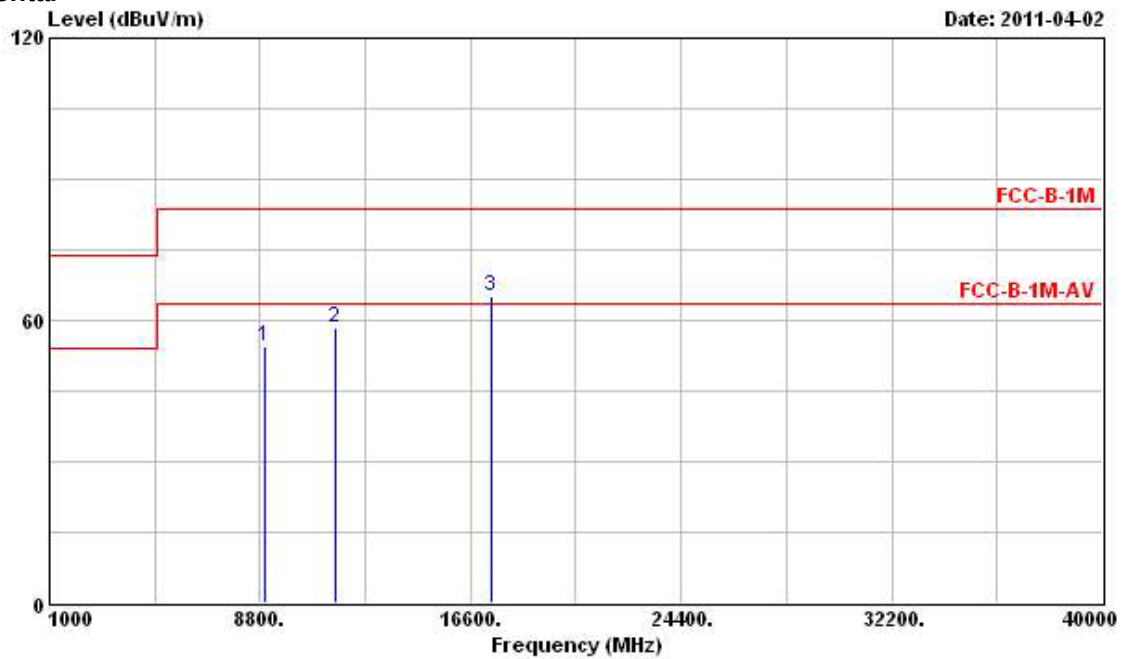Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	9000.000	54.45	-9.09	63.54	44.93	38.10	6.16	34.74	PK	---	---
2	11590.000	58.57	-4.97	63.54	44.94	40.63	6.63	33.63	PK	---	---
3	17385.000	65.27			45.50	43.47	8.48	32.18	Peak	---	---

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

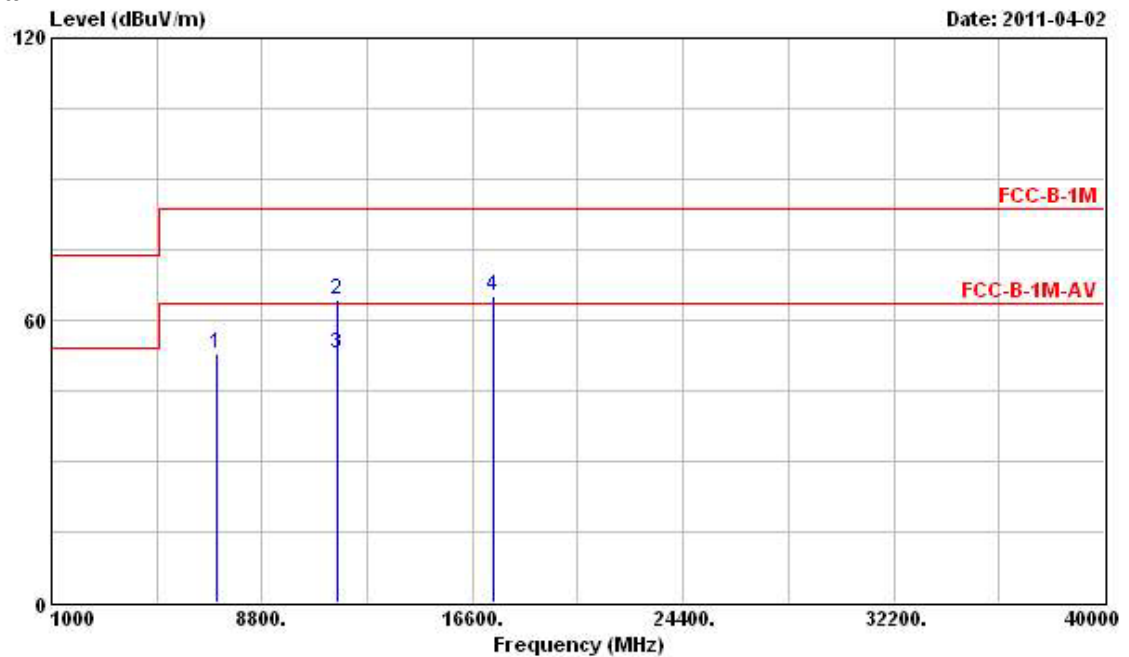

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7152.000	53.01			43.84	37.83	5.62	34.28	Peak
2	11590.000	64.39	-19.15	83.54	50.76	40.63	6.63	33.63	Peak
3	11590.000	52.80	-10.74	63.54	39.17	40.63	6.63	33.63	Average
4	17385.000	65.19			45.42	43.47	8.48	32.18	Peak

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11a Ch. 149, 157, 165

Channel 149

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
2 @ 5740.090	121.02			78.96	36.99	5.07	0.00	Average
2 @ 5740.930	131.50			89.44	36.99	5.07	0.00	Peak

The item 2 is Fundamental Emissions.

Channel 157

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5709.180	68.66			26.67	36.95	5.04	0.00	Average
2 @ 5780.580	120.09			77.97	37.03	5.09	0.00	Average
3 @ 5862.180	64.91			22.65	37.13	5.13	0.00	Average
1 @ 5709.180	81.92			39.93	36.95	5.04	0.00	Peak
2 @ 5779.390	130.35			88.23	37.03	5.09	0.00	Peak
3 @ 5861.670	78.23			35.97	37.13	5.13	0.00	Peak

The item 2 is fundamental emissions and the items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 165

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5826.610	118.44			76.24	37.09	5.11	0.00	Average
2 @ 5851.250	68.65			26.43	37.11	5.11	0.00	Average
1 @ 5821.050	128.97			86.77	37.09	5.11	0.00	Peak
2 @ 5850.310	87.83			45.61	37.11	5.11	0.00	Peak

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Three Chain:

Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n (20MHz) Ch. 149, 157, 165

Channel 149

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
2 @ 5740.580	118.95			76.89	36.99	5.07	0.00	Average
2 @ 5740.650	131.23			89.17	36.99	5.07	0.00	Peak

The item 2 is Fundamental Emissions.

Channel 157

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5709.860	68.14			26.15	36.95	5.04	0.00	Average
2 @ 5783.300	119.22			77.10	37.03	5.09	0.00	Average
3 @ 5860.310	65.75			23.49	37.13	5.13	0.00	Average
1 5707.140	80.28			38.29	36.95	5.04	0.00	Peak
2 @ 5780.580	130.97			88.85	37.03	5.09	0.00	Peak
3 5860.310	78.92			36.66	37.13	5.13	0.00	Peak

The item 2 is fundamental emissions and the items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 165

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5826.830	118.53			76.33	37.09	5.11	0.00	Average
2 X 5850.000	69.71			27.49	37.11	5.11	0.00	Average
1 @ 5823.310	129.71			87.51	37.09	5.11	0.00	Peak
2 X 5850.000	89.16			46.94	37.11	5.11	0.00	Peak

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Final Test Date	Apr. 01, 2011	Test Site No.	03CH02-HY
Temperature	22°C	Humidity	52%
Test Engineer	Daniel	Configuration	802.11n (40MHz) Ch. 151, 159

Channel 151

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5725.000	85.86			43.85	36.97	5.04	0.00	Average
2 @ 5751.900	116.02			73.94	37.01	5.07	0.00	Average
1 @ 5723.500	100.64			58.63	36.97	5.04	0.00	Peak
2 @ 5765.800	127.24			85.16	37.01	5.07	0.00	Peak

The item 2 is fundamental emissions and the item 1 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 159

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5784.200	116.23			74.11	37.03	5.09	0.00	Average
2 @ 5850.000	65.68			23.46	37.11	5.11	0.00	Average
1 @ 5790.600	127.29			85.15	37.05	5.09	0.00	Peak
2 @ 5850.200	81.17			38.95	37.11	5.11	0.00	Peak

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

Final Test Date	May 14, 2011	Test Site No.	TH01-HY
Temperature	26°C	Humidity	62%
Test Engineer	Ian	Configurations	802.11a/n


For Single Chain:

Low Band Edge Plot on Configuration of IEEE 802.11a / 5745 MHz

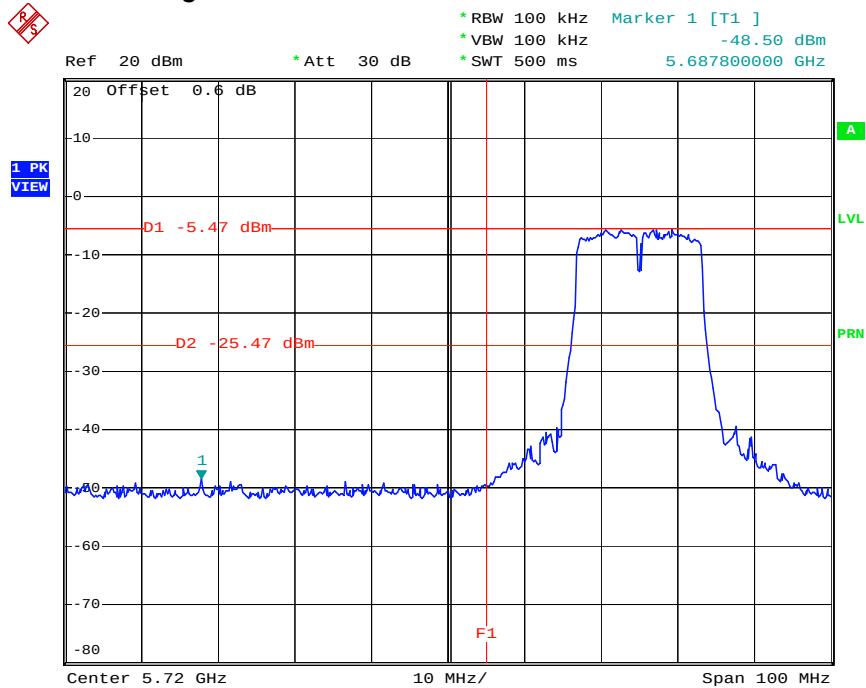

Date: 12.MAY.2011 18:15:23


High Band Edge Plot on Configuration of IEEE 802.11a / 5825 MHz

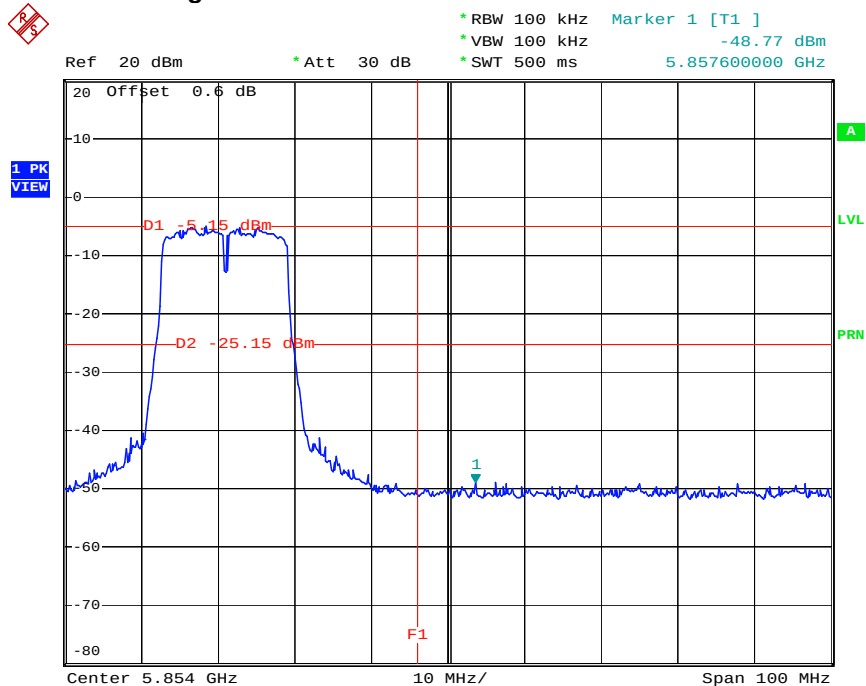

Date: 12.MAY.2011 18:26:11


For Three Chain:

Low Band Edge Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5745 MHz

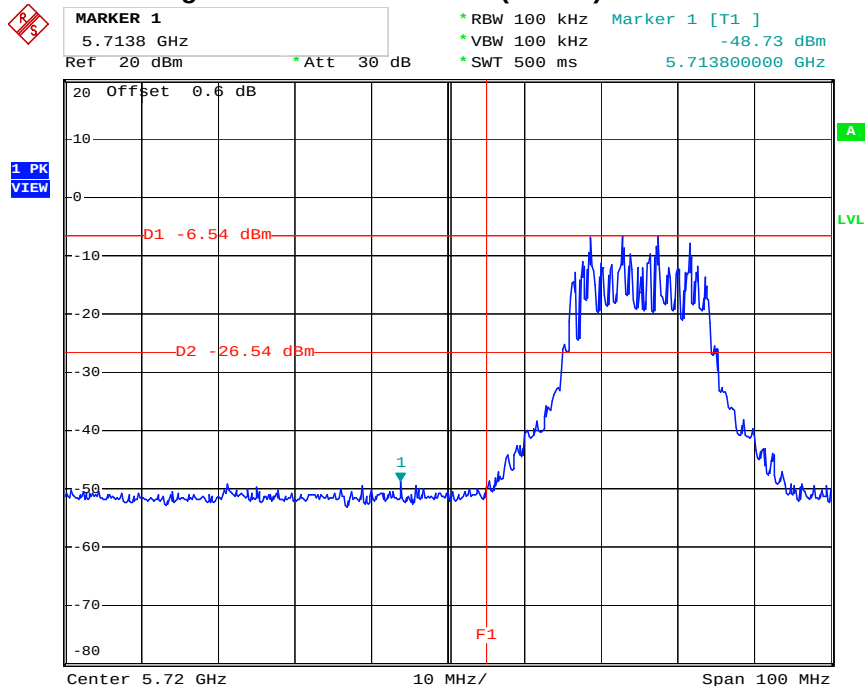


Date: 13.MAY.2011 20:17:54

High Band Edge Plot on Configuration of IEEE 802.11n (20MHz) Port 1 / 5825 MHz

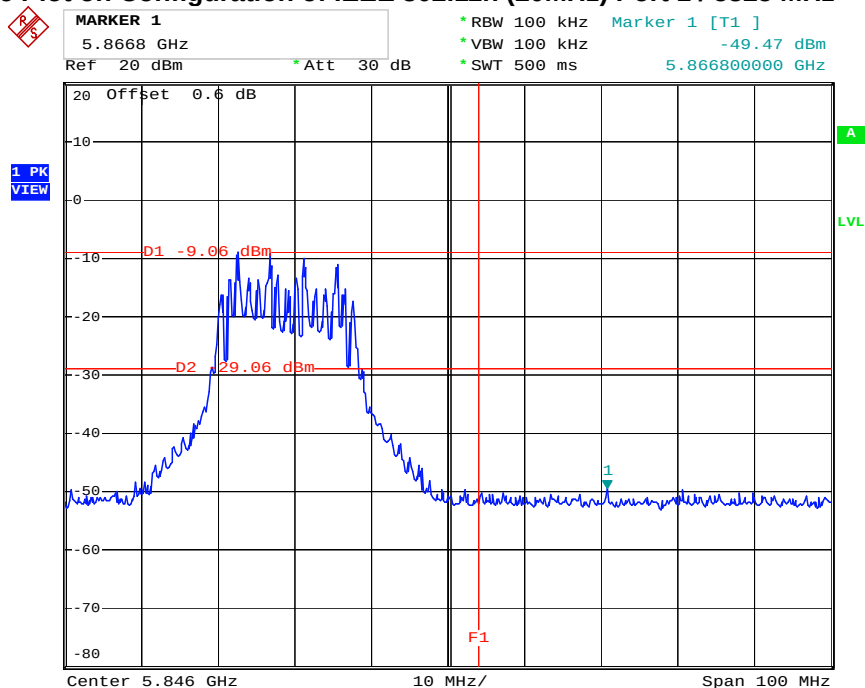


Date: 13.MAY.2011 20:23:37

Low Band Edge Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5745 MHz

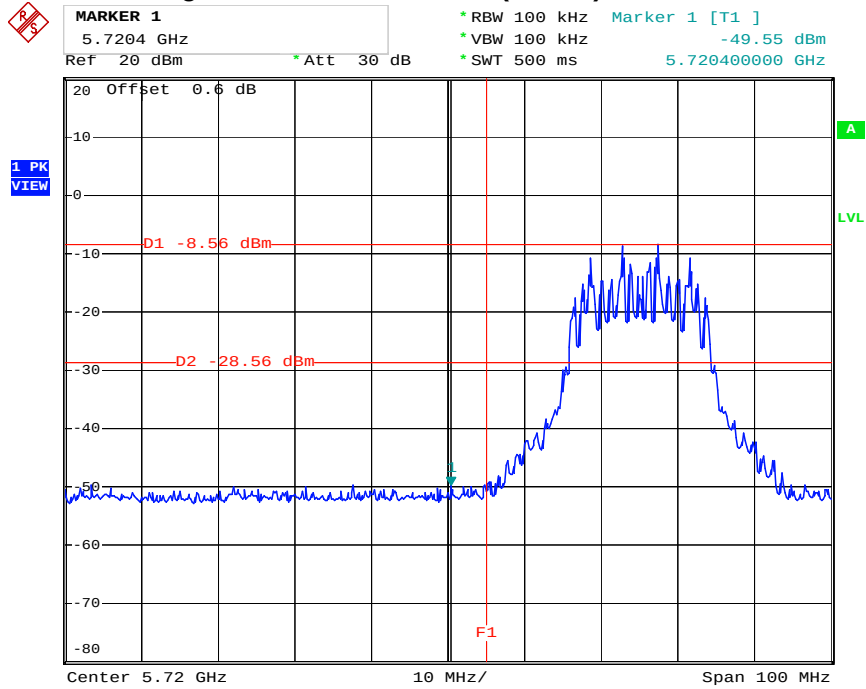


Date: 13.MAY.2011 20:26:57

High Band Edge Plot on Configuration of IEEE 802.11n (20MHz) Port 2 / 5825 MHz

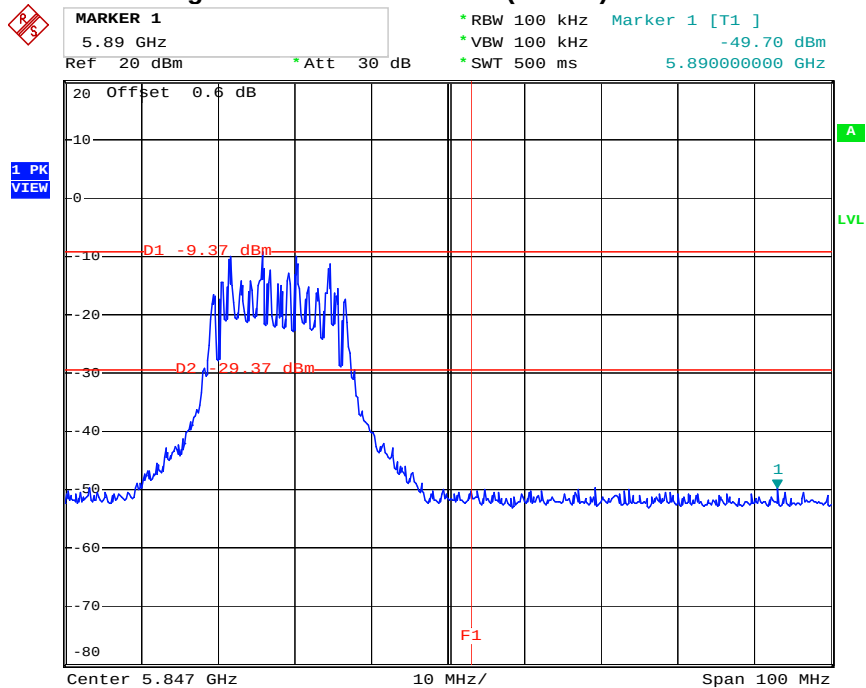


Date: 13.MAY.2011 20:33:30

Low Band Edge Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5745 MHz

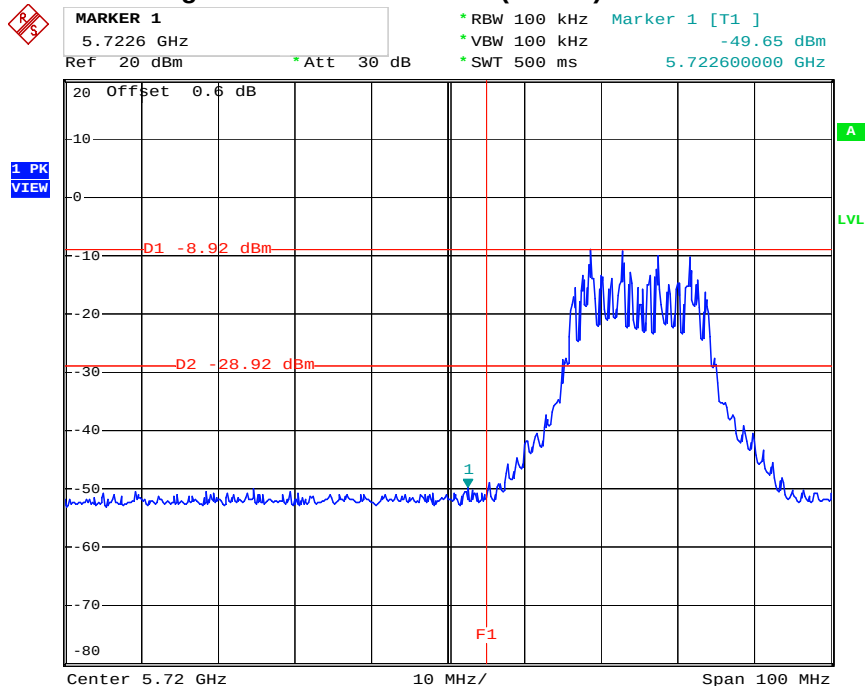


Date: 13.MAY.2011 20:38:42

High Band Edge Plot on Configuration of IEEE 802.11n (20MHz) Port 3 / 5825 MHz

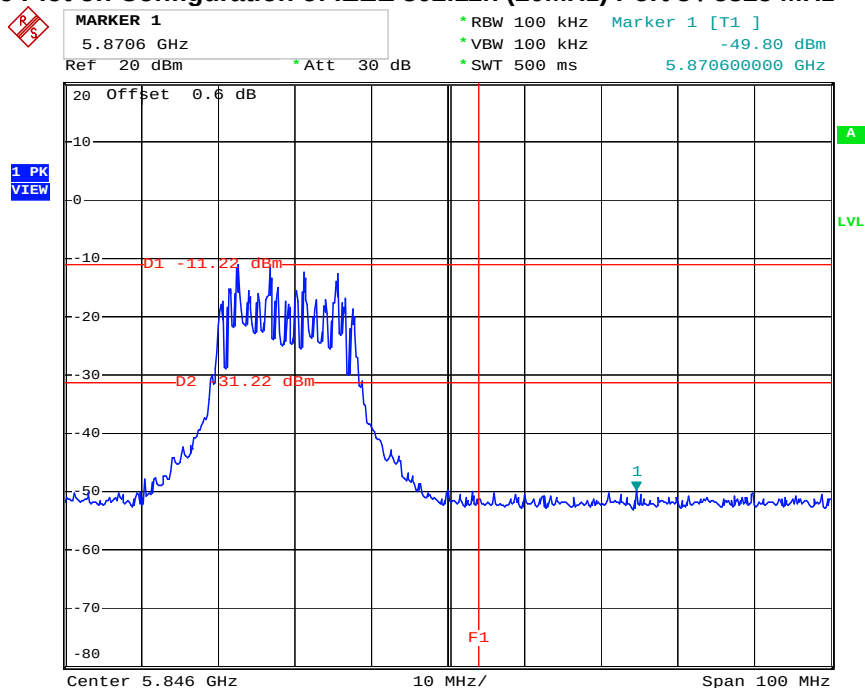


Date: 13.MAY.2011 20:43:38

Low Band Edge Plot on Configuration of IEEE 802.11n (40MHz) Port 1 / 5755 MHz

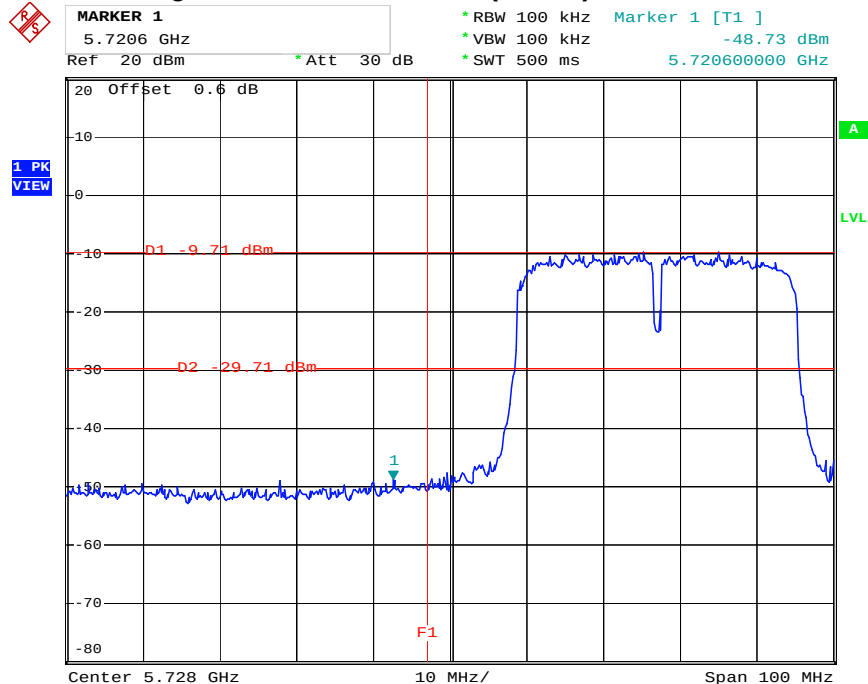


Date: 14.MAY.2011 14:59:49

High Band Edge Plot on Configuration of IEEE 802.11n (40MHz) Port 1 / 5795 MHz

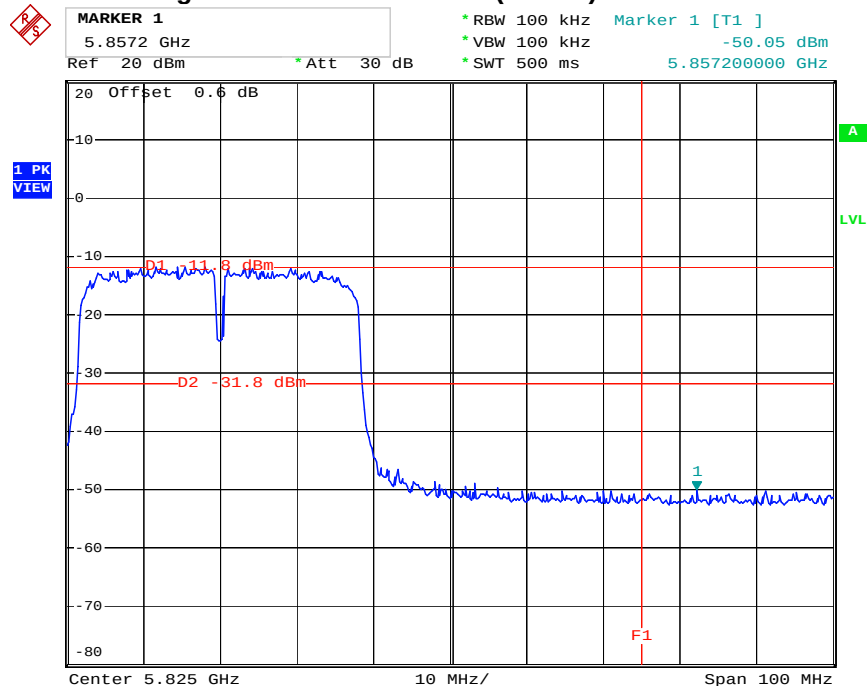


Date: 14.MAY.2011 15:03:20

Low Band Edge Plot on Configuration of IEEE 802.11n (40MHz) Port 2 / 5755 MHz

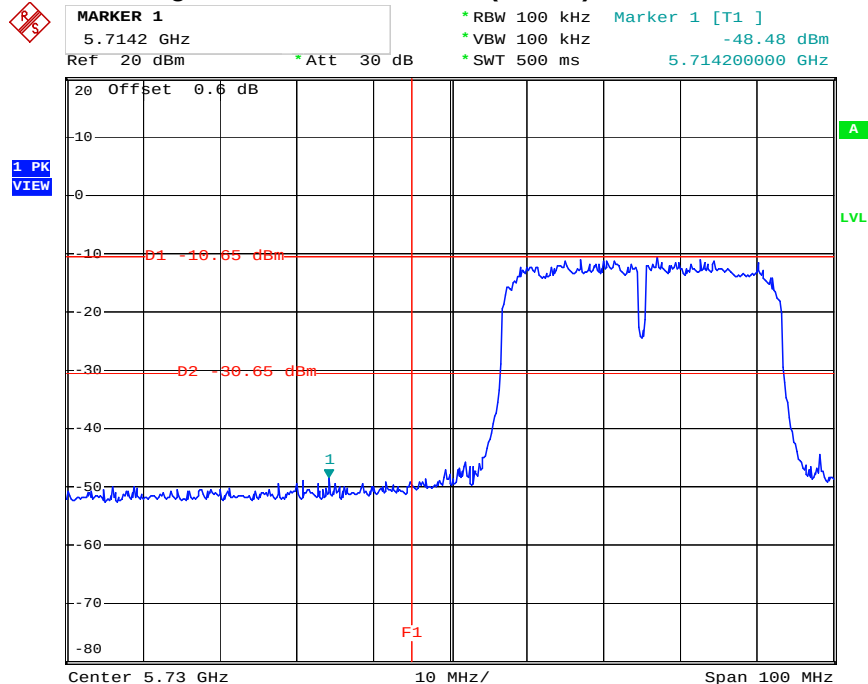


Date: 14.MAY.2011 15:06:48

High Band Edge Plot on Configuration of IEEE 802.11n (40MHz) Port 2 / 5795 MHz

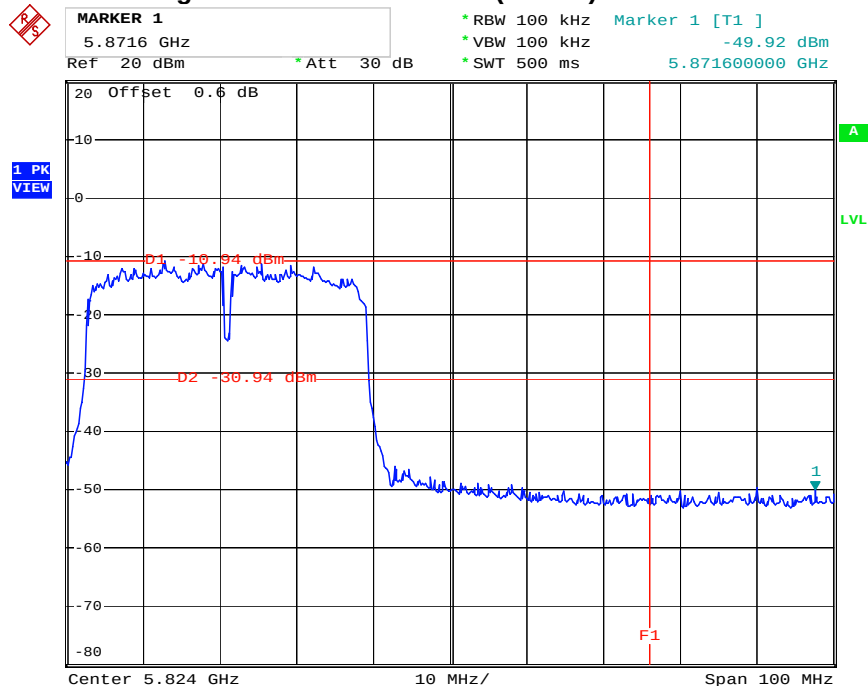


Date: 14.MAY.2011 15:10:10

Low Band Edge Plot on Configuration of IEEE 802.11n (40MHz) Port 3 / 5755 MHz

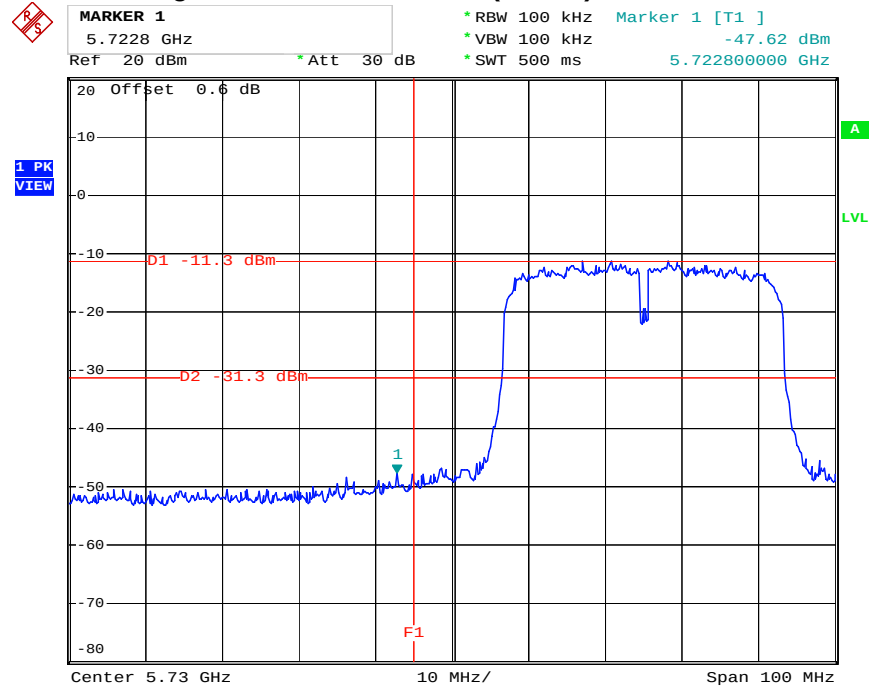

Date: 14.MAY.2011 15:14:15

High Band Edge Plot on Configuration of IEEE 802.11n (40MHz) Port 3 / 5795 MHz

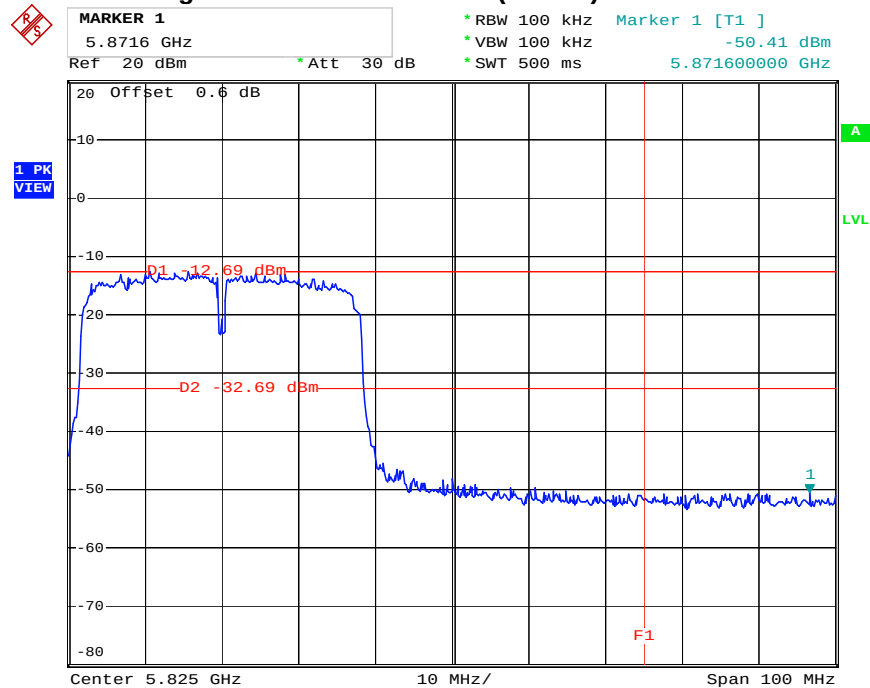

Date: 14.MAY.2011 15:17:15

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.7.2 Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 20, 2011	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 10, 2011	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	May 04, 2011	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz – 30MHz	Apr. 21, 2011	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023	9KHz ~ 30GHz	Mar. 15, 2011	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Apr. 15, 2011	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2010	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 29, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 26, 2010*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz ~ 40 GHz	Feb. 11, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 01, 2010	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 23, 2010	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 23, 2010	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1 GHz ~ 18 GHz	Nov. 11, 2010	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz ~ 1 GHz	Mar. 07, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1 GHz ~ 40 GHz	Mar. 07, 2011	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz ~ 2 GHz	Oct. 16, 2010	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 11, 2011

PI, total 24 pages