



FCC TEST REPORT

according to

FCC Rules and Regulations Part 15 Subpart C

Applicant : Partner Tech Corp.

Address : 10FL, 233-2, Baoqiao Road, Xindian,
New Taipei City, Taiwan

Equipment : Handheld Terminal

Model No. : MF-2351

FCC ID : NDPMF2351

Trade Name : Partner

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test.....	7
2.1 Feature of Equipment under Test.....	7
2.2 Carrier Frequency of Channels.....	8
2.3 Test Mode & Test Software	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	9
3. Antenna Requirements.....	10
3.1 Standard Applicable	10
3.2 Antenna Construction and Directional Gain.....	10
4. Test of Conducted Emission.....	11
4.1 Test Limit	11
4.2 Test Procedures	11
4.3 Typical Test Setup	12
4.4 Measurement equipment	12
4.5 Test Result and Data.....	13
4.6 Test Photographs	17
5. Test of Radiated Emission	18
5.1 Test Limit	18
5.2 Test Procedures	18
5.3 Typical Test Setup	19
5.4 Measurement equipment	20
5.5 Test Result and Data (9kHz ~ 30MHz).....	20
5.6 Test Result and Data (30MHz ~ 1GHz).....	21
5.7 Test Result and Data (1GHz ~ 25GHz).....	23
5.8 Test Photographs (30MHz ~ 1GHz)	35
5.9 Test Photographs (1GHz ~ 25GHz)	36
6. 20dB Bandwidth Measurement Data.....	37
6.1 Test Limit	37
6.2 Test Procedures	37
6.3 Test Setup Layout	37
6.4 Measurement equipment	37
6.5 Test Result and Data.....	38
7. Frequencies Separation	42
7.1 Test Limit	42
7.2 Test Procedures	42
7.3 Test Setup Layout	42
7.4 Measurement equipment	42
7.5 Test Result and Data.....	43
8. Dwell Time on each channel	47
8.1 Test Limit	47



8.2	Test Procedures	47
8.3	Test Setup Layout	47
8.4	Measurement equipment	47
8.5	Test Result and Data.....	48
9.	Number of Hopping Channels	52
9.1	Test Limit	52
9.2	Test Procedures	52
9.3	Test Setup Layout	52
9.4	Measurement equipment	52
9.5	Test Result and Data.....	52
10.	Maximum Peak Output Power	55
10.1	Test Limit	55
10.2	Test Procedures	55
10.3	Test Setup Layout	55
10.4	Measurement equipment	55
10.5	Test Result and Data.....	56
11.	Band Edges Measurement.....	62
11.1	Test Limit	62
11.2	Test Procedure	62
11.3	Test Setup Layout	62
11.4	List of Measuring Equipment Used	62
11.5	Test Result and Data.....	63
11.6	Restrict band emission Measurement Data	66
12.	Restricted Bands of Operation	68
12.1	Labeling Requirement.....	68
Appendix A. Photographs of EUT.....		A1 ~ A30



History of this test report

ORIGINAL.

Additional attachment as following record:

Attachment No.	Issue Date	Description



CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations Part 15 Subpart C

Applicant : Partner Tech Corp.

Address : 10FL, 233-2, Baoqiao Road, Xindian,
New Taipei City, Taiwan

Equipment : Handheld Terminal

Model No. : MF-2351

FCC ID : NDPMF2351

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4**. The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The test was carried out on Mar. 20, 2013 at **Cerpass Technology Corp.**

Approval by :

Hill Chen

EMC/RF B.U. Assistant Manager

Test Engineer:

Tom Tai

Engineer



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth Measurement	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass
15.247(d)	. Band Edges Measurement Data	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Basic configuration	
Processor	TI Cortex A8 AM3715, 1GHz
Operating	WinCe6.0
Memory	DDR2, 2GB(256M), NAND Flash, 4GB(512M)
Flash	3.5inch 240 x 320 Pixels / 262000 Color
Display	Support touch and stylus input
Key	Alpha & numeric Keys (Total 20 Hardware keys)
Magnetic Card	Triple Track (track 1, 2 & 3)
IC Card Reader	EMV/PBOC2.0 L1&L2; ISO 7816
SAM Card	2
Expansion Card	Mini SD Card Slot
USB	1 USB (OTG)
RS232	1 RS232
Printer	High Speed, High resolution, thermal printer (Dimension 30mm, Width 58mm)
Audio	speaker (mono) x 1, microphone x 1
Vibration	Support
Battery	Rechargeable Battery: DC7.4V/2000mAh
Power	Power Adapter: Output Voltage DC 9V/3A, Input Voltage 100~240V, 50/60Hz 1. ADAPTER \ ATS030-A090 2. ULLPOWER \ CGSW-0903000
Communication interface(built-in)	1 SIM Slot
Secure	Processor MAXQ1850
Performance	Operating System VOS
Physical Specification	Dimension (mm): 208(L) x 85.5(W) x 53(D) mm Weight: 500g
Optional Configuration	
Communication	WCDMA, Bluetooth V2.1+EDR, WIFI 802.11b/g, GPS, GPRS
Camera	3.1M Pixel
Contactless reader	ISO 14443 A/B/NFC, Contactless EMV
Bar Code	1D or 2D
Scanner Fingerprint	



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)						
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. The complete test system included EUT for the RF test.
- c. An executive program, "TICON" under WIN CE was executed to transmit and receive data through Bluetooth.
- d. The following test mode was performed for conduction and radiation test:
 - GFSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - 8DPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.

2.4 Description of Test System

The EUT was tested alone. No support devices is needed for testing.



2.5 General Information of Test

Test Site :	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number:	TW1049, TW1061, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number:	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24800MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.
Laboratory Accreditation :	

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	3.25 dB
Radiated Emission	30 MHz ~ 1,000 MHz	Vertical / Horizontal	3.93 dB
	1,000 MHz ~ 18,000 MHz	Vertical / Horizontal	5.18dB
6 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	2.2 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: PCB Antenna

Antenna Gain: 2 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

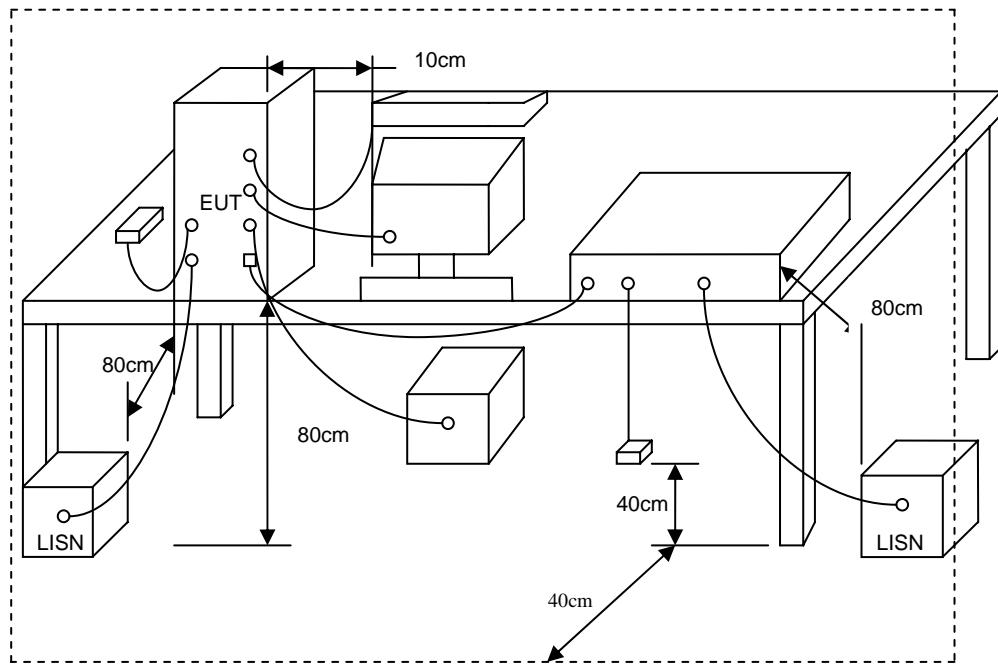


4.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100367	2012/06/18	2013/06/17
LISN	R&S	ENV216	101040	2013/03/04	2014/03/03
LISN	R&S	ENV216	101041	2013/03/04	2014/03/03
Test Site	ATL	TE05	TE05	N.C.R.	---



4.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: GFSK CH0	Temperature	: 26 °C
Test Date	: Mar. 20, 2013	Humidity	: 60 %

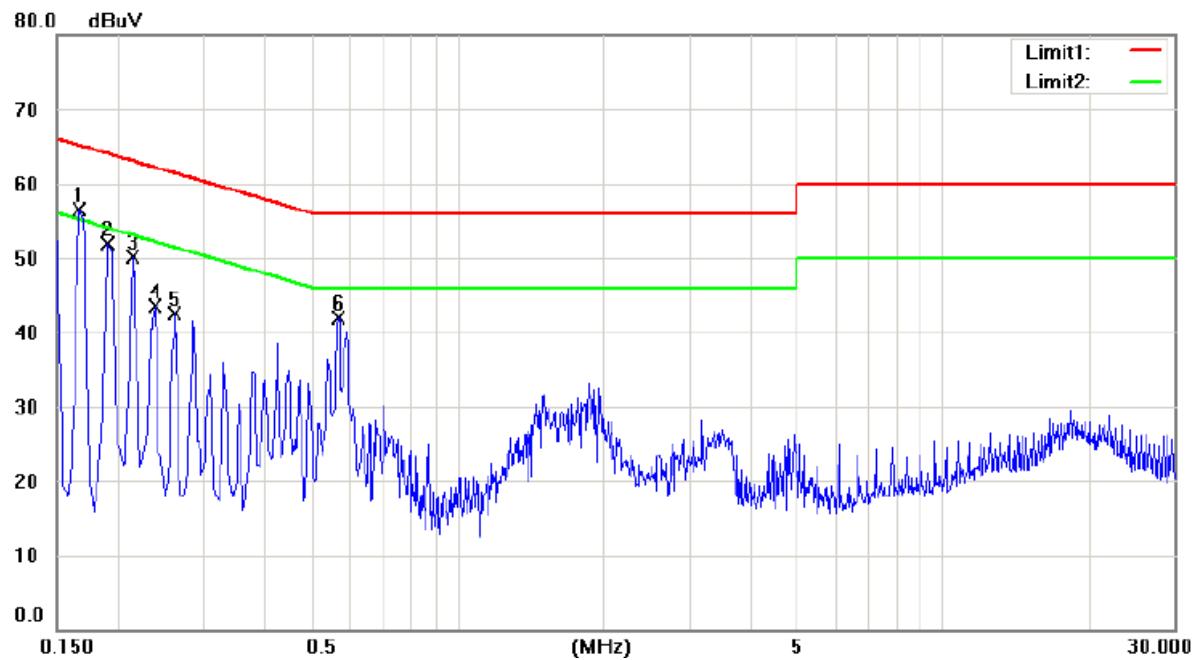


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	Avg result (dBuV)	QP limit (dBuV)	Avg limit (dBuV)	QP margin (dB)	Avg margin (dB)	Remark
1	0.1660	44.28	25.22	9.72	54.00	34.94	65.16	55.16	-11.16	-20.22	Pass
2	0.1900	40.60	21.16	9.72	50.32	30.88	64.04	54.04	-13.72	-23.16	Pass
3	0.2140	37.32	18.12	9.72	47.04	27.84	63.05	53.05	-16.01	-25.21	Pass
4	0.2380	34.17	14.50	9.72	43.89	24.22	62.17	52.17	-18.28	-27.95	Pass
5	0.2620	30.20	13.11	9.72	39.92	22.83	61.37	51.37	-21.45	-28.54	Pass
6	0.5700	29.00	18.15	9.71	38.71	27.86	56.00	46.00	-17.29	-18.14	Pass

Note: Level = Reading + Factor

Margin = Level - Limit



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: GFSK CH0	Temperature	: 26 °C
Test Date	: Mar. 20, 2013	Humidity	: 60 %

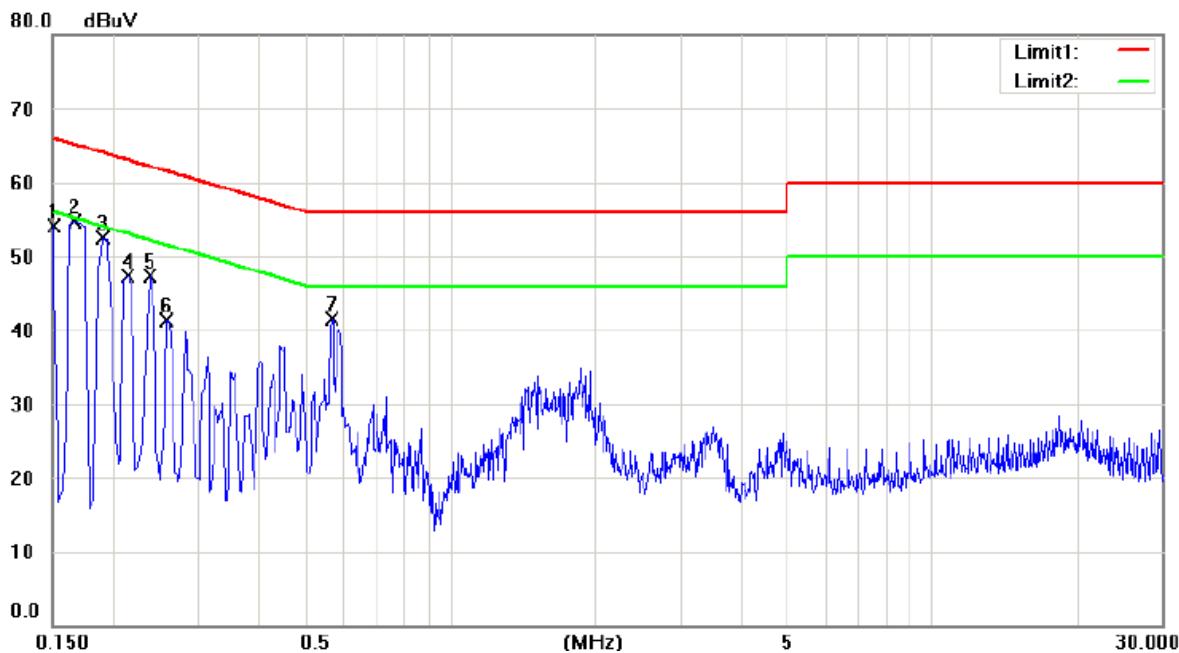


No.	Frequency (MHz)	QP reading (dBuV)	Avg reading (dBuV)	Correction factor (dB)	QP result (dBuV)	Avg result (dBuV)	QP limit (dBuV)	Avg limit (dBuV)	QP margin (dB)	Avg margin (dB)	Remark
1	0.1500	39.39	16.34	9.65	49.04	25.99	66.00	56.00	-16.96	-30.01	Pass
2	0.1660	43.88	25.40	9.65	53.53	35.05	65.16	55.16	-11.63	-20.11	Pass
3	0.1900	40.44	20.94	9.64	50.08	30.58	64.04	54.04	-13.96	-23.46	Pass
4	0.2140	36.76	16.61	9.64	46.40	26.25	63.05	53.05	-16.65	-26.80	Pass
5	0.2380	32.82	12.19	9.64	42.46	21.83	62.17	52.17	-19.71	-30.34	Pass
6	0.2580	31.38	12.44	9.64	41.02	22.08	61.50	51.50	-20.48	-29.42	Pass
7	0.5700	28.73	18.06	9.64	38.37	27.70	56.00	46.00	-17.63	-18.30	Pass

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: 8DPSK CH0	Temperature	: 26 °C
Test Date	: Mar. 20, 2013	Humidity	: 60 %

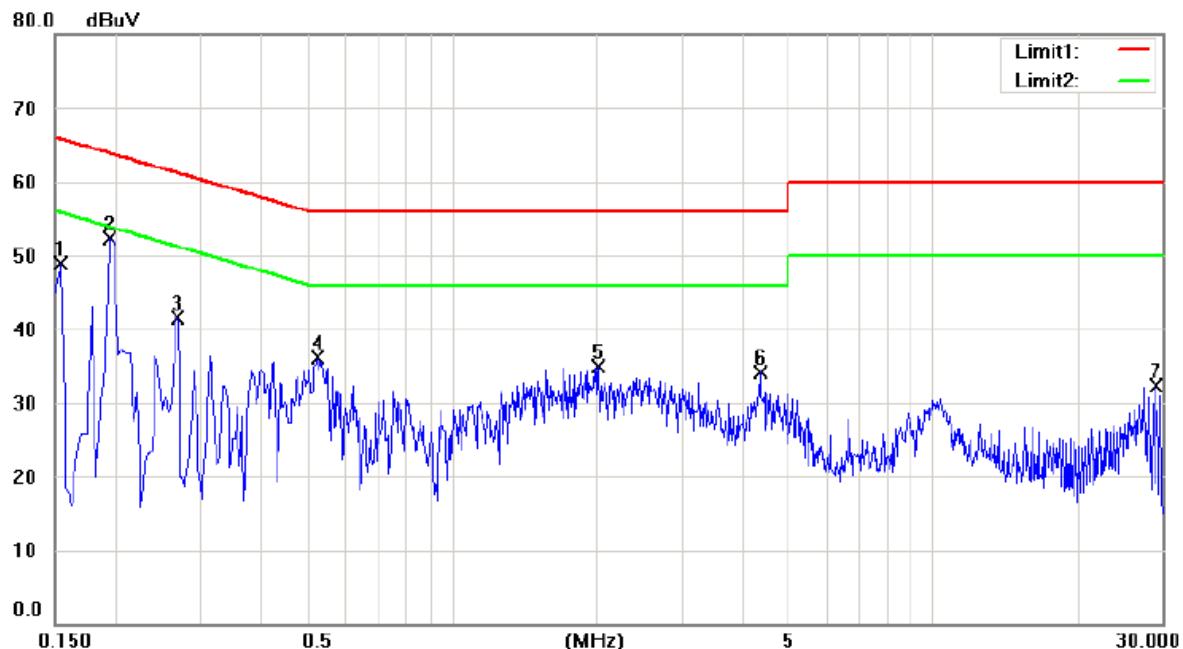


No.	Frequency (MHz)	QP reading (dBuV)	Avg reading (dBuV)	Correction factor	QP result (dBuV)	Avg result (dBuV)	QP limit (dBuV)	Avg limit (dBuV)	QP margin (dB)	Avg margin (dB)	Remark
1	0.1540	30.68	9.96	9.72	40.40	19.68	65.78	55.78	-25.38	-36.10	Pass
2	0.1940	39.39	22.31	9.72	49.11	32.03	63.86	53.86	-14.75	-21.83	Pass
3	0.2700	28.61	11.43	9.72	38.33	21.15	61.12	51.12	-22.79	-29.97	Pass
4	0.5260	24.17	10.82	9.72	33.89	20.54	56.00	46.00	-22.11	-25.46	Pass
5	2.0220	19.67	11.50	9.80	29.47	21.30	56.00	46.00	-26.53	-24.70	Pass
6	4.3820	20.38	14.61	9.77	30.15	24.38	56.00	46.00	-25.85	-21.62	Pass
7	29.2100	18.04	15.44	9.97	28.01	25.41	60.00	50.00	-31.99	-24.59	Pass

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: 8DPSK CH0	Temperature	: 26 °C
Test Date	: Mar. 20, 2013	Humidity	: 60 %

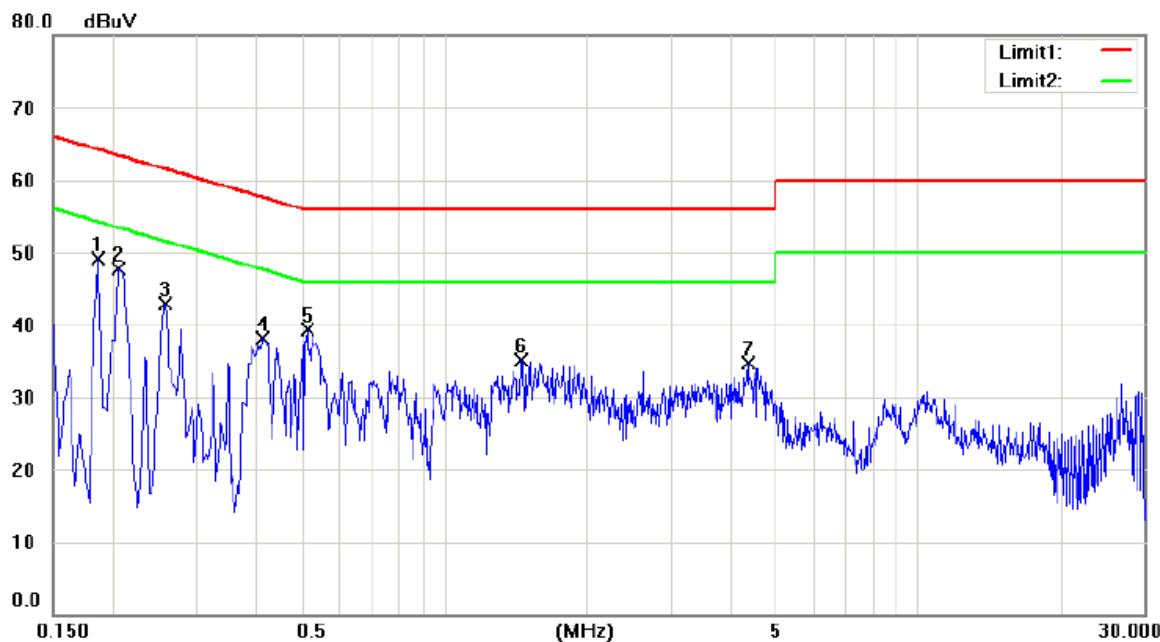

No.	Frequency (MHz)	QP reading (dBuV)	Avg reading (dBuV)	Correction factor	QP result (dBuV)	Avg result (dBuV)	QP limit (dBuV)	Avg limit (dBuV)	QP margin (dB)	Avg margin (dB)	Remark
1	0.1860	34.86	14.25	9.64	44.50	23.89	64.21	54.21	-19.71	-30.32	Pass
2	0.2060	38.01	21.92	9.64	47.65	31.56	63.37	53.37	-15.72	-21.81	Pass
3	0.2580	30.25	15.95	9.64	39.89	25.59	61.50	51.50	-21.61	-25.91	Pass
4	0.4140	27.40	15.05	9.64	37.04	24.69	57.57	47.57	-20.53	-22.88	Pass
5	0.5140	27.52	13.62	9.64	37.16	23.26	56.00	46.00	-18.84	-22.74	Pass
6	1.4620	22.26	15.92	9.69	31.95	25.61	56.00	46.00	-24.05	-20.39	Pass
7	4.3780	19.26	11.26	9.71	28.97	20.97	56.00	46.00	-27.03	-25.03	Pass

Note: Level = Reading + Factor

Margin = Level – Limit



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V / M)
30-230	10	30
230-1000	10	37


5.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




5.3 Typical Test Setup

For radiated emissions below 30MHz

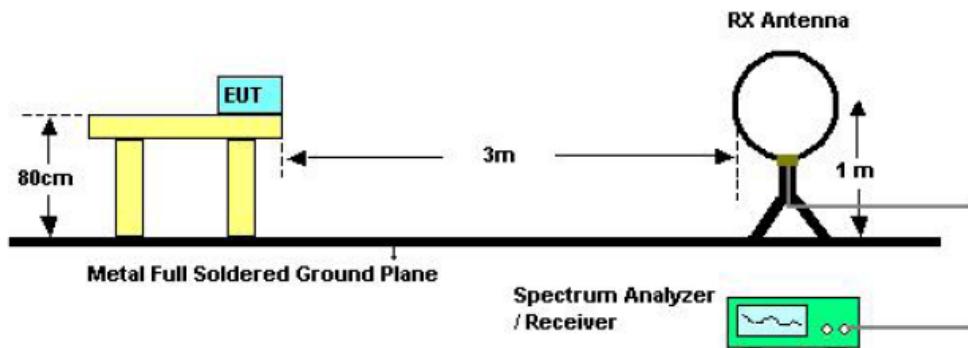

For radiated emissions above 30MHz

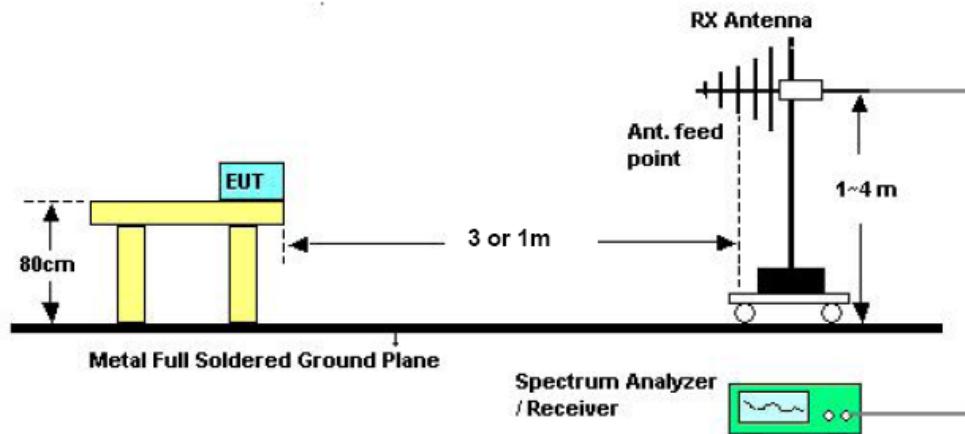

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].



5.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
RF Pre-selector	Agilent	N9039A	MY46520256	2013/01/21	2014/01/20
Spectrum Analyzer	Agilent	E4446A	MY46180578	2013/01/21	2014/01/20
Pre Amplifier	Agilent	8449B	3008A02237	2013/02/21	2014/02/20
Pre Amplifier	Agilent	8447D	2944A10961	2013/02/21	2014/02/20
Broadband Antenna (30MHz ~ 1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	2012/06/29	2013/06/28
Horn Antenna (1GHz ~ 18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	2012/06/15	2013/06/14
Horn Antenna (18GHz ~ 40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	2012/06/21	2013/06/20
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	2012/08/14	2015/08/11
Test Site	ATL	TE01	888001	2012/08/28	2013/08/27

5.5 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.



5.6 Test Result and Data (30MHz ~ 1GHz)


Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 20, 2013		



No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	156.0000	49.60	-17.07	32.53	43.50	-10.97			QP
2	276.5000	43.86	-11.30	32.56	46.00	-13.44			QP
3	456.0000	41.75	-7.78	33.97	46.00	-12.03			QP
4	600.0000	41.55	-5.04	36.51	46.00	-9.49			QP
5	720.0000	35.81	-3.22	32.59	46.00	-13.41			QP
6	900.0000	29.40	0.41	29.81	46.00	-16.19			QP



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 20, 2013		

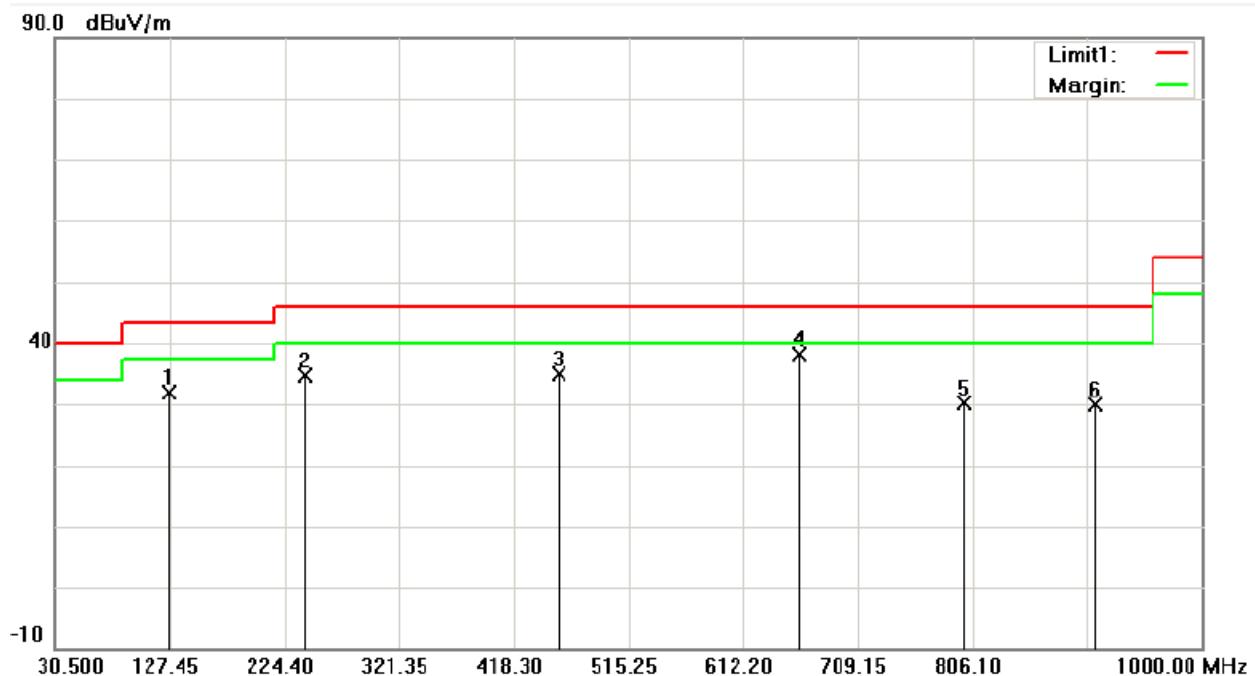


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	126.5000	48.62	-16.83	31.79	43.50	-11.71			QP
2	242.0000	46.76	-12.19	34.57	46.00	-11.43			QP
3	456.0000	42.65	-7.78	34.87	46.00	-11.13			QP
4	660.0000	42.13	-4.00	38.13	46.00	-7.87			QP
5	800.0000	31.56	-1.55	30.01	46.00	-15.99			QP
6	910.0000	29.28	0.56	29.84	46.00	-16.16			QP



5.7 Test Result and Data (1GHz ~ 25GHz)


Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: GFSK (1Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

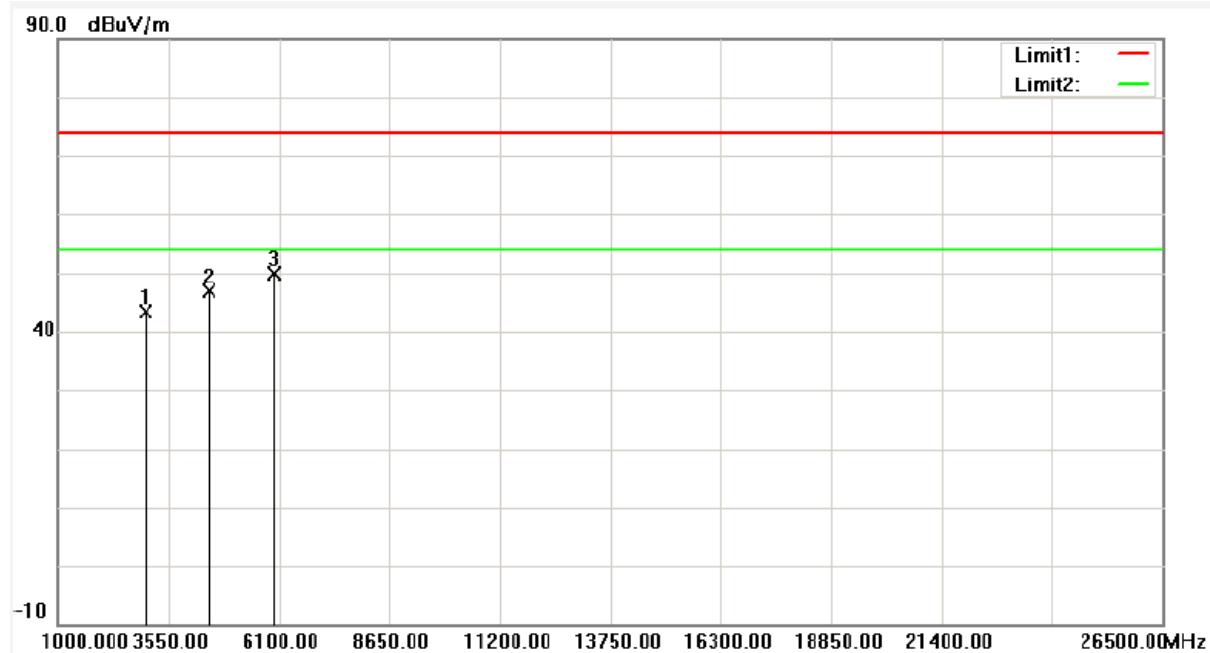

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2995.000	37.48	5.90	43.38	74.00	-30.62			peak
2	4486.000	35.98	10.83	46.81	74.00	-27.19			peak
3	5963.000	34.18	15.76	49.94	74.00	-24.06			peak




Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: GFSK (1Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

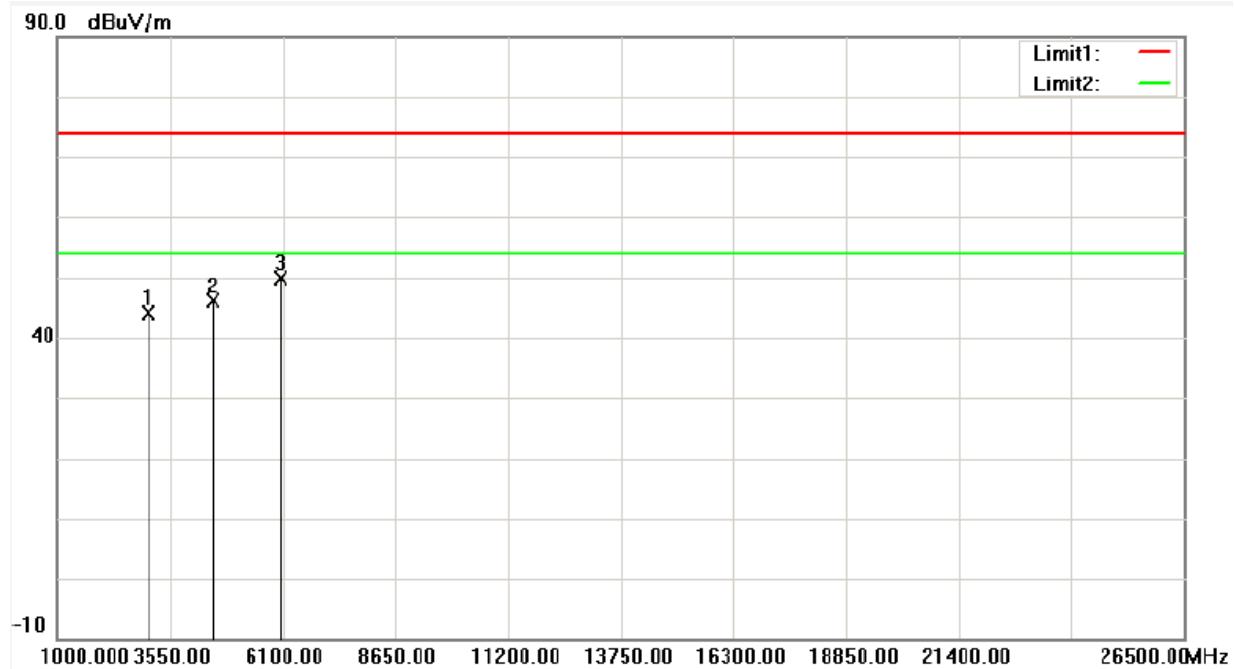

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	3016.000	38.19	5.95	44.14	74.00	-29.86			peak
2	4514.000	35.29	10.92	46.21	74.00	-27.79			peak
3	6047.000	33.96	16.03	49.99	74.00	-24.01			peak




Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: GFSK (1Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

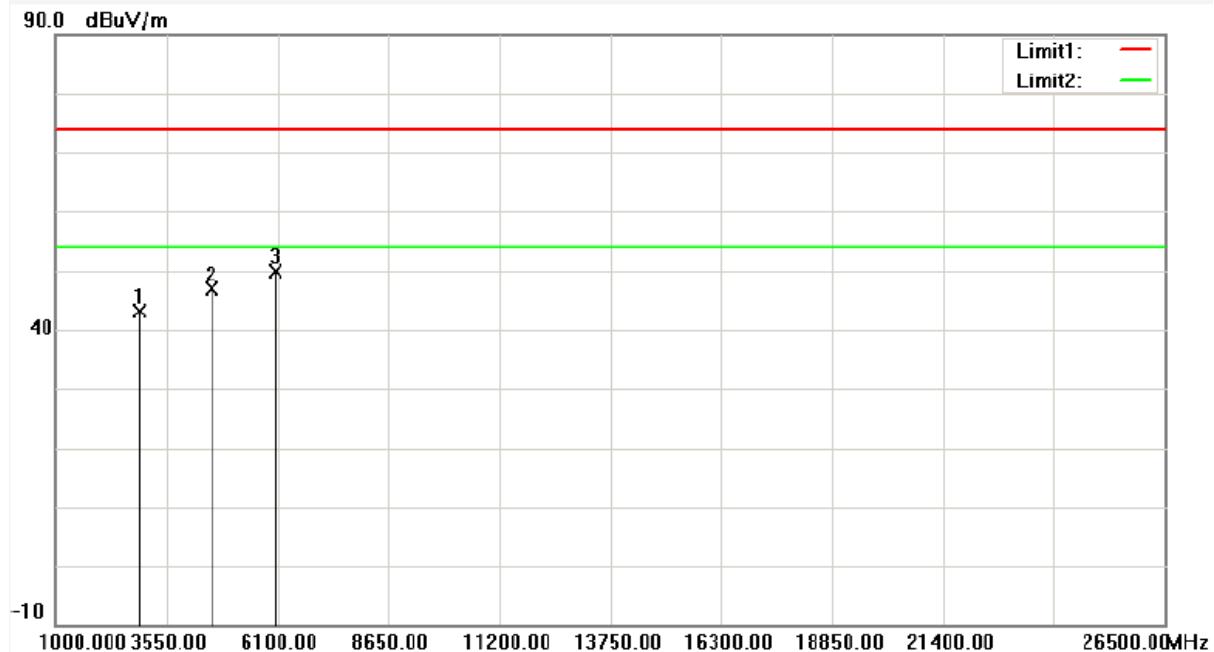

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2911.000	37.42	5.68	43.10	74.00	-30.90			peak
2	4556.000	35.75	11.02	46.77	74.00	-27.23			peak
3	6040.000	33.84	16.00	49.84	74.00	-24.16			peak




Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: GFSK (1Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

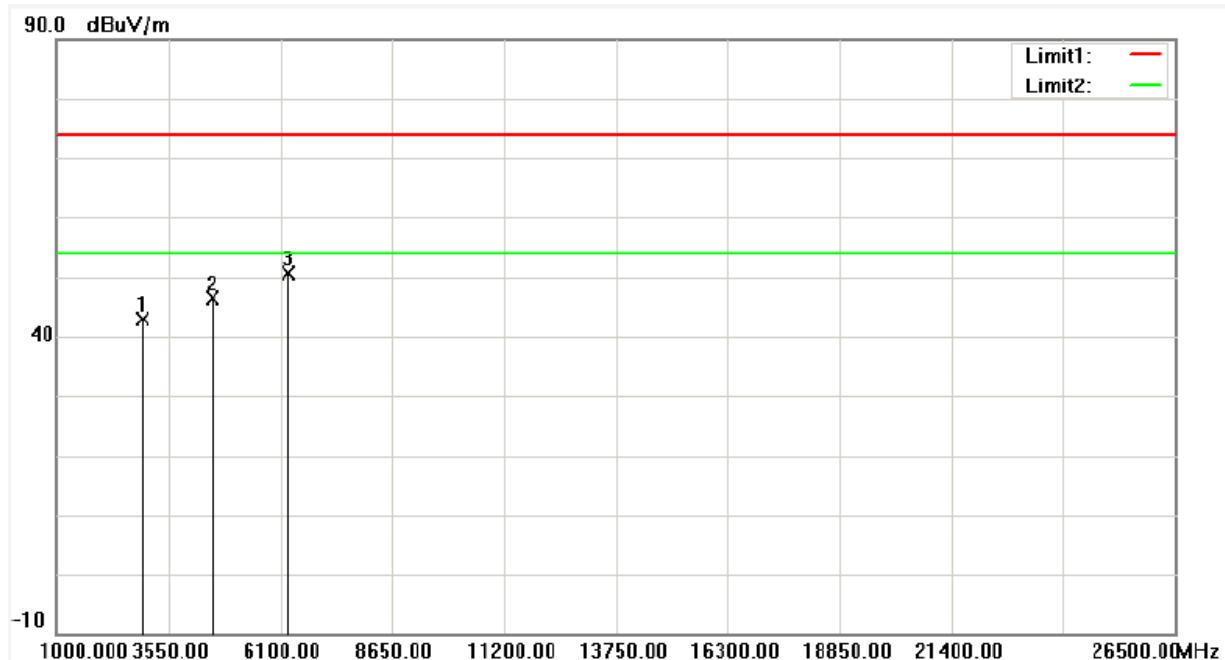

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2918.000	37.25	5.70	42.95	74.00	-31.05			peak
2	4535.000	35.36	10.97	46.33	74.00	-27.67			peak
3	6257.000	34.02	16.66	50.68	74.00	-23.32			peak




Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: GFSK (1Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

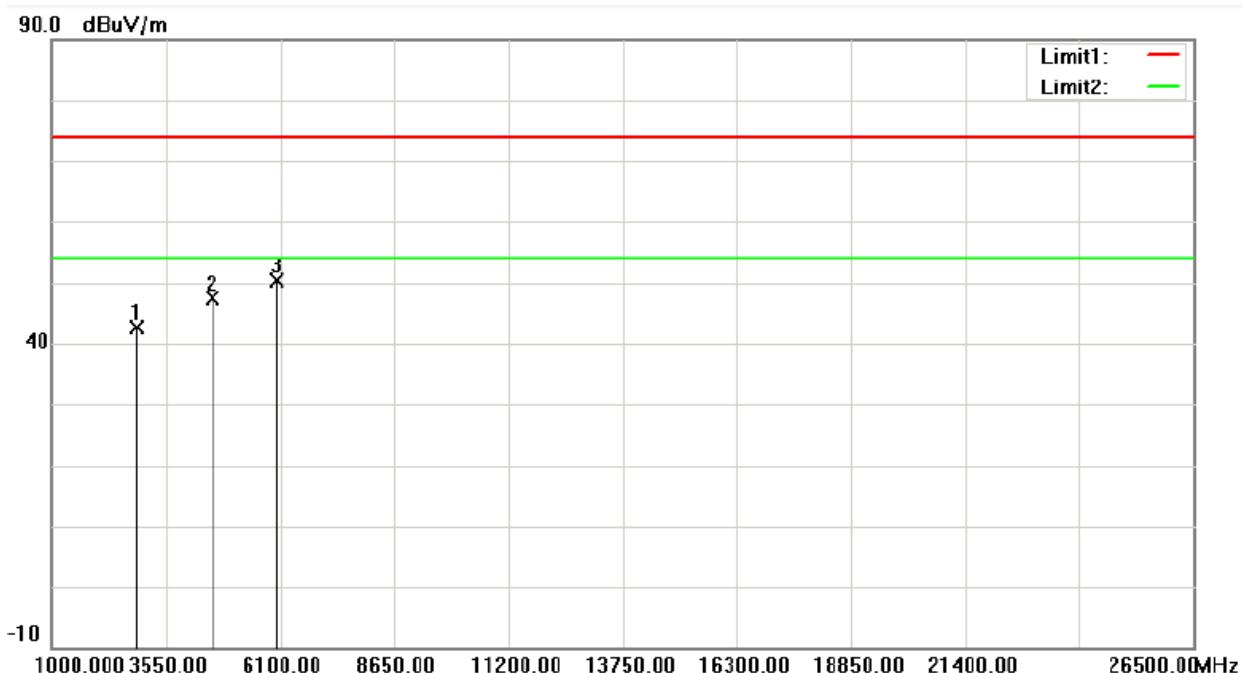

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2869.000	37.09	5.57	42.66	74.00	-31.34			peak
2	4591.000	36.36	11.11	47.47	74.00	-26.53			peak
3	5984.000	34.56	15.83	50.39	74.00	-23.61			peak




Power	:	AC 120V	Pol/Phase	:	HORIZONTAL
Test Mode	:	Transmit / Receive	Temperature	:	26 °C
Operation Channel	:	78	Humidity	:	60 %
Modulation Type	:	GFSK (1Mbps)	Atmospheric Pressure	:	1020 hPa
Test Date	:	Feb. 19, 2013			

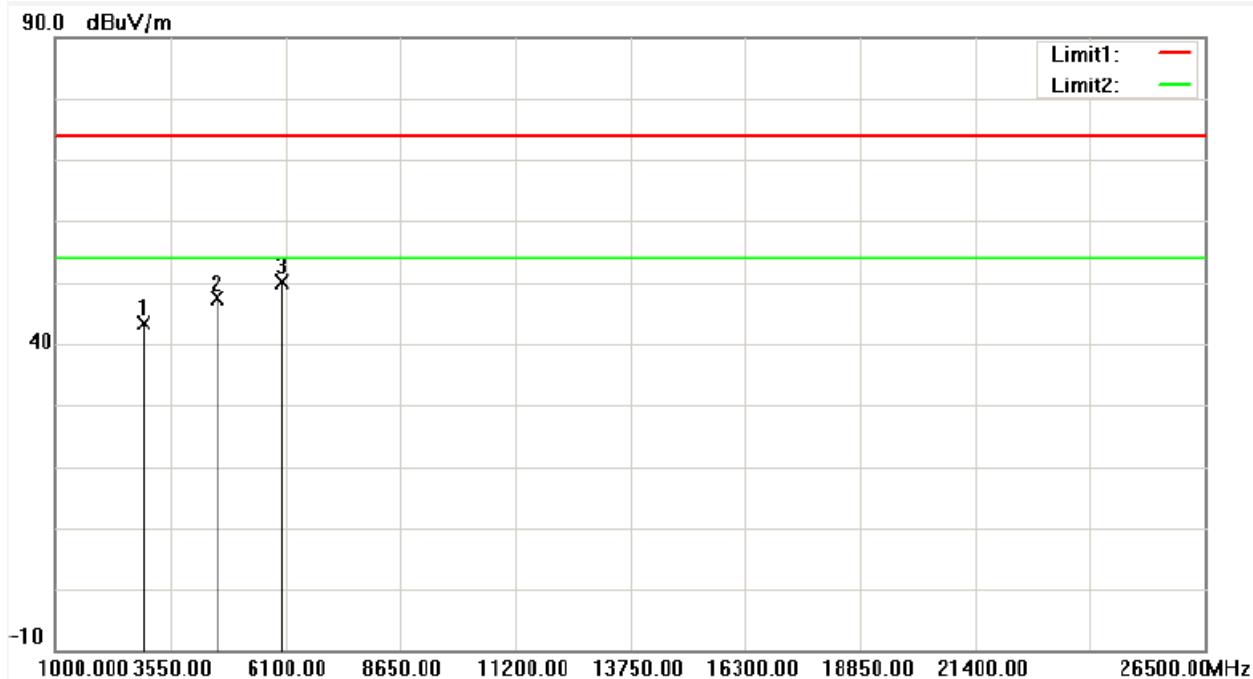

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2960.000	37.57	5.81	43.38	74.00	-30.62			peak
2	4584.000	36.39	11.09	47.48	74.00	-26.52			peak
3	5984.000	34.32	15.83	50.15	74.00	-23.85			peak




Power	:	AC 120V	Pol/Phase	:	VERTICAL
Test Mode	:	Transmit / Receive	Temperature	:	26 °C
Operation Channel	:	0	Humidity	:	60 %
Modulation Type	:	8 DPSK (3 Mbps)	Atmospheric Pressure	:	1020 hPa
Test Date	:	Feb. 19, 2013			

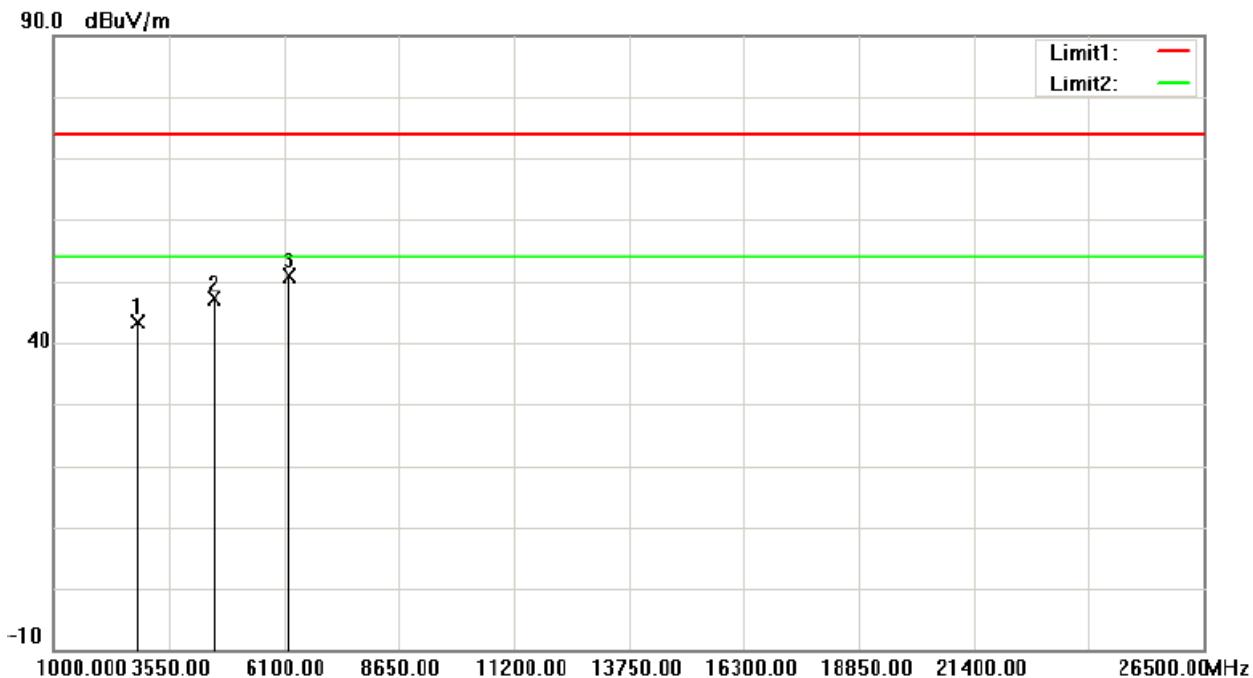

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2841.000	37.79	5.49	43.28	74.00	-30.72			peak
2	4542.000	36.08	10.99	47.07	74.00	-26.93			peak
3	6222.000	34.41	16.56	50.97	74.00	-23.03			peak




Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 0	Humidity	: 60 %
Modulation Type	: 8 DPSK (3 Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

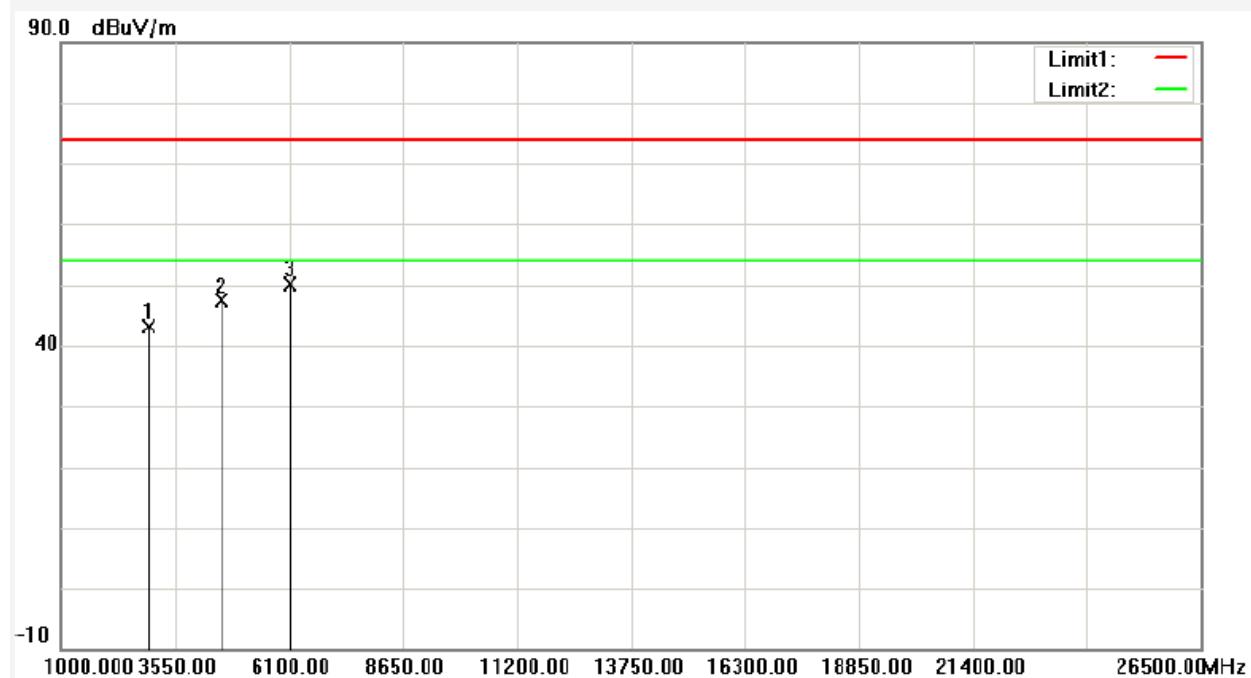

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2939.000	37.46	5.75	43.21	74.00	-30.79			peak
2	4556.000	36.44	11.02	47.46	74.00	-26.54			peak
3	6089.000	33.96	16.15	50.11	74.00	-23.89			peak




Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: 8 DPSK (3 Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

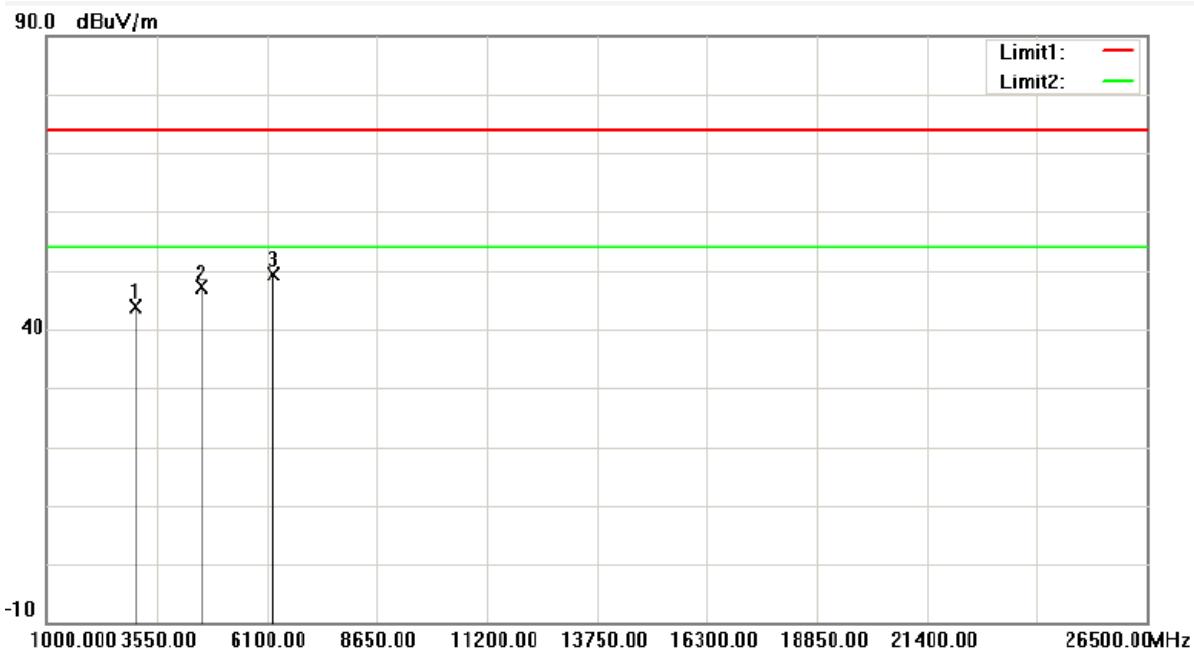

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	3016.000	37.92	5.95	43.87	74.00	-30.13			peak
2	4598.000	36.05	11.14	47.19	74.00	-26.81			peak
3	6243.000	32.72	16.63	49.35	74.00	-24.65			peak




Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 39	Humidity	: 60 %
Modulation Type	: 8 DPSK (3 Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

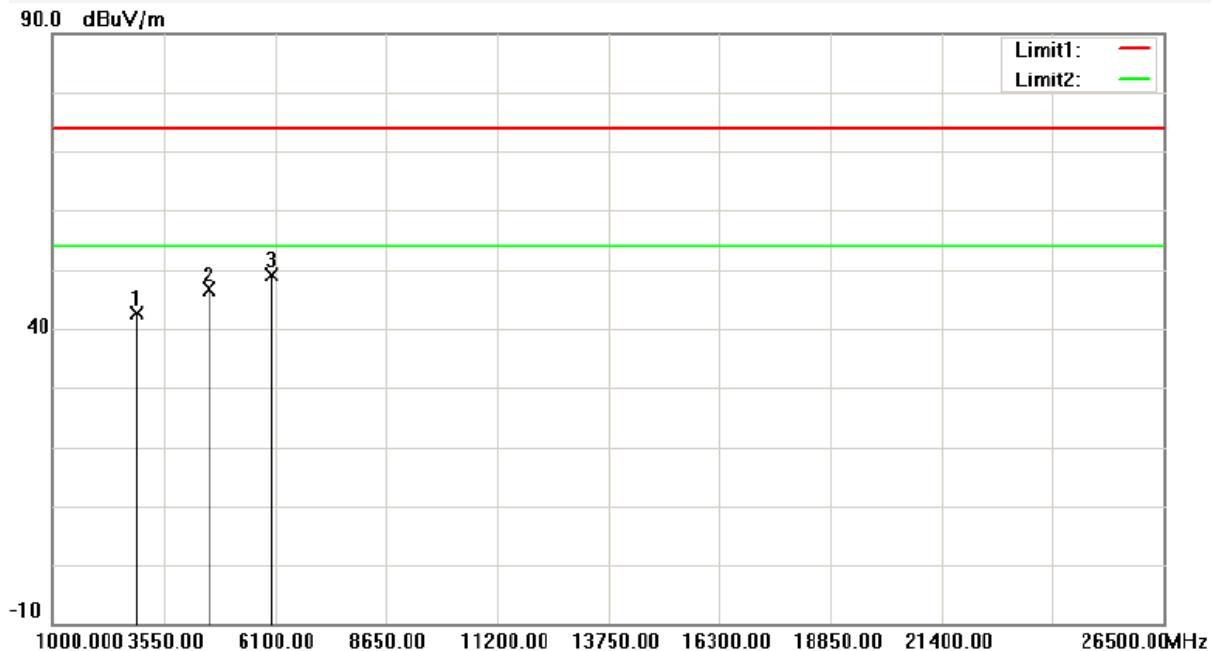

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2890.000	37.01	5.63	42.64	74.00	-31.36			peak
2	4598.000	35.37	11.14	46.51	74.00	-27.49			peak
3	5998.000	33.14	15.88	49.02	74.00	-24.98			peak




Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 78	Humidity	: 60 %
Modulation Type	: 8 DPSK (3 Mbps)	Atmospheric Pressure	: 1020 hPa
Test Date	: Feb. 19, 2013		

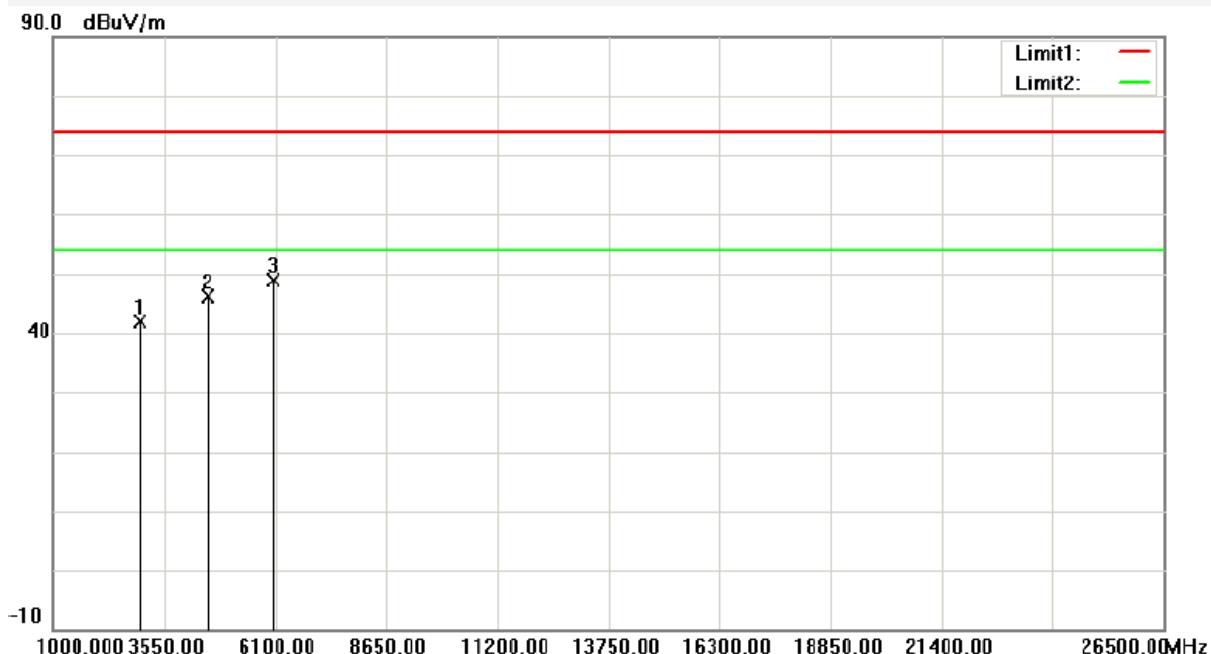

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2995.000	35.98	5.90	41.88	74.00	-32.12			peak
2	4563.000	35.19	11.05	46.24	74.00	-27.76			peak
3	6061.000	32.77	16.07	48.84	74.00	-25.16			peak



Power	:	AC 120V	Pol/Phase	:	HORIZONTAL
Test Mode	:	Transmit / Receive	Temperature	:	26 °C
Operation Channel	:	78	Humidity	:	60 %
Modulation Type	:	8 DPSK (3 Mbps)	Atmospheric Pressure	:	1020 hPa
Test Date	:	Feb. 19, 2013			

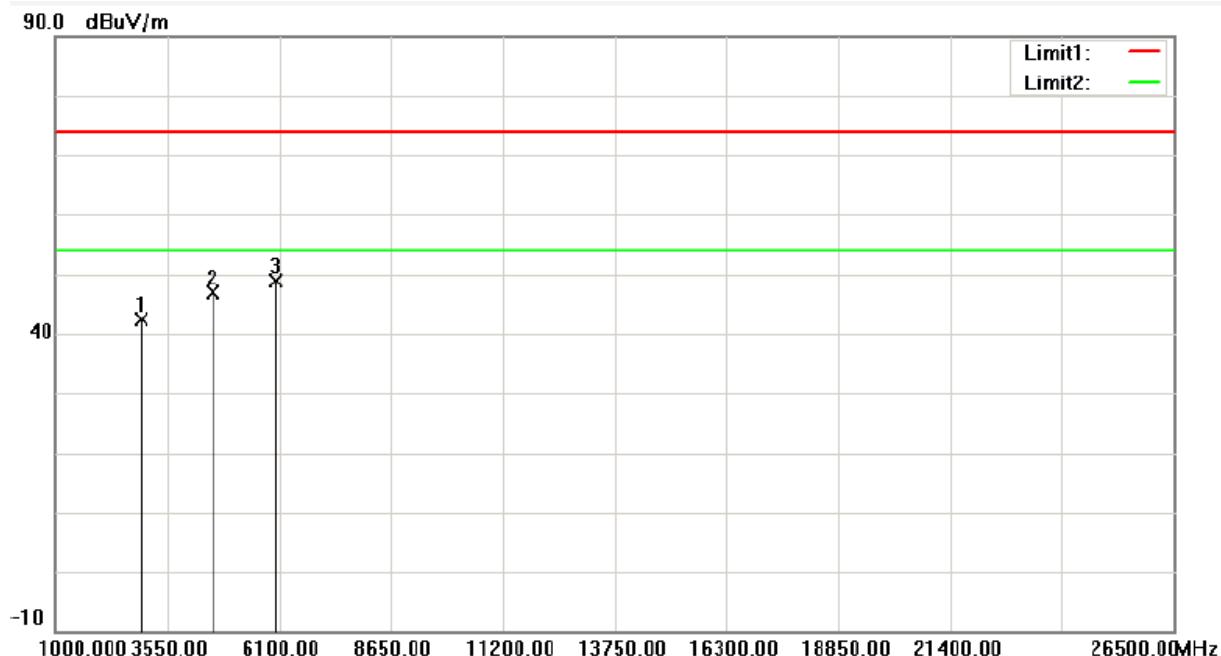

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2967.000	36.67	5.82	42.49	74.00	-31.51			peak
2	4570.000	35.88	11.06	46.94	74.00	-27.06			peak
3	6019.000	32.84	15.94	48.78	74.00	-25.22			peak



6. 20dB Bandwidth Measurement Data

6.1 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

6.3 Test Setup Layout

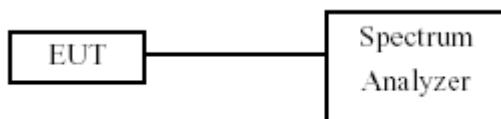

6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	Agilent	E4445A	MY45300744	2012/12/19	2013/12/18
Test Site	ATL	TE02	TE02	N.C.R.	---



6.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	833.0775
39	2441	843.1807
78	2480	855.9189

Modulation Standard: 8DPSK (3Mbps)

Test Date: Feb. 20, 2013

Temperature: 24


Atmospheric pressure: 1020 hPa

Humidity: 60 %


Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	1216.7000
39	2441	1212.6000
78	2480	1209.7000



Modulation Standard: GFSK (1Mbps)
Channel: 00

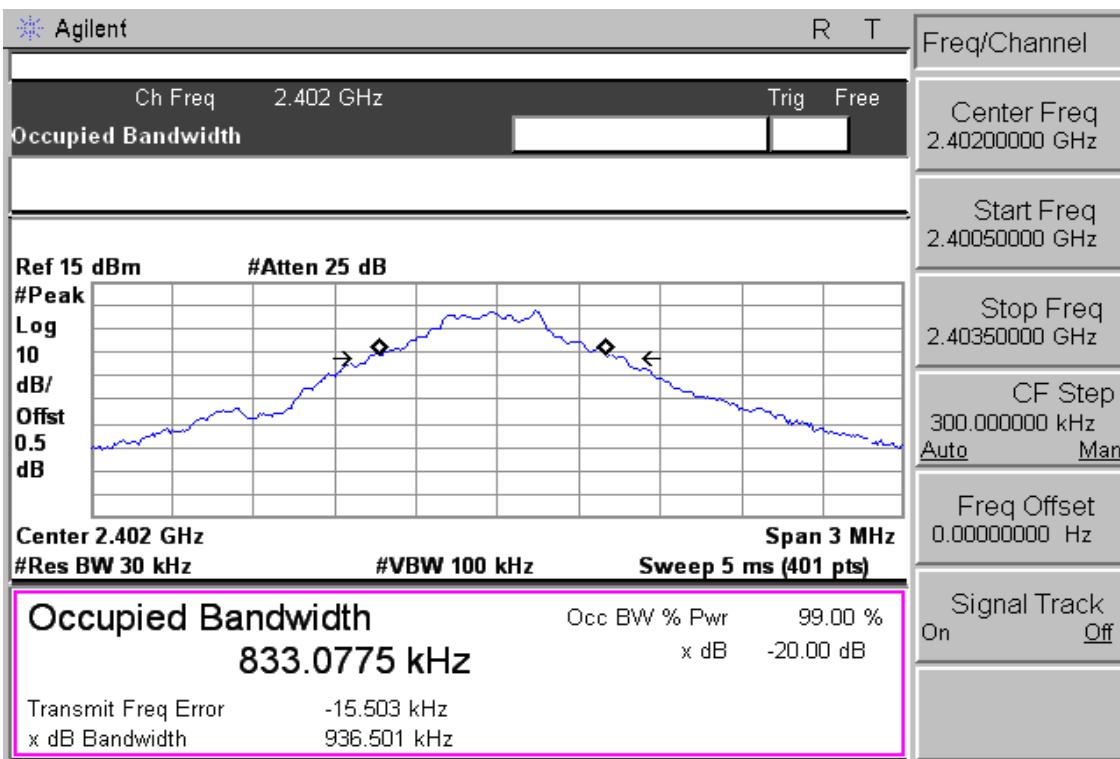


Modulation Standard: GFSK (1Mbps)
Channel: 39

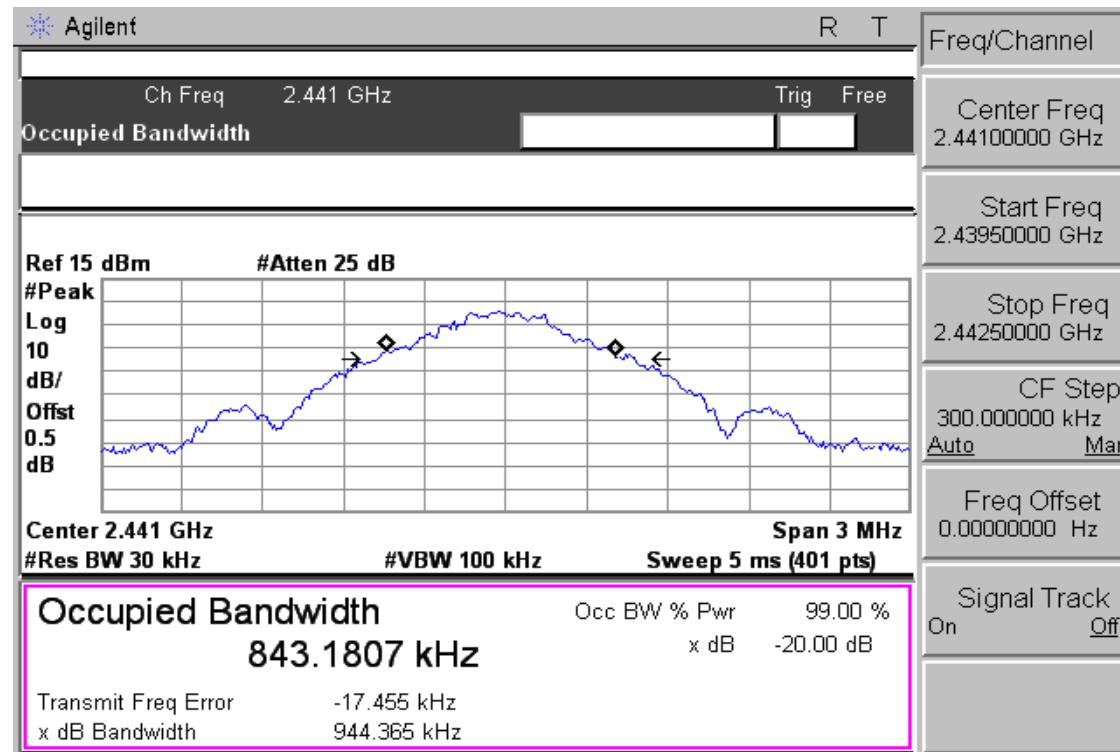




Modulation Standard: GFSK (1Mbps)
Channel: 78

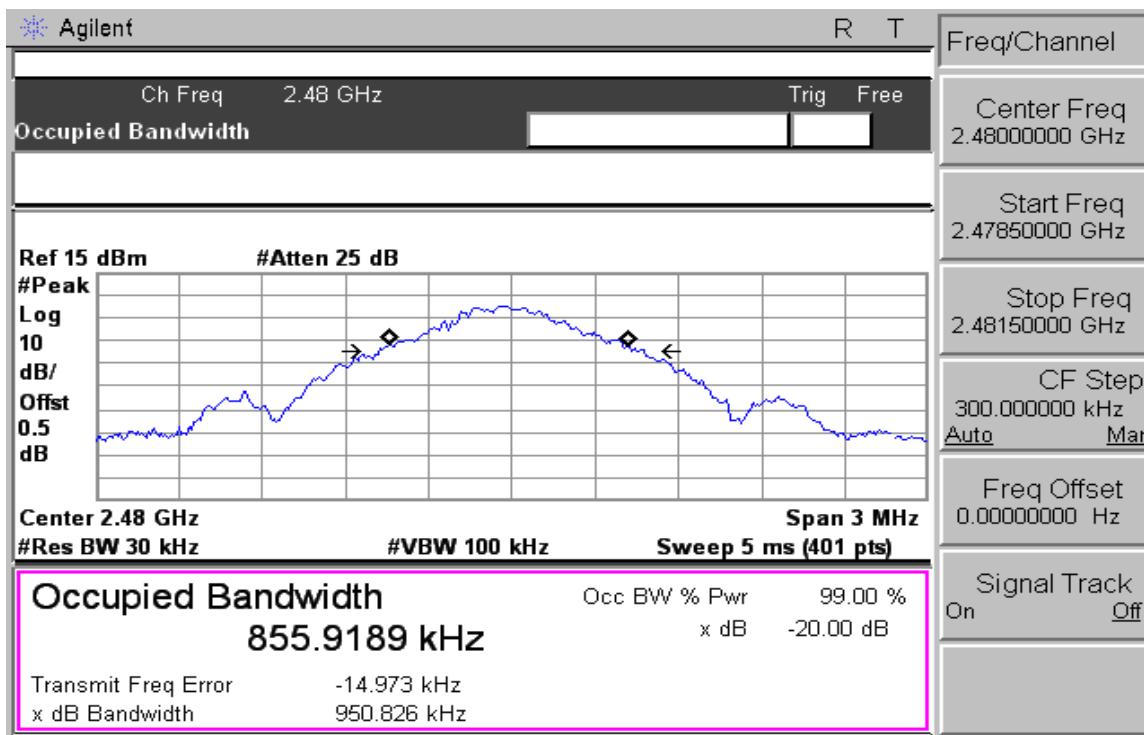


Modulation Standard: 8DPSK (3Mbps)
Channel: 00

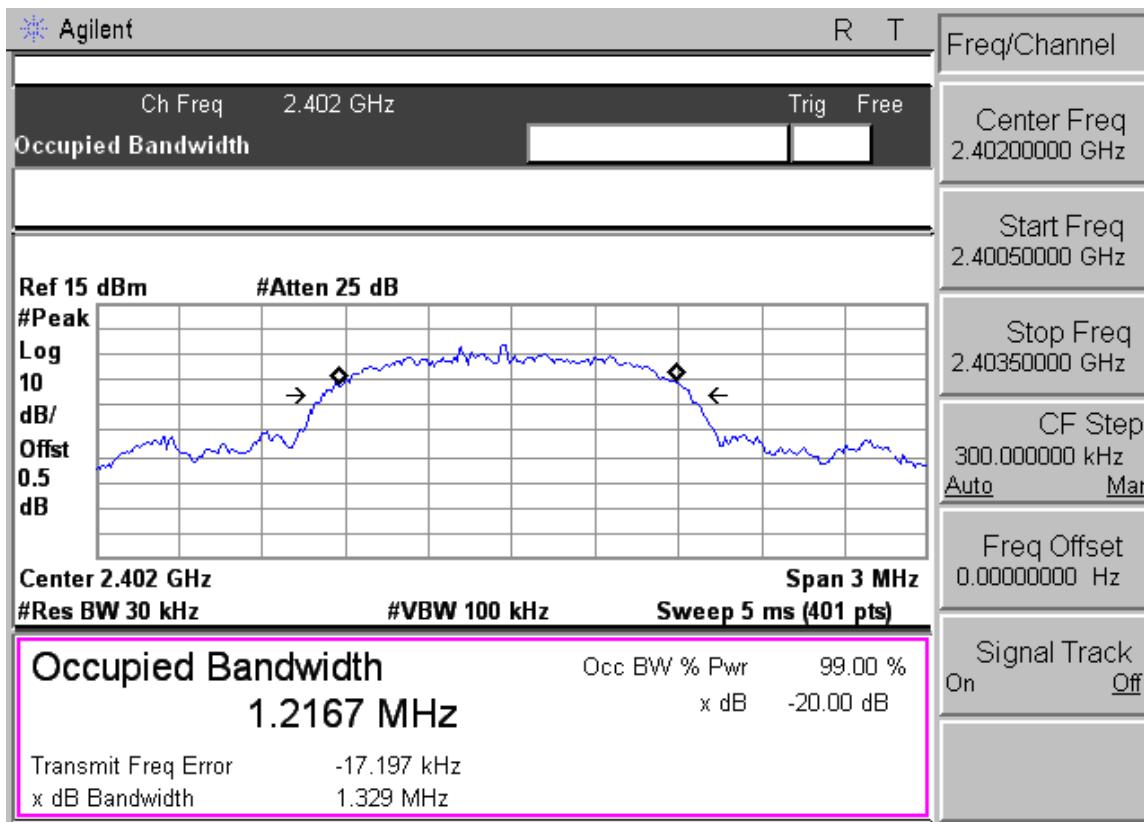




Modulation Standard: 8DPSK (3Mbps)
Channel: 39

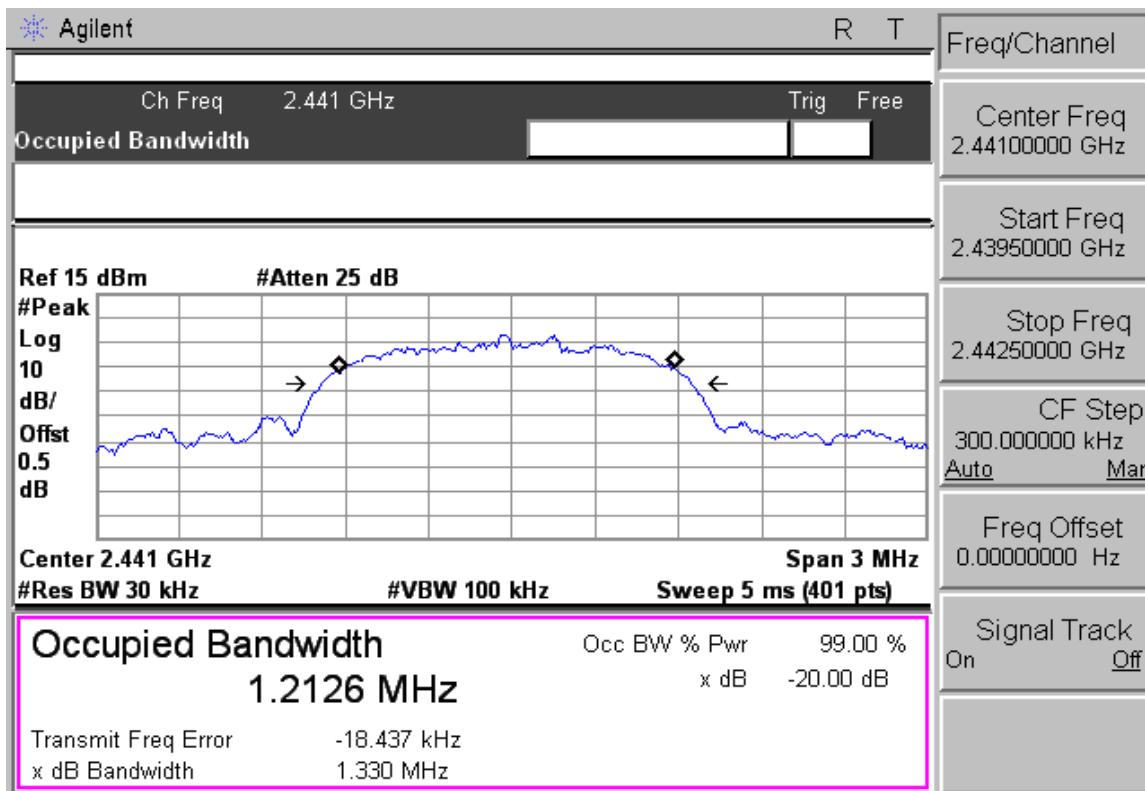

Modulation Standard: 8DPSK (3Mbps)
Channel: 78

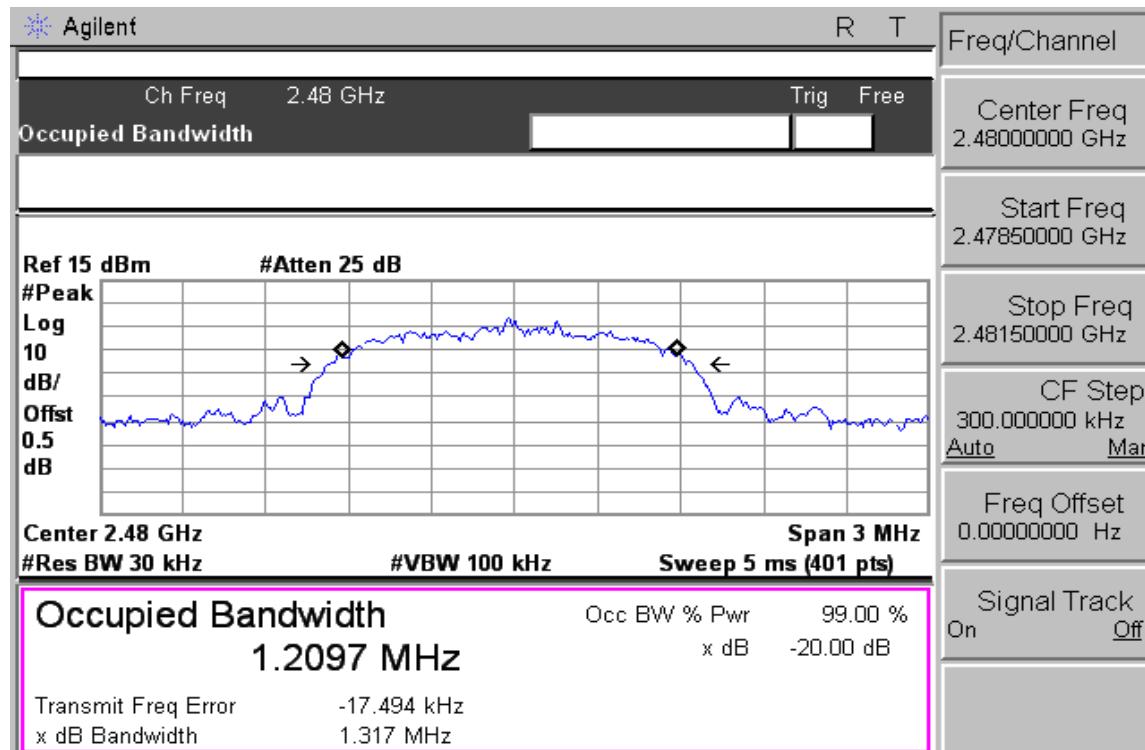



7. Frequencies Separation


7.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels.

7.3 Test Setup Layout

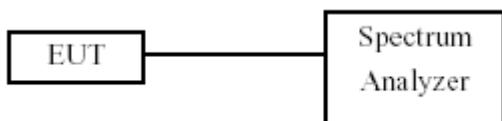

7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	Agilent	E4445A	MY45300744	2012/12/19	2013/12/18
Test Site	ATL	TE02	TE02	N.C.R.	---



7.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.000
39	2441	1.000
78	2480	1.000

Modulation Standard: 8DPSK (3Mbps)

Test Date: Feb. 20, 2013

Temperature: 24


Atmospheric pressure: 1020 hPa

Humidity: 60 %


Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.000
39	2441	1.000
78	2480	1.000



Modulation Standard: GFSK (1Mbps)
Channel: 00

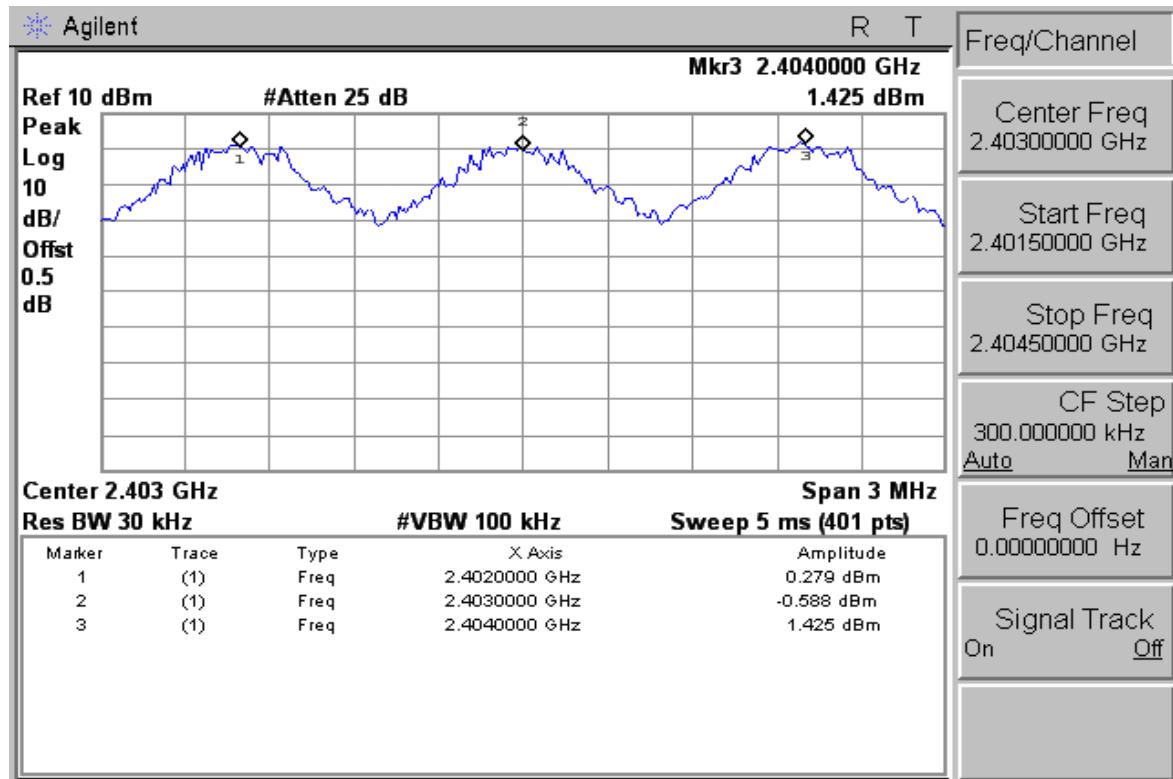


Modulation Standard: GFSK (1Mbps)
Channel: 39

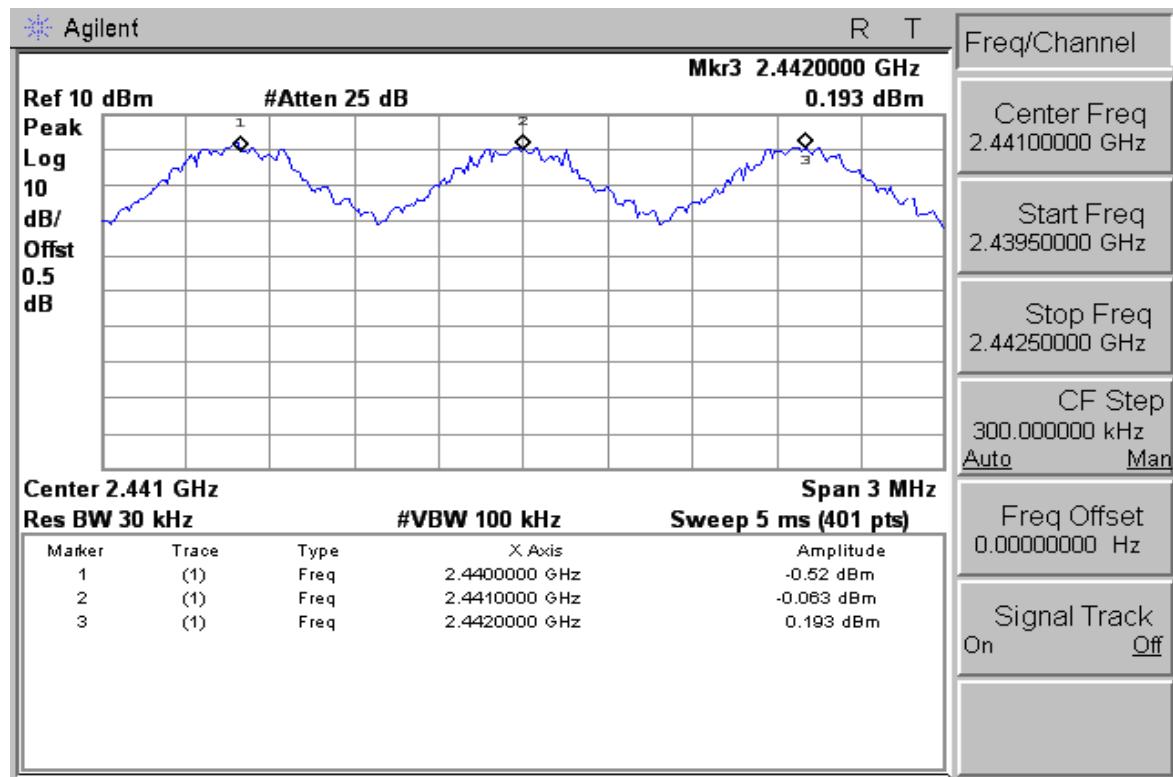




Modulation Standard: GFSK (1Mbps)
Channel: 78

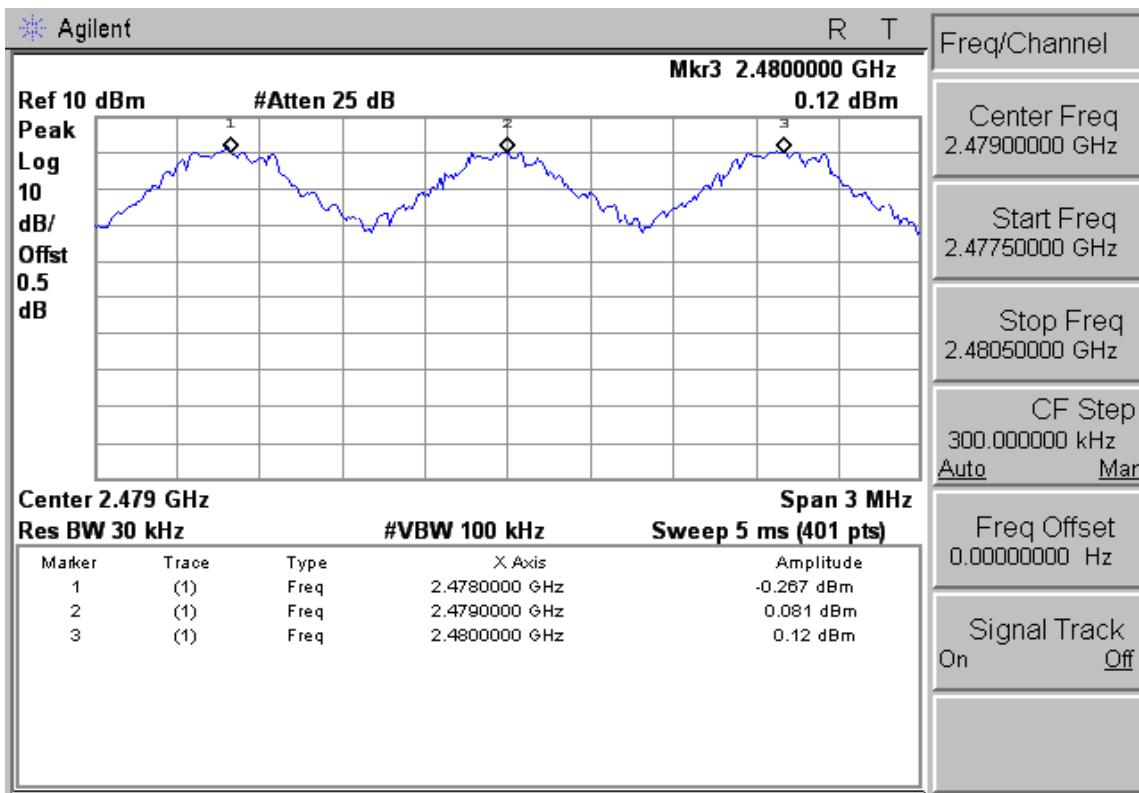


Modulation Standard: 8DPSK (3Mbps)
Channel: 00

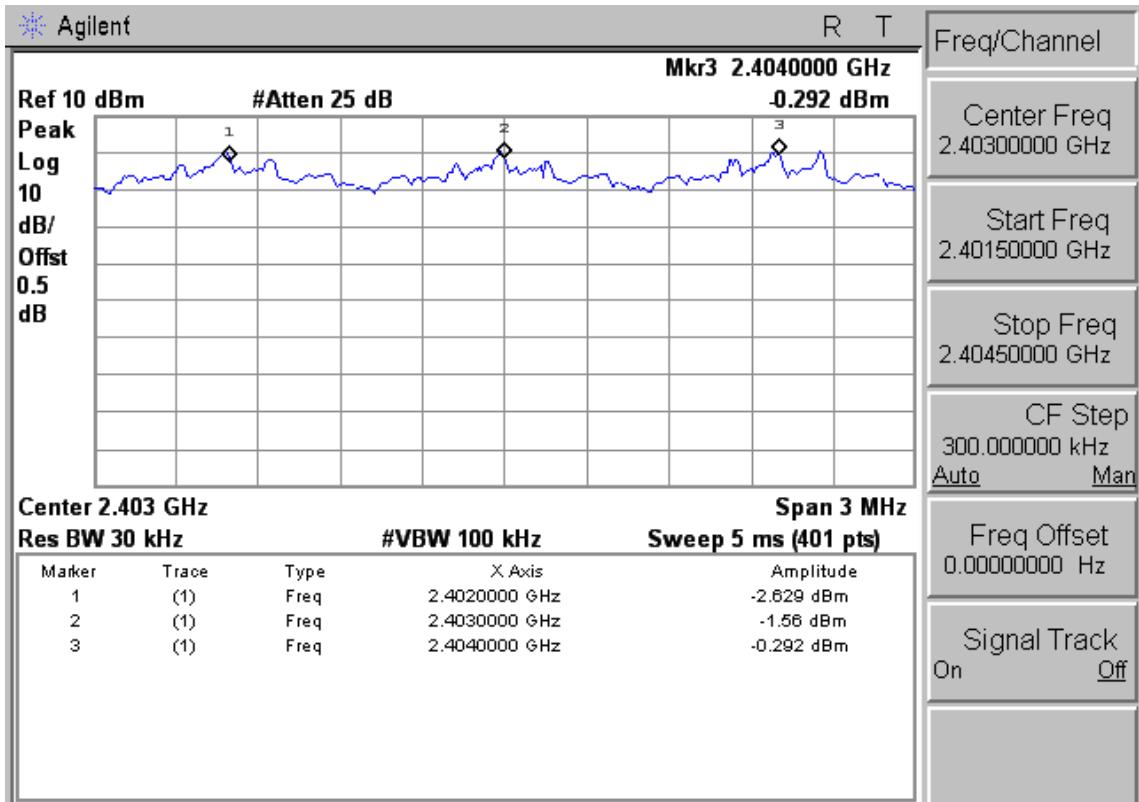




Modulation Standard: 8DPSK (3Mbps)

Channel: 39

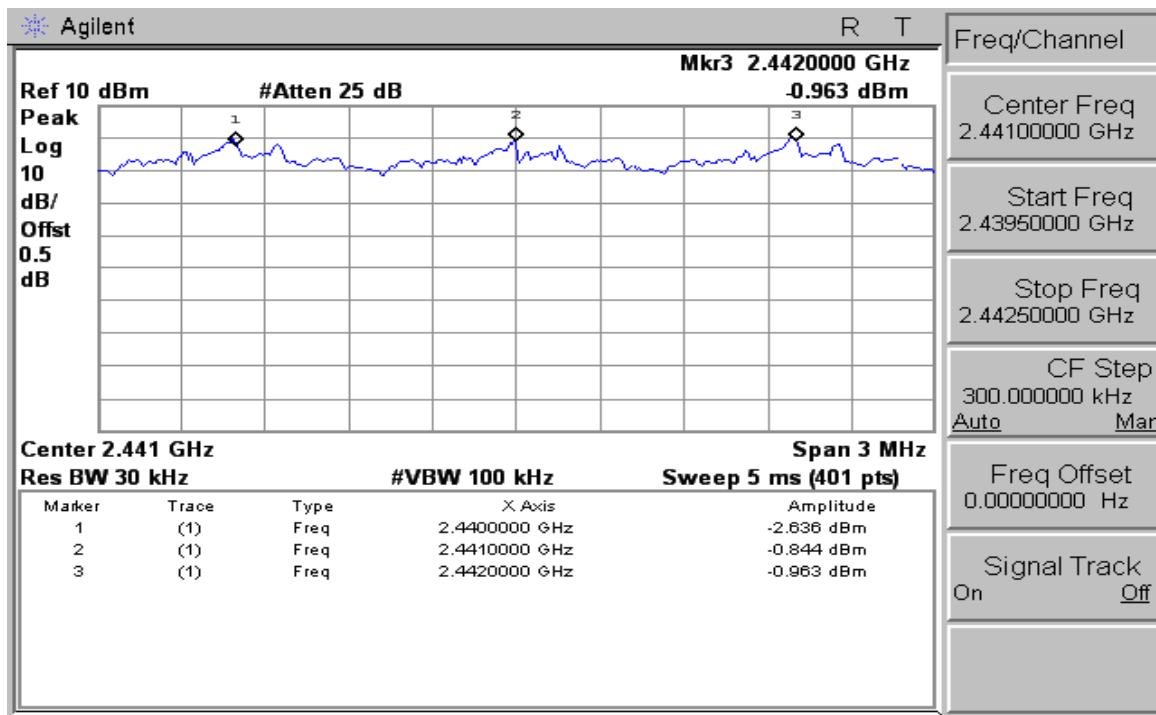

Modulation Standard: 8DPSK (3Mbps)

Channel: 78

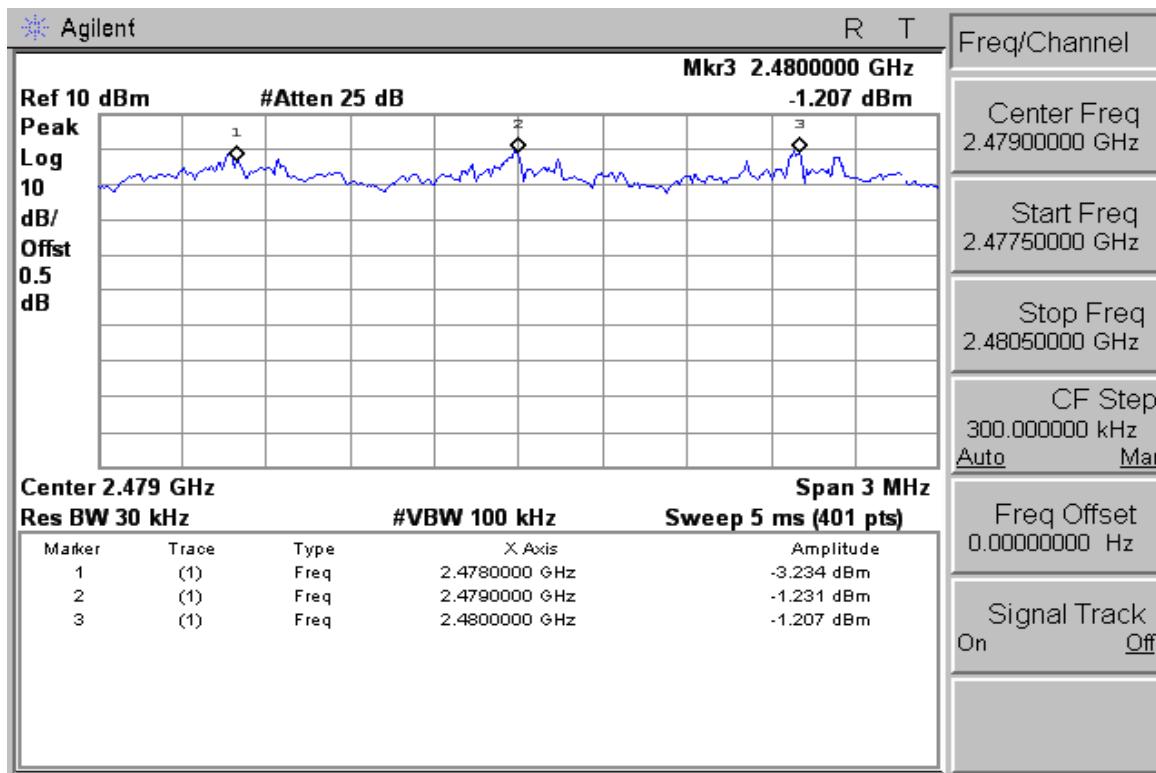



8. Dwell Time on each channel


8.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

8.3 Test Setup Layout

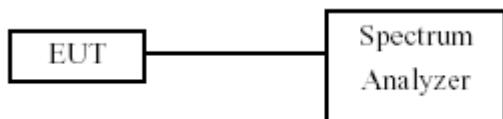

8.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	Agilent	E4445A	MY45300744	2012/12/19	2013/12/18
Test Site	ATL	TE02	TE02	N.C.R.	---



8.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Rate	Frequency (MHz)	Dwell Time (ms)
DH1	2402	160.05
DH3	2402	279.83
DH5	2402	317.76

Modulation Standard: 8DPSK (3Mbps)

Test Date: Feb. 20, 2013

Temperature: 24


Atmospheric pressure: 1020 hPa

Humidity: 60 %


Rate	Frequency (MHz)	Dwell Time (ms)
3DH1	2402	160.05
3DH3	2402	279.83
3DH5	2402	317.76



Modulation Standard: GFSK (1Mbps)
Rate: DH1

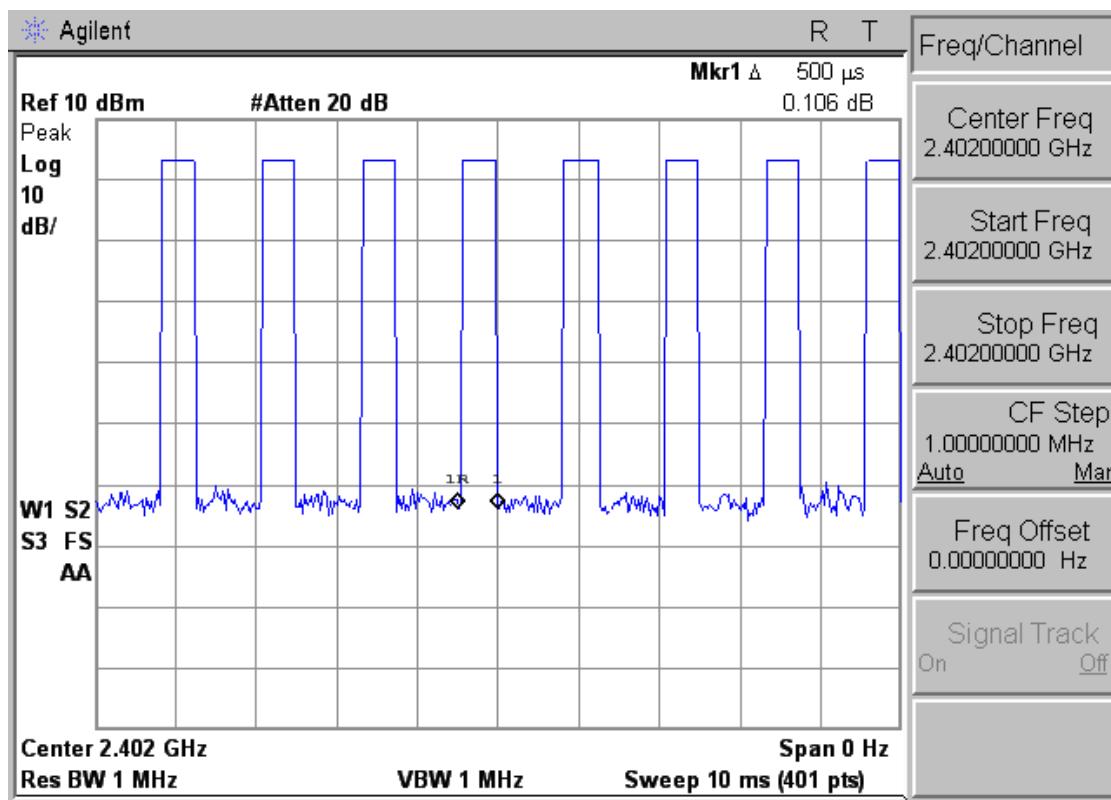


Modulation Standard: GFSK (1Mbps)
Rate: DH3

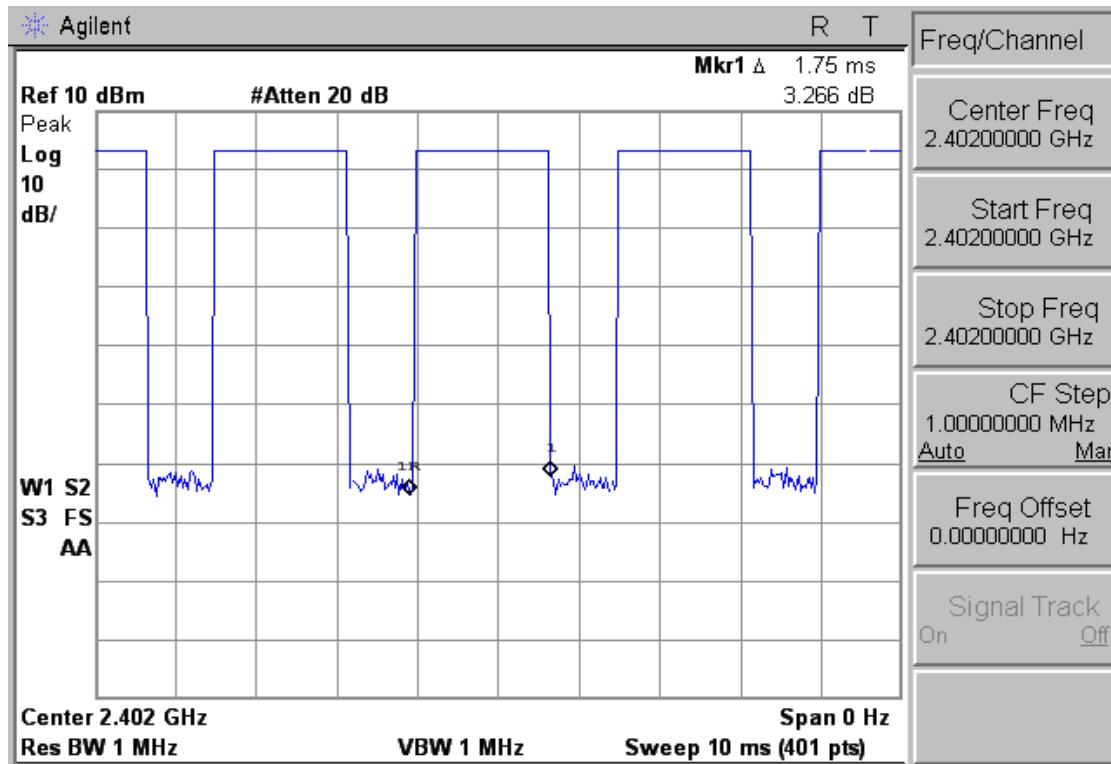




Modulation Standard: GFSK (1Mbps)
Rate: DH5

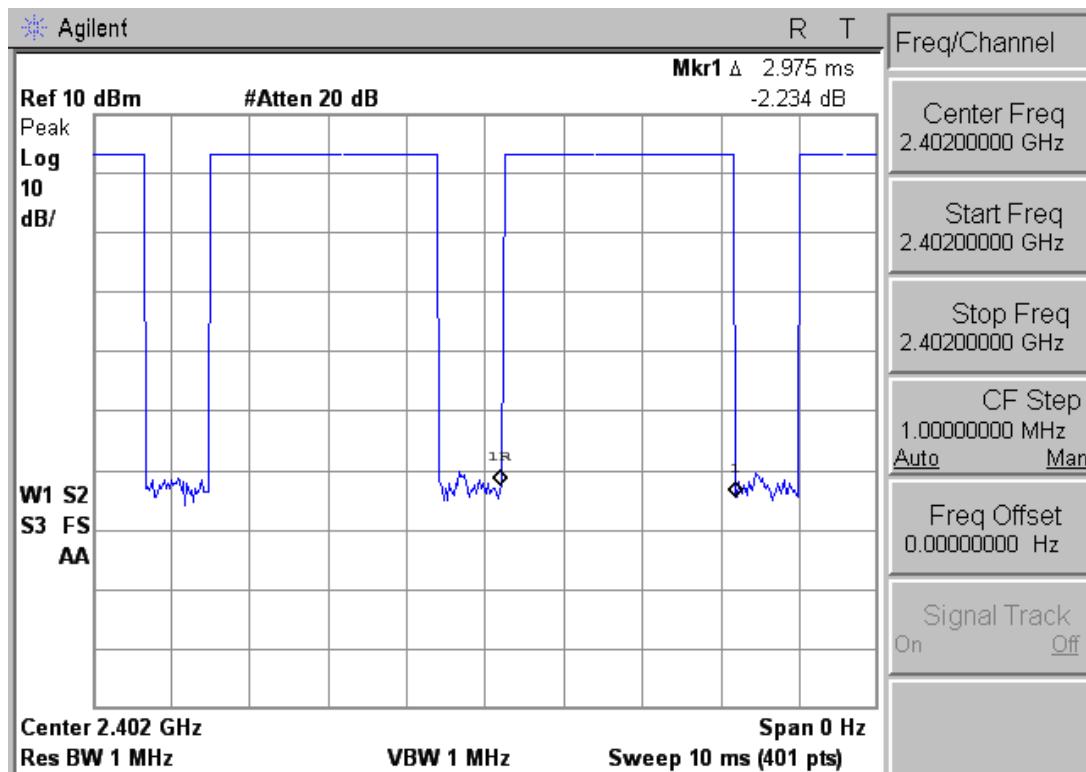


Modulation Standard: 8DPSK (3Mbps)
Rate: 3DH1

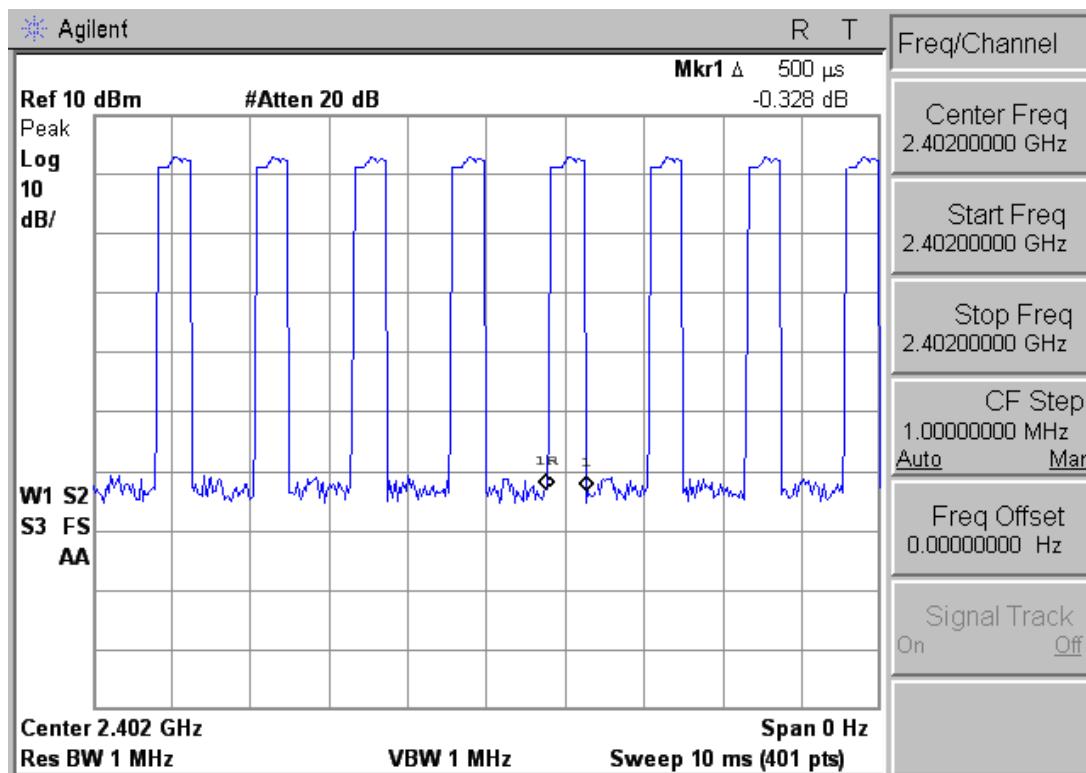




Modulation Standard: 8DPSK (3Mbps)
Rate: 3DH3

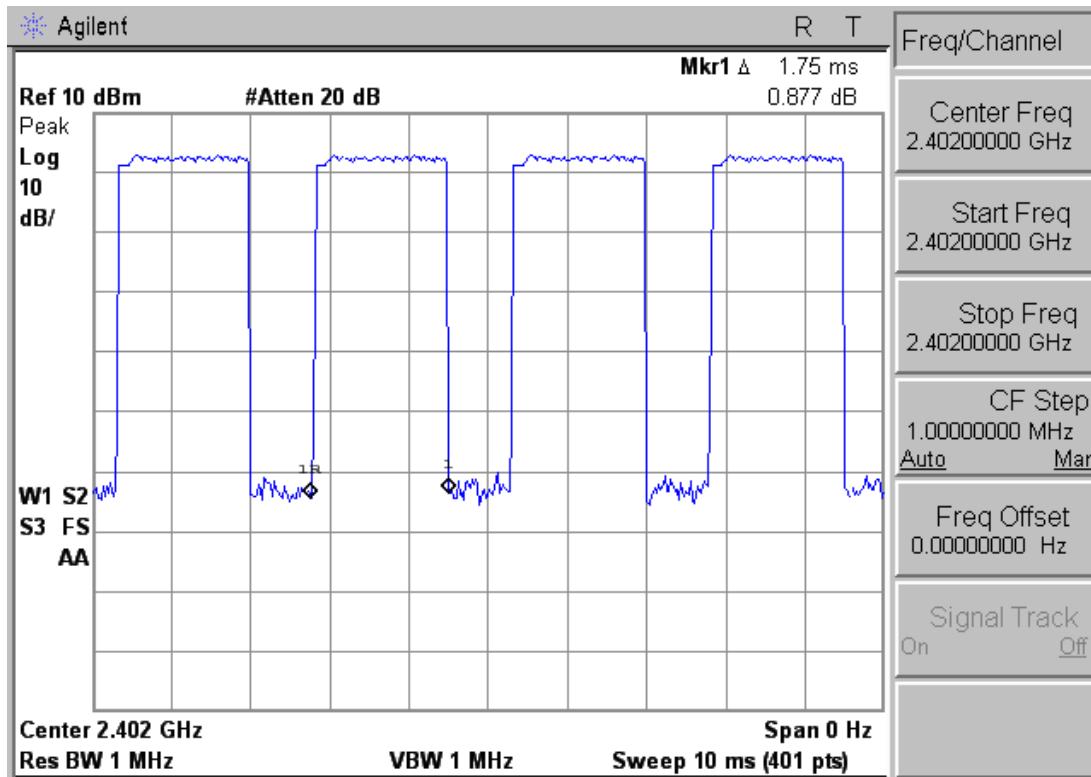

Modulation Standard: 8DPSK (3Mbps)
Rate: 3DH5

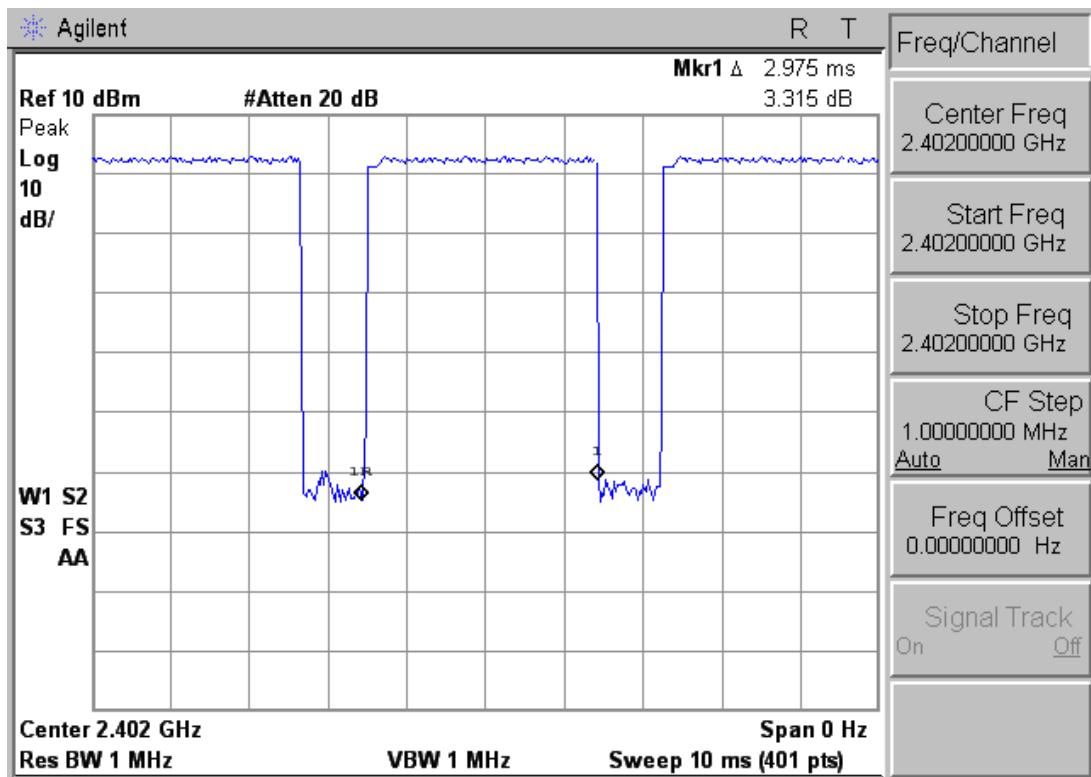



9. Number of Hopping Channels


9.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

9.3 Test Setup Layout

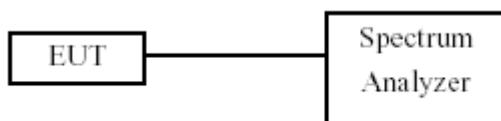

9.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	Agilent	E4445A	MY45300744	2012/12/19	2013/12/18
Test Site	ATL	TE02	TE02	N.C.R.	---

9.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Number of hopping channels:	79	Channels
-----------------------------	----	----------

Modulation Standard: 8DPSK (3Mbps)

Test Date: Feb. 20, 2013

Temperature: 24



Atmospheric pressure: 1020 hPa

Humidity: 60 %

Number of hopping channels:	79	Channels
-----------------------------	----	----------





Modulation Standard: GFSK (1Mbps)

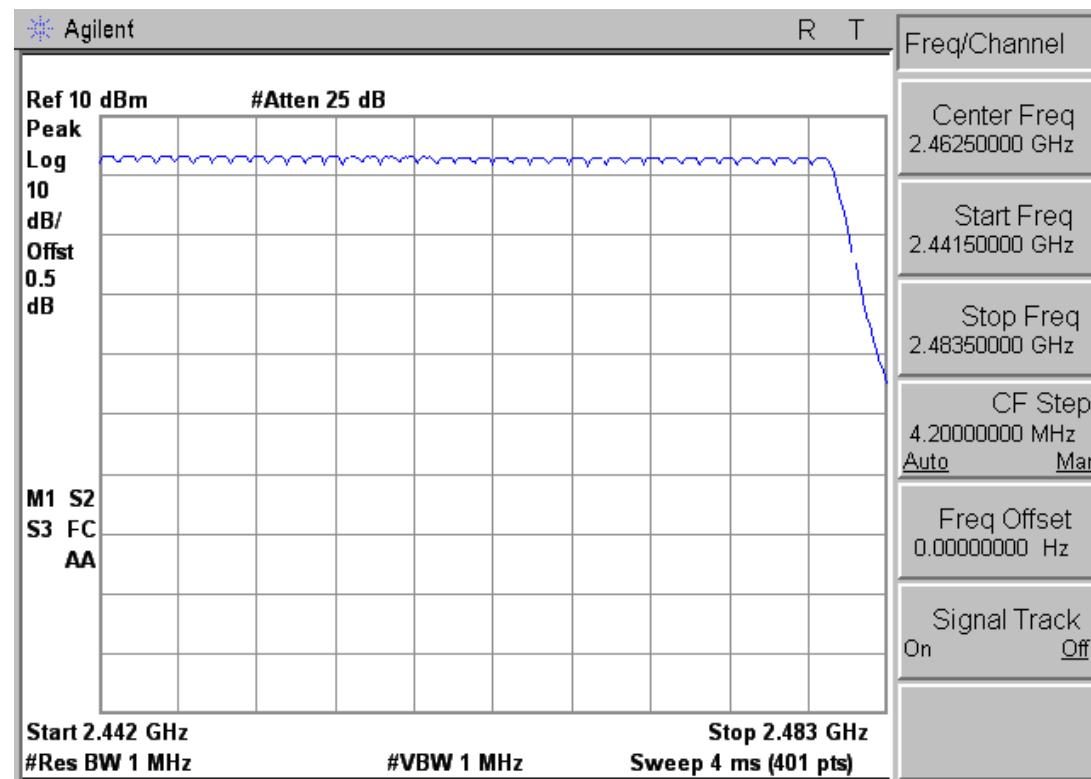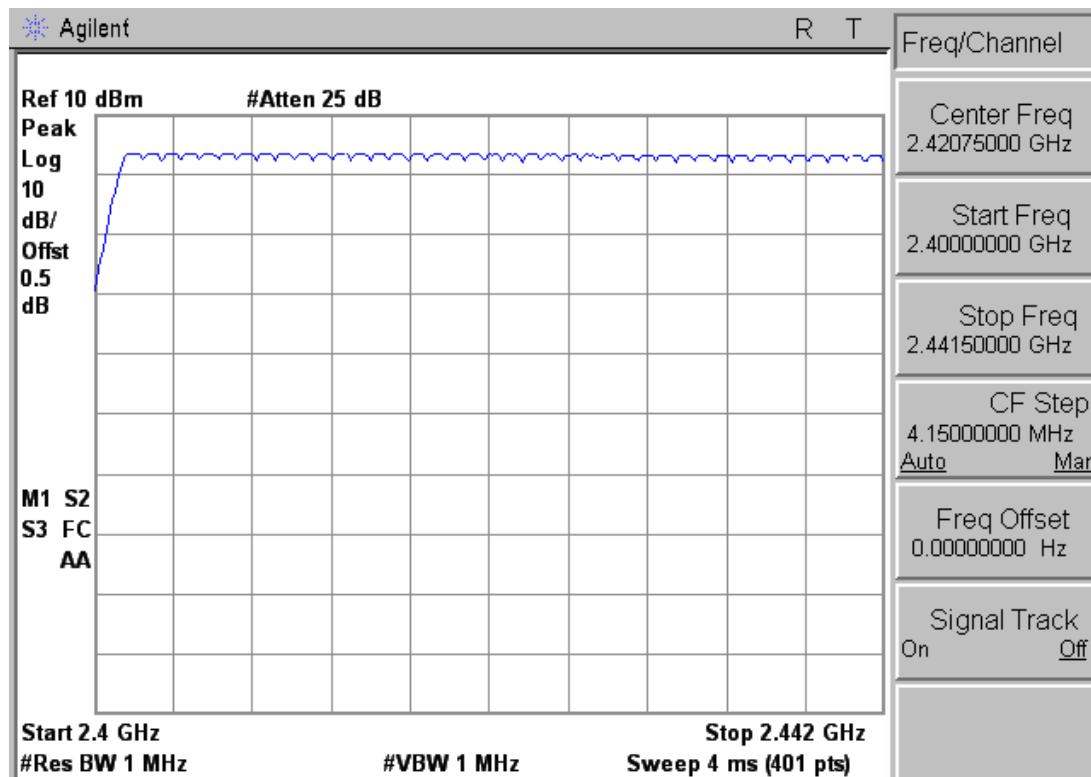



Modulation Standard: 8DPSK (3Mbps)

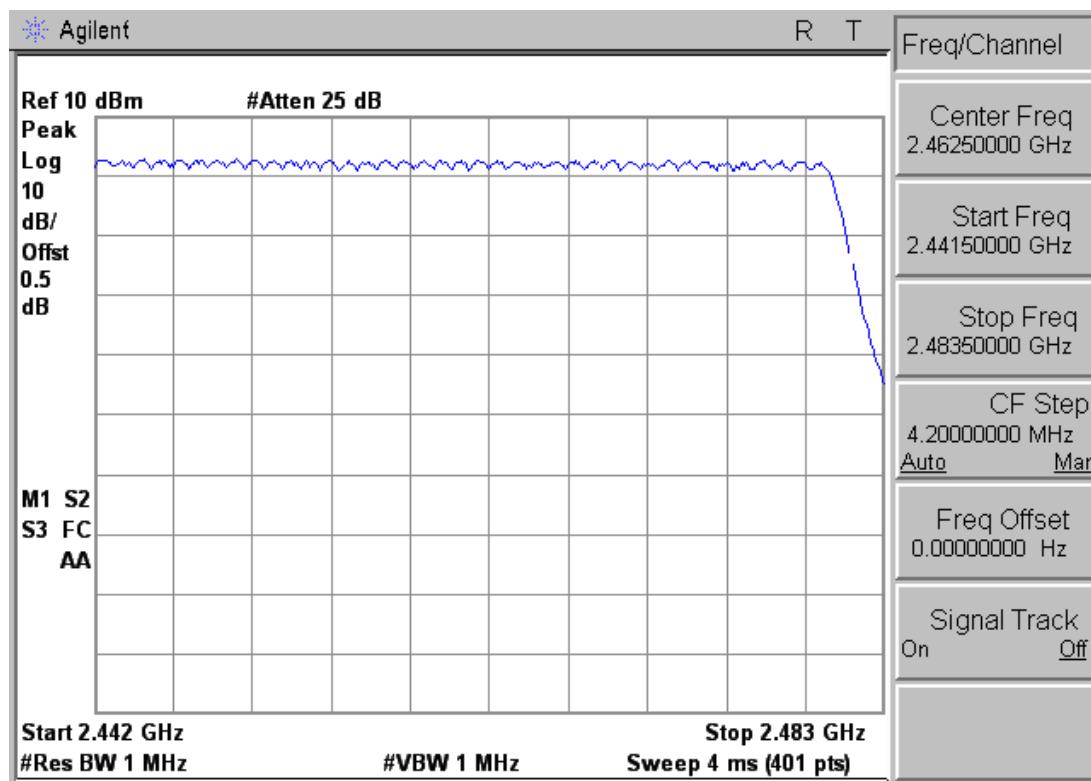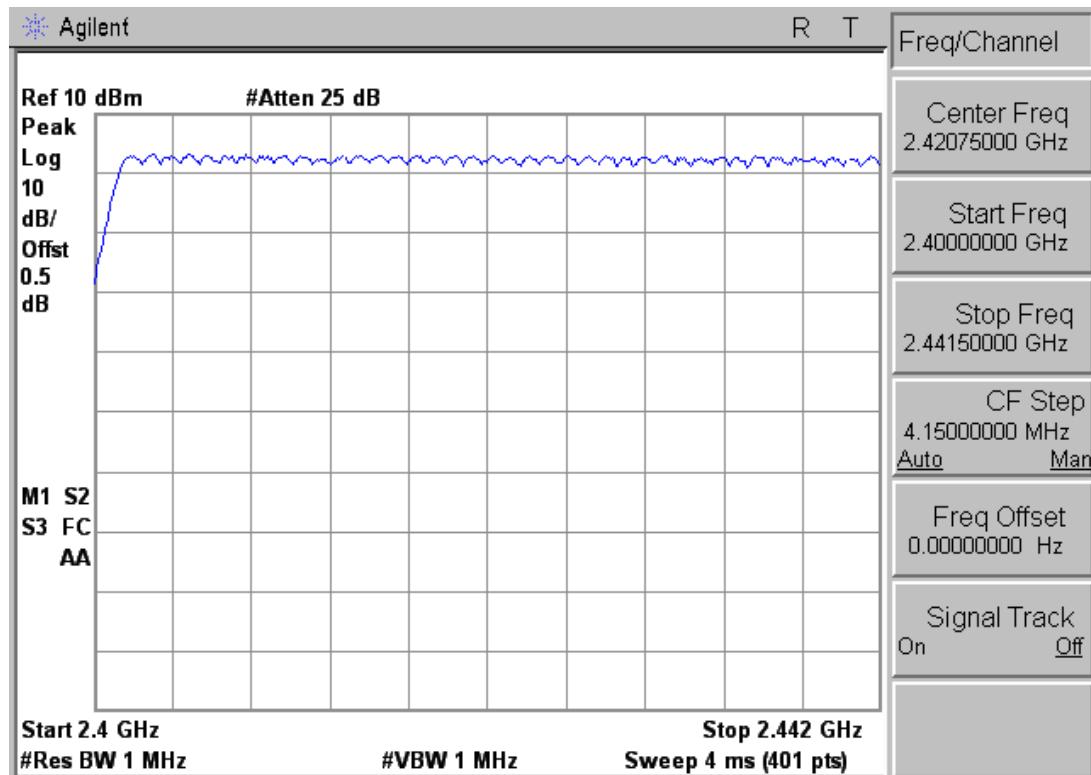



10. Maximum Peak Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout

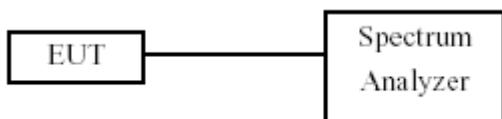

10.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	Agilent	E4445A	MY45300744	2012/12/19	2013/12/18
Test Site	ATL	TE02	TE02	N.C.R.	---



10.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	3.838	2.420
39	2441	3.541	2.260
78	2480	3.212	2.095

Modulation Standard: π/4-DQPSK (2Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	3.814	2.407
39	2441	3.533	2.256
78	2480	3.183	2.081

Modulation Standard: 8DPSK (3Mbps)

Test Date: Feb. 20, 2013

Temperature: 24


Atmospheric pressure: 1020 hPa

Humidity: 60 %


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	4.406	2.758
39	2441	4.181	2.619
78	2480	3.900	2.455



Modulation Standard: GFSK (1Mbps)
Channel: 00

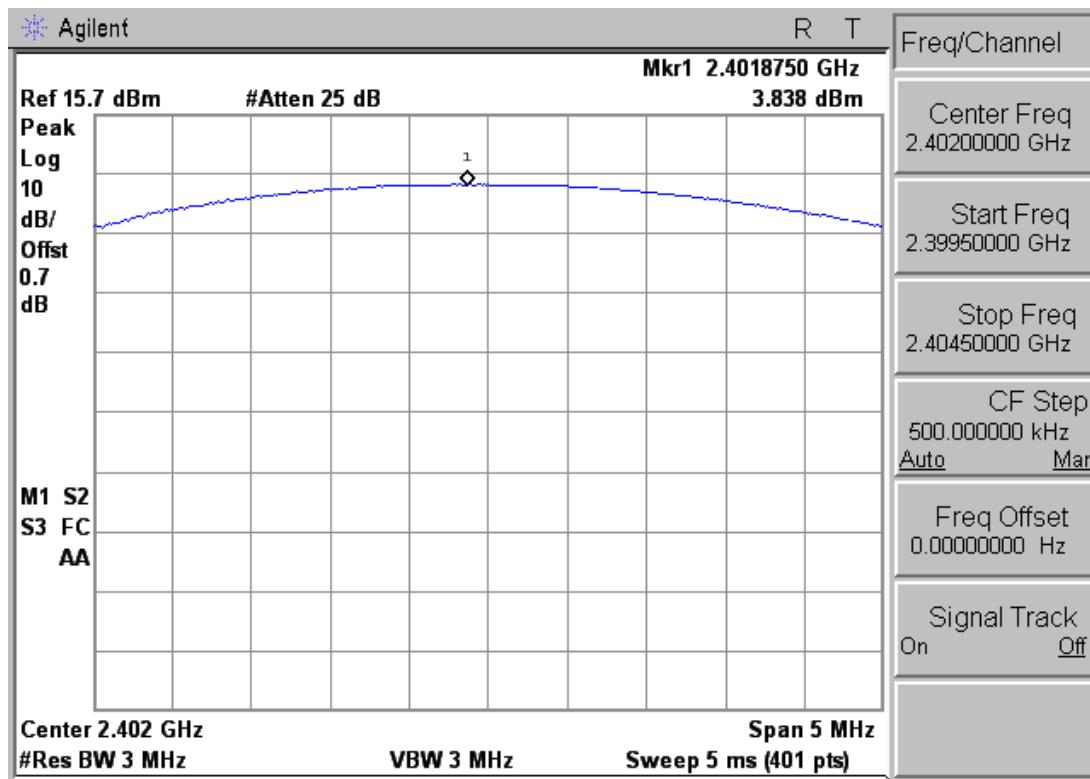


Modulation Standard: GFSK (1Mbps)
Channel: 39

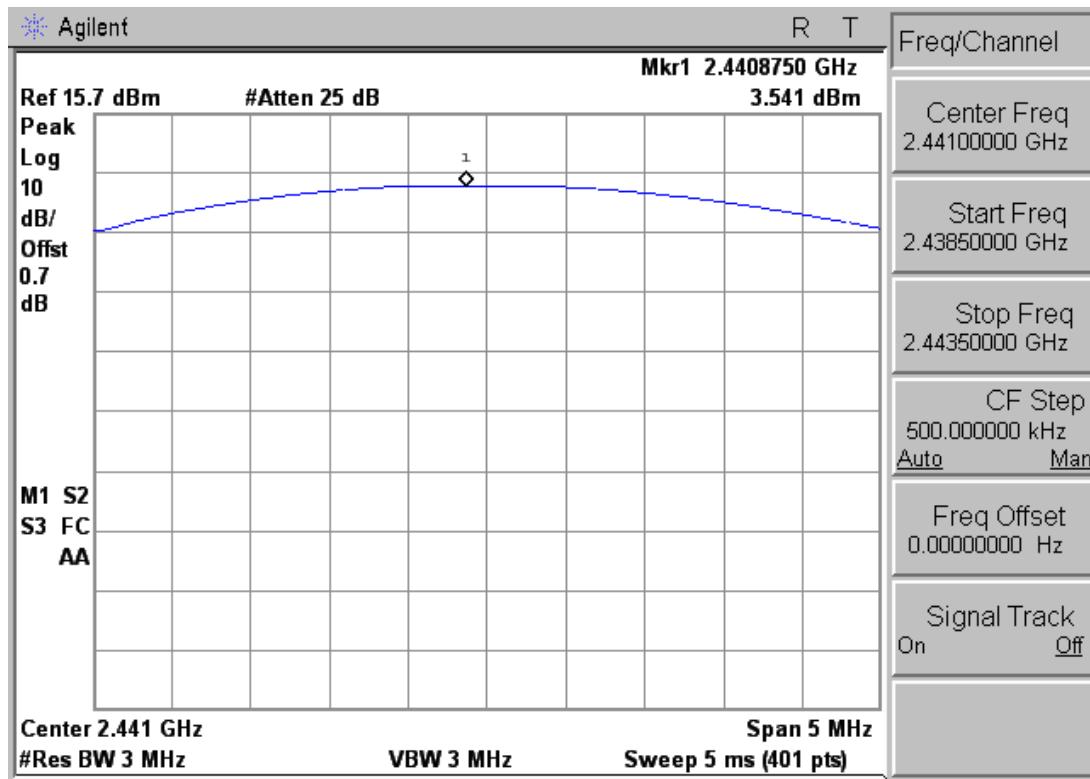




Modulation Standard: GFSK (1Mbps)
Channel: 78

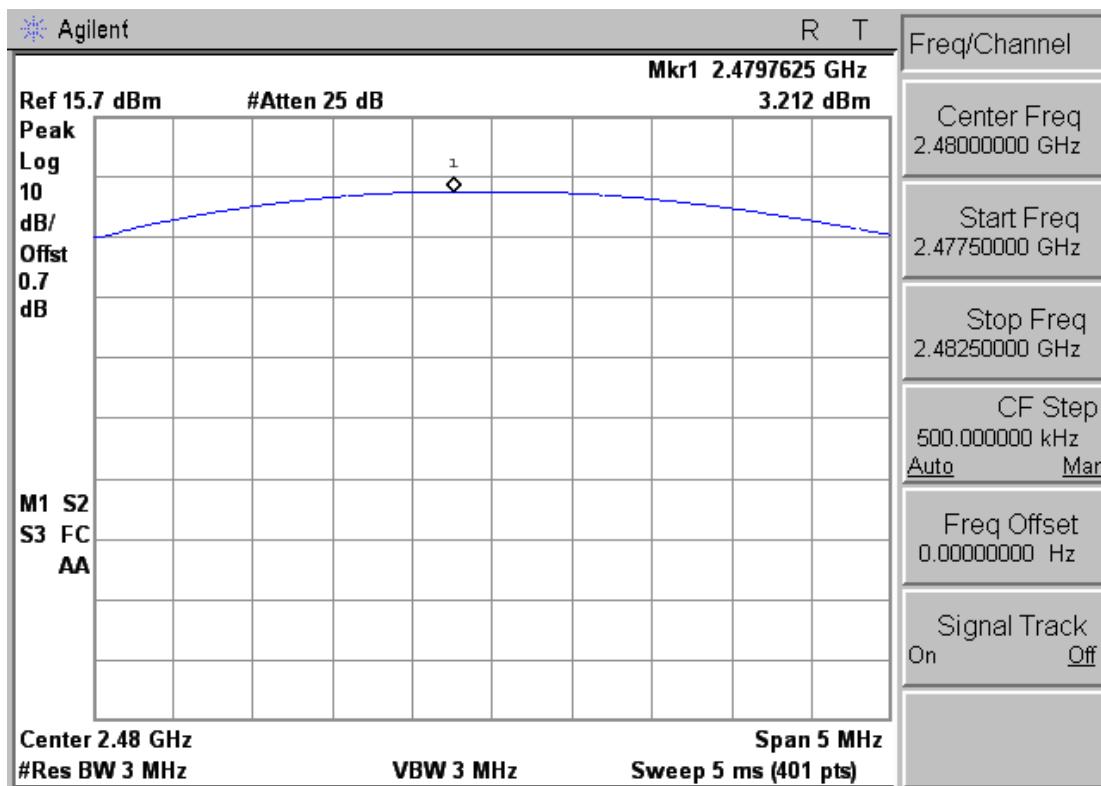


Modulation Standard: π/4-DQPSK (2Mbps)
Channel: 00

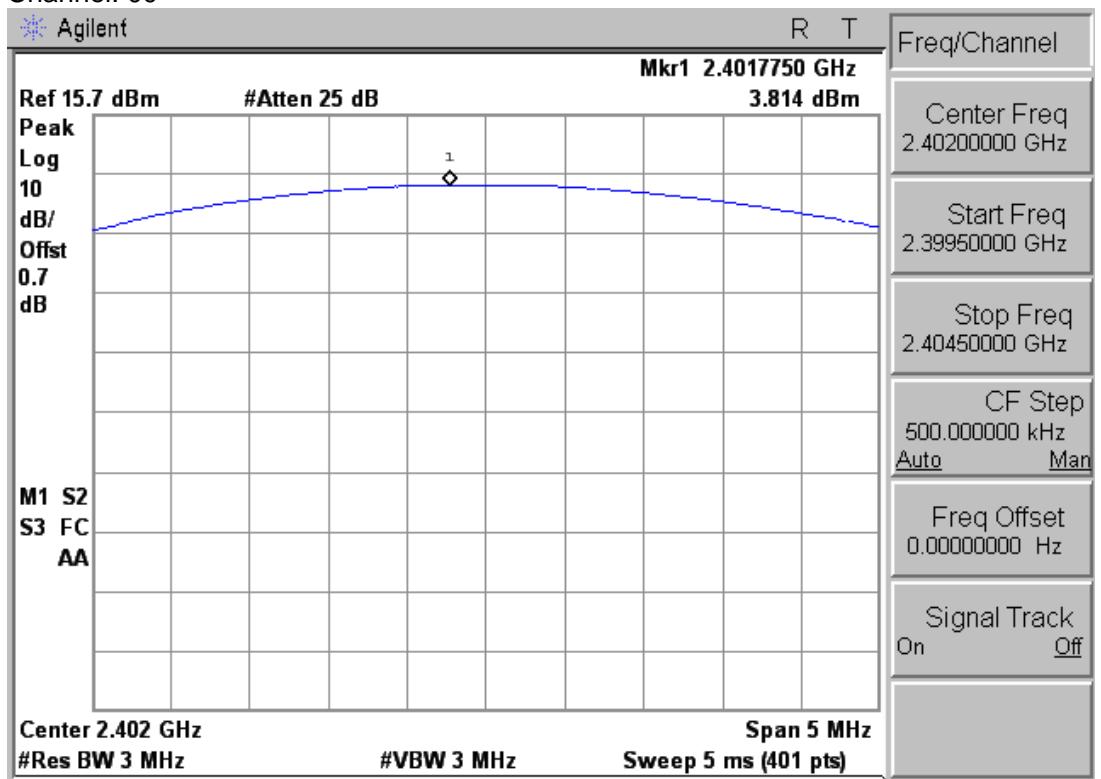




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

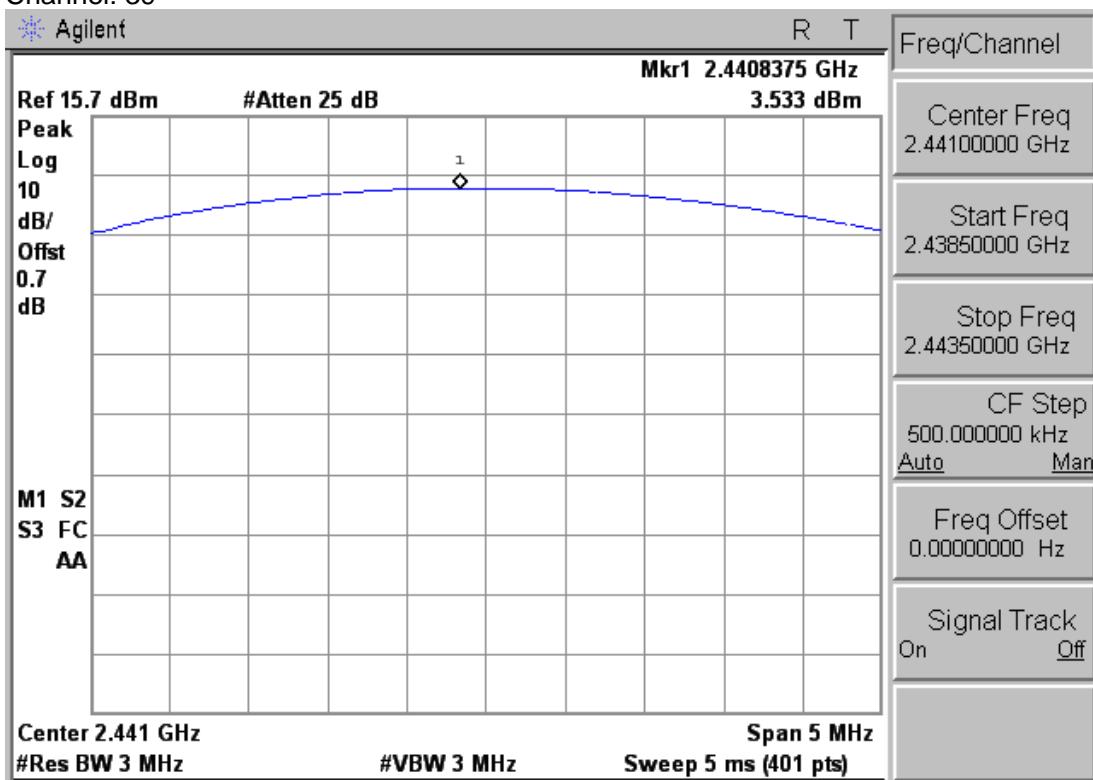


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

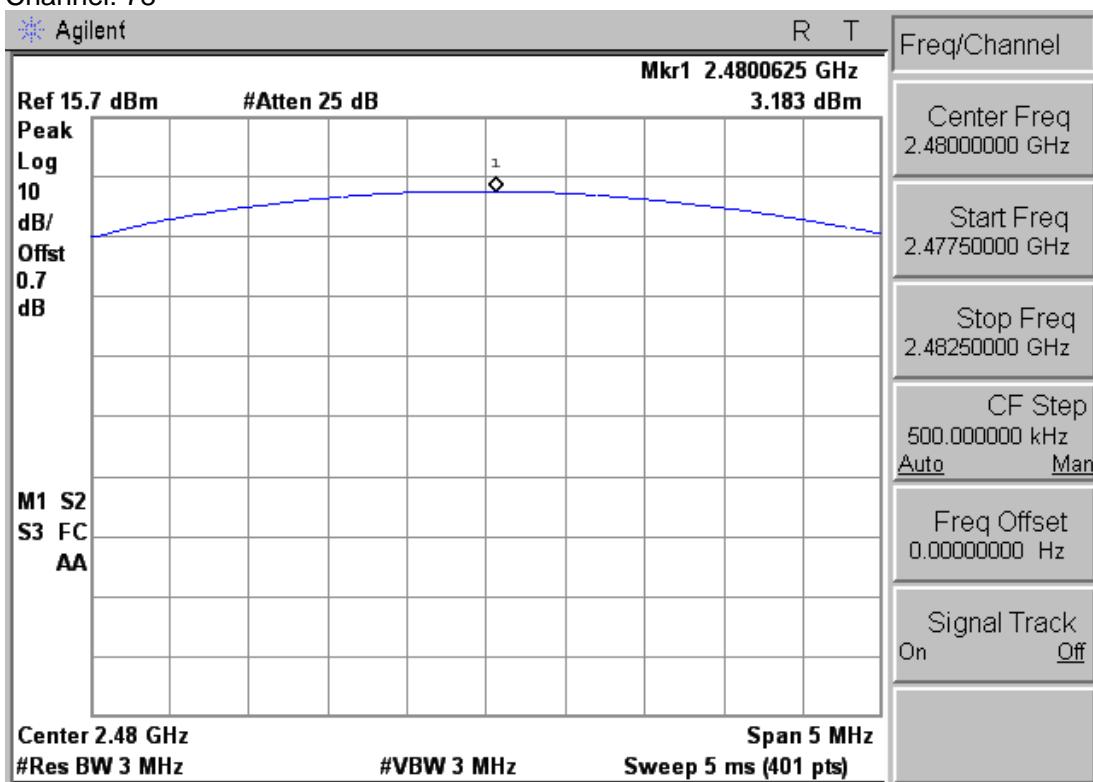




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

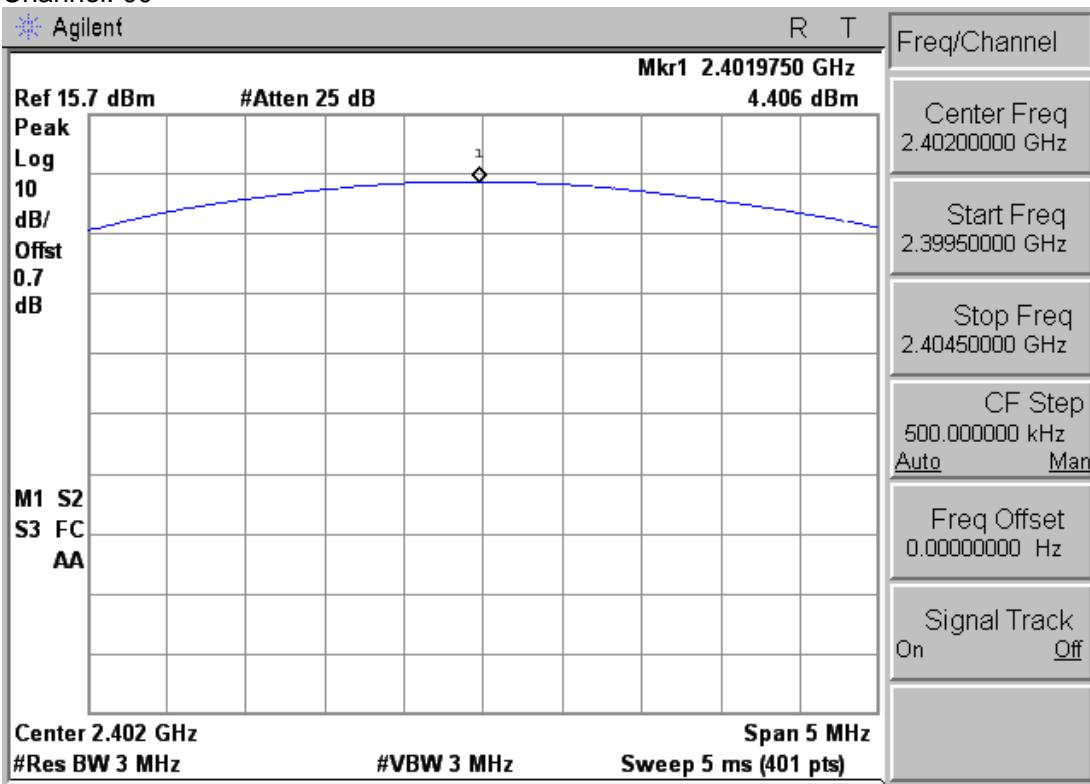


Modulation Standard: 8DPSK (3Mbps)
Channel: 39

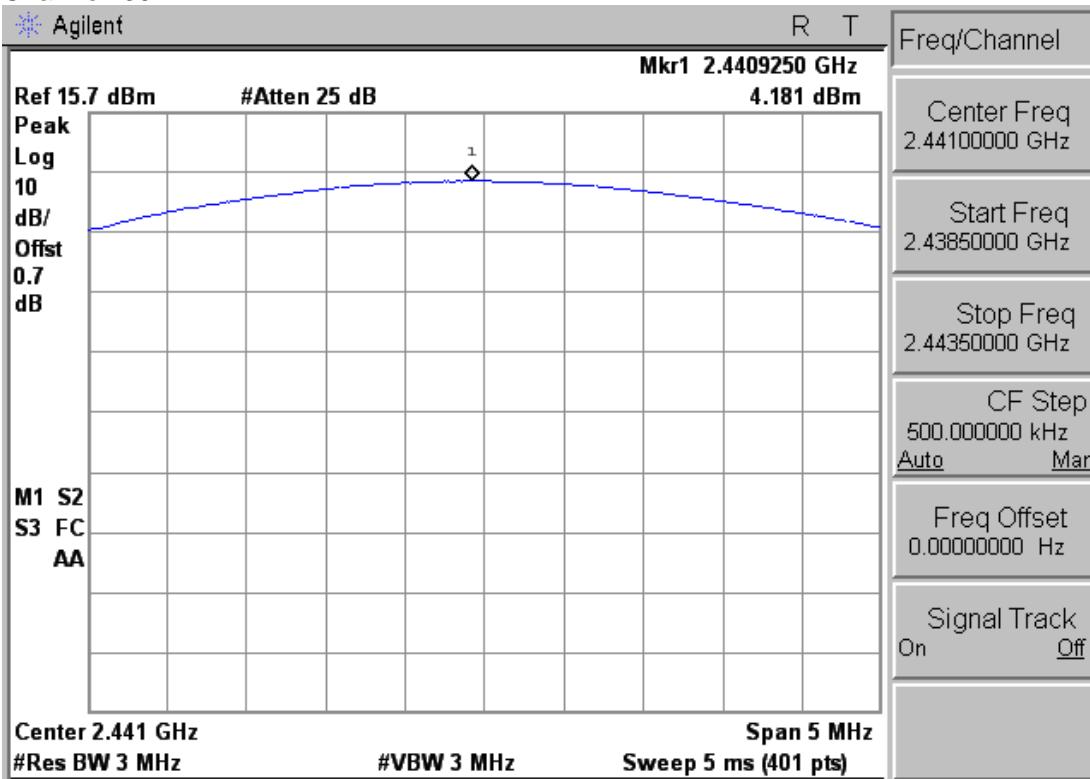



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

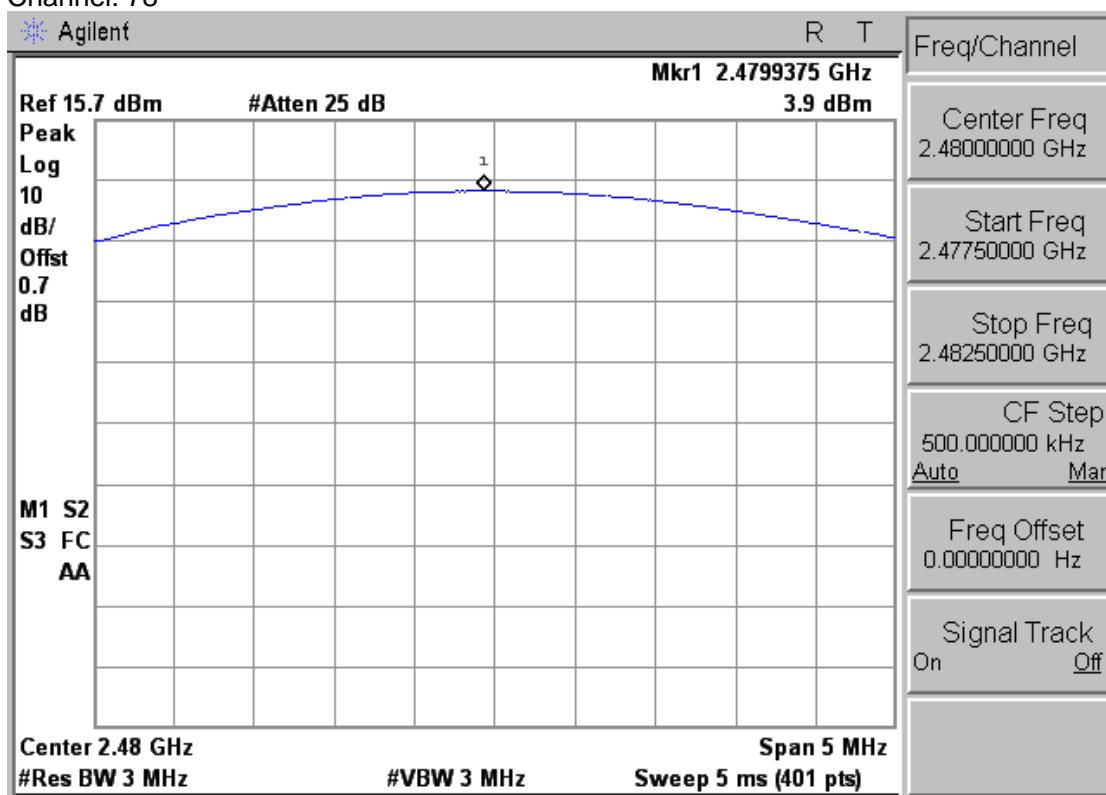



11. Band Edges Measurement


11.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

11.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

11.3 Test Setup Layout

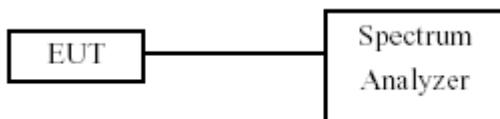

11.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	Agilent	E4445A	MY45300744	2012/12/19	2013/12/18
Test Site	ATL	TE02	TE02	N.C.R.	---



11.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Feb. 20, 2013

Temperature: 24

Atmospheric pressure: 1020 hPa

Humidity: 60 %

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2400.00	-52.54
78	2480	5483.50	-54.34

Modulation Standard: 8DPSK (3Mbps)

Test Date: Feb. 20, 2013

Temperature: 24


Atmospheric pressure: 1020 hPa

Humidity: 60 %


Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2400.00	-48.45
78	2480	2483.50	-53.59



Modulation Standard: GFSK (1Mbps)
Channel: 00

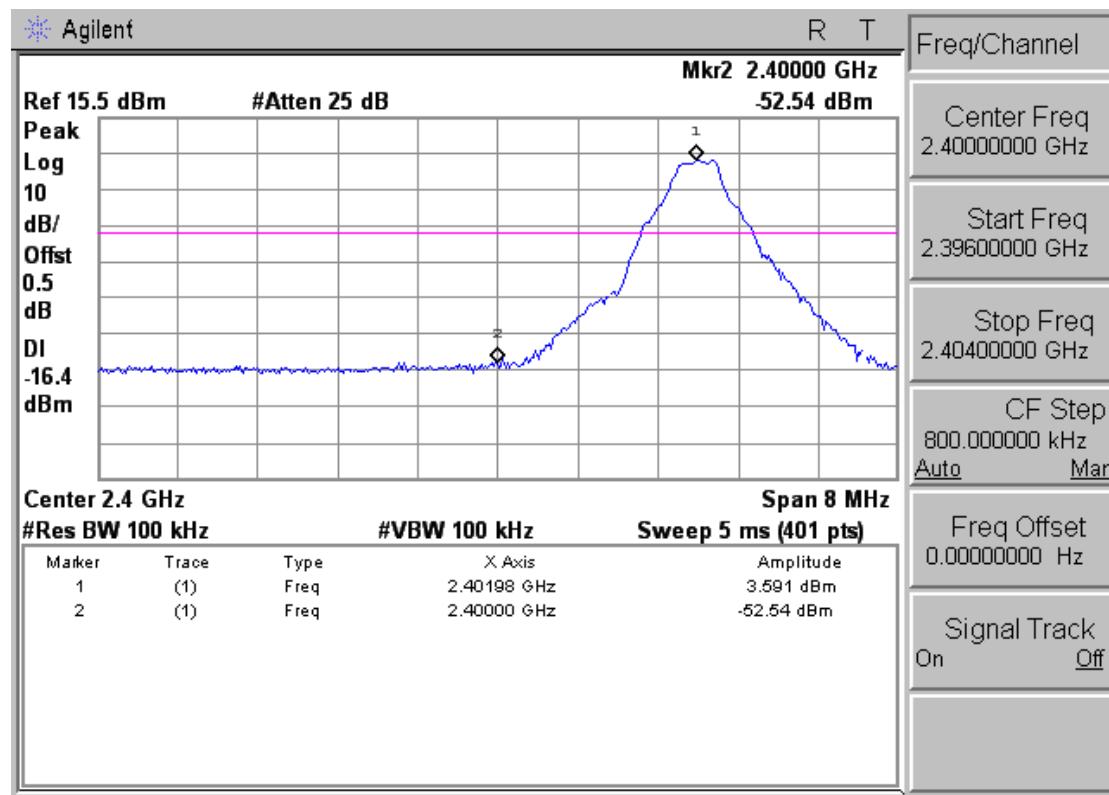


Modulation Standard: GFSK (1Mbps)
Channel: 78

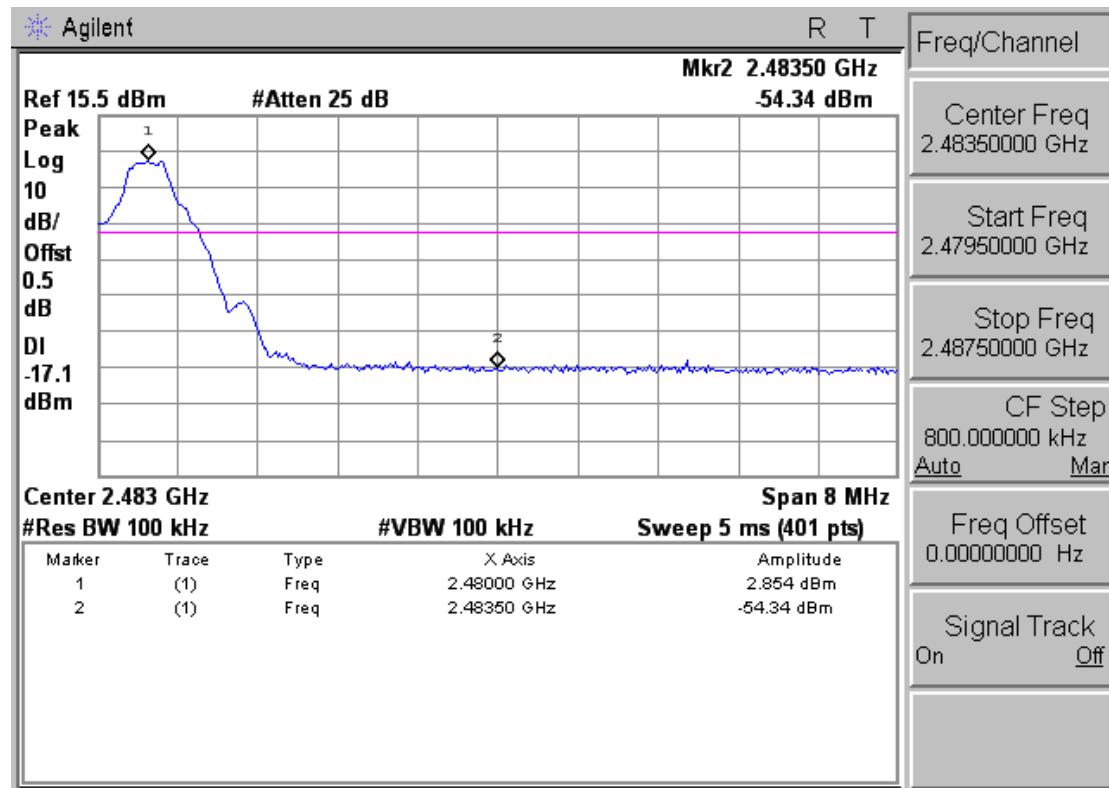




Modulation Standard: 8DPSK (3Mbps)

Channel: 00

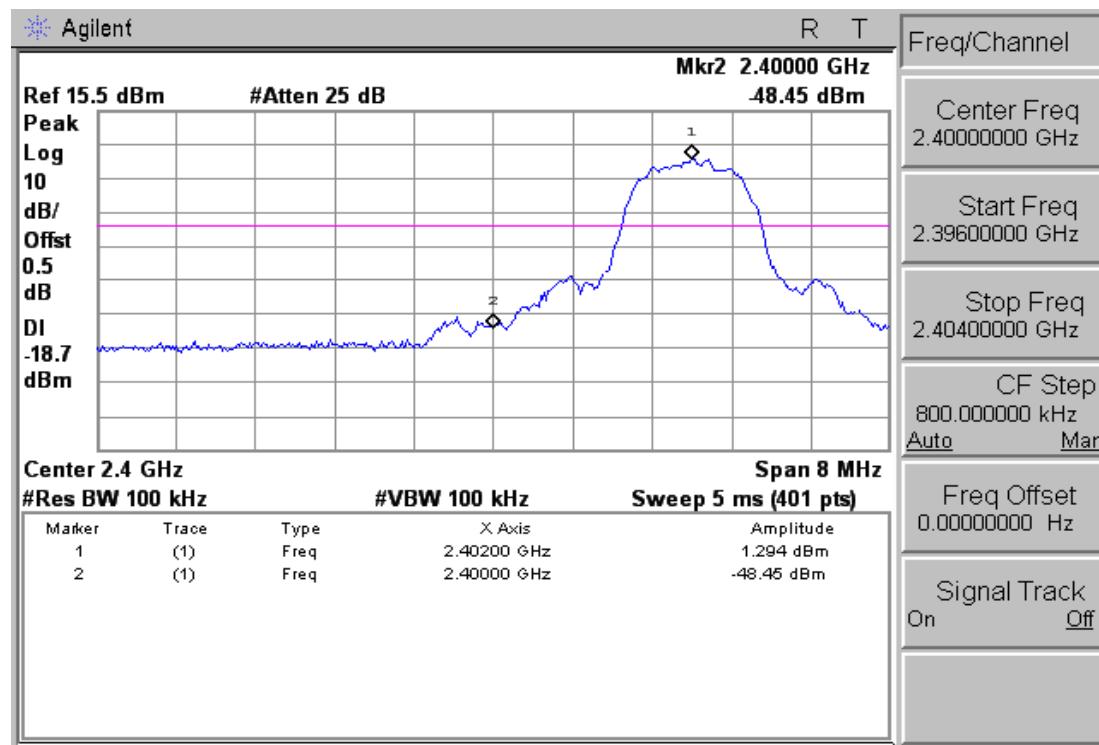

Modulation Standard: 8DPSK (3Mbps)

Channel: 78

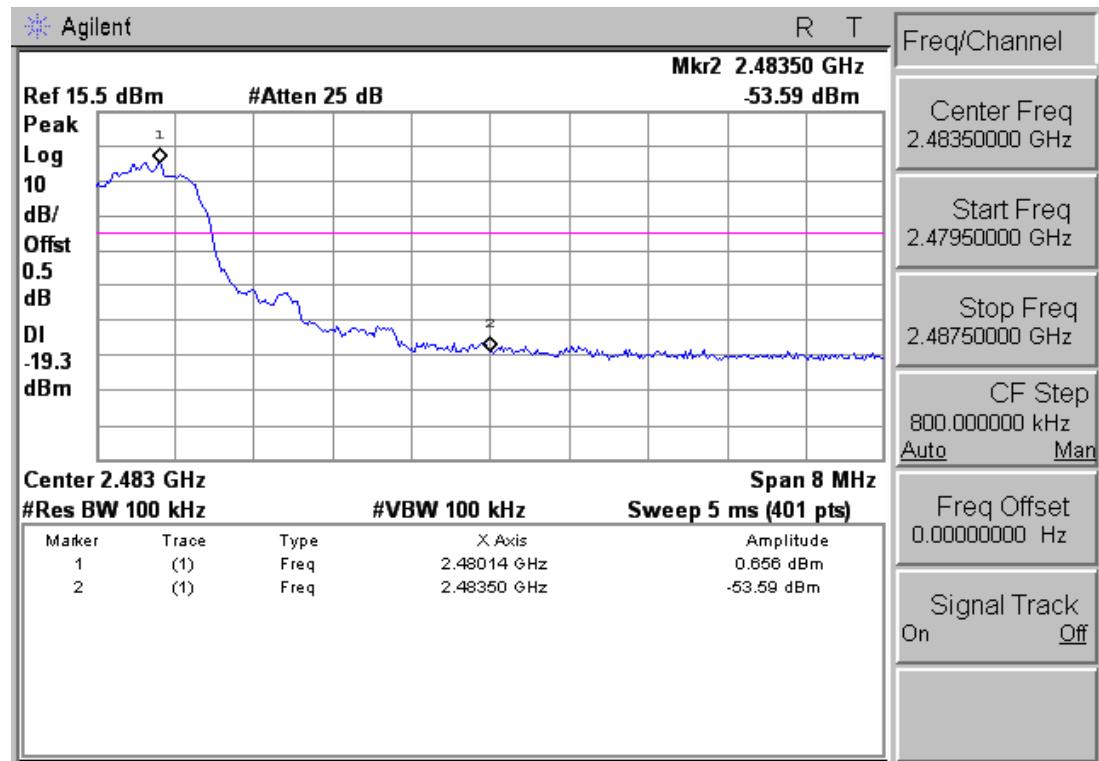



11.6 Restrict band emission Measurement Data

Test Date : Feb. 19, 2013
 Temperature : 26
 Humidity : 60 %
 Atmospheric Pressure : 1020 hPa
 Modulation Standard : GFSK (1Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2376.99	H	40.33	3.79	44.12	Peak	74	54	-29.88	---	---
---	H	---	---	---	Ave	74	54	---	---	---
2377.65	V	44.94	3.79	48.73	Peak	74	54	-25.27	---	---
---	V	---	---	---	Ave	74	54	---	---	---

Channel 78						Fundamental Frequency: 2480 MHz				
2484.04	H	43.52	4.51	48.03	Peak	74	54	-25.97	---	---
---	H	---	---	---	Ave	74	54	---	---	---
2483.80	V	45.15	4.51	49.66	Peak	74	54	-24.34	---	---
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



Test Date : Feb. 19, 2013
 Temperature : 26
 Humidity : 60 %
 Atmospheric Pressure : 1020 hPa
 Modulation Standard : 8DPSK (3Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2388.54	H	41.40	3.87	45.27	Peak	74	54	-28.73	---	---
---	H	---	---	---	Ave	74	54	---	---	---
2384.36	V	43.14	3.84	46.98	Peak	74	54	-27.02	---	---
---	V	---	---	---	Ave	74	54	---	---	---
Channel 78						Fundamental Frequency: 2480 MHz				
2483.82	H	44.56	4.51	49.07	Peak	74	54	-24.93	---	---
---	H	---	---	---	Ave	74	54	---	---	---
2483.98	V	45.82	4.51	50.33	Peak	74	54	-23.67	---	---
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

**: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.