



Electromagnetic Compatibility Test Report

Test Report No: COB 240619 Rev. 2
Issued on: June 24, 2019

Product Name
RRU High Power

Tested According to
FCC 47 CFR, Part 27
746 MHz - 757 MHz Band

Tests Performed for
Axell Wireless
Qiryat Matalon, Petah Tikva, 49002,
Tel: +972-3-918 0180

QualiTech EMC Laboratory
30 Hasivim Street, P.O.Box 7500
Petah-Tikva, 4951169, Israel
Tel: +972-3-926-6994
Fax: +972-3-928 7490



The information contained herein is the property of QualiTech, EMC Lab and is supplied without liability for errors or omissions.

*The copyright for this document vests in QualiTech, EMC Lab.
All rights reserved.*

This Test Report may not be reproduced, by any method, without the written permission of the QualiTech, EMC Lab.

If and when such permission is granted, the report must be reproduced only in the full format.

Test Personnel



Tests Performed By: -----

Dmitri Babiev



Report Prepared By: -----

Bina Talkar



Report Reviewed By: -----

Rami Nataf
EMC Lab. Manager
QualiTech EMC Laboratory

Test Report details:

Test commencement date: 03.04.2019
Test completion date: 06.06.2019
Customer's representative: David Cohen
Issued on: 29.10.2019

Revision details:

Version	Date	Details/Reasons
Rev. 1	24.06.2019	-
Rev. 2	29.10.2019	Updated according to TCB comments

Assessment information:

This report contains an assessment of the EUT against Radio testing based upon tests carried out on the samples submitted. The results contained in this report relate only to the items tested. Manufactured products will not necessarily give identical results due to production and measurement tolerances. QualiTech, Radio Lab does not assume responsibility for any conclusion and generalization drawn from the test results with regards to other specimens or samples of type of the equipment represented by test item.

The EUT was set up and exercised using the configuration, modes of operation and arrangements defined in this report only.

Modifications:

Modifications made to the EUT

None.

Modifications made to the Test Standard

None.

Summary of Compliance Status

Test Spec. Clause	Test Case	Remarks
Specific Requirements		
-KDB 935210 D05 v01r02, sec. 3.3	Out-of-Band Rejection	Pass
General Requirements		
-47 CFR §2.1049(h) -KDB 935210 D05 v01r02, sec.3.4	Occupied Bandwidth - Input-versus-output signal comparison	Pass
-47 CFR §27.50(b)(4) -47 CFR §2.1046(a) -KDB 935210 D05 v01r02, sec 3.5.4	Mean Output Power and Amplifier/Booster Gain	Pass
-47 CFR §27.53(c)(1) -47 CFR §2.1051 -KDB 935210 D05 v01r02, sec. 3.6.2, Conducted	Out-of-Band/Out-of-Block & Intermodulation Emissions Conducted Measurements	Pass
-47 CFR §27.53(c)(1), (c)(3), (f) -47 CFR §2.1051 -KDB 935210 D05 v01r02, sec. 3.6.3, Conducted	Spurious Emission Conducted Measurement	Pass
-47 CFR §27.53(c)(1), (c)(3), (f) -47 CFR §2.1053 -KDB 935210 D05 v01r02, sec. 3.8, Radiated	Spurious Emissions – Radiated Measurement	Pass
-47 CFR §27.54 -47 CFR §2.1055 -KDB 935210 D05 v01r02, sec. 3.7, Conducted	Frequency Stability	Pass



Table of Contents

1. GENERAL.....	6
1.1. Referenced documents.....	6
1.2. Product Description.....	7
2. TEST FACILITY & UNCERTAINTY OF MEASUREMENT.....	9
2.1. Accreditation / Registration reference.....	9
2.2. Test Facility description.....	9
3. EXAMINATION TEST RESULTS.....	11
3.1. Out-of-Band Rejection.....	11
3.2. Occupied Bandwidth - Input-versus-output signal comparison.....	12
3.3. Mean Output Power and Amplifier/Booster Gain.....	14
3.4. Out-of-Band/Out-of-Block & Intermodulation Emissions Conducted Measurements.....	15
3.5. Spurious Emission Conducted Measurement.....	18
3.6. Spurious Emission, Radiated Measurements.....	25
3.7. Frequency stability.....	32
4. APPENDIX.....	33

1. General

1.1. Referenced documents

KDB 935210 D05 v01r02 : Measurements Guidance for Industrial and Non-consumer Signal Booster, Repeater and Amplifiers Devices.

ANSI/TIA-603-D : Land Mobile FM or PM Communications Equipment and Performance Standards.

1.2. Product Description

FCC ID: NEO43ID7D8C17C19A

IC: 8749A-43ID7817C19


Model Numbers: id-DAS-RRU-M-4307-4308-4317-4319-AC-F

Serial Number: 18061383

Description of the EUT system/test Item:

idRU – The idRU is an IP 65 outdoor as well as indoor four-band remote unit, where two units can be cascaded through a CPRI link to support eight bands. Each band can provide maximum power of 43 dBm ± 0.75dB per band. The Remote Units serve as the backhaul port of any IP device or switch in the neighborhood; thus, it distributes combined cellular and data services according to user defined configuration profiles. The idRU is connected to the MSDH via 10 Gbit/s CPRI interfaces, where each interface contains an Embedded 1Gbit/s IP backhaul link.

Description of the EUT system/test Item:

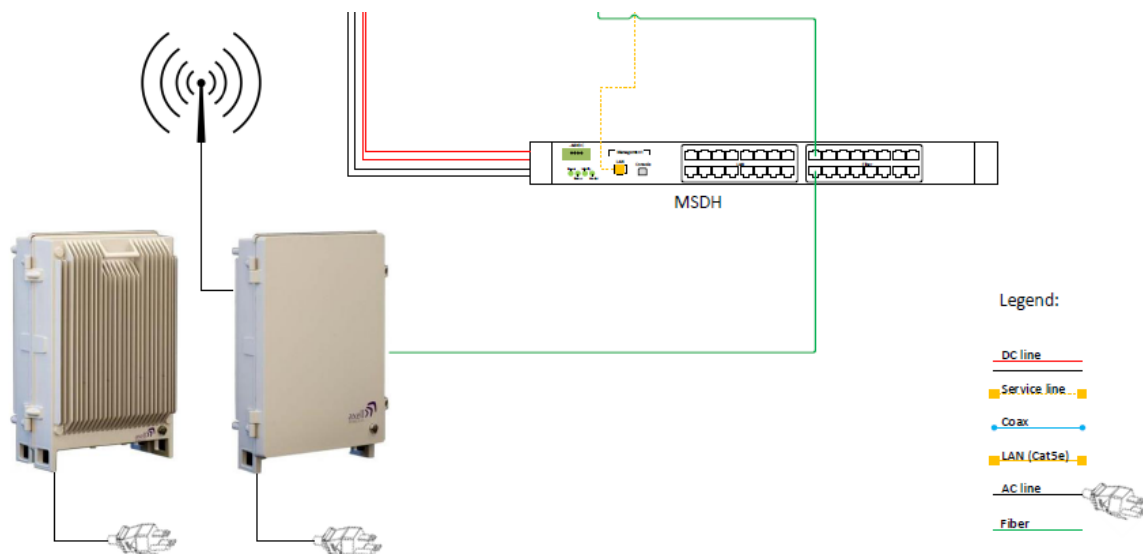

Bands and Modulations: Fc = 757.012 MHz

Technology	Direction	Modulation & Bandwidth	Frequency Band	Maximum Output Power
AC Model				
LTE	Downlink	64 QAM 5 MHz	746 - 757 MHz	41.83dBm, 15.241w
		64 QAM 10 MHz		41.83dBm, 15.241w


*Note-:Due to the EUT has only LTE wideband signals as shown above, all tests were performed with AWGN 4.1 MHz modulation which is representative the existing modulations according to 935210 D05 Indus Booster Basic Meas. v01r02, section 3.1. Testing with a MSK modulation signal for narrowband signals isn't applicable in this circumstance.

Support /Ancillary Equipment:

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational features to the EUT.

The system was configured in a typical fashion, as it would be normally used. However, the ancillary equipment can influence the test results.

Test Setup and Module Description:

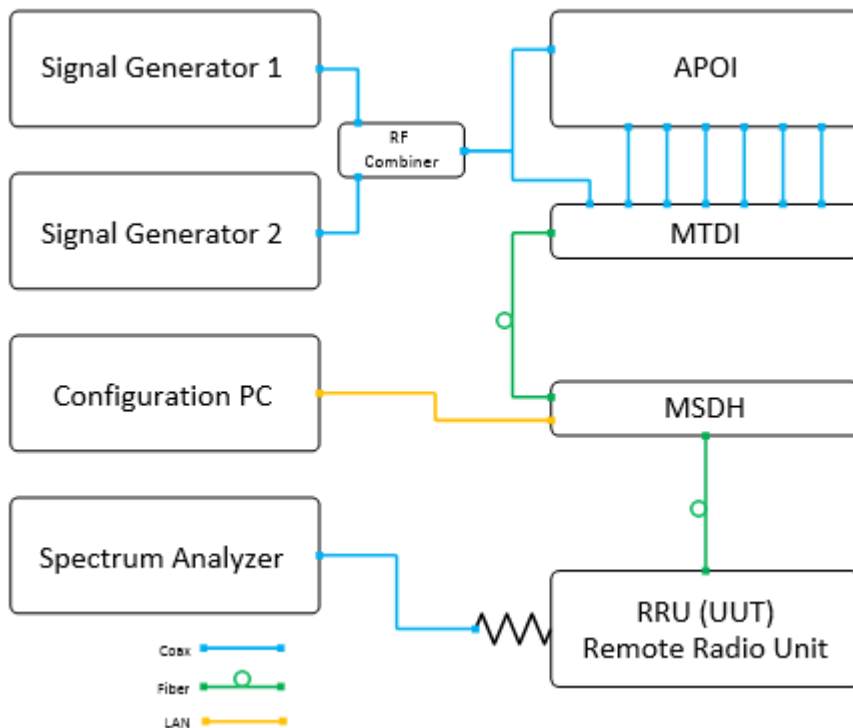

Signal Generator 1 and Signal Generator 2 generates a single tone or two-tones to the system. The tones can be selected to be CW or modulated. The signal can be routed either to the APOI or MTDI via Coax.

The APOI (Active Point of Interface), conditions and controls level of up to 16 low power BTS sectors of up to 30dBm. (Separate low PIM attenuators are used for higher power signals.)

The signals are conditioned by up to eight, band-specific modules, supporting two same-band sectors. The conditioned signals of each module are converged and fed to the corresponding (band-specific) MTDI module for digitization.

The MTDI (Multi Technology Digital Interface) unit digitizes and filters up to 16 conditioned cellular RF sectors from one more A-POI shelves. It then combines the signals over a single CPRI link that is routed towards the MSDH.

The MSDH (Multi Sector Digital Hub) serves as the idDAS central switching hub and control system. It routes digitized cellular resources received from MTDI units, along with data from the Ethernet network, over CPRI links towards the relevant remotes.

2. Test Facility & Uncertainty of Measurement

2.1. Accreditation / Registration reference

- A2LA Certificate Number: 1633.01
- IC Canada: Site# 4808A-1

2.2. Test Facility description

The tests were performed at the EMC Laboratory, QualiTech Division, ECI Telecom Group

Address: 30, Hasivim St., Petah Tikva, Israel.
Tel: 972-3-926-6994

3m Anechoic Chamber:

Measurement distance	3m
Chamber dimensions	9.5m x 6.5m x 5.2m
Antenna height	1 - 4m
Shielding Effectiveness	Magnetic field ≥ 80 dB at 15 kHz ≥ 90 dB at 100 kHz Electric field > 120 dB from 1MHz to 1GHz > 110 dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Emerson and Cuming absorbing material in selected positions on the walls
Normalized Site Attenuation measured at 5 positions	± 3.9 dB, 30MHz to 200MHz ± 3 dB, 200MHz to 1000MHz
Transmission Loss measured at 5 positions, at 1.5m height	± 3 dB, 1GHz to 18GHz

Uncertainty of Measurement:

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16-4-2 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements “. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Test Name	Test Method & Range	Uncertainty	
		Combined std. Uc(y)	Expanded U
Radiated Emission	30MHz÷230MHz, Horiz. polar.	[dB] 1.8	[dB] 3.6
	30MHz÷230MHz, Ver. polar.	1.967	3.934
	230MHz÷1000MHz, Horiz. polar.	1.487	2.973
	230MHz÷1000MHz, Vert. polar.	1.499	2.998
Conducted Emission	9 kHz÷150 kHz	[dB] 1.378	[dB] 2.756
	150 kHz÷30MHz	1.095	2.190
Radio frequency	Up to 18 GHz	$\pm 1 \cdot 10^{-6}$	$< \pm 1 \cdot 10^{-5}$
Total Conducted RF Power	Up to 18 GHz	± 1.378 dB	$< \pm 1.5$ dB
Conducted Power density	Up to 18 GHz	± 1.378 dB	$< \pm 3$ dB
Temperature	23.6 °C	± 0.6 °C	$< \pm 2$ °C
Humidity	54.9%	± 3.1 %	$< \pm 5$ %
DC Voltage	0-60 VDC	± 0.3 %	$< \pm 3$ %

Note: QualiTech EMC labs expanded measurement instrumentation has less uncertainty than the industry norm and compliance is deemed to occur as no measured disturbance exceeds the disturbance limit.

Note: The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

3. Examination Test Results

3.1. Out-of-Band Rejection


Reference document:	KDB 935210 D05 v01r02		
Method of testing:	KDB 935210 D05 v01r02, Conducted	Pass	
Operating conditions:	Under normal test conditions		
Environment conditions:	Ambient Temperature: 22.6°C	Relative Humidity: 59.8%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 3.1	

Test results:

Modulation	±250% of Passband*, MHz	Frequency fo, MHz	-20dB lowest point, MHz	-20dB highest point, MHz
CW	718.500....784.500	757.012	745.598	757.547

* 11MHz Passband

Plot 3.1: Out-of-Band rejection, CW

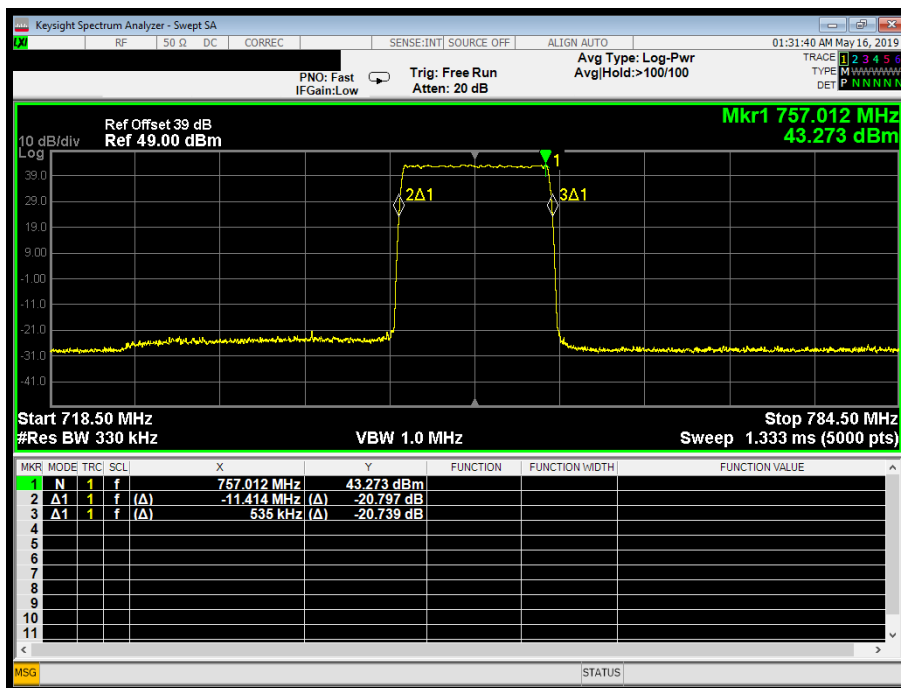

3.2. Occupied Bandwidth - Input-versus-output signal comparison

Reference document:	§2.1049(h)		
Test Requirements:	The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. The spectral plot of the input signal shall be similar to the output signal.		
Method of testing:	KDB 935210 D05 v01r02, Conducted	Pass	
Operating conditions:	Under normal test conditions		
Environment conditions:	Ambient Temperature: 22.2°C	Relative Humidity: 54.8%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plots 3.2.1-3.2.2	

Test results:

Mode	Operating Frequency, MHz	-26 dB Bandwidth, MHz	
		Output	Input
		0.5 dB below AGC threshold level	0.5 dB below AGC threshold level
AWGN 4.1MHz	751.500	4.635 MHz	4.657 MHz
		3 dB above AGC threshold level	3 dB above AGC threshold level
AWGN 4.1MHz	751.500	4.653 MHz	4.651 MHz

Plot 3.2.1: Input-versus-output signal comparison, AWGN 4.1MHz, 0.5 dB below AGC threshold level



Output

Input

Plot 3.2.2: Input-versus-output signal comparison, AWGN 4.1MHz, 3 dB above AGC threshold level



Output

Input

3.3. Mean Output Power and Amplifier/Booster Gain

Reference document:	47 CFR §27.50(b)(4), §2.1046(a),		
Test Requirements:	Fixed and base stations transmitting a signal in the 746-757 MHz and 776-787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.		
Method of testing:	For 47CFR: KDB 935210 D05 v01r02, sec 3.5(power meter method);	Pass	
Operating conditions:	Under normal test conditions		
Environment conditions:	Ambient Temperature: 22.3°C	Relative Humidity: 59.1%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below		-

Test results:

Mode	Operating Frequency (fo) ¹ MHz	Measured AVG Power				Mean Gain ² [dB]	Max Ant Gain [dBd]	ERP Calculated ³ [W]	Power Limit [W/MHz]	Delta ⁴ [W/MHz]	Pass/Fail
		Output		Input							
AWGN 4.1 MHz	757.012	41.83 dBm	15.241 W	-0.17 dBm	961.6 μW	41.83	11.85	233.346	1000	-766.654	Pass

Note: The EUT tested at 0.5 dB below AGC threshold level and 3 dB above AGC threshold level, and worst case results were presented.

¹ From "Out-of-Band Rejection" test

² Mean Gain [dB] = Measured AVG Power (Output) [W] - Measured AVG Power (Input) [W]

³ ERP Calculated [W] = $10^{[(\text{Measured AVG Power (Output) [dBm]} + \text{Max Ant Gain [dBd]}) / 10]} / 1000$

⁴ Delta [W/MHz] = ERP Calculated [W] - Power Limit [W/MHz]

3.4. Out-of-Band/Out-of-Block & Intermodulation Emissions Conducted Measurements

Reference document:	47 CFR §27.53(c) (1), 47 CFR §2.1051		
Test Requirements:	On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB Compliance with the provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed		
Method of testing:	KDB 935210 D05 v01r02, Conducted	Pass	
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: minimum 1% of EBW or 100kHz or 1MHz; VBW: 3 times RBW		
Environment conditions:	Ambient Temperature: 22.5°C	Relative Humidity: 59.9%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 3.4.1 - Plot 3.4.4	


*It translates to a limit of -13dBm

Test results:


Modulation	Operating Frequency, MHz		Emission Frequency, MHz	Emission Level, dBm	Limit, dBm	Delta, dB	Pass/Fail
	Carrier 1	Carrier 2					
AWGN 4.1MHz	748.500	NA	746.000	-26.761	-13.00	-13.761	Pass
	748.500	753.500	746.000	-29.439	-13.00	-16.439	Pass
	754.500	NA	757.000	-26.638	-13.00	-13.638	Pass
	749.500	754.500	757.000	-27.948	-13.00	-14.948	Pass

Note: The EUT tested at 0.5 dB below AGC threshold level and 3 dB above AGC threshold level, and worst case results were presented.


Plot 3.4.1: Band Edge test results, AWGN 4.1MHz, Fc = 748.500 MHz, single test signal

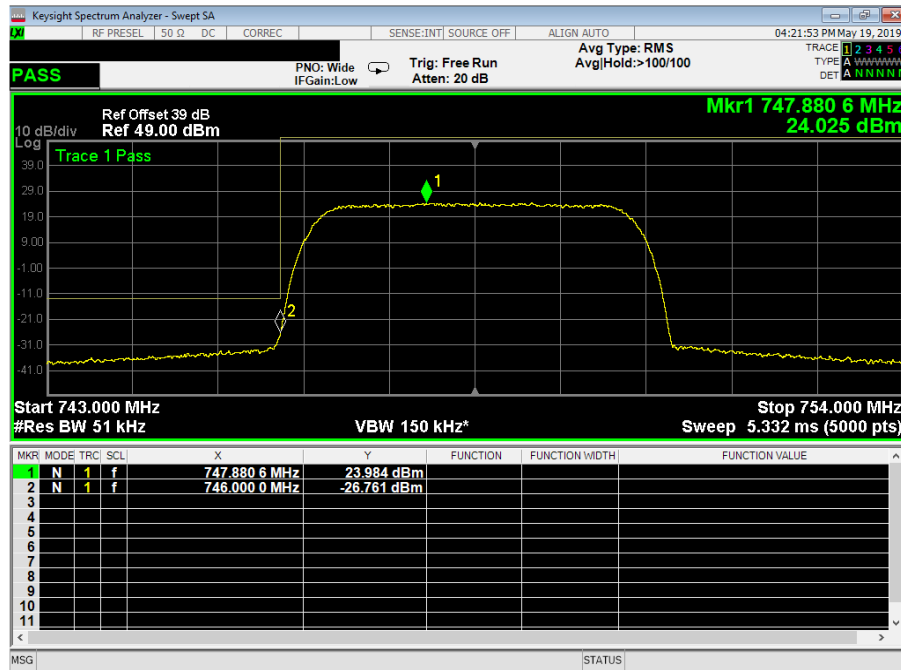


Plot 3.4.2: Band Edge test results, AWGN 4.1MHz, Fc = 748.500 MHz + 753.500 MHz, two test signals

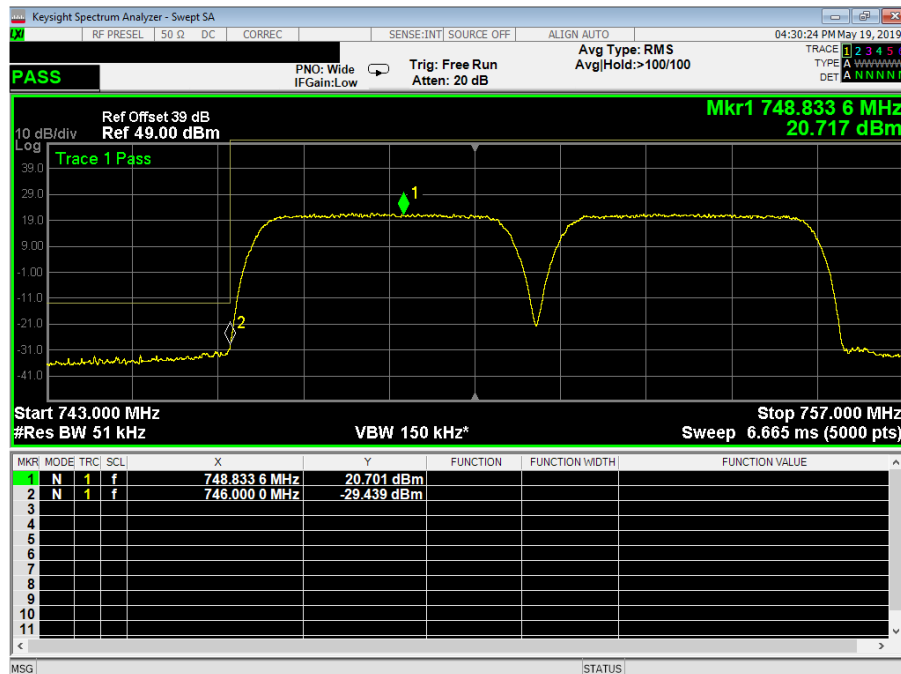

Plot 3.4.3: Band Edge test results, AWGN 4.1MHz, Fc = 754.500 MHz, single test signal

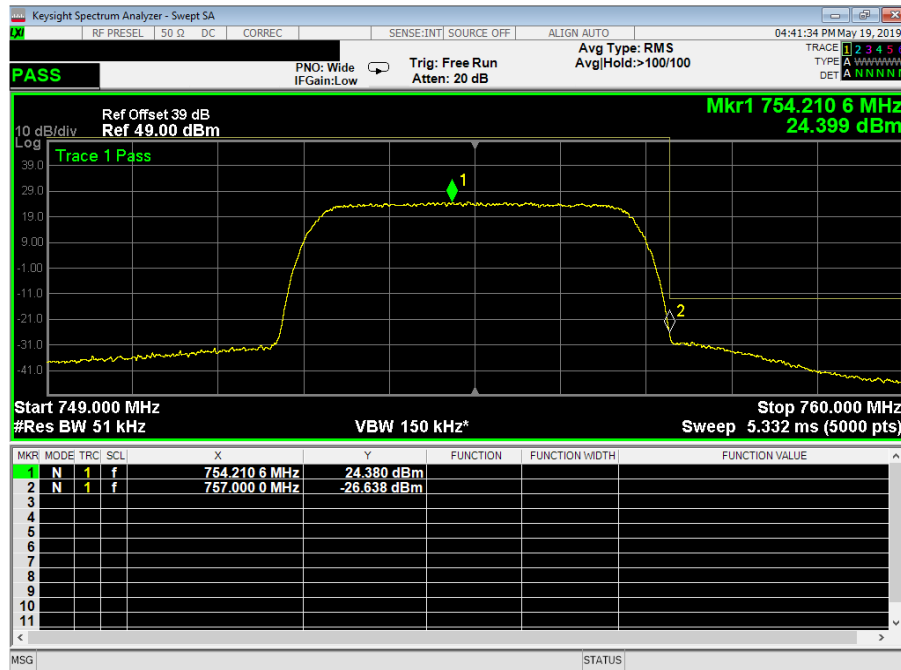

Plot 3.4.4: Band Edge test results, AWGN 4.1MHz, Fc = 749.500 MHz + 754.500 MHz, two test signals

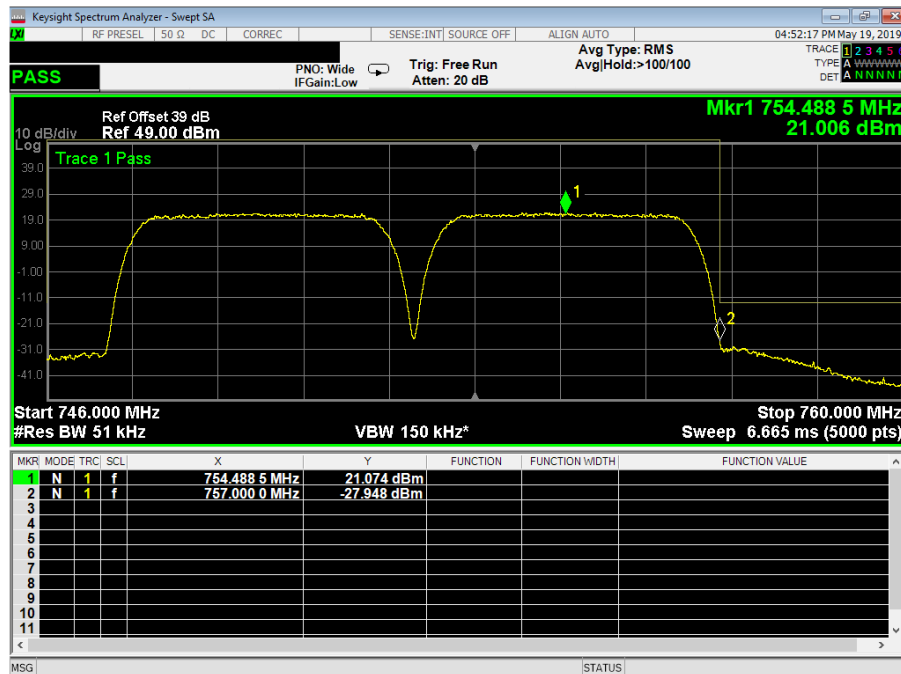

3.5. Spurious Emission Conducted Measurement

Reference document:	47 CFR §27.53(c) (1), (c) (3), (f), 47 CFR §2.1051		
Test Requirements:	<p>(c)(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB*;</p> <p>(c)(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB** in a 6.25 kHz band segment, for base and fixed stations;</p> <p>(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz*** equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP *** for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.</p>		
Method of testing:	KDB 935210 D05 v01r02, Conducted	Pass	
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1MHz, VBW: 3MHz		
Environment conditions:	Ambient Temperature: 22.1°C	Relative Humidity: 56.8%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 3.5.1 - Plot 3.5.15	

*It translates to a limit of -13dBm,


** It translates to a limit of -46dBm,

*** It translates to a limit of -40dBm EIRP compared to conducted measurement (dBm) + max antenna gain (dBi), 14dBi.


Test Results:

Modulation	Operating Frequency, MHz	Emission Frequency, MHz	Emission Level, dBm	Limit, dBm	Delta, dB	Pass/Fail
AWGN 4.1MHz	748.500	All emissions were at least 15dB below the Limit				Pass
	751.500	All emissions were at least 15dB below the Limit				Pass
	754.500	All emissions were at least 15dB below the Limit				Pass

Plot 3.5.1: Spurious Emission Conducted Measurement, AWGN 4.1MHz, Fc = 748.500 MHz, 9 kHz – 1.3 GHz

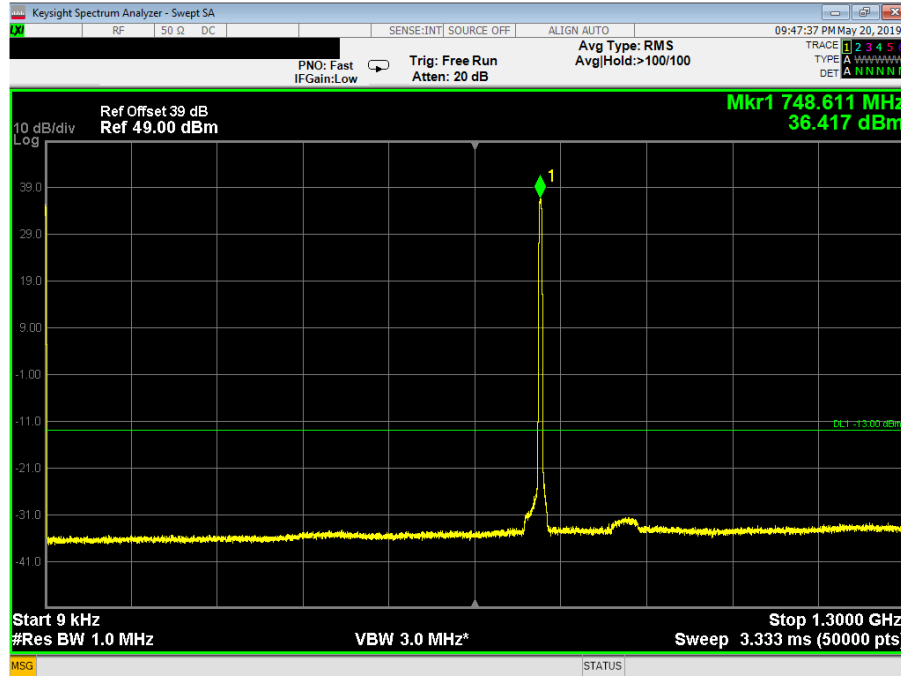


Plot 3.5.2: Spurious Emission Conducted Measurement, AWGN 4.1MHz, Fc = 748.5 MHz, 1.3 GHz – 8 GHz

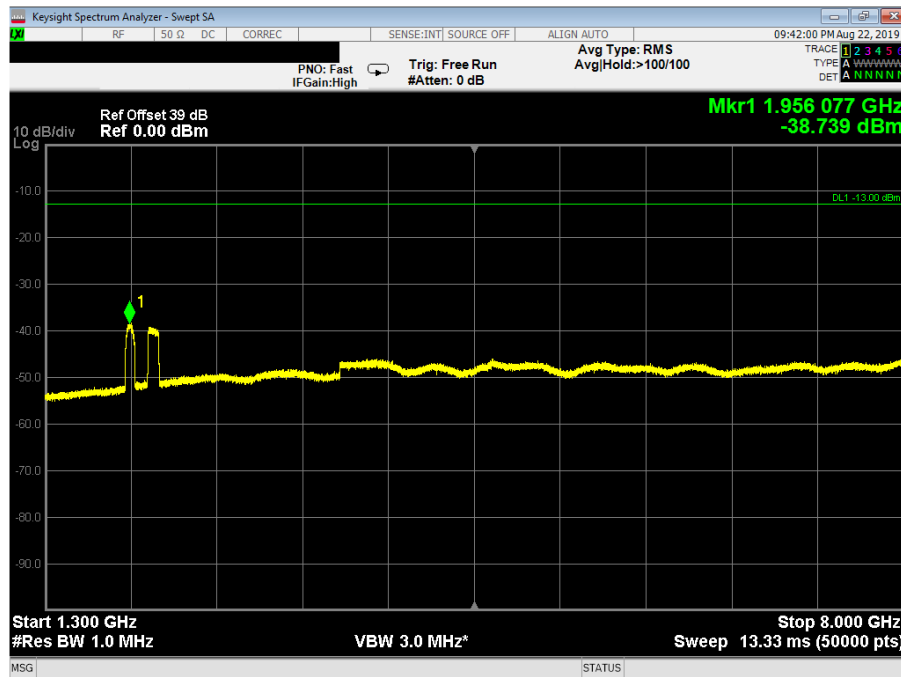


With highpass filter WHKX10-1010-1200-15000-40EF


**Plot 3.5.3: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 748.5 MHz, 763 MHz – 775 MHz**

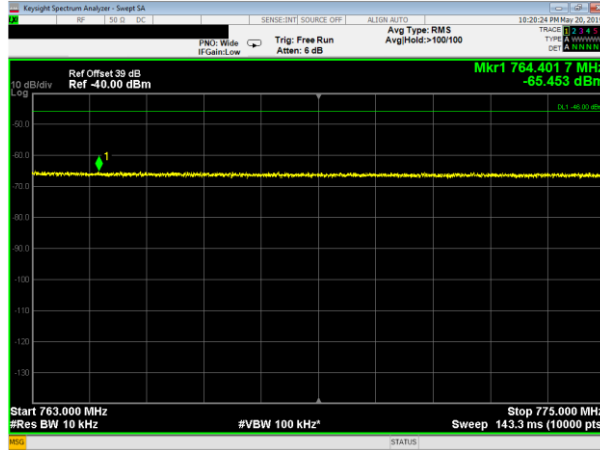

**Plot 3.5.4: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 748.5 MHz, 793 MHz – 805 MHz**

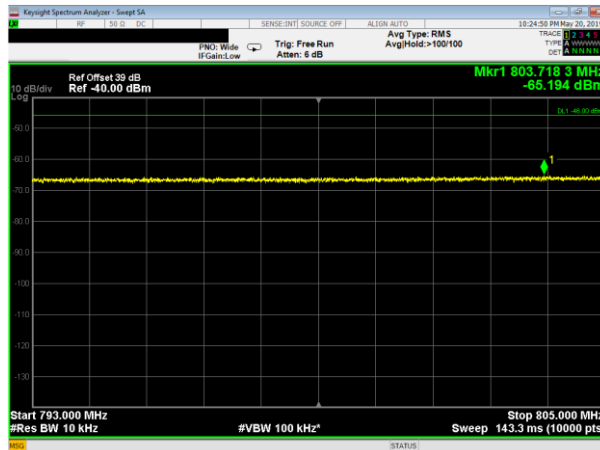


**Plot 3.5.5: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 748.5 MHz, 1559 MHz – 1610 MHz**

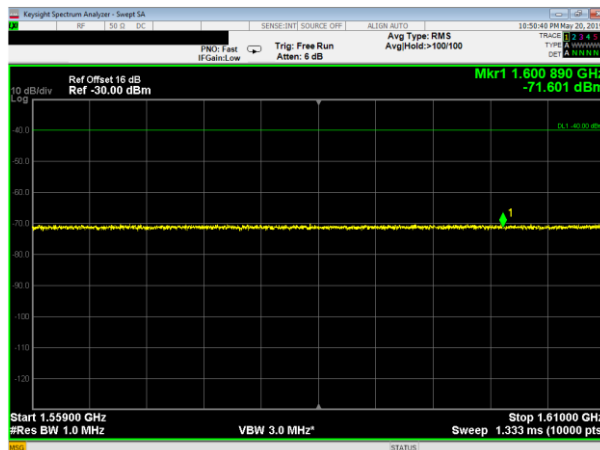


With highpass filter WHKX10-1010-1200-15000-40EF

**Plot 3.5.6: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 751.5 MHz, 9 kHz – 1.3 GHz**

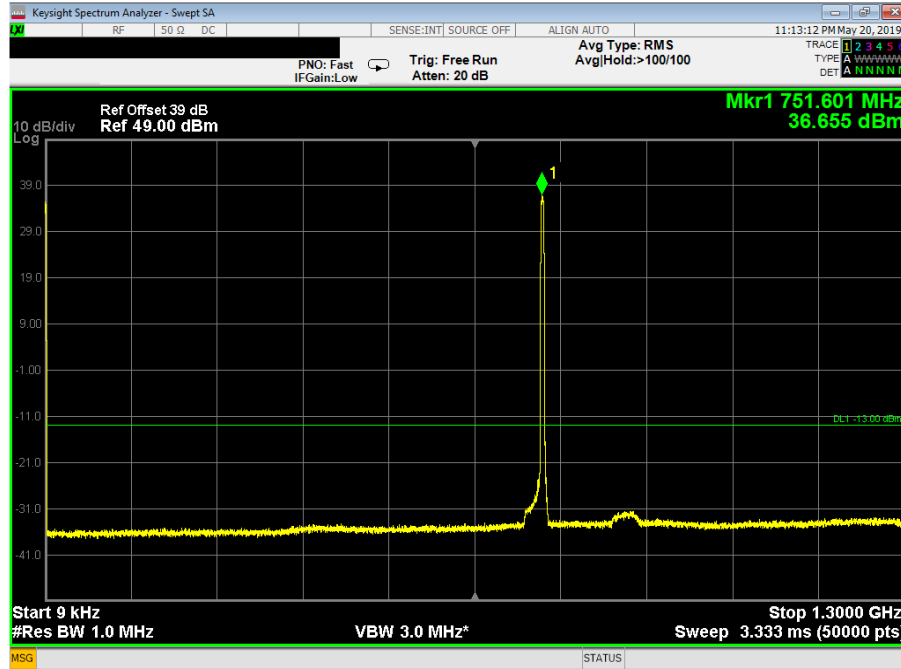


**Plot 3.5.7: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 751.5 MHz, 1.3 GHz – 8 GHz**

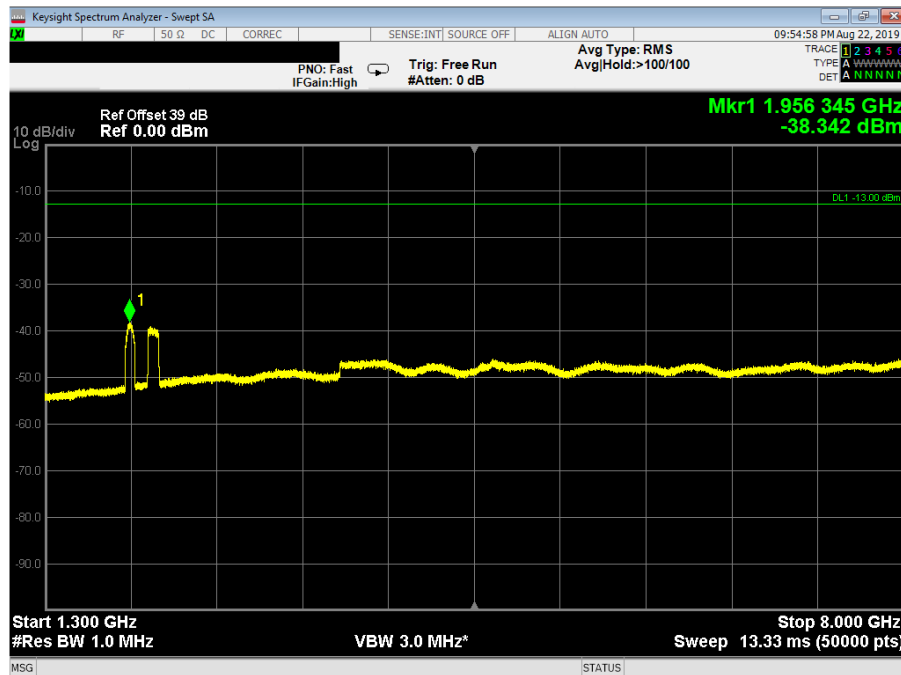


With highpass filter WHKX10-1010-1200-15000-40EF


**Plot 3.5.8: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 751.5 MHz, 763 MHz – 775 MHz**

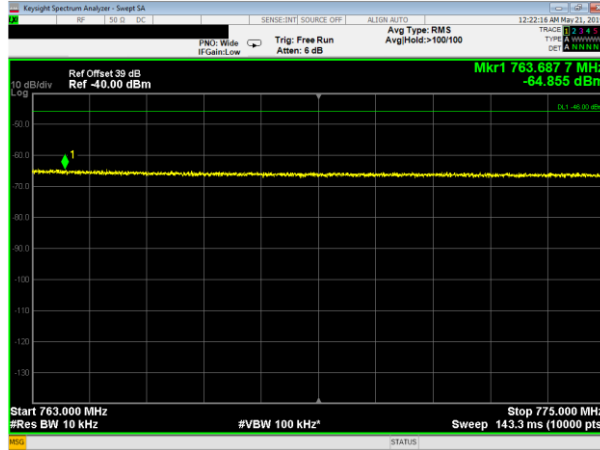

**Plot 3.5.9: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 751.500 MHz, 793 MHz – 805 MHz**

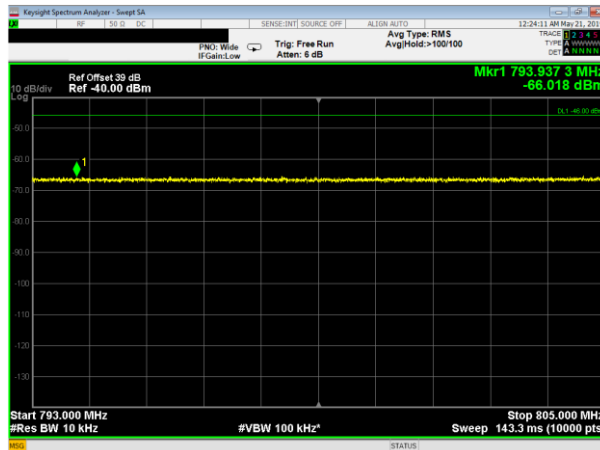


**Plot 3.5.10: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 751.500 MHz, 1559 MHz – 1610 MHz**

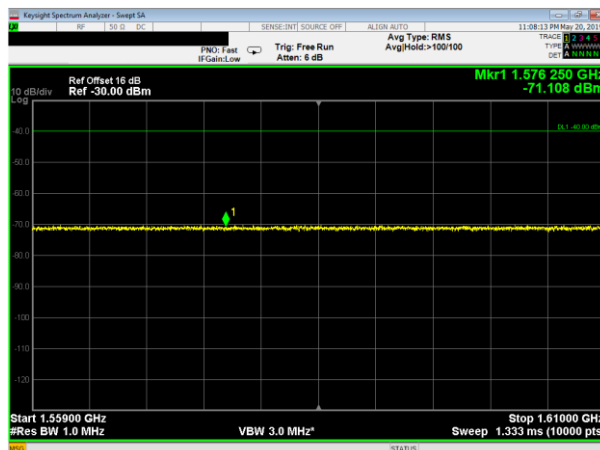


With highpass filter WHKX10-1010-1200-15000-40EF

**Plot 3.5.11: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 754.500 MHz, 9 kHz – 1.3 GHz**

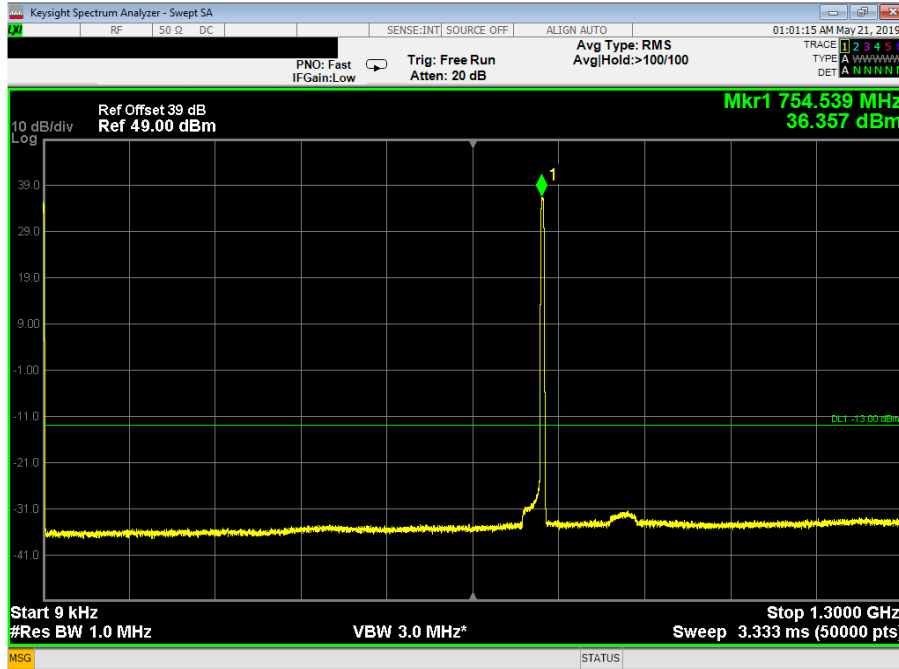


**Plot 3.5.12: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 754.5 MHz, 1.3 GHz – 8 GHz**

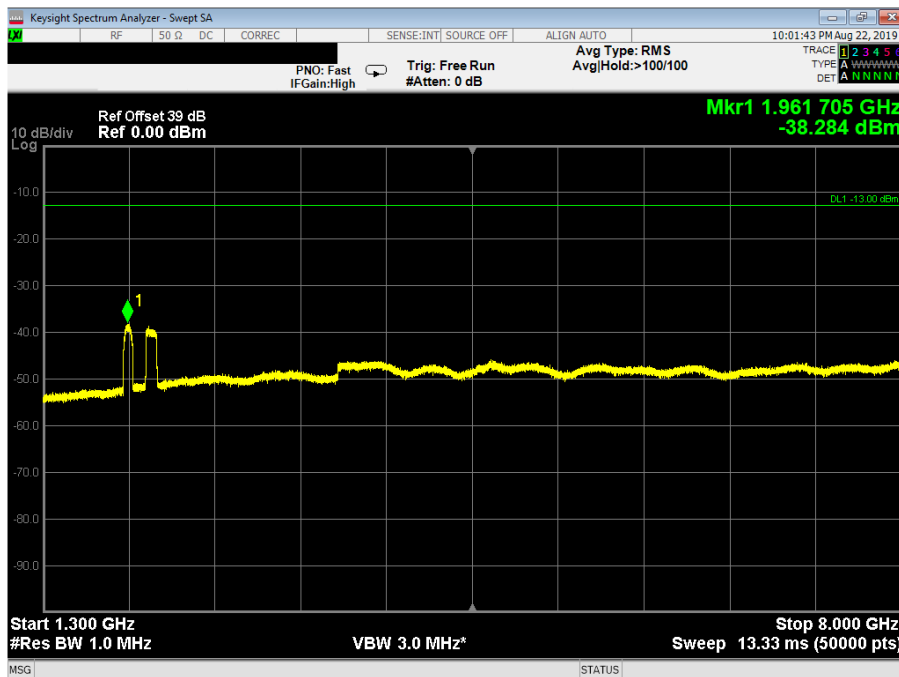


With highpass filter WHKX10-1010-1200-15000-40EF


**Plot 3.5.13: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 754.500 MHz, 763 MHz – 775 MHz**

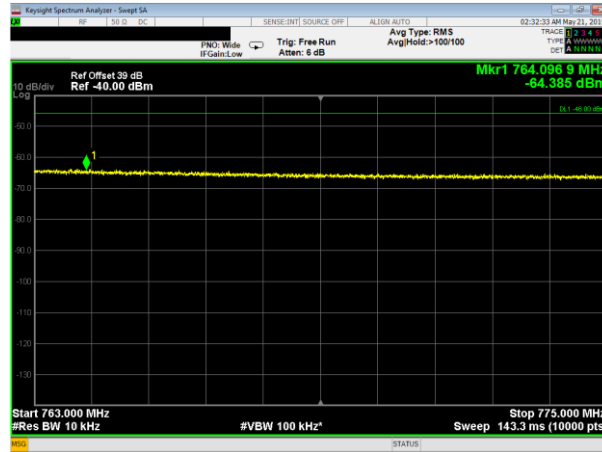

**Plot 3.5.14: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 754.500 MHz, 793 MHz – 805 MHz**

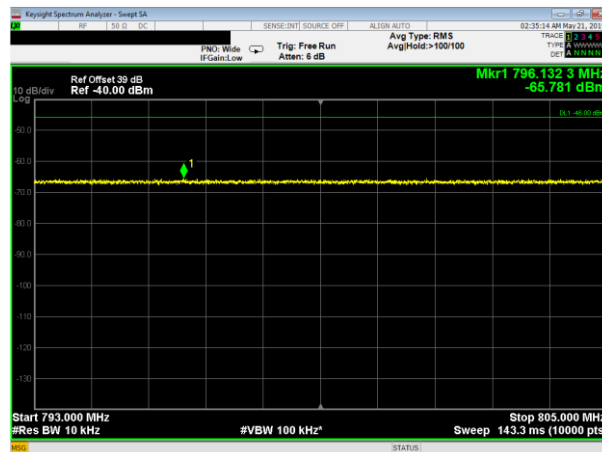

**Plot 3.5.15: Spurious Emission Conducted Measurement, AWGN 4.1MHz,
Fc = 754.500 MHz, 1559 MHz – 1610 MHz**

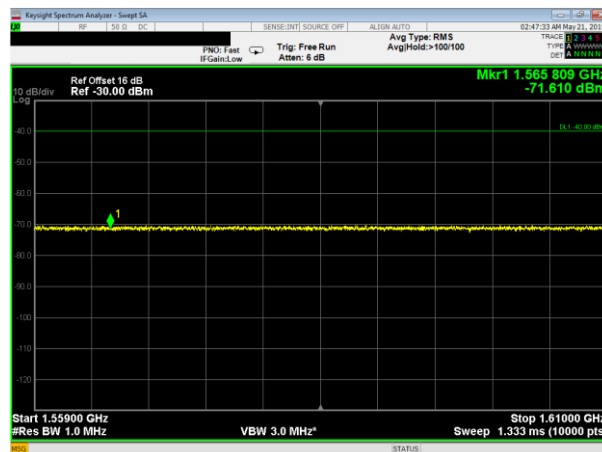

With highpass filter WHKX10-1010-1200-15000-40EF

3.6. Spurious Emission, Radiated Measurements

Reference document:	47 CFR §27.53(c) (1), (c) (3), (f), 47 CFR §2.1053		
Test Requirements:	<p>(c)(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB*;</p> <p>(c)(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB** in a 6.25 kHz band segment, for base and fixed stations;</p> <p>(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz*** equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.</p>		
Method of testing:	KDB 935210 D05v01r01, Radiated KDB 971168[R8]	Pass	
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1MHz, VBW: 3MHz		
Environment conditions:	Ambient Temperature: 22.3°C	Relative Humidity: 58.8%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plots 3.6.1-3.6.12	

*It translates to a limit of $-13\text{dBm} = 84 \text{ dB}\mu\text{V/m}$ @3m distance

Note 1: All measurements performed with 2 simultaneous transmissions:

Low frequency: 746.2 MHz, 869.2 MHz

Middle frequency: 751.5 MHz, 881.5 MHz

High frequency: 756.8 MHz, 893.8 MHz


Note 2: All measurements done in horizontal and vertical polarizations; the table below shows the worst case.

Test Results:


Frequency, MHz	Emission Level, dB μ V/m	Antenna Polarization	Substitution Method				Limit [dBm]	Margin, dB	Pass/Fail	Ref Plots
			Signal generator output, [dBm]	Antenna Gain, [dBi]	Cable Loss, dB	Calculated EIRP*, [dBm]				
Low Frequency										
All emissions were at least 15dB below the Limit								Pass	3.6.1-3.6.4	
Middle Frequency										
All emissions were at least 15dB below the Limit								Pass	3.6.5-3.6.8	
High Frequency										
All emissions were at least 15dB below the Limit								Pass	3.6.9-3.6.12	

*Calculated EIRP [dBm] = Signal Generator Output [dBm] + Antenna Gain [dBi] – Cable Loss [dB]


Plot 3.6.1: Spurious Emissions test results, 30 MHz – 1 GHz range, Horizontal polarization, Low Frequency

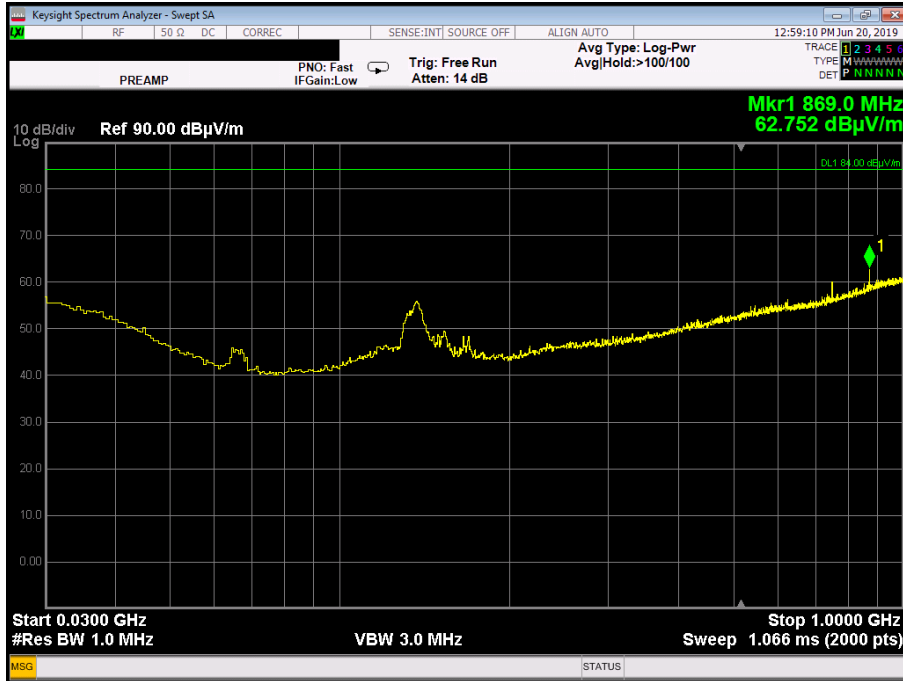


Plot 3.6.2: Spurious Emissions test results, 30 MHz – 1 GHz range, Vertical polarization, Low Frequency

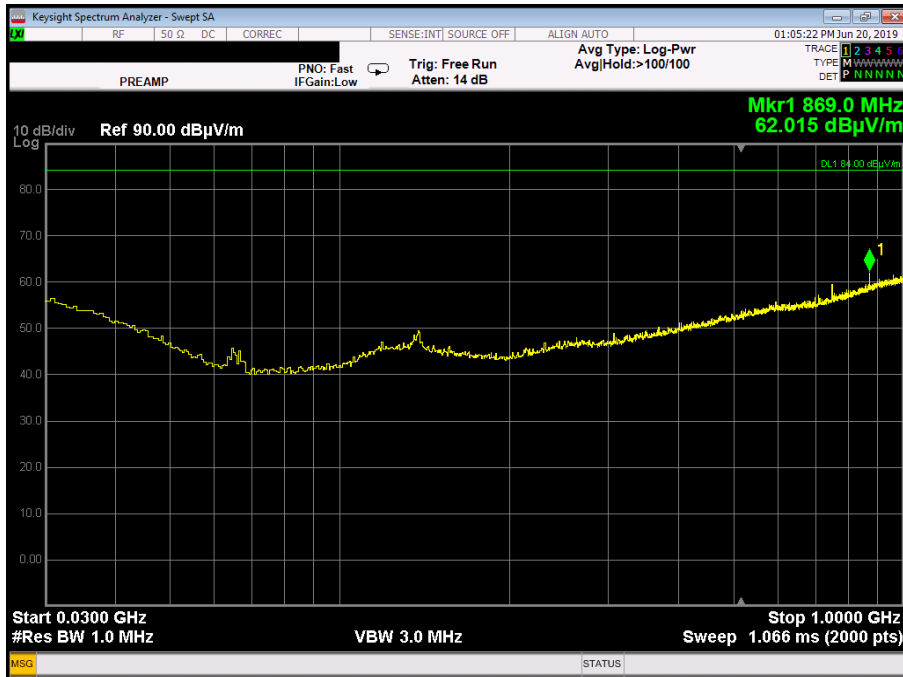

Plot 3.6.3: Spurious Emissions test results, 1 GHz – 18 GHz range, Horizontal polarization, Low Frequency

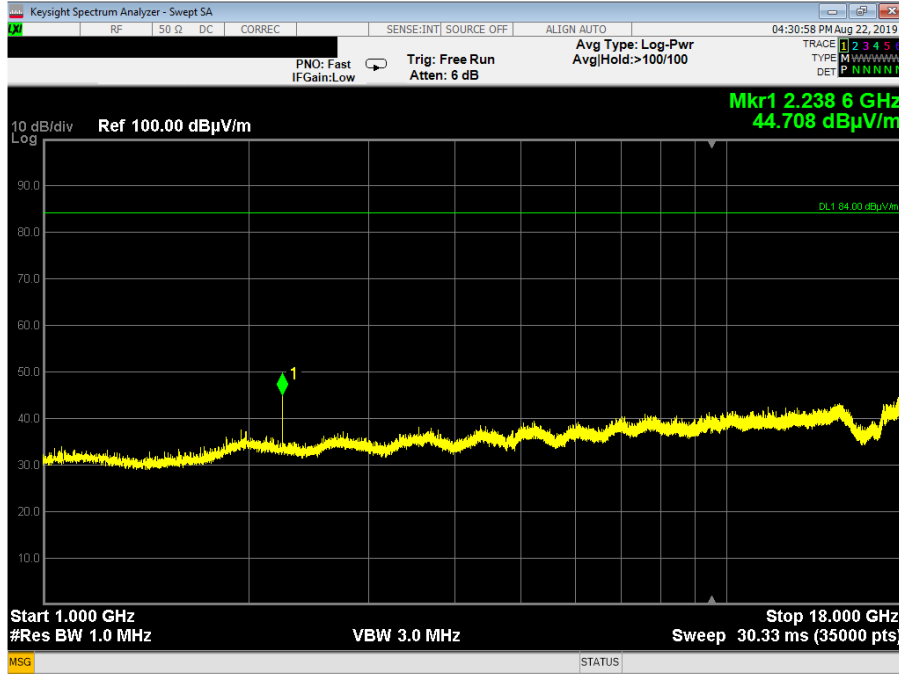

Plot 3.6.4: Spurious Emissions test results, 1 GHz – 18 GHz range, Vertical polarization, Low Frequency

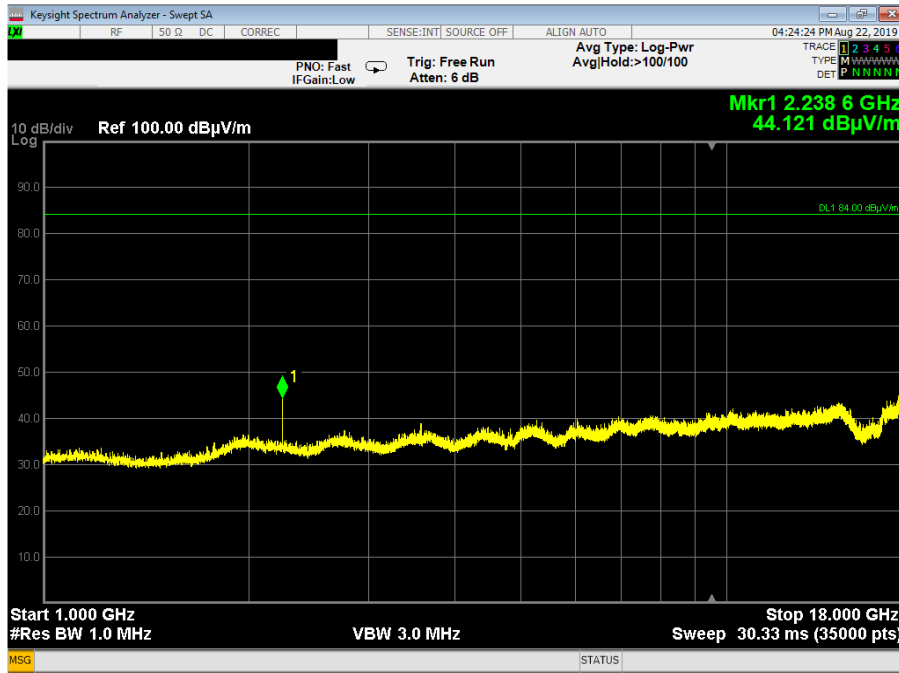


Plot 3.6.5: Spurious Emissions test results, 30 MHz – 1 GHz range, Horizontal polarization, Middle Frequency




Plot 3.6.6: Spurious Emissions test results, 30 MHz – 1 GHz range, Vertical polarization, Middle Frequency




Plot 3.6.7: Spurious Emissions test results, 1 GHz – 18 GHz range, Horizontal polarization, Middle Frequency

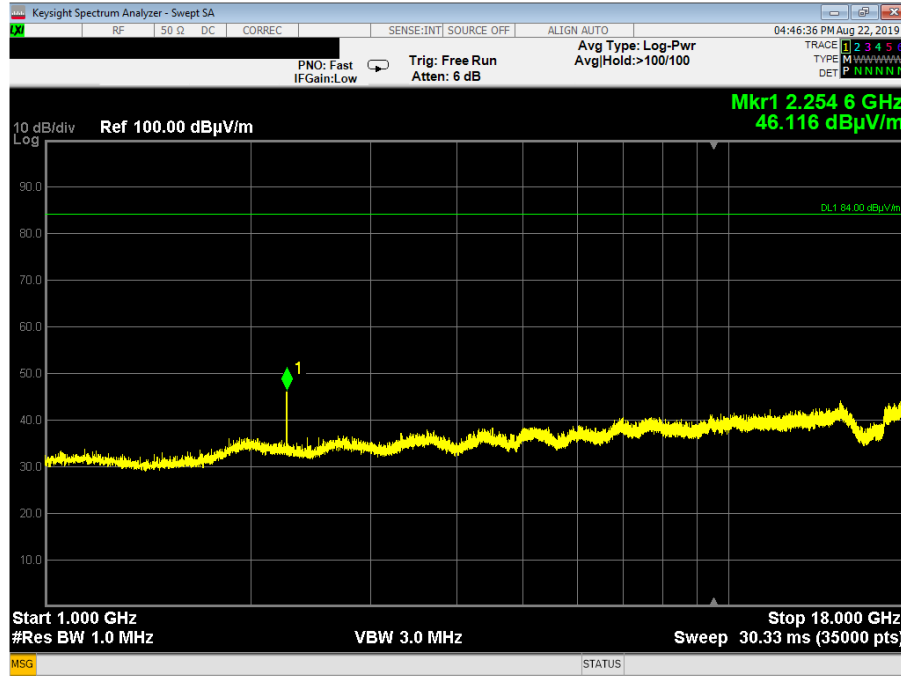

Plot 3.6.8: Spurious Emissions test results, 1 GHz – 18 GHz range, Vertical polarization, Middle Frequency

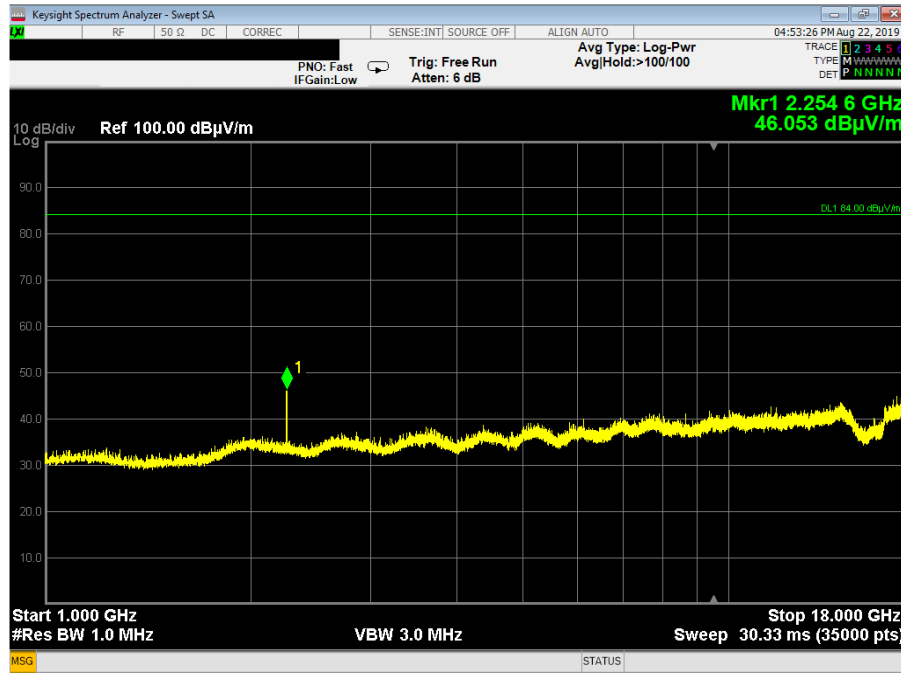


Plot 3.6.9: Spurious Emissions test results, 30 MHz – 1GHz range, Horizontal polarization, High Frequency

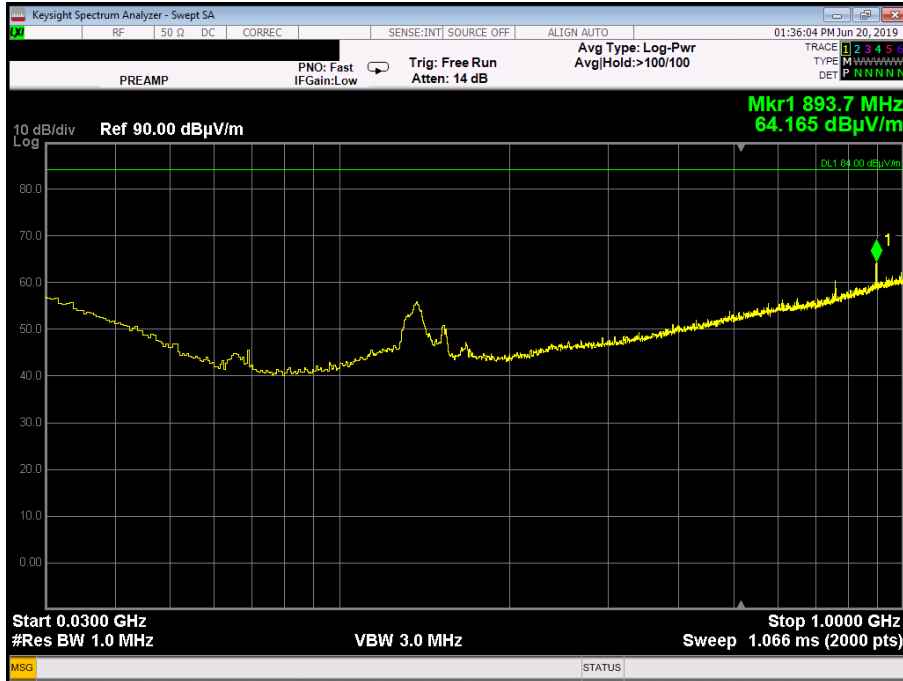


Plot 3.6.10: Spurious Emissions test results, 30 MHz – 1GHz range, Vertical polarization, High Frequency



Plot 3.6.11: Spurious Emissions test results, 1 GHz – 18 GHz range, Horizontal polarization, High Frequency

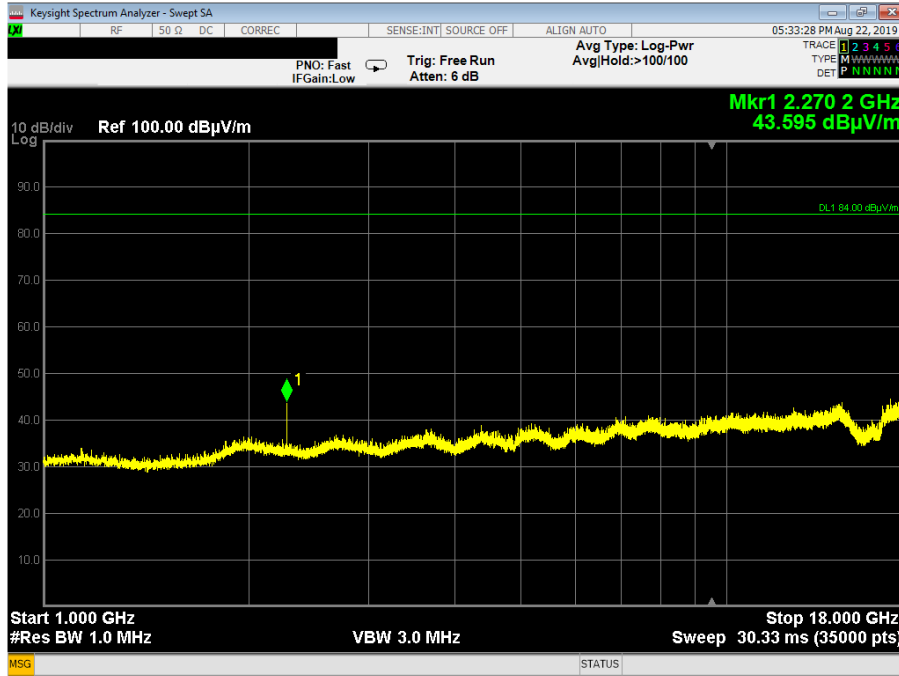

Plot 3.6.12: Spurious Emissions test results, 1 GHz – 18 GHz range, Vertical polarization, High Frequency

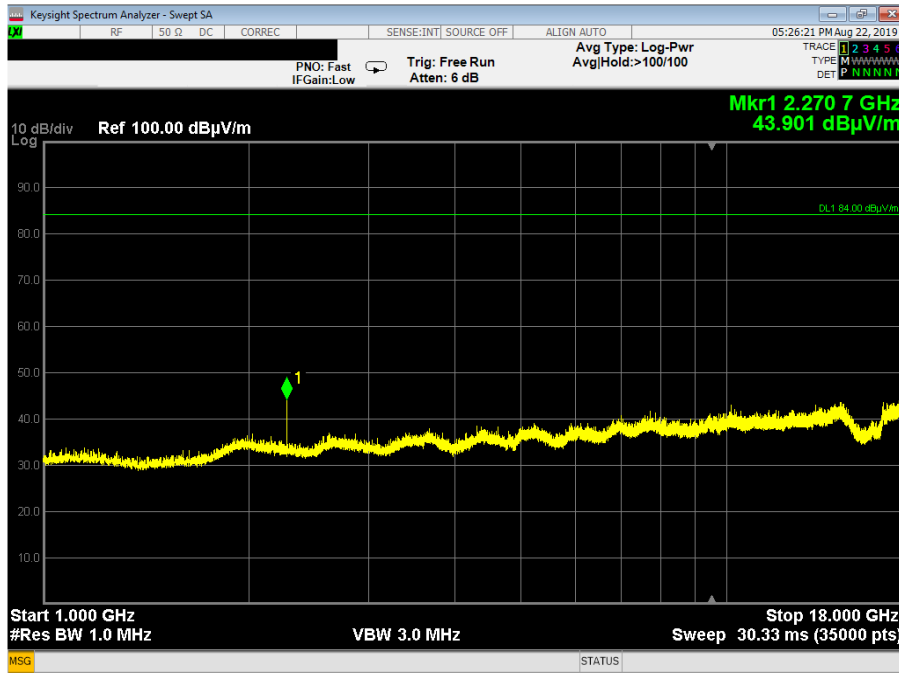

3.7. Frequency stability

Reference document:	47 CFR §27.54, 47 CFR §2.1055		
Test Requirements:	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.		
Method of testing:	KDB 935210 D05 v01r02, Conducted	Pass	
Operating conditions:	Under normal and extremes test conditions		
Environment conditions:	Ambient Temperature: 22.7°C	Relative Humidity: 59.8%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	-	

Test results: Fc= 751.500 MHz

Frequency error vs. Voltage: AC Model

Voltage [V _{AC}]	Frequency Error [Hz]	Frequency Error [%]	Frequency Error [ppm]	Limit [ppm]	Test Result
Carrier frequency at 20°C (120 V _{AC}): Fc = 751.500160 MHz					
102-138	No frequency error observed				Pass

Frequency error vs. Temperature: AC Model

Temperature, °C	Reference Frequency, MHz	Measured Frequency, MHz	Frequency Error, Hz	Frequency Error, ppm	Limit, ppm	Delta	Pass/Fail
-30	751.500160	751.500120	40.00	0.020382	1.50	-1.48	Pass
-20	751.500160	751.500100	60.00	0.030573	1.50	-1.47	Pass
-10	751.500160	751.500110	50.00	0.025478	1.50	-1.47	Pass
0	751.500160	751.500110	50.00	0.025478	1.50	-1.47	Pass
10	751.500160	751.500130	30.00	0.015287	1.50	-1.48	Pass
20	Reference temperature						
30	751.500160	751.500140	20.00	0.010191	1.50	-1.49	Pass
40	751.500160	751.500130	30.00	0.015287	1.50	-1.48	Pass
50	751.500160	751.500140	20.00	0.010191	1.50	-1.49	Pass

4. Appendix

Appendix A: List of test equipment used

Description	Manufacturer	Model	Serial No.	Last Cal	Cal Due
Anechoic new (large) chamber	-----	-----	-----	21/03/2018	21/03/2020
Environmental Test Chamber	TENNEY ENGINEERING	TTRS	10.158-5	10/10/2018	10/10/2019
MXE EMI RECEIVER 3Hz-44GHz	Keysight Technologies	N9038A	MY55420200	06/04/2019	06/04/2020
MXE EMI RECEIVER 3Hz-44GHz	Keysight Technologies	N9038A	MY56400070	08/04/2019	08/04/2020
Power Meter	Agilent	N1911A	MY45100784	20/03/2019	20/03/2021
Wideband Power Sensor	Agilent	N1921A	MY45241242	20/03/2019	20/03/2021
Highpass Filter, 1.2GHz - 15GHz	WAINWRIGHT	WHKX10-1010-1200-15000-40EF	1	04/11/2018	04/11/2019
Bilog Antenna 30MHz – 1000MHz	Teseq	CBL 6141B	34119	18/03/2019	18/03/2022
Horn Antenna 1GHz - 18GHz	A.R.A	DRG-118/A	17188	17/09/2018	17/09/2019
Low Noise Amplifier 1GHz - 18GHz	Spacek Labs	SL1018-56-5	17J29	31/01/2019	31/01/2020

Appendix B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

QUALITECH

Petah-Tikva, Israel

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 31st day of May 2018.

A handwritten signature in blue ink, appearing to be 'L. Ben', is written over a horizontal line.

President and CEO
For the Accreditation Council
Certificate Number 1633.01
Valid to June 30, 2020

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

End of the Test Report