

Verification Test Report

21-1-0095401T01a



Deutsche
Akkreditierungsstelle
D-PL-12047-01-01
D-PL-12047-01-03
D-PL-12047-01-04



Number of pages:	21	Date of Report:	2021-Sep-02
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	Robert Bosch GmbH
Product: Model:	Electronical Control Unit with Bluetooth Low Energy and WLAN NRCS2P		
FCC ID:	NF3-NRCS2P	IC:	3887A-NRCS2P
Testing has been carried out in accordance with:	Title 47 CFR, Chapter I FCC Regulations, Subchapter A Subpart C: §15.247 (DTS) , RSS-247, Issue 2 (DTS) RSS-Gen., Issue 5 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Tested Technology:	2.4GHz W-LAN (IEEE 802.11)		
Test Results:	<input checked="" type="checkbox"/> The EUT complies with the requirements in respect of selected parameters subject to the test. The test results relate only to devices specified in this document		
Signatures:	<div>  <p>Ninovic Perez 2021.09.02 18:56:45 + 02'00'</p> </div> <div>  <p>Digital signiert von: patrick. marzotko@cetecom.com Name: CN = patrick. marzotko@cetecom.com Datum: 2021.09.02 08: 02:34 +02'00'</p> </div>		
	<div>Dipl.-Ing. Ninovic Perez Test Lab Manager Authorization of test report</div> <div>M.Sc. Patrick Marzotko Test manager Responsible of test report</div>		

Table of Contents

Table of Annex.....	3
1 General information	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results	5
1.4 Summary of Test Methods	6
2 Administrative Data	7
2.1 Identification of the Testing Laboratory	7
2.2 General limits for environmental conditions.....	7
2.3 Test Laboratories sub-contracted.....	7
2.4 Organizational Items	7
2.5 Applicant's details	7
2.6 Manufacturer's details	7
2.1 EUT: Type, S/N etc. and short descriptions used in this test report	8
2.2 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	8
2.3 Connected cables	8
2.4 Software	8
2.5 EUT set-ups.....	8
2.6 EUT operation modes	8
3 Equipment under test (EUT)	9
3.1 General Data of Main EUT as Declared by Applicant.....	9
3.2 Detailed Technical data of Main EUT as Declared by Applicant	10
3.3 Worst case identification.....	10
3.4 Modifications on Test sample.....	10
4 Measurements.....	11
4.1 Duty-Cycle	11
4.2 RF output power.....	12
4.3 Radiated field strength emissions above 1 GHz	14
4.4 Radiated Band-Edge emissions.....	16
4.5 Results from external laboratory.....	18
4.6 Opinions and interpretations	18
4.7 List of abbreviations	18
5 Equipment lists	18
6 Measurement Uncertainty valid for conducted/radiated measurements	20
7 Versions of test reports (change history)	21

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR21_1_0095401T01a_A1	7
Annex 2	Internal photographs of EUT	Please refer to applicant's documentation	--
Annex 3	External photographs of EUT	CETECOM_TR21_1_0095401T01a_A3	6
Annex 4	Test set-up photographs	CETECOM_TR21_1_0095401T01a_A4	5
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

1.3 Summary of Test Results

The EUT integrates a 2.4 GHz W-LAN transmitter. Other implemented wireless technologies were not considered within this test report.

Test case	Reference Clause FCC ☒	Reference Clause ISSED ☒	Page	Remark	Result
Duty-Cycle	§15.35(c)	RSS-Gen Issue 5, §8.2	11	--	PASSED
Minimum Emission Bandwidth 6 dB	§15.247 5.2(a)	RSS-247, § 5.2(a) RSS-Gen Issue 5, § 6.7	--	*1)	NP
Occupied Channel Bandwidth 99%	2.1049(h)	RSS-Gen Issue 5, § 6.7	--	*1)	NP
RF output power	§15.247(b)(3)	RSS-247, § 5.4(d)	12	--	PASSED
Transmitter Peak output power radiated	§15.247(b)(4)(c) (i)	RSS-247, § 5.4(d)	--	--	NP
Emissions in non-restricted frequency bands	§15.247(d)	RSS-247, § 5.5	--	*1)	NP
Radiated Band-Edge emissions	§15.205(b) §15.247(d)	RSS-Gen: Issue 5 §8.9, §8.10 RSS-247, § 5.5	16	--	PASSED
Power spectral density	§15.247(e)	RSS-247, § 5.2(b)	--	*1)	NP
Radiated field strength emissions below 30 MHz	§15.205(a) §15.209(a)	RSS-Gen: Issue 5 §8.9 Table 6	--	*1)	NP
Radiated field strength emissions 30 MHz – 1GHz	§15.209 §15.247(d)	RSS-Gen: Issue 5 §8.9 Table 5 RSS-247, § 5.5	--	*1)	NP
Radiated field strength emissions above 1 GHz	§15.209(a) §15.247(d)	RSS-Gen: Issue 5: §8.9 Table 5+7 RSS-247, § 5.5	14	*1)	PASSED
AC-Power Lines Conducted Emissions	§15.207	RSS-Gen Issue 5: § 8.8, Table 4	--	--	N/A

Remarks:

*1) For FCC and IC test reports please refer to test report 1-8866_19-03-02-A by CTC advanced issued 2020-07-02.

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the CETECOM Laboratory.

*The calculation of the measurement uncertainty shows compliance with the "maximum measurement uncertainties" of the tested standard and therefore for result evaluation the stated uncertainties will not be additionally added to the measured results.

1.4 Summary of Test Methods

Test case	Test method
Duty-Cycle	ANSI C63.10:2013, §11.6(b)
Minimum Emission Bandwidth 6 dB	ANSI C63.10:2013, §6.9.2, §11.8
Occupied Channel Bandwidth 99%	ANSI C63.10:2013, §6.9.3
RF output power	ANSI C63.10:2013, §11.9
Power spectral density	ANSI C63.10:2013, §11.10
Emissions in non-restricted frequency bands	ANSI C63.10:2013, §11.11, §6.10.5
Radiated Band-Edge emissions	ANSI C63.10:2013; "Marker-Delta method", §6.10.5, §11.13
Transmitter Peak output power radiated	Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest
Radiated field strength emissions below 30 MHz	ANSI C63.10-2013 §6.3, §6.4
Radiated field strength emissions 30 MHz- 1 GHz	ANSI C63.4-2014 §8.2.3, ANSI C63.10-2013 §6.3, §6.5
Radiated field strength emissions above 1 GHz	ANSI C63.4-2014 §8.3, ANSI C63.10-2013 §6.3, §6.6
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 §7, ANSI C63.10-2013 §6.2

And reference also to Test methods in KDB558074

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Ninovic Perez
Accreditation scope:	DAkkS Webpage: FCC ISSED
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

2.4 Organizational Items

Responsible test manager:	M.Sc. Patrick Marzotko
Receipt of EUT:	2021-Jul-08
Date(s) of test:	2021-Aug-05 – 2021-Aug-12
Version of template:	14.7

2.5 Applicant's details

Applicant's name:	Robert Bosch GmbH
Address:	Riedwiesenstr. 1 71226 Leonberg Baden-Wuerttemberg Germany
Contact Person:	Steven Watterott
Contact Person's Email:	Steven.Watterott@de.bosch.com

2.6 Manufacturer's details

Manufacturer's name:	Robert Bosch GmbH
Address:	Riedwiesenstr. 1 71226 Leonberg Deutschland

2.1 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	Product	Model	Type	S/N	HW status	SW status
EUT 01	21-1-00954S02_C01	Electronical Control Unit with Bluetooth Low Energy and WLAN	NRCS2P	Y5401-01	C4.1	21/10.14	21/10.14

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.2 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

Short description*)	PMT Sample No.	Auxiliary Equipment	Type	S/N	HW status	SW status
AE 01	21-1-00954S03_C01	Antenna	RKE223E1GNS	002728	N/A	N/A
AE 02	21-1-00954S05_C01	Lenovo Laptop	ThinkPad T15	PF1TC2GK	N/A	N/A

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.3 Connected cables

Short description*)	PMT Sample No.	Cable type	Connectors	Length
CAB 01	21-1-00954S09_C01	FlexRay Dongle	N/A	1.5m
CAB 02	21-1-00954S10_C01	cable harness	Multipin	1m
CAB 03	21-1-00954S07_C01	Fakra cable	Fakra	1.5m
CAB 04	21-1-00954S06_C01	Fakra cable to SMA cable	Fakra to SMA	0.5 m

*) CAB short description is used to simplify the identification of the connected cables in this test report.

2.4 Software

Short description*)	PMT Sample No.	Software	Type	S/N	HW status	SW status
SW 01	SW installed on 21-1-00954S05_C01	Vector CANoe	CAN Simulation SW	--	--	V11.0.96 (SP4)

*) SW short description is used to simplify the identification of the used software in this test report.

2.5 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT 01 + AE 01 + AE 02 + CAB 01 + CAB 02 + CAB 03	Used for Radiated measurements
2	EUT 01 + AE 02 + CAB 01 + CAB 02 + CAB 03 + CAB 04	Used for Conducted measurements

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.6 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
op. 1	WLAN_TX-Mode	With help of special test firmware TX-mode was set-up. We refer to applicants information/papers for details about necessary commands.

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	NRCS2P		
Kind of product	Electronical Control Unit with Bluetooth Low Energy and WLAN		
Firmware	<input type="checkbox"/> for normal use	<input checked="" type="checkbox"/> Special version for test execution	
	<input type="checkbox"/> AC Mains	-	
	<input checked="" type="checkbox"/> DC Mains	13.5 V DC	
	<input type="checkbox"/> Battery	-	
Operational conditions	$T_{nom} = +20\text{ °C}$	$T_{min} = -40\text{ °C}$	$T_{max} = +85\text{ °C}$
EUT sample type	Production		
Weight	0.7kg		
Size [LxWxH]	240x125x40mm		
Interfaces/Ports	Fakra, CAN		
For further details refer Applicants Declaration & following technical documents <ul style="list-style-type: none"> - 20210222_Radio_type_approval Testing_instructions_NRCS2P - Technical Passport NRCS2P 			
For further details regarding radio parameters, please refer to IEEE802.11 Specification			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

Frequency Band	2.4 GHz ISM Band (2400 MHz - 2483.5 MHz)		
MIMO	<input type="checkbox"/>		
Frequency Channel B.W. (USA bands only)	<input checked="" type="checkbox"/> WLAN 2.4 GHz 802.11b g n (SISO)	Ch 1 2 3 4 5 6 7 Ch. 8 9 10 11	Bandwidth 20 MHz
	<input type="checkbox"/> WLAN 2.4 GHz 802.11n (SISO)	Ch 3 4 5 6 7 8 9	Bandwidth 40 MHz
802.11b – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> DBPSK 1 Mbps <input checked="" type="checkbox"/> DQPSK 2 Mbps <input checked="" type="checkbox"/> CCK-PBCC 5.5 Mbps / 11 Mbps <input checked="" type="checkbox"/> ERP-PBCC 22 Mbps		
802.11g – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> BPSK 6 Mbps / 9 Mbps <input checked="" type="checkbox"/> QPSK 12 Mbps / 18 Mbps <input checked="" type="checkbox"/> 16-QAM 24 Mbps / 36 Mbps <input checked="" type="checkbox"/> 64-QAM 48 Mbps / 54 Mbps		
802.11n – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> HT20(MCS0 to MCS7) 7.2 / 14.4 / 21.7 / 28.9 / 43.3 / 57.8 / 65 / 72.2 Mbps <input type="checkbox"/> HT40(MCS0 to MCS15) 15/30/45/60/90/120/135/150/180/240/270/300 Mbps		
Other wireless options	<input type="checkbox"/> WLAN 5 GHz 802.11 a/n/ac mode ((not tested within this report) <input type="checkbox"/> Bluetooth LE (not tested within this report) <input type="checkbox"/> Bluetooth EDR (not tested within this report) <input type="checkbox"/> Cellular transceiver (2G/3G/4G/5G/GPS, not tested in this report)		
Max. Conducted Output Power	b-mode: 14.7 dBm g-mode: 20.0 dBm n-mode(20 MHz): 20.0 dBm		
EIRP WLAN (Calculated EIRP)	b-mode: 14.7 dBm + 7.6 dBi = 22.3 dBm g-mode: 20.0 dBm+ 7.6 dBi = 27.6 dBm n-mode(20 MHz): 20.0 dBm + 7.6 dBi = 27.6 dBm		
Antenna Type(s)	External antenna (AE 01)		
Antenna Gain(s)	+7.6 dBi		
FCC label attached	No		
Test firmware / software and storage location	Vector CANoe V11.0.96 (SP4) on AE 02		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)		Version	Total Pages
20210222_Radio_type_approval Testing_instructions_NRCS2P		14 May 2020	22
Technical Passport NRCS2P		20 May 2020	8

3.3 Worst case identification

WLAN mode	Data rate
802.11n, 20 MHz bandwidth	MCS0

3.4 Modifications on Test sample

Additions/deviations or exclusions	--
------------------------------------	----

4 Measurements

4.1 Duty-Cycle

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

The necessary duty-cycle correction factor is determined on nominal conditions on middle channel only. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

A special firmware program is used for test purposes. In opposite to normal operating mode a higher duty-cycle is set in order to facilitate the measurements. This is maximized at the extent possible.

The necessary duty-cycle correction factor is determined on nominal conditions on one channel in each operable frequency-band. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions. The Duty-Cycle was constant, means without variations.

Formula to calculate Duty-Cycle:

Duty cycle calculations: $x = \frac{TX_{ON}}{TX_{ON} + TX_{OFF}}$	Duty cycle factor: DC=	Regarding power: $10 * \log(1/x)$ dB
		Regarding field strength: $20 * \log(1/x)$ dB

☐ The results were corrected in order to evaluate for worst-case result each time when average values are necessary for example average radiated emissions or similar

☒ No correction necessary: Duty-Cycle > 98%

4.1.1 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
------------------	---------------------------------------

4.2 RF output power


4.2.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to power meter (3) or spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings.


MIMO

The EUT use MIMO technology as it use multiple antennas for receive and transmit. The measurements are performed by using R&S TS8997 (Ref.No. 693) test system which is able to perform measurements simultaneously and time-synchronized on maximum 8 antenna conducted RF-ports. A common trigger ensures the sampling time is minimized so the total power represents a sampling value calculated for all 8-ports simultaneously for each time bin/frame. A high data sampling rate together with a wide band power measurement capability ensures that latest modulation schemes are correctly measured. Therefore testing method Subchapter E1 of KDB662911 is fulfilled. (measure-and-sum technique).

Schematic:

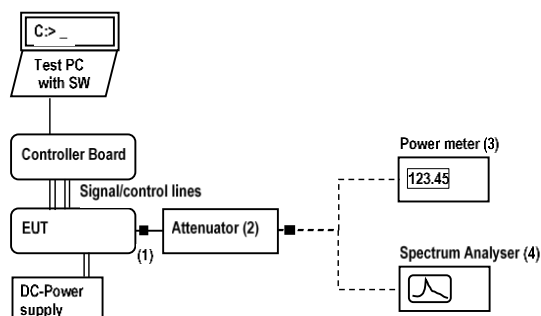

Schematic MIMO:

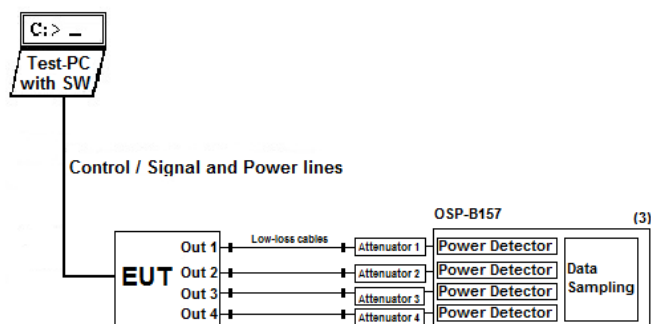

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

Test method	AVPM-G (duty-cycle < 98% (constant))
SISO	<input checked="" type="checkbox"/>
MIMO	<input type="checkbox"/> Summation of values from two antenna ports
Remarks	--

The measurement was performed in non-hopping transmission mode with the carrier set to lowest/middle and highest channel.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.
Different modulation characteristics have been checked, e.g. data rates which EUT can operate

4.2.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
------------------	---------------------------------------

4.2.3 Limit

Frequency Range [MHz]	Limit [W]	Limit [dBm]	Detector	RBW / VBW [MHz]
2400 - 2483.5	1	30	RMS	20 / 30

4.2.4 Result Conducted Power Verification

Mode	Channel	Frequency [MHz]	Max Peak Power [RMS]	Result
b-mode, 1Mbps	1	2412	14.65	Measured values under initial maximum value of 14.70 dBm => PASSED
b-mode, 1Mbps	6	2437	14.29	
b-mode, 1Mbps	11	2462	14.24	
g-mode, 6Mbps	1	2412	16.09	Measured values under initial maximum value of 20 dBm => PASSED
g-mode, 6Mbps	6	2437	16.09	
g-mode, 6Mbps	11	2462	16.10	
n-mode, MCS0	1	2412	16.48	Measured values under initial maximum value of 20 dBm => PASSED
n-mode, MCS0	6	2437	16.32	
n-mode, MCS0	11	2462	16.22	


Remark: for more information and graphical plot see annex A1 **CETECOM_TR21_1_0095401T01a_A1**

4.3 Radiated field strength emissions above 1 GHz

4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

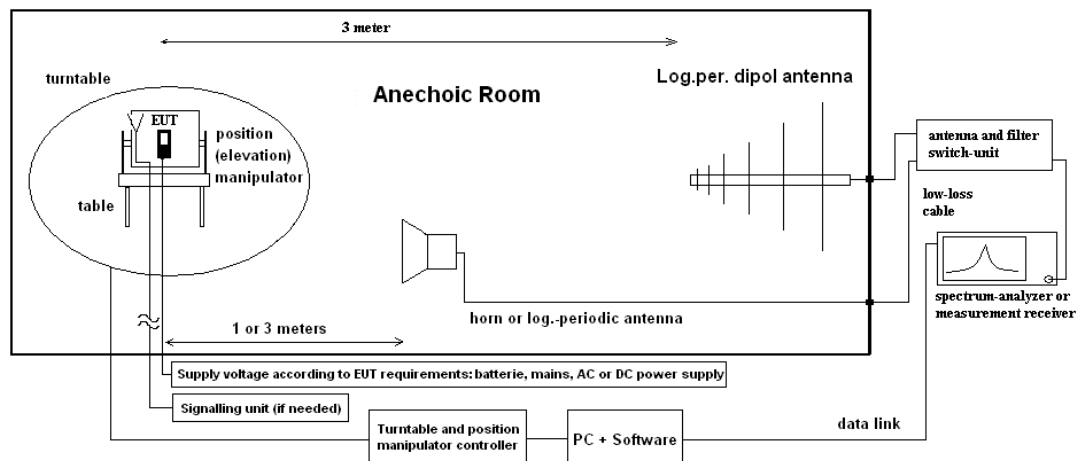

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

A_F = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

4.3.2 Measurement Location

Test site 2.8 – 15GHz	120904 - FAC1 - Radiated Emissions
Test site 15– 18 GHz	120907 - FAC2

4.3.3 Limit

Radiated emissions limits (3 meters)				
Frequency Range [MHz]	Limit [μ V/m]	Limit [dB μ V/m]	Detector	RBW / VBW [kHz]
Above 1000	500	54	Average	1000 / 3000
Above 1000	5000	74	Peak	1000 / 3000

4.3.4 Result

Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 2.8 – 15 GHz	Result
4.01a	6	n-mode HT20 MCS0 ch06	60.58 @ 5.972 GHz	PASSED

Remark: for more information and graphical plot see annex A1 **CETECOM_TR21_1_0095401T01a_A1**


Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 15 – 18 GHz	Result
4.01b	6	n-mode HT20 MCS0 ch06	55.27 @ 17.572 GHz	PASSED
4.01c	6	n-mode HT20 MCS0 ch06	55.42 @ 17.891 GHz	PASSED

Remark: for more information and graphical plot see annex A1 **CETECOM_TR21_1_0095401T01a_A1**

4.4 Radiated Band-Edge emissions

4.4.1 Description of the general test setup and methodology, see below example:

Schematic:

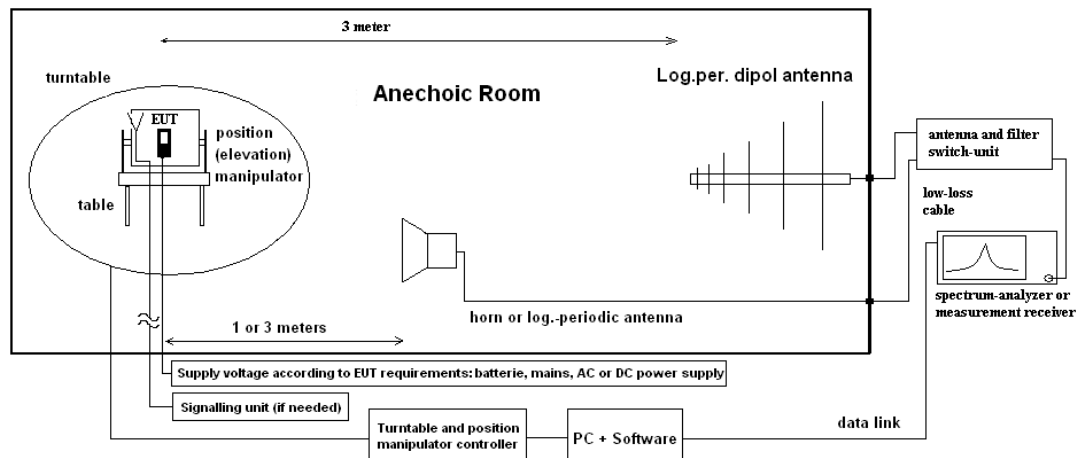

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

For uncritical results where a measurement resolution bandwidth of 1MHz can clearly show the compliance without influencing the results, a field strength measurement was performed to show compliance.

For critical results a Marker-Delta marker method was used for showing compliance to restricted bands.

The method consists of three independent steps:

1. Step: Prior to the measurement the fundamental radiated In-Band field strength was performed. The determined value is used as reference value.
2. Step: Second step consist of finding the relative attenuation between the fundamental emission and the maximum local out-of-band emission (within 2 MHz range around the band edge either on the band-edge directly or some modulation product if the level is greater than that on the band-edge) when measured with lower resolution bandwidth.
3. Step: The delta value recorded in step 2 will be subtracted from value recorded in step 1, thus giving the required field strength at the band-edge. This value must fulfil the requirements for radiated spurious emissions in restricted bands in FCC §15.205 with the general limits of FCC §15.209

The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.

4.4.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
-----------	------------------------------------

4.4.3 Limit

Frequency Range [MHz]	Pk Limit [dBc]	Avg Limit [dBc]	Avg Limit [dBμV/m]	Pk Limit [dBμV/m]	Detector	RBW / VBW [kHz]
Below 2390	-	-	54	74	Average / Peak	100 / 300
Above 2483.5	-	-	54	74	Average / Peak	1000 / 3000
2390 - 2400	-20	-	-	-	Peak	100 / 300
2390 - 2400	-	-30	-	-	Average	100 / 300

4.4.4 Result

Non-restricted bands near-by

Diagram	Channel	Mode	Peak [dBc]	Average [dBc]	Result
9.01a	01	n-mode HT20 MCS0	33.04	33.89	PASSED

Remark: for more information and graphical plot see annex A1 **CETECOM_TR21_1_0095401T01a_A1**

Restricted bands near-by

Diagram	Channel	Mode	Peak [dBμV/m]	Average [dBμV/m]	Result
9.01b	11	n-mode HT20 MCS0	101.19	92.25	PASSED

Remark1: Average value corrected with Duty Cycle - Factor

Remark2: for more information and graphical plot see annex A1 **CETECOM_TR21_1_0095401T01a_A1**

4.5 Results from external laboratory

None	-
------	---

4.6 Opinions and interpretations

None	-
------	---

4.7 List of abbreviations

None	-
------	---

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal due date
	120904 - FAC1 - Radiated Emissions			
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	81650455	2022-May-25
20489	EMI Test Receiver ESU40	Rohde & Schwarz Messgerätebau GmbH	100030	2022-May-19
20254	High Pass Filter 5HC 2600/12750-1.5KK	Trilithic	23042	1b
20868	High Pass Filter AFH-07000	AtlanTecRF	16071300004	1b
20291	High Pass Filter WHJ 2200-4EE	Wainwright Instruments GmbH	14	1b
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	2021-Jul-19
20302	Horn Antenna BBHA9170 (Meas 1)	Schwarzbeck Mess-Elektronik OHG	155	1b
20720	Measurement Software EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.xx	1b
20512	Notch Filter WRCA 800/960-02/40-6EEK (GSM 850)	Wainwright Instruments GmbH	24	1b
20290	Notch Filter WRCA 901,9/903,1SS	Wainwright Instruments GmbH	3RR	1b
20122	Notch Filter WRCB 1747/1748	Wainwright Instruments GmbH	12	1b
20121	Notch Filter WRCB 1879,5/1880,5EE	Wainwright Instruments GmbH	15	1b
20448	Notch Filter WRCT 1850.0/2170.0-5/40-10SSK	Wainwright Instruments GmbH	5	1b
20066	Notch Filter WRCT 1900/2200-5/40-10EEK	Wainwright Instruments GmbH	5	1b
20449	Notch Filter WRCT 824.0/894.0-5/40-8SSK	Wainwright Instruments GmbH	1	1b
20611	Power Supply E3632A	Agilent Technologies Deutschland GmbH	KR 75305854	1b
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	1b
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	1b
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	1b

ID	Description	Manufacturer	SerNo	Cal due date
20670	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH	106833	2022-Jun-16
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	2023-May-20
20439	Ultrabroadband-Antenna HL562	Rohde & Schwarz Messgerätebau GmbH	100248	2023-Mar-10
	120907 - FAC2			
20836	1-18 GHz Amplifier	Wright Technologies, Inc., Inc.	0001	1c
20005	AC - LISN 50 Ohm/50μH ESH2-Z5	Rohde & Schwarz Messgerätebau GmbH	861741/005	2022-May-20
20133	Horn Antenna 3115 (Meas 1)	EMCO Elektronik GmbH	9012-3629	2023-Apr-08
20877	JS42-08001800-16-8P Verstärker	Miteq Inc.	2079991 / 2079992	1c
20912	Low noise Amplifier Module 0.5-4GHz	RF-Lambda Europe GmbH	19041200083	1c
20732	Signal- and Spectrum Analyzer FSW67	Rohde & Schwarz Messgerätebau GmbH	104023	2022-May-27

Remarks: *1a: calibrated with system 120901 - SAC
 *1b: calibrated with system 120904 - FAC1
 *1c: calibrated with system 120907 – FAC2
 Pre-m: Check before starting the measurement

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor k , such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%							Remarks
Conducted emissions (U _{CISPR})	-	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB							-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB							Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-	
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--		
		12.75 GHz - 26.5 GHz	N/A	0.82	--	N/A	N/A	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable	
		2.8 GHz - 12.75 GHz	1.48	N/A	1.51	N/A	1.43	--		
		12.75 GHz – 18 GHz	1.81	N/A	1.83	N/A	1.77	--		
		18 GHz - 26.5 GHz	1.83	N/A	1.85	N/A	1.79	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
			1.0 dB							Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
	-		See above: 0.70 dB							Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm							-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.01dB							Magnetic field strength
		30 MHz - 1 GHz	5.83 dB							Electrical Field strength
		1 GHz - 18 GHz	4.91 dB							
		18-26.5 GHz	5.06 dB							

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2021-Sep-02
--	--	--
--	--	--

End Of Test Report