



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Cameo Communications, Inc.
Applicant Address	No.42 Sec. 6, Mincyuan E. Rd., Neihu District, Taipei City 114, Taiwan
FCC ID	NHPWLN1501
Manufacturer's company	Cameo Communications, Inc.
Manufacturer Address	No.42 Sec. 6, Mincyuan E. Rd., Neihu District, Taipei City 114, Taiwan

Product Name	802.11n(1.0 draft) Wireless USB Dongle
Brand Name	Cameo
Model Name	WLN-1501
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jan. 11, 2007
Final Test Date	Jan. 22, 2007
Submission Type	Original Equipment



Statement

Test result included is only for the 802.11n part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures

and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	7
3.9. Test Configurations	8
4. TEST RESULT	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Maximum Peak Output Power Measurement	14
4.3. Power Spectral Density Measurement	16
4.4. 6dB Spectrum Bandwidth Measurement	24
4.5. Radiated Emissions Measurement	32
4.6. Band Edge Emissions Measurement	64
4.7. Antenna Requirements	77
5. LIST OF MEASURING EQUIPMENTS	78
6. TEST LOCATION.....	80
7. NVLAP CERTIFICATE OF ACCREDITATION	81
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A8
APPENDIX B. TEST PHOTOS.....	B1 ~ B6



1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11n(1.0 draft) Wireless USB Dongle
Brand Name : Cameo
Model Name : WLN-1501
Applicant : Cameo Communications, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 11, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Wayne Hsu 2.26.07'. The signature is written over a horizontal line.

Wayne Hsu

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	13.71 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	13.58 dB
4.3	15.247(e)	Power Spectral Density	Complies	23.51 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.24 dB
4.6	15.247(d)	Band Edge Emissions	Complies	7.16 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Power Type	From Host system
Modulation	see the below table for draft 802.11n
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for draft 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8(20MHz) : 17.76 MHz MCS8 (40MHz) : 36.28 MHz MCS0 (20MHz) : 17.76 MHz MCS0 (40MHz) : 36.22 MHz
Conducted Output Power	MCS8(20MHz) : 16.42 dBm MCS8 (40MHz) : 16.33 dBm MCS0 (20MHz) : 13.55 dBm MCS0 (40MHz) : 13.56 dBm
Carrier Frequencies	Please refer to section 3.5
Antenna	Please refer to section 3.4

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11n	V	V	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

USB Cable	Cable Length
1	1.2m, Shielded

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
A	Walsin	RFANT3216120A5T	CHIP Antenna	NA	2.12
B	Walsin	RFANT3216120A5T	CHIP Antenna	NA	2.12

Note: (1) Ad Hoc mode is available in this product and it is not able to work on non-US/Canada channel for product marked on USA/Canada.

(2) For product available in the USA/Canada market, only channel 1~11 can be operated.

Selection of other channels is not possible.

3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

For draft 802.11n, the two TX Ant. A & Ant. B could transmit simultaneously.

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	6	A+B
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	1/6/11	A
	MCS0/40MHz	3/6/9	A
	MCS8/20MHz	1/6/11	A+B
	MCS8/40MHz	3/6/9	A+B
Radiated Emissions 9kHz~1GHz	11g/BPSK	6	A / A+B
Radiated Emissions 1GHz~10 th Harmonic	MCS0/20MHz	1/6/11	A
	MCS0/40MHz	3/6/9	A
	MCS8/20MHz	1/6/11	A+B
	MCS8/40MHz	3/6/9	A+B
Band Edge Emissions	MCS0/20MHz	1/6/11	A
	MCS0/40MHz	3/6/9	A
	MCS8/20MHz	1/6/11	A+B
	MCS8/40MHz	3/6/9	A+B

The following test modes were performed for all tests:

Mode 1: Dongle mode

Mode 2: Dongle +USB Cable mode

Due to Mode 2 generated the worst test result, so it was recorded in this report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D520	E2KWM3945ABG
Printer	EPSON	LQ-300	DOC
Modem	ACEEX	DM-1414	IFAXDM1414
AP	3COM	AP2750	O9C-AP2750

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 20MHz Ant. A

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n Ant. A	4f	4f	4e

Power Parameters of IEEE 802.11n MCS8 20MHz Ant. A + Ant. B

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n Ant. A	4f	4f	4e
IEEE 802.11n Ant. B	51	52	51

Power Parameters of IEEE 802.11n MCS0 40MHz Ant. A

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n Ant. A	50	51	50

Power Parameters of IEEE 802.11n MCS8 40MHz Ant. A + Ant. B

Test Software Version	DutApiClient_Usb		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n Ant. A	50	51	50
IEEE 802.11n Ant. B	53	53	53

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

Turn on the power of all equipment.

The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.

The NB sends " H " messages to the printer, then the printer prints them on the paper.

The NB sends " H " messages to the modem.

At the same time, the following programs were executed:


Executed "ping.exe" to link with the remote workstation to receive and transmit data by WLAN.

Executed " DutApiClient_Usb" to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

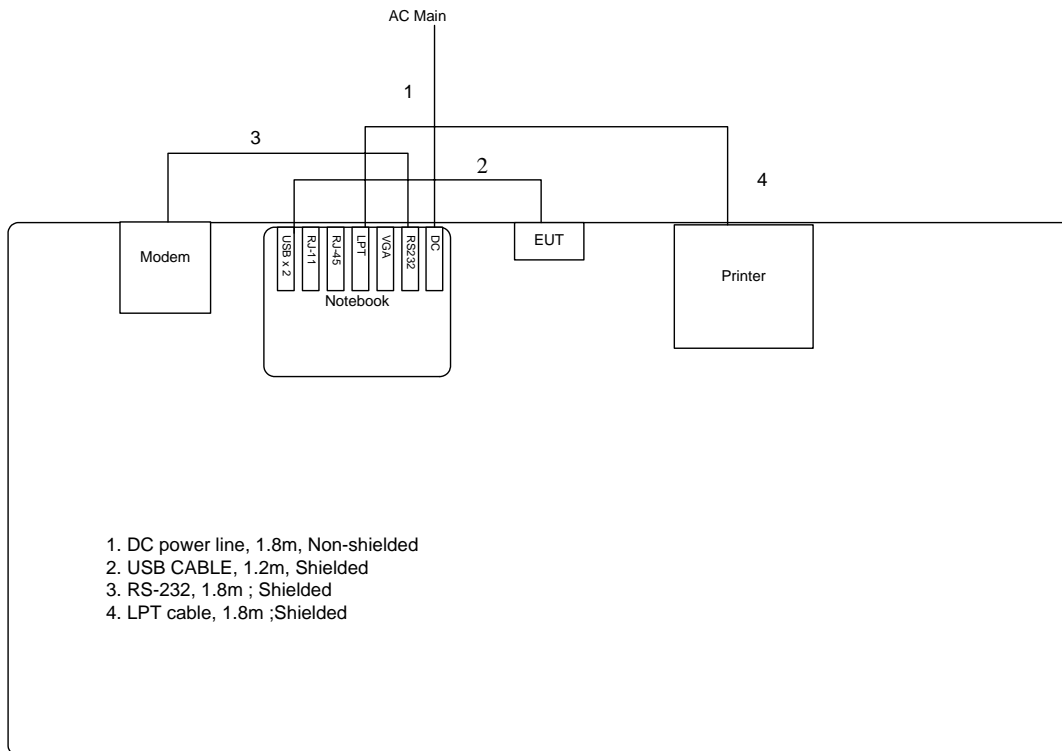

Test Configuration: above 1GHz

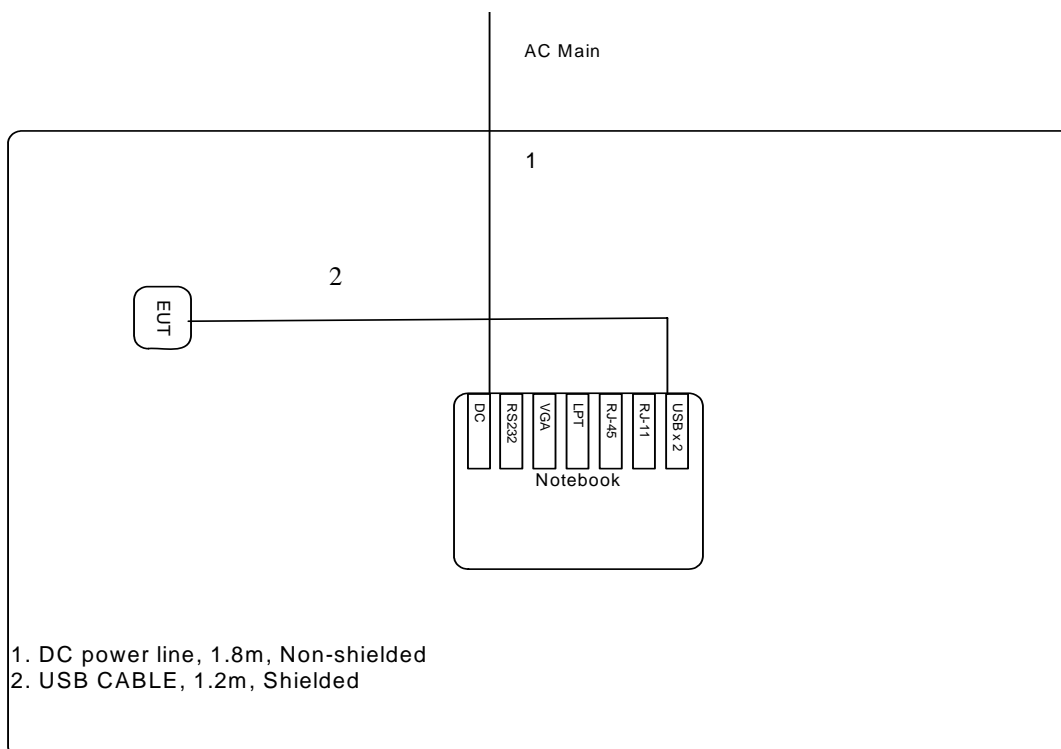

3.9.2. AC Power Line Conduction Emissions Test Configuration

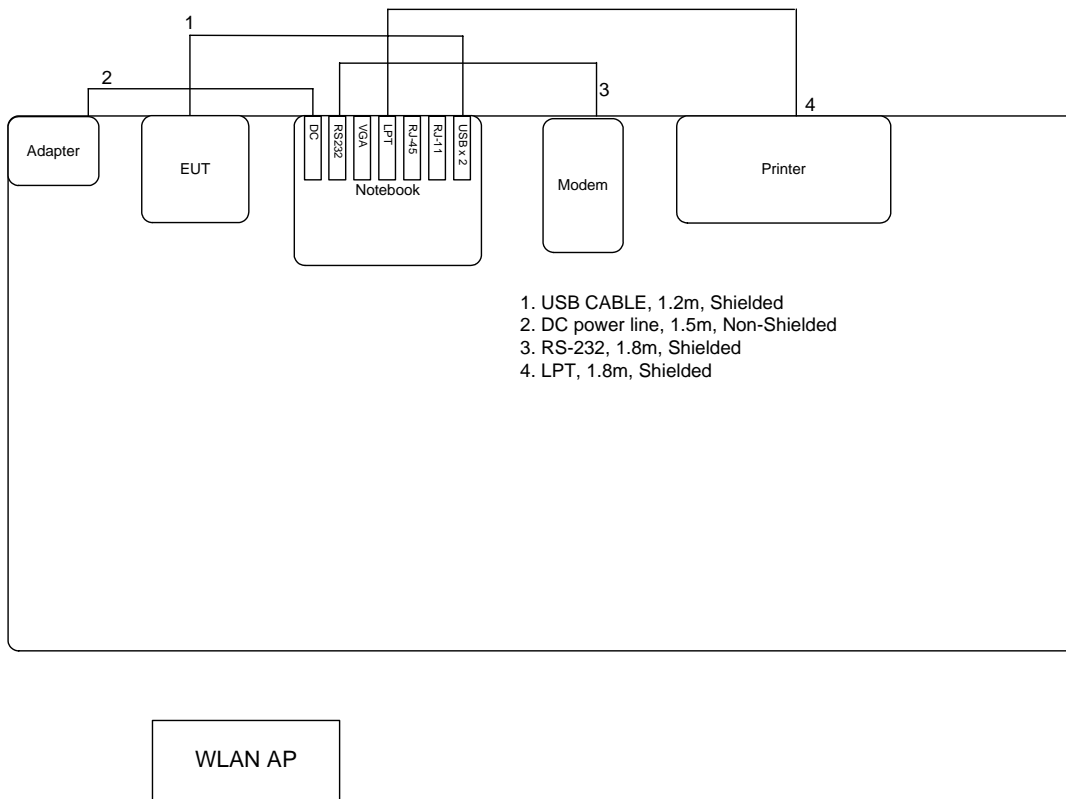

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

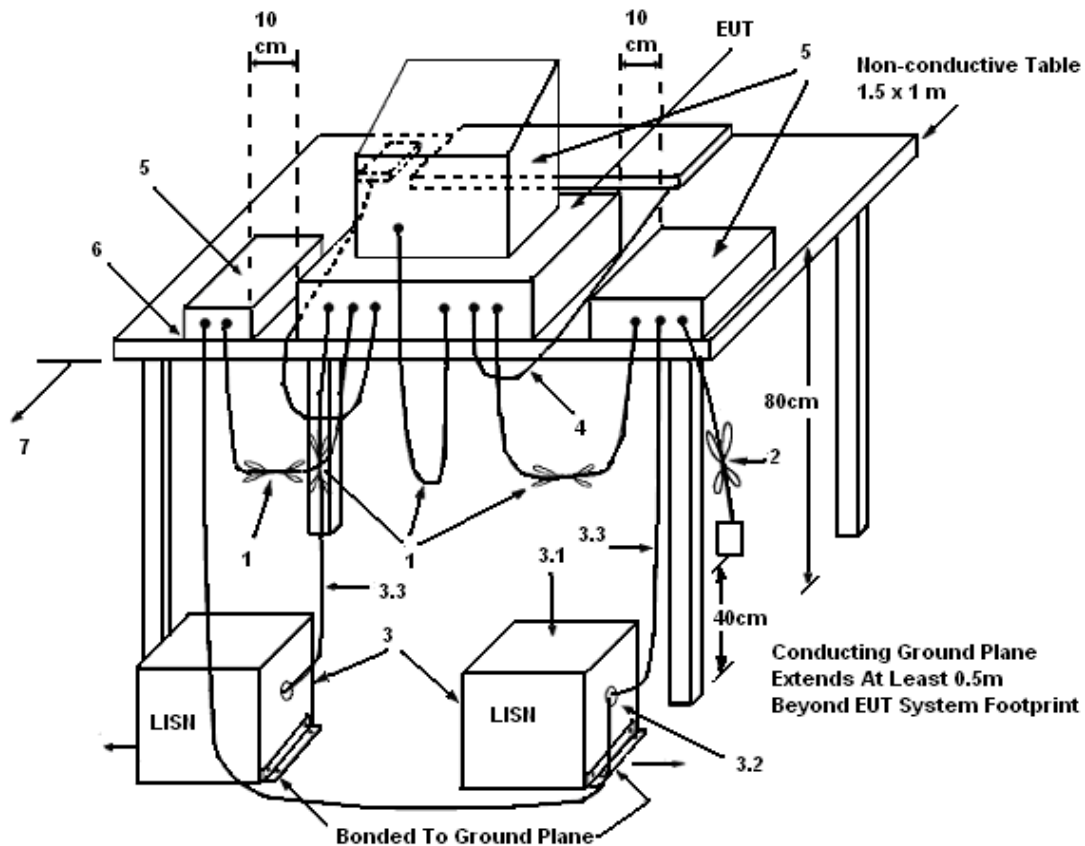

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	21°C	Humidity	62%
Test Engineer	Leo Hung	Phase	Line
Configuration	Normal Link / Mode 2		

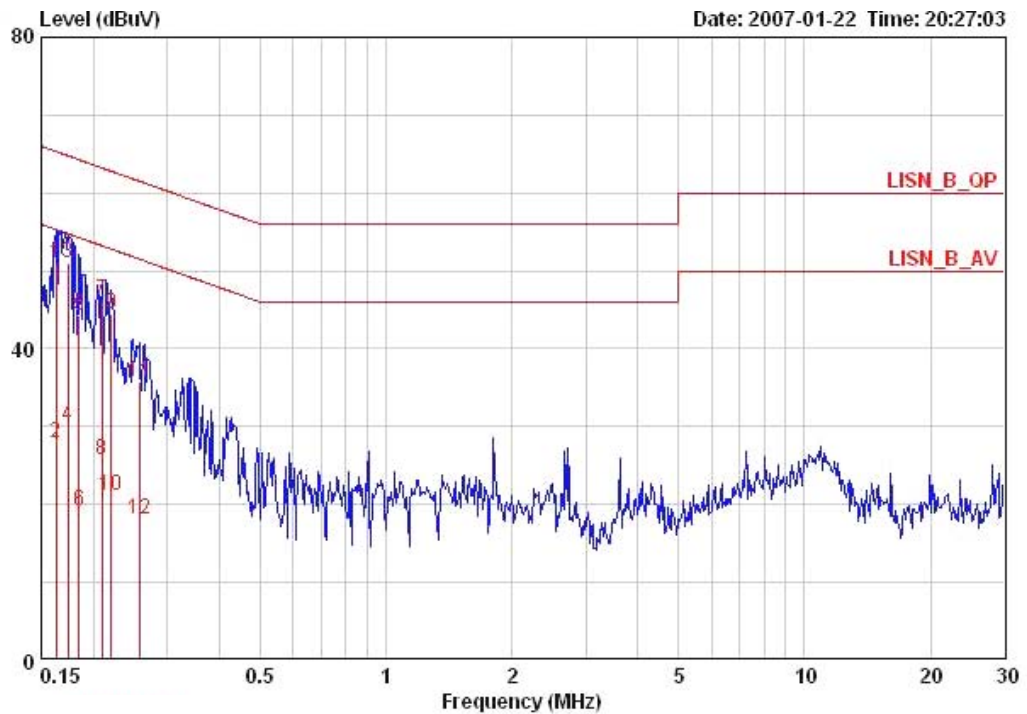

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16241	51.06	-14.28	65.34	50.69	0.17	0.20	QP	LINE
2	0.16241	27.97	-27.37	55.34	27.60	0.17	0.20	AVERAGE	LINE
3	0.17399	51.06	-13.71	64.77	50.71	0.15	0.20	QP	LINE
4	0.17399	30.05	-24.72	54.77	29.70	0.15	0.20	AVERAGE	LINE
5	0.18443	44.35	-19.94	64.28	44.02	0.13	0.20	QP	LINE
6	0.18443	19.22	-35.07	54.28	18.89	0.13	0.20	AVERAGE	LINE
7	0.20944	46.12	-17.10	63.23	45.83	0.09	0.20	QP	LINE
8	0.20944	25.79	-27.43	53.23	25.50	0.09	0.20	AVERAGE	LINE
9	0.22083	44.49	-18.30	62.79	44.20	0.09	0.20	QP	LINE
10	0.22083	21.15	-31.64	52.79	20.86	0.09	0.20	AVERAGE	LINE
11	0.25751	35.85	-25.66	61.51	35.59	0.06	0.20	QP	LINE
12	0.25751	18.19	-33.32	51.51	17.93	0.06	0.20	AVERAGE	LINE

Temperature	21°C	Humidity	62%
Test Engineer	Leo Hung	Phase	Neutral
Configuration	Normal Link / Mode 2		

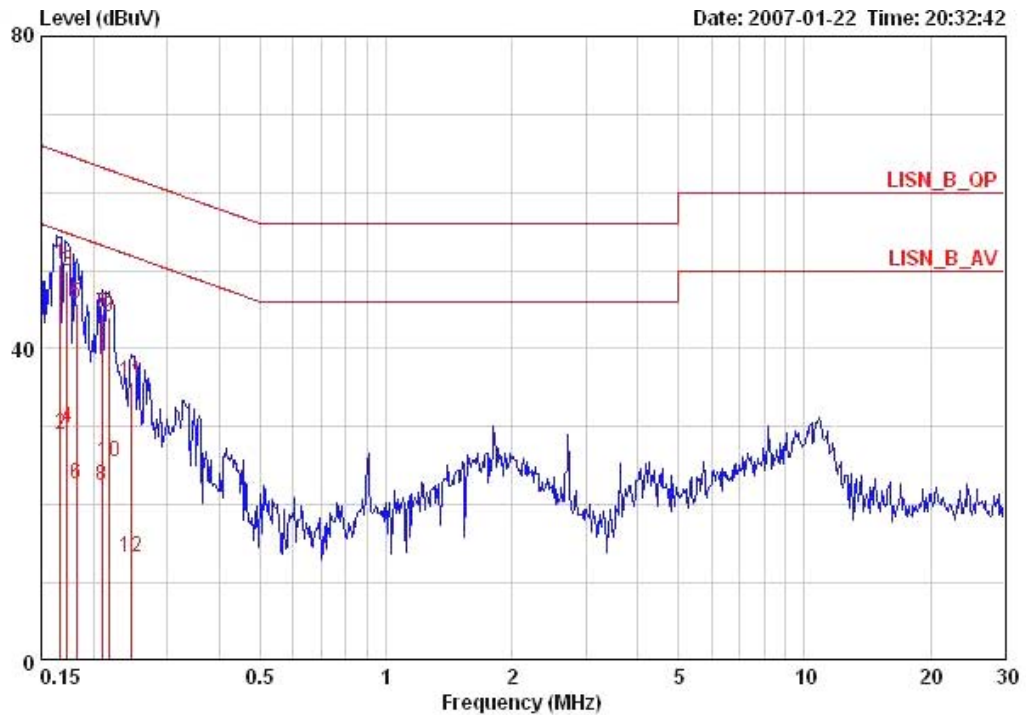

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.16627	50.75	-14.39	65.14	50.39	0.16	0.20	QP	NEUTRAL
2	0.16627	28.95	-26.19	55.14	28.59	0.16	0.20	AVERAGE	NEUTRAL
3	0.17307	49.88	-14.93	64.81	49.53	0.15	0.20	QP	NEUTRAL
4	0.17307	29.83	-24.98	54.81	29.48	0.15	0.20	AVERAGE	NEUTRAL
5	0.18249	45.79	-18.58	64.37	45.46	0.13	0.20	QP	NEUTRAL
6	0.18249	22.57	-31.80	54.37	22.24	0.13	0.20	AVERAGE	NEUTRAL
7	0.20944	44.39	-18.83	63.23	44.10	0.09	0.20	QP	NEUTRAL
8	0.20944	22.39	-30.83	53.23	22.10	0.09	0.20	AVERAGE	NEUTRAL
9	0.21735	44.13	-18.79	62.92	43.84	0.09	0.20	QP	NEUTRAL
10	0.21735	25.53	-27.39	52.92	25.24	0.09	0.20	AVERAGE	NEUTRAL
11	0.24552	35.81	-26.10	61.91	35.54	0.07	0.20	QP	NEUTRAL
12	0.24552	13.37	-38.54	51.91	13.10	0.07	0.20	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

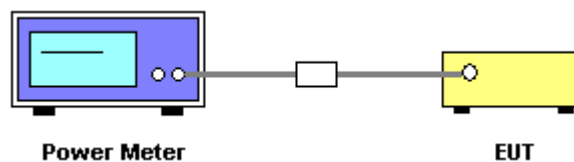

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	21°C	Humidity	62%
Test Engineer	Leo Hung	Configurations	802.11n / Mode 2

Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.55	30.00	Complies
6	2437 MHz	13.16	30.00	Complies
11	2462 MHz	13.42	30.00	Complies

Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.55	13.26	16.42	30.00	Complies
6	2437 MHz	13.16	13.32	16.25	30.00	Complies
11	2462 MHz	13.42	13.16	16.30	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.17	30.00	Complies
6	2437 MHz	13.56	30.00	Complies
9	2452 MHz	12.97	30.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.17	12.87	16.03	30.00	Complies
6	2437 MHz	13.56	13.08	16.33	30.00	Complies
9	2452 MHz	12.97	12.81	15.90	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

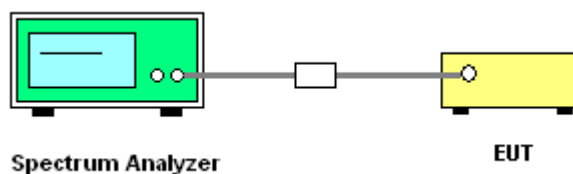

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	21°C	Humidity	62%
Test Engineer	Leo Hung	Configurations	802.11n / Mode 2

Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-21.49	8.00	Complies
6	2437 MHz	-20.69	8.00	Complies
11	2462 MHz	-22.02	8.00	Complies

Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-16.86	8.00	Complies
6	2437 MHz	-15.51	8.00	Complies
11	2462 MHz	-16.14	8.00	Complies


Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-23.40	8.00	Complies
6	2437 MHz	-23.65	8.00	Complies
9	2452 MHz	-23.74	8.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-17.92	8.00	Complies
6	2437 MHz	-17.09	8.00	Complies
9	2452 MHz	-18.22	8.00	Complies

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2412 MHz

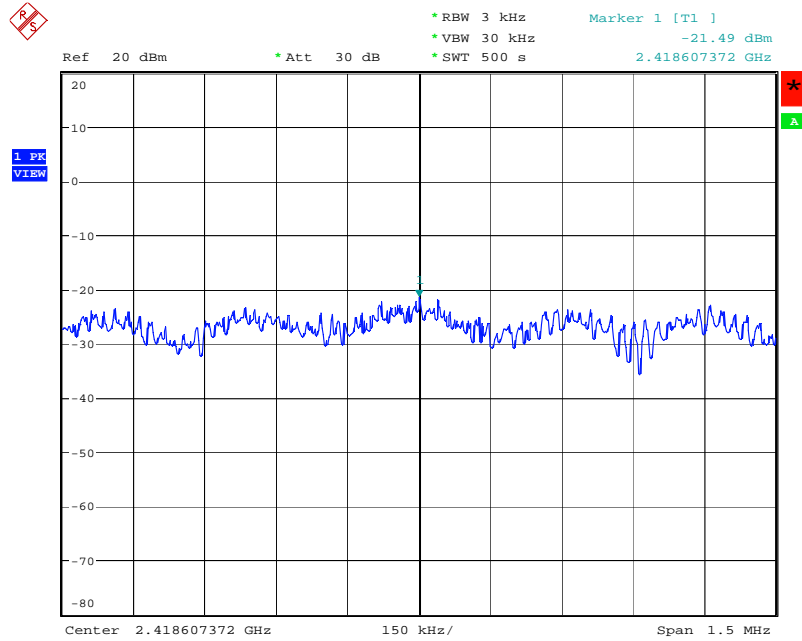


Date: 22.JAN.2007 18:08:34

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2437 MHz

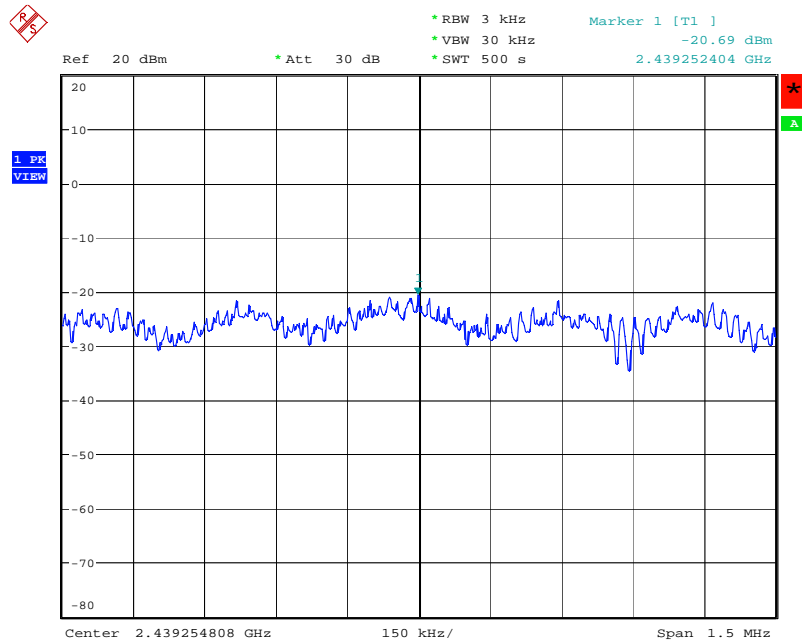


Date: 22.JAN.2007 18:10:19

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2462 MHz

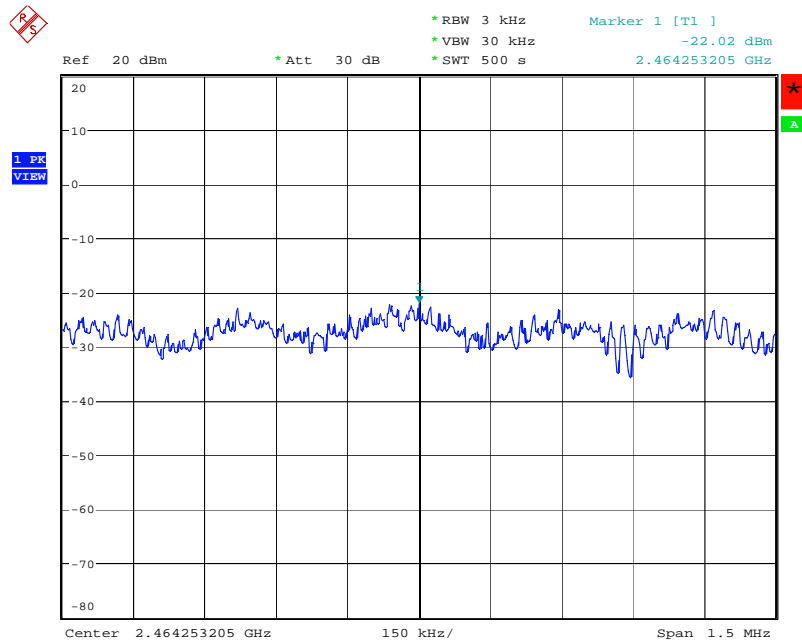


Date: 22.JAN.2007 18:11:35

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

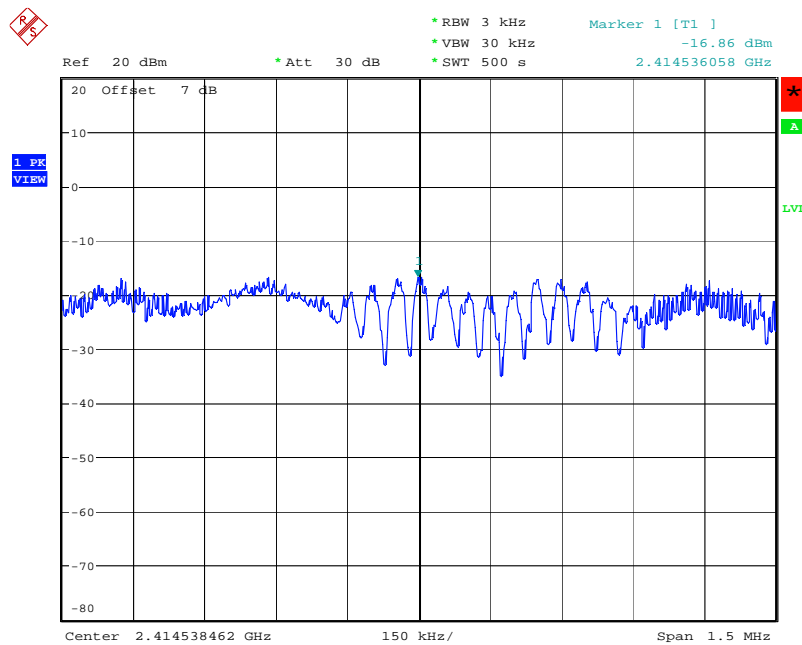


Date: 22.JAN.2007 15:29:23

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2422 MHz

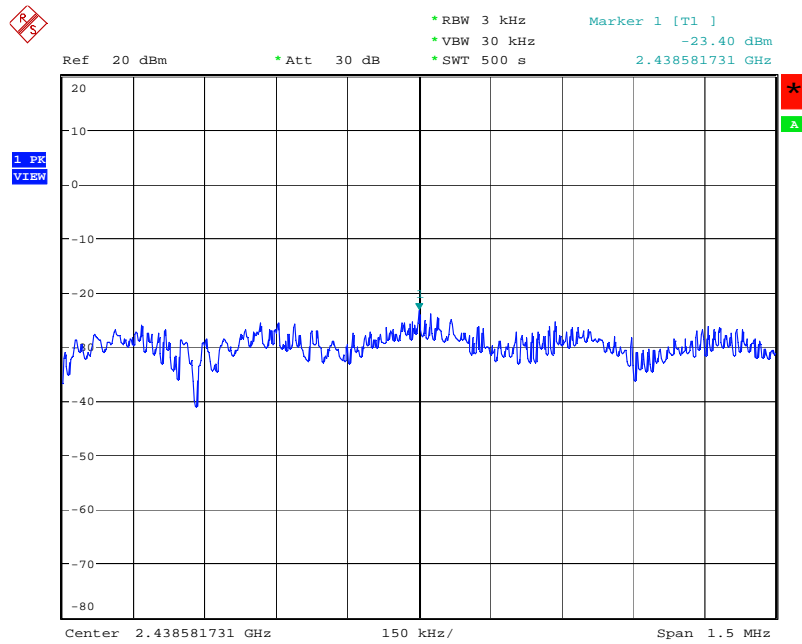


Date: 22.JAN.2007 18:28:07

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2437 MHz

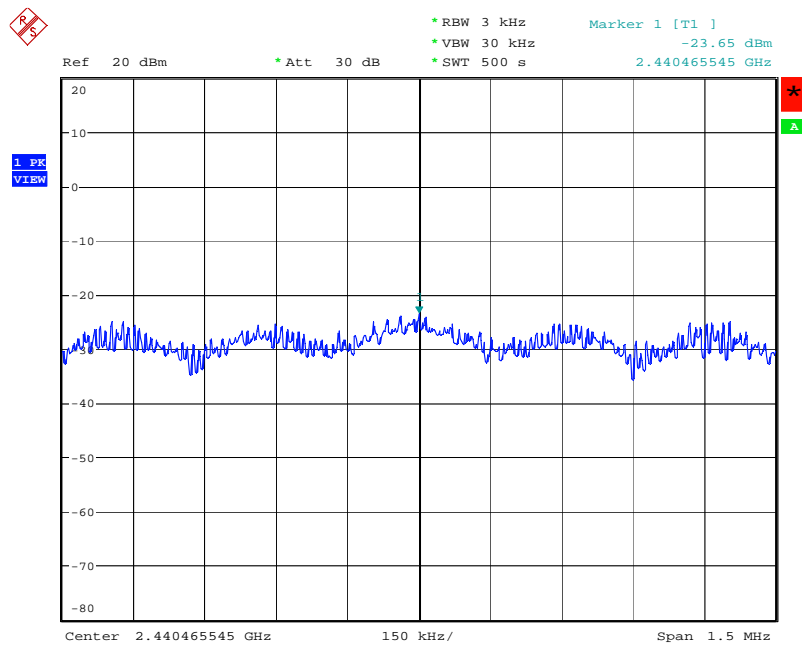


Date: 22.JAN.2007 18:29:32

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2452 MHz

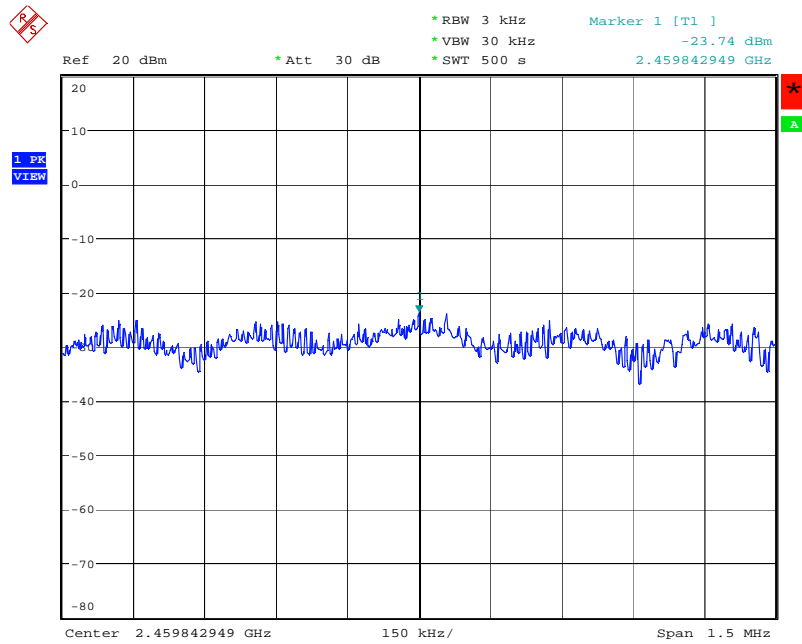


Date: 22.JAN.2007 18:30:37

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B/ 2422 MHz

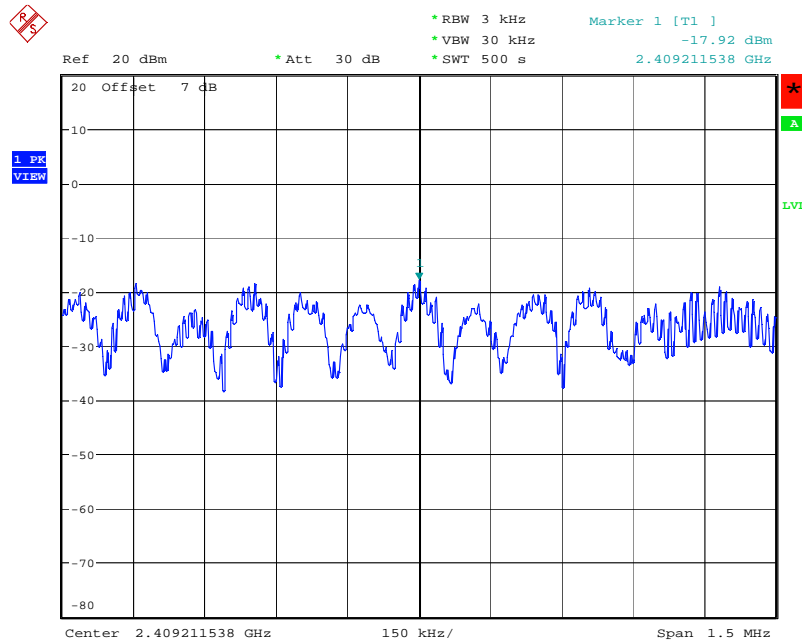


Date: 22.JAN.2007 15:42:53

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

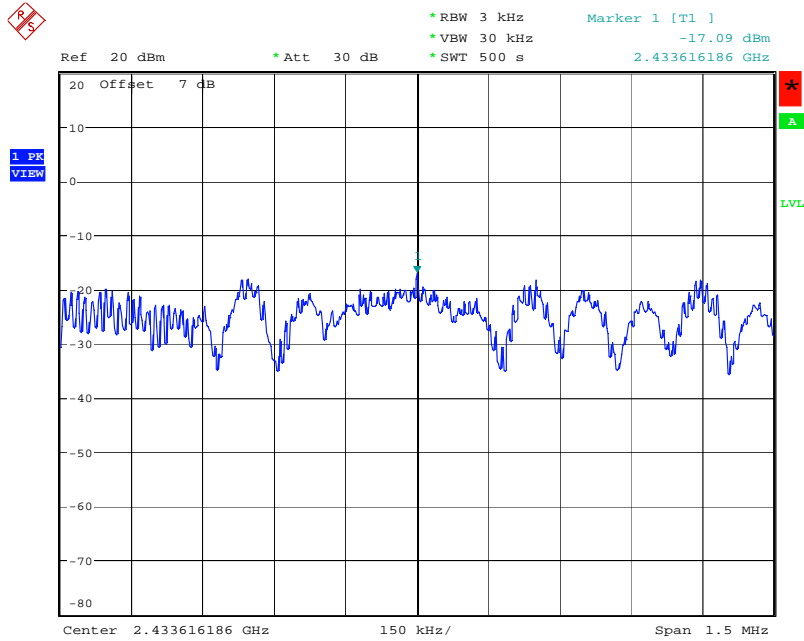

Date: 22.JAN.2007 15:44:20

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

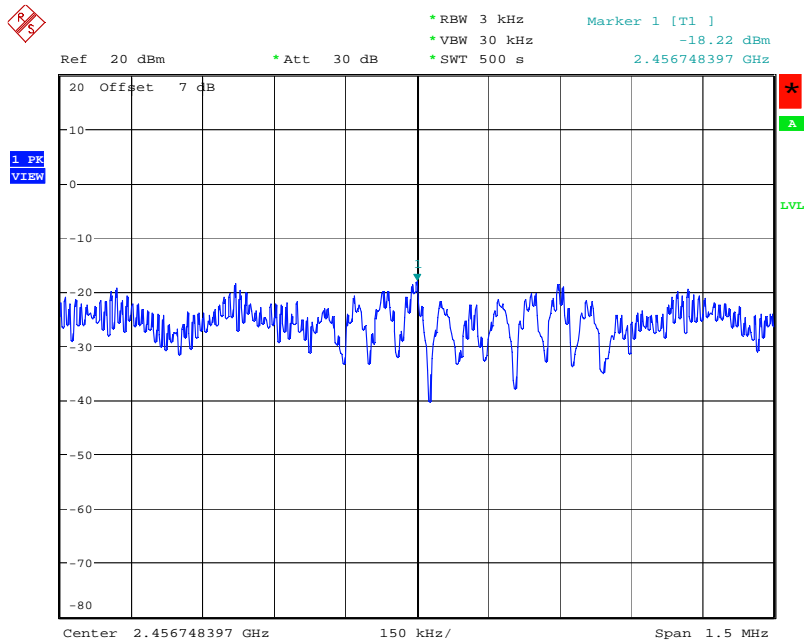

Date: 22.JAN.2007 15:53:40

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

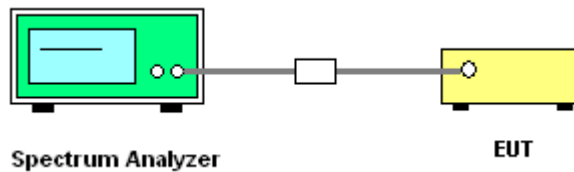

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	21°C	Humidity	62%
Test Engineer	Leo Hung	Configurations	802.11n / Mode 2

Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.89	17.76	500	Complies
6	2437 MHz	17.79	17.72	500	Complies
11	2462 MHz	17.82	17.76	500	Complies

Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.76	17.76	500	Complies
6	2437 MHz	17.82	17.69	500	Complies
11	2462 MHz	17.76	17.69	500	Complies


Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.47	36.22	500	Complies
6	2437 MHz	36.60	36.22	500	Complies
9	2452 MHz	36.54	36.22	500	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.47	36.22	500	Complies
6	2437 MHz	36.58	36.28	500	Complies
9	2452 MHz	36.47	36.28	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A / 2412 MHz

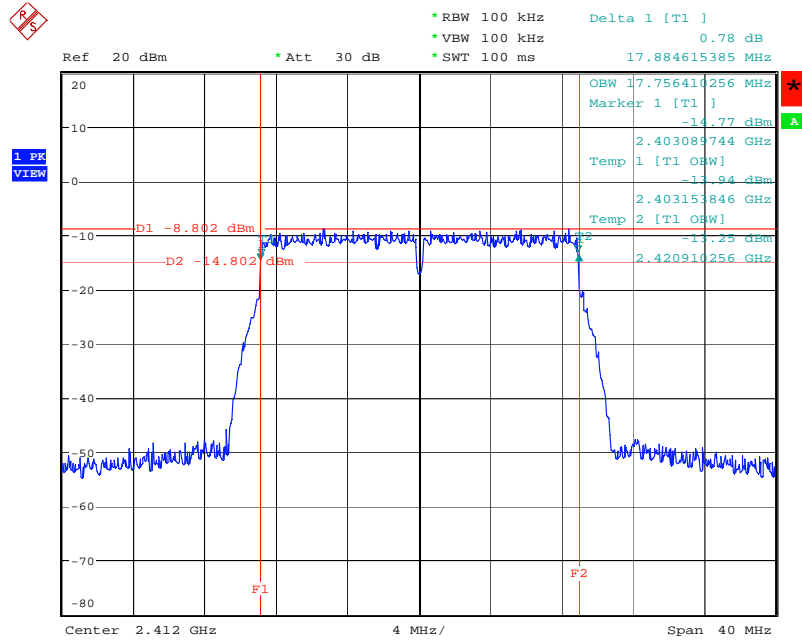


Date: 22.JAN.2007 18:08:08

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A / 2437 MHz

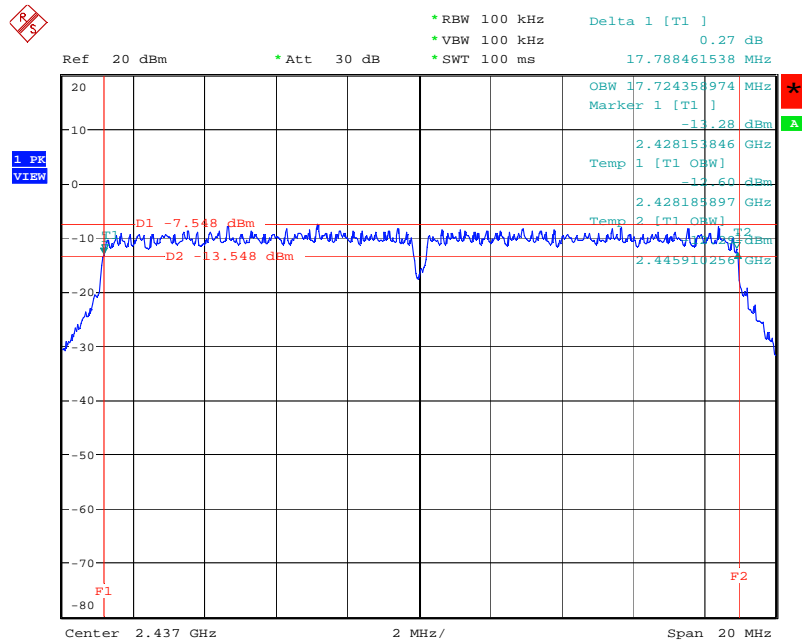


Date: 22.JAN.2007 18:09:53

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A / 2462 MHz

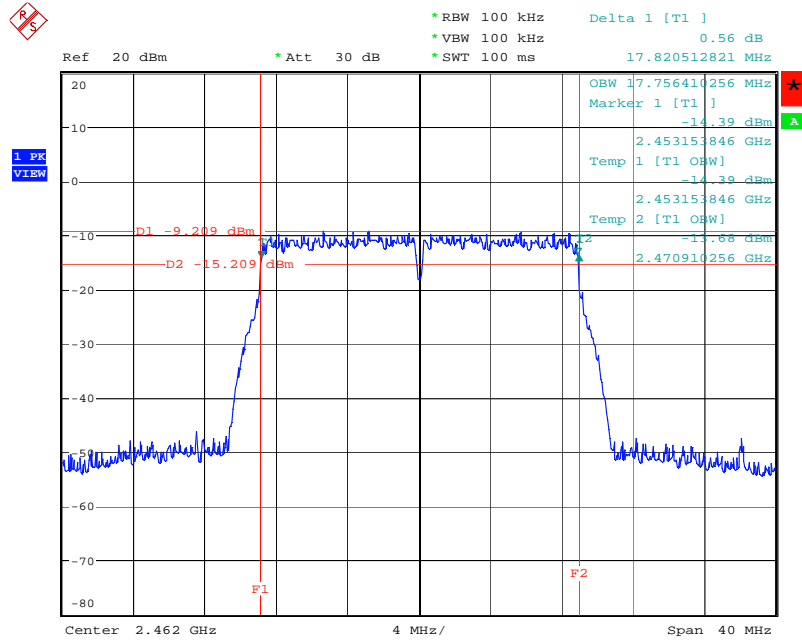


Date: 22.JAN.2007 18:11:10

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

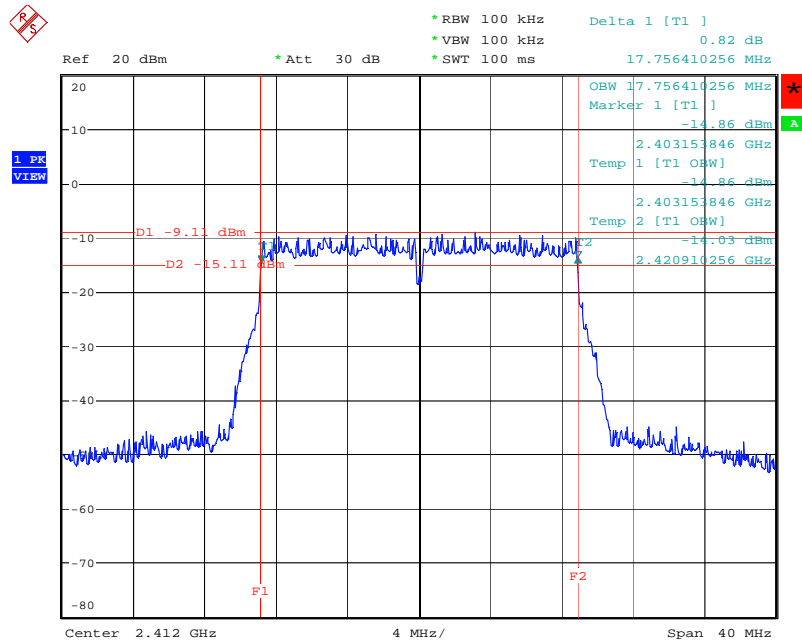


Date: 22.JAN.2007 15:28:58

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B / 2437 MHz

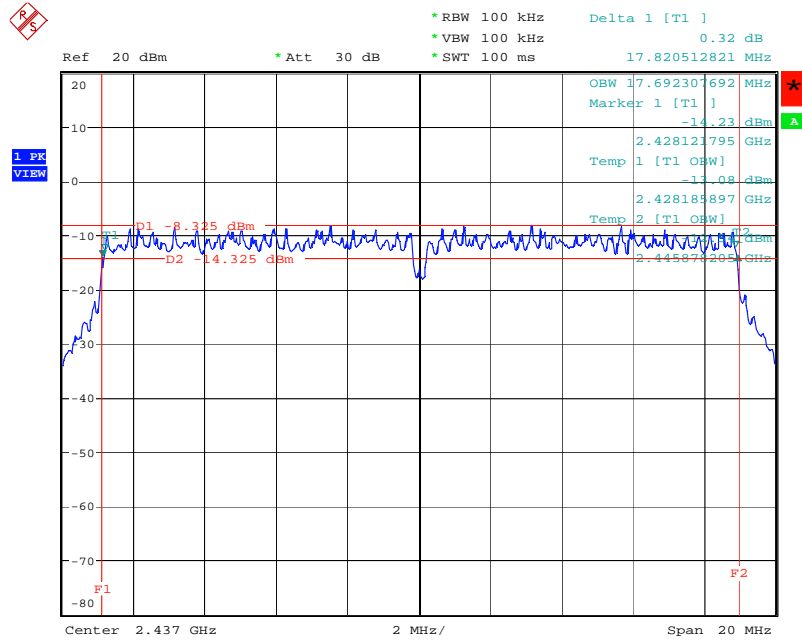


Date: 22.JAN.2007 15:32:31

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B / 2462 MHz

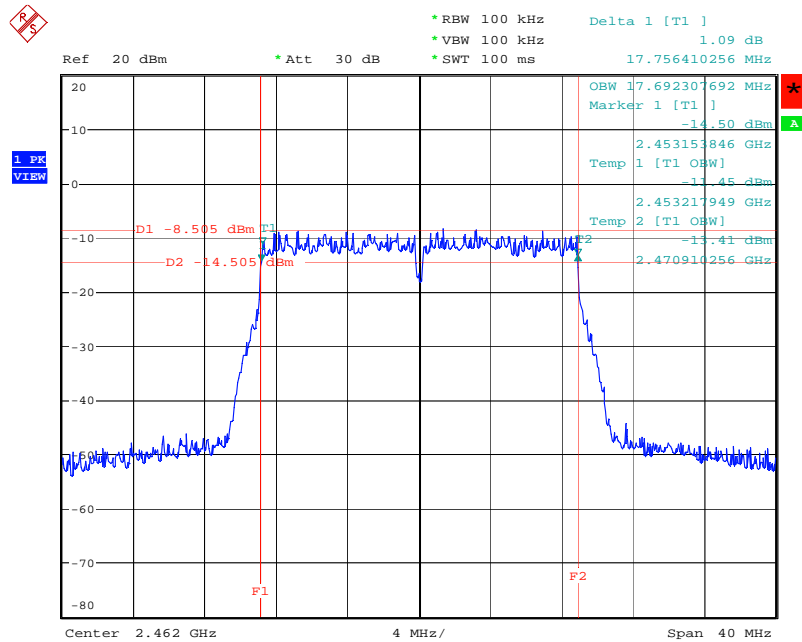


Date: 22.JAN.2007 15:34:56

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A / 2422 MHz

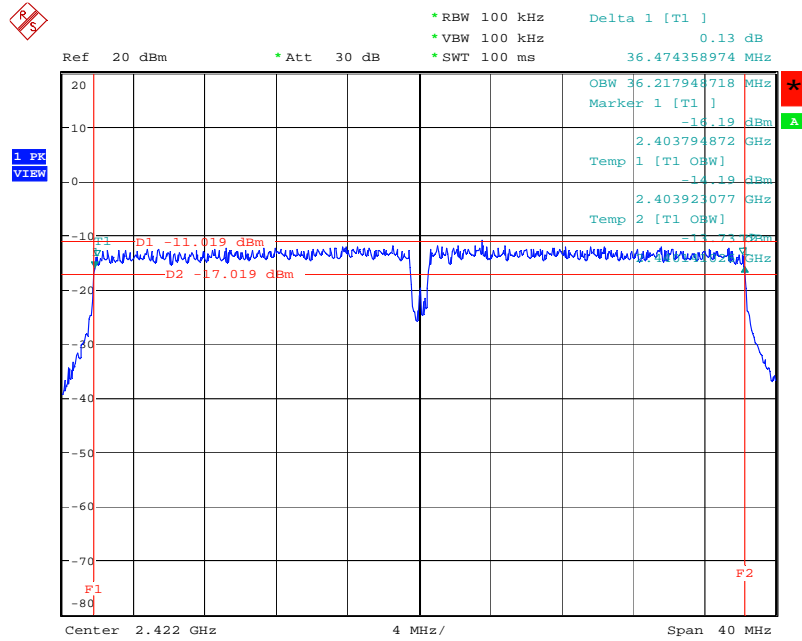


Date: 22.JAN.2007 18:27:41

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A / 2437 MHz

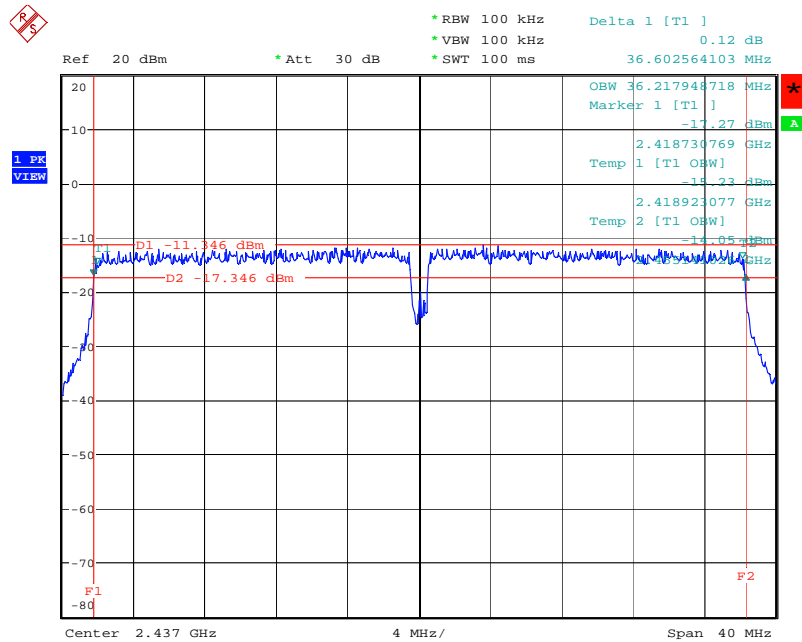


Date: 22.JAN.2007 18:29:06

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A / 2452 MHz

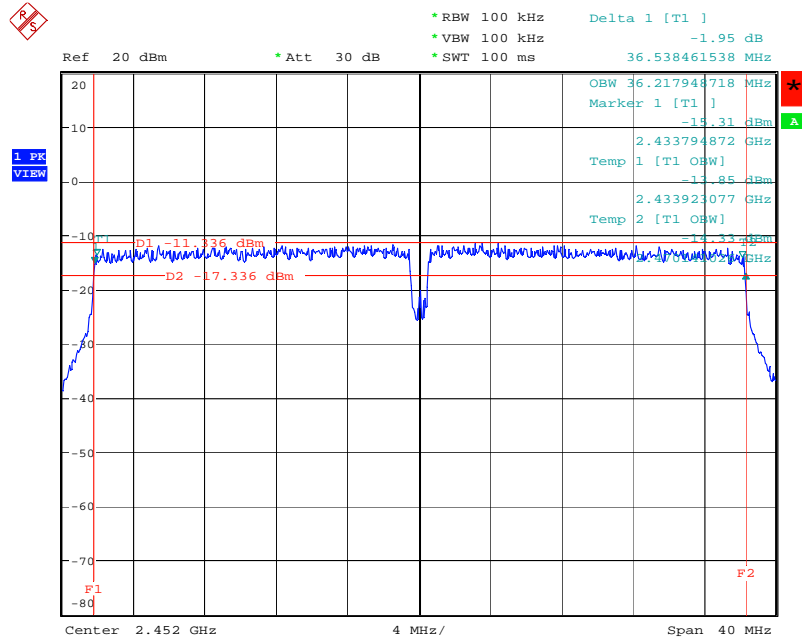


Date: 22.JAN.2007 18:30:11

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2422 MHz

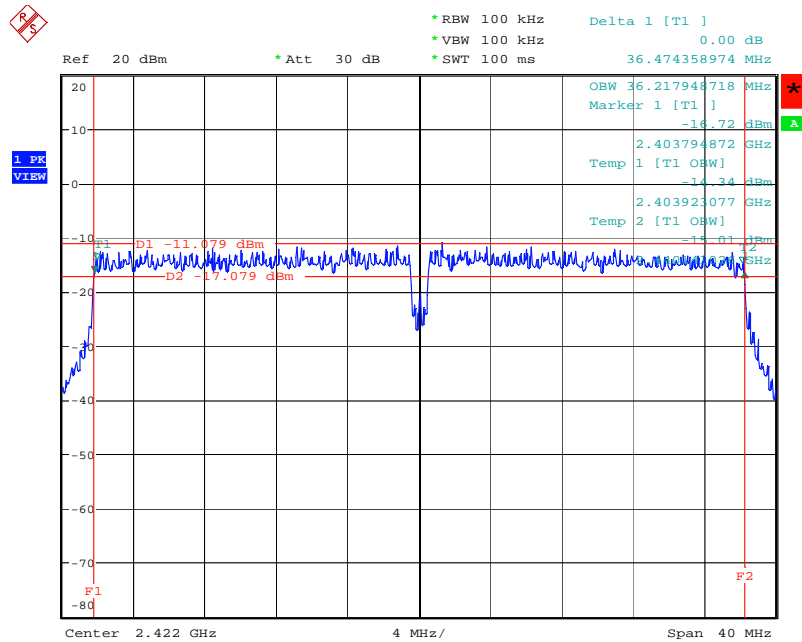


Date: 22.JAN.2007 15:42:27

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

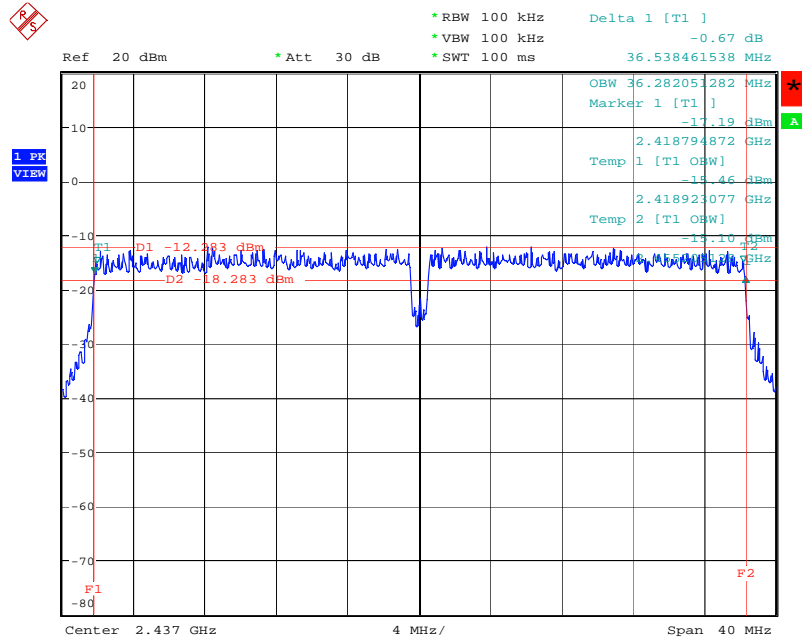

Date: 22.JAN.2007 15:43:54

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

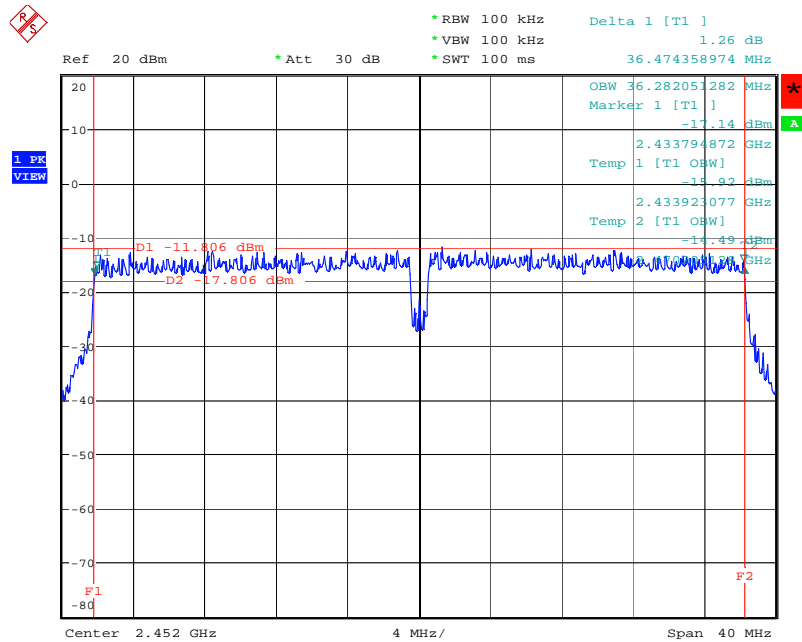

Date: 22.JAN.2007 15:53:14

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

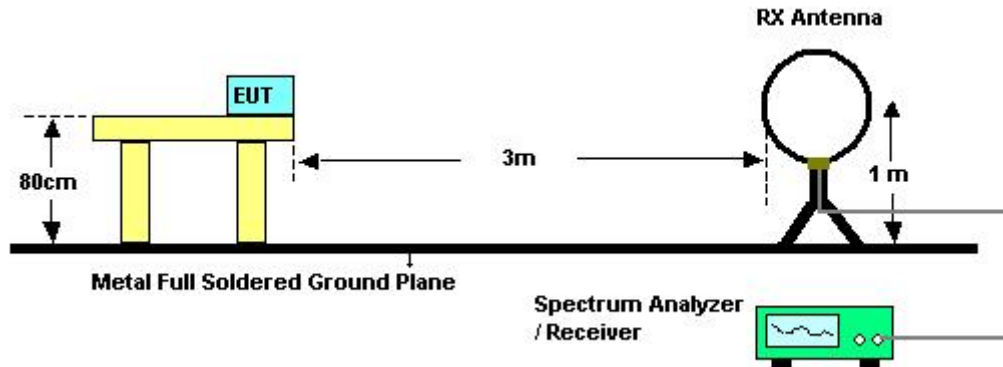

For radiated emissions above 30MHz

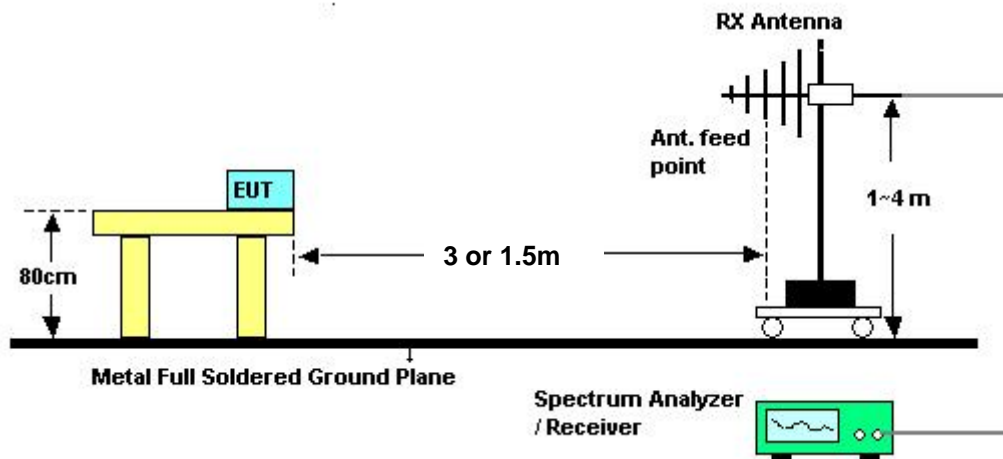

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n 40MHz Ch 6 Ant. A / Mode 2

Horizontal

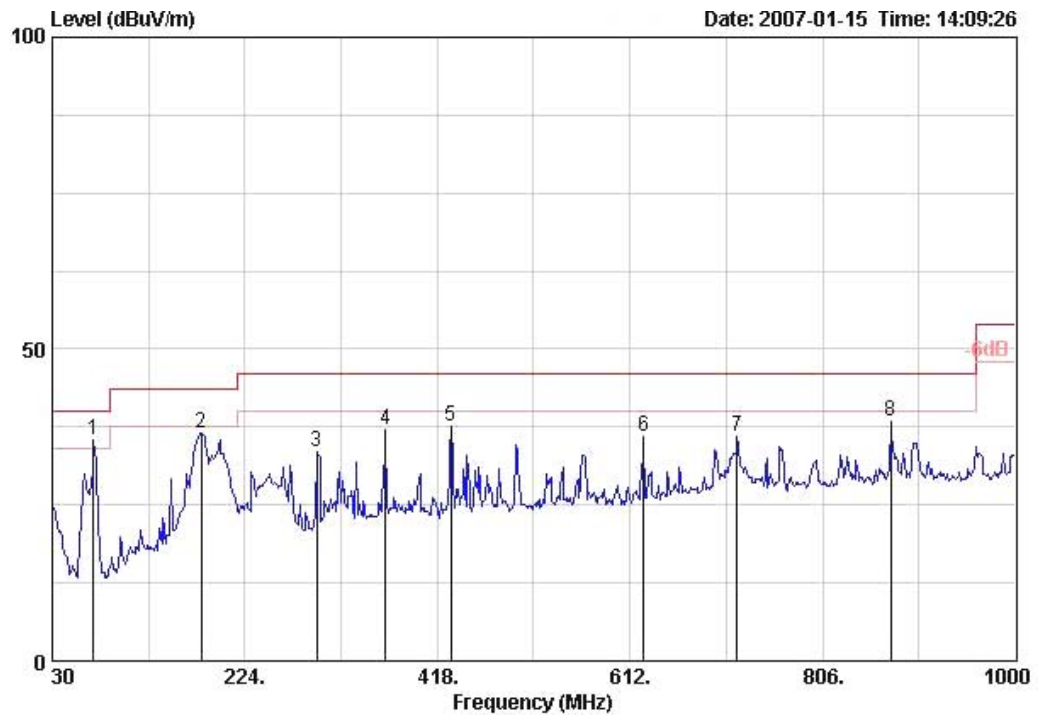

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1 !	71.710	35.52	-4.48	40.00	58.99	1.43	31.68	6.78	Peak	---	---
2	180.350	36.57	-6.93	43.50	56.51	2.00	31.64	9.70	Peak	---	---
3	296.750	33.38	-12.62	46.00	48.50	2.26	31.32	13.94	Peak	---	---
4	365.620	36.99	-9.01	46.00	49.89	2.49	31.17	15.78	Peak	---	---
5	431.580	37.56	-8.44	46.00	48.72	2.83	30.96	16.98	Peak	---	---
6	625.580	36.06	-9.94	46.00	43.93	3.30	30.52	19.35	Peak	---	---
7	719.670	36.05	-9.95	46.00	42.75	3.72	30.42	20.00	Peak	---	---
8	874.870	38.30	-7.70	46.00	42.71	4.05	29.91	21.45	Peak	---	---


Vertical

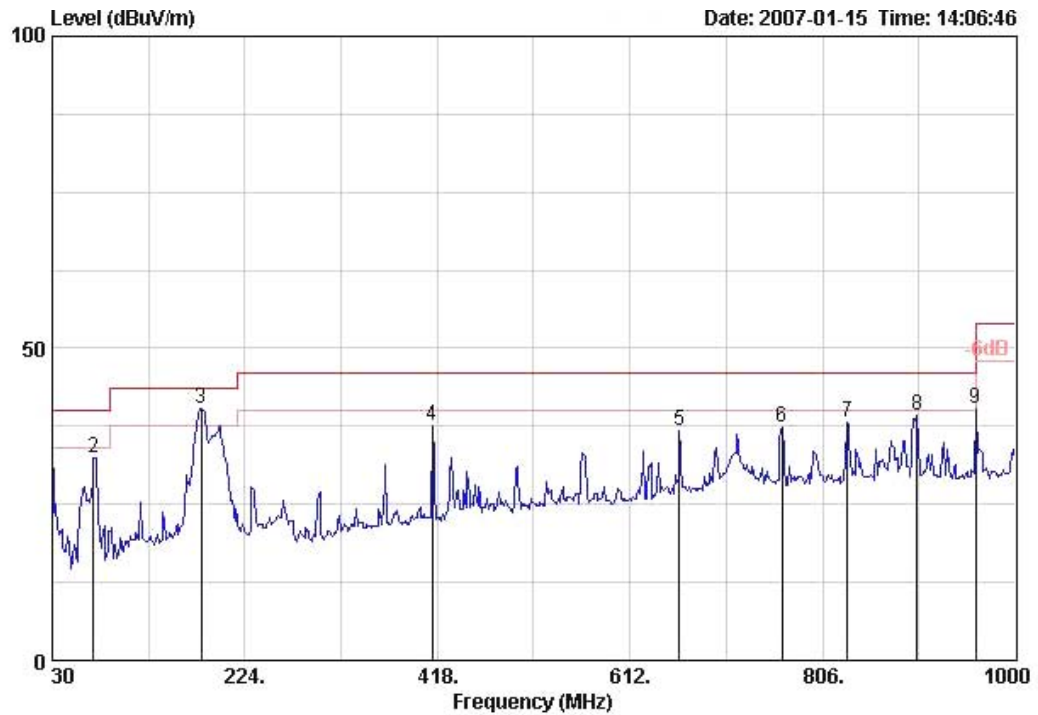

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB/m		cm	deg
1	30.000	33.46	-6.54	40.00	44.23	0.80	31.67	20.10	Peak	---	---
2	71.710	32.52	-7.48	40.00	55.99	1.43	31.68	6.78	Peak	---	---
3	180.350	40.26	-3.24	43.50	60.20	2.00	31.64	9.70	Peak	---	---
4	413.150	37.50	-8.50	46.00	49.00	2.75	31.00	16.76	Peak	---	---
5	661.470	36.75	-9.25	46.00	43.93	3.52	30.35	19.65	Peak	---	---
6	765.260	37.23	-8.77	46.00	43.18	3.87	30.24	20.42	Peak	---	---
7	831.220	38.06	-7.94	46.00	43.20	3.93	30.14	21.08	Peak	---	---
8	901.060	39.18	-6.82	46.00	43.17	4.10	29.69	21.61	Peak	---	---
9	960.230	40.35	-13.65	54.00	43.98	3.92	29.49	21.94	Peak	---	---


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n 40MHz Ch 6 Ant. A+ Ant. B / Mode 2

Horizontal

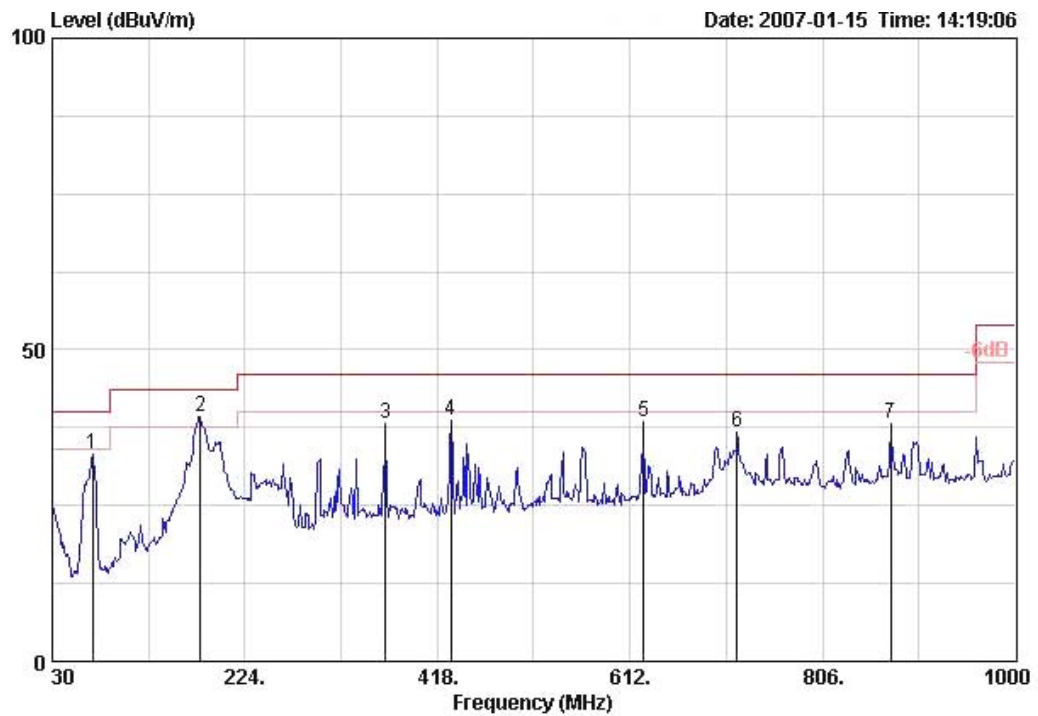

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB	dB	dB/m		cm	deg
1	70.740	33.28	-6.72	40.00	56.89	1.43	31.74	6.69	Peak	---	---
2 !	179.380	39.11	-4.39	43.50	58.99	2.00	31.63	9.75	Peak	---	---
3	365.620	38.04	-7.96	46.00	50.95	2.49	31.17	15.78	Peak	---	---
4	431.580	38.76	-7.24	46.00	49.91	2.83	30.96	16.98	Peak	---	---
5	625.580	38.49	-7.51	46.00	46.35	3.30	30.52	19.35	Peak	---	---
6	719.670	36.83	-9.17	46.00	43.54	3.72	30.42	20.00	Peak	---	---
7	874.870	38.28	-7.72	46.00	42.68	4.05	29.91	21.45	Peak	---	---

Vertical

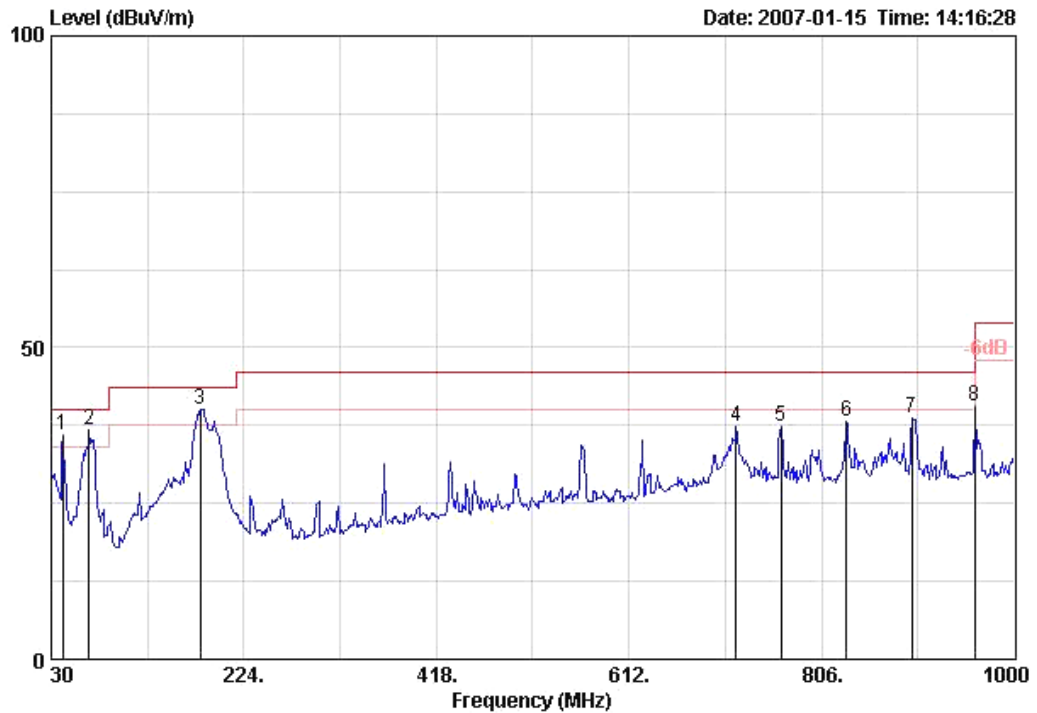

	Freq	Level	Over	Limit	Read	Cable	Preamp	Antenna	Ant	Table
	MHz	dBUV/m	Limit	Line	Level	Loss	Factor	Factor	Pos	Pos
			dB	dBUV/m	dBUV	dB	dB	dB/m	cm	deg
1 !	41.640	35.91	-4.09	40.00	53.67	1.10	31.76	12.90	---	---
2 !	67.830	36.69	-3.31	40.00	60.50	1.40	31.81	6.60	---	---
3 !	180.350	40.05	-3.45	43.50	59.99	2.00	31.64	9.70	---	---
4	719.670	37.24	-8.76	46.00	43.94	3.72	30.42	20.00	---	---
5	765.260	37.32	-8.68	46.00	43.27	3.87	30.24	20.42	---	---
6	831.220	38.07	-7.93	46.00	43.20	3.93	30.14	21.08	---	---
7	897.180	38.57	-7.43	46.00	42.61	4.09	29.71	21.58	---	---
8	960.230	40.52	-13.48	54.00	44.14	3.92	29.49	21.94	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 20MHz Ch 1 Ant. A / Mode 2

Horizontal

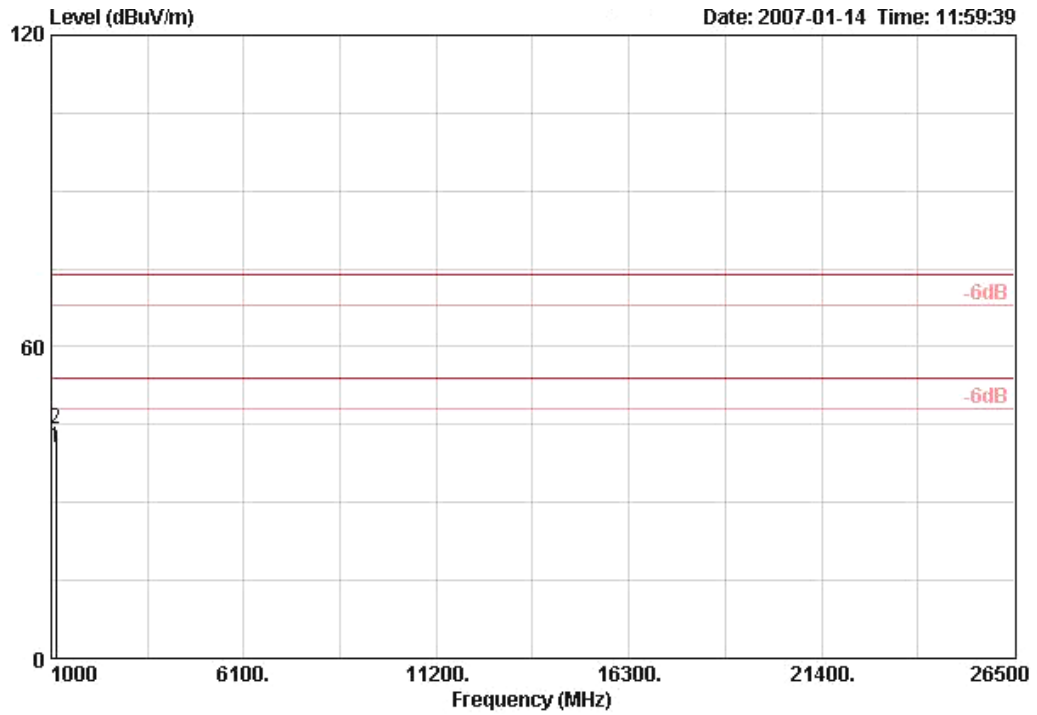

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1120.088	40.51	-13.49	54.00	48.56	1.82	34.41	24.54	AVERAGE	100	109
2	1120.132	43.99	-30.01	74.00	52.04	1.82	34.41	24.54	PEAK	100	109


Vertical

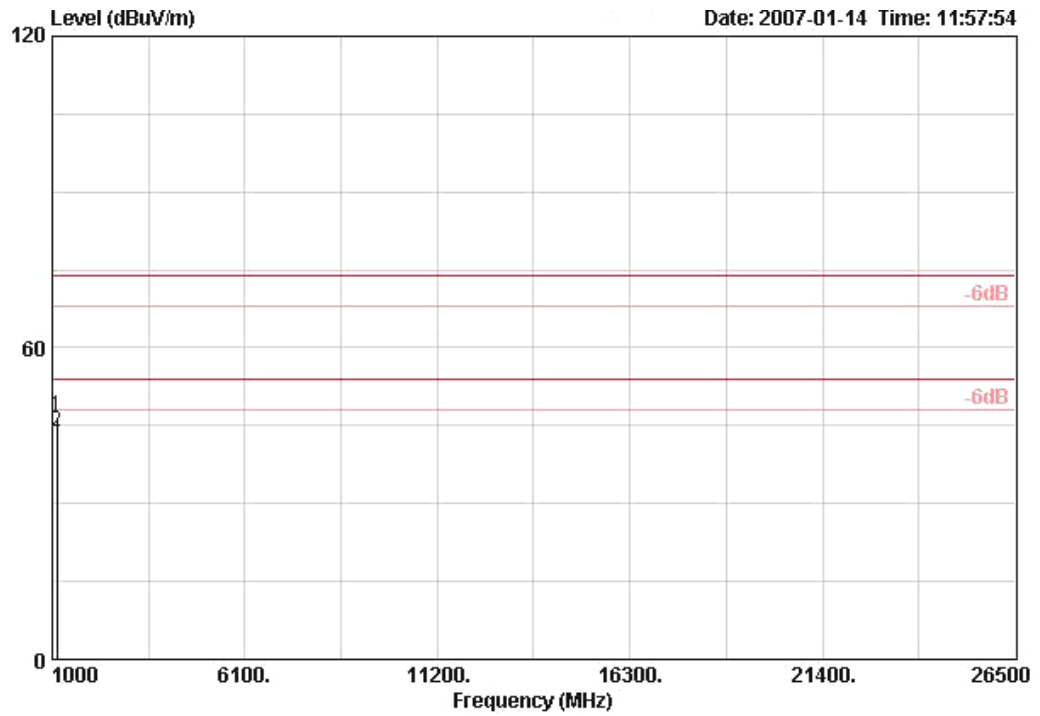

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB/m		cm	deg
1	1119.952	46.64	-27.36	74.00	54.69	1.82	34.41	24.54	PERK	100	121
2	1120.008	43.89	-10.11	54.00	51.94	1.82	34.41	24.54	AVERAGE	100	121


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 20MHz Ch 6 Ant. A / Mode 2

Horizontal

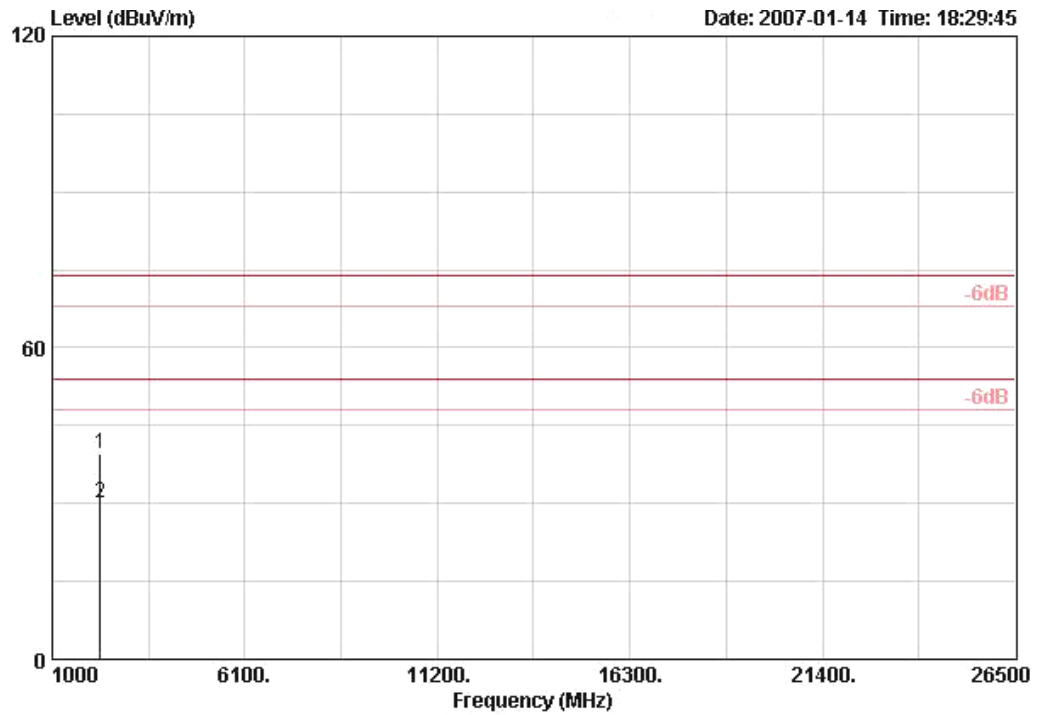

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.910	39.51	-34.49	74.00	43.96	2.69	35.04	27.91	PERK	100	64
2	2279.940	29.97	-24.03	54.00	34.41	2.69	35.04	27.91	AVERAGE	100	64

Vertical

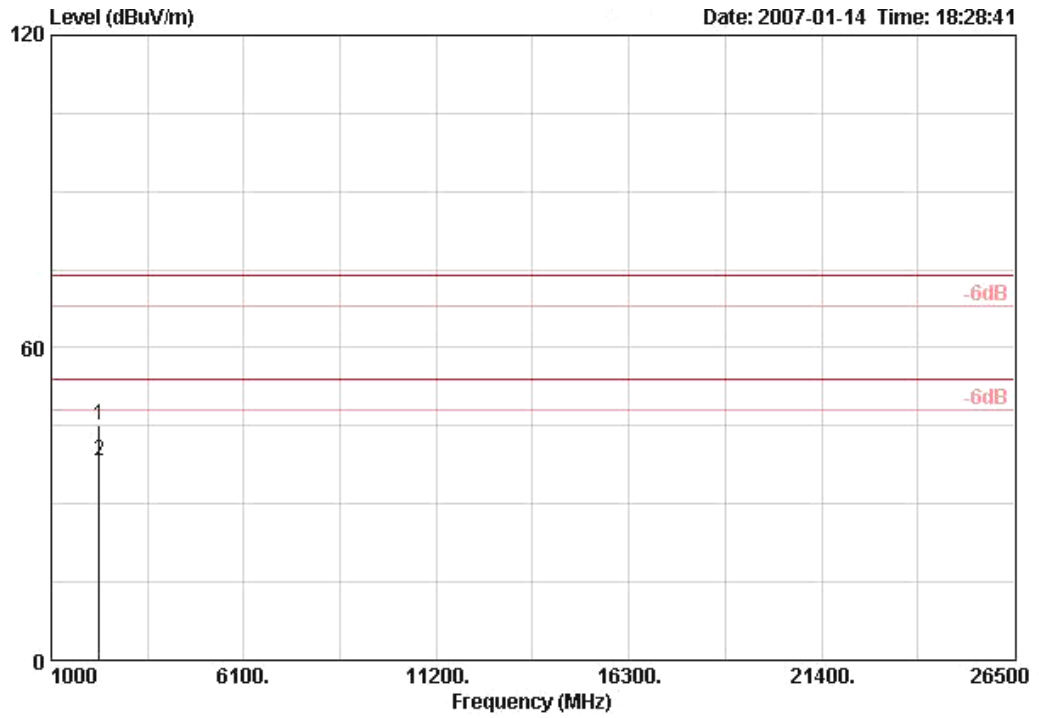


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.940	45.17	-28.83	74.00	49.61	2.69	35.04	27.91	PERK	160	300
2	2280.000	38.29	-15.71	54.00	42.73	2.69	35.04	27.91	AVERAGE	160	300




Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 20MHz Ch 11 Ant. A / Mode 2

Horizontal

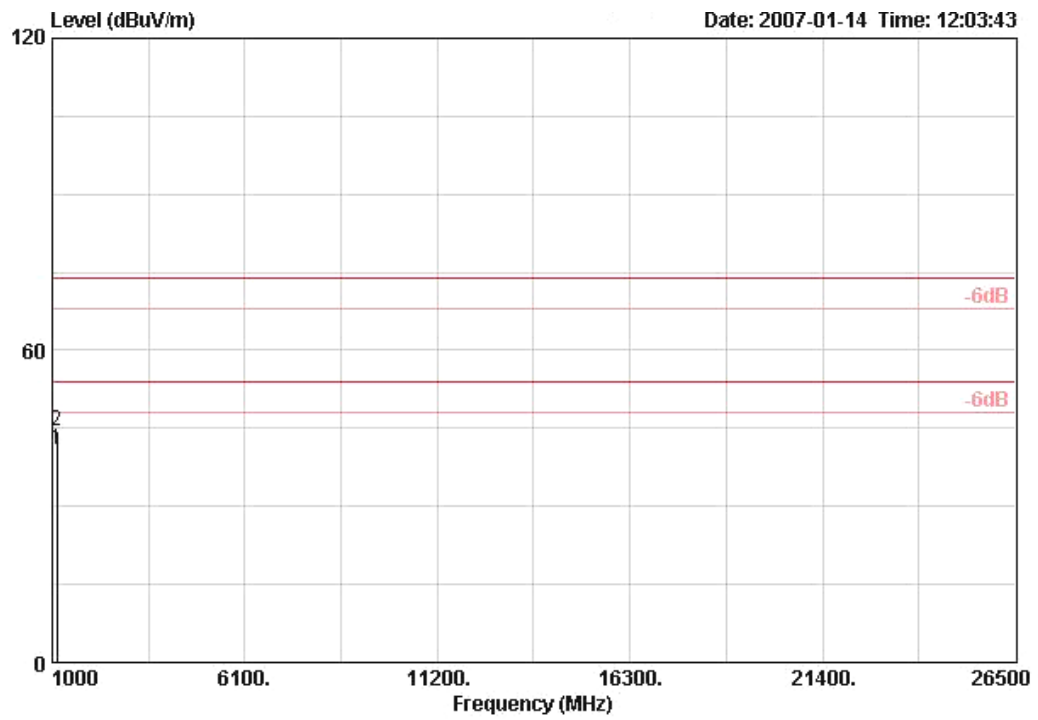

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1120.048	40.74	-13.26	54.00	48.78	1.82	34.41	24.54	AVERAGE	100	107
2	1120.048	44.41	-29.59	74.00	52.46	1.82	34.41	24.54	PEAK	100	107


Vertical

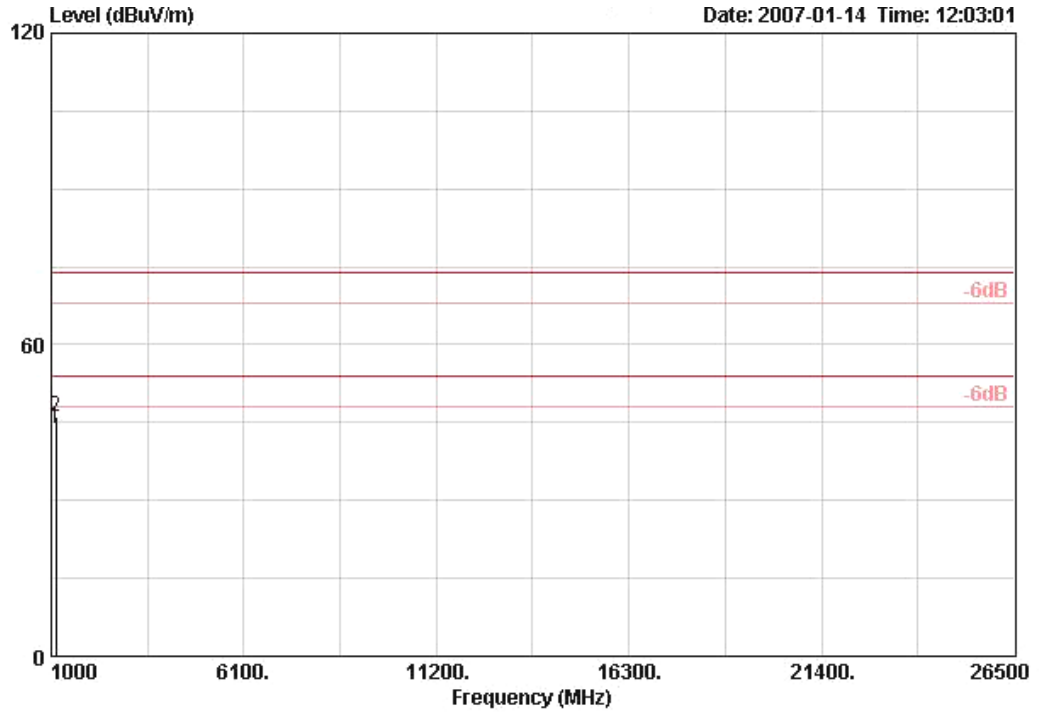

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.988	43.66	-10.34	54.00	51.70	1.82	34.41	24.54	AVERAGE	100	123
2	1119.996	46.23	-27.77	74.00	54.27	1.82	34.41	24.54	PEAK	100	123


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 20MHz Ch 1 Ant. A + Ant. B / Mode 2

Horizontal

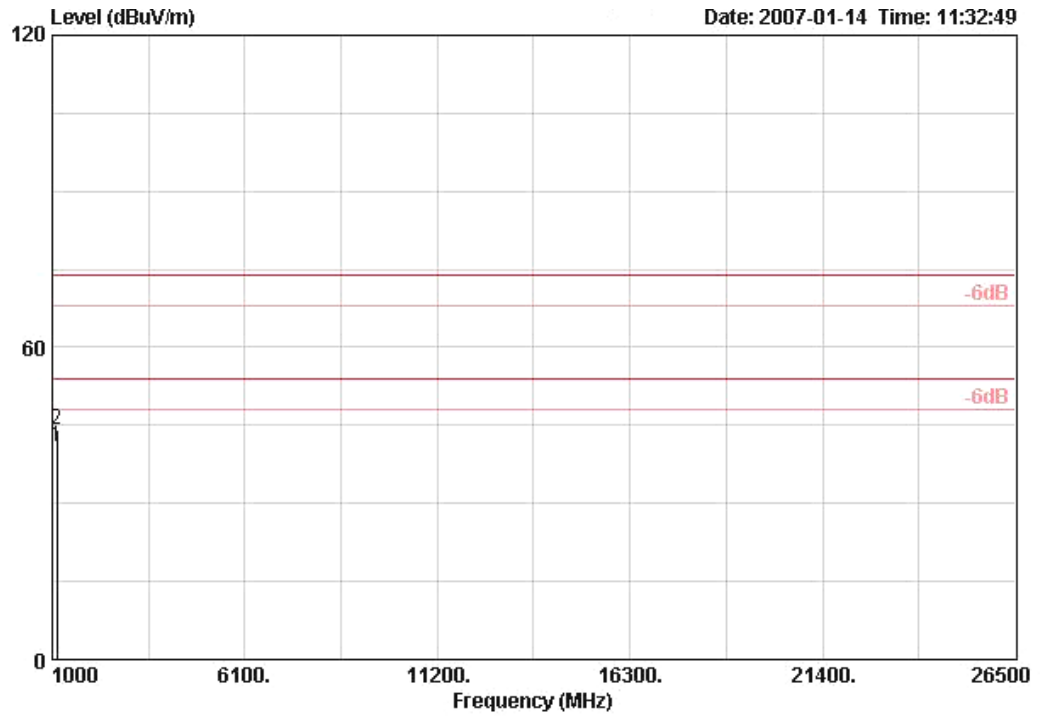

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.990	40.88	-13.12	54.00	48.93	1.82	34.41	24.54	AVERAGE	100	108
2	1120.200	44.06	-29.94	74.00	52.11	1.82	34.41	24.54	PEAK	100	108


Vertical

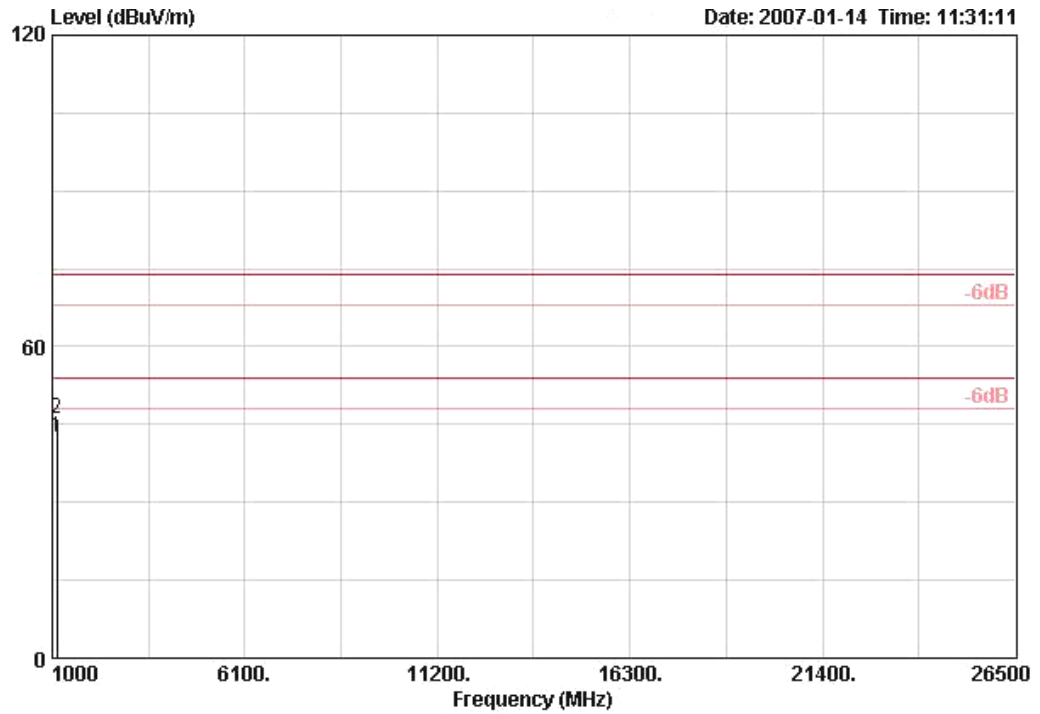

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.910	42.42	-11.58	54.00	50.46	1.82	34.41	24.54	AVERAGE	100	128
2	1120.170	46.06	-27.94	74.00	54.11	1.82	34.41	24.54	PEAK	100	128


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 20MHz Ch 6 Ant. A + Ant. B / Mode 2

Horizontal

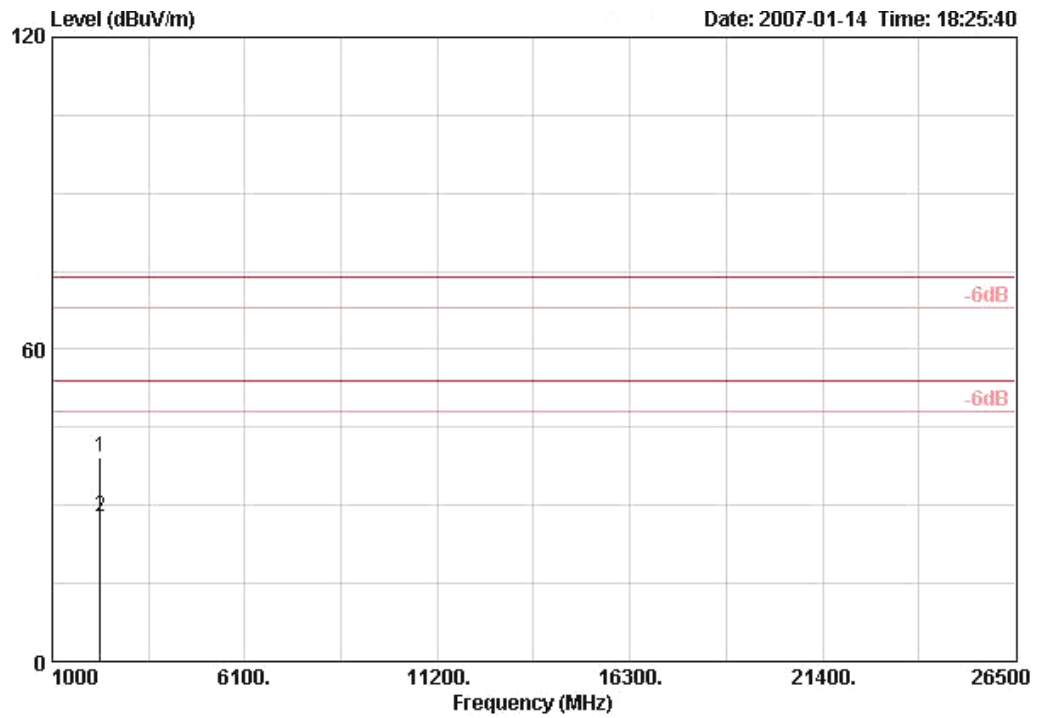

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.570	39.39	-34.61	74.00	43.84	2.69	35.04	27.91	PEAK	100	0
2	2280.050	27.94	-26.06	54.00	32.38	2.69	35.04	27.91	AVERAGE	100	0

Vertical

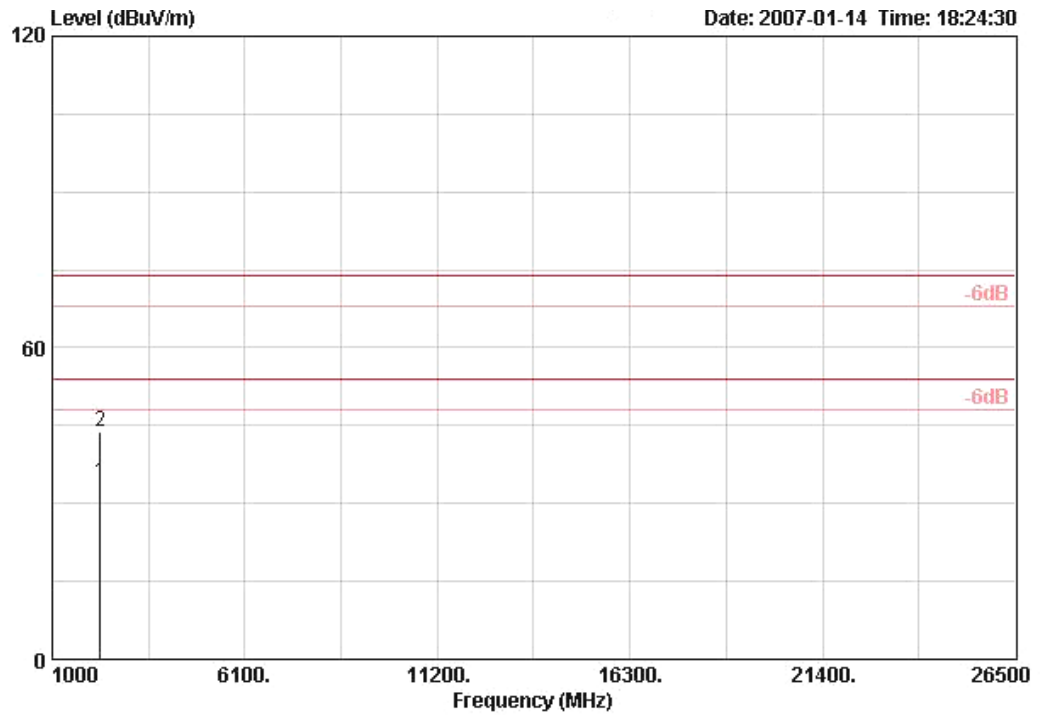


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.930	34.00	-20.00	54.00	38.45	2.69	35.04	27.91	AVERAGE	100	335
2	2280.050	43.75	-30.25	74.00	48.20	2.69	35.04	27.91	PEAK	100	335




Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 20MHz Ch 11 Ant. A + Ant. B / Mode 2

Horizontal

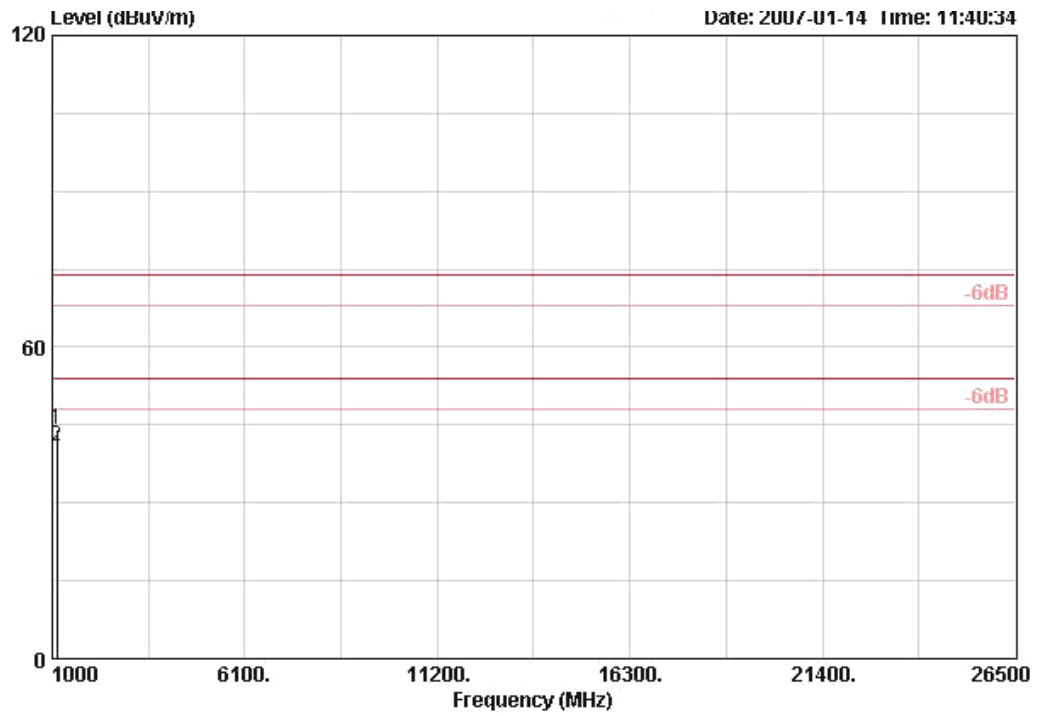

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.864	44.21	-29.79	74.00	52.25	1.82	34.41	24.54	PEAK	100	107
2	1120.048	40.91	-13.09	54.00	48.96	1.82	34.41	24.54	AVERAGE	100	107


Vertical

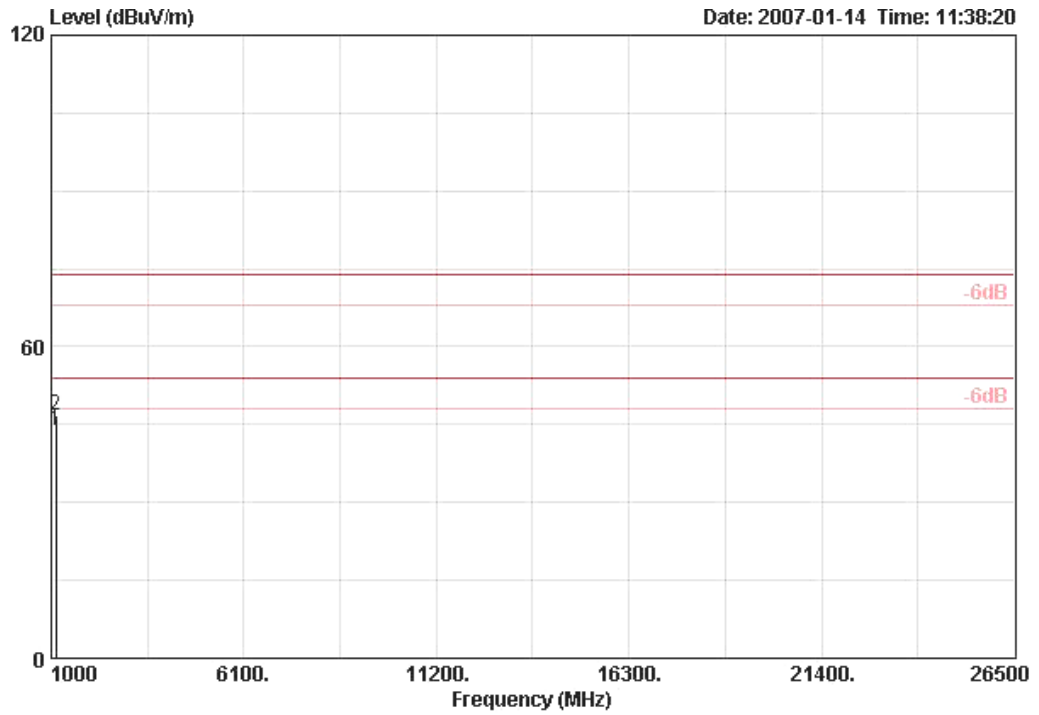

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1120.008	43.89	-10.11	54.00	51.94	1.82	34.41	24.54	AVERAGE	100	119
2	1120.044	46.82	-27.18	74.00	54.87	1.82	34.41	24.54	PEAK	100	119


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 40MHz Ch 3 Ant. A / Mode 2

Horizontal

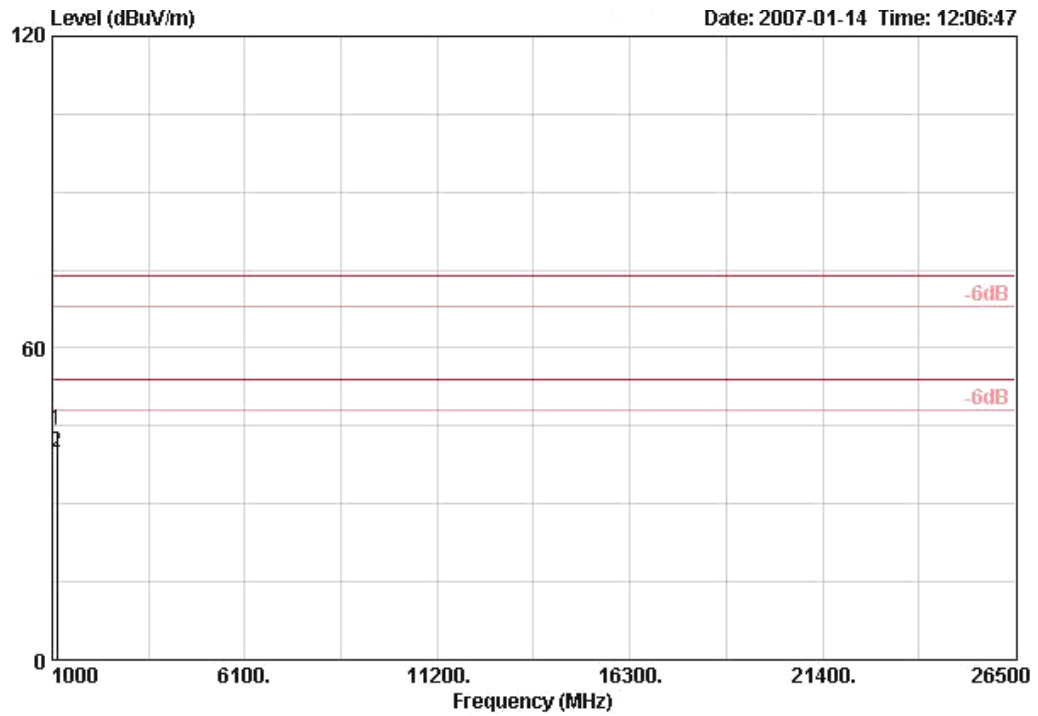

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.864	44.04	-29.96	74.00	52.08	1.82	34.41	24.54	PERK	100	109
2	1120.032	39.75	-14.25	54.00	47.79	1.82	34.41	24.54	AVERAGE	100	109


Vertical

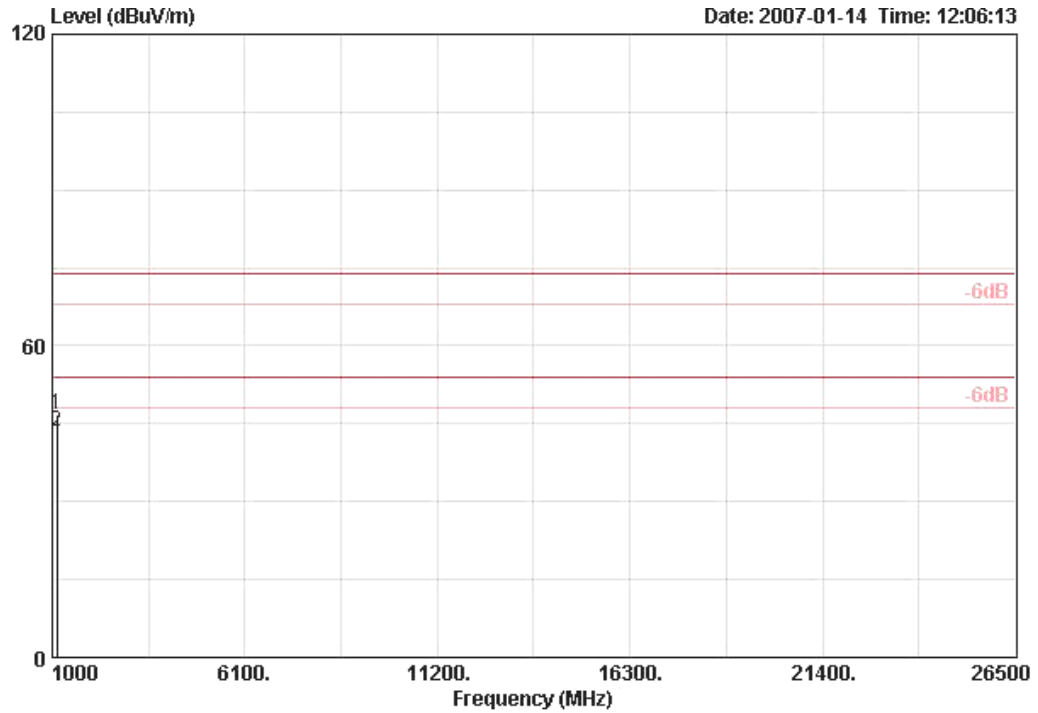

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.972	46.68	-27.32	74.00	54.73	1.82	34.41	24.54	PEAK	100	129
2	1120.072	43.62	-10.38	54.00	51.67	1.82	34.41	24.54	AVERAGE	100	129


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 40MHz Ch 6 Ant. A / Mode 2

Horizontal

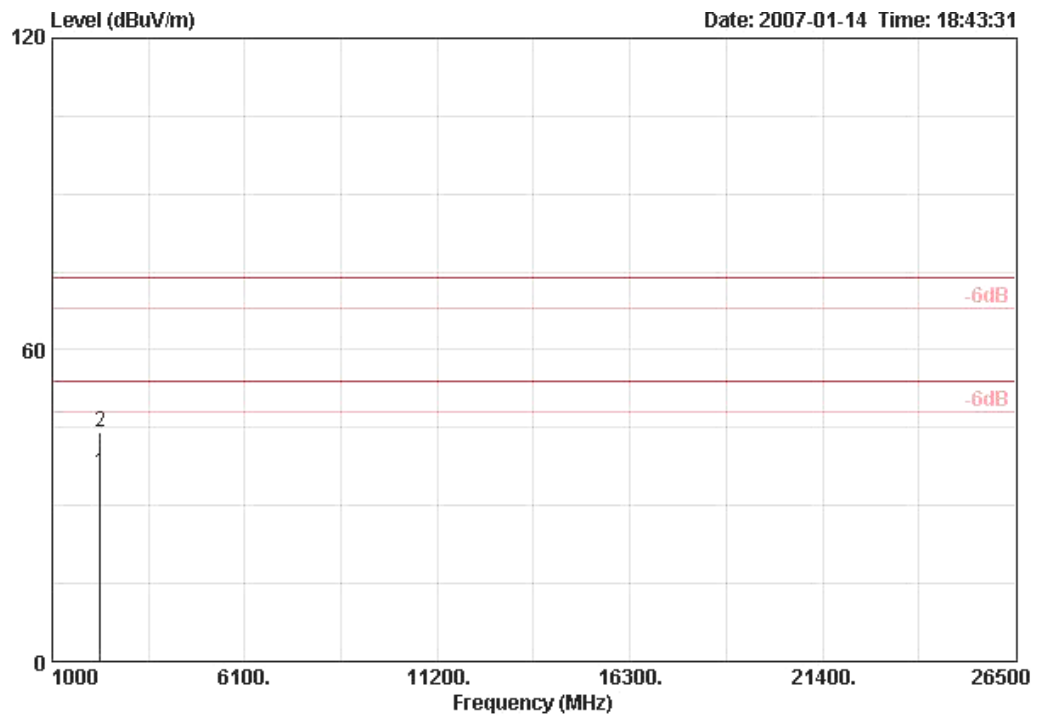

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.990	36.45	-17.55	54.00	40.90	2.69	35.04	27.91	AVERAGE	174	145
2	2280.030	44.30	-29.70	74.00	48.74	2.69	35.04	27.91	PEAK	174	145


Vertical

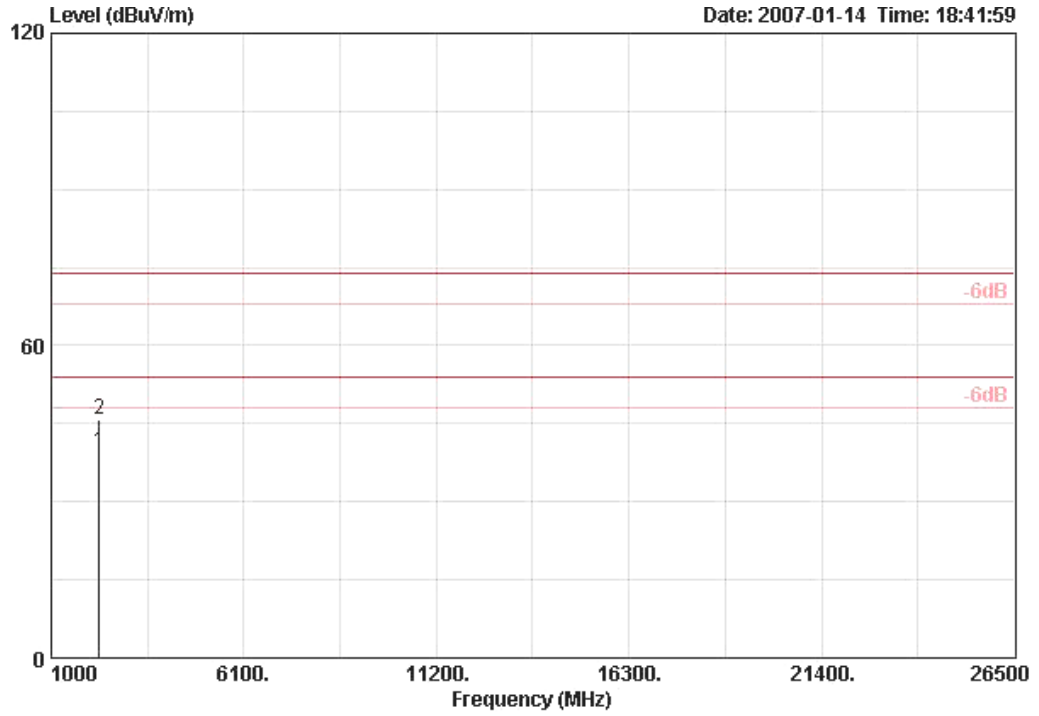

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2280.050	39.52	-14.48	54.00	43.97	2.69	35.04	27.91	AVERAGE	130	217
2	2280.080	45.77	-28.23	74.00	50.22	2.69	35.04	27.91	PEAK	130	217


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 40MHz Ch 9 Ant. A / Mode 2

Horizontal

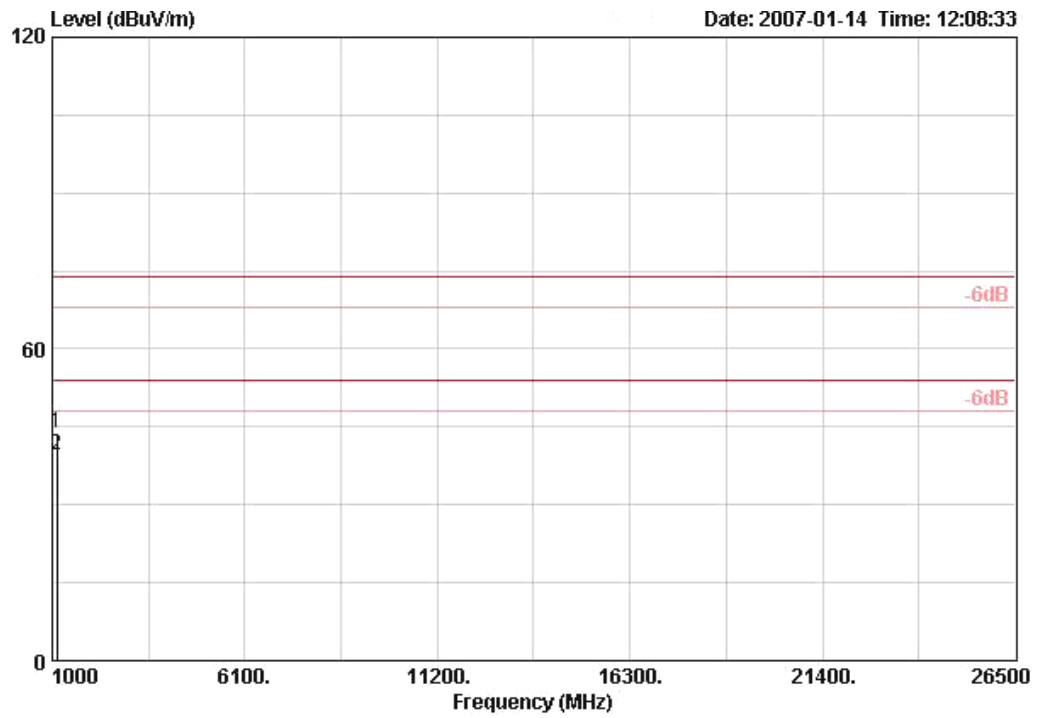

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB/m		cm	deg
1	1119.756	43.96	-30.04	74.00	52.01	1.82	34.41	24.54	PERK	100	108
2	1120.088	39.69	-14.31	54.00	47.74	1.82	34.41	24.54	AVERAGE	100	108

Vertical

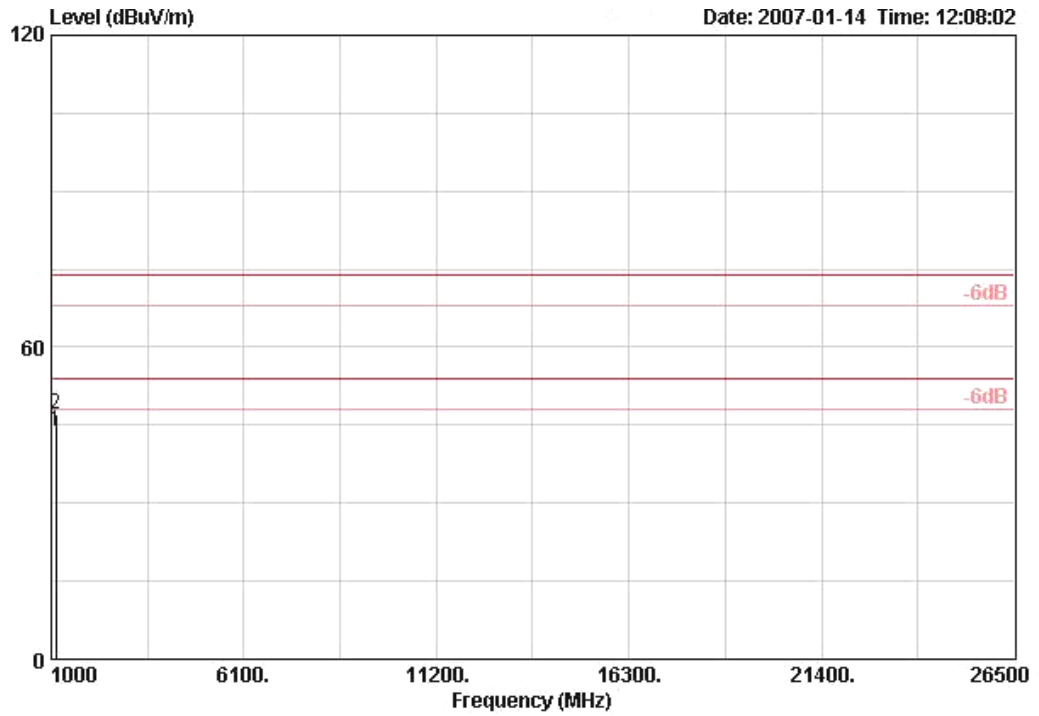


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.968	43.92	-10.08	54.00	51.97	1.82	34.41	24.54	AVERAGE	100	130
2	1120.220	47.04	-26.96	74.00	55.08	1.82	34.41	24.54	PEAK	100	130




Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 40MHz Ch 3 Ant. A + Ant. B / Mode 2

Horizontal

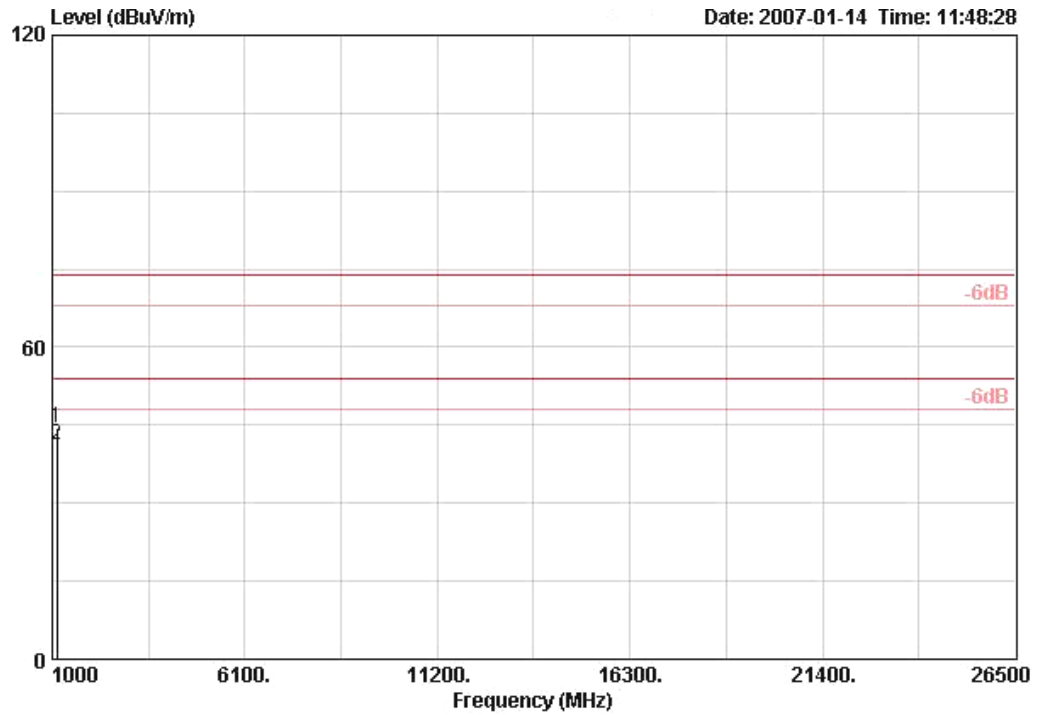

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1120.020	44.46	-29.54	74.00	52.51	1.82	34.41	24.54	PEAK	100	109
2	1120.048	41.05	-12.95	54.00	49.10	1.82	34.41	24.54	AVERAGE	100	109


Vertical

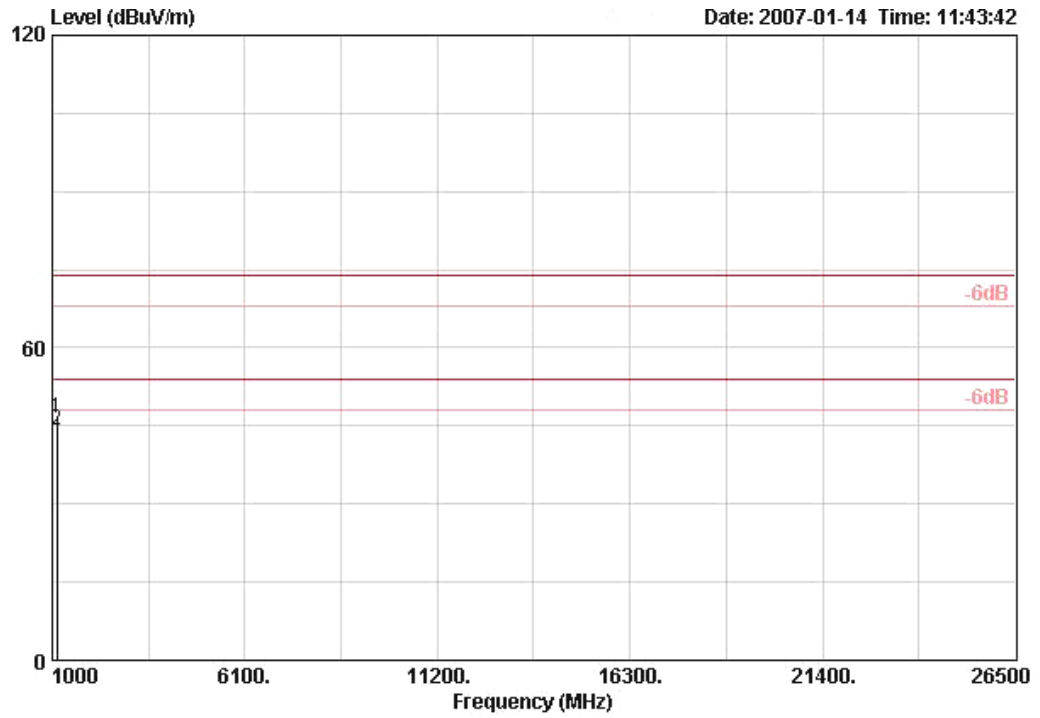

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.892	46.52	-27.48	74.00	54.56	1.82	34.41	24.54	PERK	100	129
2	1119.992	44.29	-9.71	54.00	52.33	1.82	34.41	24.54	AVERAGE	100	129


Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 40MHz Ch 6 Ant. A + Ant. B / Mode 2

Horizontal

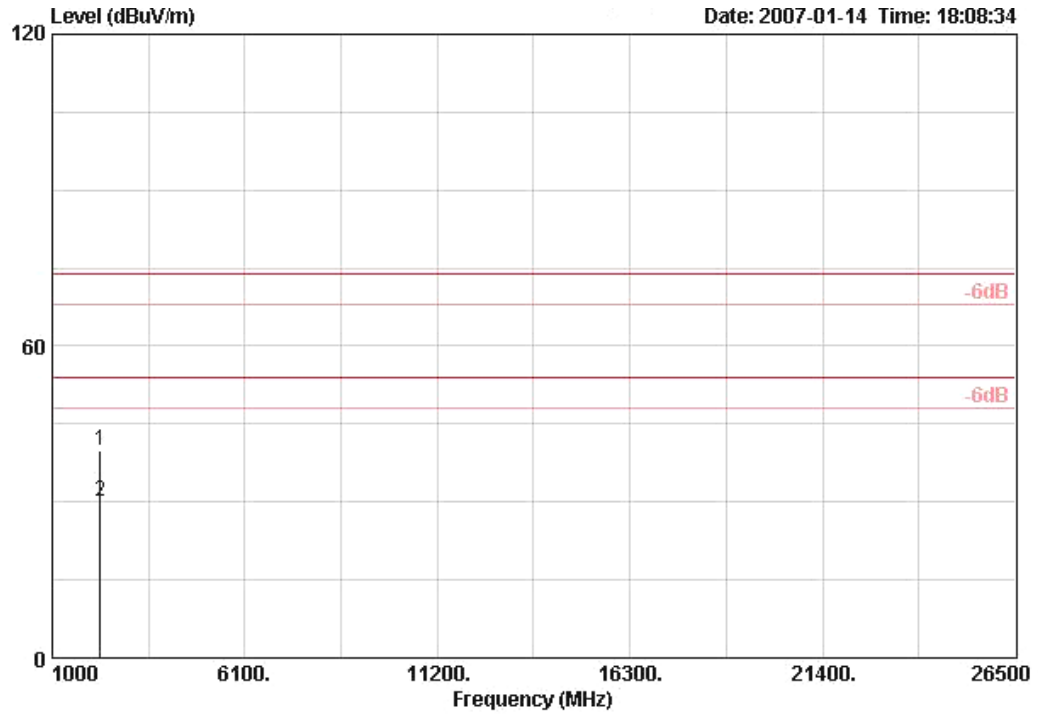

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.800	40.00	-34.00	74.00	44.45	2.69	35.04	27.91	PEAK	100	293
2	2280.010	30.06	-23.94	54.00	34.51	2.69	35.04	27.91	AVERAGE	100	293

Vertical

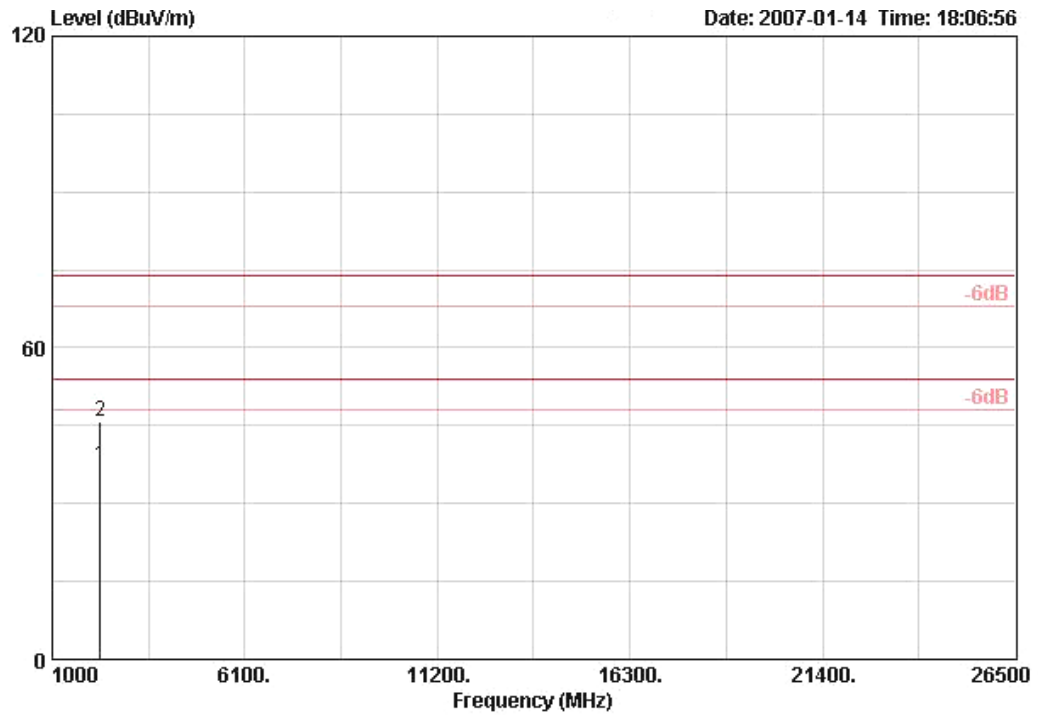


	Freq	Level	Over	Limit	Read	Cable	Preamp	Antenna	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2279.920	37.18	-16.82	54.00	41.62	2.69	35.04	27.91	AVERAGE	100	216
2	2280.430	45.81	-28.19	74.00	50.26	2.69	35.04	27.91	PEAK	100	216




Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 40MHz Ch 9 Ant. A + Ant. B / Mode 2

Horizontal

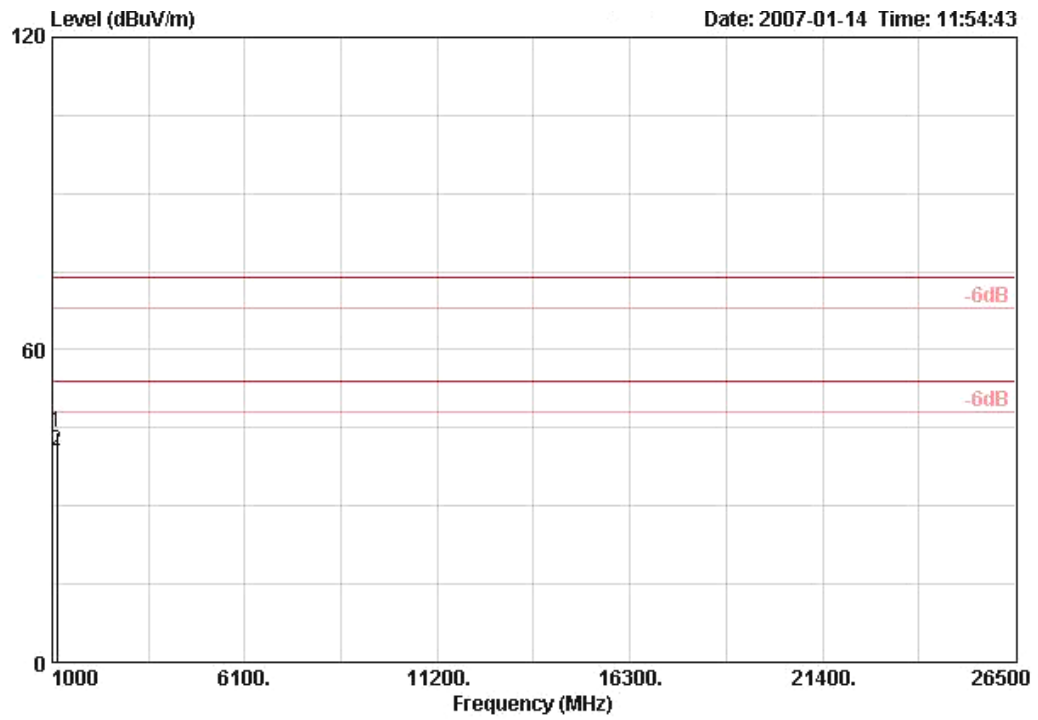

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.804	44.11	-29.89	74.00	52.15	1.82	34.41	24.54	PEAK	100	108
2	1119.992	40.49	-13.51	54.00	48.53	1.82	34.41	24.54	AVERAGE	100	108

Vertical

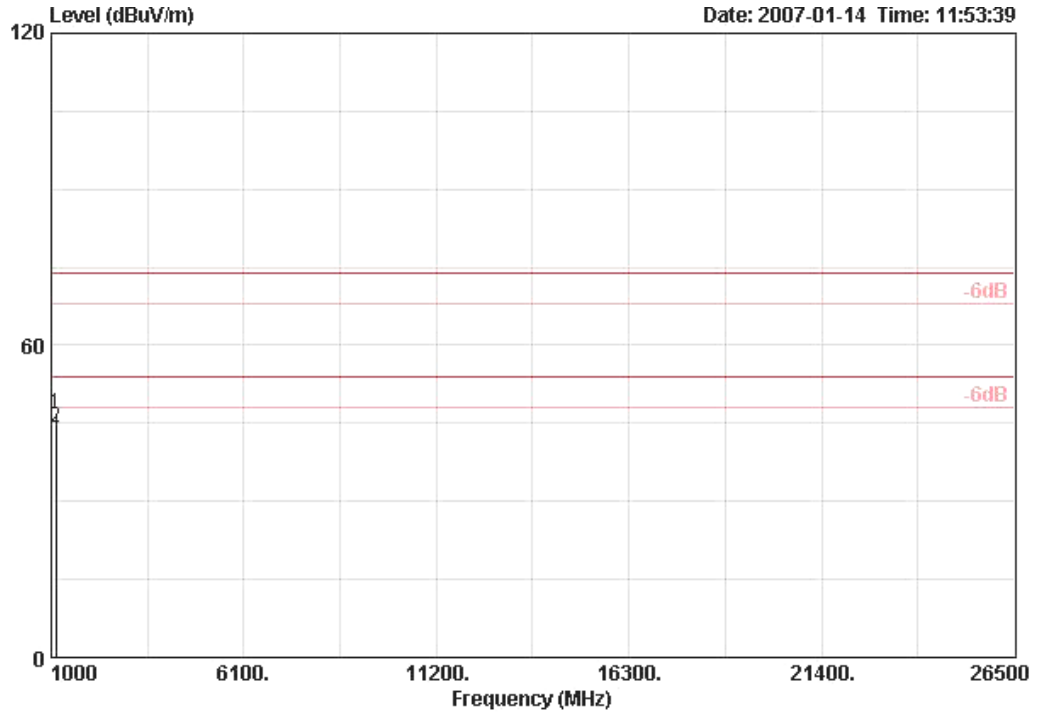

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	1119.796	46.67	-27.33	74.00	54.72	1.82	34.41	24.54	PERK	100	128
2	1120.008	44.20	-9.80	54.00	52.25	1.82	34.41	24.54	AVERAGE	100	128

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.


4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 20MHz Ch 1, 11 Ant. A / Mode 2


Channel 1

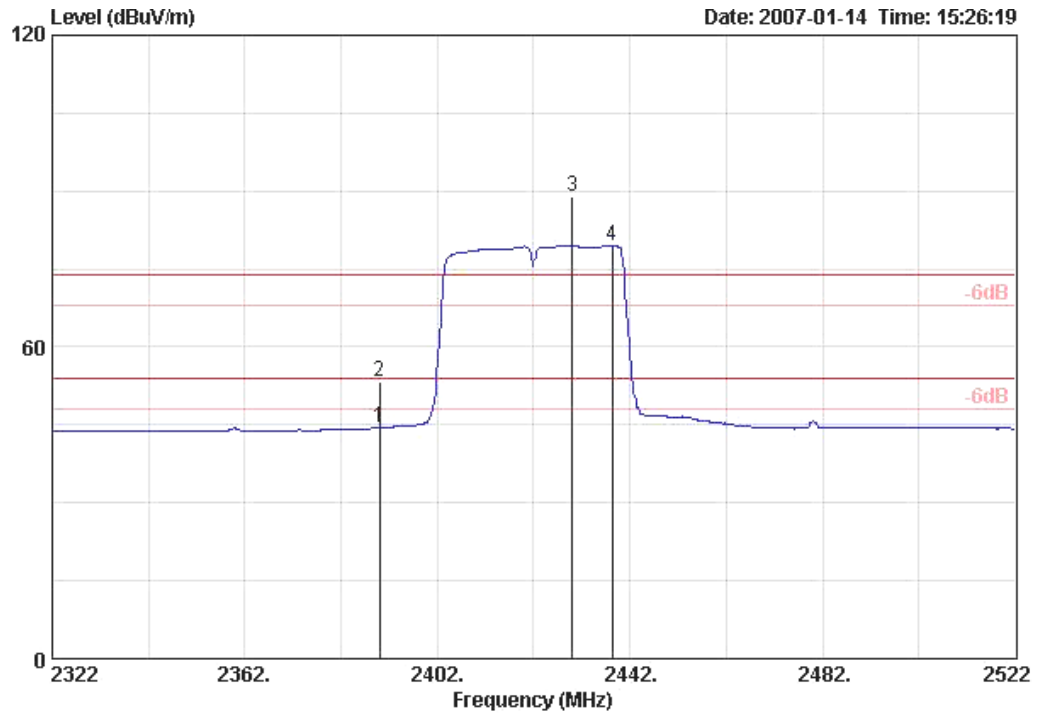

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2390.000	44.41	-9.59	54.00	13.47	2.76	0.00	28.17	AVERAGE	105	124
2	2390.000	53.45	-20.55	74.00	22.51	2.76	0.00	28.17	PEAK	105	124
3	2430.000			74.00	58.03	2.79	0.00	28.25	PEAK	105	124
4	2438.400			54.00	48.47	2.79	0.00	28.29	AVERAGE	105	124

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 11

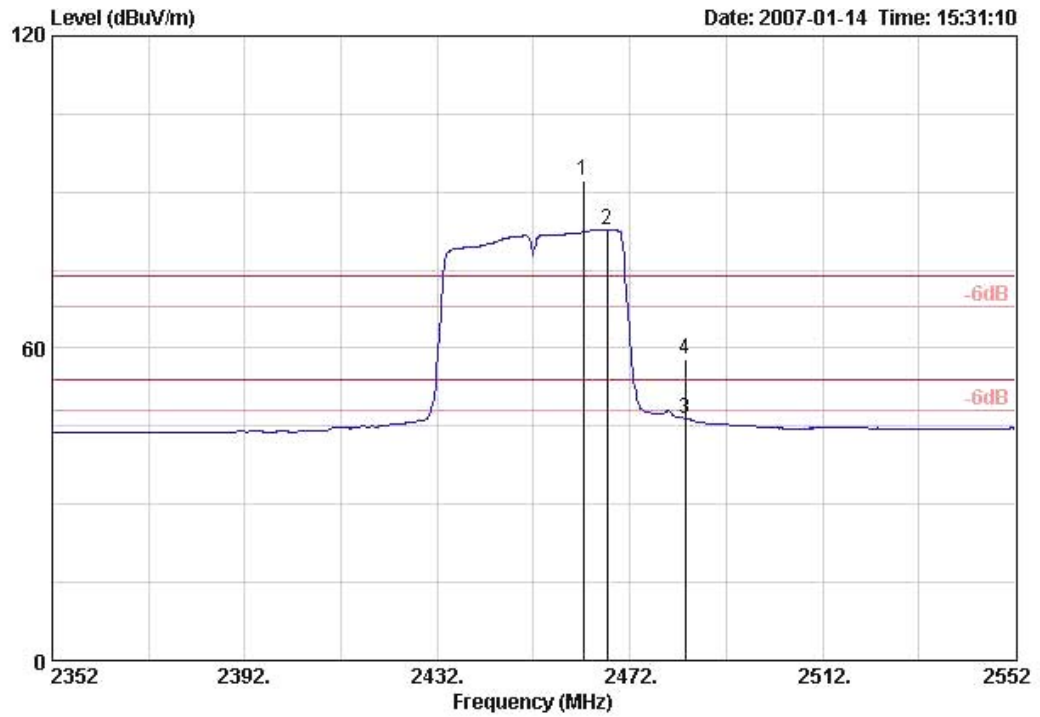


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2462.400			74.00	61.03	2.81	0.00	28.32	PEAK	147	169
2	2467.200			54.00	51.65	2.81	0.00	28.32	AVERAGE	147	169
3	2483.500	46.47	-7.53	54.00	15.27	2.84	0.00	28.36	AVERAGE	147	169
4	2483.500	57.74	-16.26	74.00	26.54	2.84	0.00	28.36	PEAK	147	169

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 20MHz Ch 1, 11 Ant. A + Ant. B / Mode 2

Channel 1

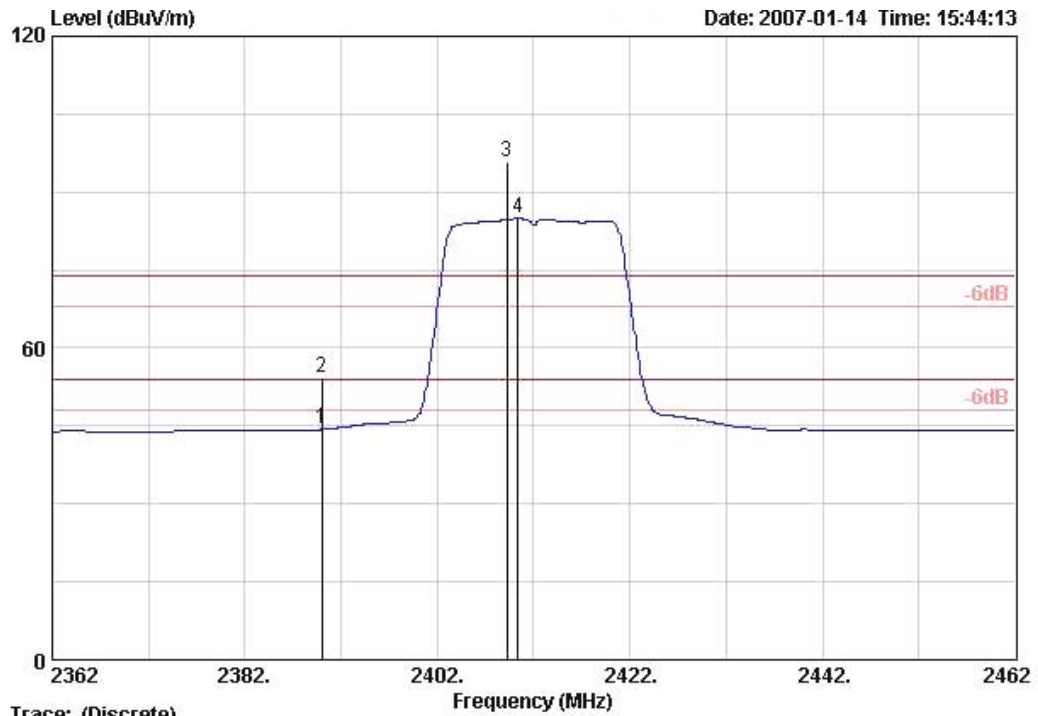


Trace: (Discrete)

10-4976 VERTICAL

	freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2390.000	44.31	-9.69	54.00	13.37	2.76	0.00	28.17	AVERAGE	100	214
2	2390.000	54.44	-19.56	74.00	23.50	2.76	0.00	28.17	PEAK	100	214
3	2409.200			74.00	64.72	2.79	0.00	28.21	PEAK	100	214
4	2410.400			54.00	53.88	2.79	0.00	28.21	AVERAGE	100	214

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 11

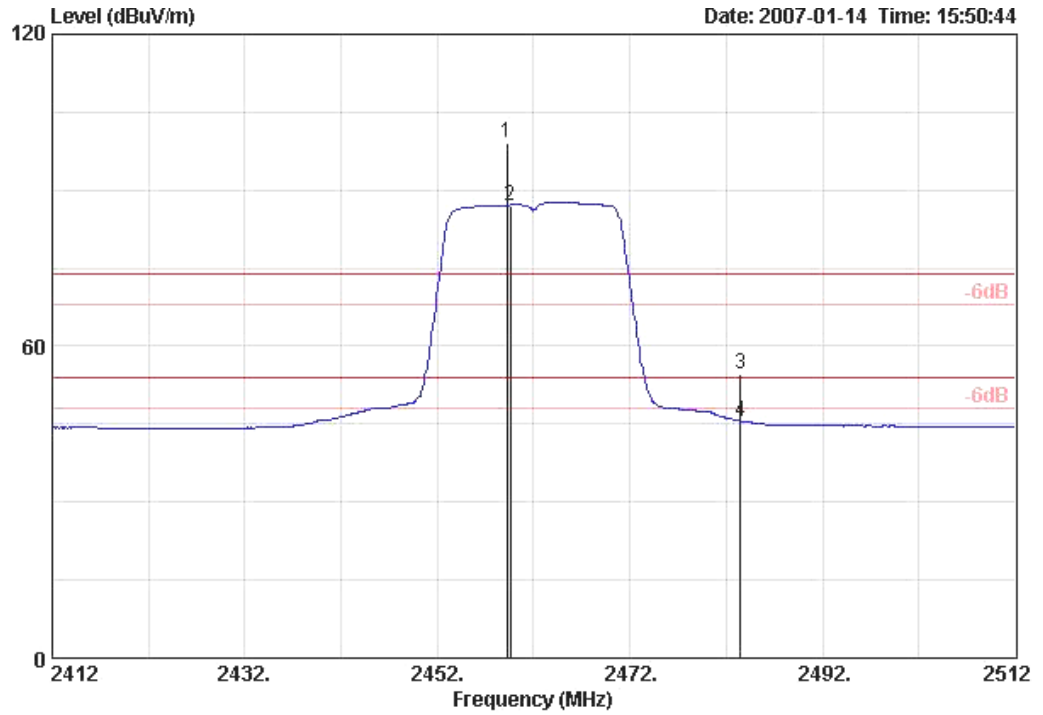


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2459.200			74.00	68.06	2.81	0.00	28.32	PEAK	100	59
2	2459.538			54.00	55.98	2.81	0.00	28.32	AVERAGE	100	59
3	2483.500	54.46	-19.54	74.00	23.26	2.84	0.00	28.36	PEAK	100	59
4	2483.500	45.61	-8.39	54.00	14.40	2.84	0.00	28.36	AVERAGE	100	59

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS0 40MHz Ch 3, 9 Ant. A / Mode 2


Channel 3

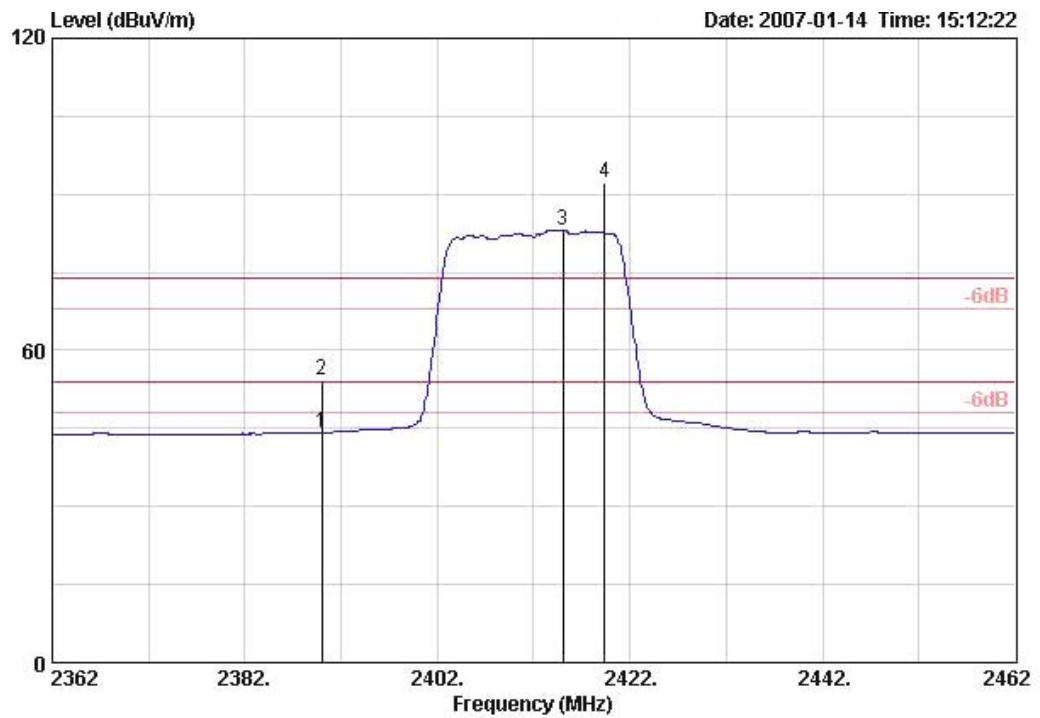

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2390.000	44.19	-9.81	54.00	13.25	2.76	0.00	28.17	AVERAGE	126	299
2	2390.000	54.34	-19.66	74.00	23.40	2.76	0.00	28.17	PEAK	126	299
3	2415.000			54.00	51.97	2.79	0.00	28.21	AVERAGE	126	299
4	2419.400			74.00	61.36	2.79	0.00	28.21	PEAK	126	299

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 9

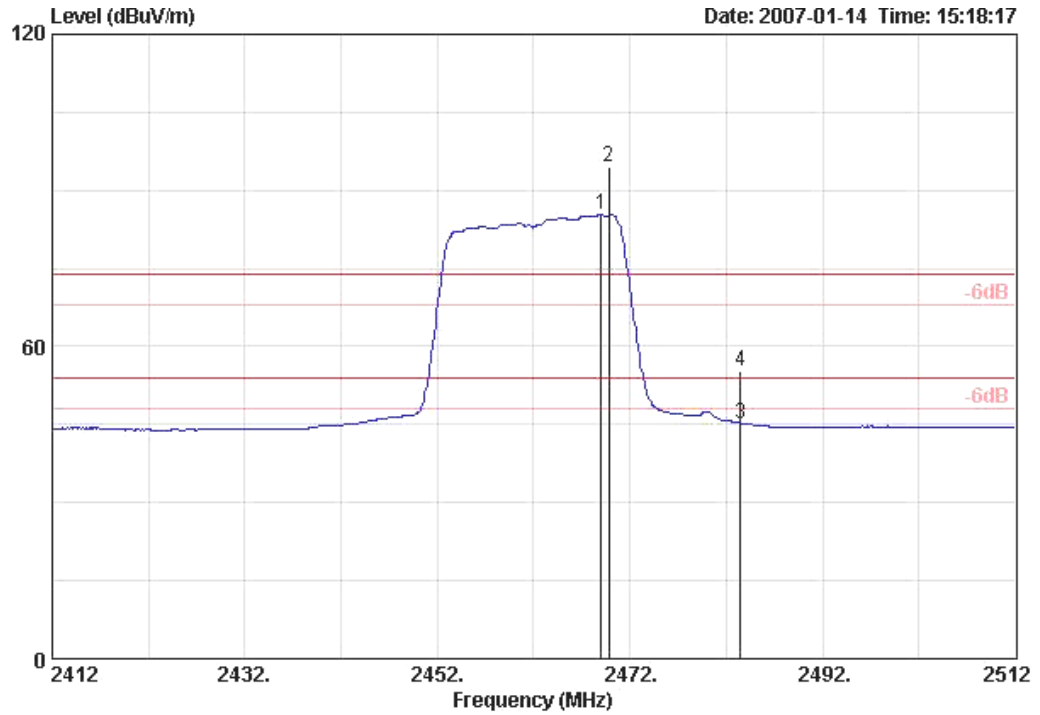


	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2469.000			54.00	54.10	2.81	0.00	28.32	AVERAGE	147	170
2	2469.800			74.00	63.39	2.81	0.00	28.32	PEAK	147	170
3	2483.500	45.26	-8.74	54.00	14.06	2.84	0.00	28.36	AVERAGE	147	170
4	2483.500	55.34	-18.66	74.00	24.14	2.84	0.00	28.36	PEAK	147	170

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	23°C	Humidity	58%
Test Engineer	Jordan Hsiao	Configurations	802.11n MCS8 40MHz Ch 3, 9 Ant. A + Ant. B / Mode 2


Channel 3

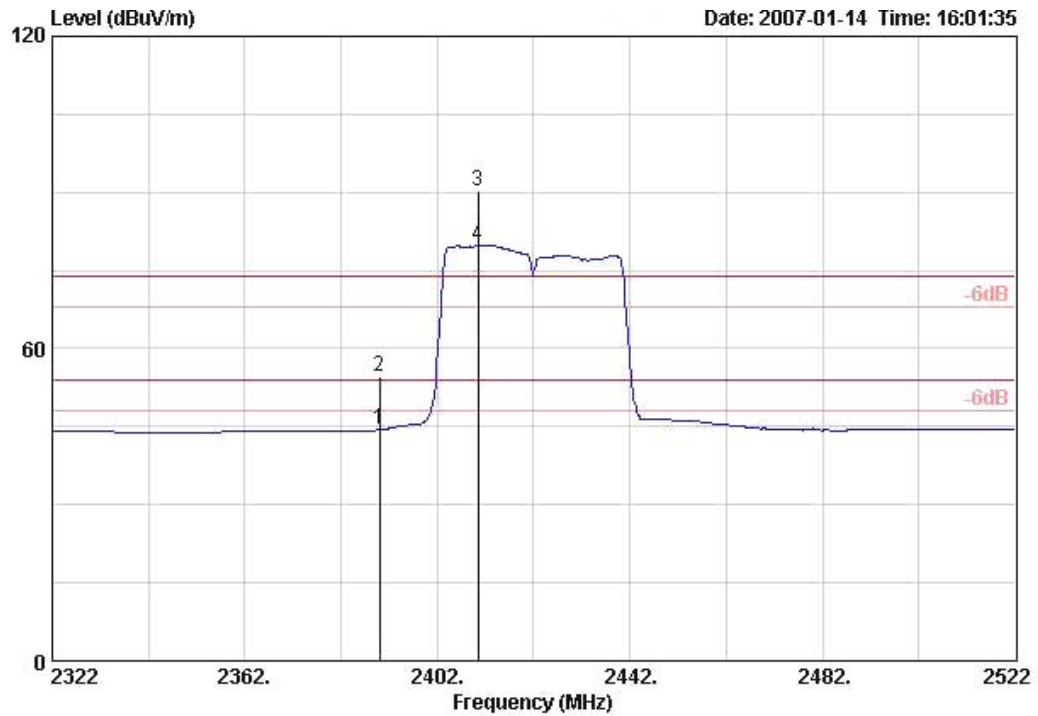

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2390.000	44.36	-9.64	54.00	13.42	2.76	0.00	28.17	AVERAGE	100	195
2	2390.000	54.70	-19.30	74.00	23.77	2.76	0.00	28.17	PEAK	100	195
3	2410.400			74.00	59.21	2.79	0.00	28.21	PEAK	100	195
4	2410.400			54.00	48.92	2.79	0.00	28.21	AVERAGE	100	195

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 9

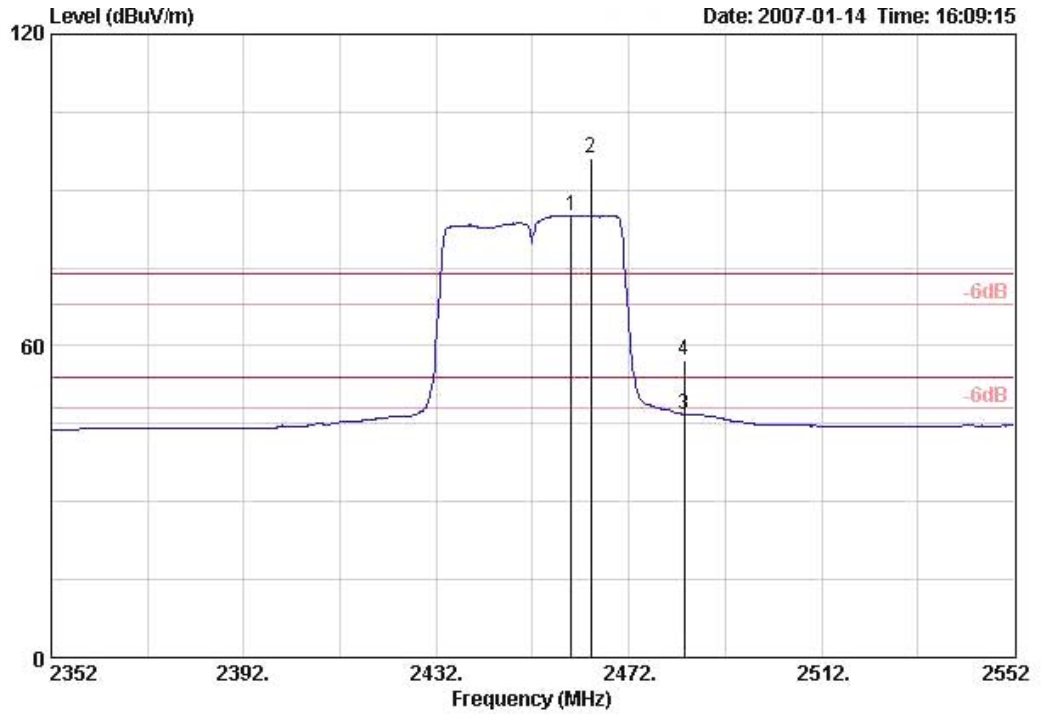

	Freq	Level	Over	Limit	Read	Cable	Preamp	Antenna	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1	2460.000			54.00	53.96	2.81	0.00	28.32	AVERAGE	150	173
2	2464.000			74.00	64.87	2.81	0.00	28.32	PEAK	150	173
3	2483.500	46.84	-7.16	54.00	15.64	2.84	0.00	28.36	AVERAGE	150	173
4	2483.500	57.08	-16.92	74.00	25.87	2.84	0.00	28.36	PEAK	150	173

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2412 MHz

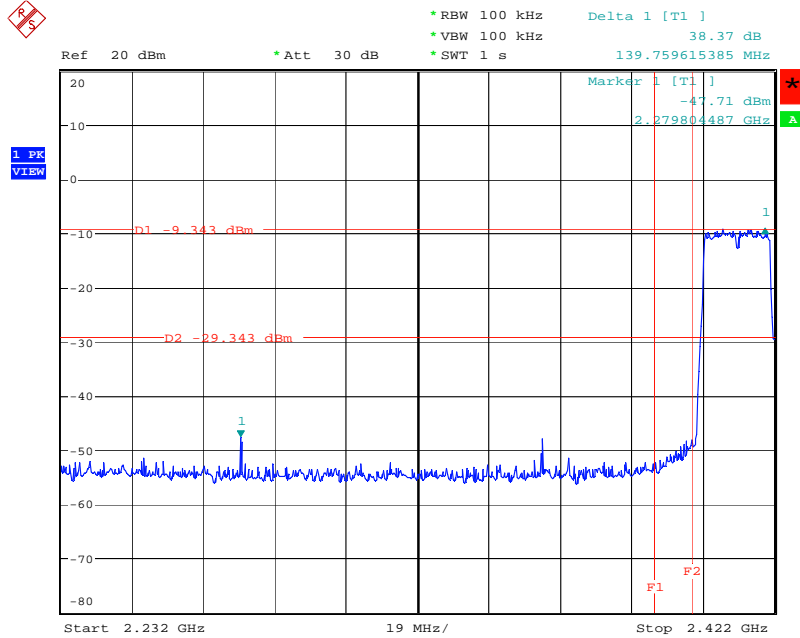


Date: 22.JAN.2007 18:08:43

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2462 MHz

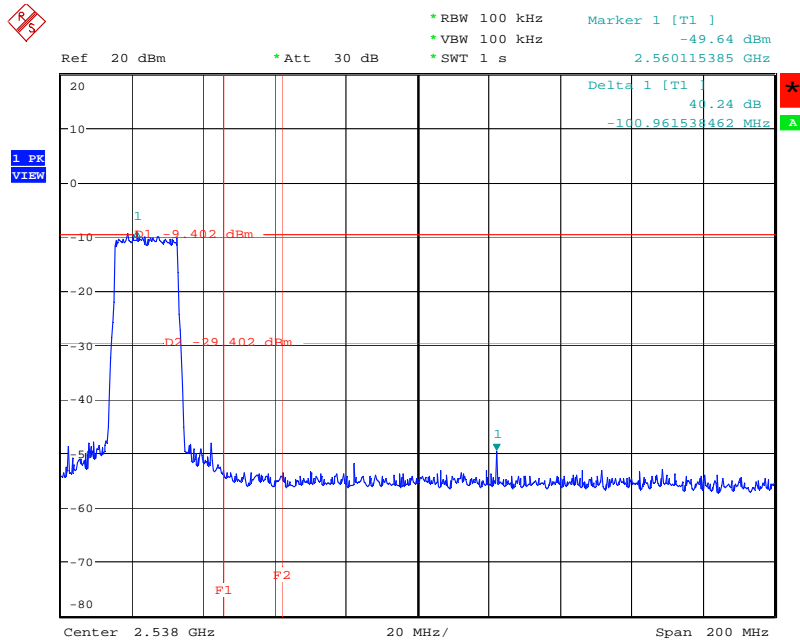


Date: 22.JAN.2007 18:26:15

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

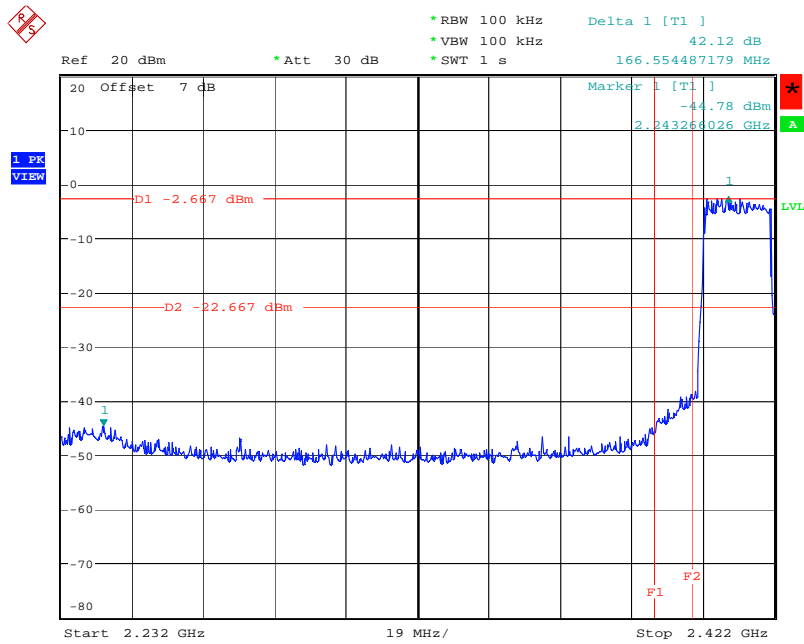

Date: 22.JAN.2007 15:29:32


High Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz Ant. A + Ant. B / 2462 MHz

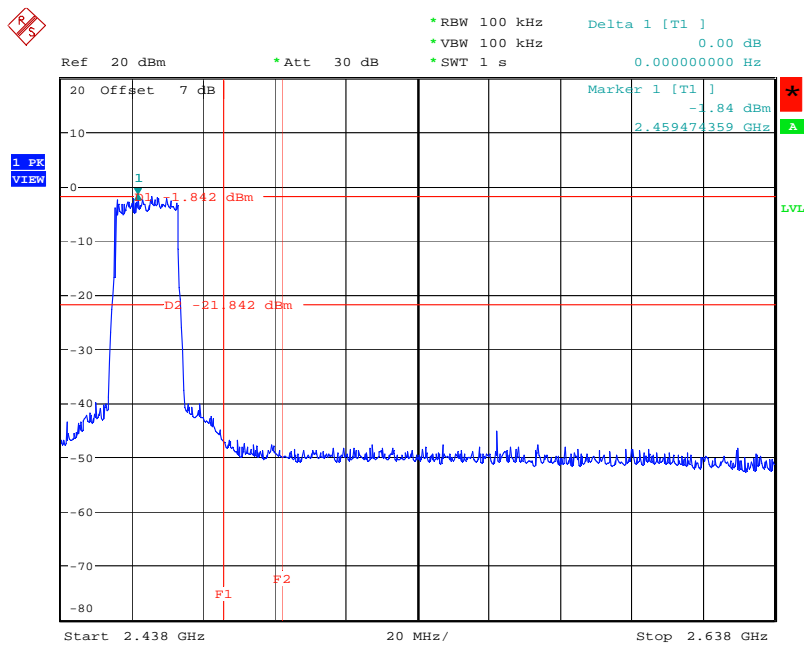

Date: 22.JAN.2007 15:35:30


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2422 MHz

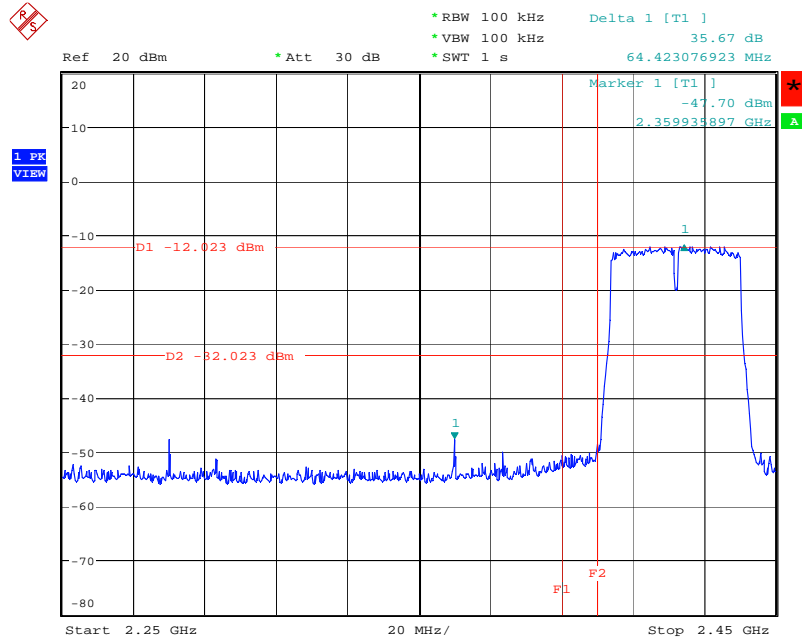


Date: 22.JAN.2007 18:28:15

High Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2452 MHz

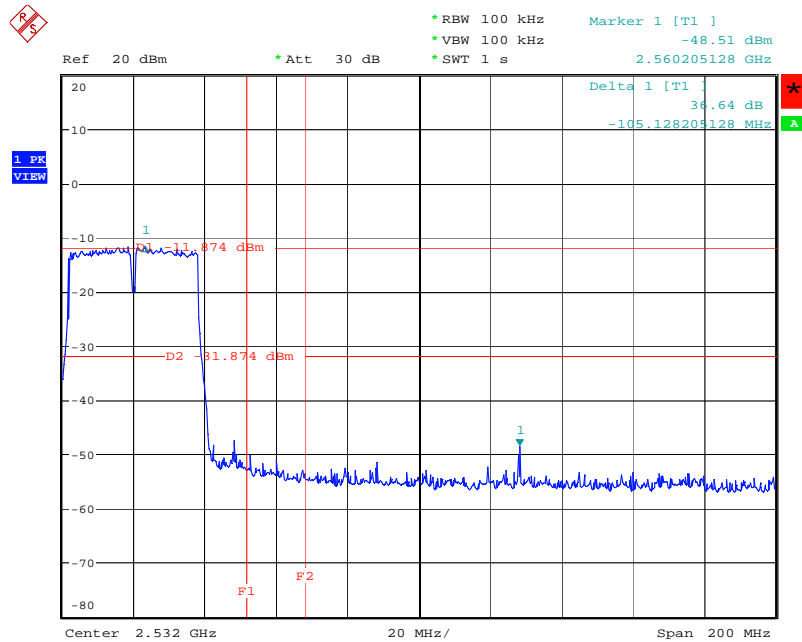


Date: 22.JAN.2007 18:31:10

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2422 MHz

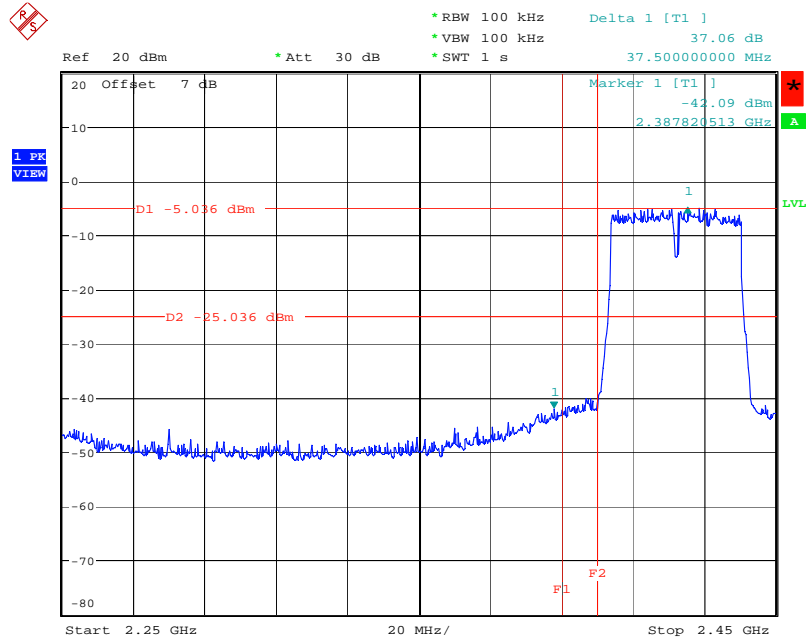

Date: 22.JAN.2007 15:43:02

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

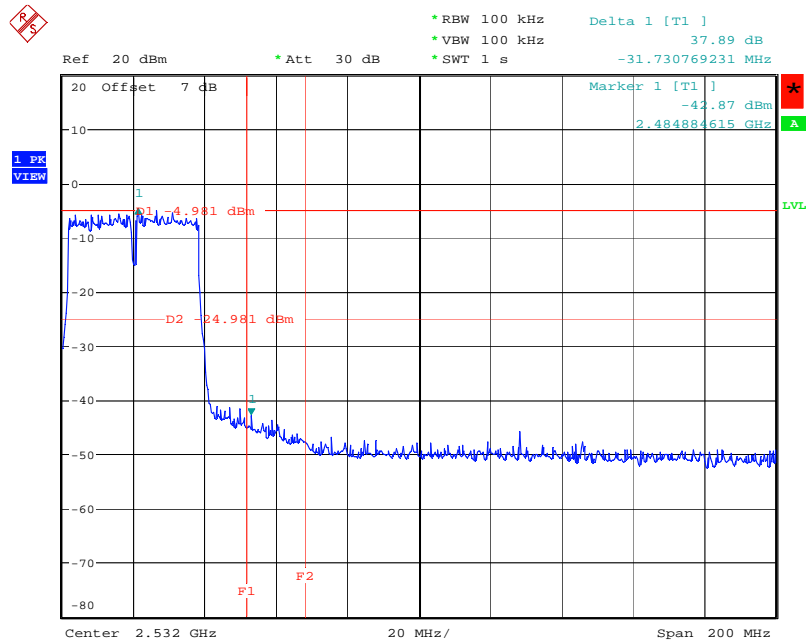

Date: 22.JAN.2007 15:56:27

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 21, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 28, 2006	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 17, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Mar. 27, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Mar. 14, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 27, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 10, 2006	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2006	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2006	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2006	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: * Calibration Interval of instruments listed above is two year.

Note: NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. NVLAP CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.