

Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C

Model:
GDO Elite with RC40-02/05

Serial no.:
--

Applicant:
ELDAT GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 01/17/2000 Operator: K. Roidt

Test performed: by hand File name:

Mode:
- RX active
- 115 V AC supply

Detector:
Quasi-Peak

List of values:
Selected by hand

<i>Frequency MHz</i>	<i>Reading dBµV</i>	<i>Correction factor dB</i>	<i>Value dBµV/m</i>	<i>Limit dBµV/m</i>	<i>Limit exceeded</i>
40.2	12.8	12.7	25.5	40.0	
80.4	5.2	10.7	15.9	40.0	

Result:
Limit kept

Project file:
50530-00034

Page of Pages


Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C

Model: GDO Elite with RC40-02/05	
Serial no.: --	
Applicant: ELDAT GmbH	
Test site: Open area test-site I	
Tested on: Test distance 3 meters Vertical Polarization	
Date of test: 01/17/2000	Operator: K. Roidt
Test performed: by hand	File name:

Mode: - RX active - 115 V AC supply

Detector: Quasi-Peak

List of values: Selected by hand

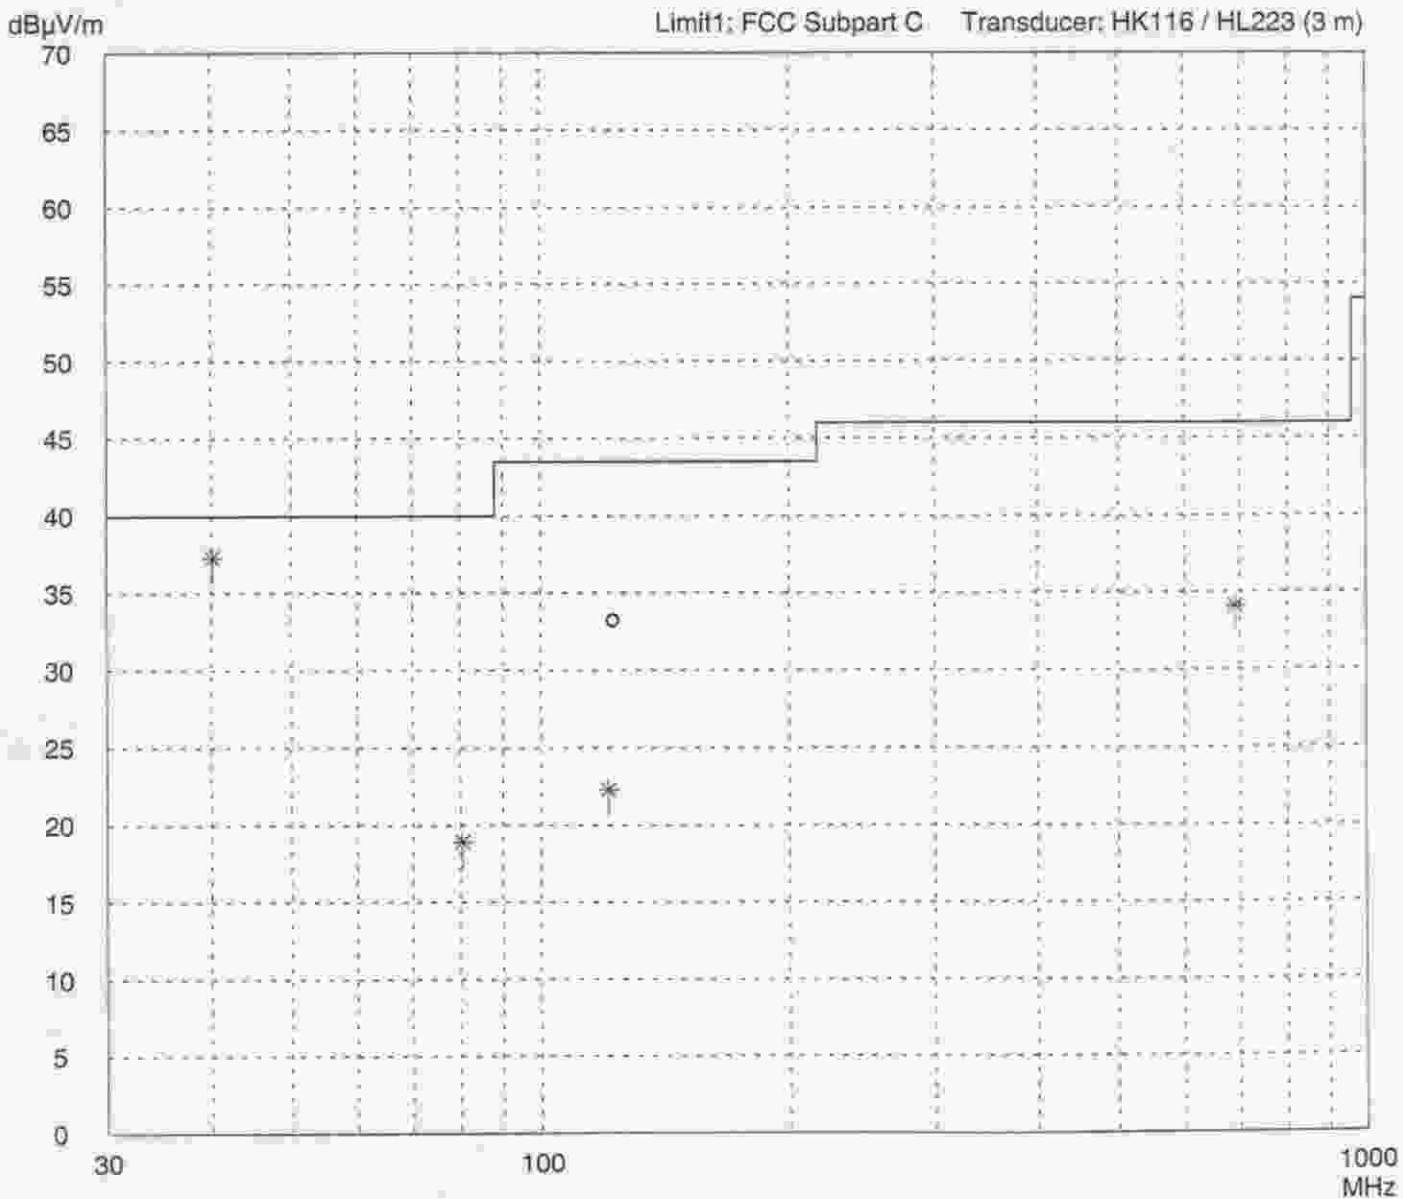

Result: Limit kept

Project file: 50530-00034	Page of Pages
------------------------------	---------------

**Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C**

Model:
GDO Elite with RC40-02/05

Serial no.:
--

Applicant:
ELDAT GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 01/17/2000 Operator: K. Reidt

Test performed: by hand File name:

Mode:
- RX active
- 115 V AC supply

Detector:
Quasi-Peak

List of values:
Selected by hand

<i>Frequency MHz</i>	<i>Reading dBµV</i>	<i>Correction factor dB</i>	<i>Value dBµV/m</i>	<i>Limit dBµV/m</i>	<i>Limit exceeded</i>
40.2	24.6	12.7	37.3	40.0	
80.4	8.2	10.7	18.9	40.0	
120.6	7.9	14.4	22.3	43.5	
692.3	4.2	29.9	34.1	46.0	

Result:
Limit kept

Project file:
50530-00034

Page of Pages

**Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C**

Model:
GDO Elite with RC40-02/05

Serial no.:
--

Applicant:
ELDAT GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Horizontal Polarization


Date of test: 01/17/2000 Operator: K. Roidt

Test performed: by hand File name:

Mode:
- RX active
- 115 V AC supply

Detector:
Quasi-Peak

List of values:
Selected by hand

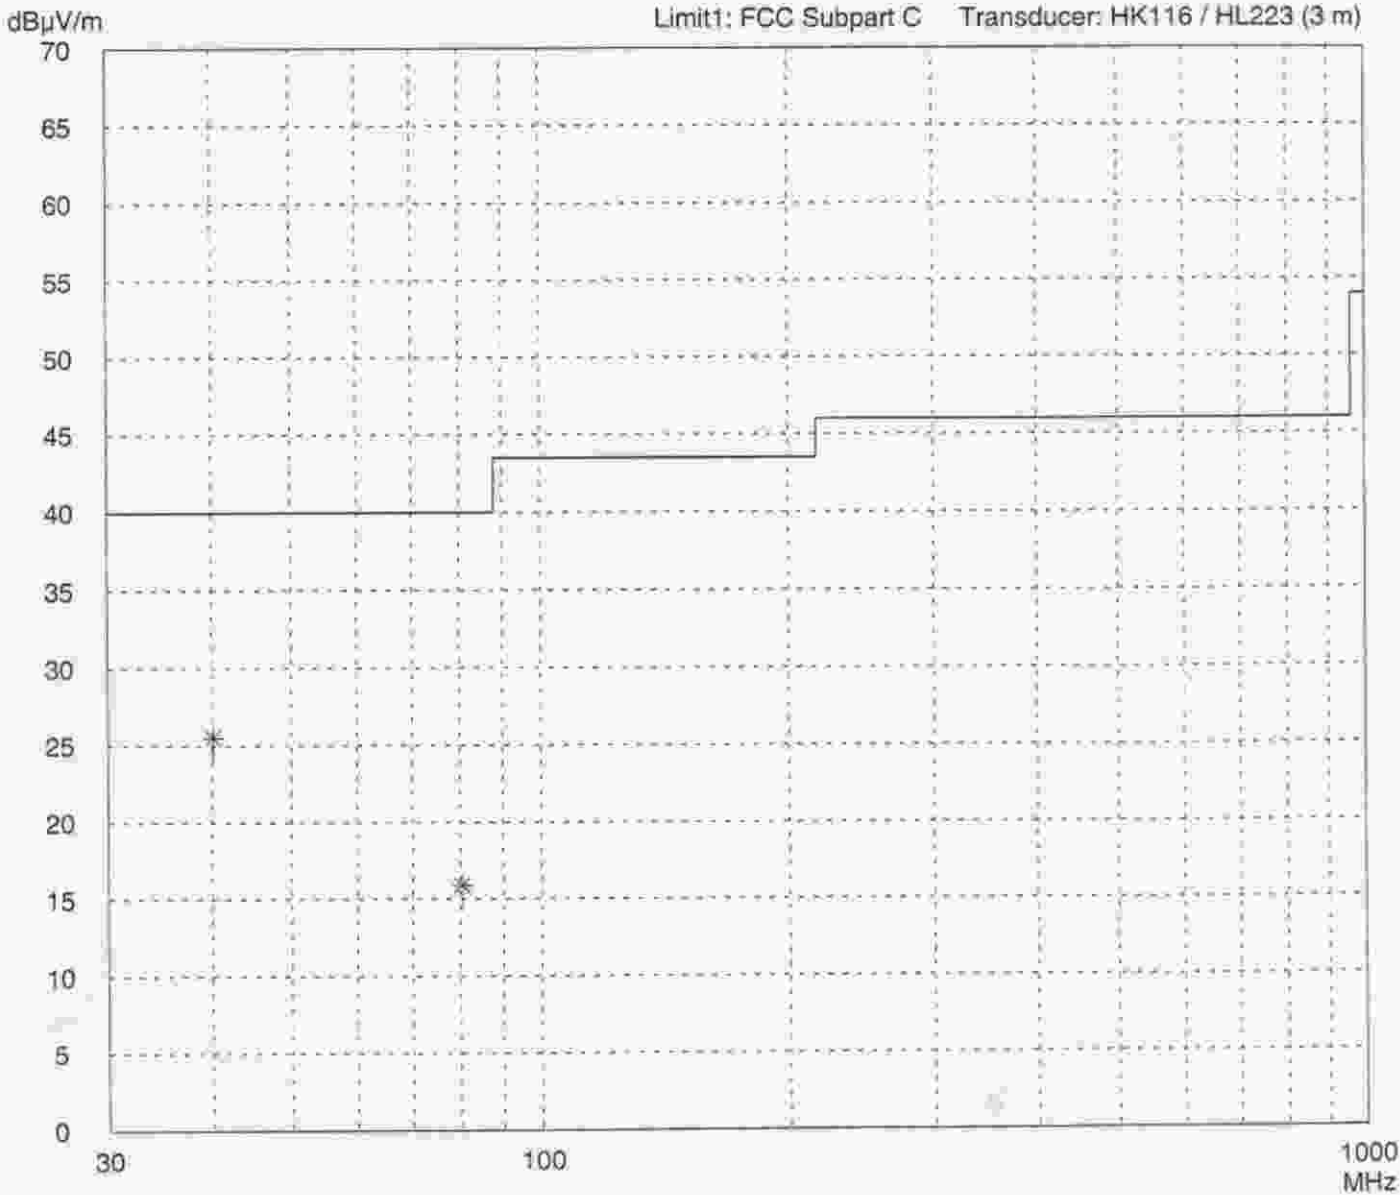

Result:
Limit kept

Project file:
50530-00034 Page of Pages

**Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C**

Model: GDO Elite with RC40-02/05	
Serial no.: --	
Applicant: ELDAT GmbH	
Test site: Open area test-site I	
Tested on: Test distance 3 meters Horizontal Polarization	
Date of test: 01/17/2000	Operator: K. Roidt
Test performed: by hand	File name:

Mode: - RX active
- 115 V AC supply

Detector: Quasi-Peak

List of values: Selected by hand
--

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
40.2	12.8	12.7	25.5	40.0	
80.4	5.2	10.7	15.9	40.0	

Result: Limit kept

Project file: 50530-00034	Page of Pages
-------------------------------------	---------------------


**Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C**

Model: GDO Elite with RC40-02/05	
Serial no.: --	
Applicant: ELDAT GmbH	
Test site: Open area test-site I	
Tested on: Test distance 3 meters Vertical Polarization	
Date of test: 01/17/2000	Operator: K. Roidt
Test performed: by hand	File name:

Mode: - RX active - 115 V AC supply

Detector: Quasi-Peak

List of values: Selected by hand

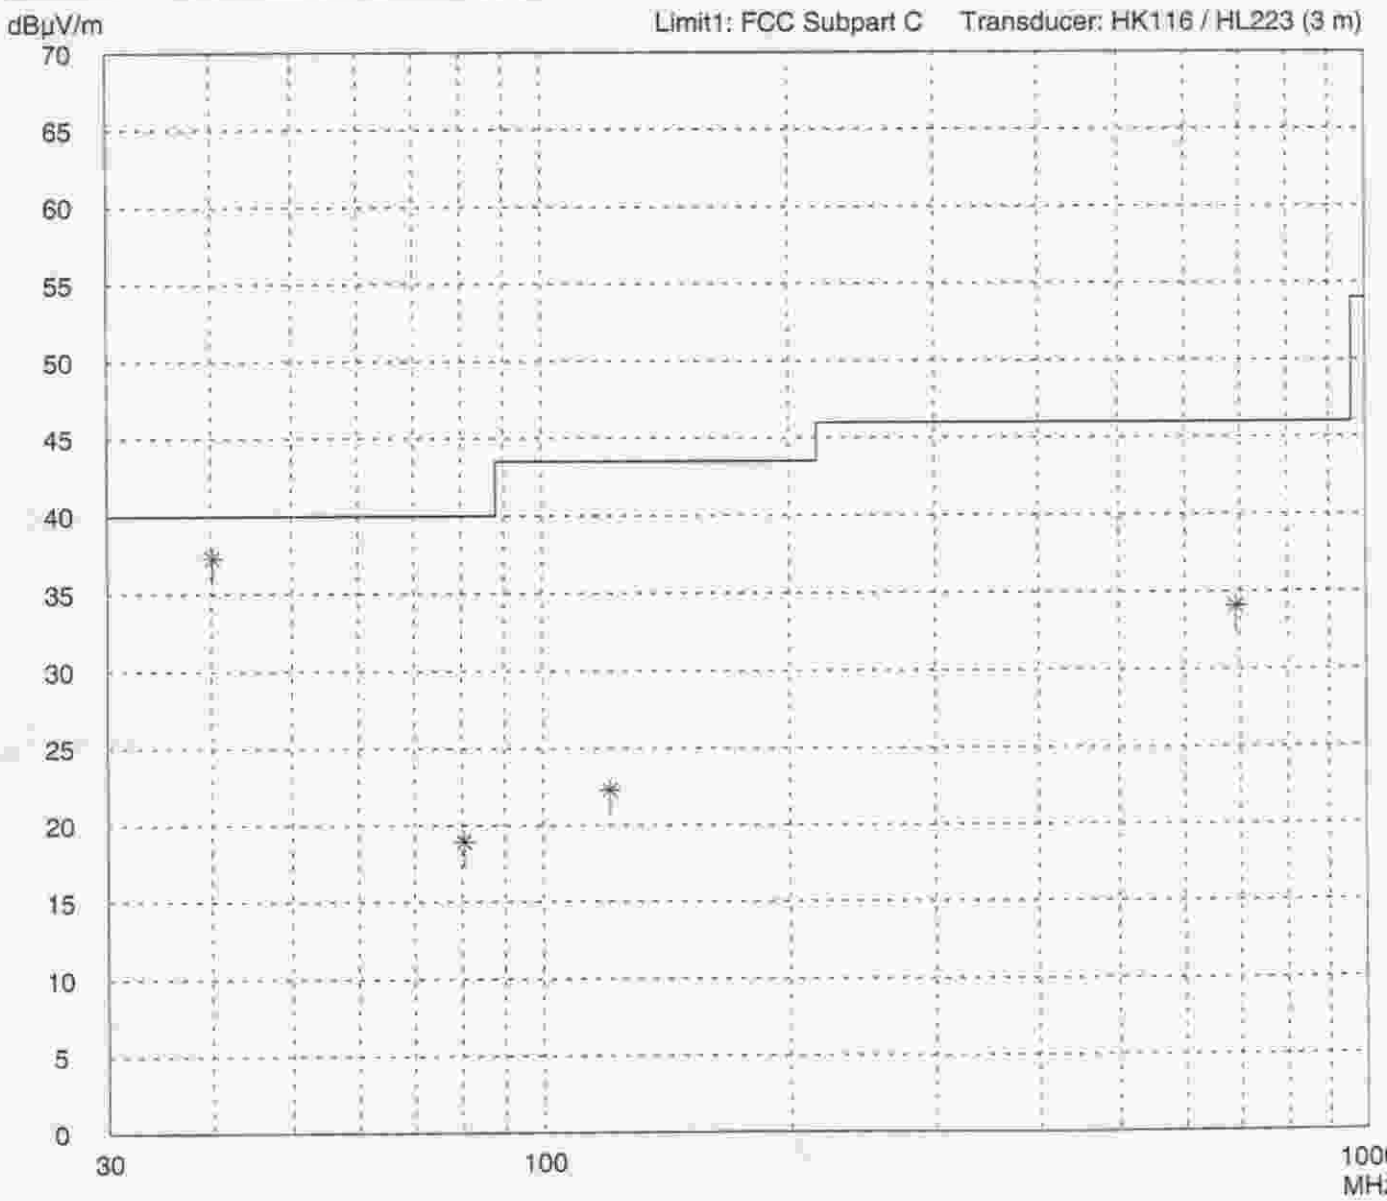

Result: Limit kept

Project file: 50530-00034	Page of Pages
------------------------------	---------------------

**Radiated Emission Test 30 MHz - 1 GHz
according to FCC Part 15 Subpart C**

Model:
GDO Elite with RC40-02/05

Serial no.:
--

Applicant:
ELDAT GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 01/17/2000 **Operator:** K. Roidt

Test performed: by hand **File name:**

Mode:
- RX active

- 115 V AC supply

Detector:
Quasi-Peak

List of values:
Selected by hand

<i>Frequency MHz</i>	<i>Reading dBµV</i>	<i>Correction factor dB</i>	<i>Value dBµV/m</i>	<i>Limit dBµV/m</i>	<i>Limit exceeded</i>
40.2	24.6	12.7	37.3	40.0	
80.4	8.2	10.7	18.9	40.0	
120.6	7.9	14.4	22.3	43.5	
692.3	4.2	29.9	34.1	46.0	

Result:
Limit kept

Project file: 50530-00034 **Page** **of** **Pages**