

Straubing, September 10, 2009

**TEST - REPORT**

---

**No. 50530-060598 (Edition 2)**

**for**

**M3-691**

**Remote Control Transmitter (Keypad Compact 916.5 MHz ASK)**

**Applicant:** ELDAT Gesellschaft für Elektronik und Datentechnik  
mbH

**Test Specifications:** FCC Code of Federal Regulations,  
CFR 47, Part 15,  
Sections 15.205, 15.207, 15.215 and 15.249

Industry Canada Radio Standards Specifications  
RSS-Gen Issue 2, Section 7.2.2 and  
RSS-210 Issue 7, Sections 2.2, A2.9  
(Category I Equipment)

## Table of Contents

1	Description of the Equipment Under Test (EUT) .....	3
2	Administrative Data.....	4
3	Identification of the Test Laboratory .....	5
4	Summary .....	6
5	Operation Mode and Configuration of EUT .....	7
6	Measurement Procedures .....	8
6.1	Bandwidth Measurements.....	8
6.2	Pulse Train Measurement .....	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz .....	10
6.4	Radiated Emission in Fully or Semi Anechoic Room .....	12
6.5	Radiated Emission at Open Field Test Site.....	14
7	Photographs Taken During Testing .....	16
8	Test Results.....	21
8.1	Occupied Bandwidth .....	23
8.2	Bandwidth of the Emission .....	28
8.3	Designation of Emissions .....	30
8.4	Pulse Train Measurement .....	31
8.5	Restricted Bands of Operation .....	33
8.6	Radiated Emission Measurement 9 kHz to 30 MHz .....	34
8.7	Radiated Emission Measurement 30 MHz to 10 GHz .....	35
8.8	Exposure of Humans to RF Fields.....	37
9	Referenced Regulations .....	39
10	Charts taken during testing.....	40
11	Revision History .....	41

## 1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation <sup>1</sup> :	M3-691
Parts <sup>2</sup> :	
Serial number(s):	3
Manufacturer:	ELDAT Gesellschaft für Elektronik und Datentechnik mbH
Type of equipment:	Remote Control Transmitter (Keypad Compact 916.5 MHz ASK)
Version:	As delivered
FCC ID:	
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	902 MHz - 928 MHz
Frequency range:	902 MHz - 928 MHz
Operating frequency:	916.5 MHz
Type of modulation:	ASK
Pulse train:	100 ms
Pulse width:	100 ms
Number of RF-channels:	1
Channel spacing:	Not applicable
Designation of emissions <sup>3</sup> :	10K0A1D
Type of antenna:	Integrated on printed board
Size/length of antenna:	60 mm
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage:      6.0 V

<sup>1</sup> Type designation of the system if EUT consists of more than one part.

<sup>2</sup> Type designations of the parts of the system, if applicable.

<sup>3</sup> Also known as "Class of Emission".

## 2 Administrative Data

Application details	
Applicant (full address):	ELDAT Gesellschaft für Elektronik und Datentechnik mbH Im Gewerbepark 14 D-15711 Zeesen
Contact person:	Mr. Puppel
Contract identification:	Order no. 43320 OF (7 July 2006)
Receipt of EUT:	10 July 2006
Date(s) of test:	19 July 2006
Note(s):	---

Report details	
Report number:	50530-060598
Edition:	2
Issue date:	September 10, 2009

### 3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

## 4 Summary

### Summary of test results

The tested sample complies with the requirements set forth in the

**Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.215 and 15.249**

of the Federal Communication Commission (FCC) and the

**Radio Standards Specifications**

**RSS-210 Issue 7, Sections 2.2, A2.9 (Category I Equipment)**

of Industry Canada (IC).

### Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

## 5 Operation Mode and Configuration of EUT

### Operation Mode

The applicant provided a special test sample which allowed a continuous transmission mode.

### Configuration of EUT

The EUT was configured as stand alone device.

As handheld device prescans were performed in three positions of the EUT:

- EUT flat on table
- EUT on right side
- EUT in upright position

### List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification<sup>4</sup></i>	<i>Cable type</i>	<i>Cable length</i>
	Not applicable			

### List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
	Not applicable			

### List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
	Not applicable			

<sup>4</sup> Ports shall be classified as ac power, dc power or signal/control port

## 6 Measurement Procedures

### 6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 7, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	




## 6.2 Pulse Train Measurement

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 2, section 4.5
Guide:	ANSI C63.4
Measurement setup:	<input type="checkbox"/> Conducted: See below (direct connection or via test fixture) <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
<p>If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals.</p> <p>If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.</p>	

### 6.3 Radiated Emission Measurement 9 kHz to 30 MHz


Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249(d) IC RSS-210 Issue 7, section A2.9(b)
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

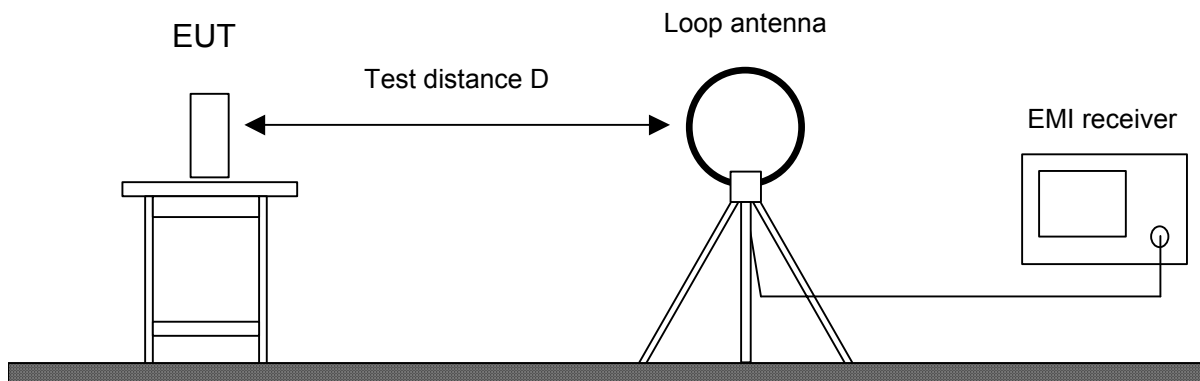

Used	Type	Model	Serial No. or ID	Manufacturer
<input type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
<input type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input checked="" type="checkbox"/>	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input type="checkbox"/>	Open field test site	EG 1	1450	Senton

## 6.4 Radiated Emission in Fully or Semi Anechoic Room

<b>Measurement Procedure:</b>	
Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 7, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.</p>	

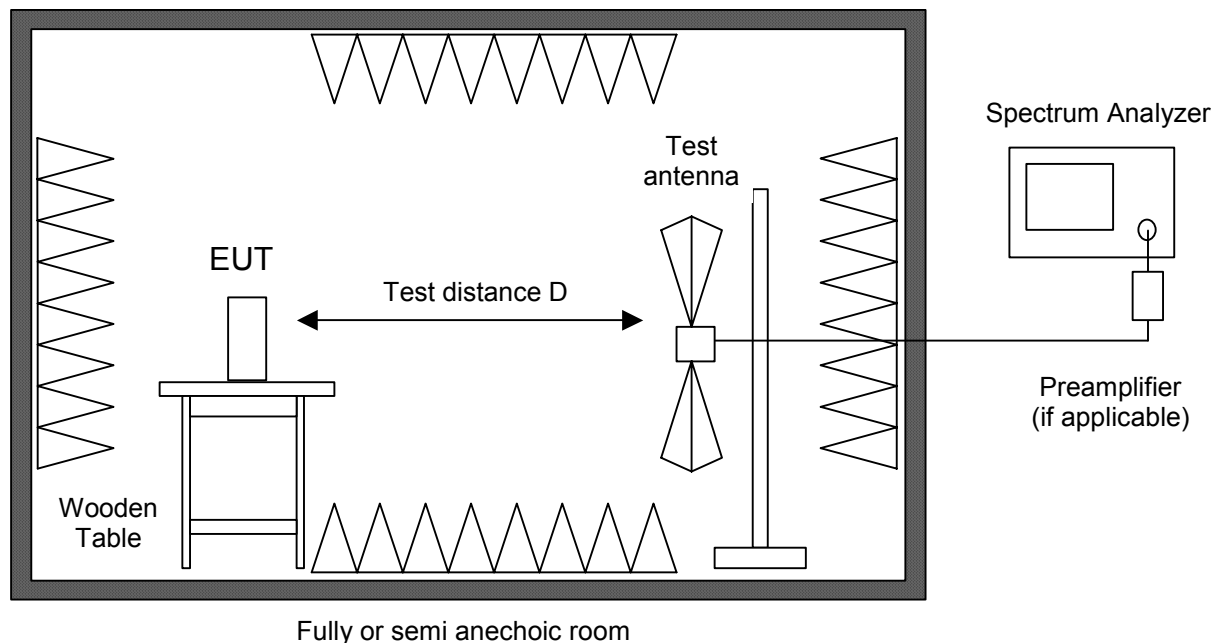


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	Spectrum analyzer	R 3271	05050023	Advantest
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601		Advantest
<input checked="" type="checkbox"/>	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
<input type="checkbox"/>	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
<input checked="" type="checkbox"/>	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
<input checked="" type="checkbox"/>	Horn antenna	3115	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-05	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-06	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-07	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens

**6.5 Radiated Emission at Open Field Test Site**

<b>Measurement Procedure:</b>	
Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 7, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

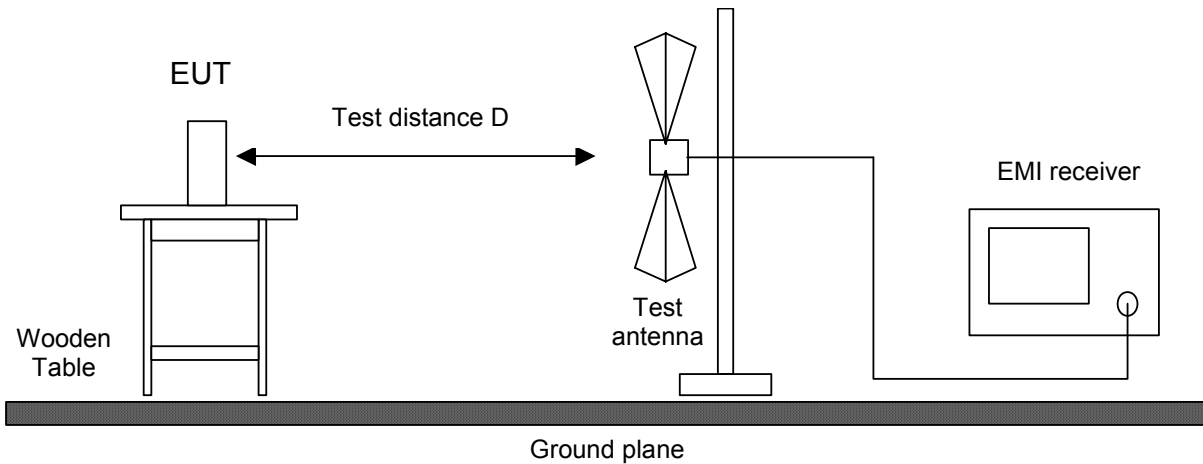

Test instruments used:

Used	Type		Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver		ESVP	881120/024	Rohde & Schwarz
<input checked="" type="checkbox"/>	Biconical antenna	EG 1	HK 116	842204/001	Rohde & Schwarz
<input checked="" type="checkbox"/>	Log. per. antenna	EG 1	HL 223	841516/023	Rohde & Schwarz
<input checked="" type="checkbox"/>	Open field test site		EG 1	1450	Senton

## 7 Photographs Taken During Testing



**Test setup for radiated emission measurement  
(fully anechoic room)**



**Test setup for radiated emission measurement  
(fully anechoic room) - continued -**



**Test setup for radiated emission measurement  
(open field test site)**



**Test setup for radiated emission measurement  
(open field test site) - continued -**



## 8 Test Results

FCC CFR 47 Parts 2 and 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	23	Recorded
15.215(c)	Bandwidth of the emission	28	Test passed
2.201, 2.202	Class of emission	30	Calculated
15.35(c)	Pulse train measurement for pulsed operation	31	Recorded
15.205(a)	Restricted bands of operation	33	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.205(b) 15.249	Radiated emission 9 kHz to 30 MHz	34	Test passed
15.205(b) 15.215(b) 15.249	Radiated emission 30 MHz to 10 GHz	35	Test passed

<b>IC RSS-Gen Issue 2</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	23	Recorded
3.2(h), 8	Designation of emissions	30	Calculated
4.5	Pulsed operation	31	Recorded
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	---	Not applicable
5.5	Exposure of Humans to RF Fields		Exempted from SAR and RF evaluation

<b>IC RSS-210 Issue 7</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	33	Test passed
2.2(b)(c), 2.6 A2.9	Unwanted emissions 9 kHz to 30 MHz	34	Test passed
2.2(b)(c), 2.6 A2.9	Unwanted emissions 30 MHz to 10 GHz	35	Test passed

## 8.1 Occupied Bandwidth


Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	19 July 2006
Test site:	Fully anechoic room, cabin no. 2

**Occupied Bandwidth (99 %):**



\*RBW 10 kHz    Marker 1 [T1 ]  
 \*VBW 100 kHz    56.14 dBµV  
 Ref 70 dBµV    \*Att 20 dB    SWT 100 ms    916.510000000 MHz

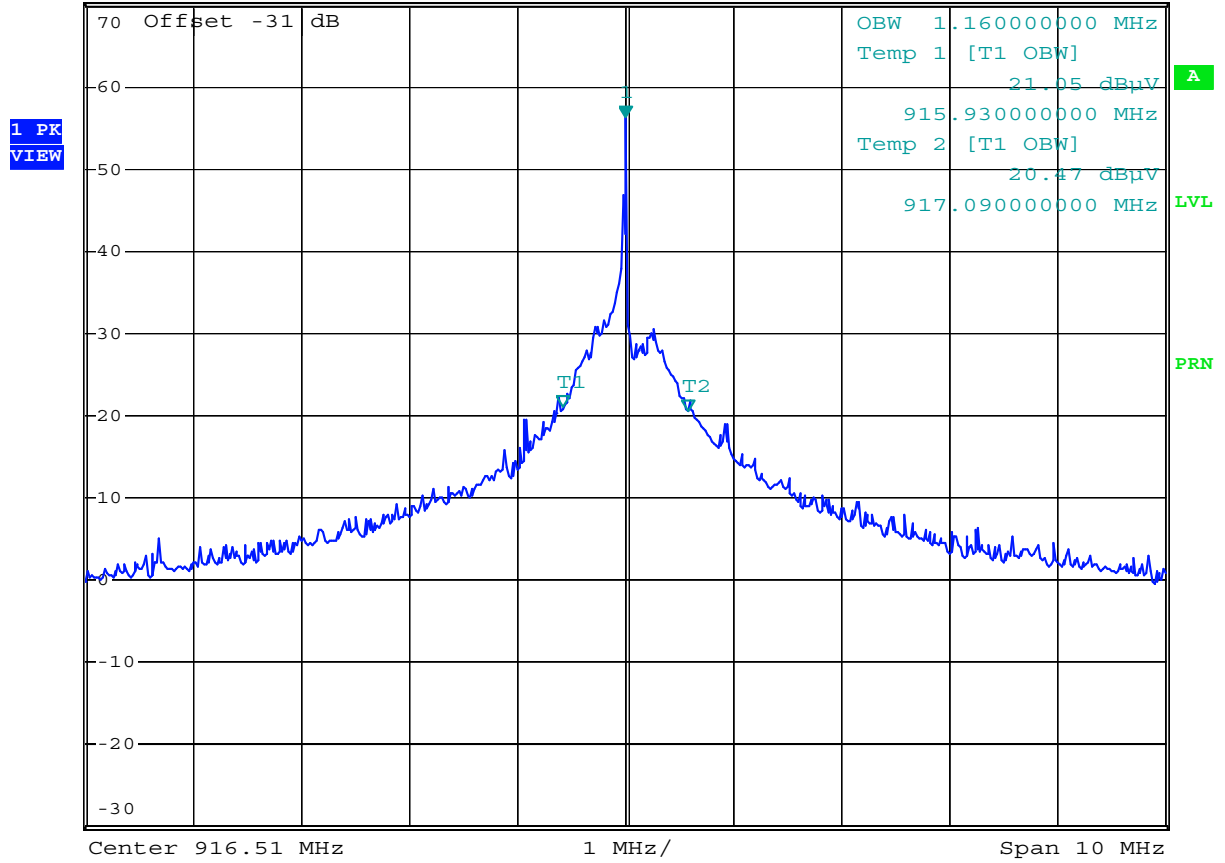

Comment: Eldat 060598: Occupied Bandwidth  
 Date: 19.JUL.2006 12:52:29


Occupied Bandwidth (99 %):	<b>1.16 MHz</b>
----------------------------	-----------------



Occupied Bandwidth (-26 dB):



\*RBW 10 kHz    Marker 2 [T1 ]  
 \*VBW 100 kHz    29.55 dBµV  
 Ref 70 dBµV    \*Att 20 dB    SWT 100 ms    916.210000000 MHz

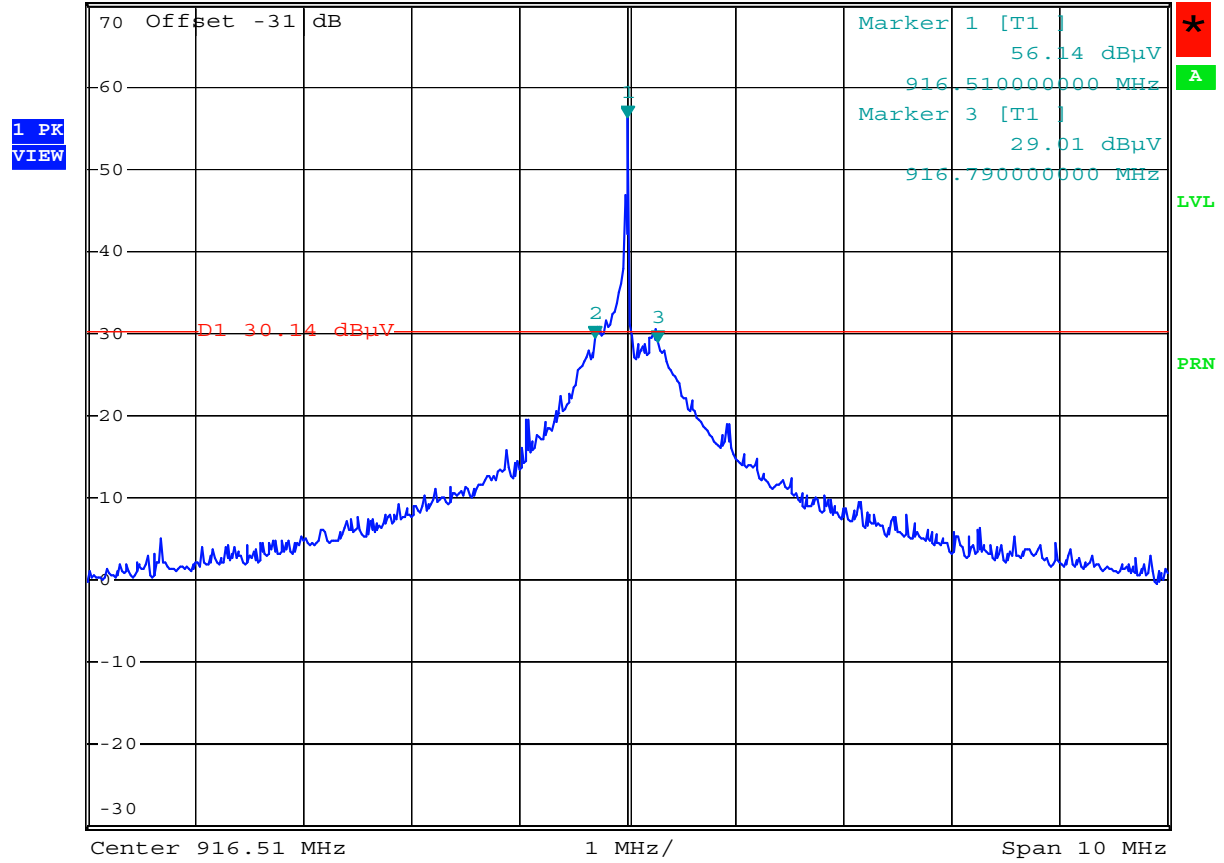

Comment: Eldat 060598: Occupied Bandwidth  
 Date: 19.JUL.2006 12:53:34

Occupied Bandwidth (-26 dB): **580 kHz**

## Occupied Bandwidth (continued)


Rules and specifications:	IC RSS-Gen Issue 2, section 4.6.1
Guide:	IC RSS-Gen Issue 2, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	19 July 2006
Test site:	Fully anechoic room, cabin no. 2

**Occupied Bandwidth (99 %):**



\* RBW 100 kHz    Marker 1 [T1 ]  
 \* VBW 300 kHz                    56.09 dBµV  
 Ref 70 dBµV                    \*Att 20 dB                    SWT 2.5 ms                    916.51000000 MHz

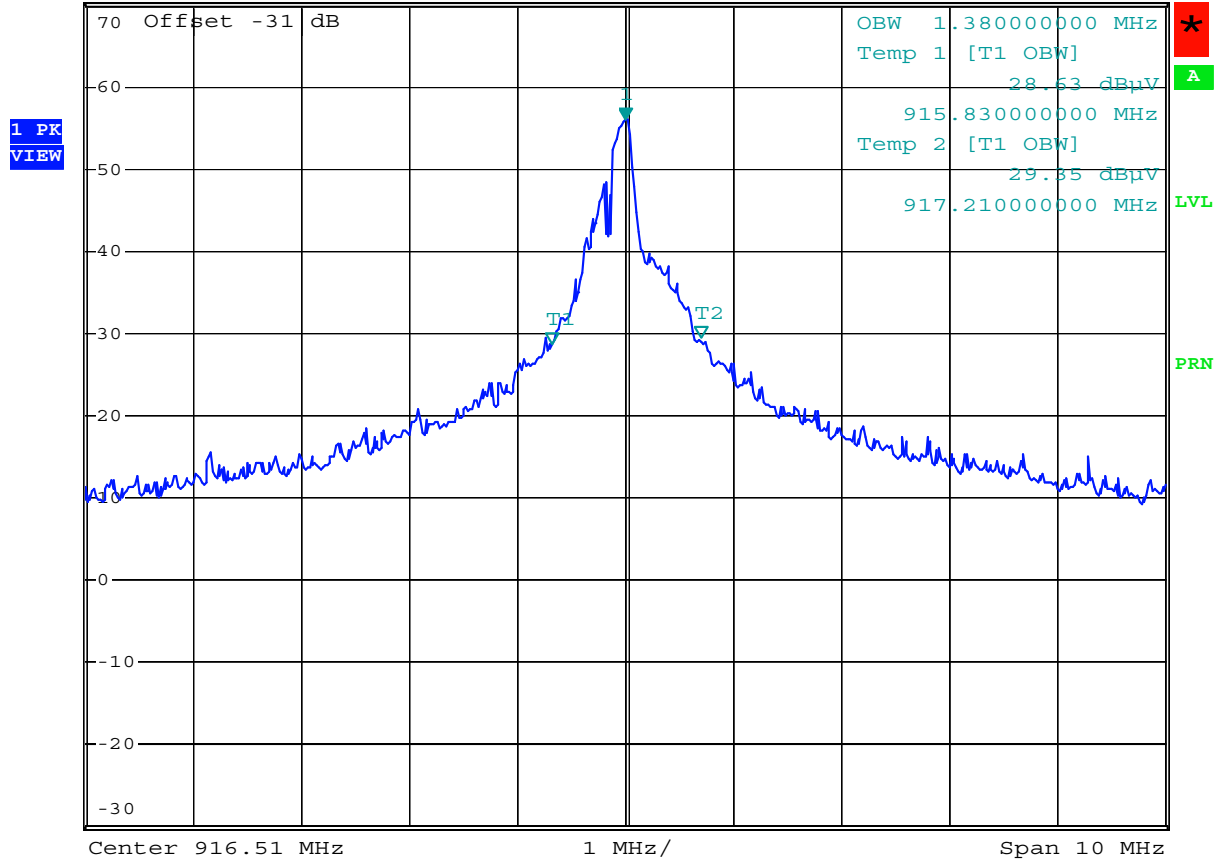

Comment: Eldat 060598: Occupied Bandwidth  
 Date: 19.JUL.2006 12:54:54

**Occupied Bandwidth (99 %): 1.38 MHz**

## 8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	19 July 2006
Test site:	Fully anechoic room, cabin no. 2



### 8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 2, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

$B_n$ = Necessary Bandwidth	$B_n = 2BK$
$B$ = Modulation rate	$B = 5 \text{ kHz}$
$K$ = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (5 \text{ kHz}) \cdot 1 = 10 \text{ kHz}$


Designation of Emissions:	<b>10K0A1D</b>
---------------------------	----------------

## 8.4 Pulse Train Measurement

Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 2, section 4.5
Guide:	ANSI C63.4
Measurement procedure:	Pulse Train Measurement (6.2)

Comment:	
Date of test:	19 July 2006
Test site:	Fully anechoic room, cabin no. 2

### Total Pulse Train:

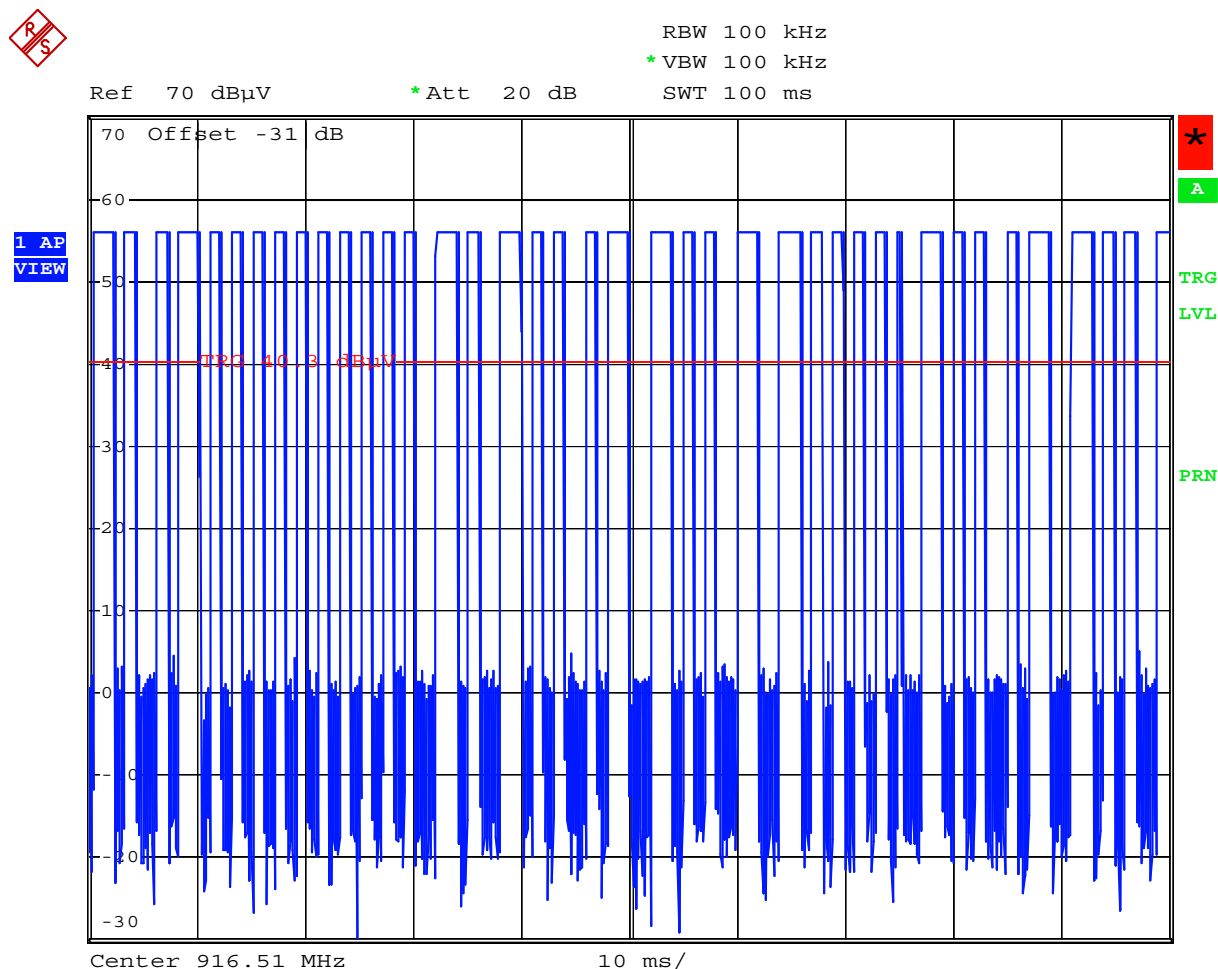

Comment: Eldat 060598: Duty Cycle Correction  
 Date: 19.JUL.2006 12:49:48

**Calculation of pulse train correction:**


TX-On-Time (worst case):	$T_{on}$	=	$11 \cdot 2.07 \text{ ms} + 28 \cdot 1.07 \text{ ms} = 52.73 \text{ ms}$
Pulse Train Time:	$T_{pt}$	=	100 ms
Period Time:	$T_{period}$	=	100 ms
Pulse Train Correction:	$C_{pt}$	=	$20 \cdot \text{Log}(T_{on} / T_{period}) \text{ dB}$
		=	<b>-5.56 dB</b>



## 8.5 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 7, section 2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 7, section 2.2(a)..
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.4)

Comment:	
Date of test:	19 July 2006
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

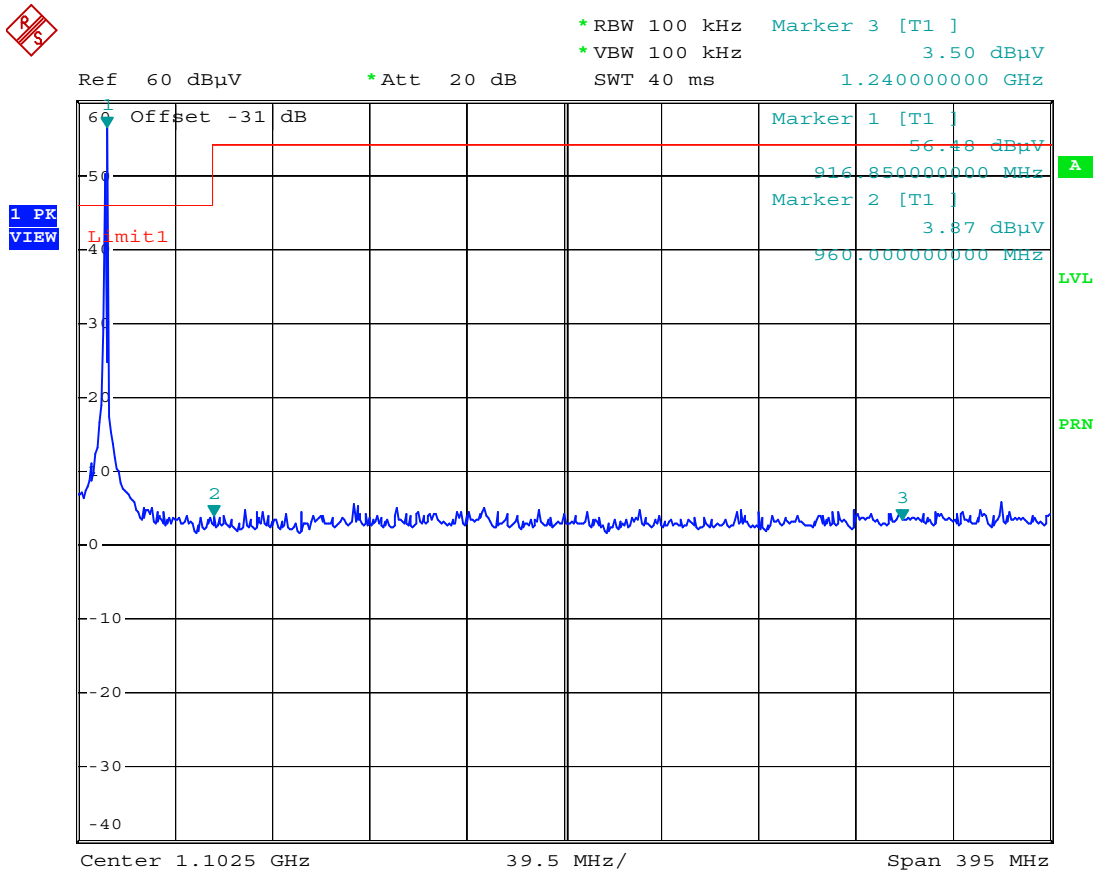

Comment: Eldat 060598: Restricted Bands of Operation  
 Date: 19.JUL.2006 12:39:24

Test Result:	Test passed
--------------	-------------

## 8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249(d) IC RSS-210 Issue 7, section A2.9(b)			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength (dB $\mu\text{V}/\text{m}$ )	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			

Test Result:	Test passed (No emissions above noise level detected)
--------------	---

## 8.7 Radiated Emission Measurement 30 MHz to 10 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 7, section A2.9		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength (dB $\mu\text{V/m}$ )
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Open Field Test Site (6.5)		

Comment:	
Date of test:	19 July 2006
Test site:	Frequencies $\leq$ 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB $\mu\text{V}$ )	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB $\mu\text{V/m}$ )	Limit (dB $\mu\text{V/m}$ )	Margin (dB)
916.500	horizontal	Quasi-Peak	67.2	26.2		93.4	94.0	0.6
1834.000	vertical	Peak	27.8	31.4	-5.6	53.7	54.0	0.3
2752.000	horizontal	Peak	19.8	34.8	-5.6	49.1	54.0	5.0
3670.000	horizontal	Peak	10.1	38.3	-5.6	42.9	54.0	11.1
4584.600	horizontal	Peak	23.8	34.1	-5.6	52.3	54.0	1.7
5500.400	vertical	Peak	23.5	34.9	-5.6	52.8	54.0	1.2
6414.000	horizontal	Peak	13.0	38.3	-5.6	45.7	54.0	8.3
7330.500	vertical	Peak	10.9	39.1	-5.6	44.4	54.0	9.6
7335.200	vertical	Peak	15.0	39.1	-5.6	48.5	54.0	5.5
8246.800	vertical	Peak	15.4	43.2	-5.6	53.0	63.5	10.5
9164.800	horizontal	Peak	12.3	43.8	-5.6	50.5	63.5	13.0

**Sample calculation of final values:**

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Pulse Train Correction (dB)}$$

**8.8 Exposure of Humans to RF Fields**

Rules and specifications:	IC RSS-Gen Issue 2, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
<b>The antenna is</b>				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \mathbf{W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: <math>G = \dots\dots\dots</math></p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p><input type="checkbox"/> the field strength<sup>6</sup> in V/m: <math>FS = \dots\dots\dots \mathbf{V/m}</math></p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p>with:</p> <p>Distance between the antennas in m: <math>D = \dots\dots\dots \mathbf{m}</math></p>			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by<sup>6</sup>:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{656.23 \mu W}$ <p>with:</p> <p>Field strength in V/m: <math>FS = \mathbf{46.77 \text{ mV/m}}</math></p> <p>Distance between the two antennas in m: <math>D = \mathbf{3 \text{ m}}</math></p>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<b>Selection of output power</b>				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = \mathbf{656.23 \mu W}$				

<sup>6</sup> The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
<b>Separation distance between the user and the transmitting device is</b>				
<input checked="" type="checkbox"/> less than or equal to 20 cm <input type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>		
<b>Transmitting device is</b>				
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn		<input checked="" type="checkbox"/>		
<b>SAR evaluation</b>				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm. <input checked="" type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and its source-based time-averaged output power is less than, or equal to 200 mW for General Public Use and 1000 mW for Controlled Use. <input type="checkbox"/> The device operates above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is less than, or equal to 100 mW for General Public Use and 500 mW for Controlled Use. <input type="checkbox"/> The device operates above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use. <input type="checkbox"/> The device operates above 3 GHz up to 6 GHz inclusively and its source-based time-averaged output power) is less than, or equal to 10 mW for General Public Use and 50 mW for Controlled Use. <input type="checkbox"/> SAR evaluation is documented in test report no. ....				<input checked="" type="checkbox"/>       <input type="checkbox"/>       <input type="checkbox"/>       <input type="checkbox"/>       
<b>RF exposure evaluation</b>				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm. <input type="checkbox"/> The device operates below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W. <input type="checkbox"/> The device operates at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W. <input type="checkbox"/> RF exposure evaluation is documented in test report no. ....				<input type="checkbox"/>   <input type="checkbox"/>   

## 9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2008
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2008
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	November 2005
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

## 10 Charts taken during testing



## 11 Revision History

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
000	19.07.2006	M. Steindl	First Edition
001	31.08.2009	C. Jäger	Edition 2 Update required for FCC-/IC-Certification (List Referenced Standards) Model name changed to M3-691 Test Procedure for Radiated Emission Test 9 kHz - 30 MHz attached

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
Keypad Compact 916,5 MHz ASK

Serial no.:  
3

Applicant:  
Eldat GmbH

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres  
Horizontal Polarization

Date of test:  
07/19/2006

Operator:  
M. Steindl

Test performed:  
automatically

File name:  
default.emi

Comment:

- battery supply
- transmitting continuously
- EUT flat on table

Detector:  
Peak


List of values:

10 dB Margin

50 Subranges

dB $\mu$ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

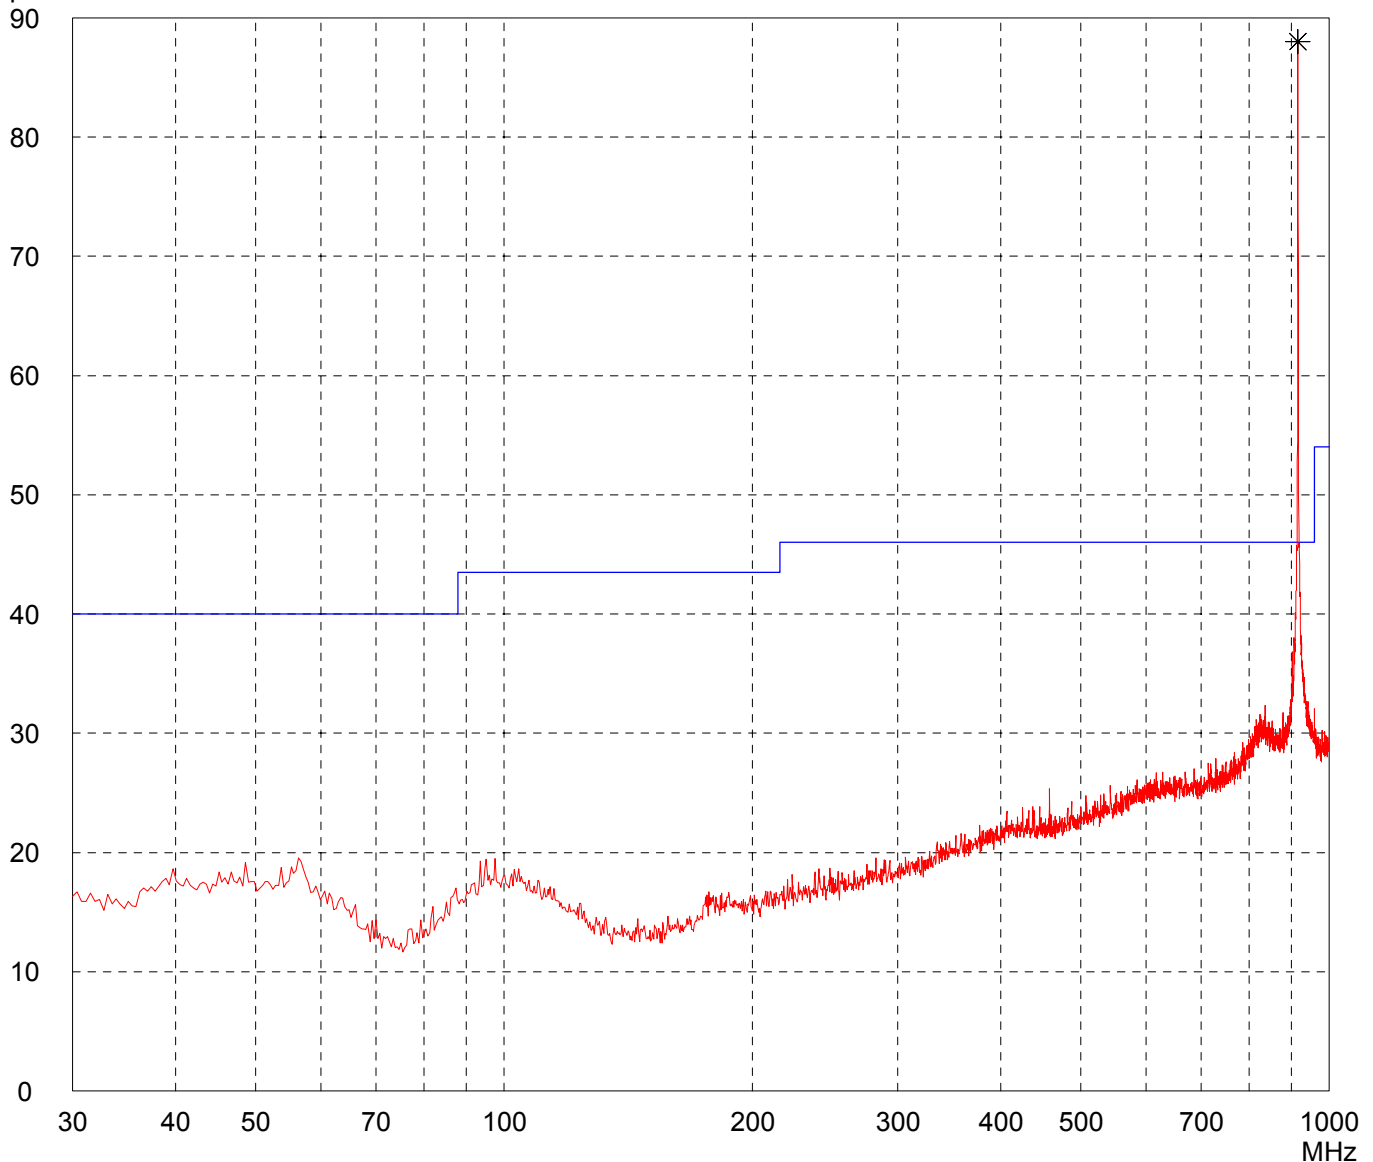

Result:  
Prescan

Project file:  
50530-60598


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:  
- battery supply  
- transmitting continuously  
- EUT flat on table

Detector: Peak
-------------------

List of values:  
10 dB Margin                      50 Subranges

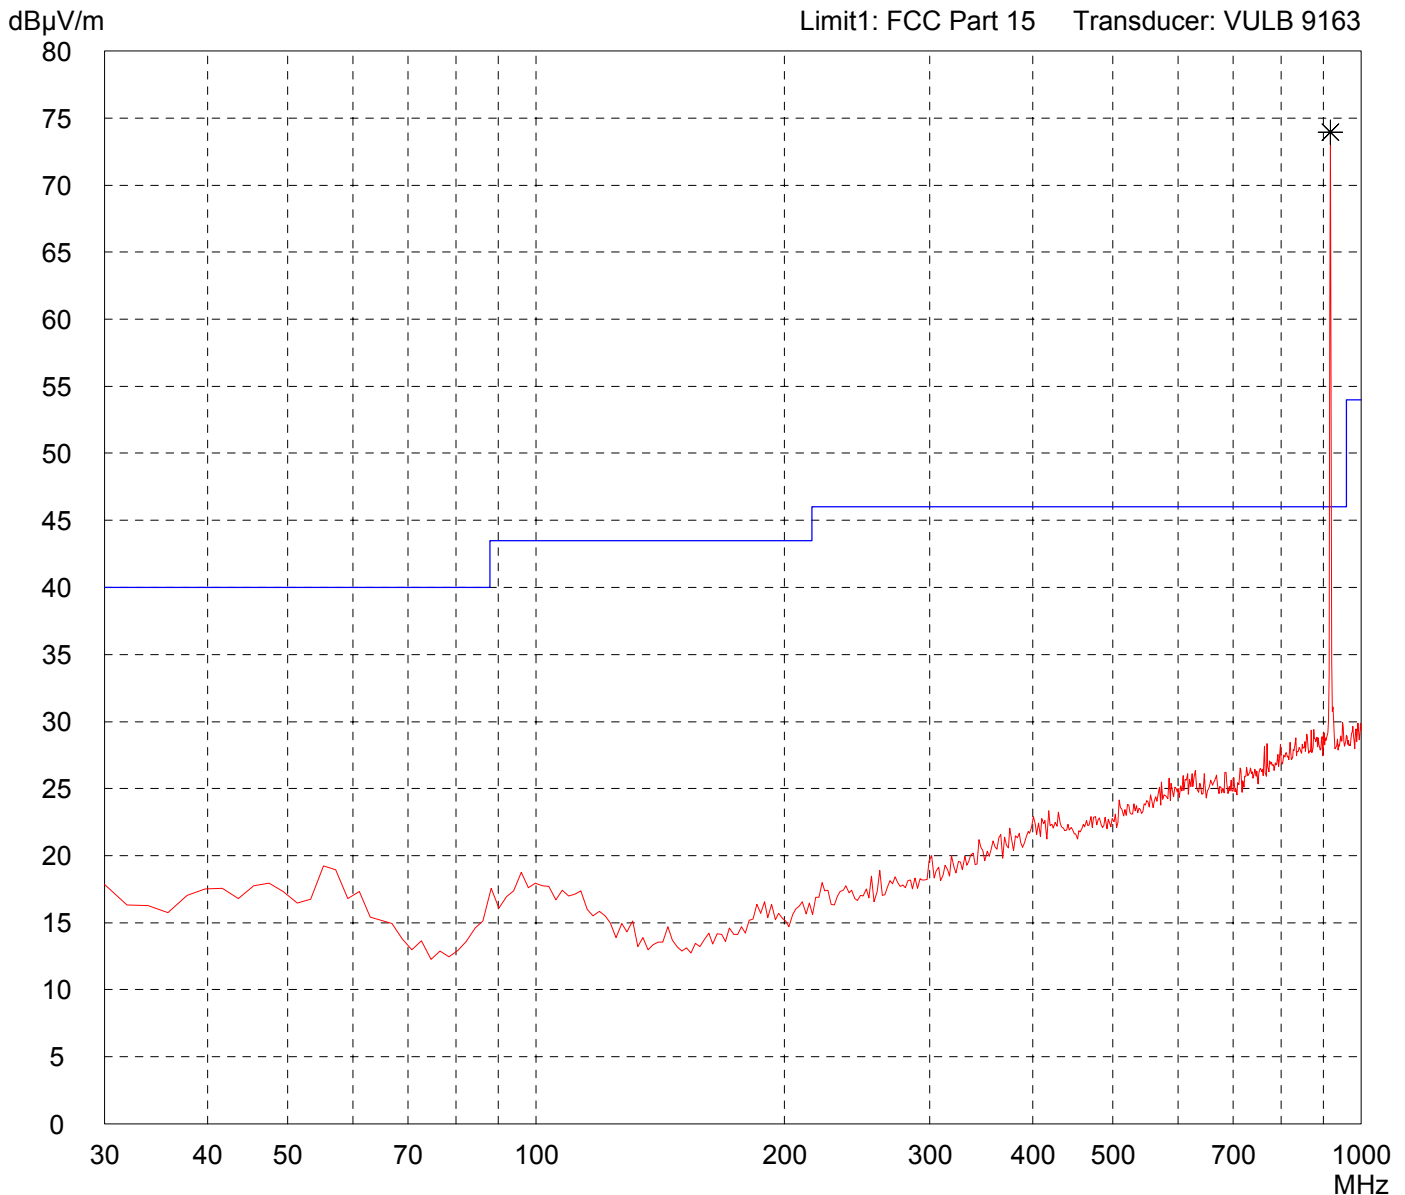

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT flat on table
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

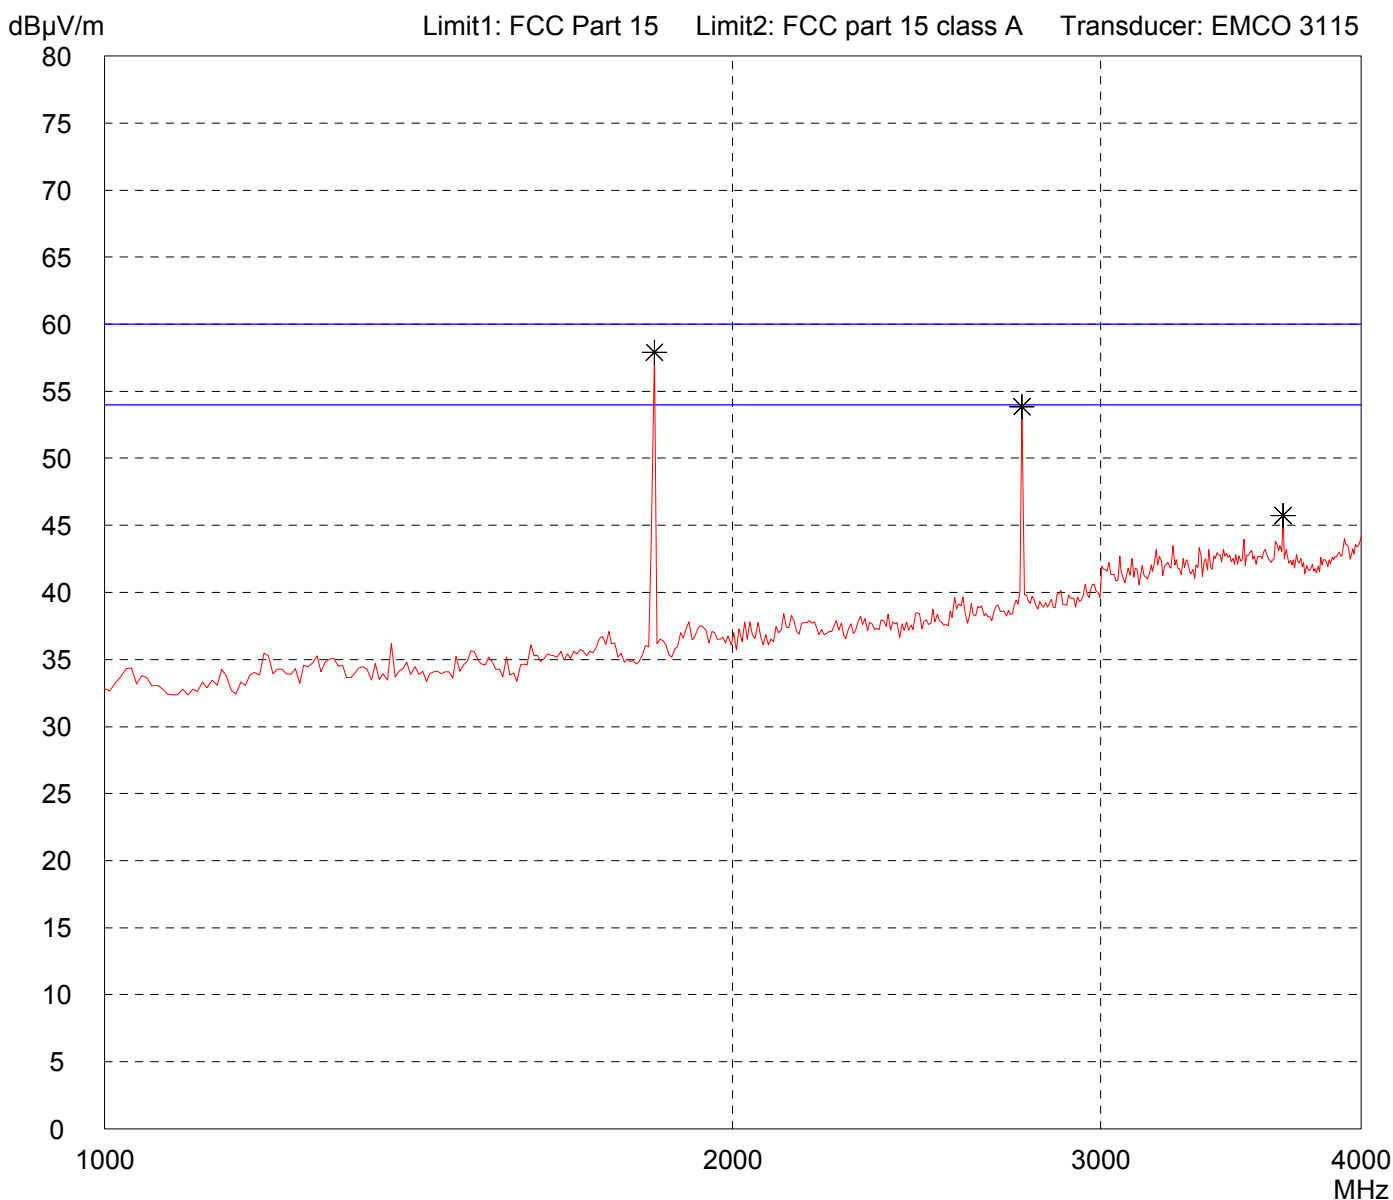

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT flat on table
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

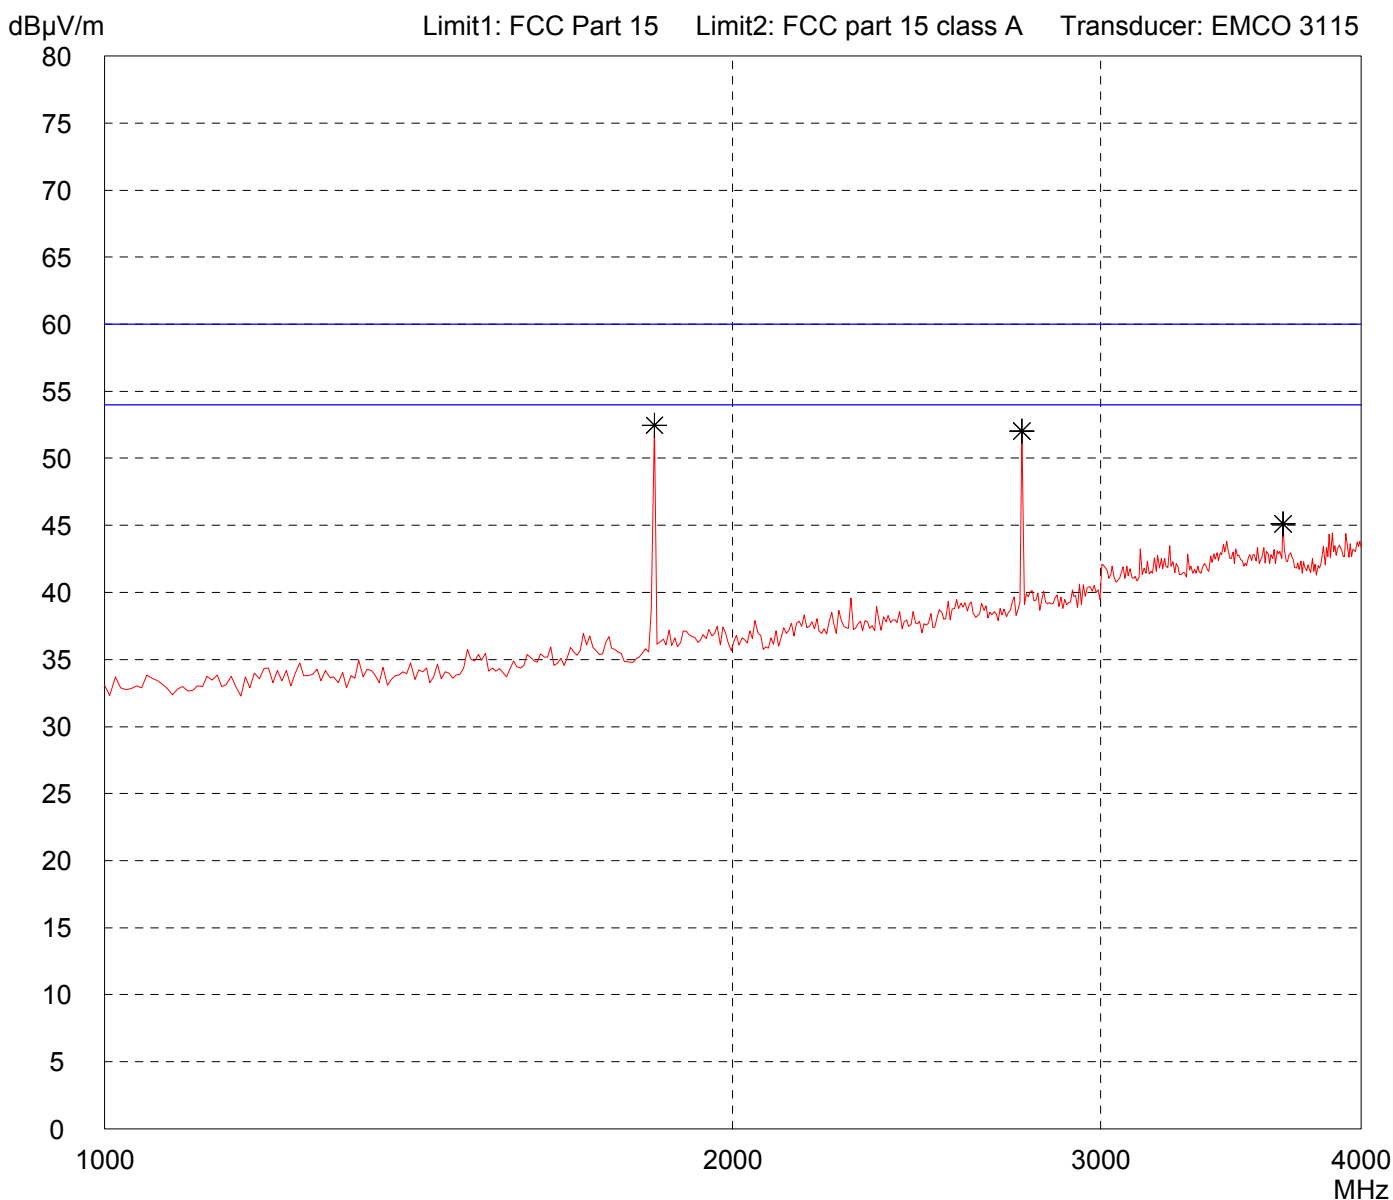

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT flat on table
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

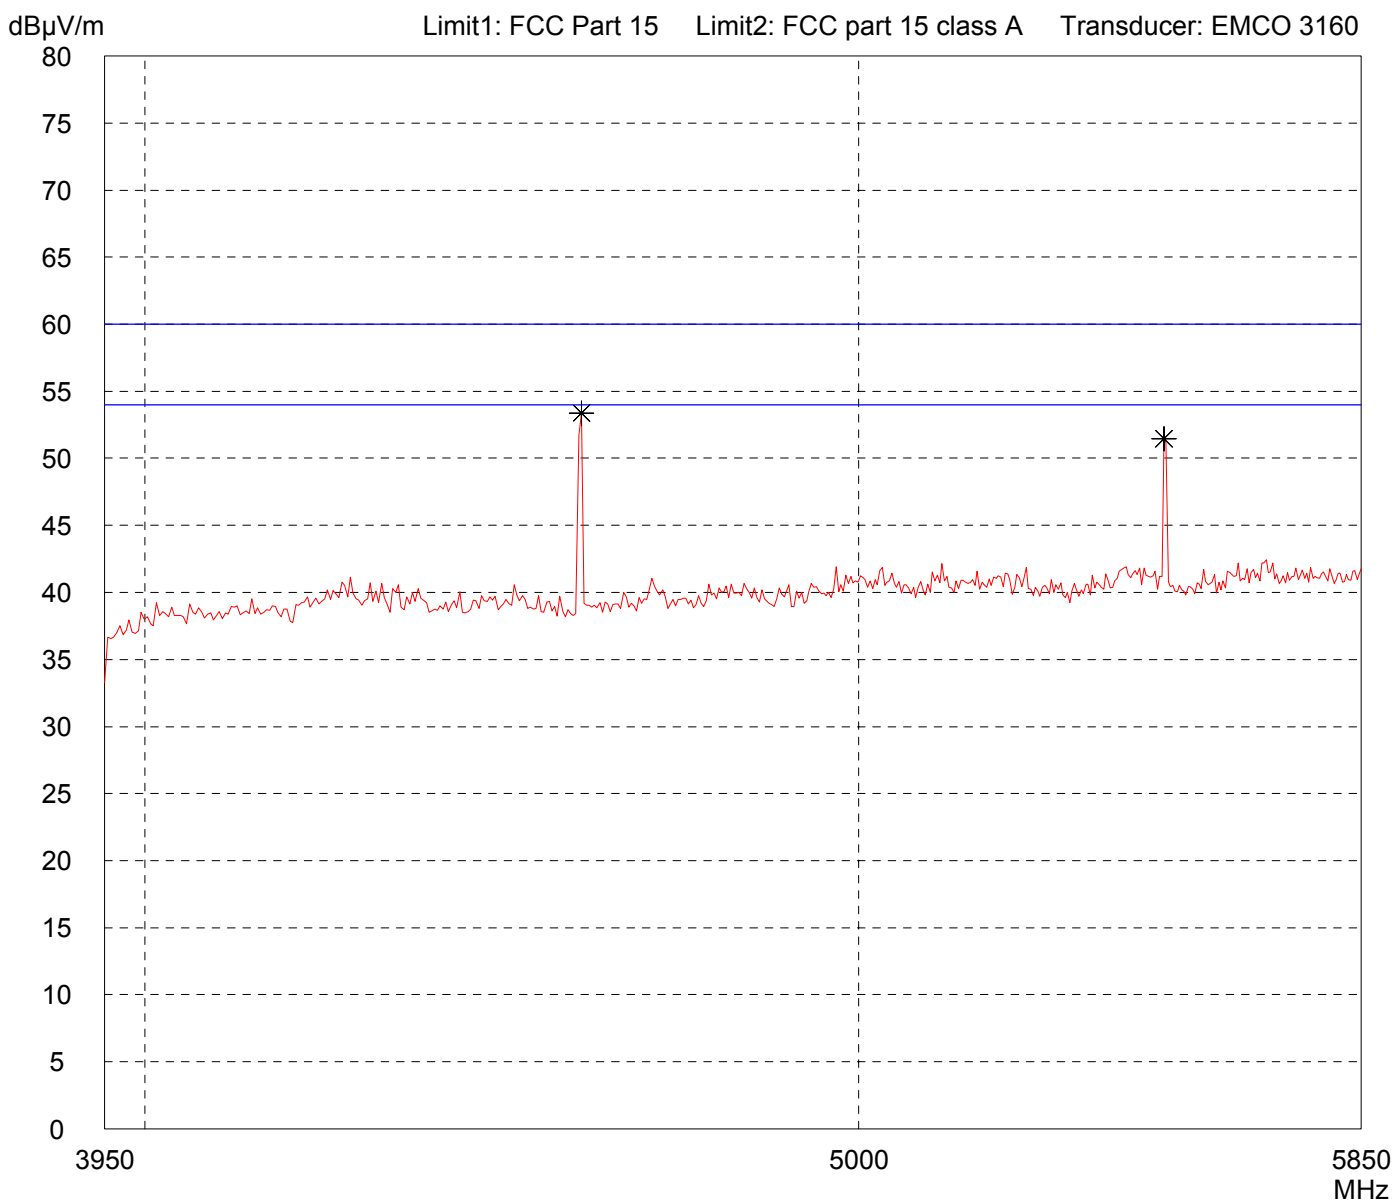

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------




# Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT flat on table
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

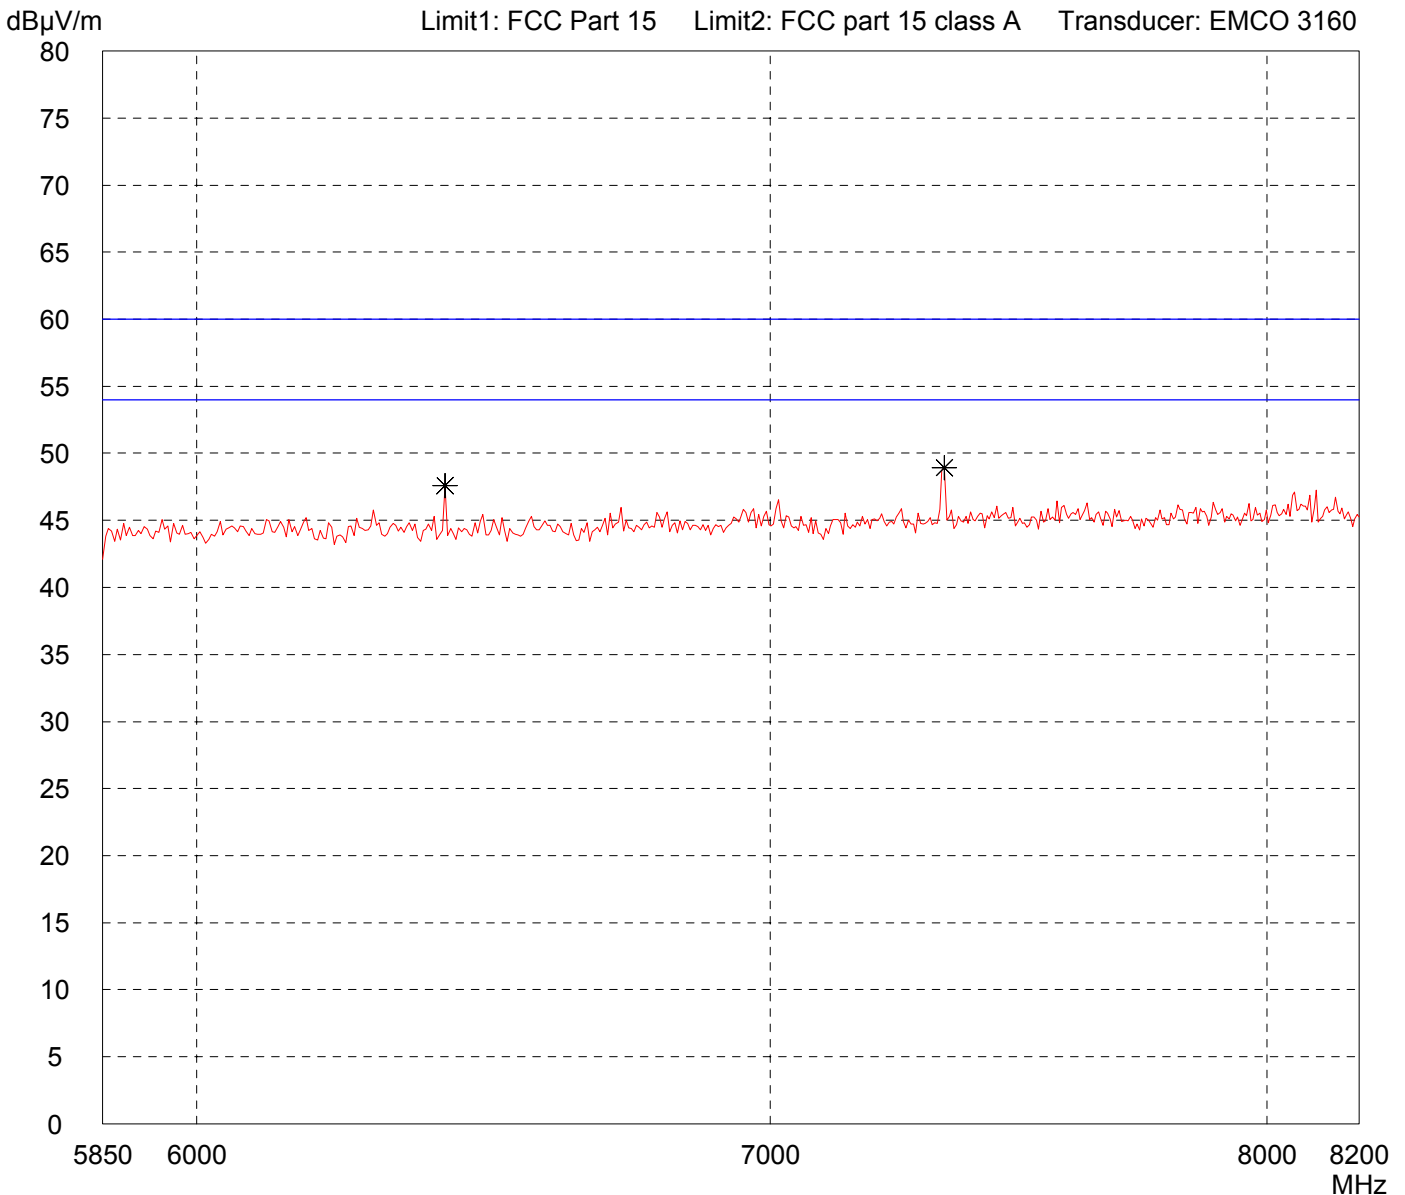

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------




# Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT flat on table
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

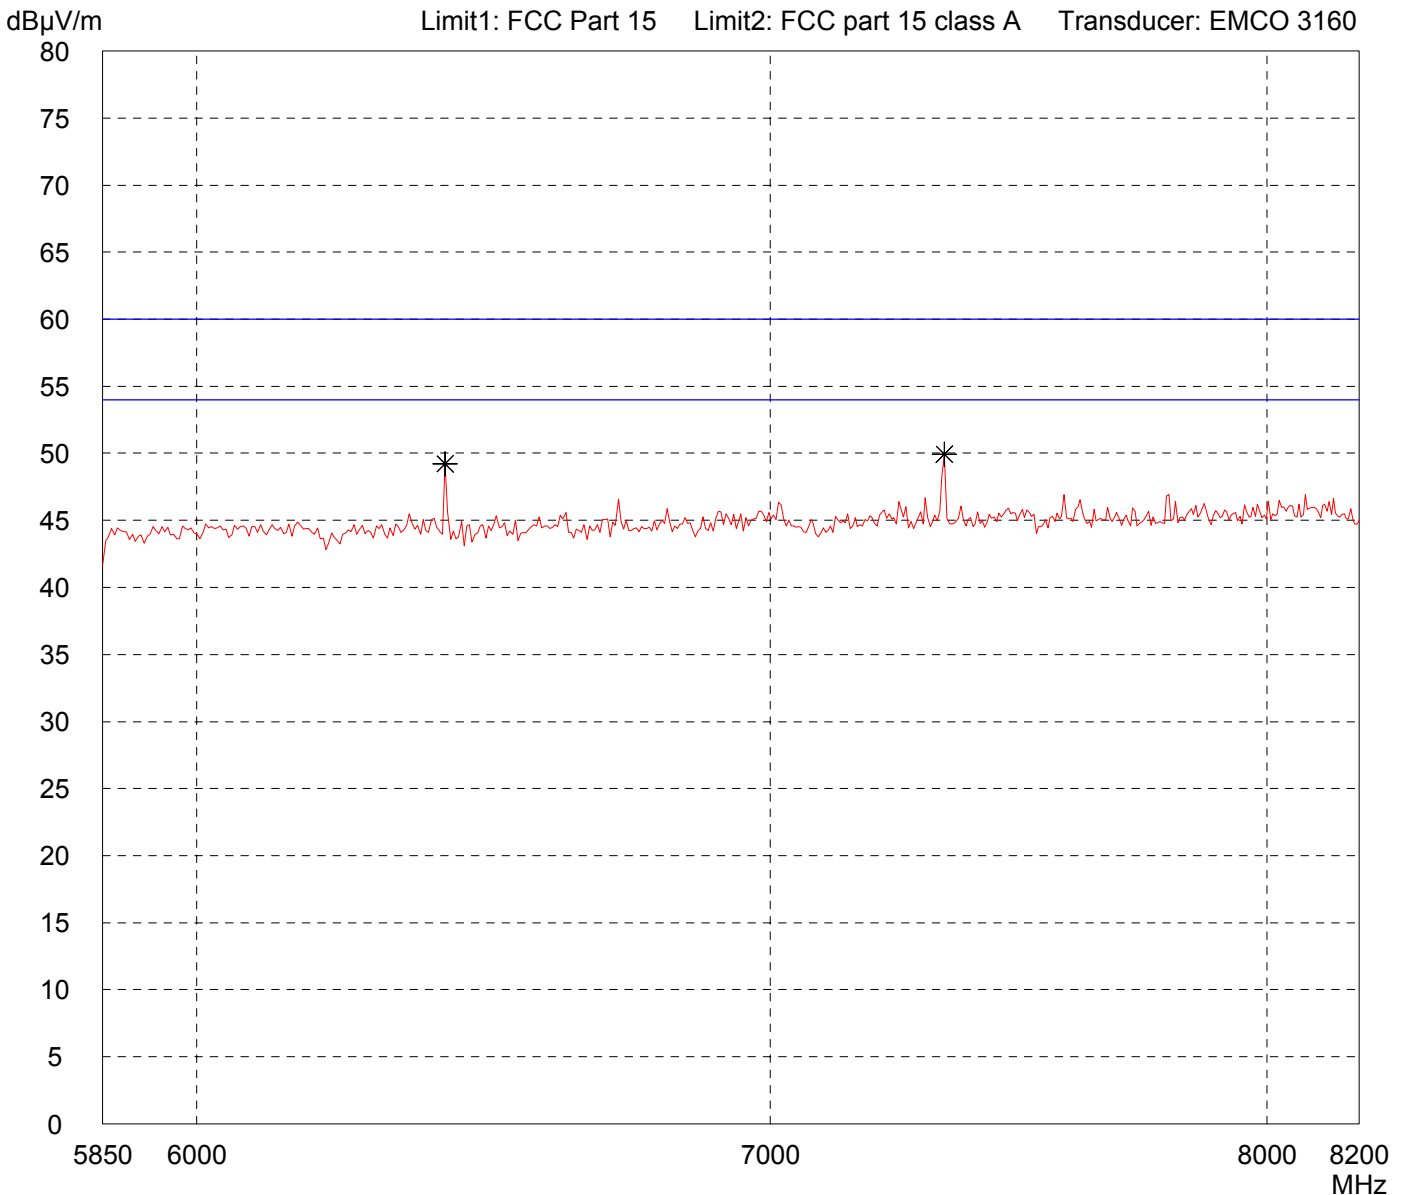

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT flat on table	
--	--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

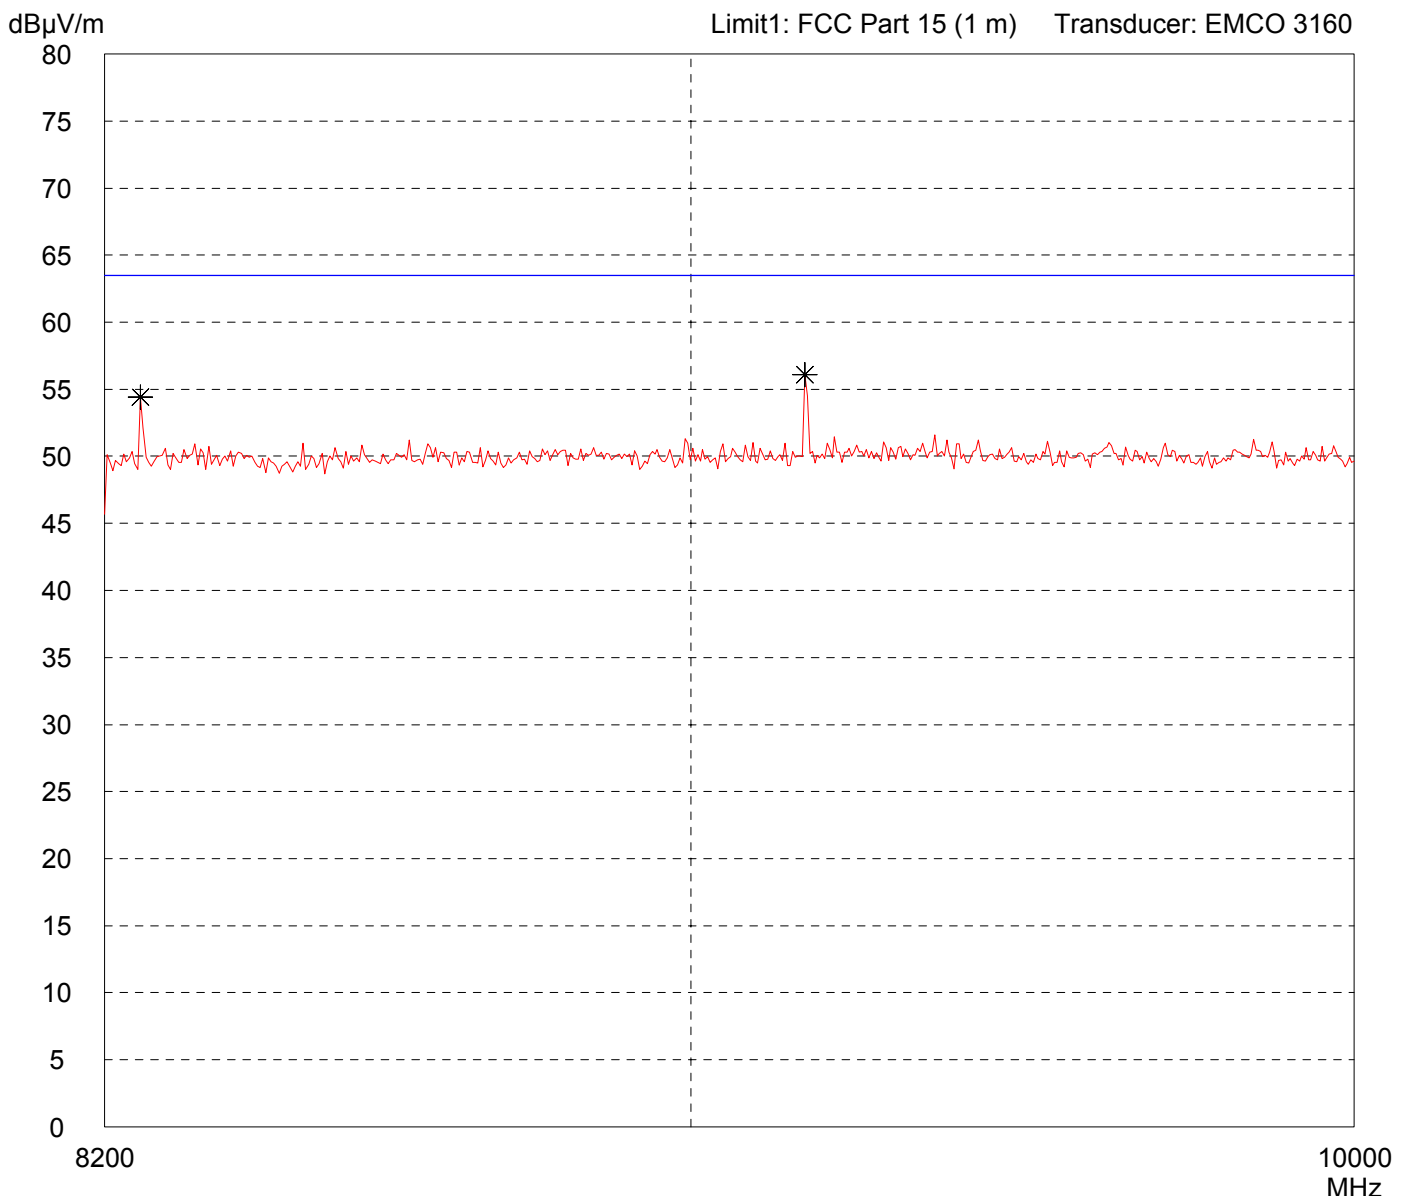

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT flat on table	
--	--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

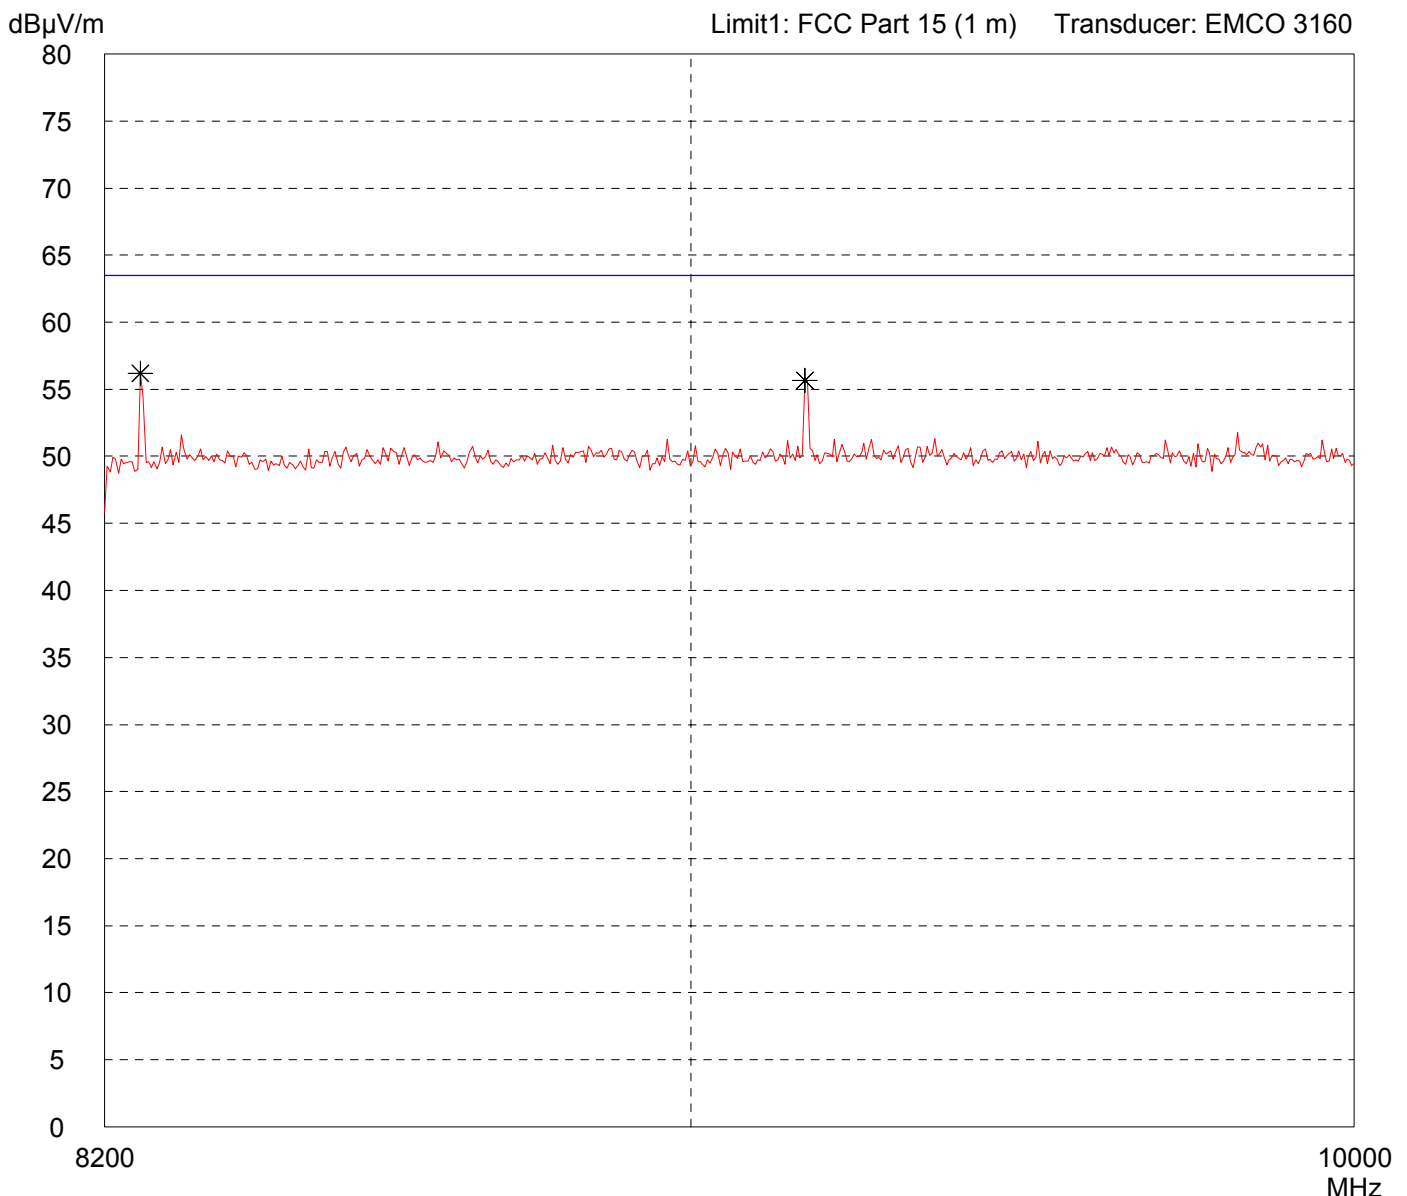

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT on right side
--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

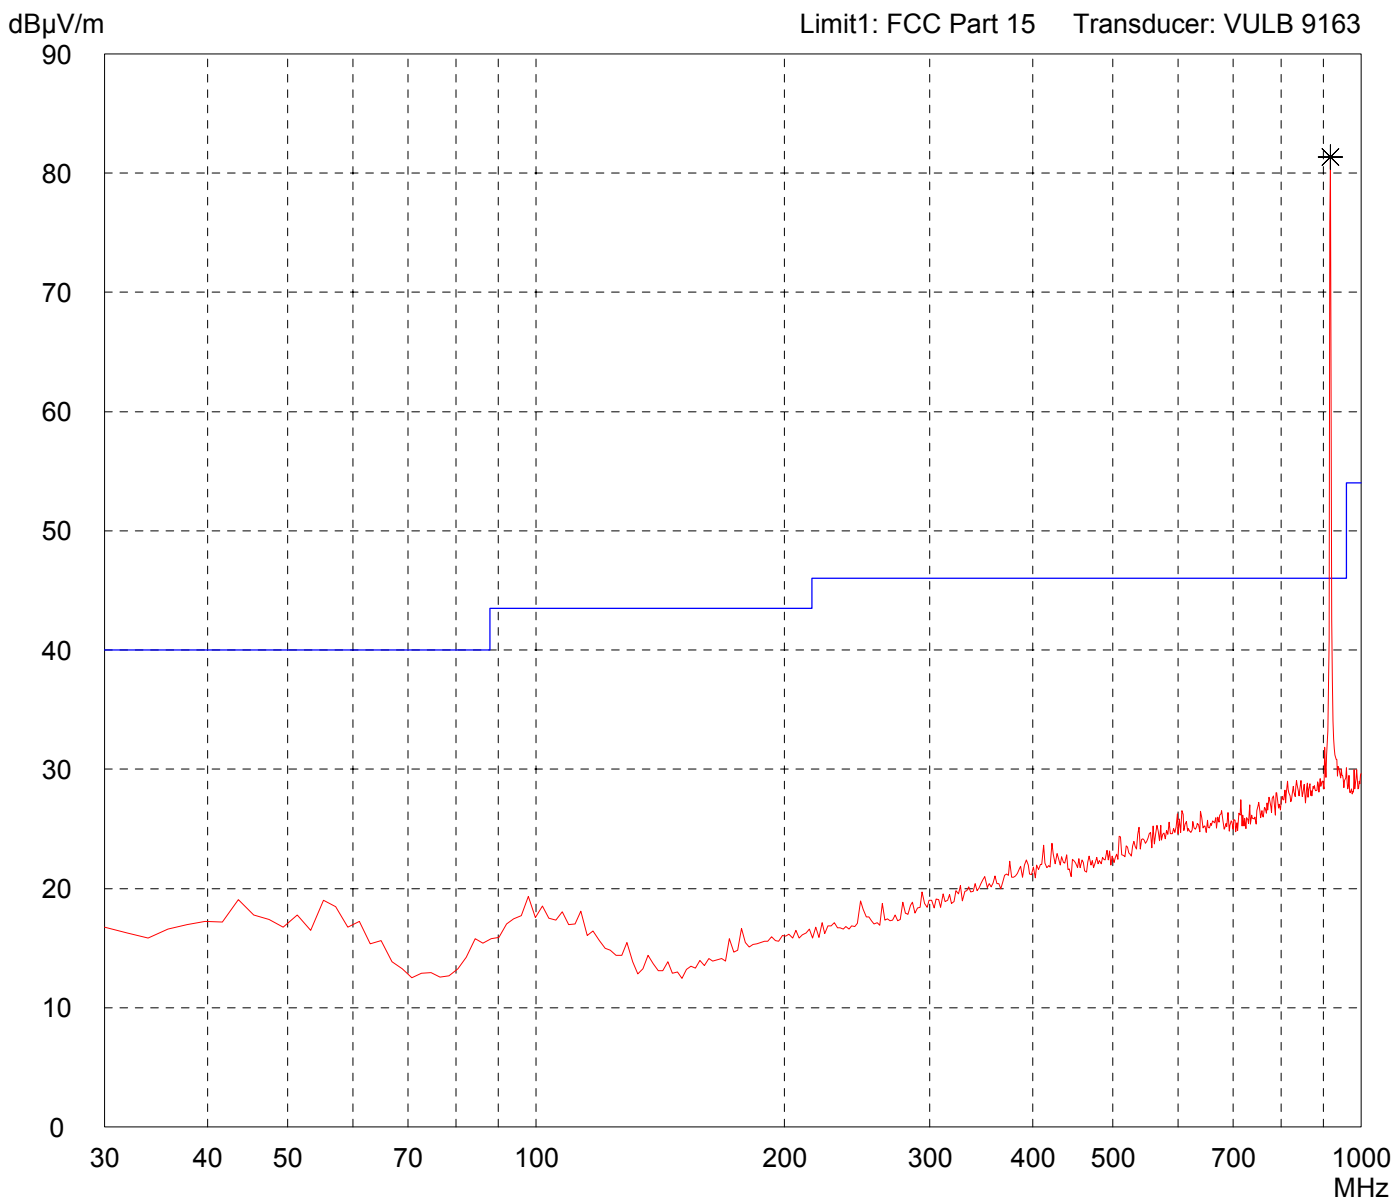

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT on right side
--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

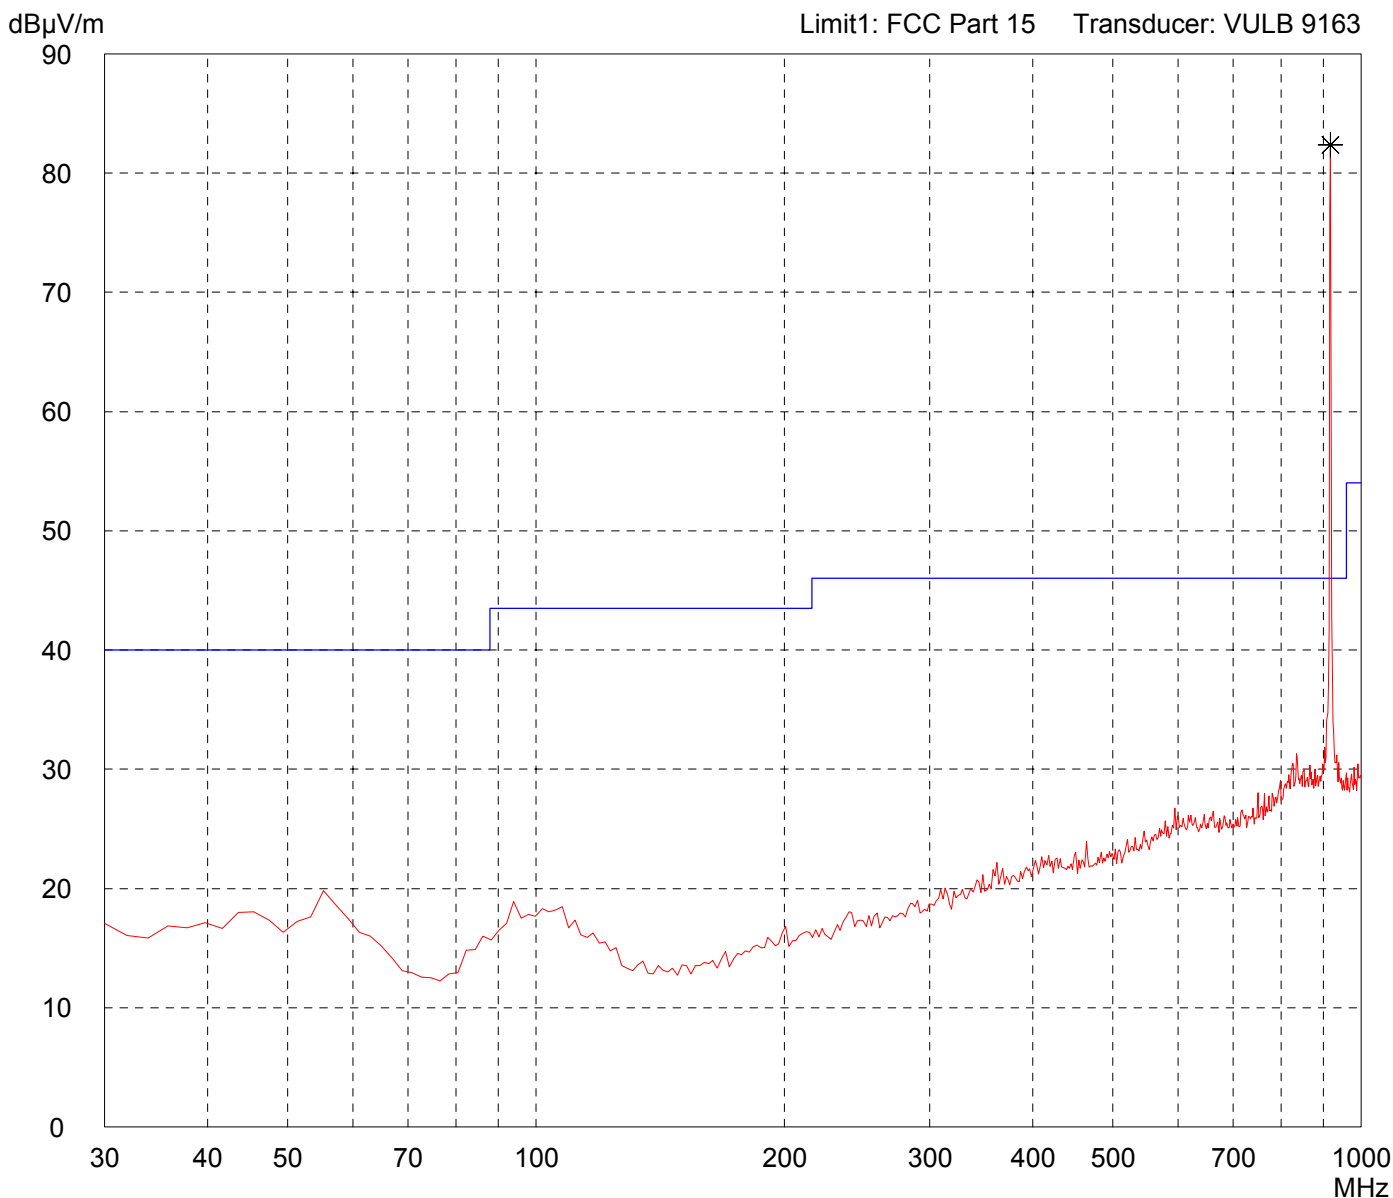

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT on right side
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

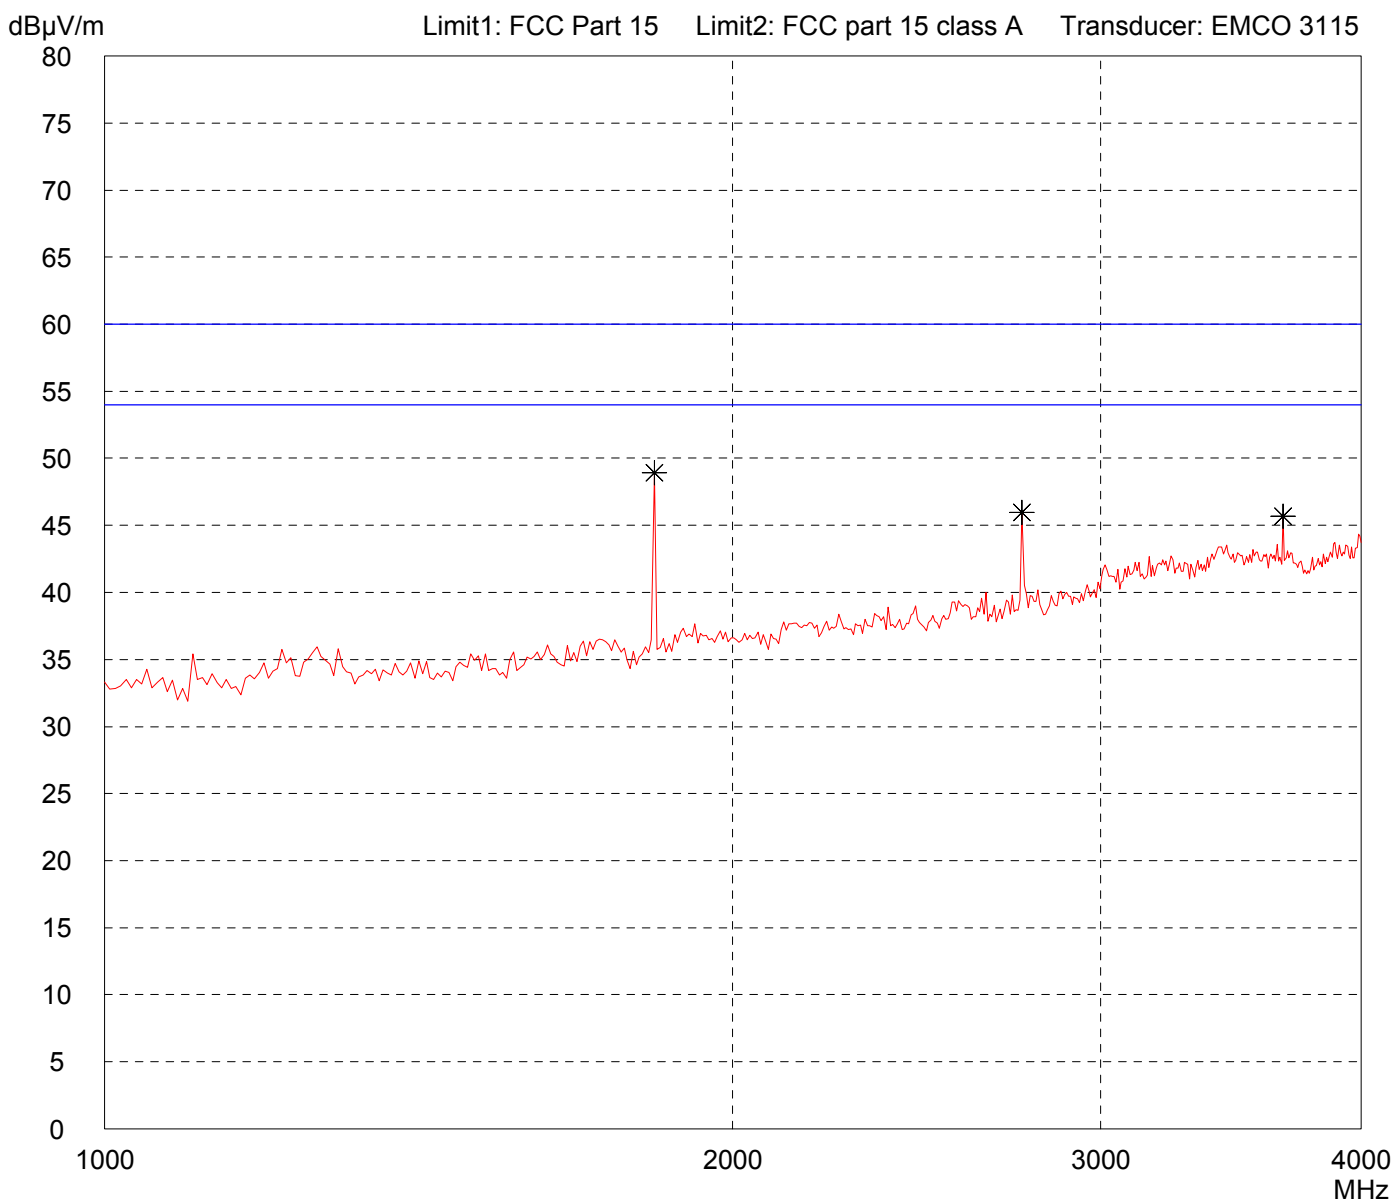

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------








# Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT on right side
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

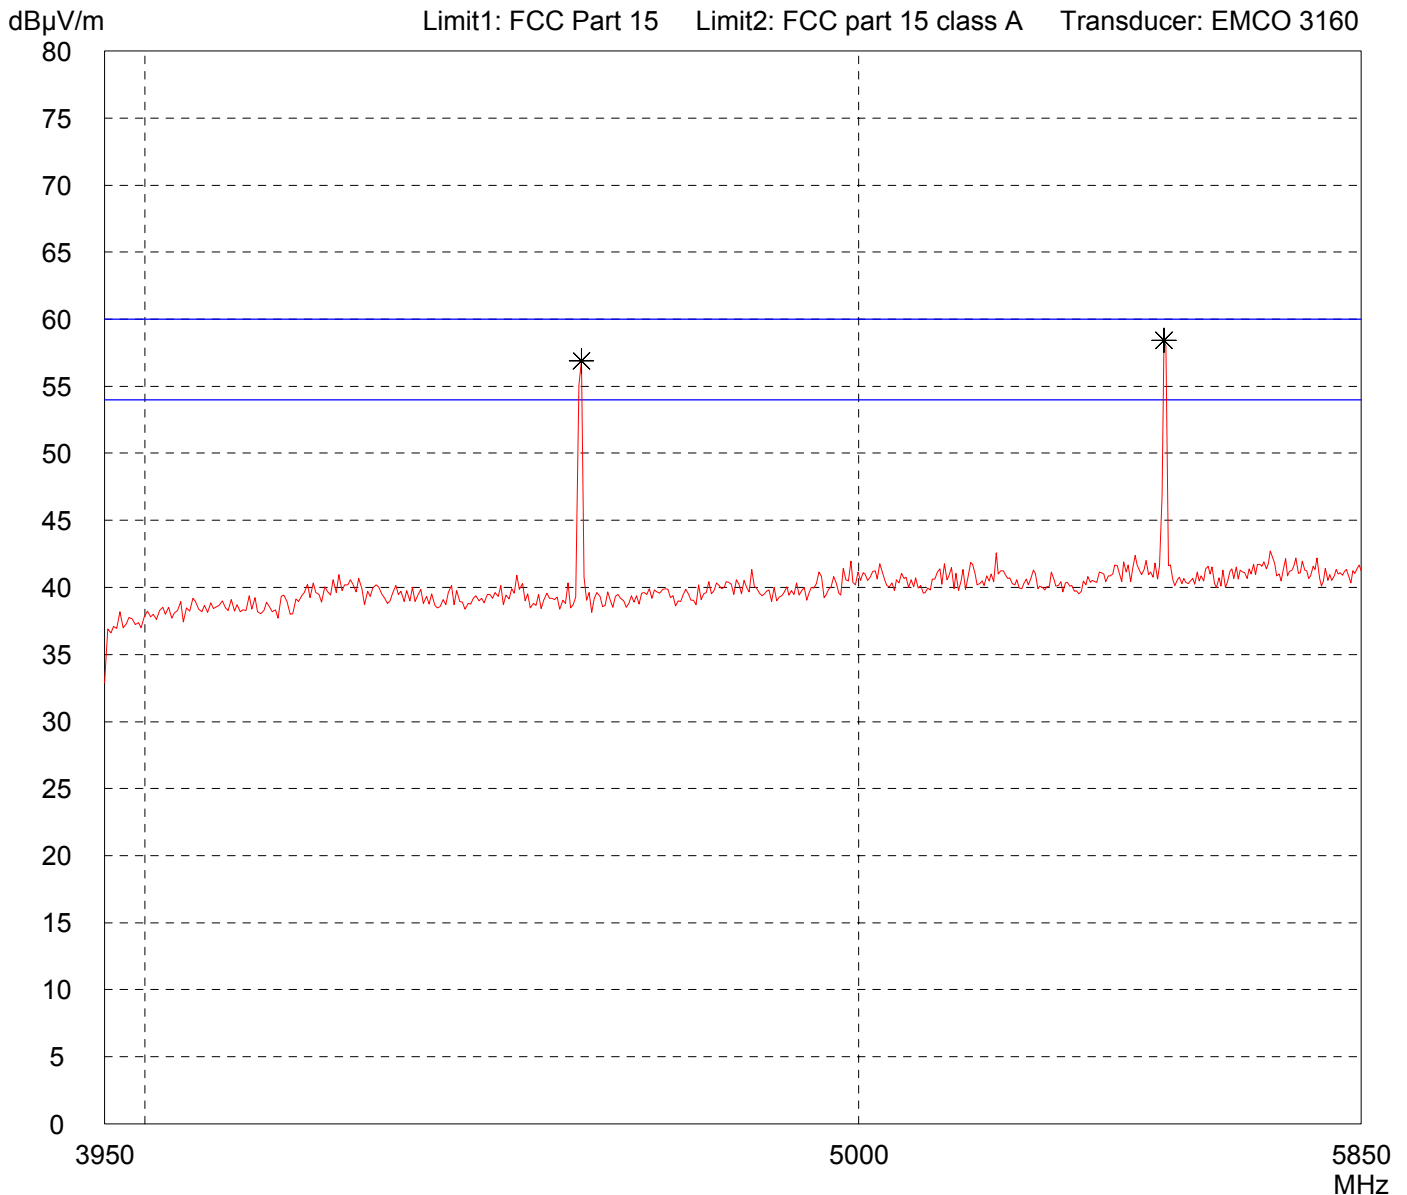

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


**Radiated Emission Test 5.85 GHz - 8.2 GHz**  
**acc. to FCC Part 15 (EMCO 3160)**

Model: <b>Keypad Compact 916,5 MHz ASK</b>	
Serial no.: <b>3</b>	
Applicant: <b>Eldat GmbH</b>	
Test site: <b>Fully anechoic room, cabin no. 2</b>	
Tested on: <b>Test distance 3 metres</b> <b>Horizontal Polarization</b>	
Date of test: <b>07/19/2006</b>	Operator: <b>M. Steindl</b>
Test performed: <b>automatically</b>	File name: <b>default.emi</b>

Comment: - battery supply - transmitting continuously - EUT on right side
--

Detector: <b>Peak</b>
--------------------------

List of values: <b>Selected by hand</b>
--

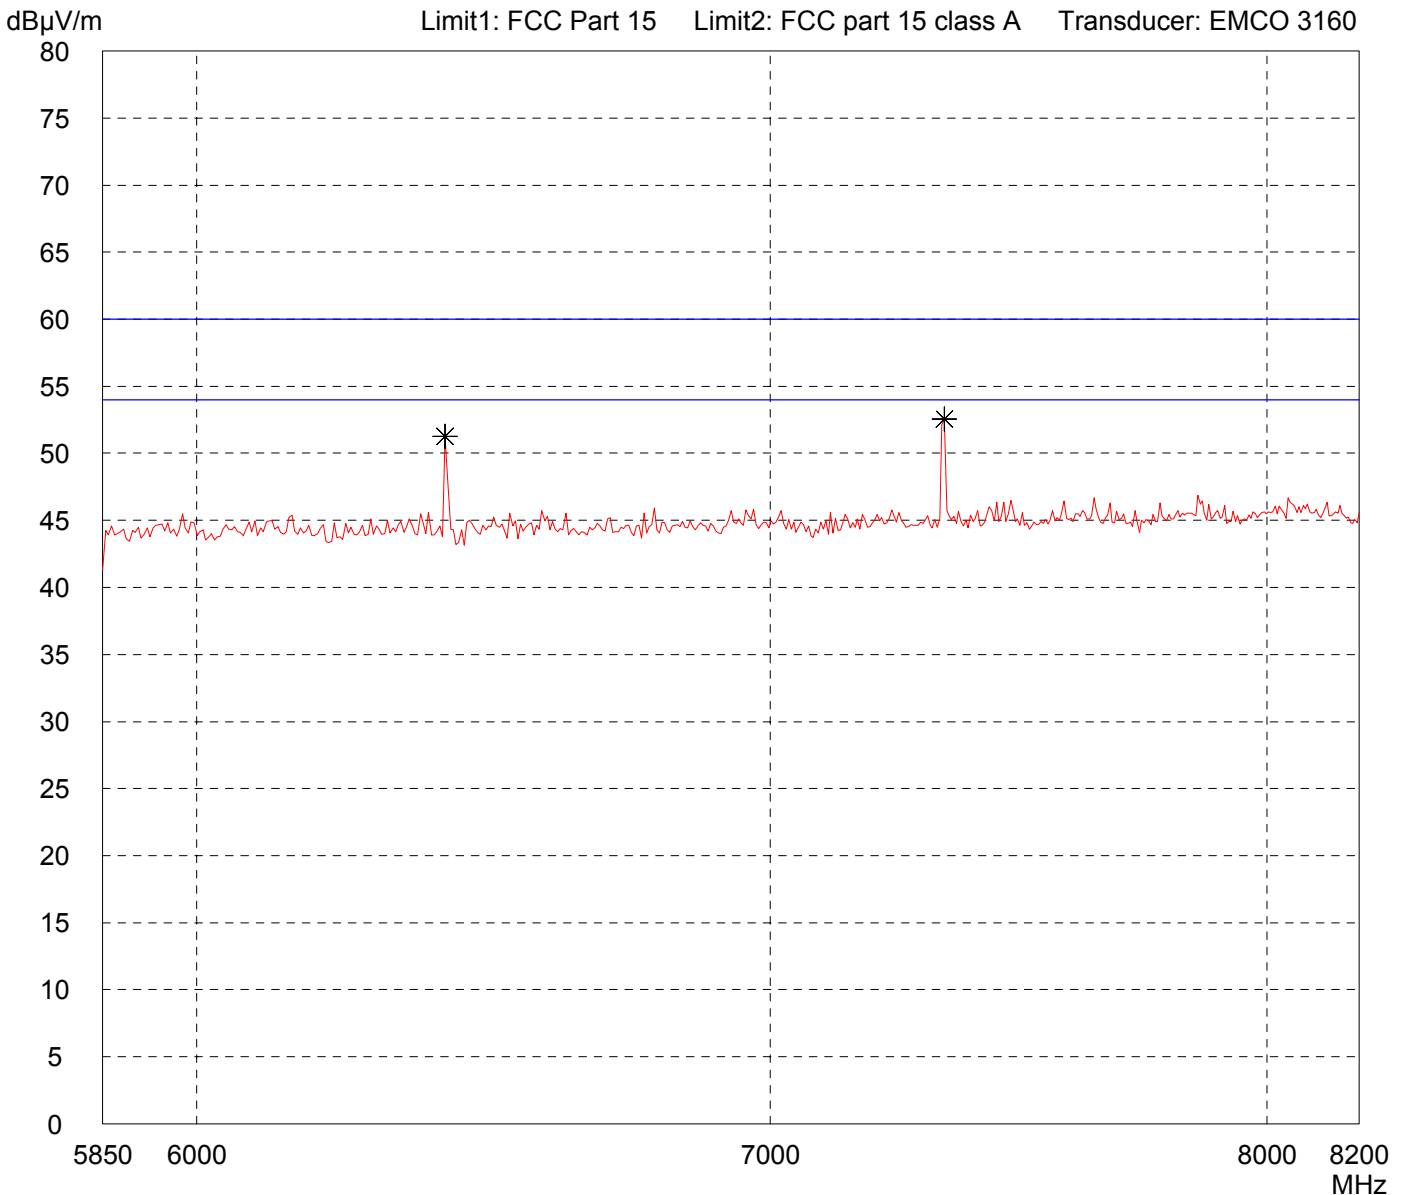


Result: <b>Prescan</b>
---------------------------

Project file: <b>50530-60598</b>
-------------------------------------

# Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

<p>Model: <b>Keypad Compact 916,5 MHz ASK</b></p> <p>Serial no.: <b>3</b></p> <p>Applicant: <b>Eldat GmbH</b></p> <p>Test site: <b>Fully anechoic room, cabin no. 2</b></p> <p>Tested on: <b>Test distance 3 metres Vertical Polarization</b></p> <p>Date of test: <b>07/19/2006</b></p> <p>Operator: <b>M. Steindl</b></p> <p>Test performed: <b>automatically</b></p> <p>File name: <b>default.emi</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- battery supply</li> <li>- transmitting continuously</li> <li>- EUT on right side</li> </ul>
<p>Detector: <b>Peak</b></p>	<p>List of values: <b>Selected by hand</b></p>

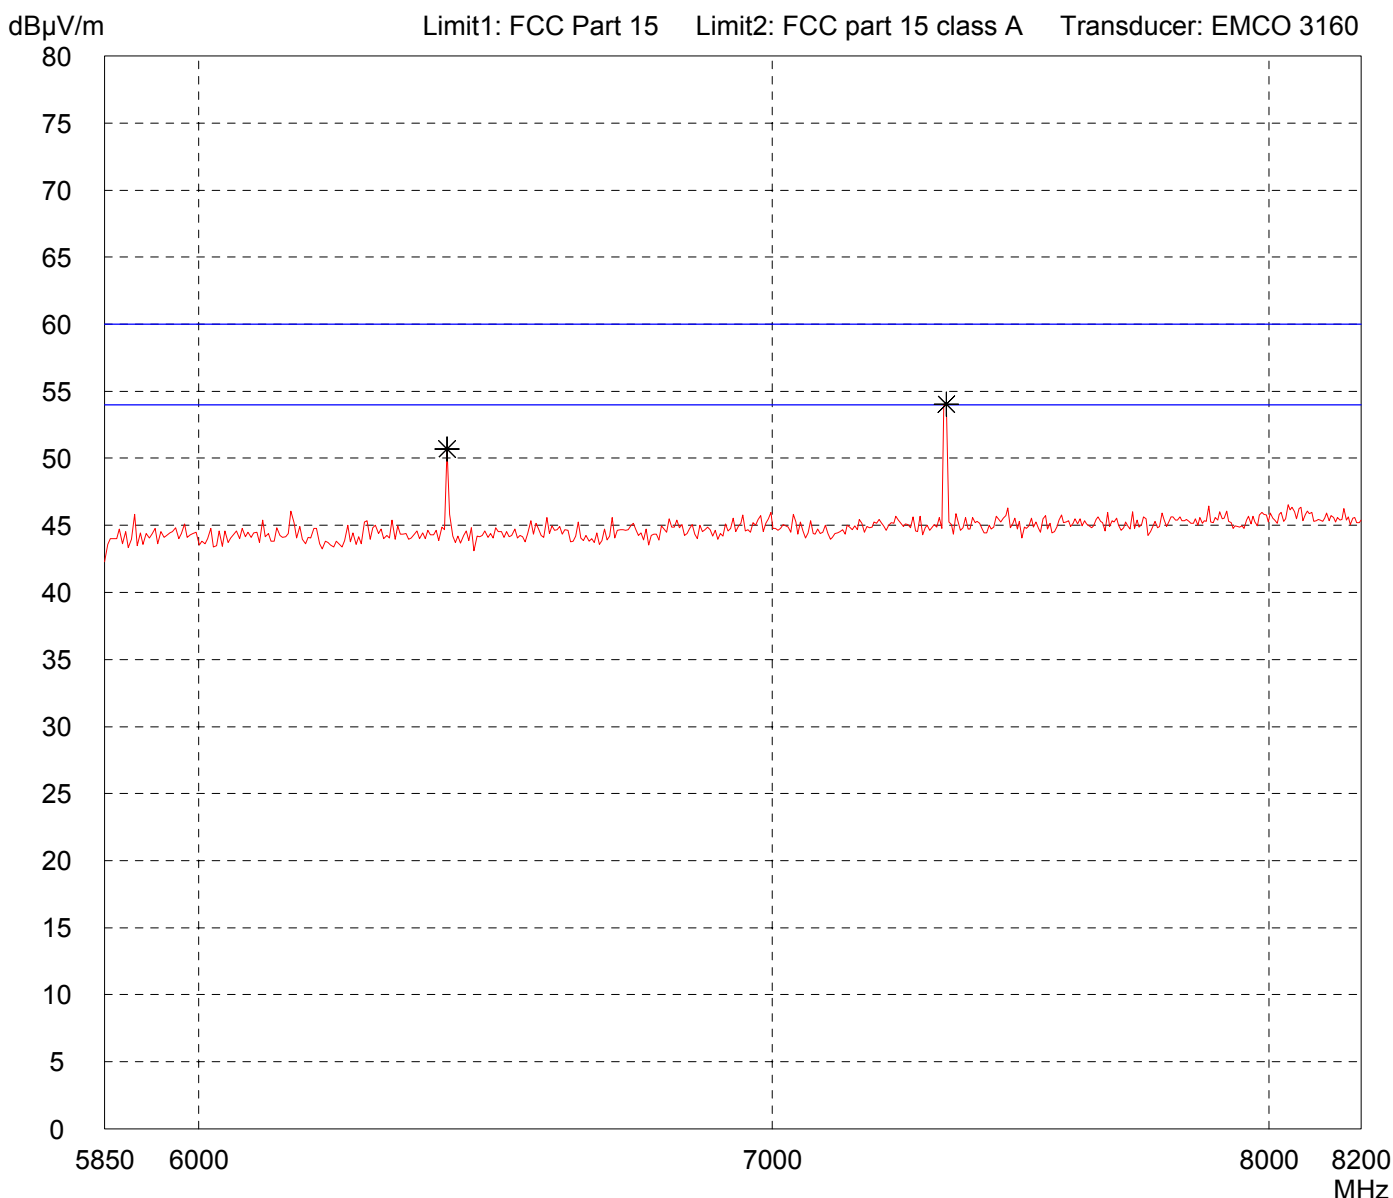

<p>Result: <b>Prescan</b></p>	<p>Project file: <b>50530-60598</b></p>
-----------------------------------	---


# Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT on right side	
--	--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

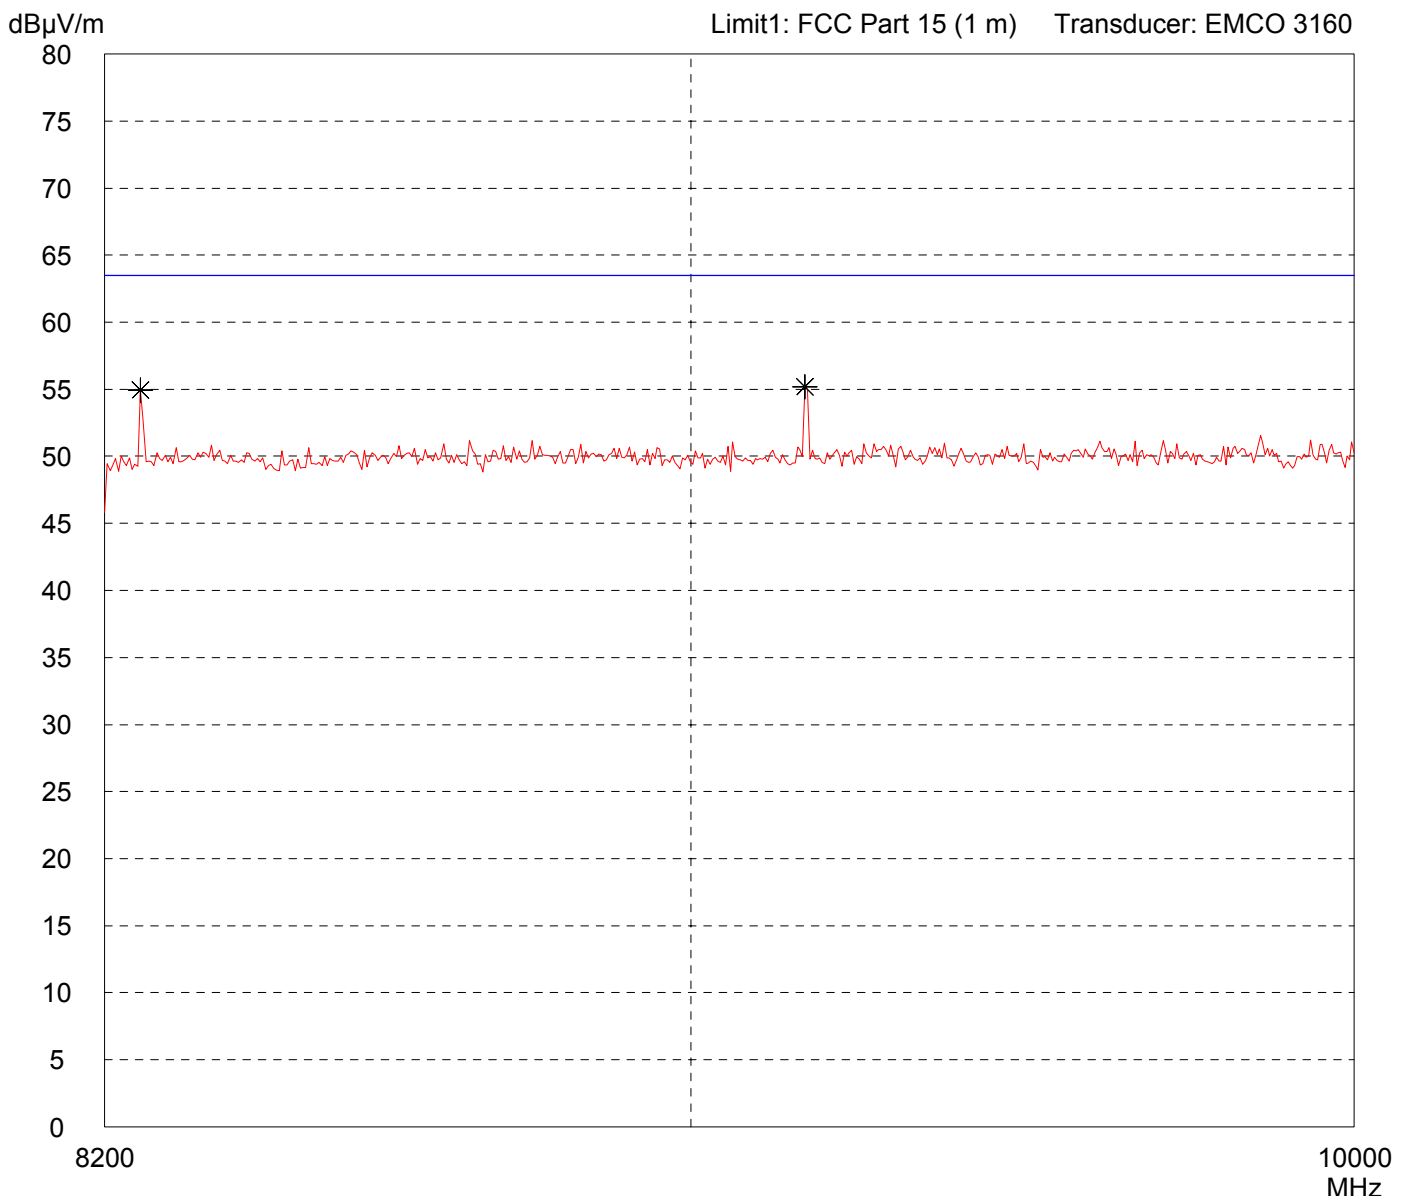

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT on right side	
--	--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

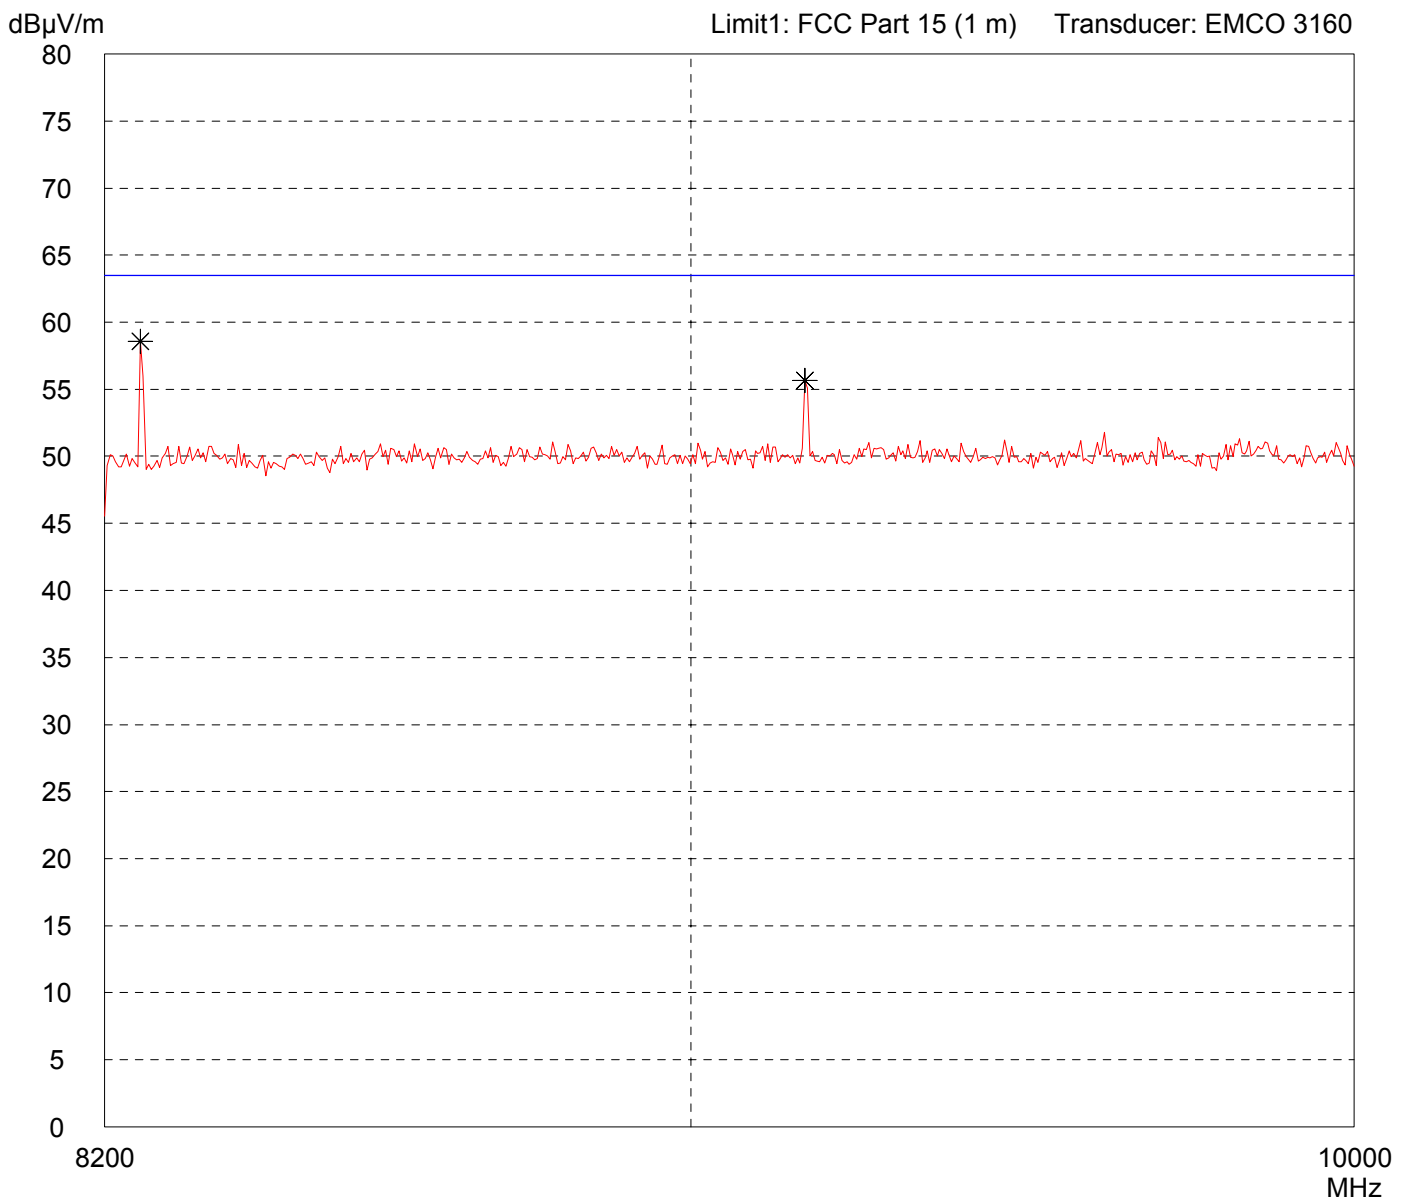

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT in upright position
--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

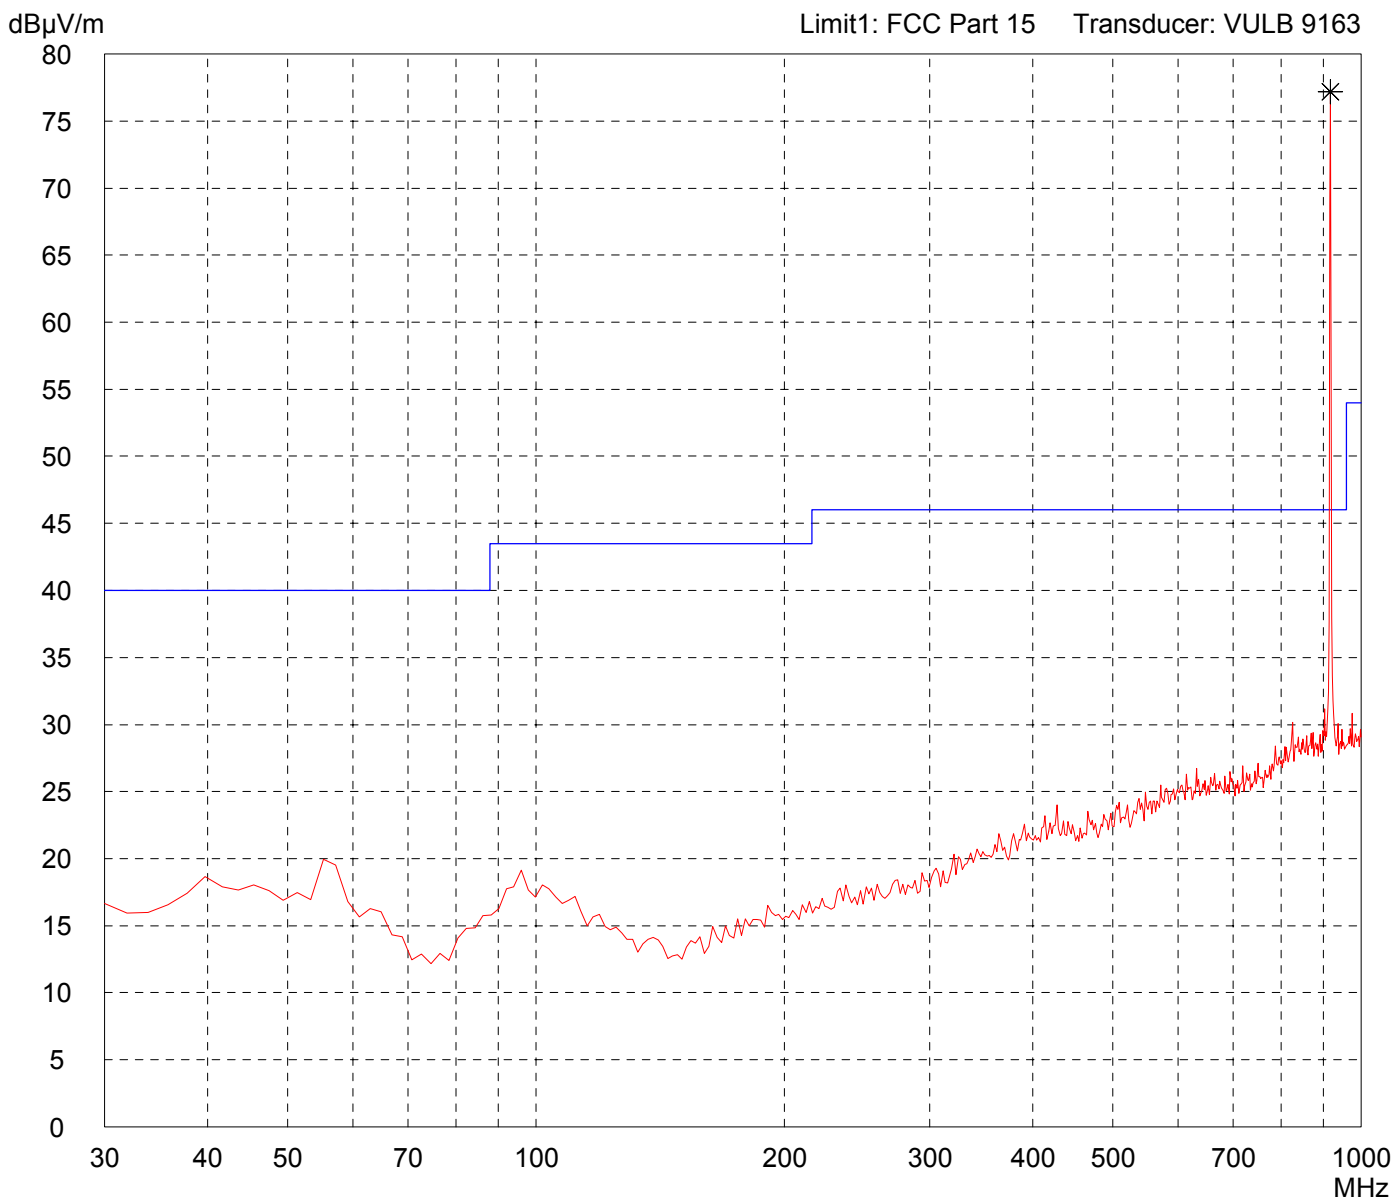

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT in upright position
--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

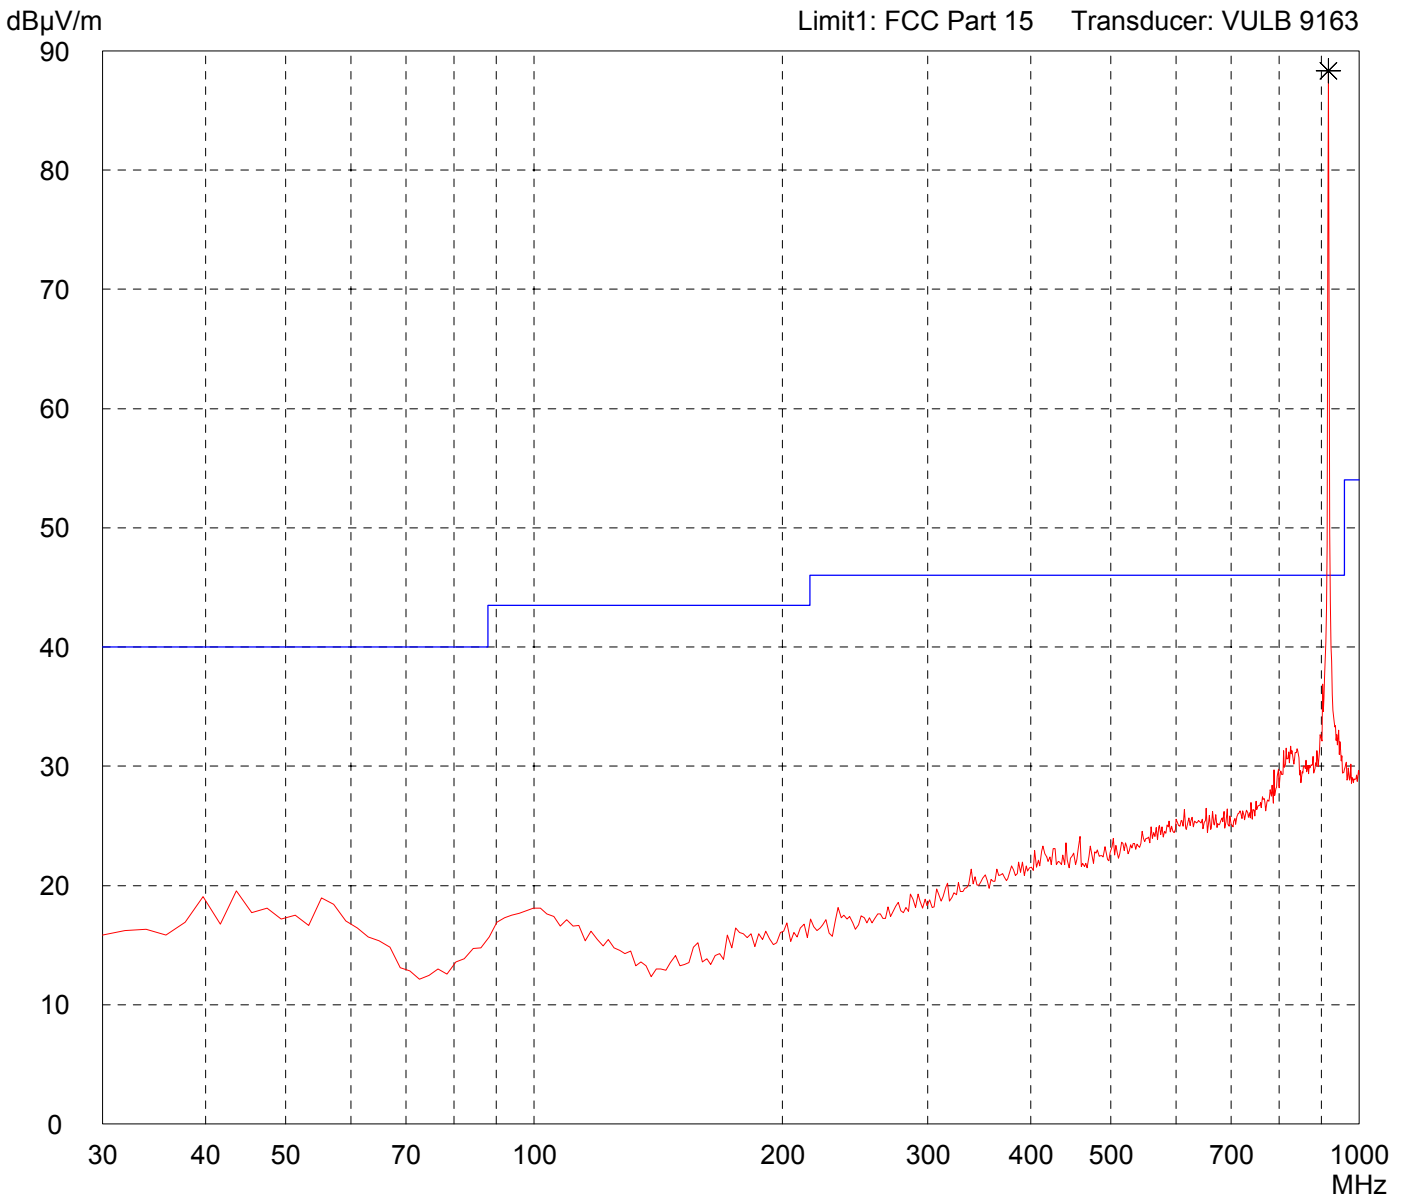

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT in upright position
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

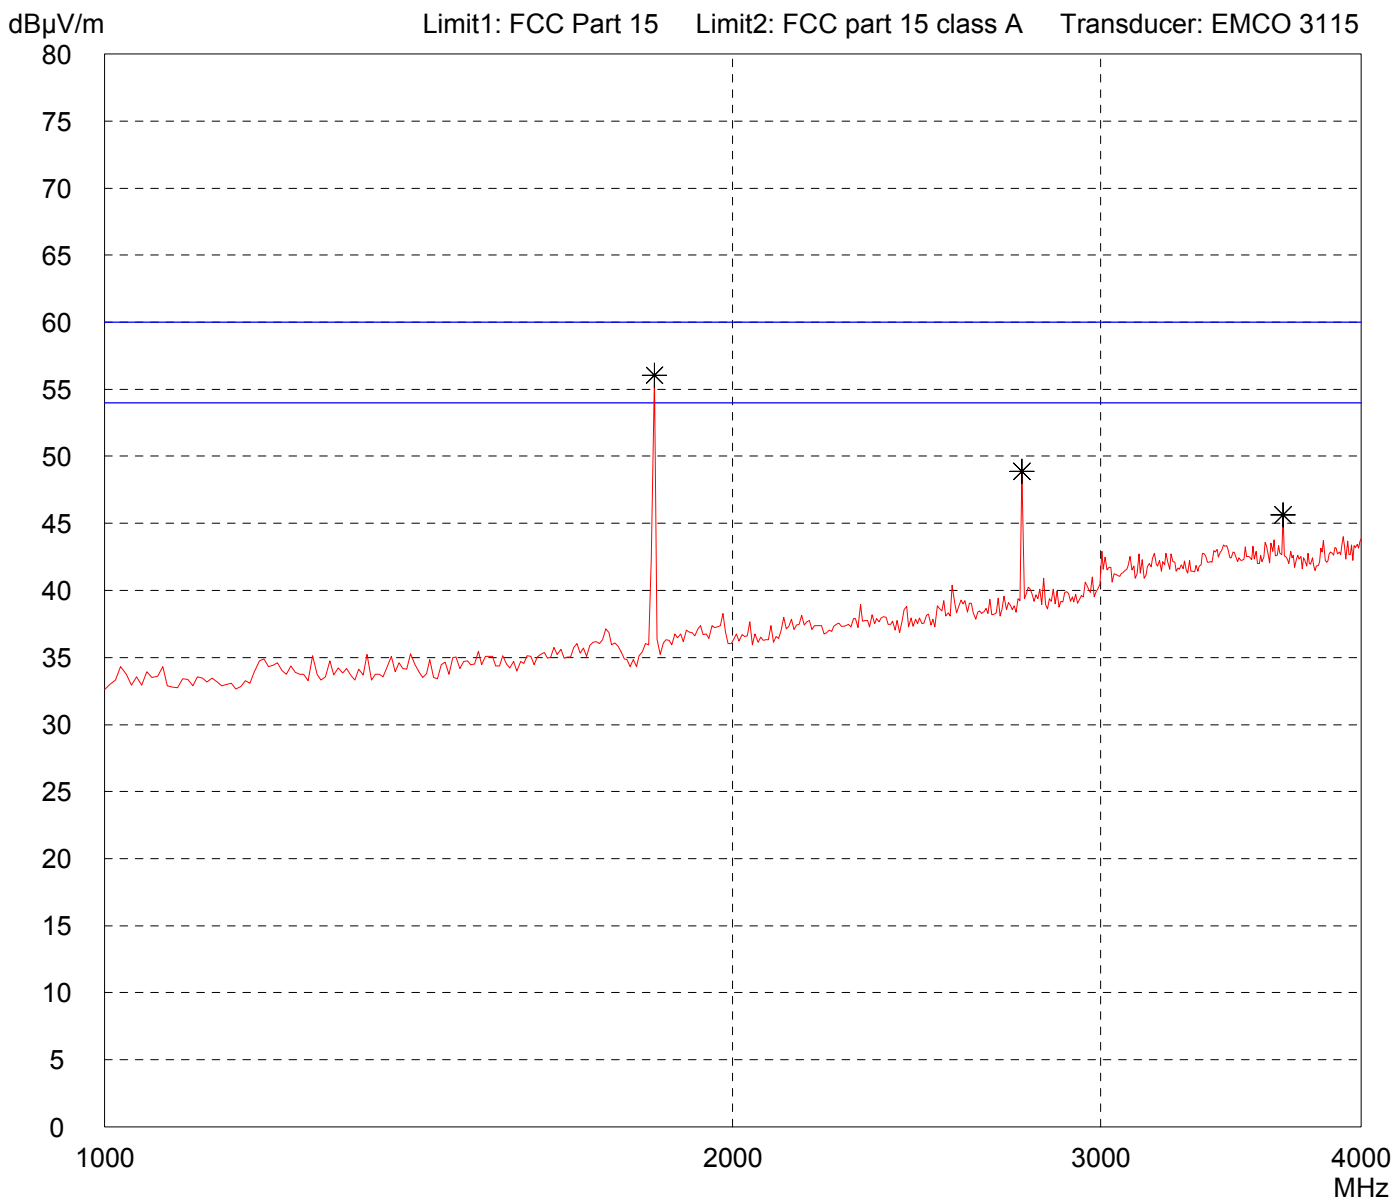

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------




# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT in upright position
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

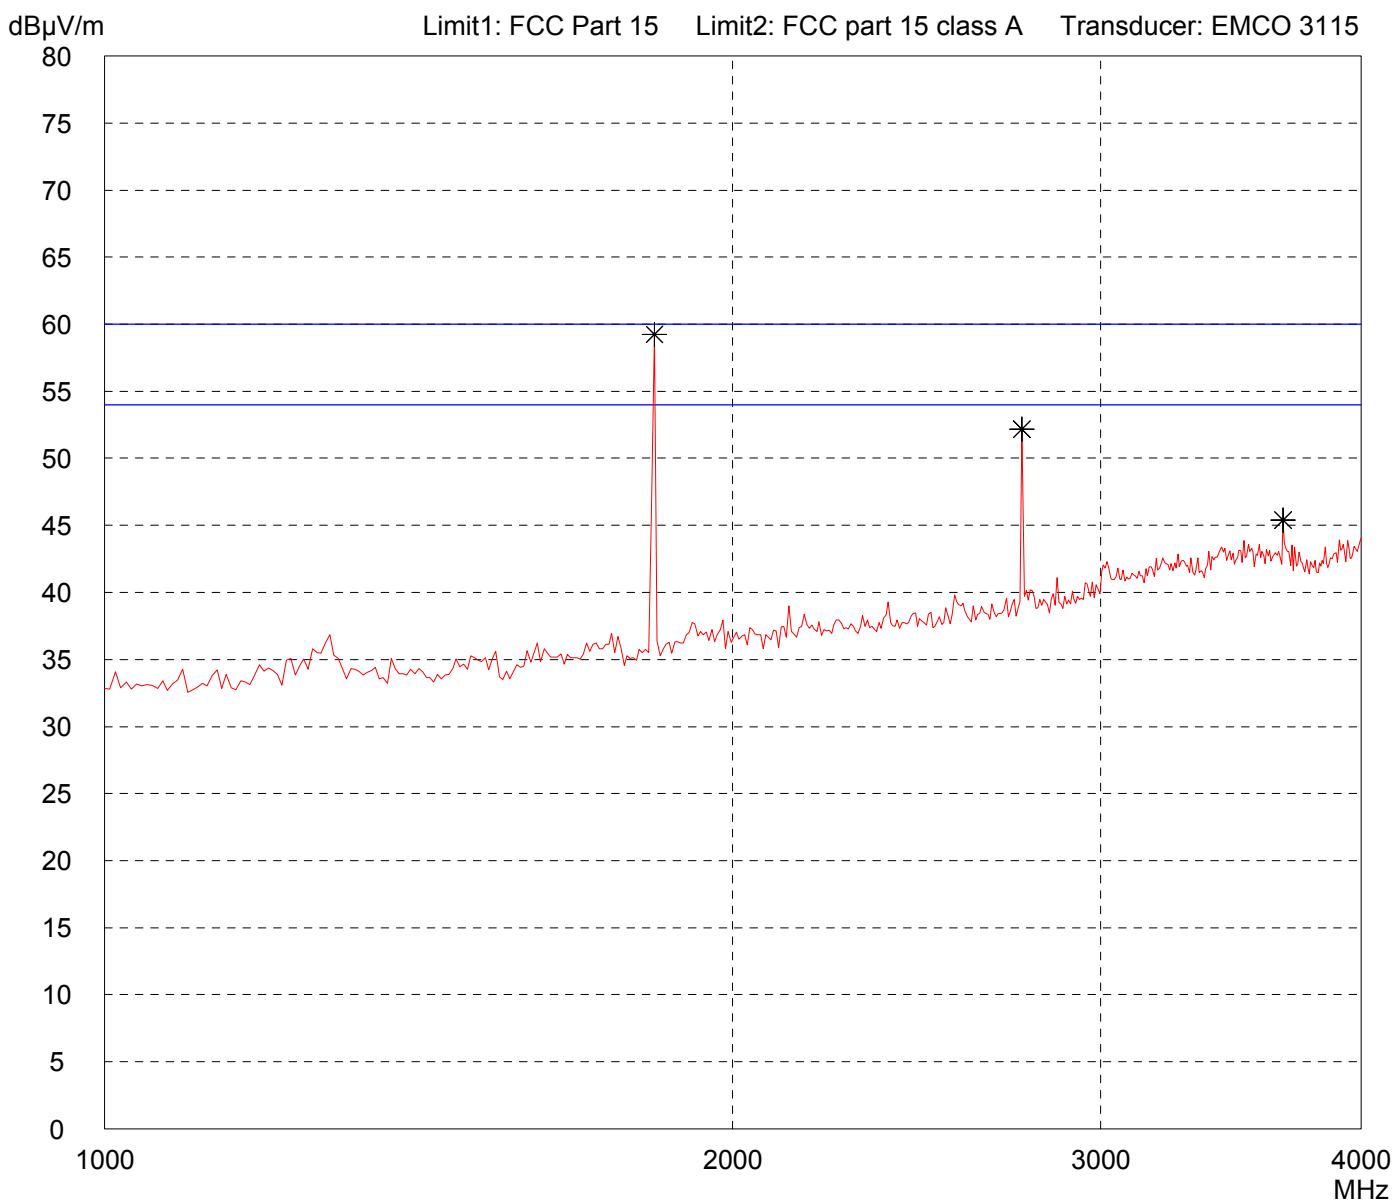

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT in upright position
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

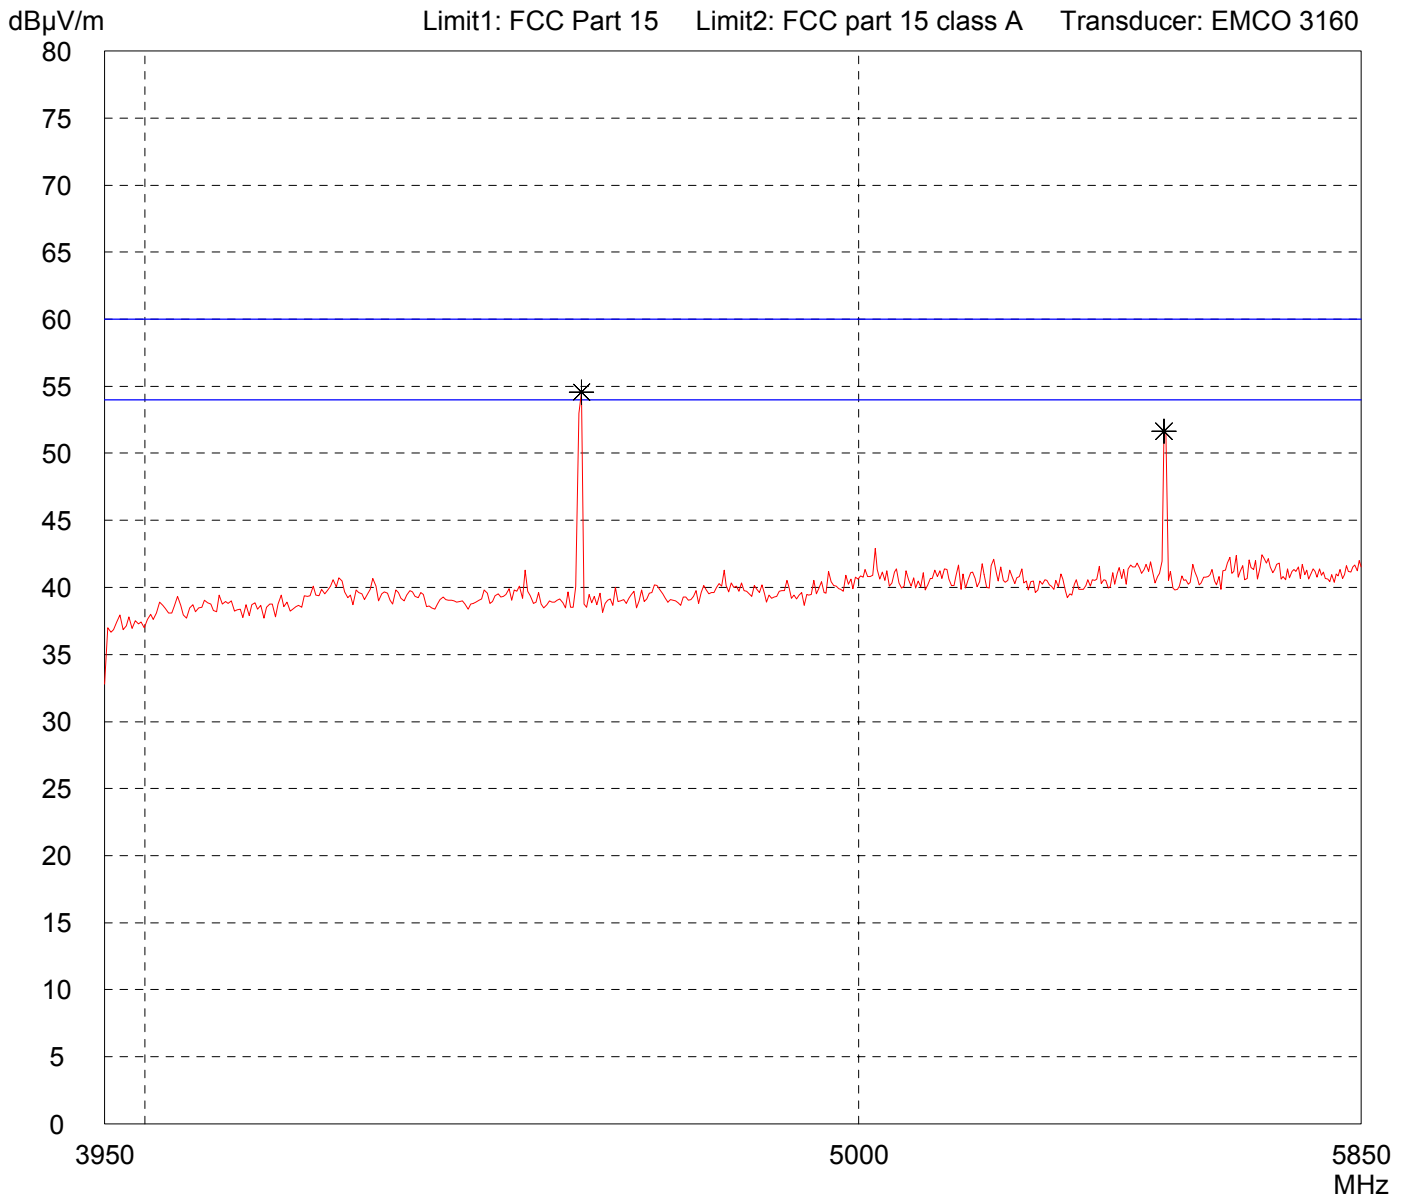

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply - transmitting continuously - EUT in upright position
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

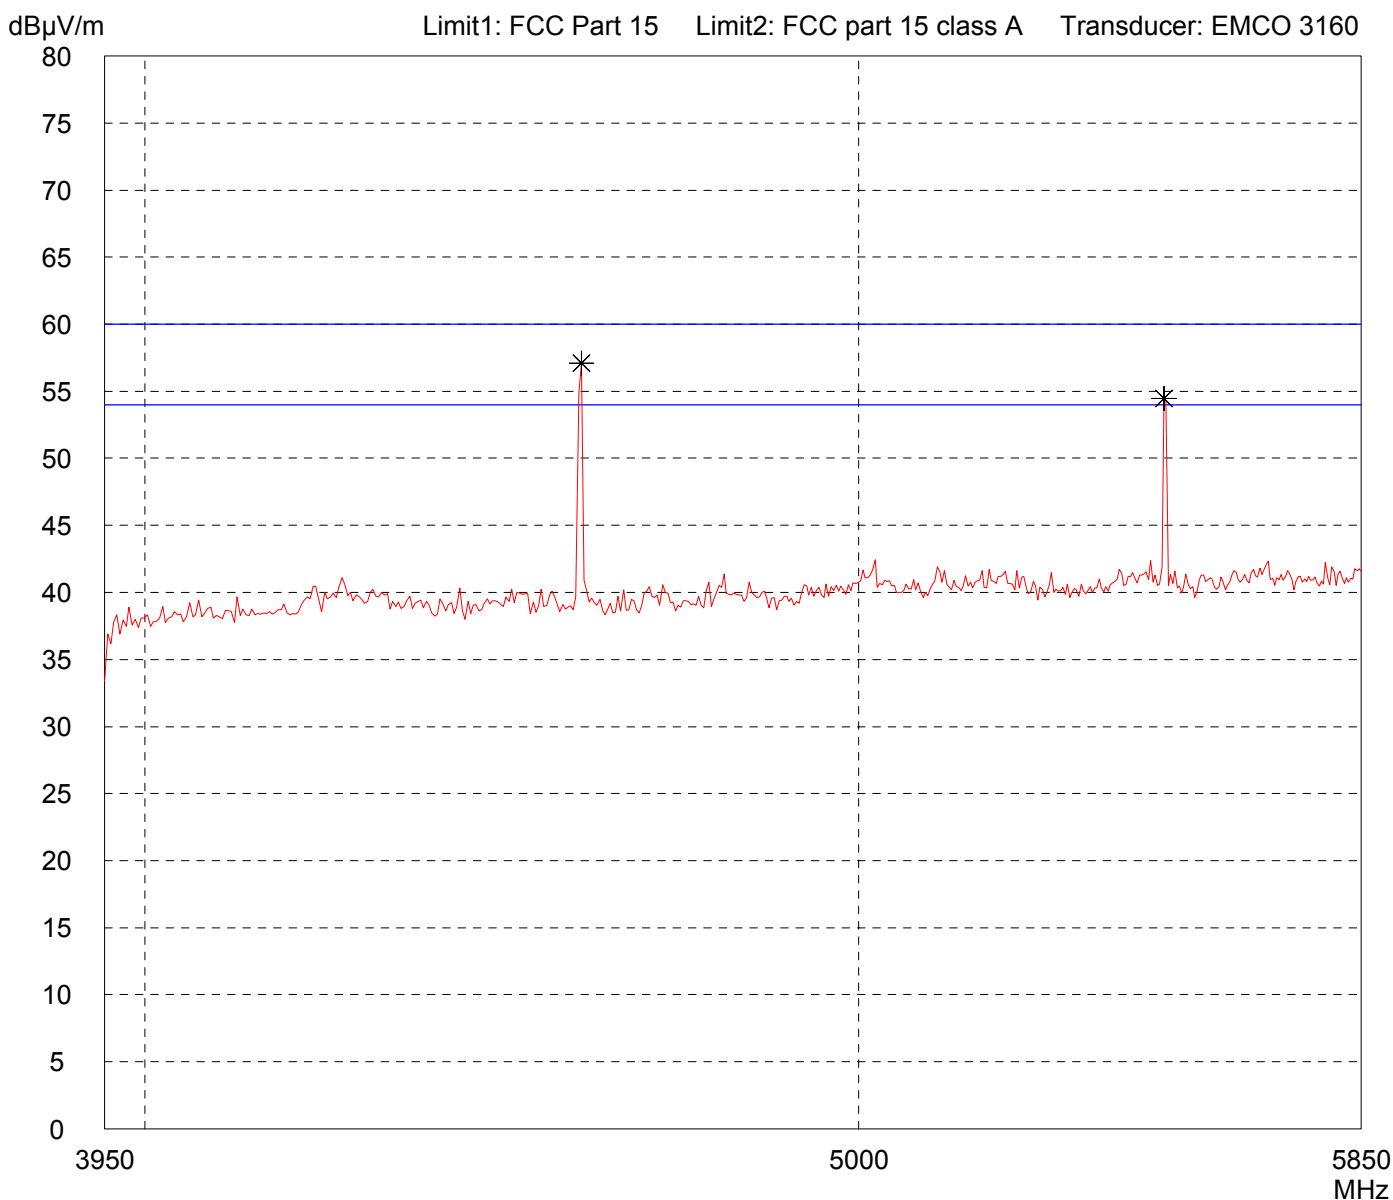

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------


# Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT in upright position
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

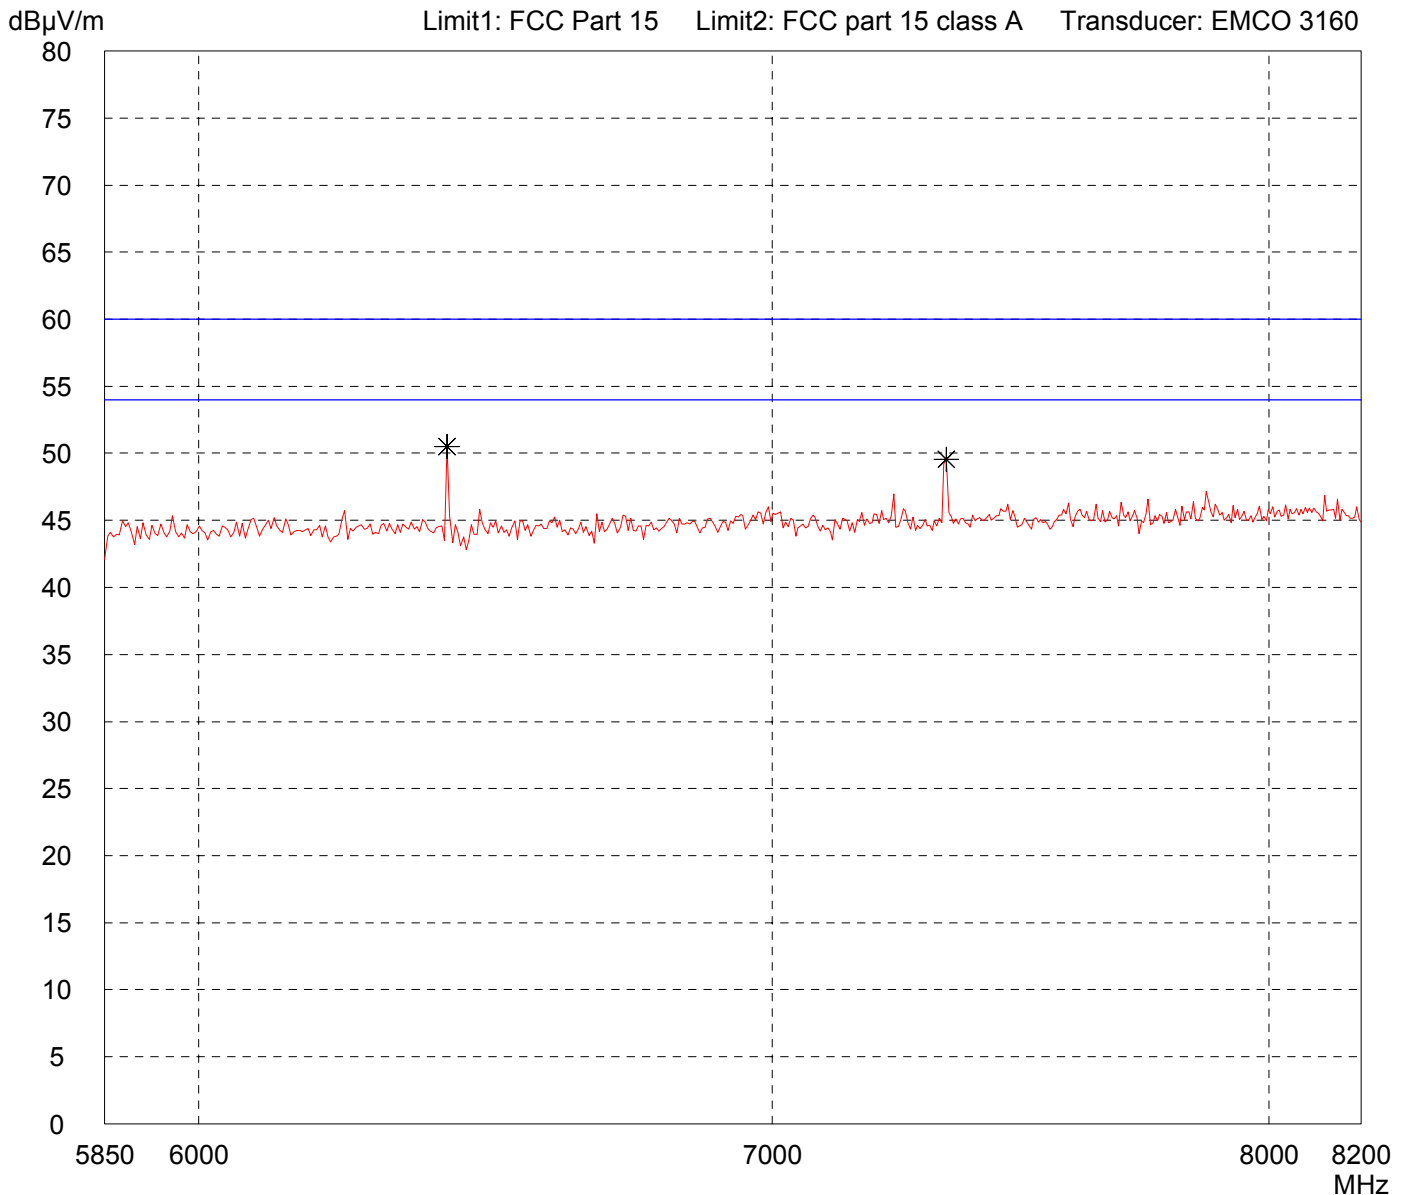


Result: Prescan
--------------------

Project file: 50530-60598
------------------------------

## Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

<p>Model: <b>Keypad Compact 916,5 MHz ASK</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- battery supply</li> <li>- transmitting continuously</li> <li>- EUT in upright position</li> </ul>			
Serial no.: <b>3</b>				
Applicant: <b>Eldat GmbH</b>				
Test site: <b>Fully anechoic room, cabin no. 2</b>				
Tested on: <b>Test distance 3 metres Vertical Polarization</b>				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">Date of test: <b>07/19/2006</b></td> <td style="width: 50%;">Operator: <b>M. Steindl</b></td> </tr> <tr> <td>Test performed: <b>automatically</b></td> <td>File name: <b>default.emi</b></td> </tr> </table>		Date of test: <b>07/19/2006</b>	Operator: <b>M. Steindl</b>	Test performed: <b>automatically</b>
Date of test: <b>07/19/2006</b>	Operator: <b>M. Steindl</b>			
Test performed: <b>automatically</b>	File name: <b>default.emi</b>			

Detector: <b>Peak</b>	List of values: <b>Selected by hand</b>
--------------------------	--

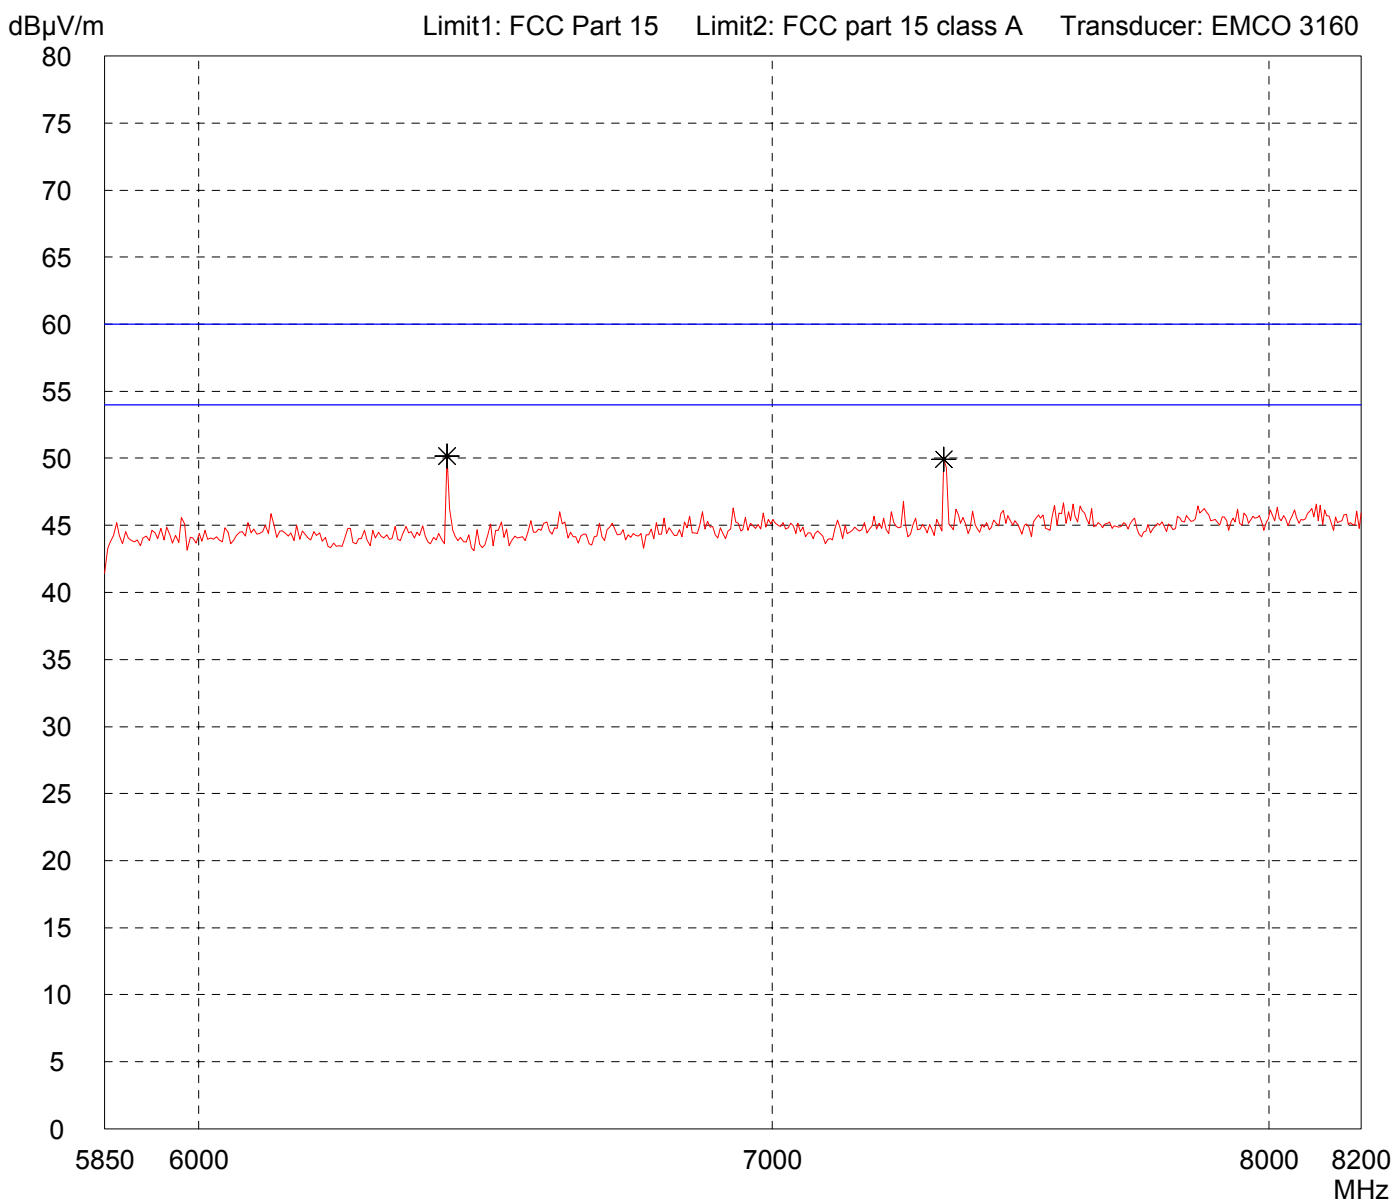


Result: <b>Prescan</b>	Project file: <b>50530-60598</b>
---------------------------	-------------------------------------

# Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

<p>Model: <b>Keypad Compact 916,5 MHz ASK</b></p> <p>Serial no.: <b>3</b></p> <p>Applicant: <b>Eldat GmbH</b></p> <p>Test site: <b>Fully anechoic room, cabin no. 2</b></p> <p>Tested on: <b>Test distance 1 meter Horizontal Polarization</b></p> <p>Date of test: <b>07/19/2006</b>      Operator: <b>M. Steindl</b></p> <p>Test performed: <b>automatically</b>      File name: <b>default.emi</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- battery supply</li> <li>- transmitting continuously</li> <li>- EUT in upright position</li> </ul>
---	--

<p>Detector: <b>Peak</b></p>	<p>List of values: <b>10 dB Margin                      50 Subranges</b></p>
----------------------------------	--

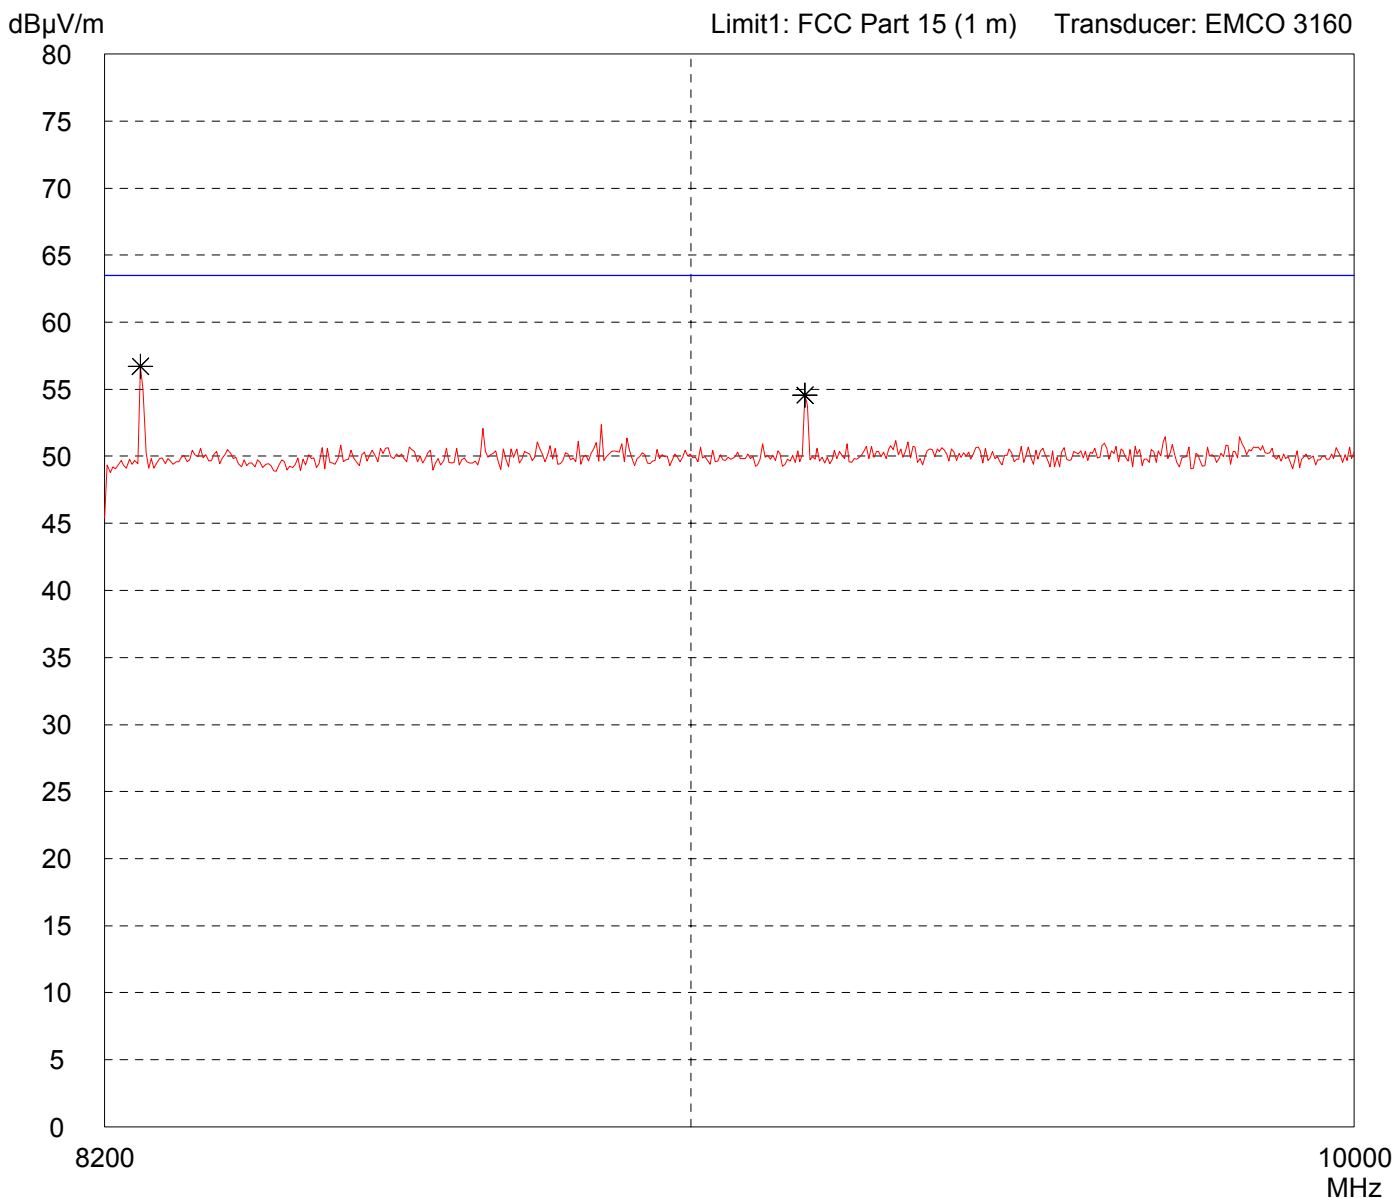

<p>Result: <b>Prescan</b></p>	<p>Project file: <b>50530-60598</b></p>
-----------------------------------	---


# Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: Keypad Compact 916,5 MHz ASK	
Serial no.: 3	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 07/19/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - battery supply  - transmitting continuously  - EUT in upright position	
--	--

Detector: Peak
-------------------

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

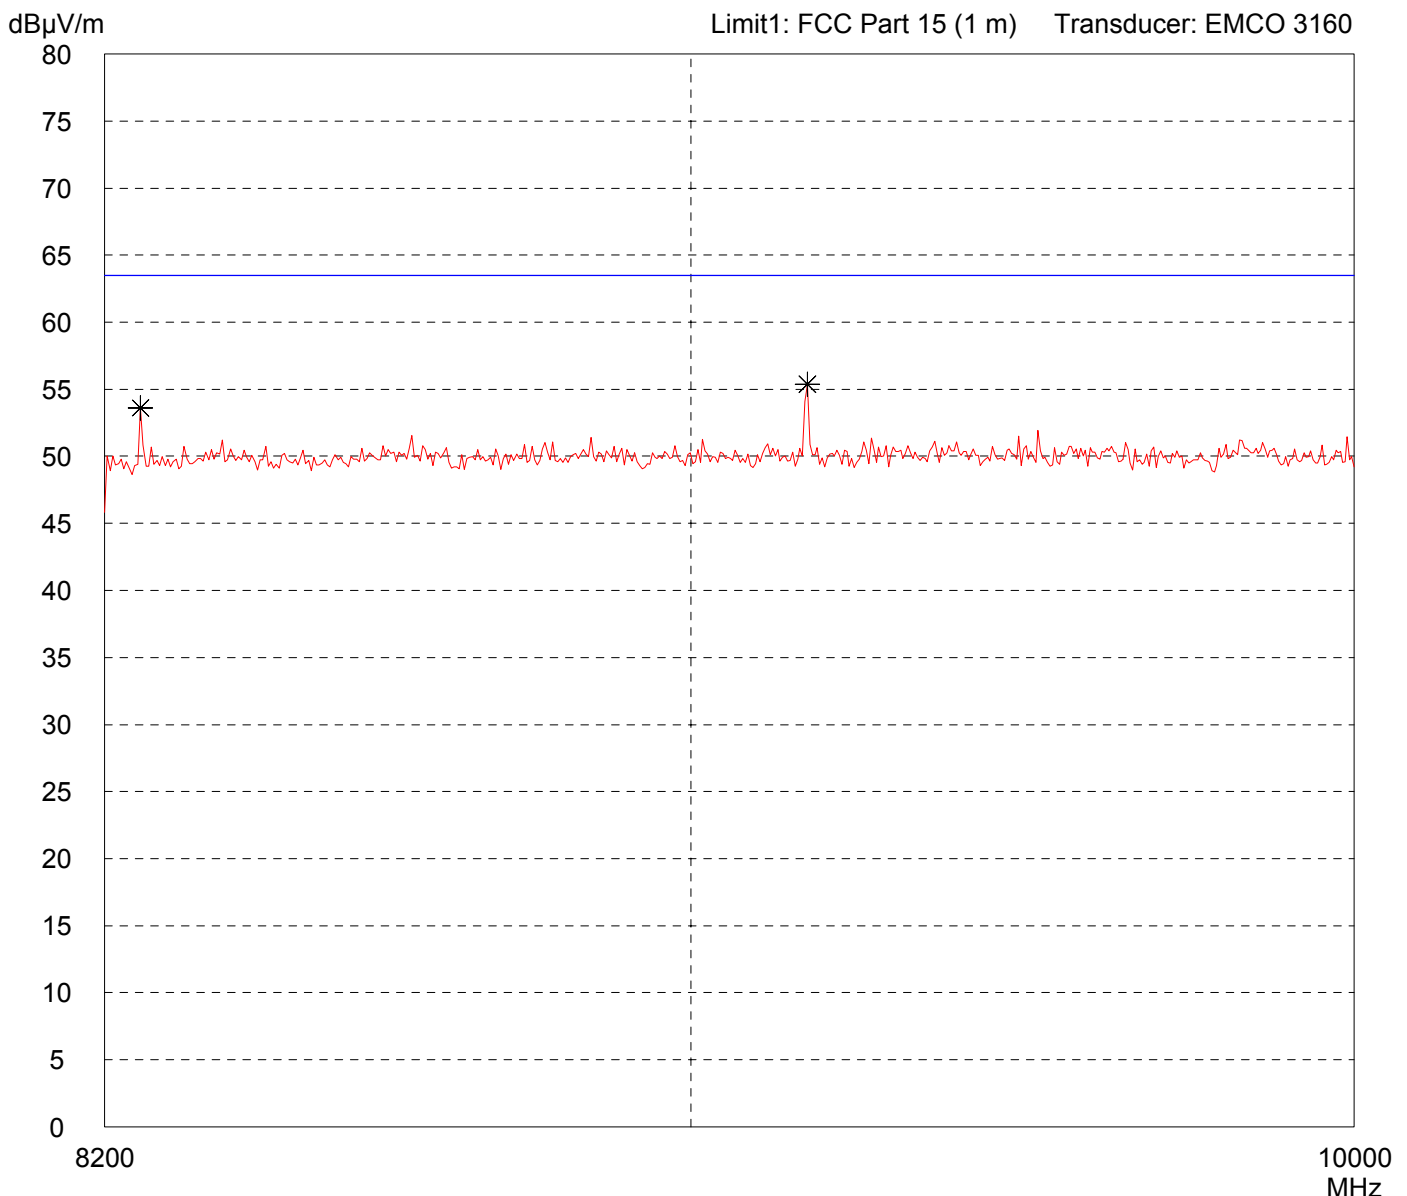

Result: Prescan
--------------------

Project file: 50530-60598
------------------------------