



# FCC Test Report

**Equipment** : Wireless STB  
**Brand Name** : AT&T  
**Model No.** : C71KW-400, C71KWBP-400  
**FCC ID** : NKR-ATTC71KW  
**Standard** : 47 CFR FCC Part 15.247  
**Frequency** : 2400 MHz – 2483.5 MHz  
**Function** :  Point-to-multipoint;  Point-to-point  
**Applicant** : Wistron NeWeb Corporation  
20 Park Avenue II Hsinchu Science Park Hsinchu,  
308 Taiwan  
**Manufacturer** : Wistron NeWeb Corporation  
20 Park Avenue II Hsinchu Science Park Hsinchu,  
308 Taiwan

The product sample received on Aug. 18, 2017 and completely tested on Oct. 16, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

  
Cliff Chang  
SPORTON INTERNATIONAL INC.





# Table of Contents

- 1 GENERAL DESCRIPTION .....5**
- 1.1 Information.....5
- 1.2 Testing Applied Standards .....8
- 1.3 Testing Location Information .....8
- 1.4 Measurement Uncertainty .....8
- 2 TEST CONFIGURATION OF EUT .....9**
- 2.1 Test Channel Mode .....9
- 2.2 The Worst Case Measurement Configuration .....10
- 2.3 EUT Operation during Test .....11
- 2.4 Accessories .....12
- 2.5 Support Equipment.....12
- 2.6 Test Setup Diagram .....13
- 3 TRANSMITTER TEST RESULT .....16**
- 3.1 AC Power-line Conducted Emissions .....16
- 3.2 DTS Bandwidth .....17
- 3.3 Maximum Conducted Output Power .....18
- 3.4 Power Spectral Density .....20
- 3.5 Emissions in Non-restricted Frequency Bands .....22
- 3.6 Emissions in Restricted Frequency Bands.....23
- 4 TEST EQUIPMENT AND CALIBRATION DATA .....27**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX G. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**



### Summary of Test Result

Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Limit	Result
1.1.2	15.203	Antenna Requirement	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	≥500kHz	Complied
3.3	15.247(b)	Maximum Conducted Output Power	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	Non-Restricted Bands: >30 dBc	Complied
3.6	15.247(d)	Emissions in Restricted Frequency Bands	Restricted Bands: FCC 15.209	Complied



### Revision History

Report No.	Version	Description	Issued Date
FR791514AD	Rev. 01	Initial issue of report	Oct. 16, 2017



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.



1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
						2.4GHz	5GHz	BT
A	1	Airgain	N2425DWA7	PCB Antenna	I-PEX	Note	Note	-
B	2	Airgain	N2410DWB7	PCB Antenna	I-PEX			
C	3	Airgain	N2425DWC7	PCB Antenna	I-PEX			
D	4	Airgain	N2410DWD7	PCB Antenna	I-PEX			
E	1	N/A	N/A	Printed Antenna	N/A	-	-	1.11

Note:

2.4 GHz Antenna gain (dBi)				
Port \ Frequency	1	2	3	4
2412MHz	4.30	2.20	3.90	2.80
2422MHz	4.30	2.40	4.00	2.90
2437MHz	4.50	3.10	4.20	3.20
2452MHz	4.50	3.30	4.20	3.30
2462MHz	4.70	3.50	4.20	3.20

Frequency	2.4 GHz Directional gain (dBi)
2412MHz	5.70
2422MHz	5.90
2437MHz	6.30
2452MHz	6.40
2462MHz	6.40

5 GHz Antenna gain (dBi)				
Band \ Port	1	2	3	4
Band 1	5.50	2.30	4.30	4.30
Band 2	5.30	1.90	4.00	4.20
Band 3	5.80	1.80	3.90	2.50
Band 4	5.70	2.00	3.70	2.00



Band	5 GHz Directional gain (dBi)
Band 1	7.60
Band 2	7.50
Band 3	7.00
Band 4	7.10

Note: The EUT has four antennas.

**For WLAN function (4TX, 4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For Bluetooth function (1TX, 1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.626	2.034	391.25u	3k

**1.1.4 EUT Operational Condition**

<b>EUT Power Type</b>	From power adapter
-----------------------	--------------------

**1.1.5 Table for Multiple Listing**

The EUT has two model names which are identical to each other in all aspects except for the following table:

Model Name	Description
C71KW-400	There is nothing different of two models, just for different marketing use.
C71KWBP-400	

From the above models, model: C71KW-400 was selected as representative model for the test and its data was recorded in this report.



## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v04
- ◆ FCC KDB 412172 D01 v01r01

## 1.3 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Lucke Hsieh · Stim Sung · Gino Huang	20°C / 55%	Aug. 28, 2017~Oct. 16, 2017
Radiated	03CH01-CB	Justin Lin	22°C / 54%	Aug. 18, 2017 ~ Aug. 31, 2017
AC Conduction	CO01-CB	Deven Huang	23°C / 60%	Sep. 11, 2017

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74 x10 <sup>-8</sup>	Confidence levels of 95%





## **2 Test Configuration of EUT**

### **2.1 Test Channel Mode**

<b>Mode</b>	<b>Power Setting</b>
BT-LE(1Mbps)	-
2402MHz	10
2440MHz	10
2480MHz	10

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral
<b>Operating Mode</b>	Normal Link
1	EUT with Ethernet + Bluetooth function
2	EUT with 2.4GHz WLAN + Bluetooth function
3	EUT with 5GHz WLAN + Bluetooth function
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	Normal Link
1	EUT in Z axis with Ethernet + Bluetooth function
2	EUT in Y axis with Ethernet + Bluetooth function
Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Z axis with 2.4GHz WLAN + Bluetooth function
4	EUT in Z axis with 5GHz WLAN + Bluetooth function
For operating mode 1 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	CTX
The EUT was performed at Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.	
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Bluetooth+WLAN 2.4GHz
2	Bluetooth+WLAN 5GHz
Refer to Sporton Test Report No.: FA791514 for Co-location RF Exposure Evaluation.	

Note: 1. The defines from manufacturer, "USB port" without any function, and it was performed test at the load.  
2. The adapter is for measurement only, would not be marketed

Support Unit	Brand	Model	FCC ID
Adapter	DIRECTV	EPS10R4-16	DoC

### 2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



## 2.4 Accessories

N/A

## 2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	AP Router	Planex	GW-AP54SGX	KA220030603014-1
2	NB	DELL	E6430	DoC
3	Earphone	SHYARO CHI	MIC-04	DoC
4	Adapter	DIRECTV	EPS10R4-16	DoC
5	4K TV	LG	27UD68	DoC
6	Converter	UPMOST	DCT3	N/A
7	Flash disk3.0	Transcend	JetFlash-700	DoC
8	Remote controller	AT&T	VRC81	N/A

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	WLAN AP	NETGEAR	WNDR3300v2	PY309300116
2	NB	DELL	E4300	DoC
3	Earphone	SHYARO CHI	MIC-04	N/A
4	Adapter	DIRECTV	EPS10R4-16	DoC
5	4K TV	SONY	KLV-32U300A	DoC
6	Flash disk3.0	Silicon Power	B06	DoC
7	Remote controller	AT&T	VRC81	N/A
8	Converter	UPMOST	DCT3	N/A


For Test Site No: 03CH01-CB (above 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Adapter	DIRECTV	EPS10R4-16	DoC


For Test Site No: TH01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Adapter	DIRECTV	EPS10R4-16	DoC

## 2.6 Test Setup Diagram

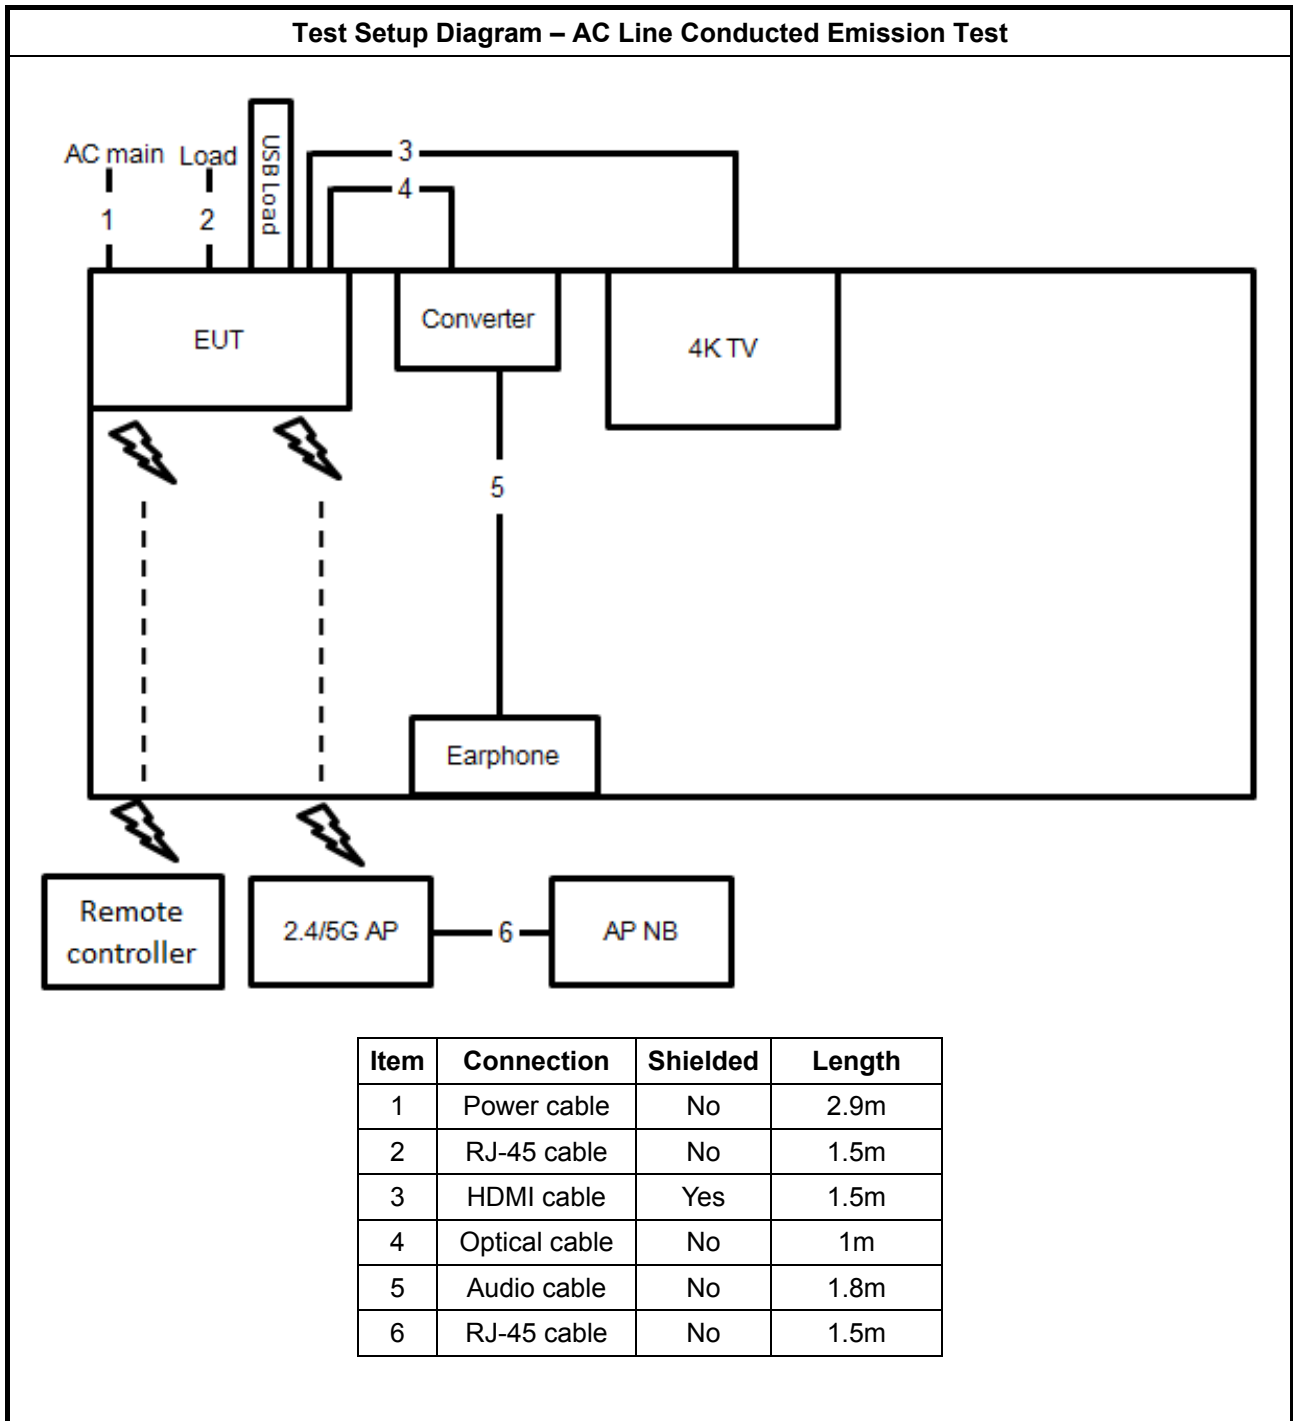


Test Setup Diagram - Radiated Test < 1GHz

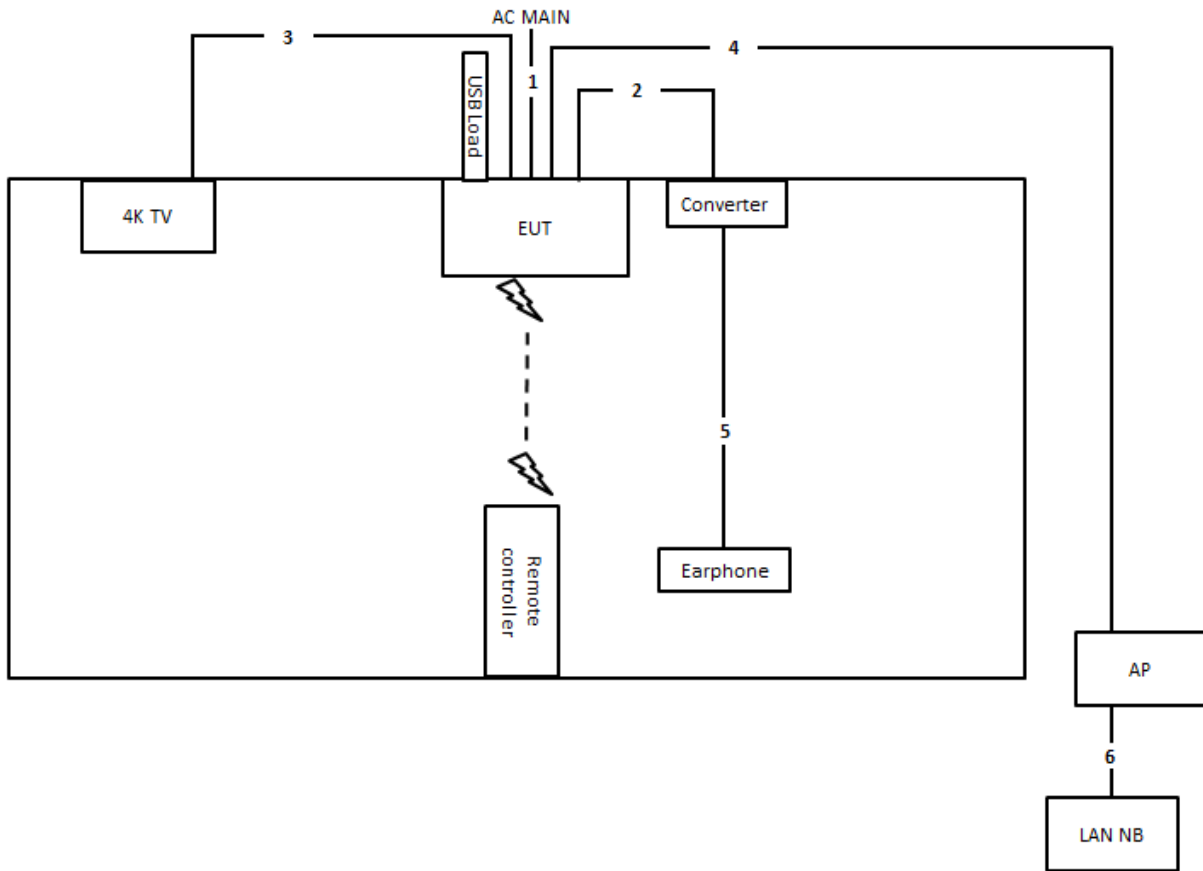

Item	Connection	Shielded	Length
1	Power cable	No	2.9m
2	Optical cable	No	1m
3	HDMI cable	Yes	1.5m
4	RJ-45 cable	No	10m
5	Audio cable	No	1.1m
6	RJ-45 cable	No	1m

Test Setup Diagram - Radiated Test > 1GHz

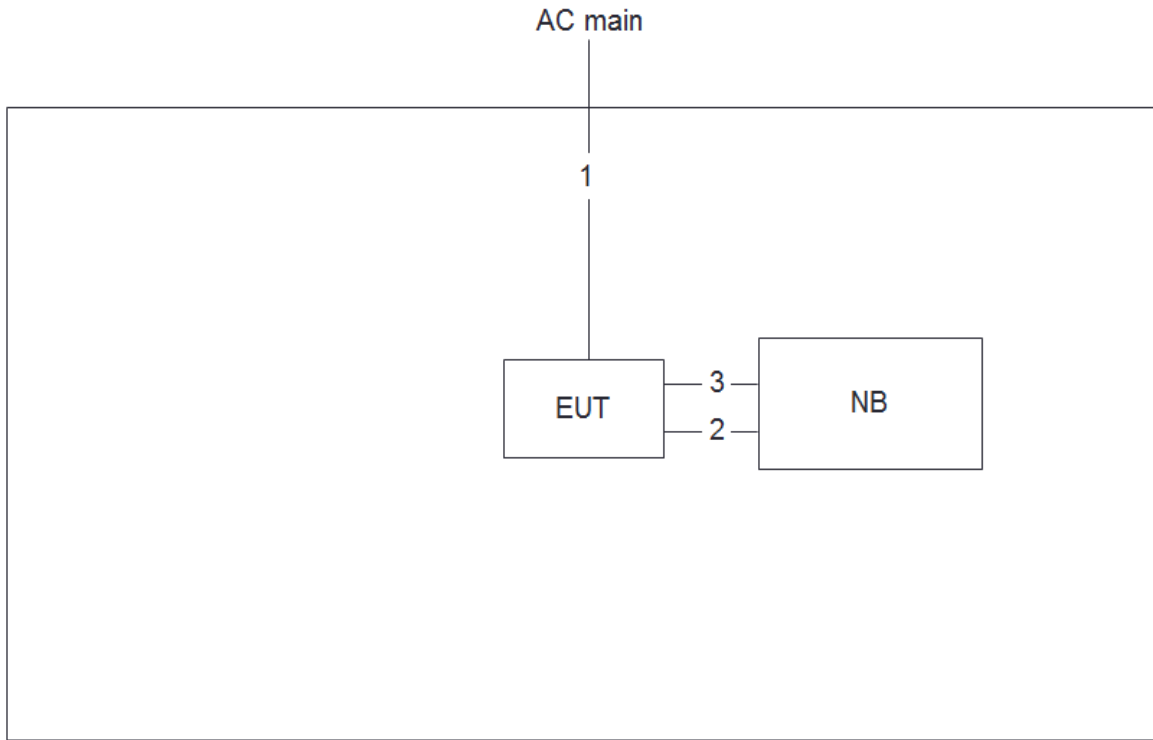

Item	Connection	Shielded	Length
1	Power cable	No	2.9m
2	RS-232 cable	Yes	1.5m
3	RJ-45 cable	No	1.5m

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.</li> </ul>

##### 3.1.4 Test Setup

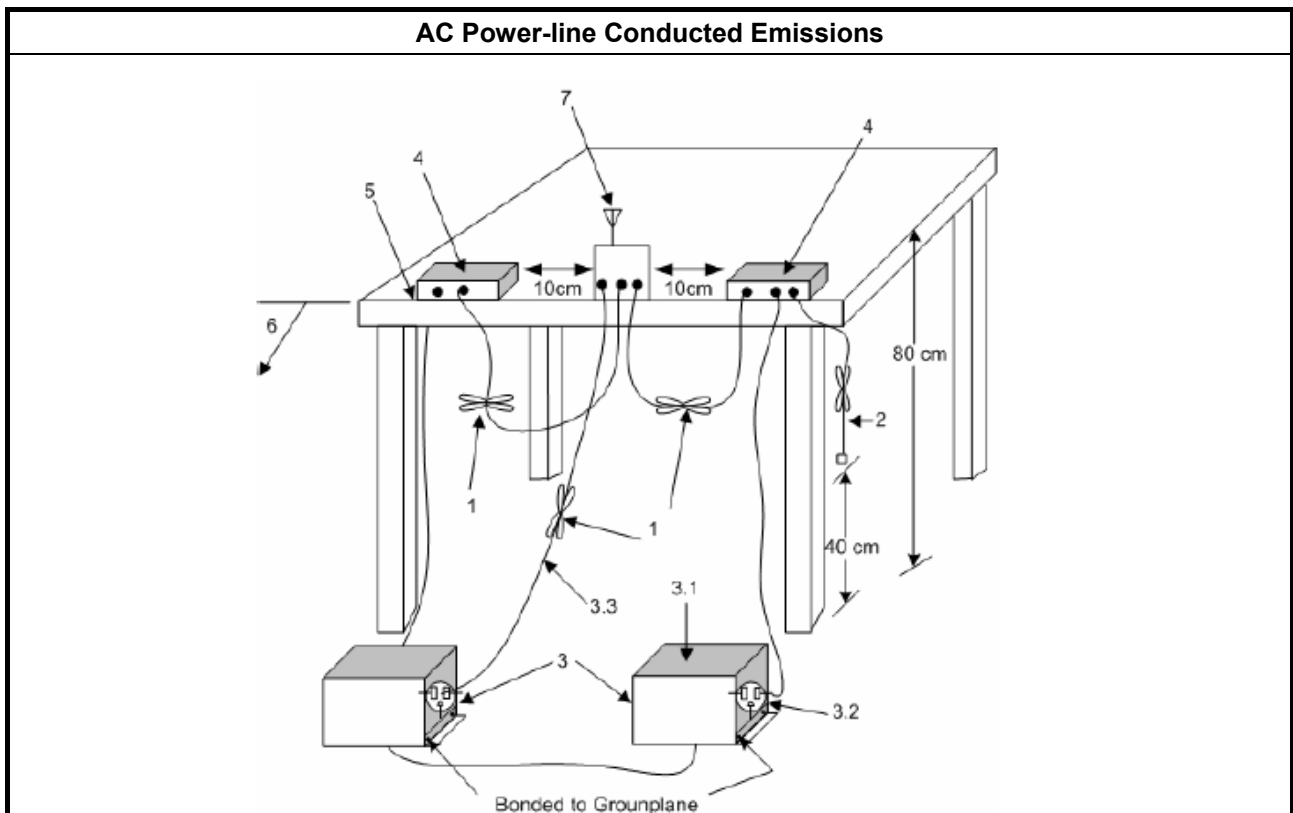

##### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

#### 3.2.4 Test Setup

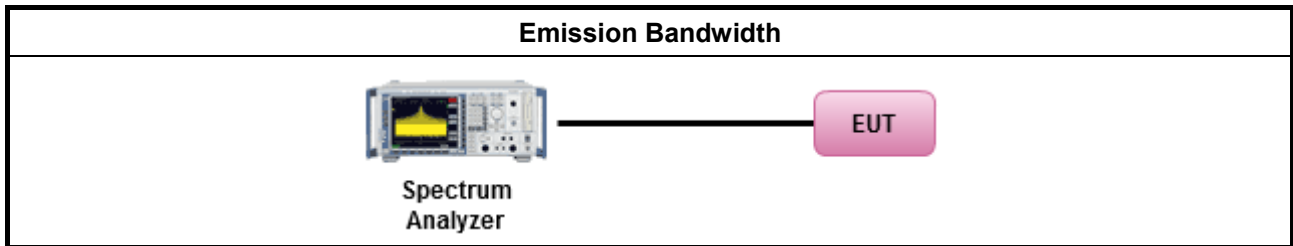

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
<p><math>P_{Out}</math> = maximum peak conducted output power or maximum maximum conducted output power in dBm,  <math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.</p>	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW $\geq$ EBW method).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW $\geq$ DTS BW)
	<ul style="list-style-type: none"> <li>▪ Maximum Conducted Output Power</li> </ul>
	[duty cycle $\geq$ 98% or external video / power trigger]
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM-G (using an RF average power meter).
	<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below:            Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>            (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>

### 3.3.4 Test Setup

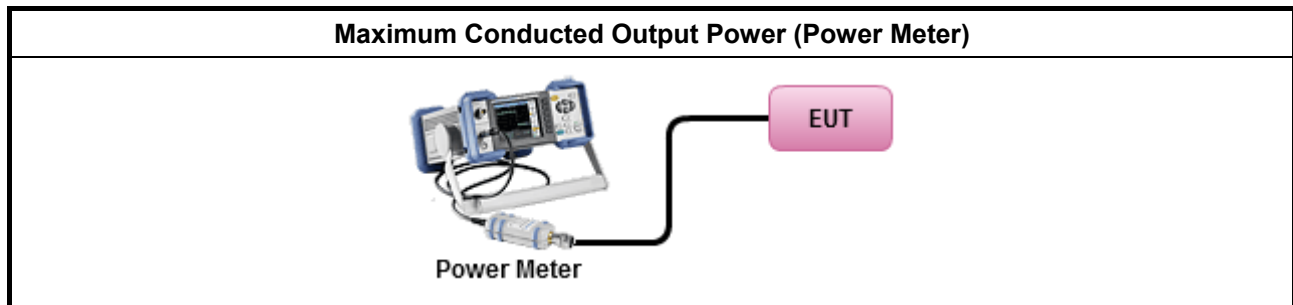

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>
<ul style="list-style-type: none"> <li>▪ If The EUT supports multiple transmit chains using options given below:           <ul style="list-style-type: none"> <li> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.               </li> <li> <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,               </li> <li> <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.               </li> </ul> </li> </ul>

### 3.4.4 Test Setup

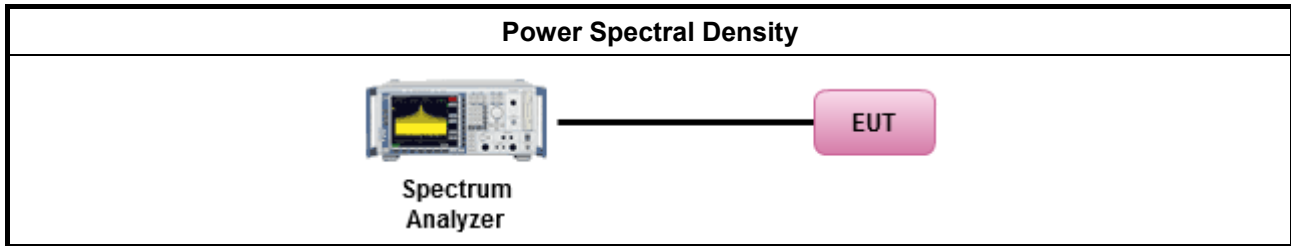

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

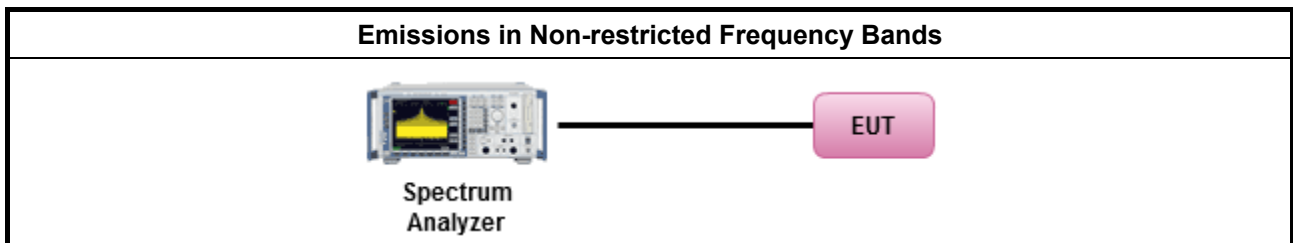

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.





3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.</li> </ul>
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq$ 98%)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq$ 1/T).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>
<ul style="list-style-type: none"> <li>▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>



### 3.6.4 Test Setup

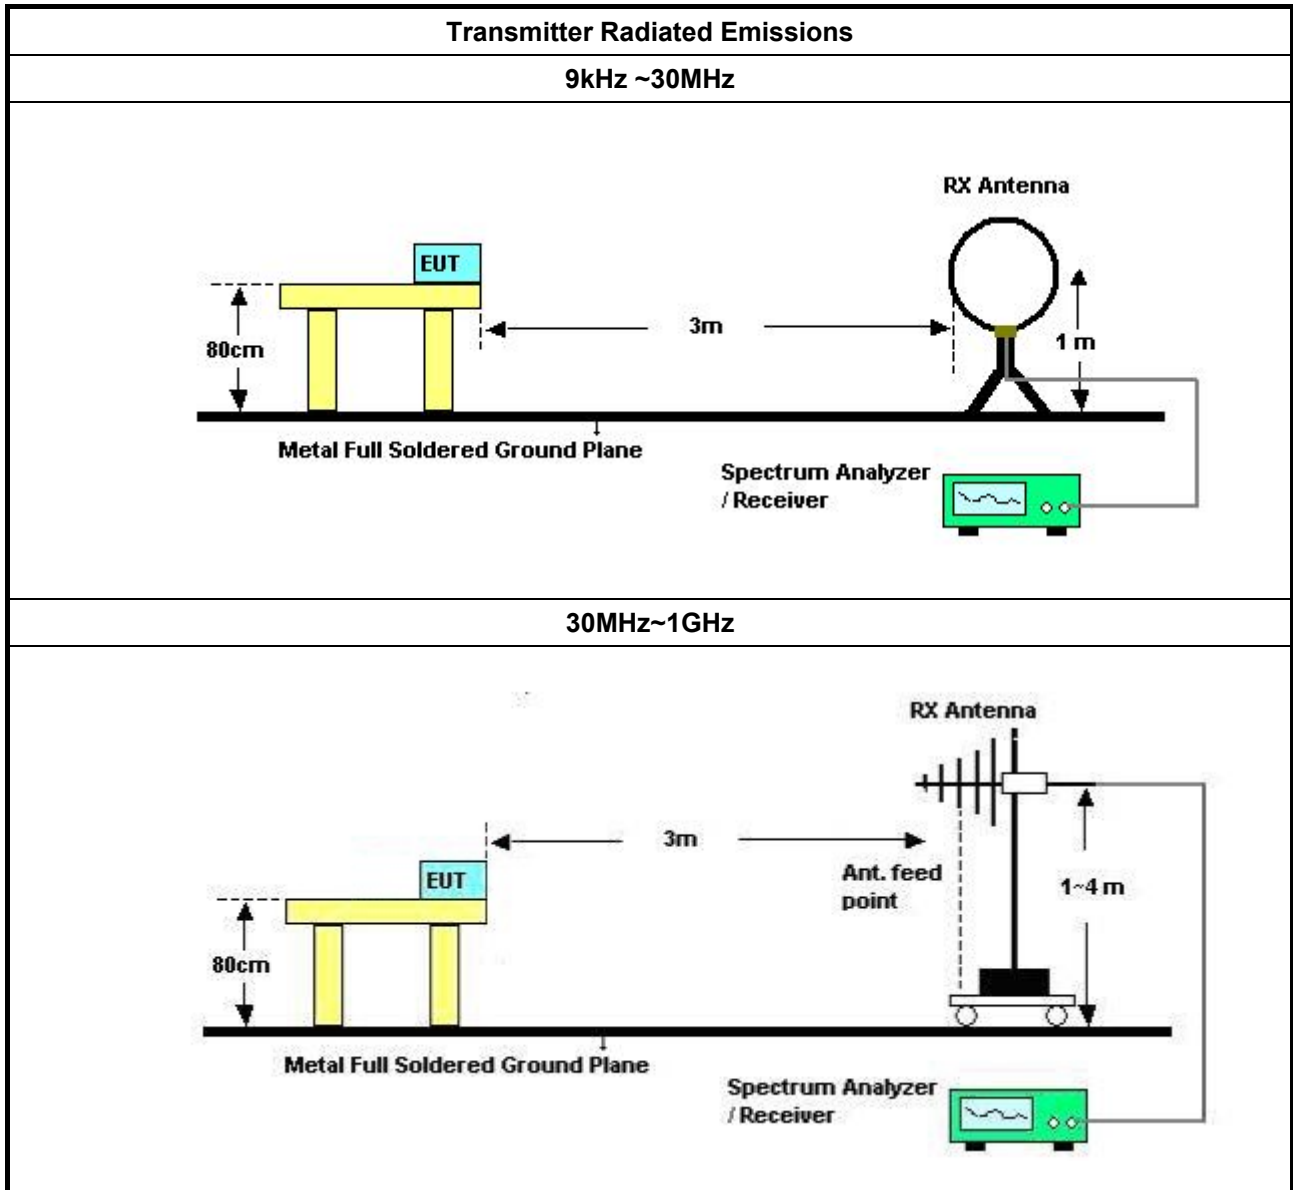

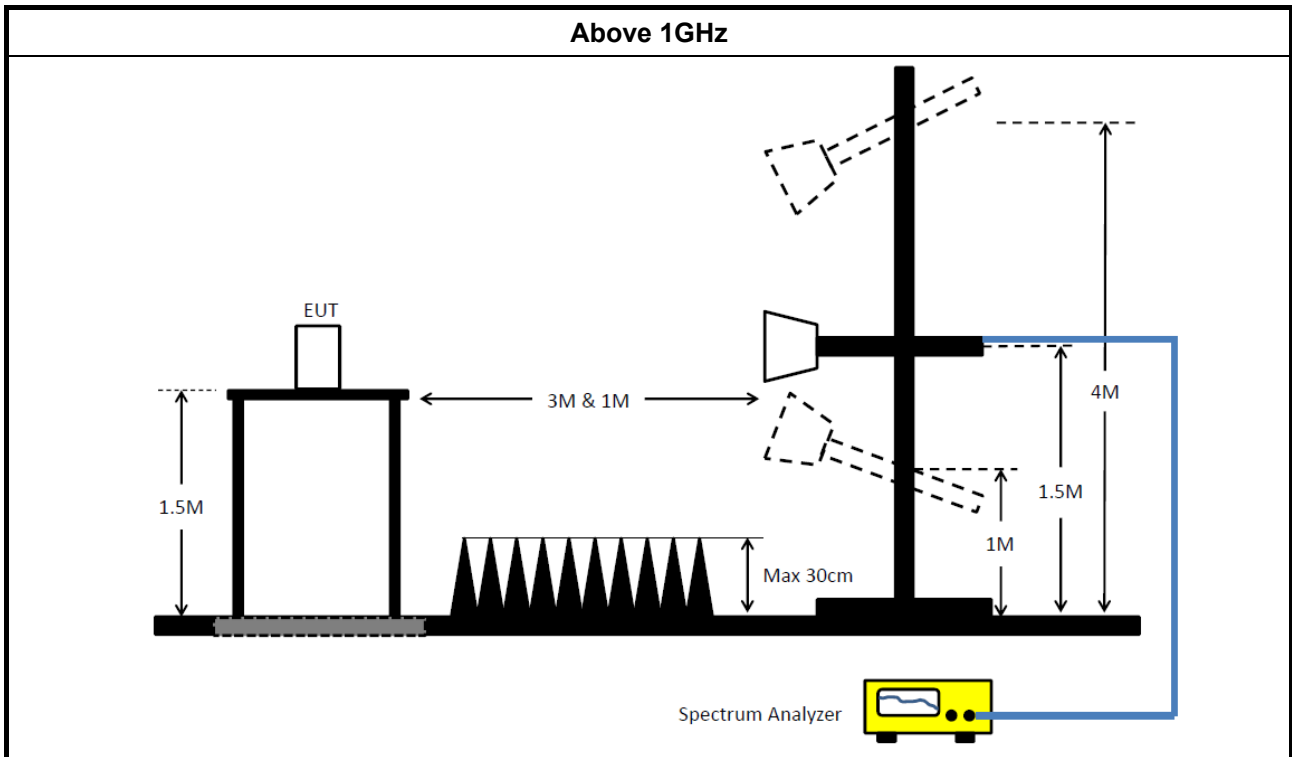

### 3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.6.6 Transmitter Radiated Unwanted Emissions

Refer as Appendix F



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 23, 2017	Jan. 22, 2018	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Dec. 13, 2017	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 21, 2016	Dec. 20, 2017	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 23, 2017	May 22, 2018	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0604	30MHz ~ 1GHz	Jan. 11, 2017	Jan. 10, 2018	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Mar. 15, 2018*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Nov. 09, 2017	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91702 52	15GHz ~ 40GHz	Jul. 05, 2017	Jul. 04, 2018	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2017	May 01, 2018	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 16, 2017	Jan. 15, 2018	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 10, 2017	Jul. 09, 2018	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 22, 2016	Nov. 21, 2017	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 06, 2017	May 05, 2018	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Oct. 23, 2017	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Oct. 23, 2017	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Oct. 23, 2017	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Oct. 23, 2017	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Oct. 23, 2017	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 26, 2016	Dec. 25, 2017	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Oct. 24, 2016	Oct. 23, 2017	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Oct. 23, 2017	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Oct. 23, 2017	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Oct. 23, 2017	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Oct. 23, 2017	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY5341000 1	50MHz~18GHz	Nov. 22, 2016	Nov. 21, 2017	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.


“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



# AC Power-line Conducted Emissions Result


Appendix A

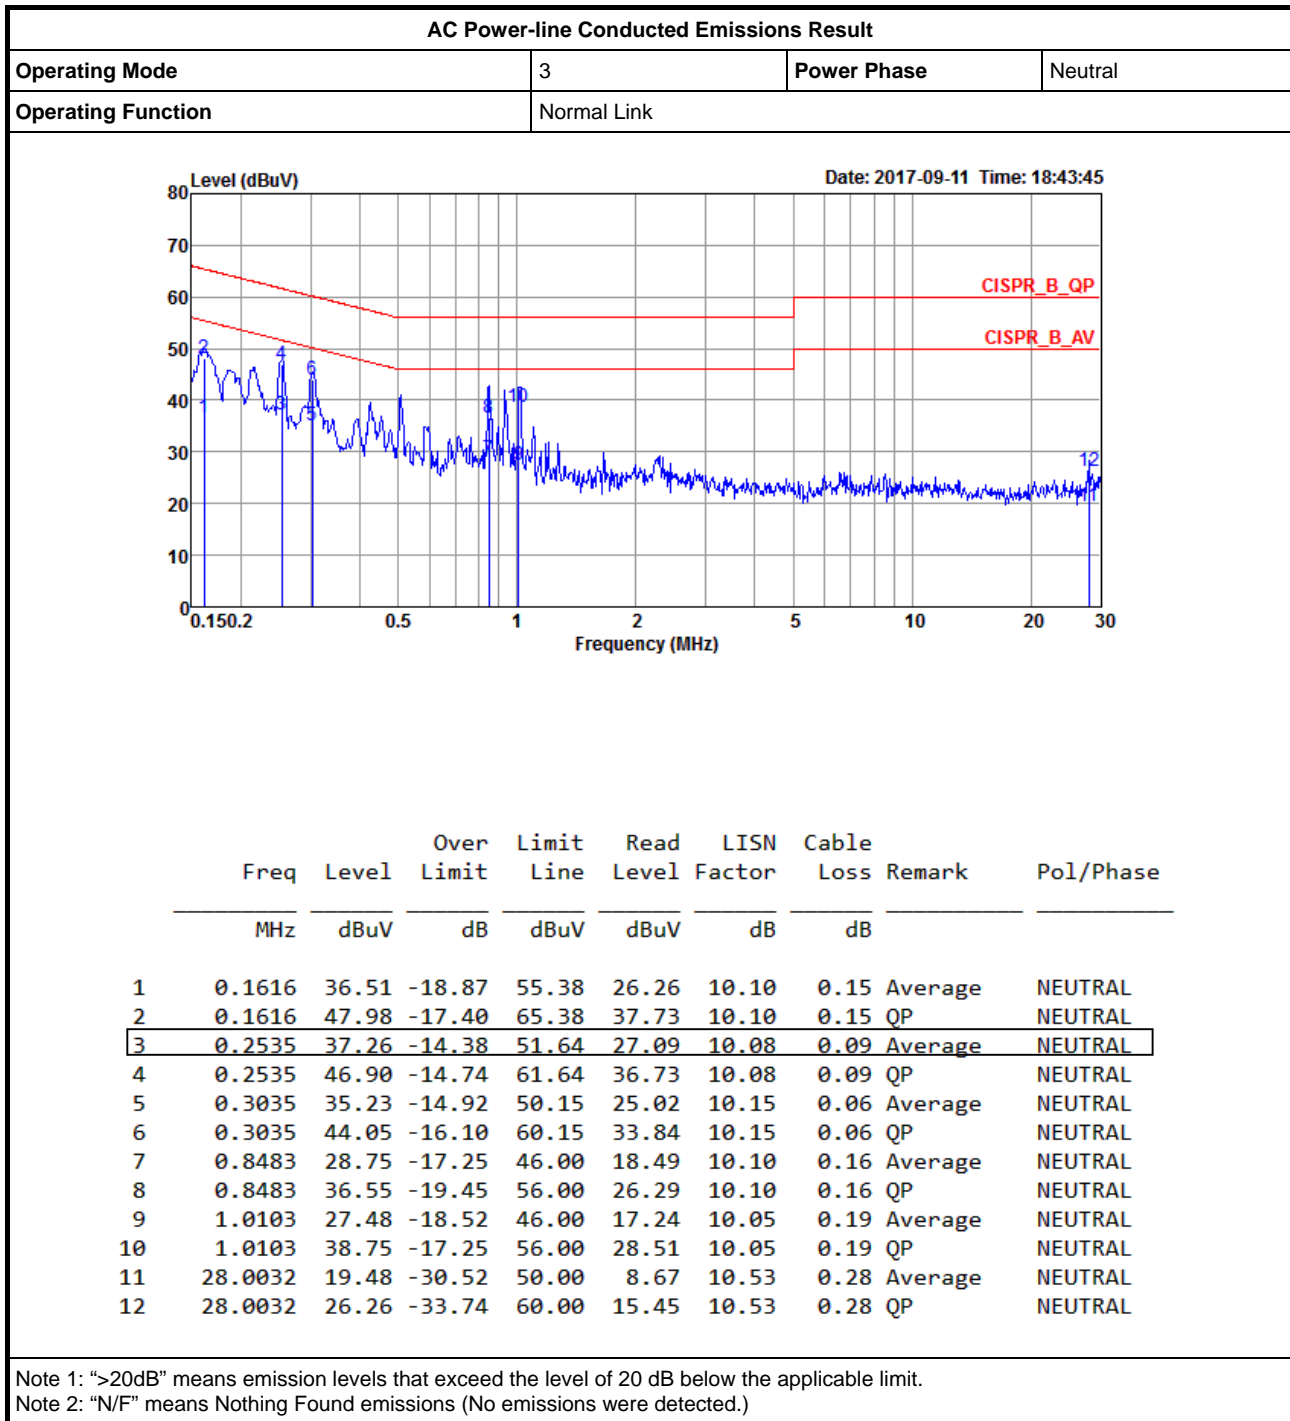



# AC Power-line Conducted Emissions Result

Appendix A

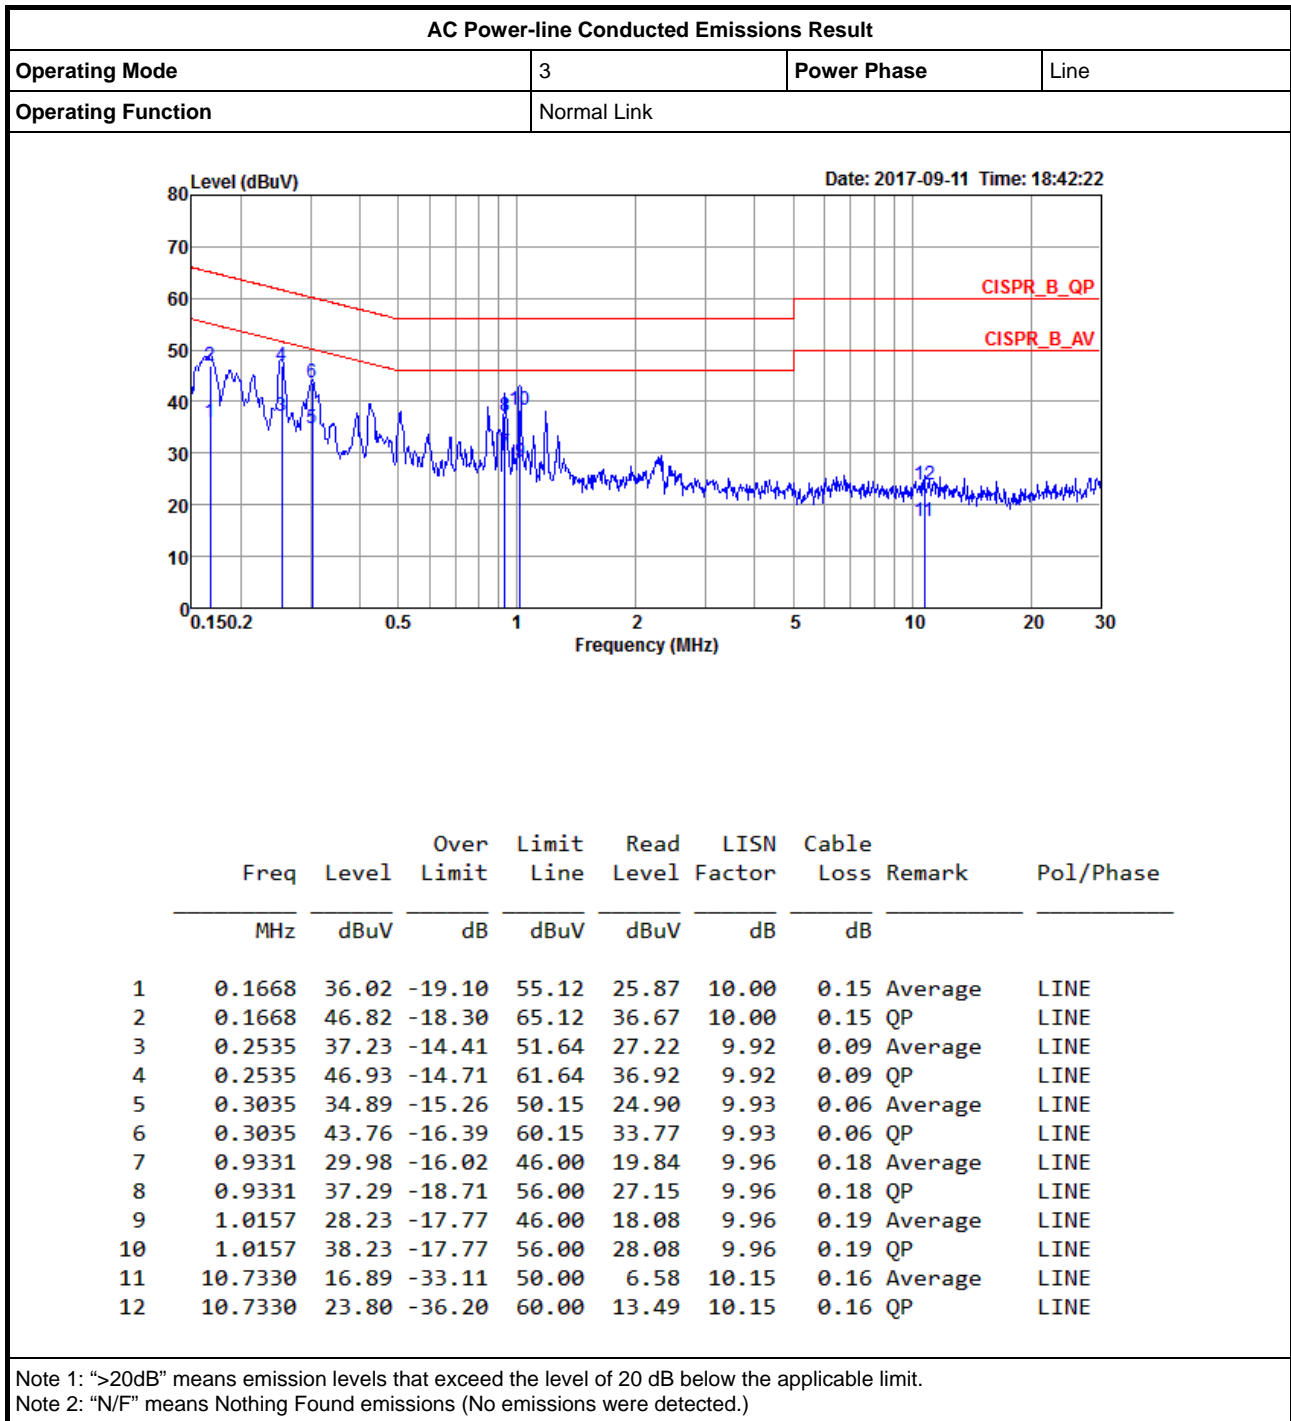



**Summary**


Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-	-
2.4-2.4835GHz	582.5k	1.063M	1M06F1D	565k	1.059M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	565k	1.061M
2440MHz	Pass	500k	577.5k	1.059M
2480MHz	Pass	500k	582.5k	1.063M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

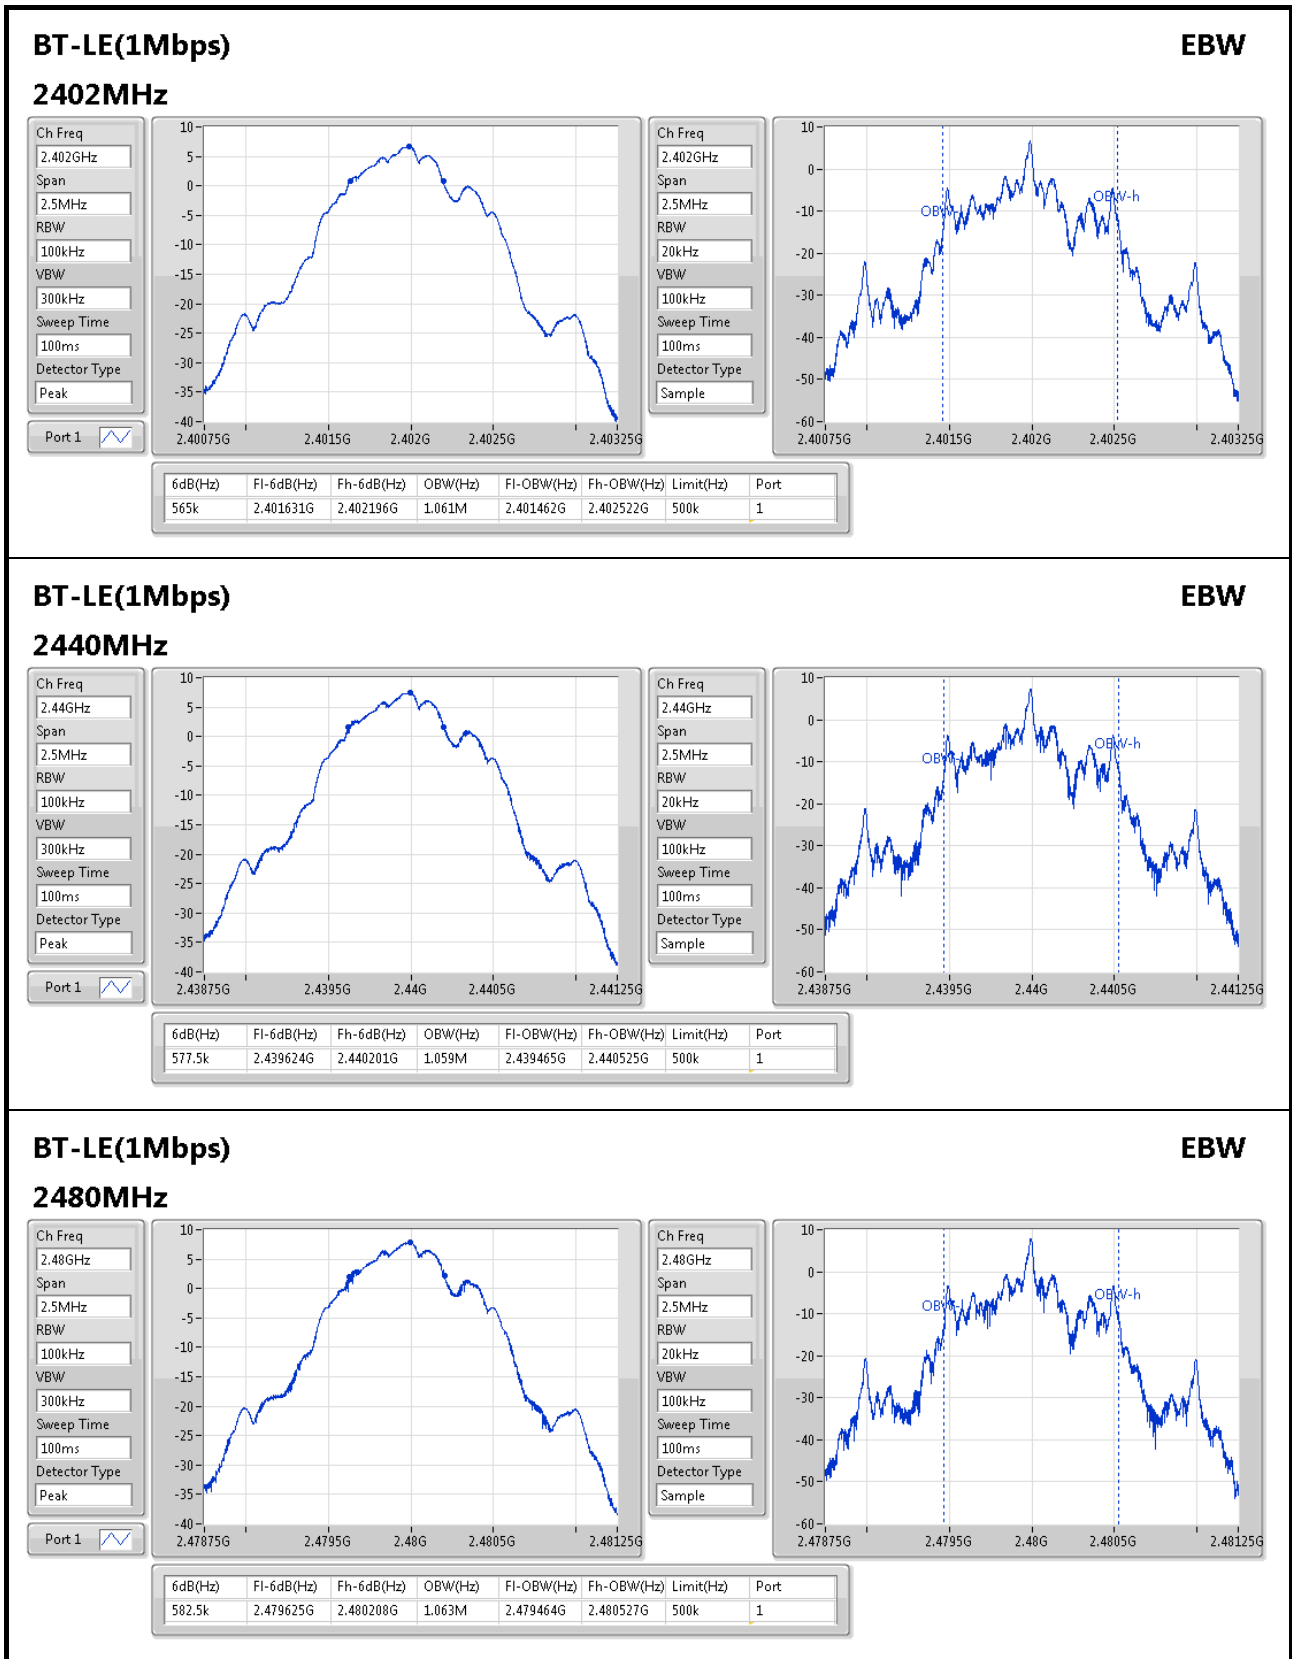





Summary

Mode	Power (dBm)	Power (W)
BT-LE(1Mbps)	-	-
2.4-2.4835GHz	9.01	0.00796

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.11	7.86	30.00
2440MHz	Pass	1.11	8.62	30.00
2480MHz	Pass	1.11	9.01	30.00



Summary


Mode	PD (dBm/RBW)
BT-LE(1Mbps)	-
2.4-2.4835GHz	6.71

RBW=3kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.11	5.72	8.00
2440MHz	Pass	1.11	6.56	8.00
2480MHz	Pass	1.11	6.71	8.00

RBW=3kHz.

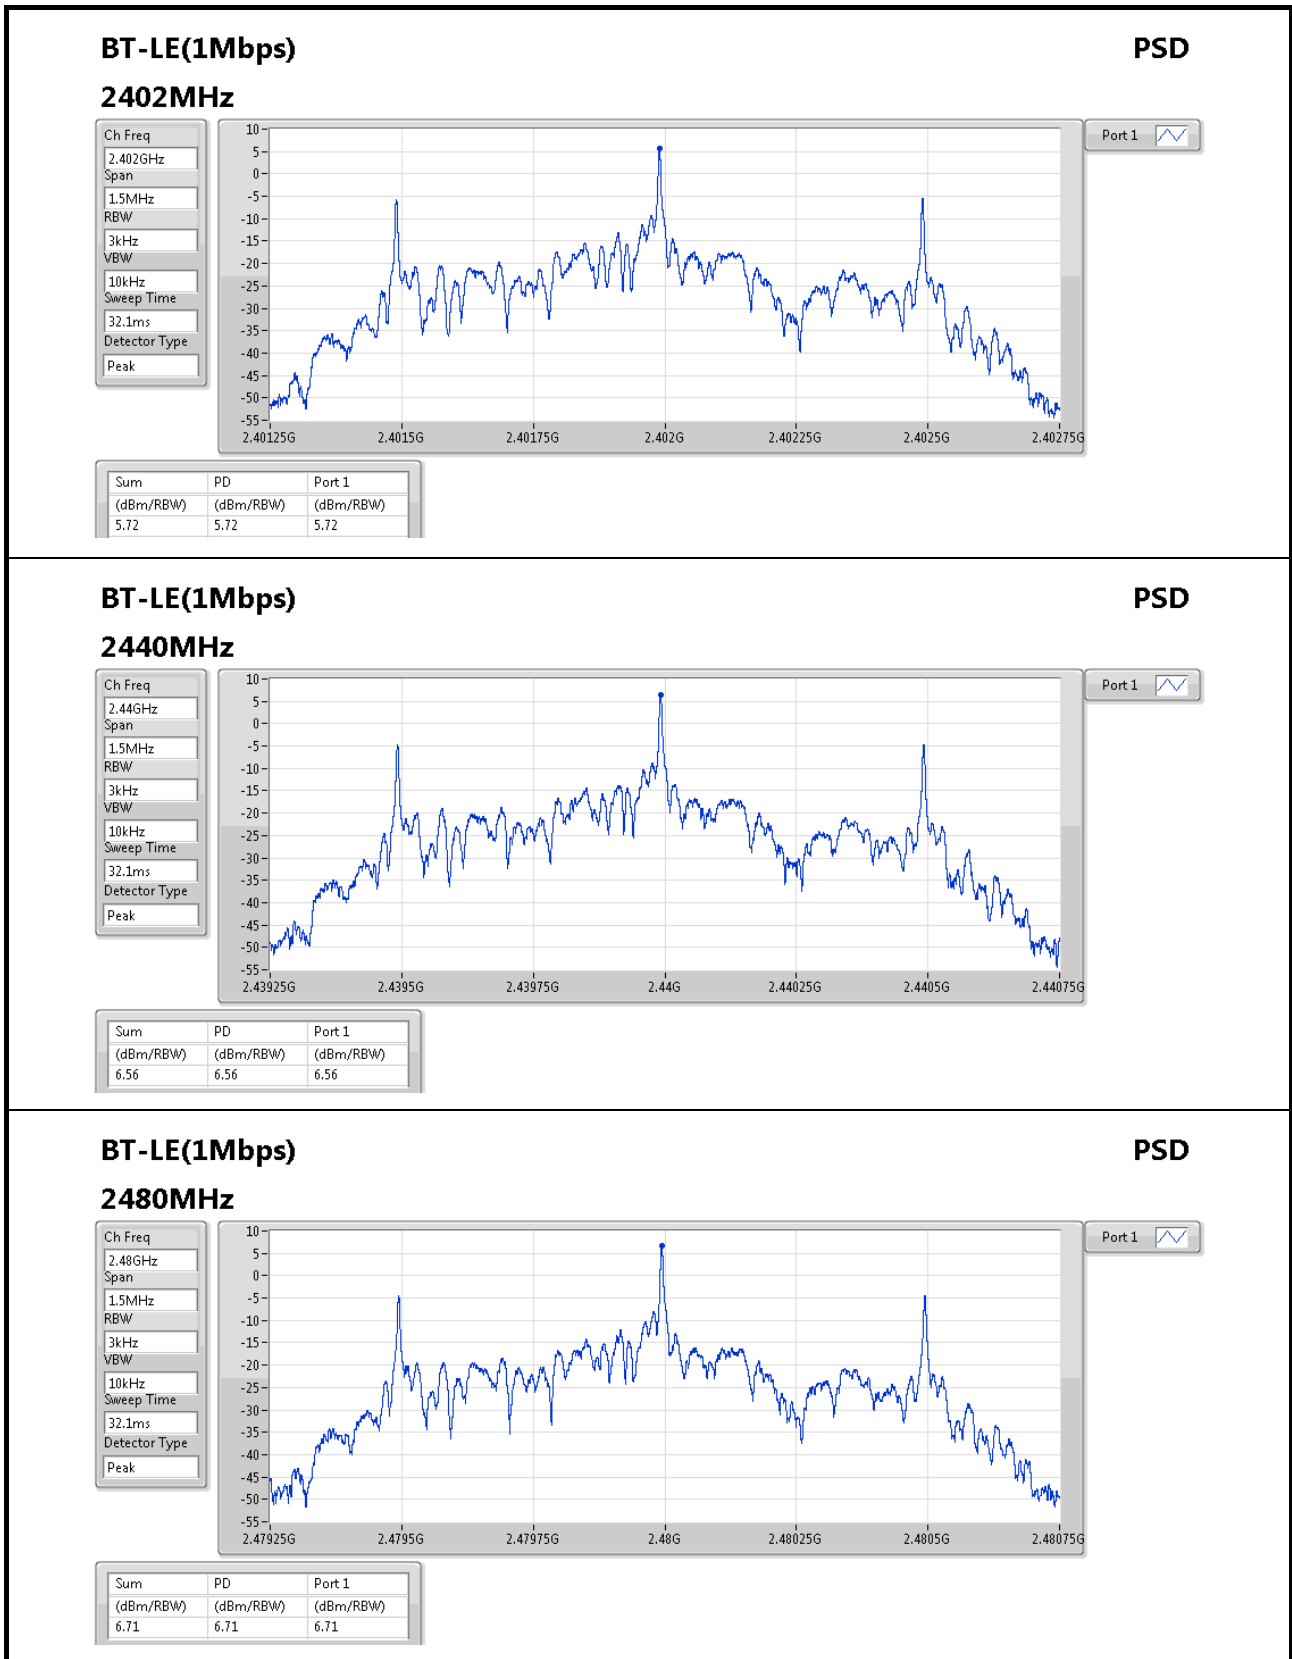




**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	2.439913G	7.45	-22.55	2.302096G	-56.80	2.399956G	-51.97	2.485408G	-60.63	2.519272G	-43.58	1


**Result**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.439913G	7.45	-22.55	2.302096G	-56.80	2.399956G	-51.97	2.485408G	-60.63	2.519272G	-43.58	1
2440MHz	Pass	2.439913G	7.45	-22.55	1.627216G	-59.34	2.399976G	-53.26	2.484224G	-61.05	2.558672G	-44.94	1
2480MHz	Pass	2.439913G	7.45	-22.55	1.653264G	-59.64	2.399996G	-48.29	2.483612G	-57.32	2.598073G	-46.29	1

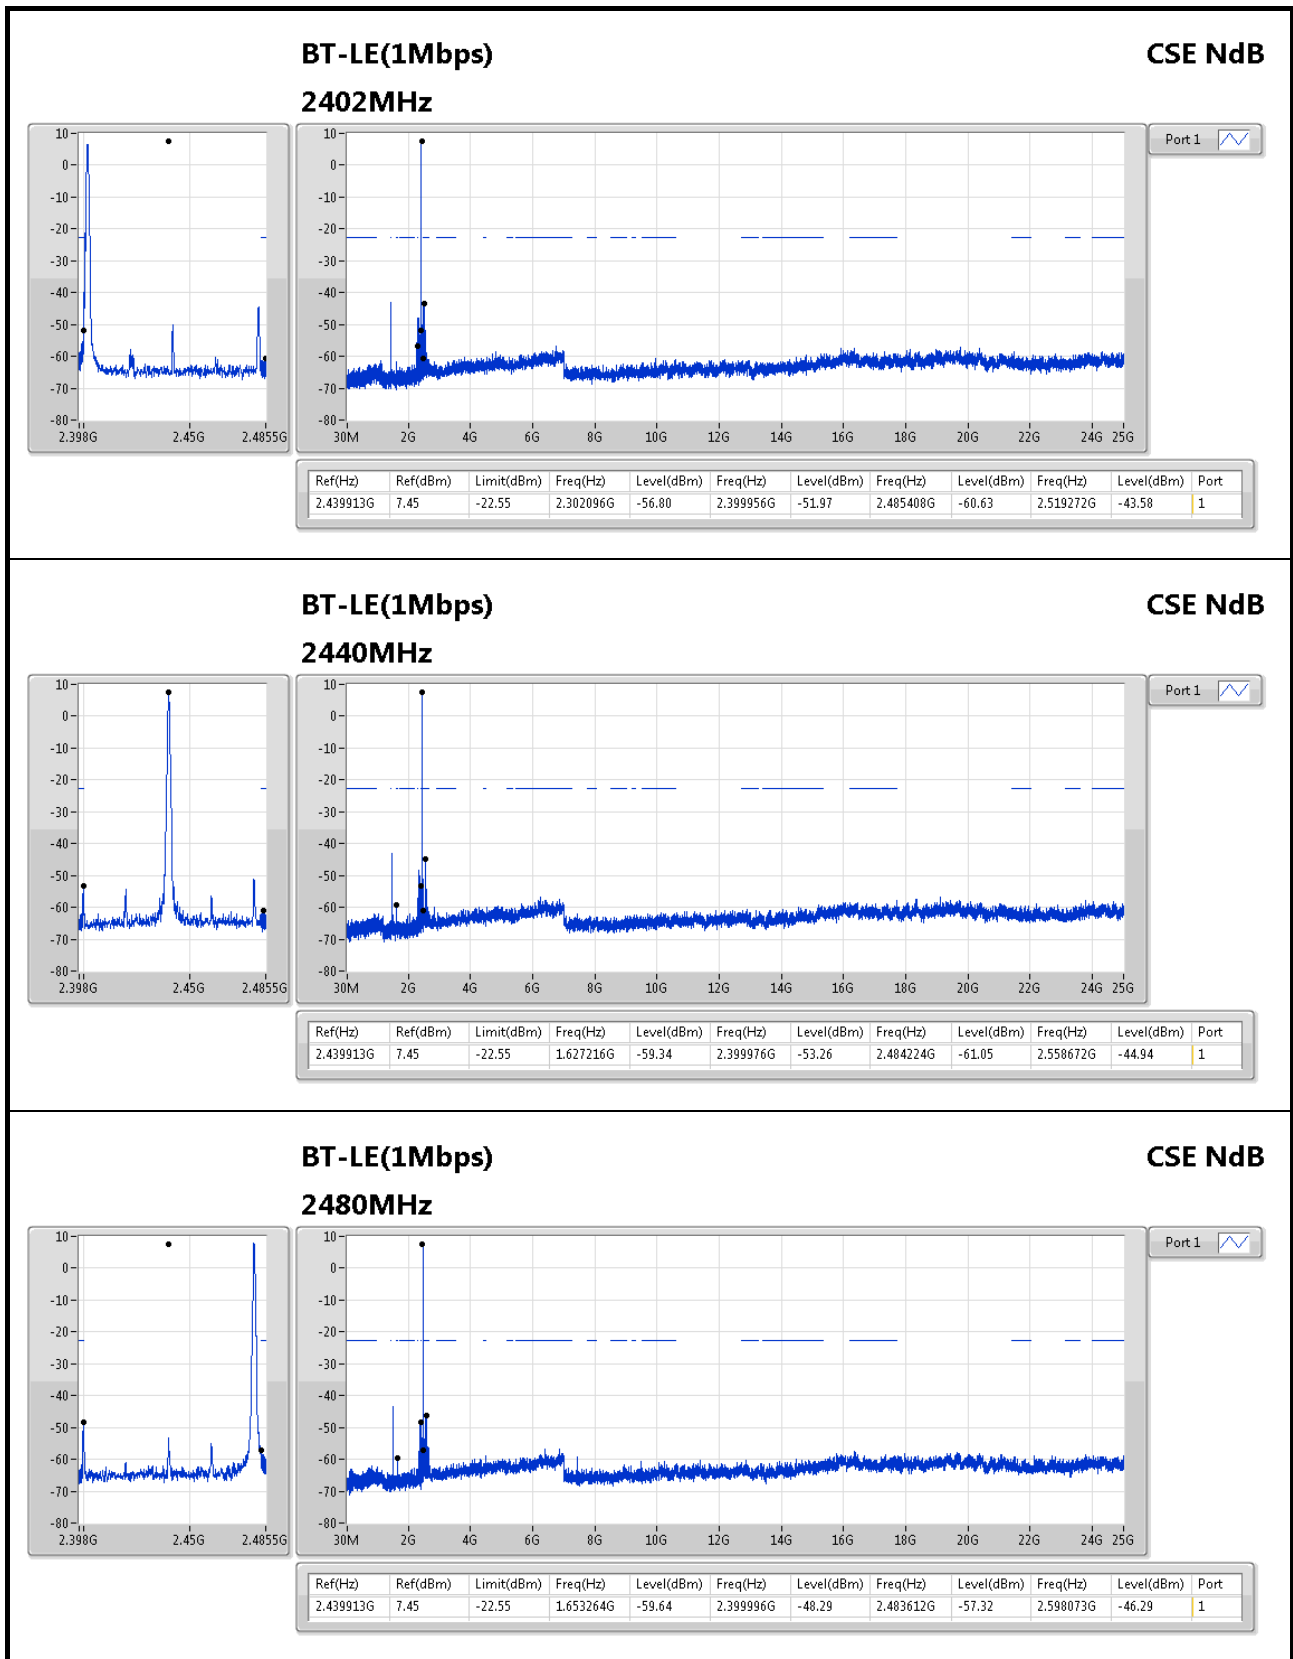




# RSE below 1GHz Result

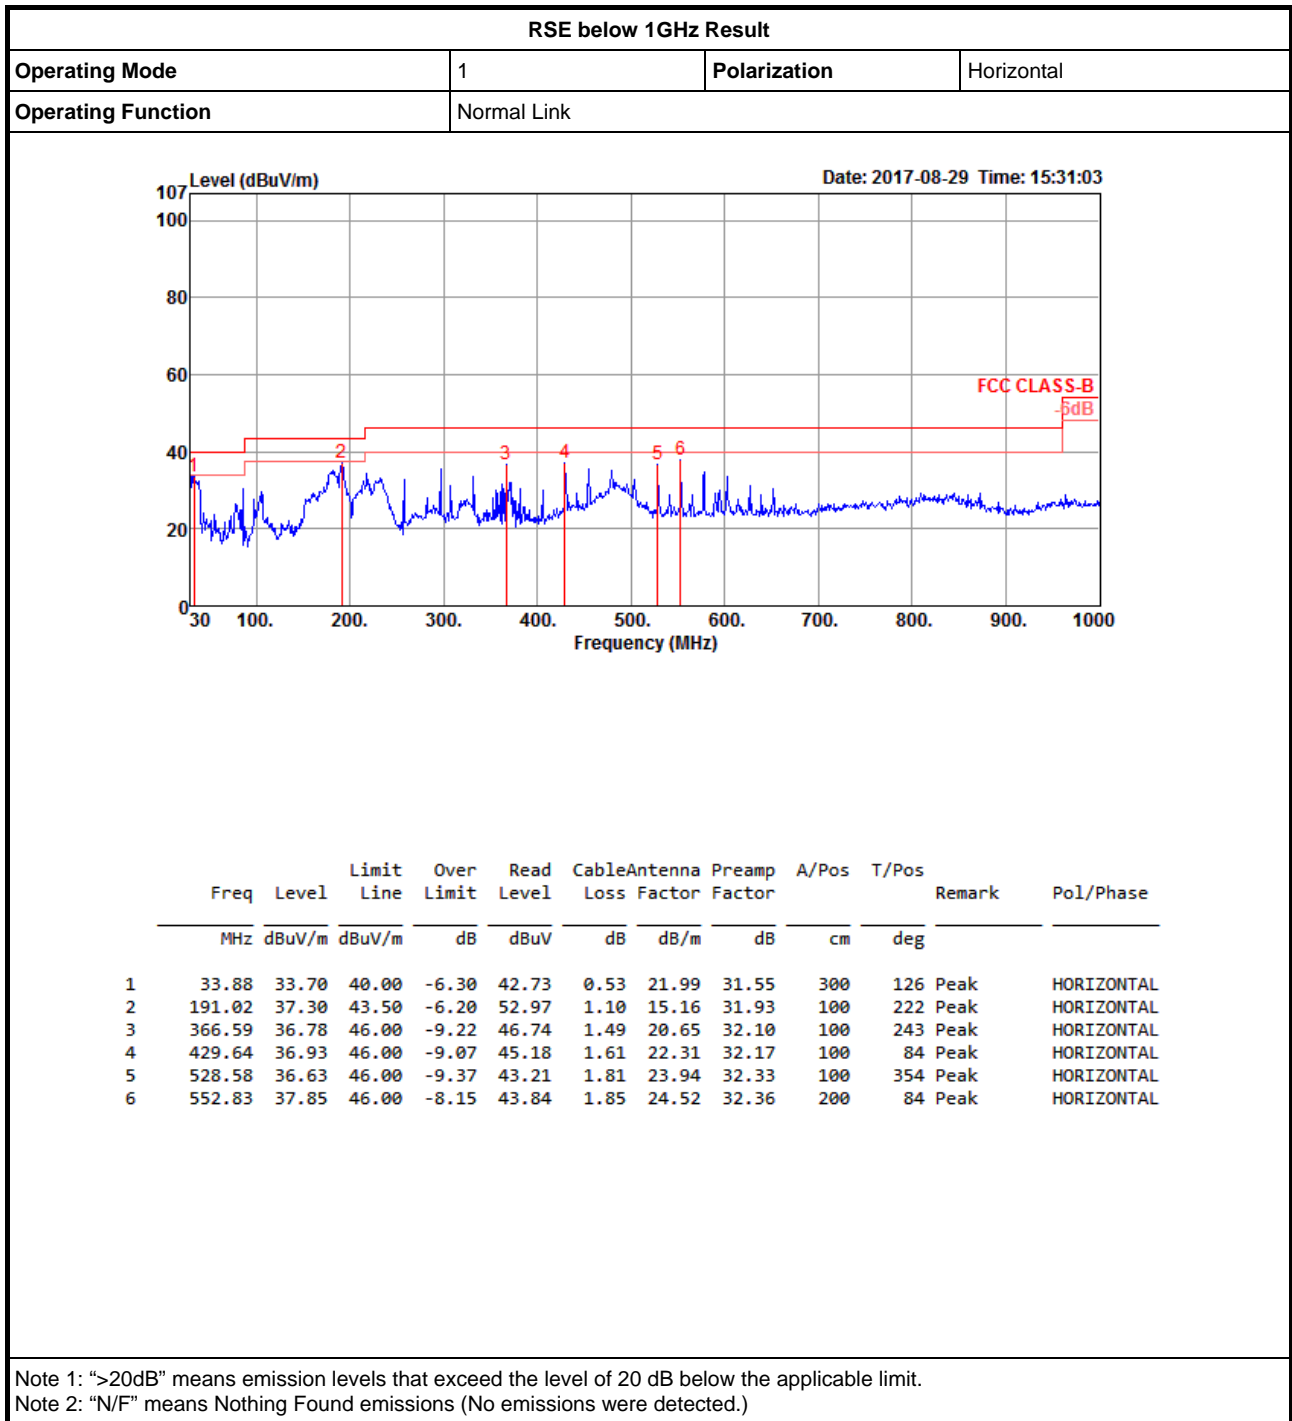



# RSE below 1GHz Result

Appendix F.1

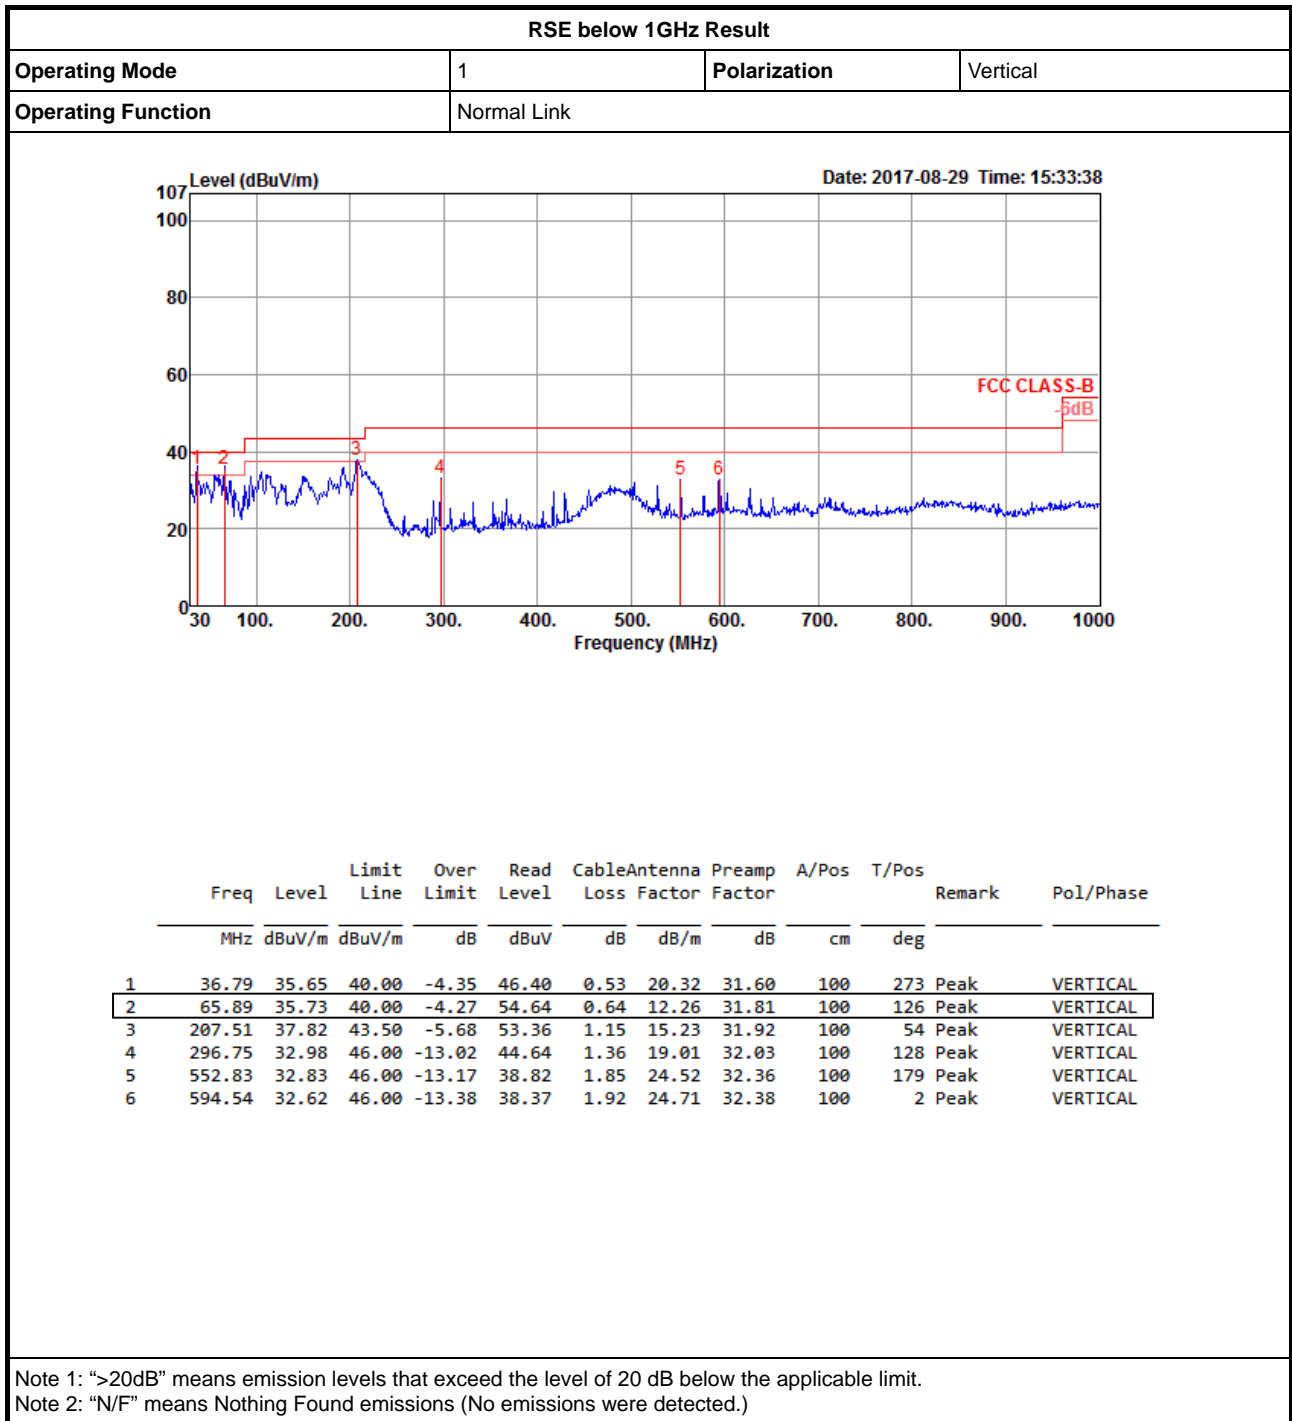




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	AV	2.484G	47.73	54.00	-6.27	32.30	3	H	145	1.75	-



### BT-LE(1Mbps)

### 2402MHz\_TX

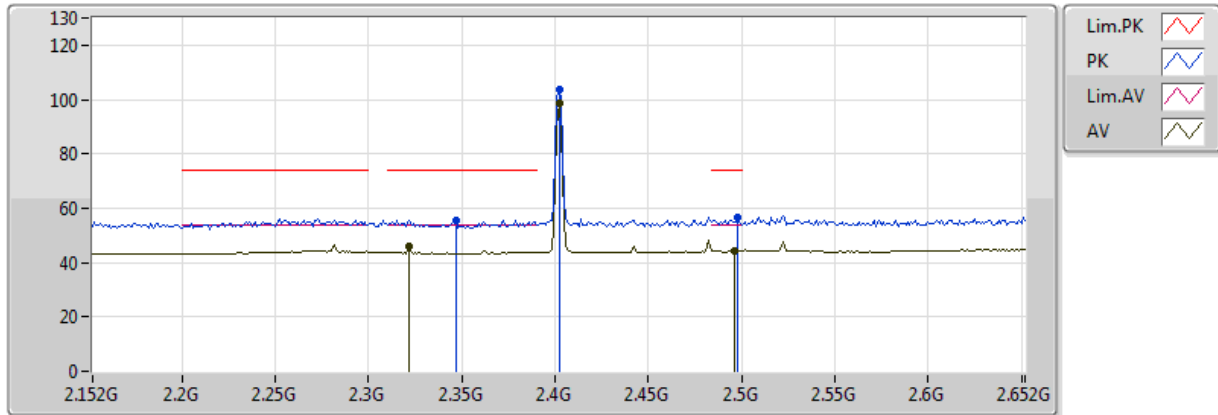


20170825  
EUT Y  
1TX  
Setting 10  
FSP(100056)  
D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.322G	45.94	54.00	-8.06	31.80	3	V	265	1.01	-
AV	2.402G	98.71	Inf	-Inf	32.05	3	V	265	1.01	-
AV	2.496G	44.45	54.00	-9.55	32.34	3	V	265	1.01	-
PK	2.347G	55.51	74.00	-18.49	31.88	3	V	265	1.01	-
PK	2.402G	103.65	Inf	-Inf	32.05	3	V	265	1.01	-
PK	2.498G	56.65	74.00	-17.35	32.34	3	V	265	1.01	-

### BT-LE(1Mbps)

### 2402MHz\_TX

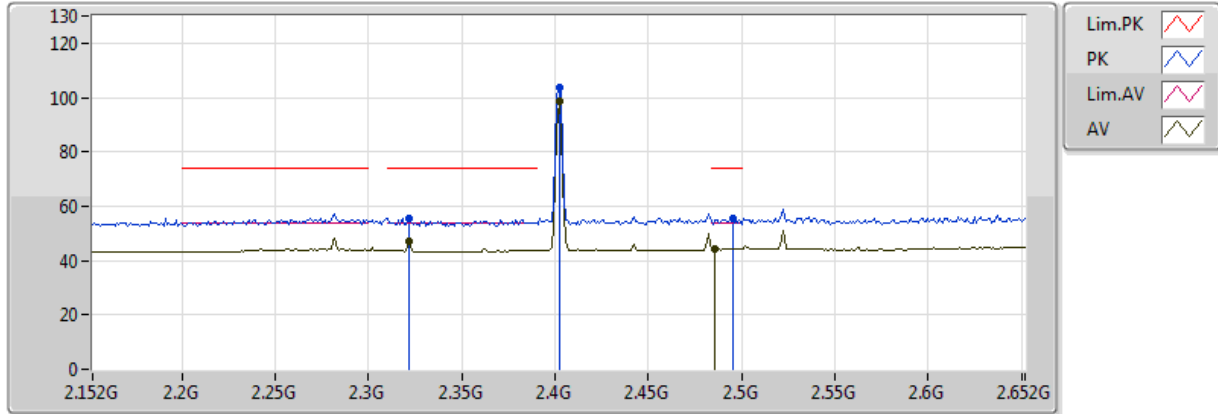


20170825  
EUT Y  
1TX  
Setting 10  
FSP(100056)  
D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.322G	46.86	54.00	-7.14	31.80	3	H	26	1.86	-
AV	2.402G	98.47	Inf	-Inf	32.05	3	H	26	1.86	-
AV	2.486G	44.23	54.00	-9.77	32.31	3	H	26	1.86	-
PK	2.322G	55.40	74.00	-18.60	31.80	3	H	26	1.86	-
PK	2.402G	103.94	Inf	-Inf	32.05	3	H	26	1.86	-
PK	2.495G	55.28	74.00	-18.72	32.33	3	H	26	1.86	-

### BT-LE(1Mbps)

### 2402MHz\_TX

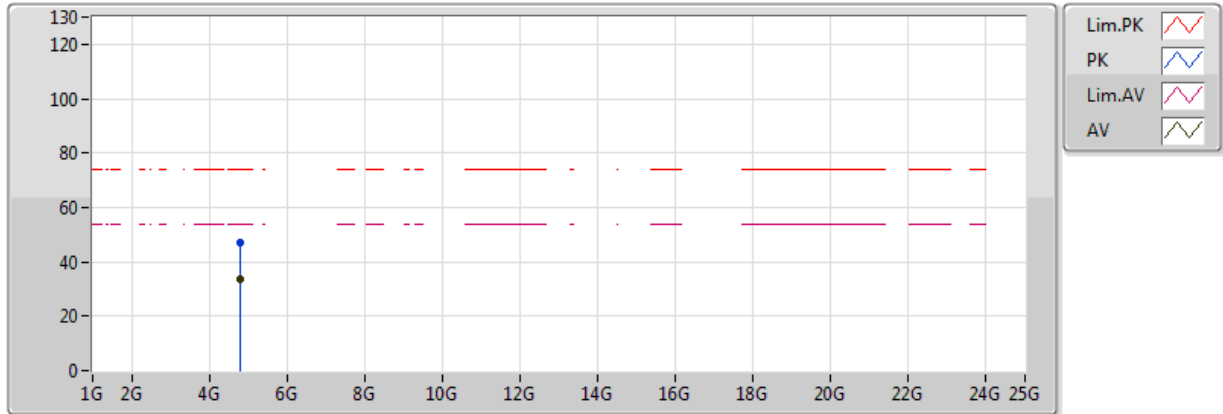


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.8001G	33.81	54.00	-20.19	6.49	3	V	233	2.20	-
PK	4.79806G	46.98	74.00	-27.02	6.48	3	V	233	2.20	-

### BT-LE(1Mbps)

### 2402MHz\_TX

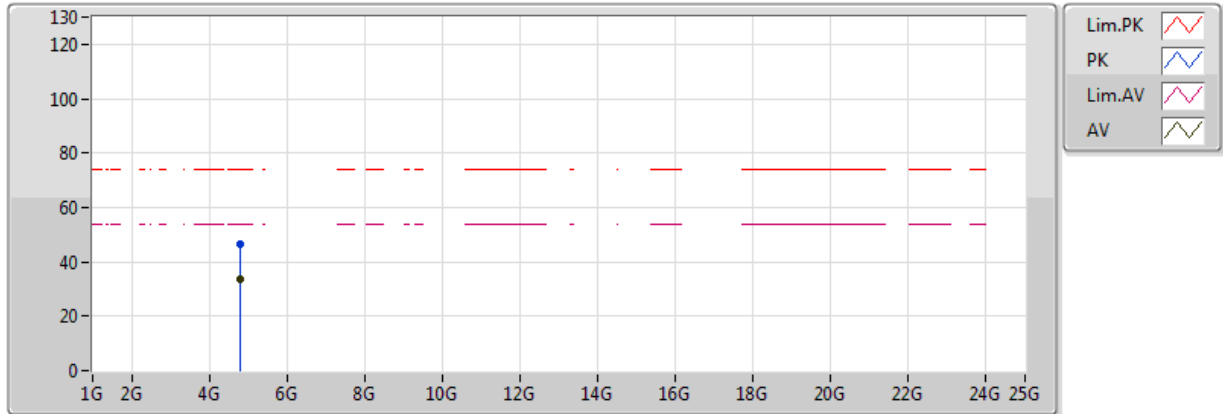


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.7983G	33.65	54.00	-20.35	6.48	3	H	337	1.62	-
PK	4.79236G	46.67	74.00	-27.33	6.47	3	H	337	1.62	-

### BT-LE(1Mbps)

### 2440MHz\_TX

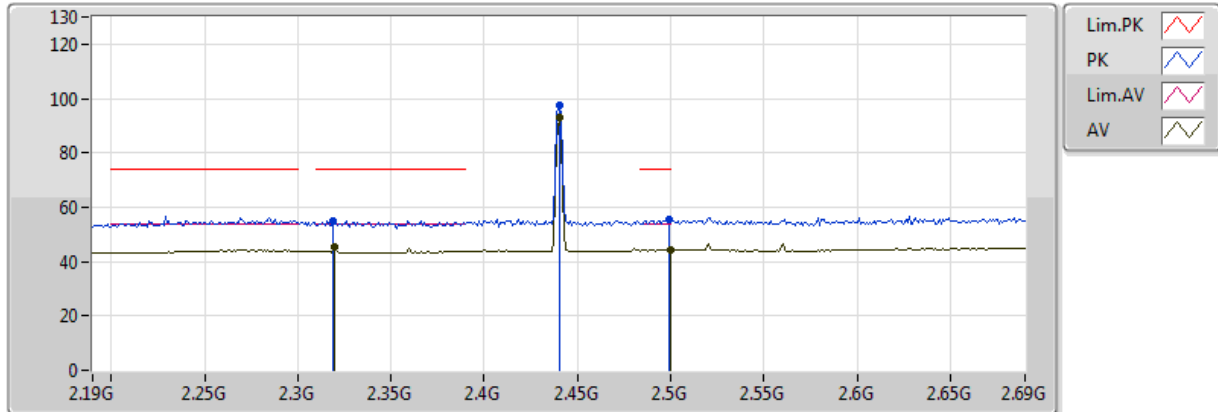


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.32G	45.48	54.00	-8.52	31.79	3	V	138	1.63	-
AV	2.44G	93.01	Inf	-Inf	32.16	3	V	138	1.63	-
AV	2.5G	44.34	54.00	-9.66	32.35	3	V	138	1.63	-
PK	2.319G	55.14	74.00	-18.86	31.79	3	V	138	1.63	-
PK	2.44G	97.47	Inf	-Inf	32.16	3	V	138	1.63	-
PK	2.499G	55.24	74.00	-18.76	32.35	3	V	138	1.63	-

### BT-LE(1Mbps)

### 2440MHz\_TX

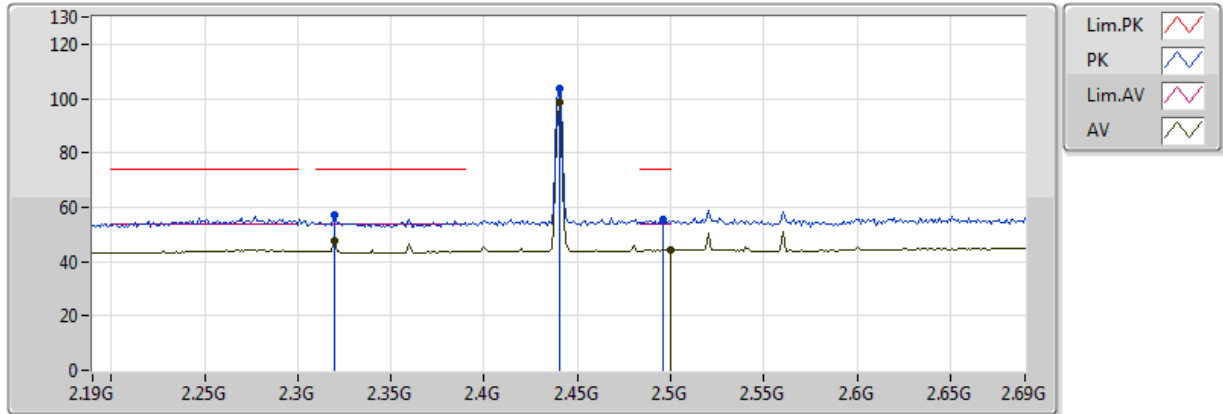


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.32G	47.68	54.00	-6.32	31.79	3	H	24	1.46	-
AV	2.44G	98.38	Inf	-Inf	32.16	3	H	24	1.46	-
AV	2.5G	44.37	54.00	-9.63	32.35	3	H	24	1.46	-
PK	2.32G	57.08	74.00	-16.92	31.79	3	H	24	1.46	-
PK	2.44G	103.69	Inf	-Inf	32.16	3	H	24	1.46	-
PK	2.496G	55.29	74.00	-18.71	32.34	3	H	24	1.46	-

### BT-LE(1Mbps)

### 2440MHz\_TX

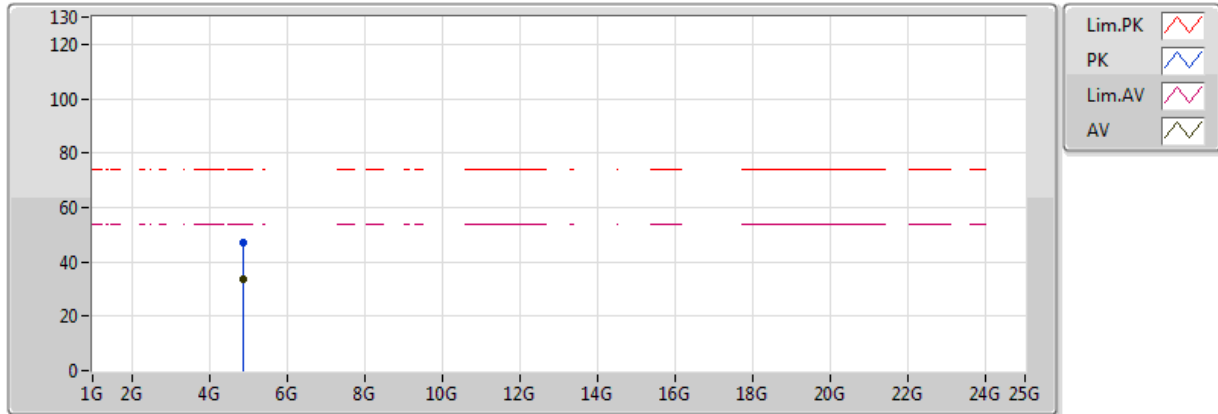


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.89392G	33.72	54.00	-20.28	6.78	3	V	58	2.14	-
PK	4.8662G	47.33	74.00	-26.67	6.70	3	V	58	2.14	-



### BT-LE(1Mbps)

### 2440MHz\_TX

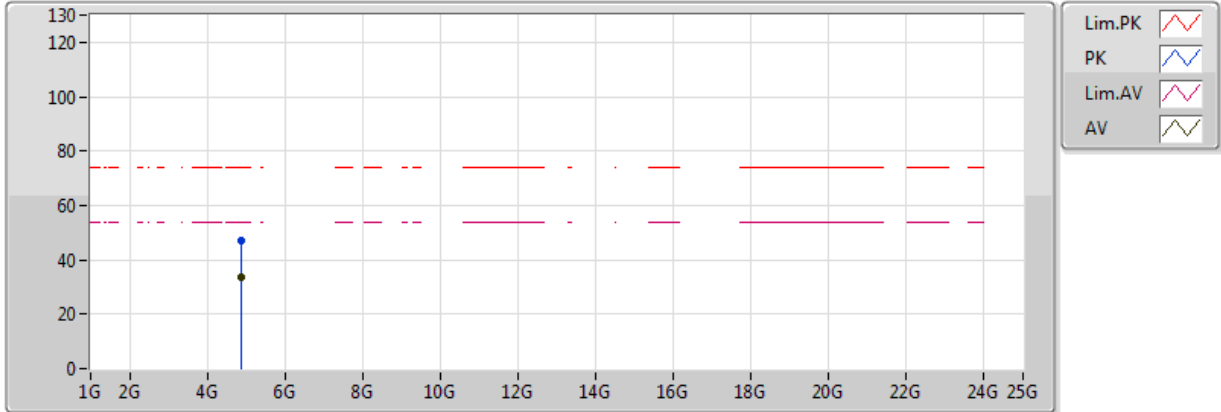


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.89212G	33.62	54.00	-20.38	6.78	3	H	321	2.29	-
PK	4.89326G	46.90	74.00	-27.10	6.78	3	H	321	2.29	-



### BT-LE(1Mbps)

### 2480MHz\_TX

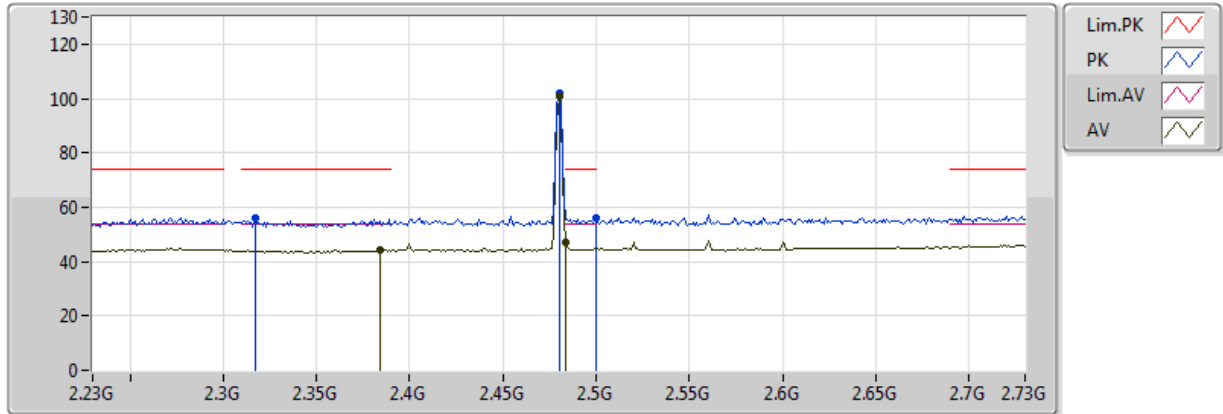


20170825  
EUT Y  
1TX  
Setting 10  
FSP(100056)  
D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.384G	44.20	54.00	-9.80	31.99	3	V	316	1.99	-
AV	2.48G	100.75	Inf	-Inf	32.29	3	V	316	1.99	-
AV	2.484G	46.92	54.00	-7.08	32.30	3	V	316	1.99	-
PK	2.317G	55.88	74.00	-18.12	31.78	3	V	316	1.99	-
PK	2.48G	101.84	Inf	-Inf	32.29	3	V	316	1.99	-
PK	2.5G	55.81	74.00	-18.19	32.35	3	V	316	1.99	-

### BT-LE(1Mbps)

### 2480MHz\_TX

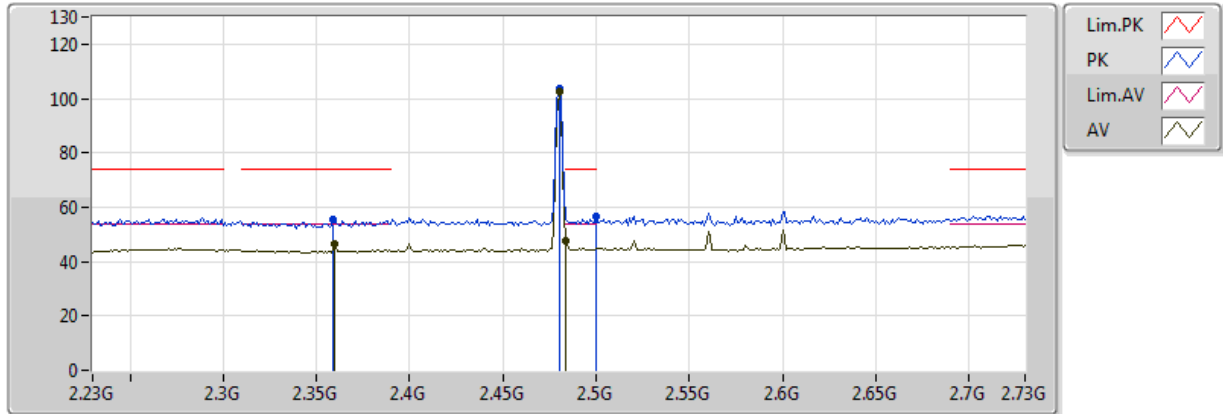


20170825  
EUT Y  
1TX  
Setting 10  
FSP(100056)  
D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.36G	46.45	54.00	-7.55	31.92	3	H	145	1.75	-
AV	2.48G	102.50	Inf	-Inf	32.29	3	H	145	1.75	-
AV	2.484G	47.73	54.00	-6.27	32.30	3	H	145	1.75	-
PK	2.359G	55.52	74.00	-18.48	31.91	3	H	145	1.75	-
PK	2.48G	103.61	Inf	-Inf	32.29	3	H	145	1.75	-
PK	2.5G	56.71	74.00	-17.29	32.35	3	H	145	1.75	-

### BT-LE(1Mbps)

### 2480MHz\_TX

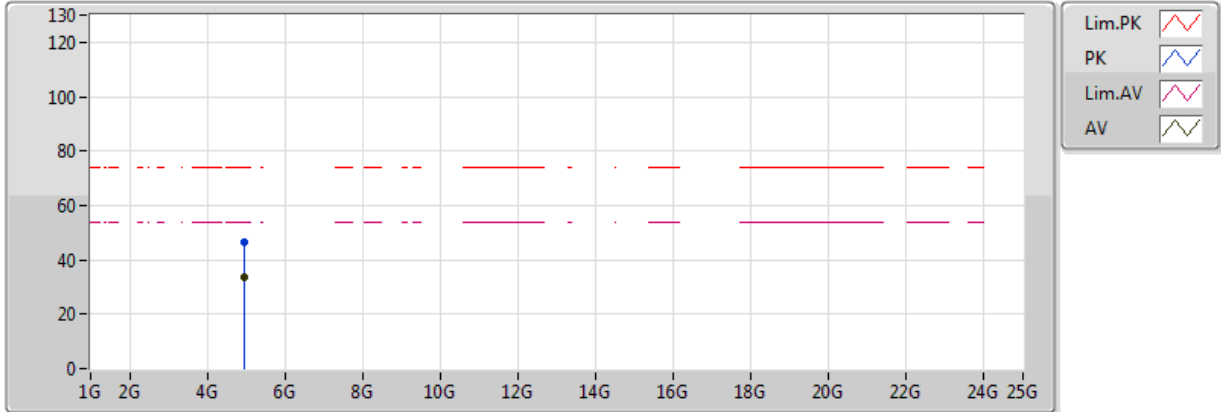


20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.96163G	33.73	54.00	-20.27	6.98	3	V	224	1.72	-
PK	4.95878G	46.24	74.00	-27.76	6.98	3	V	224	1.72	-

### BT-LE(1Mbps)

### 2480MHz\_TX

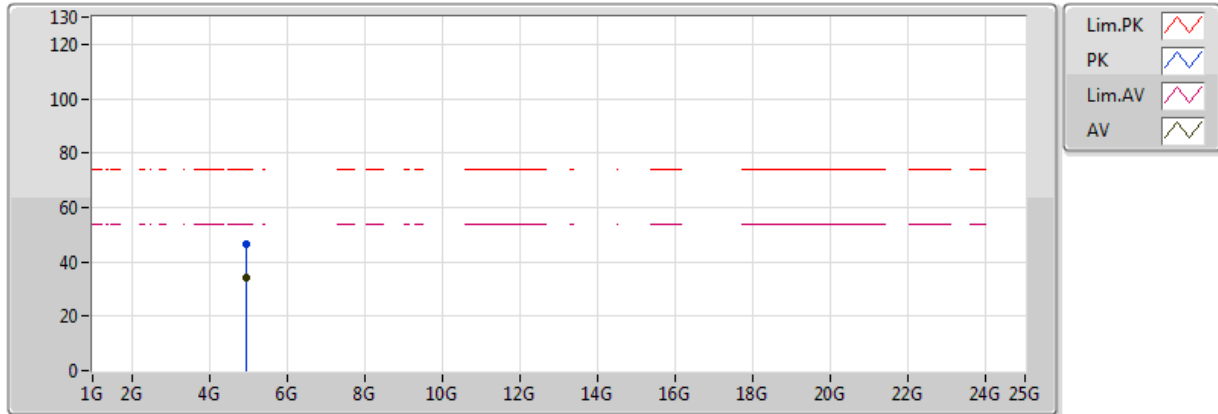

20170825  
 EUT Y  
 1TX  
 Setting 10  
 FSP(100056)  
 D-1

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.95877G	34.01	54.00	-19.99	6.98	3	H	343	1.89	-
PK	4.95762G	46.26	74.00	-27.74	6.97	3	H	343	1.89	-