

FCC Test Report

Report No.: RFBEOP-WTW-P22030407-5

FCC ID: NKR-LS04

Test Model: S501R0-01

Received Date: 2022/3/26

Test Date: 2022/5/25 ~ 2022/5/27

Issued Date: 2022/7/8

Applicant: Wistron NeWeb Corporation

Address: 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /
Designation Number:** 281270 / TW0032



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
3 General Information	6
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Description of Support Units.....	9
3.3.1 Configuration of System under Test.....	9
3.4 General Description of Applied Standards.....	9
4 Test Types and Results	10
4.1 Radiated Emission and Bandedge Measurement.....	10
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	10
4.1.2 Test Instruments.....	11
4.1.3 Test Procedures.....	13
4.1.4 Deviation from Test Standard.....	13
4.1.5 Test Set Up.....	14
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results.....	16
4.2 Conducted Emission Measurement.....	27
4.2.1 Limits of Conducted Emission Measurement.....	27
4.2.2 Test Instruments.....	27
4.2.3 Test Procedures.....	28
4.2.4 Deviation from Test Standard.....	28
4.2.5 Test Setup.....	28
4.2.6 EUT Operating Conditions.....	28
4.2.7 Test Results.....	29
4.3 Channel Bandwidth.....	31
4.3.1 Limits of Channel Bandwidth Measurement.....	31
4.3.2 Test Setup.....	31
4.3.3 Test Instruments.....	31
4.3.4 Test Procedure.....	31
4.3.5 Deviation from Test Standard.....	31
4.3.6 EUT Operating Condition.....	31
4.3.7 Test Results.....	32
5 Pictures of Test Arrangements	33
Appendix – Information on the Testing Laboratories	34

Release Control Record

Issue No.	Description	Date Issued
RFBEOP-WTW-P22030407-5	Original release	2022/7/8

1 Certificate of Conformity

Product: home security gateway

Brand: ADT

Test Model: S501R0-01

Sample Status: Engineering sample

Applicant: Wistron NeWeb Corporation

Test Date: 2022/5/25 ~ 2022/5/27

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.249)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** 2022/7/8
Celine Chou / Senior Specialist

Approved by : Jeremy Lin , **Date:** 2022/7/8
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.249)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -10.94dB at 0.44999MHz.
15.215	Channel Bandwidth	Pass	Meet the requirement of limit.
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	Pass	Meet the requirement of limit. Minimum passing margin is -1.1dB at 916.00MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	home security gateway
Brand	ADT
Test Model	S501R0-01
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter 3.65Vdc from battery
Modulation Type	FSK
Operating Frequency	908.40MHz, 908.42MHz, 916.00MHz
Transfer Rate	40kbps for 908.40MHz 9.6kbps for 908.42MHz 100kbps for 916.00MHz
Number of Channel	3
Field Strength	92.9dBuV/m (3m)
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	Refer to note

Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	ADT	1A101-1215-01	I/P: 100-120Vac, 50Hz-60Hz, 500mA O/P: 12Vdc, 1.5A 1.5m cable without core attached on adapter
Battery	TENERGY	34262	3.65Vdc, 2400mAh, 8.76Wh

2. The EUT contains certified LTE module (Brand: Telit, Model: LE910C4-WWX, FCC ID: R17LE910CXWWX).

3. The antenna information is listed as below.

Antenna No.	Brand	Model	Frequency Range	Antenna Type	Connector Type	Antenna Gain (dBi)
Z-wave	WNC	LS04	908~916MHz	Dipole	ipex(MHF)	3.04

* Due to radiated measurements are made and the antenna gain is already accounted for this device, so provide an antenna datasheet and/or antenna measurement report is not required. The antenna dimensions and pictures (include antenna wire length if have) are stated in EUT photo exhibit.

4. Simultaneously transmission condition.

Condition	Technology
1	WLAN 2.4G + BLE + Zigbee + DECT + WWAN
2	WLAN 2.4G + BLE + Z-wave + DECT + WWAN
3	WLAN 5G + BLE + Zigbee + DECT + WWAN
4	WLAN 5G + BLE + Z-wave + DECT + WWAN

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

3 channels are provided to this EUT:

Channel	Freq. (MHz)
0	908.40
1	908.42
2	916.00

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE<1G	PLC	BW	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **BW**: Channel Bandwidth

Note: Radiated emission (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Operating Frequency	Modulation Type
-	0	908.40MHz	FSK
-	1	908.42MHz	FSK
-	2	916.00MHz	FSK

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Operating Frequency	Modulation Type
-	2	916.00MHz	FSK

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Operating Frequency	Modulation Type
-	2	916.00MHz	FSK

Channel Bandwidth Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Operating Frequency	Modulation Type
-	0	908.40MHz	FSK
-	1	908.42MHz	FSK
-	2	916.00MHz	FSK

Test Condition:


Applicable To	Environmental Conditions	Input Power	Tested By
RE \geq 1G	22 deg. C, 72% RH	120Vac, 60Hz	Greg Lin
RE<1G	22 deg. C, 73% RH	120Vac, 60Hz	Greg Lin
PLC	23 deg. C, 75% RH	120Vac, 60Hz	Greg Lin
BW	25 deg. C, 60% RH	120Vac, 60Hz	Vincent Huang

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Power cable	1	1.5	N	0	Accessory of EUT
2.	USB type C cable	1	0.2	Y	0	Provided by client

3.3.1 Configuration of System under Test

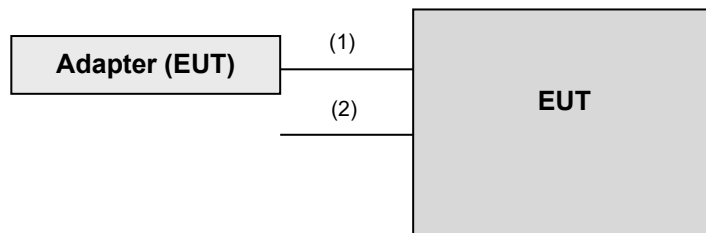

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.249)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Unwanted Emissions below 1 GHz

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Bi-log Broadband Antenna Schwarzbeck	VULB9168	9168-1213	2021/10/27	2022/10/26
Loop Antenna TESEQ	HLA 6121	45745	2021/7/21	2022/7/20
Loop Antenna EMCI	EM-6879	269	2021/9/16	2022/9/15
Pre_Amplifier EMCI	EMC330N	980782	2022/1/17	2023/1/16
Pre-amplifier EMCI	EMC001340	980201	2021/9/15	2022/9/14
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2022/1/15	2023/1/14
	EMCCFD400-NM-NM-500	201233	2022/1/17	2023/1/16
	EMCCFD400-NM-NM-3000	201235	2022/1/17	2023/1/16
	EMCCFD400-NM-NM-9000	201236	2022/1/17	2023/1/16
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Spectrum Analyzer R&S	FSW43	101866	2022/1/14	2023/1/13
Test Receiver R&S	ESR3+	102782	2021/12/10	2022/12/9
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in WM Chamber 8.

Unwanted Emissions above 1 GHz

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Horn Antenna RFSPIN	DRH18-E	210103A18E	2021/11/14	2022/11/13
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2021/11/14	2022/11/13
Pre_Amplifier EMCI	EMC118A45SE	980808	2021/12/30	2022/12/29
	EMC184045SE	980788	2022/1/17	2023/1/16
RF Coaxial Cable EMCI	EMC104-SM-SM-1000	210102	2022/1/17	2023/1/16
	EMC104-SM-SM-3000	201231	2022/1/17	2023/1/16
	EMC104-SM-SM-9000	201243	2022/1/17	2023/1/16
	EMC101G-KM-KM-5000	201260	2022/1/17	2023/1/16
	EMC101G-KM-KM-3000	201257	2022/1/17	2023/1/16
	EMC101G-KM-KM-2000	201254	2022/1/17	2023/1/16
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Spectrum Analyzer R&S	FSW43	101866	2022/1/14	2023/1/13
Test Receiver R&S	ESR3+	102782	2021/12/10	2022/12/9
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 8.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

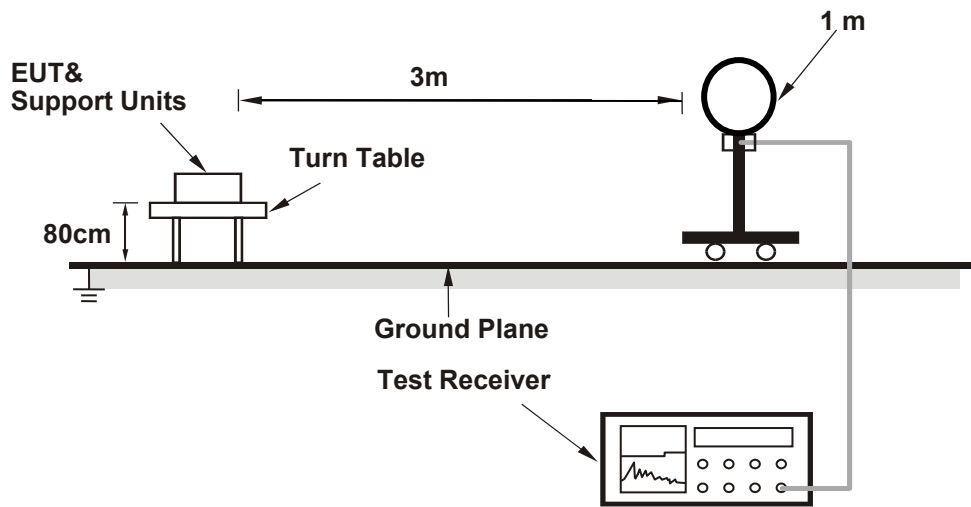

For Radiated emission 30MHz to 1GHz

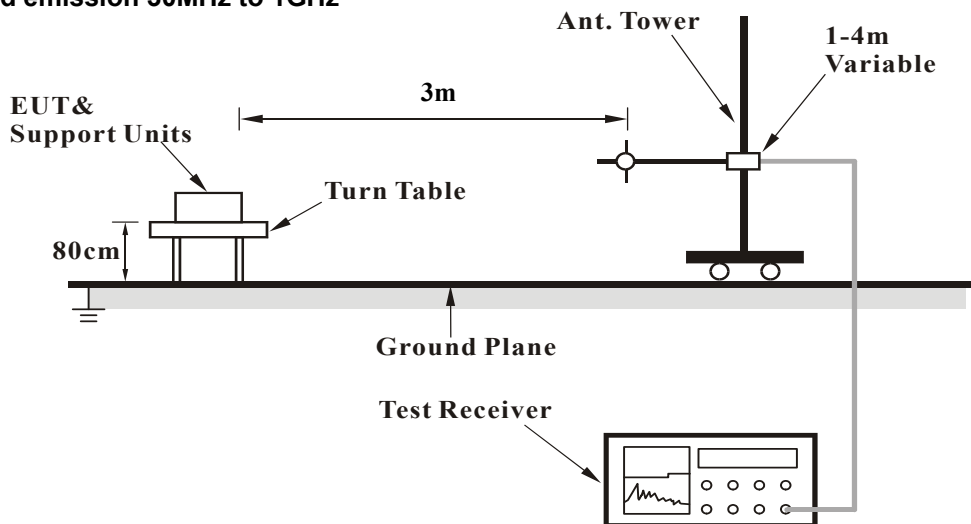

For Radiated emission above 1GHz

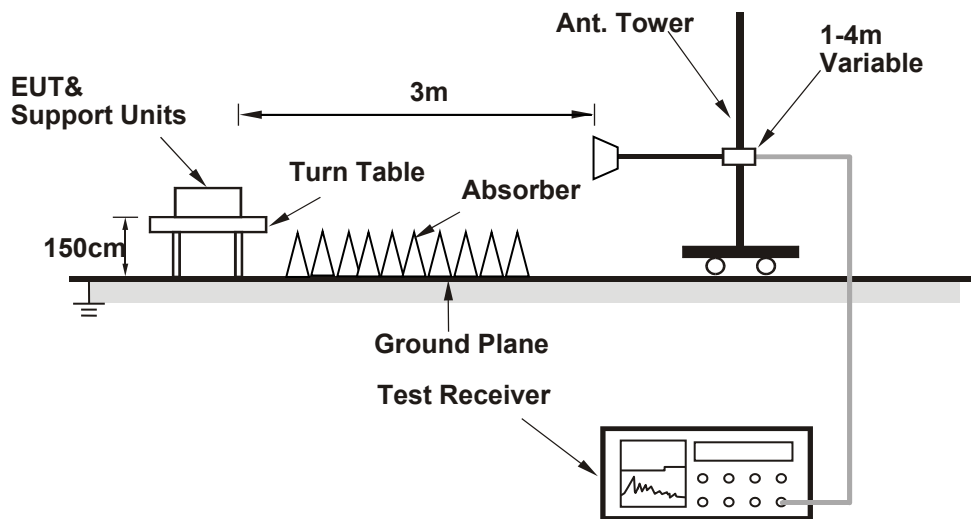

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.


4.1.7 Test Results

RF Mode	TX Z-wave	Channel	CH 0 : 908.4 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	35.5 QP	46.0	-10.5	1.33 H	113	5.7	29.8
2	*908.40	85.3 QP	94.0	-8.7	1.33 H	113	55.2	30.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 902MHz ~ 928MHz.
5. " * ": Fundamental frequency.

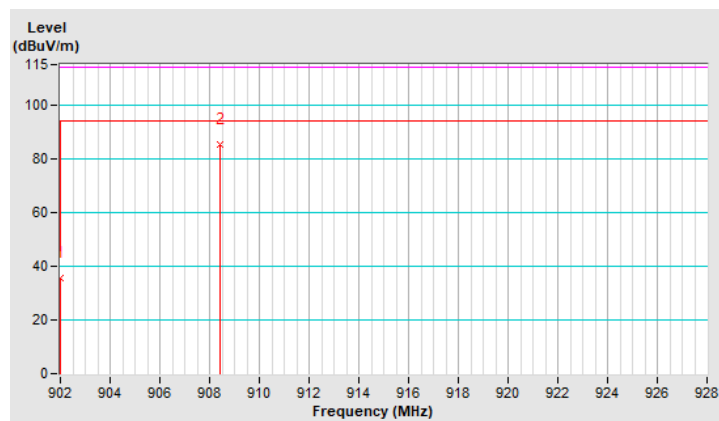


RF Mode	TX Z-wave	Channel	CH 0 : 908.4 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	36.0 QP	46.0	-10.0	1.08 V	176	6.2	29.8
2	*908.40	92.7 QP	94.0	-1.3	1.08 V	176	62.6	30.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 902MHz ~ 928MHz.
5. " * " : Fundamental frequency.

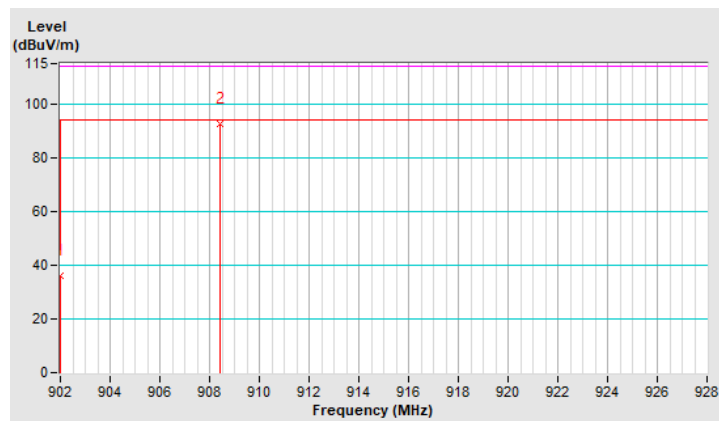


RF Mode	TX Z-wave	Channel	CH 1 : 908.42 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	35.5 QP	46.0	-10.5	1.27 H	116	5.7	29.8
2	*908.42	85.0 QP	94.0	-9.0	1.27 H	116	54.9	30.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 902MHz ~ 928MHz.
5. " * " : Fundamental frequency.

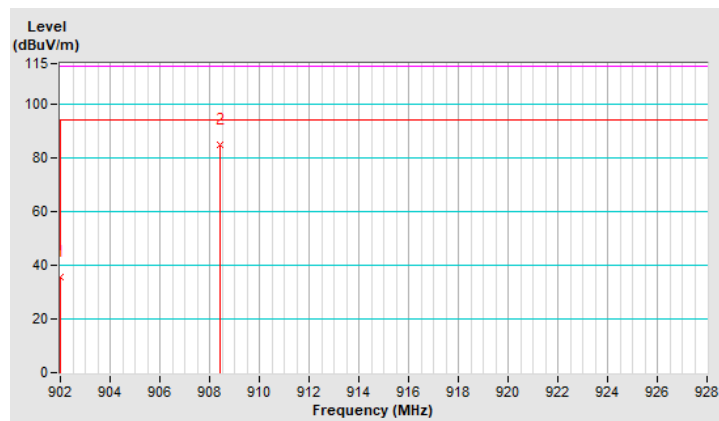


RF Mode	TX Z-wave	Channel	CH 1 : 908.42 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	36.0 QP	46.0	-10.0	1.00 V	178	6.2	29.8
2	*908.42	92.4 QP	94.0	-1.6	1.00 V	178	62.3	30.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 902MHz ~ 928MHz.
5. " * ": Fundamental frequency.

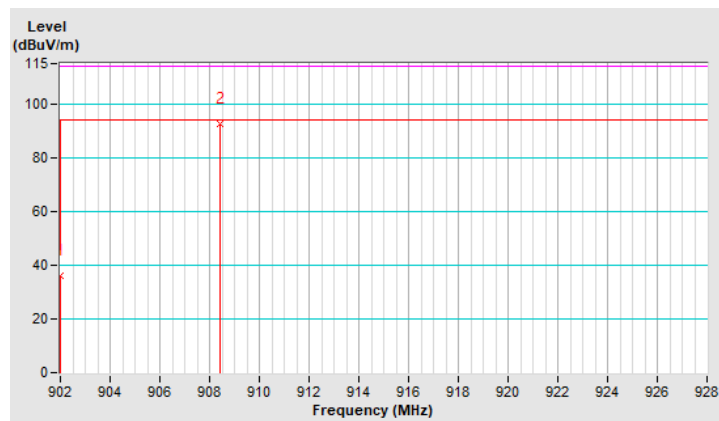


RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*916.00	85.4 QP	94.0	-8.6	1.36 H	114	55.2	30.2
2	928.00	35.7 QP	46.0	-10.3	1.36 H	114	5.3	30.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 902MHz ~ 928MHz.
5. " * " : Fundamental frequency.

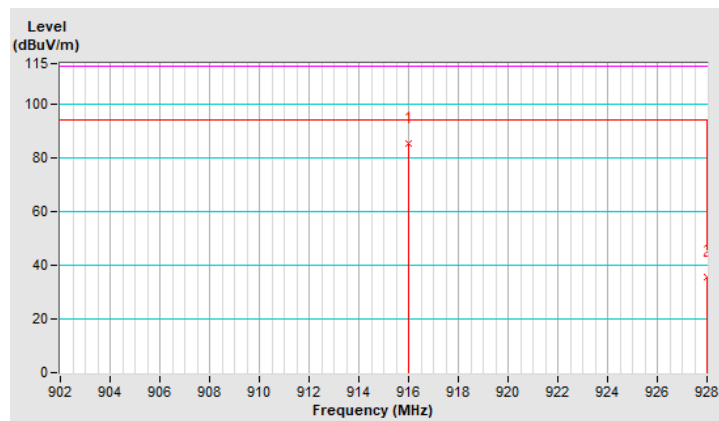


RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*916.00	92.9 QP	94.0	-1.1	1.10 V	176	62.7	30.2
2	928.00	36.1 QP	46.0	-9.9	1.10 V	176	5.7	30.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 902MHz ~ 928MHz.
5. " * " : Fundamental frequency.

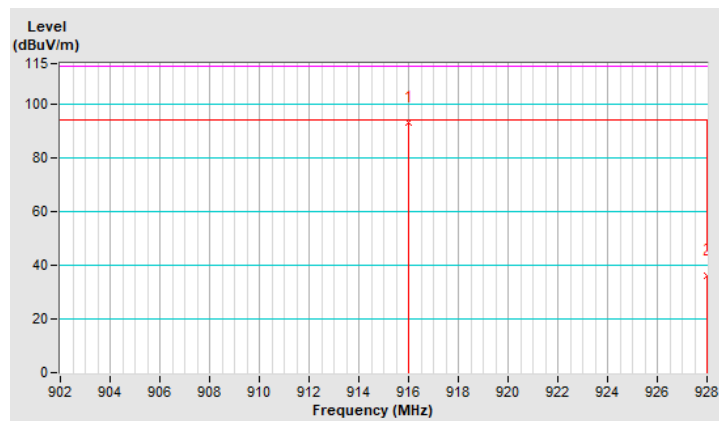

Above 1GHz Data

RF Mode	TX Z-wave	Channel	CH 0 : 908.4 MHz
Frequency Range	1 GHz ~ 10 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1816.80	37.0 PK	74.0	-37.0	2.34 H	312	44.7	-7.7
2	1816.80	25.1 AV	54.0	-28.9	2.34 H	312	32.8	-7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1816.80	38.1 PK	74.0	-35.9	1.63 V	251	45.8	-7.7
2	1816.80	25.6 AV	54.0	-28.4	1.63 V	251	33.3	-7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

RF Mode	TX Z-wave	Channel	CH 1 : 908.42 MHz
Frequency Range	1 GHz ~ 10 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1816.84	37.1 PK	74.0	-36.9	2.28 H	306	44.8	-7.7
2	1816.84	25.1 AV	54.0	-28.9	2.28 H	306	32.8	-7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1816.84	37.9 PK	74.0	-36.1	1.59 V	243	45.6	-7.7
2	1816.84	25.5 AV	54.0	-28.5	1.59 V	243	33.2	-7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	1 GHz ~ 10 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1832.00	37.2 PK	74.0	-36.8	2.24 H	315	44.9	-7.7
2	1832.00	25.2 AV	54.0	-28.8	2.24 H	315	32.9	-7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1832.00	38.1 PK	74.0	-35.9	1.68 V	237	45.8	-7.7
2	1832.00	25.8 AV	54.0	-28.2	1.68 V	237	33.5	-7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.


Below 1GHz worst-case data

RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.55	21.5 QP	40.0	-18.5	1.00 H	27	34.9	-13.4
2	170.65	30.5 QP	43.5	-13.0	1.25 H	2	44.3	-13.8
3	194.90	34.6 QP	43.5	-8.9	1.50 H	213	51.1	-16.5
4	299.66	31.5 QP	46.0	-14.5	1.25 H	207	44.5	-13.0
5	427.70	28.4 QP	46.0	-17.6	1.00 H	231	38.1	-9.7
6	853.53	29.0 QP	46.0	-17.0	1.25 H	258	31.1	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

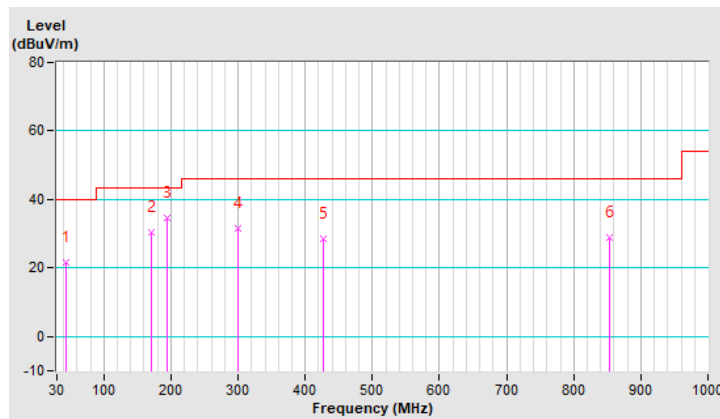


RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	33.5 QP	40.0	-6.5	1.00 V	18	47.7	-14.2
2	114.39	28.2 QP	43.5	-15.3	1.25 V	317	44.1	-15.9
3	194.90	26.4 QP	43.5	-17.1	1.25 V	120	42.9	-16.5
4	299.66	25.4 QP	46.0	-20.6	1.50 V	212	38.4	-13.0
5	411.21	27.9 QP	46.0	-18.1	1.00 V	198	38.1	-10.2
6	884.57	29.5 QP	46.0	-16.5	1.50 V	266	31.3	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

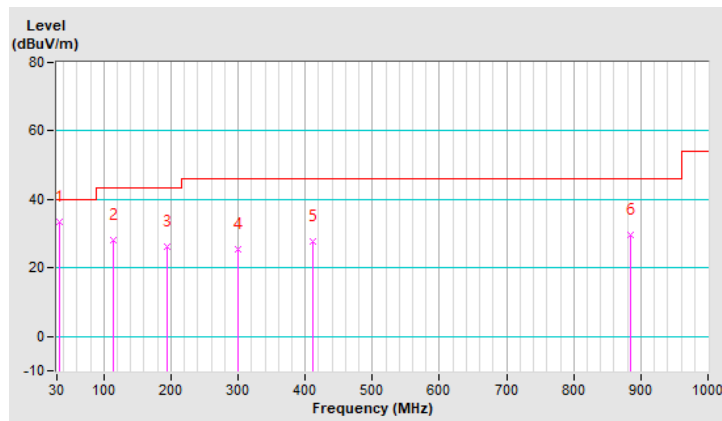

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
DC LISN R&S	ESH3-Z6	100219	2021/7/25	2022/7/24
		844950/018	2021/7/25	2022/7/24
DC-LISN SCHWARZBECK MESS-ELETRONIK	NNBM 8126G	8126G-069	2021/11/10	2022/11/9
LISN ROHDE & SCHWARZ	ENV216	101826	2022/3/14	2023/3/13
LISN R&S	ESH3-Z5	100311	2021/9/7	2022/9/6
	ENV216	100072	2021/6/16	2022/6/15
RF Coaxial Cable WOKEN	5D-FB	Cable-cond1-01	2022/1/15	2023/1/14
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
Test Receiver Rohde&Schwarz	ESCI	100613	2021/12/3	2022/12/2
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2021/8/20	2022/8/19

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).

3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

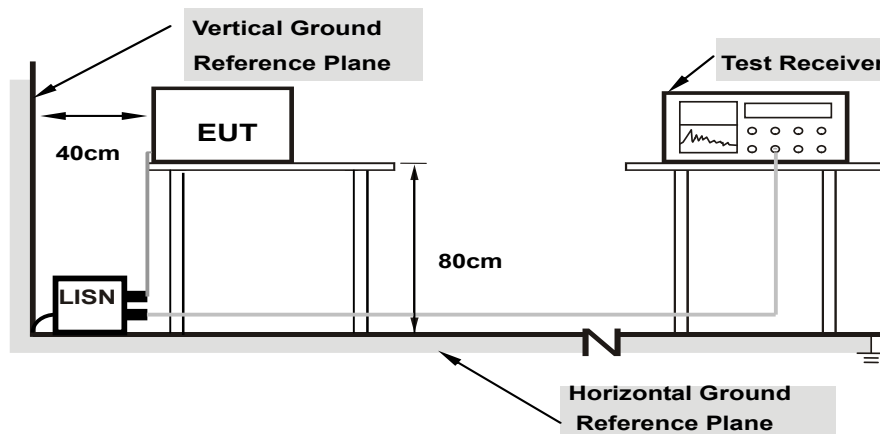

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 75% RH
Tested By	Greg Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19400	9.72	33.47	15.73	43.19	25.45	63.86	53.86	-20.67	-28.41
2	0.24164	9.74	25.63	11.27	35.37	21.01	62.04	52.04	-26.67	-31.03
3	0.33767	9.78	27.86	15.47	37.64	25.25	59.26	49.26	-21.62	-24.01
4	0.44999	9.80	28.90	24.57	38.70	34.37	56.88	46.88	-18.18	-12.51
5	1.29000	9.86	14.98	8.38	24.84	18.24	56.00	46.00	-31.16	-27.76
6	4.47000	9.96	12.56	3.34	22.52	13.30	56.00	46.00	-33.48	-32.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value.
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

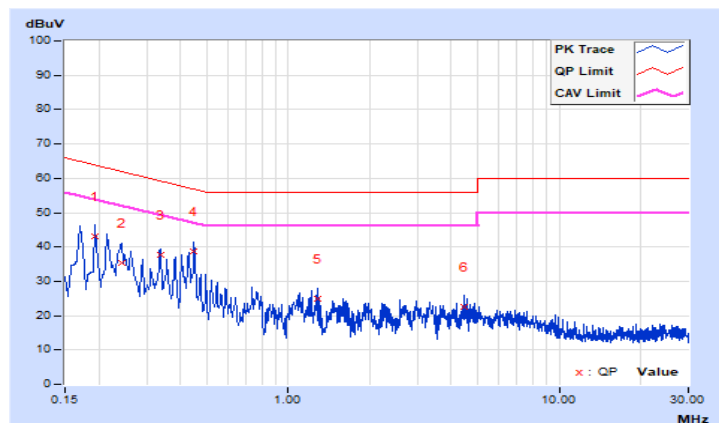


RF Mode	TX Z-wave	Channel	CH 2 : 916 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 75% RH
Tested By	Greg Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18600	9.71	28.67	13.74	38.38	23.45	64.21	54.21	-25.83	-30.76
2	0.21400	9.73	31.49	15.39	41.22	25.12	63.05	53.05	-21.83	-27.93
3	0.23800	9.74	29.02	13.71	38.76	23.45	62.17	52.17	-23.41	-28.72
4	0.44999	9.81	28.38	26.13	38.19	35.94	56.88	46.88	-18.69	-10.94
5	1.21400	9.87	14.83	8.35	24.70	18.22	56.00	46.00	-31.30	-27.78
6	4.16200	9.97	13.15	3.45	23.12	13.42	56.00	46.00	-32.88	-32.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value.
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

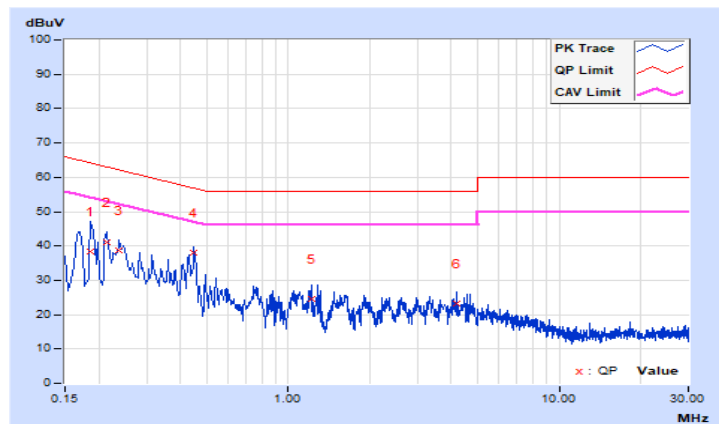


4.3 Channel Bandwidth

4.3.1 Limits of Channel Bandwidth Measurement

The channel bandwidth within the frequency band designated in the rule section under which the equipment is operated.

4.3.2 Test Setup



4.3.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	100979	2022/3/25	2023/3/24

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
0	908.40	0.090
1	908.42	0.070
2	916.00	0.120

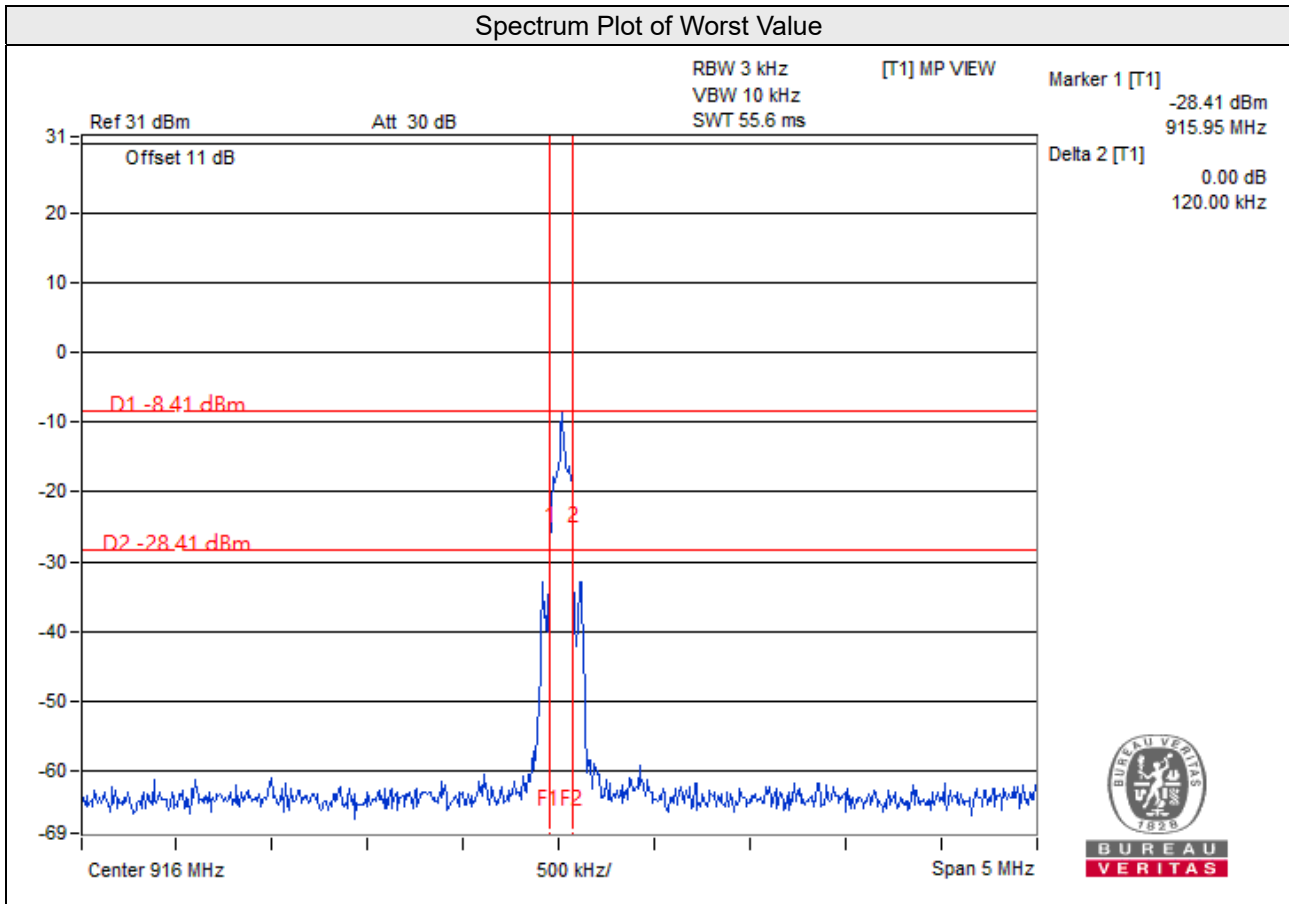

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---