

3.1.4 Test Data:

Please refer to ISL report 04LR018FC part 1.


3.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

3.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

3.2.2 Test Setup

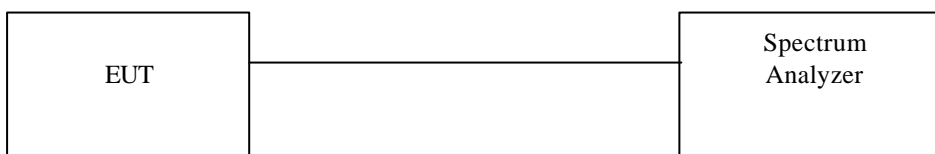

3.2.3 Test Data:

Please refer to ISL report 04LR018FC part 1

3.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

3.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

3.3.2 Test Setup



3.3.3 Test Data

Please refer to ISL report 04LR018FC part 1

3.4 Radiated Emission Measurement [Section [15.247(c)(4)]

3.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

3.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

3.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

3.4.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator: Mailes Hsieh

Humidity (%): 46

Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
99.84	22.11	10.27	3.02	0.00	35.39	43.50	-8.11	150.00	11.00
198.78	25.21	8.86	4.18	0.00	38.25	43.50	-5.25	150.00	49.00
232.73	27.08	9.33	4.50	0.00	40.90	46.00	-5.10	200.00	65.00
298.69	21.99	13.57	4.69	0.00	40.26	46.00	-5.74	100.00	241.00
325.85	18.52	13.96	4.76	0.00	37.24	46.00	-8.76	100.00	32.00
364.65	22.62	14.80	5.07	0.00	42.48	46.00	-3.52	200.00	257.00
397.63	19.98	15.92	5.30	0.00	41.20	46.00	-4.80	150.00	273.00
431.58	18.73	16.25	5.61	0.00	40.59	46.00	-5.41	100.00	208.00
464.56	16.59	16.78	5.87	0.00	39.24	46.00	-6.76	100.00	65.00
563.5	13.96	19.05	6.56	0.00	39.57	46.00	-6.43	100.00	158.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator: Mailes Hsieh

Humidity (%): 46

Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
139.61	17.62	10.44	3.56	0.00	31.62	43.50	-11.88	100.00	288.00
232.73	20.98	9.33	4.50	0.00	34.81	46.00	-11.19	150.00	222.00
364.65	14.98	14.80	5.07	0.00	34.85	46.00	-11.15	100.00	238.00
431.58	12.94	16.25	5.61	0.00	34.80	46.00	-11.20	150.00	271.00
497.54	14.04	17.64	6.04	0.00	37.71	46.00	-8.29	100.00	353.00
564.47	8.10	19.04	6.57	0.00	33.71	46.00	-12.29	250.00	255.00
644.01	8.85	19.08	7.01	0.00	34.94	46.00	-11.06	200.00	304.00
652.74	13.60	19.09	7.05	0.00	39.74	46.00	-6.26	150.00	304.00
662.44	9.66	19.08	7.07	0.00	35.81	46.00	-10.19	150.00	304.00
863.23	7.37	20.55	8.23	0.00	36.15	46.00	-9.85	150.00	50.00

NOTE: During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

3.4.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator: Mailes Hsieh

 RBW: 1 MHz
 Humidity (%): 46
 Temperature (C): 25

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2341.16	63.32	30.93	2.59	46.21	50.64	54.00	-3.36	101	150
2503.50	62.60	30.90	2.82	46.21	50.11	54.00	-3.89	102	201
3751.75	41.45	31.85	2.12	46.38	29.04	54.00	-24.96	102	164
4821.68	37.35	34.92	1.28	46.88	26.67	54.00	-27.33	100	18
8396.60	34.26	41.47	3.31	42.73	36.30	54.00	-17.70	101	162
9469.53	32.70	40.90	3.22	42.47	34.34	54.00	-19.66	102	11

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator: Mailes Hsieh

 RBW: 1 MHz
 Humidity (%): 46
 Temperature (C): 25

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2126.37	45.84	30.97	2.29	46.20	32.91	54.00	-21.09	100	83
2373.63	58.08	30.93	2.64	46.21	45.44	54.00	-8.56	101	160
2608.39	45.35	30.94	2.82	46.29	32.82	54.00	-21.18	102	234
3793.71	48.48	31.91	2.13	46.33	36.19	54.00	-17.81	102	153
4821.68	42.24	34.92	1.28	46.88	31.56	54.00	-22.44	100	18
7233.77	44.48	39.47	3.15	46.21	40.90	54.00	-13.10	101	143

Note:

“ * ”: Fundamental Frequency

“**”: Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“---“: No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level+Correction Factor < Limit - 6 dB

Margin=Corrected Amplitude – Limit

Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2353.65	63.12	30.93	2.61	46.21	50.45	54.00	-3.55	101	154
2525.97	62.70	30.91	2.82	46.23	50.20	54.00	-3.80	102	208
4087.41	40.07	32.46	2.04	46.20	28.38	54.00	-25.62	102	91
4870.63	38.30	35.11	1.25	46.93	27.73	54.00	-26.27	100	13
7305.69	37.95	39.59	3.20	46.18	34.55	54.00	-19.45	101	154
8702.30	35.05	41.38	3.30	42.62	37.10	54.00	-16.90	102	90

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2398.60	62.41	30.92	2.68	46.21	49.80	54.00	-4.20	101	168
2775.72	46.66	31.01	2.82	46.41	34.08	54.00	-19.92	102	287
3793.71	47.76	31.91	2.13	46.33	35.46	54.00	-18.54	102	153
4870.63	48.04	35.11	1.25	46.93	37.47	54.00	-16.53	100	13
7305.69	46.72	39.59	3.20	46.18	43.33	54.00	-10.67	101	154
12178.8	32.60	42.09	3.71	42.81	35.59	54.00	-18.41	100	132

Note:

“ * ”: Fundamental Frequency

“* * ”: Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“ --- ”: No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level+Correction Factor < Limit - 6 dB

Margin=Corrected Amplitude - Limit

Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2378.62	62.70	30.92	2.65	46.21	50.06	54.00	-3.94	101	162
2530.97	63.08	30.91	2.82	46.23	50.58	54.00	-3.42	102	210
4923.08	45.42	35.31	1.23	46.97	34.98	54.00	-19.02	100	8
3751.75	40.30	31.85	2.12	46.38	27.89	54.00	-26.11	102	164
7377.62	44.00	39.70	3.24	46.14	40.80	54.00	-13.20	101	164
8744.26	34.77	41.31	3.28	42.66	36.70	54.00	-17.30	102	80

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2298.70	46.05	30.94	2.53	46.21	33.32	54.00	-20.68	101	137
2401.10	52.14	30.92	2.68	46.21	39.53	54.00	-14.47	101	169
2770.73	49.02	31.01	2.82	46.41	36.44	54.00	-17.56	102	285
4923.08	50.98	35.31	1.23	46.97	40.55	54.00	-13.45	100	8
7377.62	48.83	39.70	3.24	46.14	45.63	54.00	-8.37	101	164
12304.7	31.93	41.93	3.76	42.86	34.76	54.00	-19.24	100	165

Note:

“ * ”: Fundamental Frequency

“***”: Not in the restricted band, Limit level=Fundamental Emission-20dB

“pk”: peak reading

“av”: average reading

“---”: No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level+Correction Factor < Limit - 6 dB

Margin=Corrected Amplitude – Limit

Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit.


All frequencies from 1GHz to 25 GHz have been tested.

3.5 Band Edge Measurement

3.5.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

3.5.2 Test Setup (Conducted)

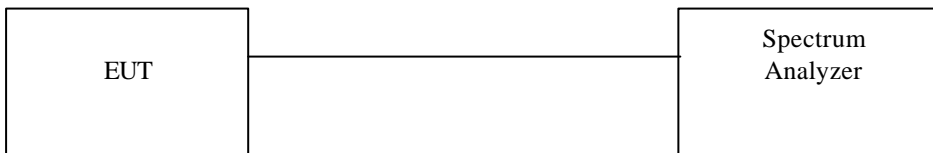

3.5.3 Test Data:

Please refer to ISL report 04LR018FC part 1

3.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

3.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

3.5.6 Test Data

Table Band Edge measurement (Radiated)

Temp. (deg. C): 25

Test Engr: Mailes Hsieh

Humidity (%): 50

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2410.8	68.76	31.1	99.86	---	---	1MHz	---
Outside band	2397.5	46.93	31.1	78.03	21.83	---	1MHz	Pass
1(average mode)	2412.6	60.39	31.1	91.49	---	---	10Hz	---
Restricted band	2390	9.45	31.1	40.55	---	54	10Hz	Pass
11(peak mode)	2460.8	69.19	31.1	100.29	---	---	1MHz	---
Outside band	2477	42.07	31.1	73.17	27.12	---	1MHz	Pass
11(average mode)	2461.3	60.8	31.1	91.9	---	---	10Hz	---
Restricted band	2483.5	9.09	31.1	40.19	---	54	10Hz	Pass

Note:

The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level=Spectrum Reading+Correction Factor

Correction Factor=Antenna Factor+cable loss–amplifier gain

Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.

Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 11)



3.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


See MPE report

3.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

3.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:1.5MHz
RBW: 3KHz
VBW: 30KHz
Center frequency: fundamental frequency tested.
Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

3.7.2 Test Setup

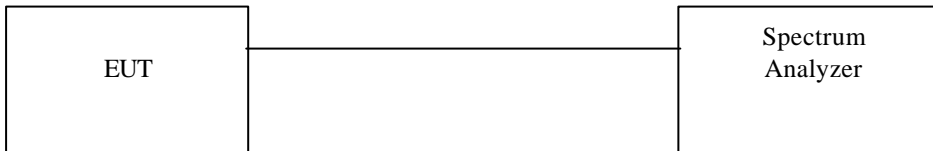

3.7.3 Test Data

Please refer to ISL report 04LR018FC part 1.

4. TEST RESULTS (802.11g) (for Dual Band WLAN antenna)

4.1 Powerline Conducted Emissions [Section 15.207]

4.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range	150 KHz--30MHz
Detector Function	Quasi-Peak/Average
Bandwidth (RBW)	9KHz

4.1.4 Test Data:

Please refer to ISL report 04LR018FC part 1.

4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

4.2.2 Test Setup



4.2.3 Test Data:

Please refer to ISL report 04LR018FC part 1.

4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

4.3.2 Test Setup



4.3.3 Test Data

Please refer to ISL report 04LR018FC part 1.

4.4 Radiated Emission Measurement [Section [15.247(c)(4)]

4.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.4.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator: Mailes Hsieh

Humidity (%): 46

Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
99.84	22.23	10.27	3.02	0.00	35.51	43.50	-7.99	150.00	312.00
198.78	25.09	8.86	4.18	0.00	38.13	43.50	-5.37	200.00	312.00
232.73	26.98	9.33	4.50	0.00	40.81	46.00	-5.19	150.00	18.00
298.69	22.35	13.57	4.69	0.00	40.62	46.00	-5.38	150.00	182.00
397.63	19.93	15.92	5.30	0.00	41.15	46.00	-4.85	100.00	165.00
431.58	18.78	16.25	5.61	0.00	40.64	46.00	-5.36	100.00	182.00
464.56	14.52	16.78	5.87	0.00	37.17	46.00	-8.83	250.00	336.00
478.14	18.12	17.13	5.93	0.00	41.18	46.00	-4.82	100.00	336.00
498.51	18.95	17.66	6.04	0.00	42.66	46.00	-3.34	100.00	296.00
564.47	13.62	19.04	6.57	0.00	39.23	46.00	-6.77	100.00	312.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator: Mailes Hsieh

Humidity (%): 46

Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
99.84	18.43	10.27	3.02	0.00	31.71	43.50	-11.79	200.00	91.00
137.67	18.02	10.63	3.55	0.00	32.20	43.50	-11.30	100.00	238.00
232.73	20.99	9.33	4.50	0.00	34.82	46.00	-11.18	100.00	157.00
364.65	14.98	14.80	5.07	0.00	34.84	46.00	-11.16	200.00	190.00
498.51	13.66	17.66	6.04	0.00	37.36	46.00	-8.64	200.00	272.00
643.04	8.22	19.07	7.00	0.00	34.29	46.00	-11.71	100.00	222.00
652.74	14.69	19.09	7.05	0.00	40.83	46.00	-5.17	100.00	238.00
660.5	10.61	19.08	7.07	0.00	36.75	46.00	-9.25	100.00	238.00
733.25	7.66	19.73	7.54	0.00	34.93	46.00	-11.07	150.00	272.00
864.2	5.59	20.54	8.24	0.00	34.38	46.00	-11.62	100.00	9.00

NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.4.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2311.19	55.49	30.94	2.55	46.21	42.78	54.00	-11.22	101	141
2316.18	58.41	30.94	2.56	46.21	45.70	54.00	-8.30	101	142
2515.98	54.19	30.91	2.82	46.22	41.69	54.00	-12.31	102	205
4073.43	41.27	32.42	2.06	46.18	29.57	54.00	-24.43	102	93
5381.12	35.48	35.90	1.13	47.29	25.23	54.00	-28.77	100	109
8816.18	34.09	41.19	3.25	42.71	35.82	54.00	-18.18	102	63

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1796.70	60.30	29.29	2.00	46.21	45.38	54.00	-8.62	100	57
1961.54	46.70	30.68	2.09	46.20	33.26	54.00	-20.74	100	46
2228.77	46.28	30.95	2.43	46.20	33.47	54.00	-20.53	101	115
4821.68	37.75	34.92	1.28	46.88	27.06	54.00	-26.94	100	18
7233.77	37.87	39.47	3.15	46.21	34.28	54.00	-19.72	101	143
9679.32	32.35	40.51	3.16	41.98	34.03	54.00	-19.97	102	6

Note:

“ * ”: Fundamental Frequency

“**”: Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“--“: No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level+Correction Factor < Limit - 6 dB

Margin=Corrected Amplitude – Limit

Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2323.68	52.36	30.94	2.57	46.21	39.66	54.00	-14.34	101	145
2346.15	58.75	30.93	2.60	46.21	46.08	54.00	-7.92	101	152
2685.81	53.27	30.97	2.82	46.35	40.72	54.00	-13.28	102	258
4877.62	34.66	35.13	1.25	46.93	24.12	54.00	-29.88	100	12
7863.14	36.14	40.41	3.11	44.39	35.27	54.00	-18.73	100	235
9571.43	32.36	40.74	3.19	42.26	34.03	54.00	-19.97	102	9

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2203.80	45.86	30.96	2.40	46.20	33.01	54.00	-20.99	101	107
2505.99	45.84	30.90	2.82	46.21	33.34	54.00	-20.66	102	202
2773.23	48.98	31.01	2.82	46.41	36.40	54.00	-17.60	102	286
3790.21	47.95	31.91	2.13	46.34	35.64	54.00	-18.36	102	154
4881.12	42.47	35.15	1.25	46.94	31.93	54.00	-22.07	100	12
7317.68	42.02	39.61	3.20	46.17	38.66	54.00	-15.34	101	155

Note:

“ * ”: Fundamental Frequency

“* * ”: Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“ --- ”: No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level+Correction Factor < Limit - 6 dB

Margin=Corrected Amplitude – Limit

Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2328.67	50.92	30.93	2.58	46.21	38.23	54.00	-15.77	101	146
2343.66	51.88	30.93	2.60	46.21	39.21	54.00	-14.79	101	151
2356.14	58.82	30.93	2.62	46.21	46.16	54.00	-7.84	101	155
4926.57	37.48	35.32	1.23	46.98	27.06	54.00	-26.94	100	7
6996.50	31.66	39.08	2.99	46.31	27.43	54.00	-26.57	101	110
8828.17	36.05	41.17	3.24	42.72	37.74	54.00	-16.26	102	60

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Operator: Mailes Hsieh

RBW: 1 MHz
Humidity (%): 46
Temperature (C): 25

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2396.10	49.71	30.92	2.67	46.21	37.10	54.00	-16.90	101	167
2403.60	48.78	30.92	2.68	46.21	36.18	54.00	-17.82	101	170
2593.41	45.58	30.94	2.82	46.28	33.06	54.00	-20.94	102	229
3751.75	50.88	31.85	2.12	46.38	38.48	54.00	-15.52	102	164
4923.08	43.31	35.31	1.23	46.97	32.87	54.00	-21.13	100	8
7383.62	42.02	39.71	3.25	46.14	38.84	54.00	-15.16	101	165

Note:

“ * ”: Fundamental Frequency

“* * ”: Not in the restricted band, Limit level=Fundamental Emission-20dB

“ pk ”: peak reading

“ av ”: average reading

“ --- ”: No meter reading data due to the emission level is smaller than spectrum noise level.

The Spectrum noise level+Correction Factor < Limit - 6 dB

Margin=Corrected Amplitude - Limit

Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit.


All frequencies from 1GHz to 25 GHz have been tested.

4.5 Band Edge Measurement

4.5.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

4.5.2 Test Setup (Conducted)

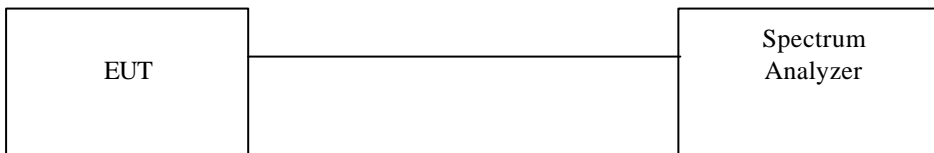

4.5.3 Test Data:

Please refer to ISL report 04LR018FC part 1

4.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.5.6 Test Data

Table Band Edge measurement (Radiated)

Temp. (deg. C): 25

Test Engr: Mailes Hsieh

Humidity (%): 50

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2407	61.73	31.1	92.83	---	---	1MHz	---
Outside band	2400	41.13	31.1	72.23	20.6	---	1MHz	Pass
1(average mode)	2405.1	51.82	31.1	82.92	---	---	10Hz	---
Restricted band	2390	8.66	31.1	39.76	---	54	10Hz	Pass
11(peak mode)	2455.6	62.49	31.1	93.59	---	---	1MHz	---
Outside band	2476.2	34.8	31.1	65.9	27.69	---	1MHz	Pass
11(average mode)	2455.6	52.31	31.1	83.41	---	---	10Hz	---
Restricted band	2483.5	8.11	31.1	39.21	---	54	10Hz	Pass

Note:

The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level=Spectrum Reading+Correction Factor

Correction Factor=Antenna Factor+cable loss–amplifier gain

Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.

Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 11)



4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


See MPE report

4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:1.5MHz
RBW: 3KHz
VBW: 30KHz
Center frequency: fundamental frequency tested.
Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

4.7.2 Test Setup

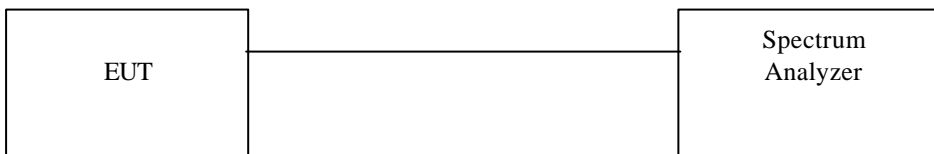

4.7.3 Test Data

Please refer to ISL report 04LR018FC part 1

4.8 Appendix : Antenna Spec.

Please refer to the attached file.