

FCC TEST REPORT (15.407)

REPORT NO.: RF940526L11
MODEL NO.: DCUA-81
(refer to page 6 for other Models)
RECEIVED: May 26, 2005
TESTED: May 30 ~ Jun. 13, 2005
ISSUED: Jun. 15, 2005

APPLICANT: Wistron NeWeb Corp.

ADDRESS: No. 10-1, Li-hsin Road I, Science-based
Industrial Park, Hsinchu 300, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 78 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS (5150 ~ 5350MHz BAND)	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	19
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	20
4.2.3	TEST INSTRUMENTS.....	21
4.2.4	TEST PROCEDURES	22
4.2.5	DEVIATION FROM TEST STANDARD	22
4.2.6	TEST SETUP	23
4.2.7	EUT OPERATING CONDITION	23
4.2.8	TEST RESULTS	24
4.3	PEAK TRANSMIT POWER MEASUREMENT	33
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT.....	33
4.3.2	TEST INSTRUMENTS.....	33
4.3.3	TEST PROCEDURE.....	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP	34
4.3.6	EUT OPERATING CONDITIONS	34
4.3.7	TEST RESULTS	35
4.4	PEAK POWER EXCURSION MEASUREMENT	45
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	45
4.4.2	TEST INSTRUMENTS.....	45
4.4.3	TEST PROCEDURE.....	46
4.4.4	DEVIATION FROM TEST STANDARD	46
4.4.5	TEST SETUP	46
4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS	47
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	53
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	53
4.5.2	TEST INSTRUMENTS.....	53



4.5.3	TEST PROCEDURES	54
4.5.4	DEVIATION FROM TEST STANDARD	54
4.5.5	TEST SETUP	54
4.5.6	EUT OPERATING CONDITIONS	54
4.5.7	TEST RESULTS	55
4.6	FREQUENCY STABILITY	61
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	61
4.6.2	TEST INSTRUMENTS.....	61
4.6.3	TEST PROCEDURE.....	61
4.6.4	DEVIATION FROM TEST STANDARD	61
4.6.5	TEST SETUP	62
4.6.6	EUT OPERATING CONDITION	62
4.6.7	TEST RESULTS	63
4.7	BAND EDGES MEASUREMENT	64
4.7.1	TEST INSTRUMENTS.....	64
4.7.2	TEST PROCEDURE.....	64
4.7.3	EUT OPERATING CONDITION	64
4.7.4	TEST RESULTS	64
4.8	ANTENNA REQUIREMENT	73
4.8.1	STANDARD APPLICABLE	73
4.8.2	ANTENNA CONNECTED CONSTRUCTION.....	73
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	74
6.	INFORMATION ON THE TESTING LABORATORIES	78



1. CERTIFICATION

PRODUCT: WLAN 802.11 a/b/g USB2.0 Adapter
BRAND NAME: Wistron NeWeb
MODEL NO.: DCUA-81
(refer to page 6 for other Models)
APPLICANT: Wistron NeWeb Corp.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: May 30 ~ Jun. 13, 2005
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** Jun. 15, 2005
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Jun. 15, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Jun. 15, 2005
(Cody Chang, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.35dB at 0.208MHz
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -3.99dB at 5150.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~ 1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	IEEE 802.11 a/g USB 2.0 Adapter
MODEL NO.	DCUA-81 (refer to the NOATE 3 as below for other model)
POWER SUPPLY	5Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 2) 802.11a: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 2)
FREQUENCY RANGE	802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.150 ~ 5.350GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 for Normal mode / 1 for Turbo mode 802.11a: 13 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
OUTPUT POWER	60.256mW for 802.11b 56.234mW for 802.11g 22.284mW for 5.150 ~ 5.350GHz 22.803mW for 5.725 ~ 5.850GHz
ANTENNA TYPE	Printed Antenna with -1.10dBi gain for 2.4GHz band Printed Antenna with 3.18dBi gain for 5.0GHz band
DATA CABLE	NA
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. This EUT is capable of providing data rates of up to 108 Mbps in Turbo mode depending upon reception quality.
3. The models as below are identical to each other expect for their models due to marketing requirement.

Model Name	Brand	Remark
DCUA-81	Wistron NeWeb	The EUT use a fixed USB connector
DCUA-82	Wistron NeWeb	The EUT use a rotatable USB connector

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

5.

3.2 DESCRIPTION OF TEST MODES

Operated in 5150 ~ 5250MHz, 5250MHz ~ 5350MHz bands:

Eight channels are provided to this EUT for normal mode.


Channel	Frequency
1	5180 MHz
2	5200 MHz
3	5220 MHz
4	5240 MHz
5	5260 MHz
6	5280 MHz
7	5300 MHz
8	5320 MHz

Three channels are provided to this EUT for turbo mode.

Channel	Frequency
1	5210 MHz
2	5250 MHz
3	5290 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode 1 & 2

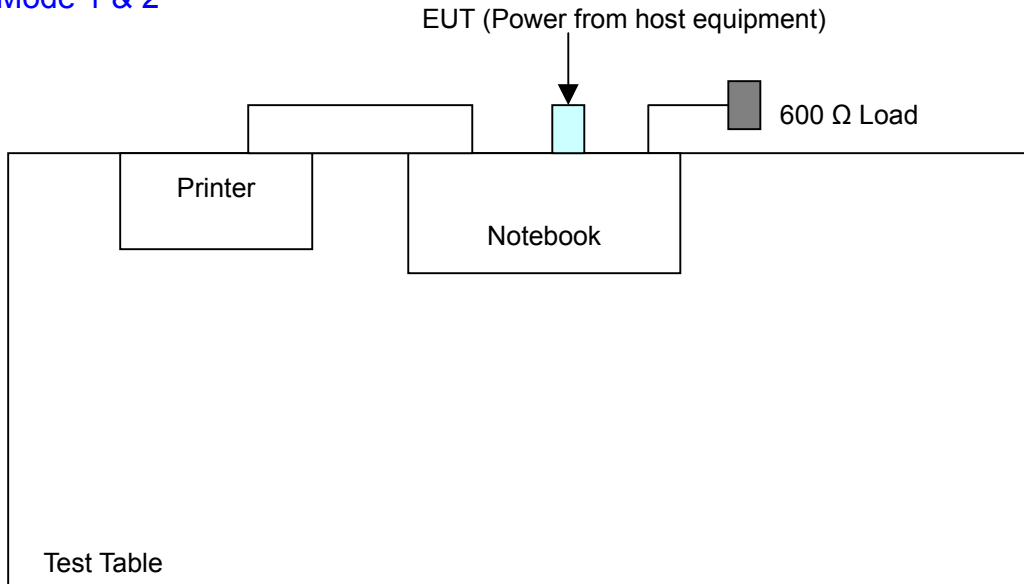



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
1	v	v	Note 1	Note 2	The USB connector was fixed (Model: DCUA-81)
2	v	v	Note 1	Note 2	The USB connector with rotator (Model: DCUA-82)

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Note 1: No effect on Radiated Emission below 1GHz.

Note 2: No effect on Conducted RF measurement.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11a	1 to 8	5	OFDM	BPSK	6
2	802.11a	1 to 8	5	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, rotatable angle of EUT and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Rotator angle
1	802.11a	1 to 8	5	OFDM	BPSK	6	0°
2	802.11a	1 to 8	5	OFDM	BPSK	6	(X Axis)

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, rotatable angle of EUT and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Rotator angle
2	802.11a	1 to 8	1, 4, 5, 8	OFDM	BPSK	6	0°
2	802.11a Turbo	1 to 3	1, 2, 3	OFDM	BPSK	12	(X Axis)



Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	1, 8	OFDM	BPSK	6
802.11a Turbo	1 to 3	1, 3	OFDM	BPSK	12

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	1, 4, 5, 8	OFDM	BPSK	6
802.11a Turbo	1 to 3	1, 2, 3	OFDM	BPSK	12



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an WLAN 802.11 a/b/g USB2.0 Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	Compaq	N800C	470048-515	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	600Ω Load	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable.
3	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4. TEST TYPES AND RESULTS (5150 ~ 5350MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

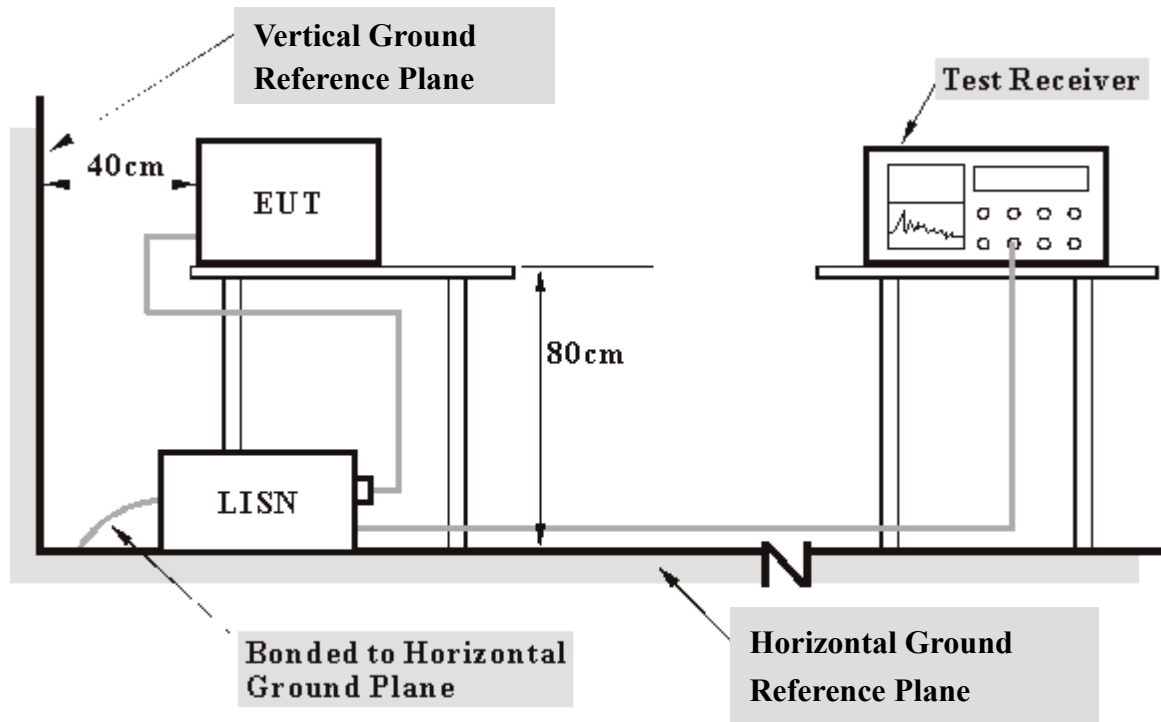

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plugged the EUT to the Notebook system.
- b. The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to printer and the printer printed them on paper.
- e. Steps c ~ d were repeated.




4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 1
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	34.67	-	34.78	-	65.38	55.38	-30.60	-
2	0.206	0.11	47.64	-	47.75	-	63.37	53.37	-15.62	-
3	0.208	0.11	47.83	-	47.94	-	63.29	53.29	-15.35	-
4	0.423	0.12	39.16	-	39.28	-	57.38	47.38	-18.11	-
5	0.634	0.16	37.63	-	37.79	-	56.00	46.00	-18.21	-
6	13.473	0.55	33.86	-	34.41	-	60.00	50.00	-25.59	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

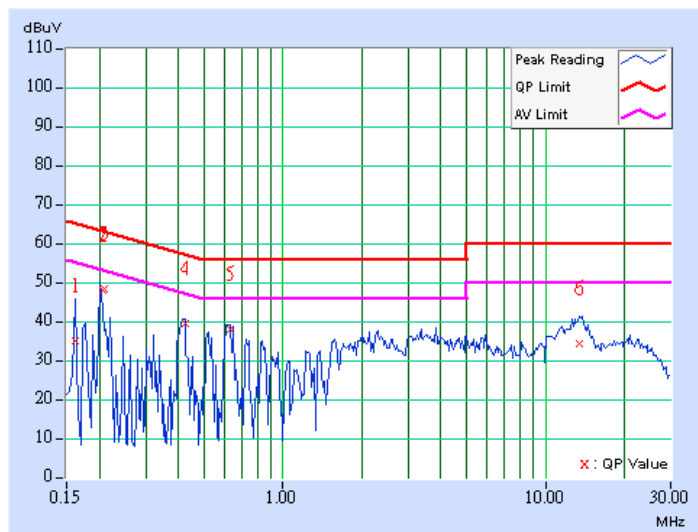




EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 2
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	35.66	-	35.77	-	65.58	55.58	-29.81	-
2	0.201	0.11	45.58	-	45.69	-	63.58	53.58	-17.89	-
3	0.213	0.11	45.62	-	45.73	-	63.11	53.11	-17.38	-
4	0.412	0.11	38.64	-	38.75	-	57.61	47.61	-18.86	-
5	0.615	0.16	37.44	-	37.60	-	56.00	46.00	-18.40	-
6	14.273	0.45	32.13	-	32.58	-	60.00	50.00	-27.42	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

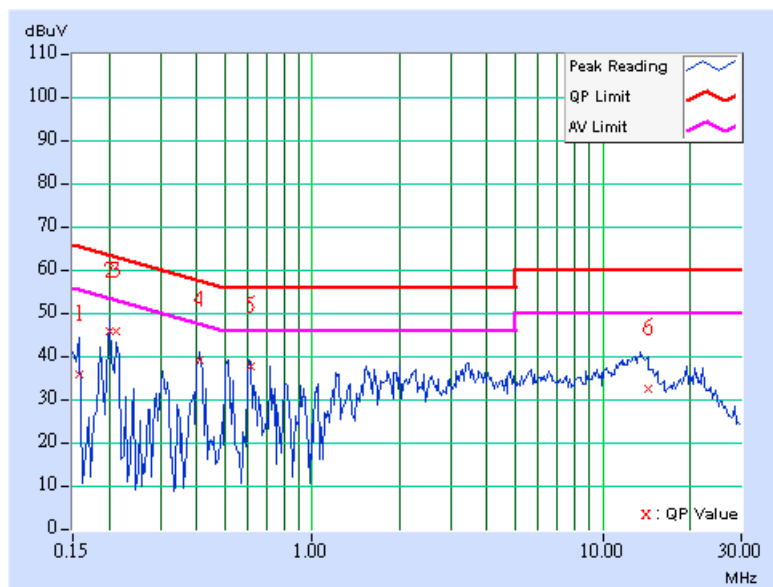




Conducted Worst-Case Data

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 1
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.11	46.78	-	46.89	-	63.58	53.58	-16.69	-
2	0.209	0.11	47.12	-	47.23	-	63.26	53.26	-16.03	-
3	0.306	0.11	34.70	-	34.81	-	60.07	50.07	-25.26	-
4	0.404	0.11	38.40	-	38.51	-	57.77	47.77	-19.26	-
5	0.611	0.16	38.07	-	38.23	-	56.00	46.00	-17.77	-
6	3.266	0.34	33.04	-	33.38	-	56.00	46.00	-22.62	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

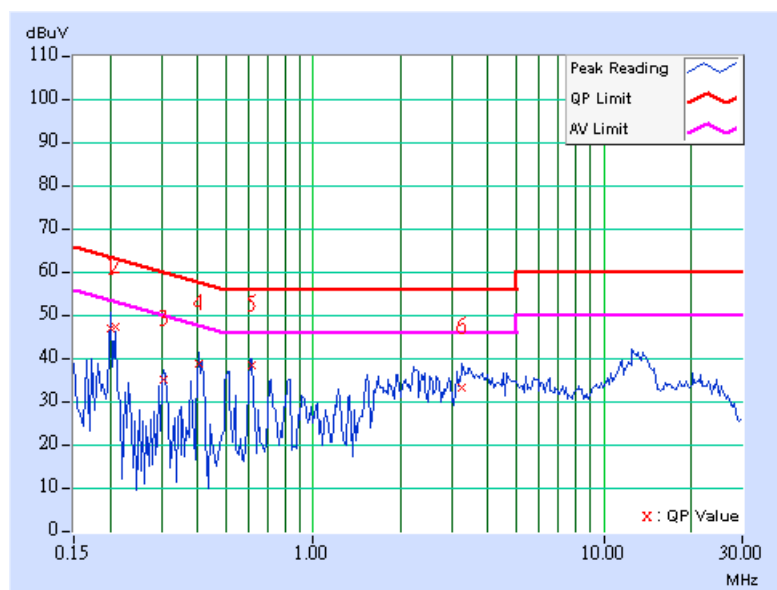




EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 2
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.11	37.65	-	37.76	-	64.98	54.98	-27.23	-
2	0.185	0.11	38.65	-	38.76	-	64.25	54.25	-25.49	-
3	0.213	0.11	44.62	-	44.73	-	63.11	53.11	-18.38	-
4	0.408	0.11	38.38	-	38.49	-	57.69	47.69	-19.20	-
5	0.619	0.16	37.22	-	37.38	-	56.00	46.00	-18.62	-
6	0.732	0.18	34.97	-	35.15	-	56.00	46.00	-20.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

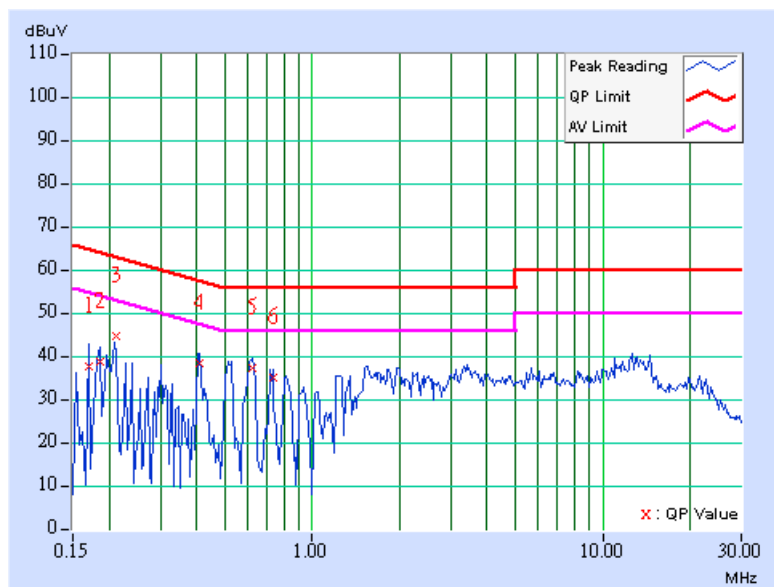



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$



4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

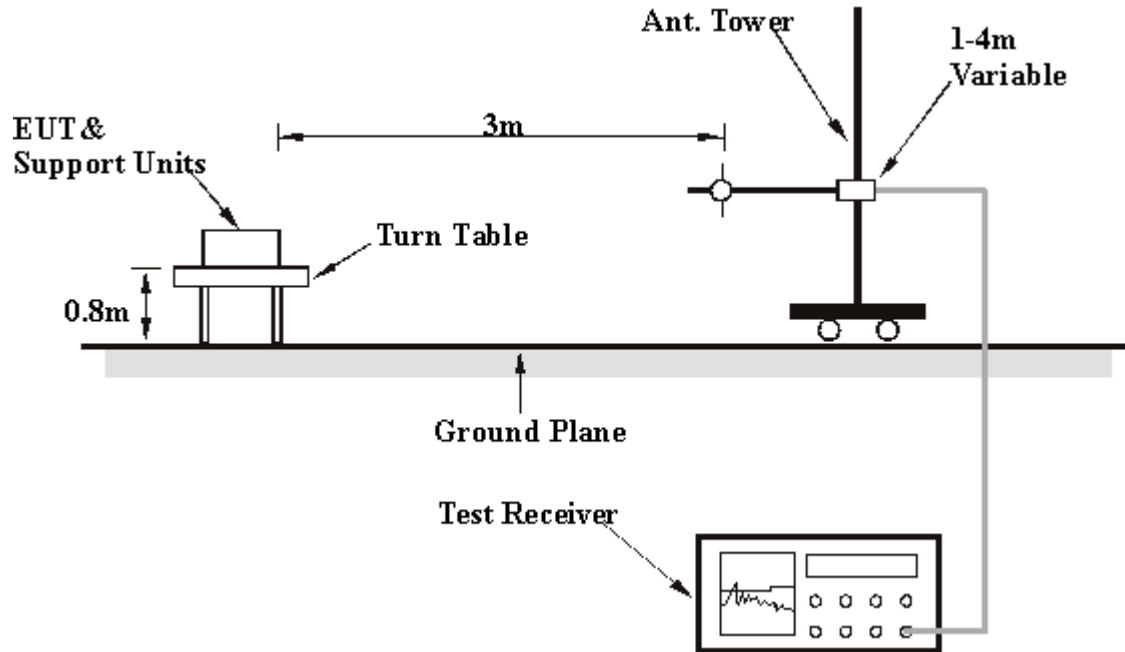

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.59	35.43 QP	43.50	-8.07	3.00 H	271	22.72	12.70
2	199.12	33.94 QP	43.50	-9.56	1.00 H	232	22.01	11.93
3	249.66	36.42 QP	46.00	-9.58	1.00 H	76	22.77	13.64
4	440.16	36.85 QP	46.00	-9.15	2.00 H	259	18.48	18.37
5	681.20	34.31 QP	46.00	-11.69	1.00 H	241	11.62	22.69
6	731.74	40.09 QP	46.00	-5.91	1.00 H	124	16.30	23.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.72	28.85 QP	40.00	-11.15	1.00 V	73	13.40	15.45
2	113.59	37.69 QP	43.50	-5.81	1.00 V	265	24.99	12.70
3	440.16	36.87 QP	46.00	-9.13	1.00 V	202	18.50	18.37
4	681.20	34.70 QP	46.00	-11.30	1.00 V	346	12.01	22.69
5	720.08	33.60 QP	46.00	-12.40	1.00 V	349	10.12	23.48
6	930.02	38.01 QP	46.00	-7.99	1.00 V	280	11.76	26.25

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	111.64	34.81 QP	43.50	-8.69	1.00 H	265	22.31	12.50
2	249.66	37.28 QP	46.00	-8.72	1.00 H	256	23.64	13.64
3	465.43	37.29 QP	46.00	-8.71	3.00 H	238	18.45	18.84
4	601.50	35.03 QP	46.00	-10.97	1.00 H	46	13.32	21.71
5	720.08	39.29 QP	46.00	-6.71	2.00 H	46	15.81	23.48
6	931.96	33.06 QP	46.00	-12.94	1.00 H	250	6.79	26.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.55	27.84 QP	40.00	-12.16	1.00 V	268	12.30	15.53
2	111.64	36.69 QP	43.50	-6.81	1.00 V	274	24.19	12.50
3	440.16	35.75 QP	46.00	-10.25	1.00 V	178	17.38	18.37
4	720.08	40.12 QP	46.00	-5.88	1.00 V	166	16.64	23.48
5	918.36	37.52 QP	46.00	-8.48	1.00 V	85	11.41	26.12
6	955.29	33.25 QP	46.00	-12.75	1.00 V	181	6.74	26.51

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3453.30	45.12 PK	68.30	-23.18	1.13 H	153	8.91	36.21
2	#5150.00	54.79 PK	74.00	-19.21	1.09 H	182	14.15	40.64
2	#5150.00	44.75 AV	54.00	-9.25	1.09 H	182	4.11	40.64
3	*5180.00	109.60 PK			1.09 H	182	68.92	40.68
3	*5180.00	99.56 AV			1.09 H	182	58.88	40.68
4	6906.60	57.66 PK	68.30	-10.64	1.11 H	213	12.12	45.54
5	10360.00	61.57 PK	68.30	-6.73	1.33 H	222	9.56	52.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3453.30	46.92 PK	68.30	-21.38	1.33 V	123	10.71	36.21
2	#5150.00	45.68 PK	74.00	-28.32	1.20 V	179	5.04	40.64
2	#5150.00	34.37 AV	54.00	-19.63	1.20 V	179	-6.27	40.64
3	*5180.00	101.49 PK			1.20 V	179	60.81	40.68
3	*5180.00	91.18 AV			1.20 V	179	50.50	40.68
4	6906.60	54.29 PK	68.30	-14.01	1.09 V	204	8.75	45.54
5	10360.00	61.06 PK	68.30	-7.24	1.00 V	216	9.05	52.01

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.



EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 4	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3493.30	44.71 PK	68.30	-23.59	1.46 H	213	8.46	36.25
2	*5240.00	110.76 PK			1.29 H	186	69.98	40.78
2	*5240.00	100.65 AV			1.29 H	186	59.87	40.78
3	6986.60	59.01 PK	68.30	-9.29	1.00 H	213	13.13	45.88
4	10480.00	61.63 PK	68.30	-6.67	1.37 H	222	9.28	52.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3493.30	46.07 PK	68.30	-22.23	1.13 V	169	9.82	36.25
2	*5240.00	102.66 PK			1.31 V	156	61.88	40.78
2	*5240.00	91.32 AV			1.31 V	156	50.54	40.78
3	6986.60	57.96 PK	68.30	-10.34	1.59 V	159	12.08	45.88
4	10480.00	62.15 PK	68.30	-6.15	1.30 V	158	9.80	52.35

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.



EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3506.60	48.18 PK	68.30	-20.12	1.14 H	181	11.90	36.28
2	*5260.00	111.17 PK			1.06 H	187	70.36	40.81
2	*5260.00	101.92 AV			1.06 H	187	61.11	40.81
3	7013.20	58.17 PK	68.30	-10.13	1.00 H	218	12.20	45.97
4	10520.00	62.58 PK	68.30	-5.72	1.24 H	209	10.18	52.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3506.60	47.31 PK	68.30	-20.99	1.07 V	167	11.03	36.28
2	*5260.00	102.68 PK			1.45 V	172	61.87	40.81
2	*5260.00	93.06 AV			1.45 V	172	52.25	40.81
3	7013.20	57.64 PK	68.30	-10.66	1.71 V	160	11.67	45.97
4	10520.00	61.77 PK	68.30	-6.53	1.45 V	117	9.37	52.40

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#": The radiated frequency falling in the restricted band.

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 8	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3546.60	48.18 PK	68.30	-20.12	1.05 H	105	11.77	36.41
2	*5320.00	111.87 PK			1.07 H	189	70.95	40.92
2	*5320.00	100.85 AV			1.07 H	189	59.93	40.92
3	#5350.00	57.61 PK	74.00	-16.39	1.07 H	189	16.62	40.98
3	#5350.00	46.59 AV	54.00	-7.41	1.07 H	189	5.61	40.98
4	7093.20	59.31 PK	68.30	-8.99	1.16 H	211	13.16	46.15
5	#10640.00	62.61 PK	74.00	-11.39	1.47 H	114	10.23	52.38
5	#10640.00	48.41 AV	54.00	-5.59	1.47 H	114	-3.97	52.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3546.60	48.36 PK	68.30	-19.94	1.04 V	167	11.95	36.41
2	*5320.00	102.90 PK			1.41 V	172	61.98	40.92
2	*5320.00	92.02 AV			1.41 V	172	51.10	40.92
3	#5350.00	47.64 PK	74.00	-26.36	1.41 V	172	6.66	40.98
3	#5350.00	36.76 AV	54.00	-17.24	1.41 V	172	-4.23	40.98
4	7093.20	57.42 PK	68.30	-10.88	1.69 V	144	11.27	46.15
5	#10640.00	61.55 PK	74.00	-12.45	1.49 V	115	9.17	52.38
5	#10640.00	48.84 AV	54.00	-5.16	1.49 V	115	-3.54	52.38

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#":The radiated frequency falling in the restricted band.



802.11a Turbo OFDM modulation

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3473.30	46.20 PK	68.30	-22.10	1.43 H	213	9.97	36.23
2	#5150.00	60.81 PK	74.00	-13.19	1.07 H	182	20.17	40.64
2	#5150.00	50.01 AV	54.00	-3.99	1.07 H	182	9.37	40.64
3	*5210.00	107.04 PK			1.07 H	182	66.31	40.73
3	*5210.00	96.24 AV			1.07 H	182	55.51	40.73
4	6946.60	58.36 PK	68.30	-9.94	1.00 H	217	12.65	45.71
5	10420.00	59.94 PK	68.30	-8.36	1.46 H	212	7.79	52.15

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3473.30	46.26 PK	68.30	-22.04	1.07 V	166	10.03	36.23
2	#5150.00	51.12 PK	74.00	-22.88	1.04 V	159	10.48	40.64
2	#5150.00	38.50 AV	54.00	-15.50	1.04 V	159	-2.14	40.64
3	*5210.00	98.35 PK			1.04 V	159	57.62	40.73
3	*5210.00	85.73 AV			1.04 V	159	45.00	40.73
4	6946.60	55.97 PK	68.30	-12.33	1.58 V	153	10.26	45.71
5	10420.00	62.54 PK	68.30	-5.76	1.21 V	171	10.39	52.15

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#" The radiated frequency falling in the restricted band.

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 2	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3500.00	48.39 PK	68.30	-19.91	1.00 H	124	12.13	36.26
2	*5250.00	107.17 PK			1.06 H	181	66.37	40.80
2	*5250.00	96.87 AV			1.06 H	181	56.07	40.80
3	7000.00	59.38 PK	68.30	-8.92	1.00 H	123	13.44	45.94
4	10500.00	60.77 PK	68.30	-7.53	1.21 H	145	8.35	52.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3500.00	47.80 PK	68.30	-20.50	1.61 V	175	11.54	36.26
2	*5250.00	97.53 PK			1.38 V	134	56.73	40.80
2	*5250.00	86.66 AV			1.38 V	134	45.87	40.80
3	7000.00	57.20 PK	68.30	-11.10	1.67 V	159	11.26	45.94
4	10500.00	62.24 PK	68.30	-6.06	1.77 V	149	9.82	52.42

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#" The radiated frequency falling in the restricted band.

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 70%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3526.60	48.60 PK	68.30	-19.70	1.13 H	130	12.25	36.35
2	*5290.00	107.86 PK			1.07 H	188	67.00	40.86
2	*5290.00	97.11 AV			1.07 H	188	56.25	40.86
3	#5350.00	54.57 PK	74.00	-19.43	1.07 H	188	13.59	40.98
3	#5350.00	43.82 AV	54.00	-10.18	1.07 H	188	2.84	40.98
4	7053.20	59.30 PK	68.30	-9.00	1.17 H	214	13.24	46.06
5	10580.00	60.22 PK	68.30	-8.08	1.16 H	187	7.90	52.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3526.60	47.91 PK	68.30	-20.39	1.55 V	166	11.56	36.35
2	*5290.00	96.21 PK			1.06 V	263	55.35	40.86
2	*5290.00	85.81 AV			1.06 V	263	44.95	40.86
3	#5350.00	41.92 PK	74.00	-32.08	1.06 V	263	0.94	40.98
3	#5350.00	31.52 AV	54.00	-22.48	1.06 V	263	-9.46	40.98
4	7053.20	57.82 PK	68.30	-10.48	1.57 V	167	11.76	46.06

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.



4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 3MHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

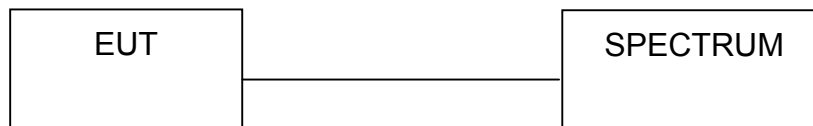

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

802.11a OFDM modulation


EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5180	19.999	13.01	17.00	30.10	PASS
4	5240	20.797	13.18	17.00	27.90	PASS
5	5260	22.284	13.48	24.00	27.50	PASS
8	5320	21.677	13.36	24.00	29.00	PASS


NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.



Peak Power Output:
CH 1

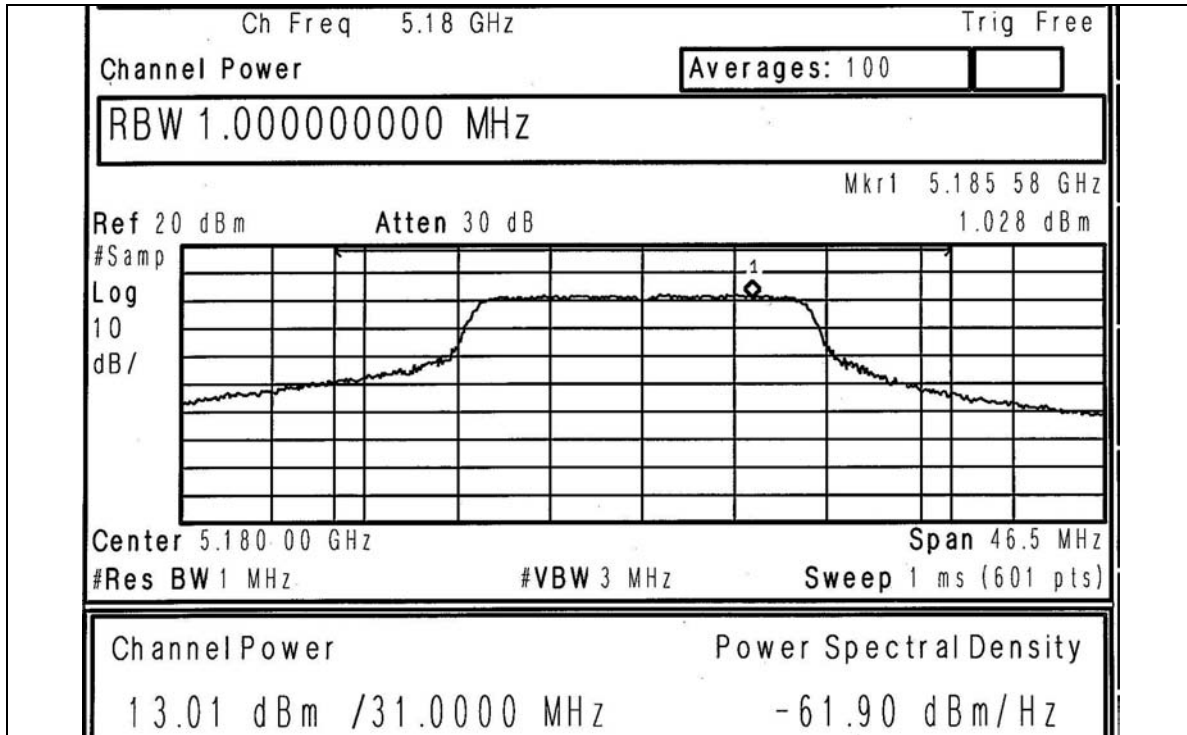


CH 4

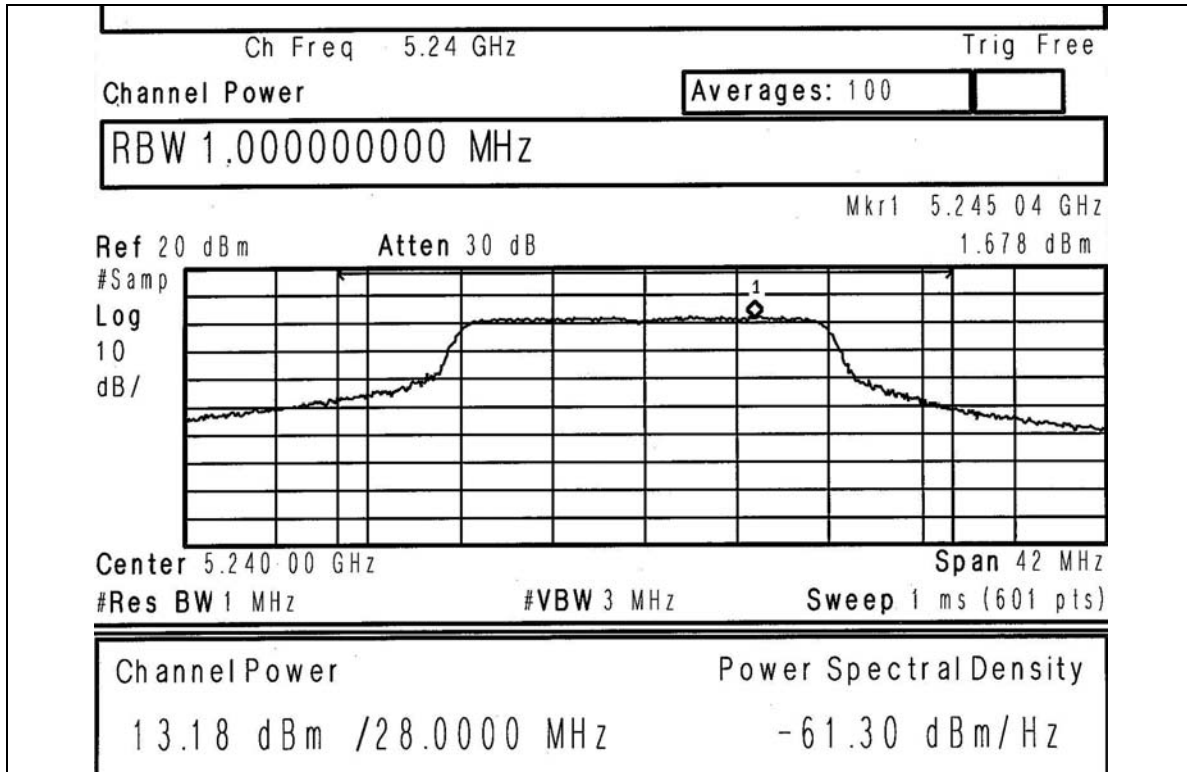




CH 5

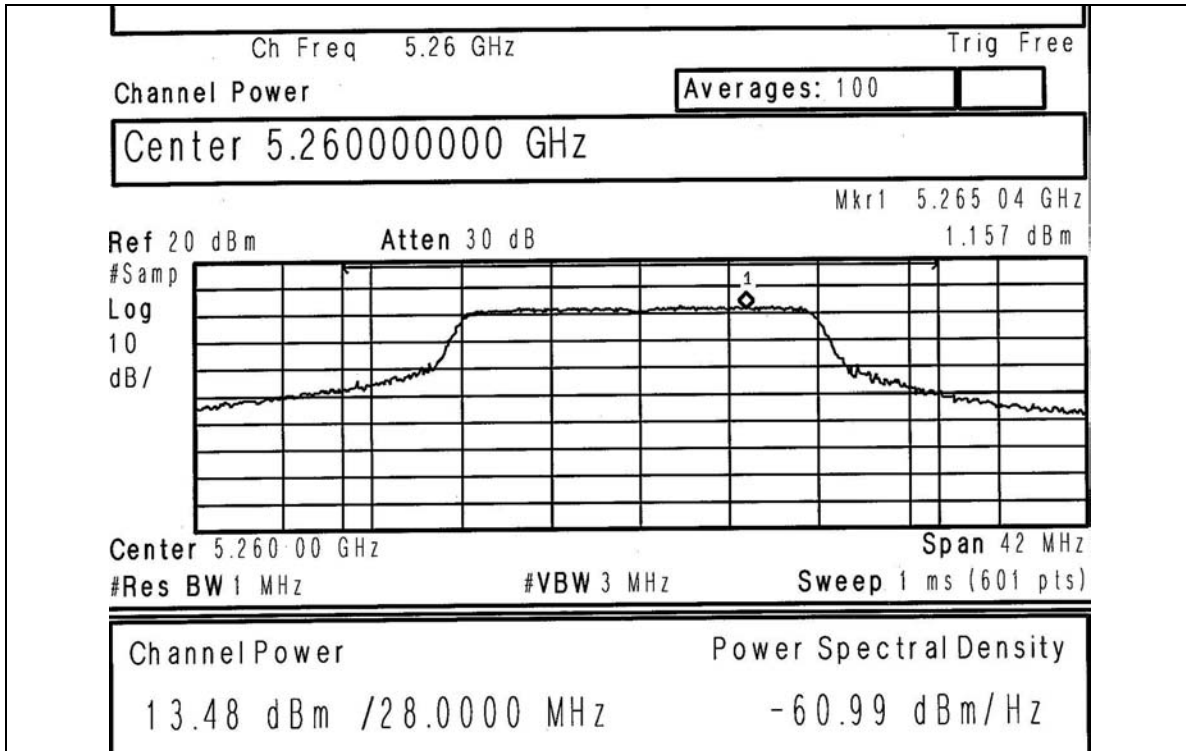


CH 8

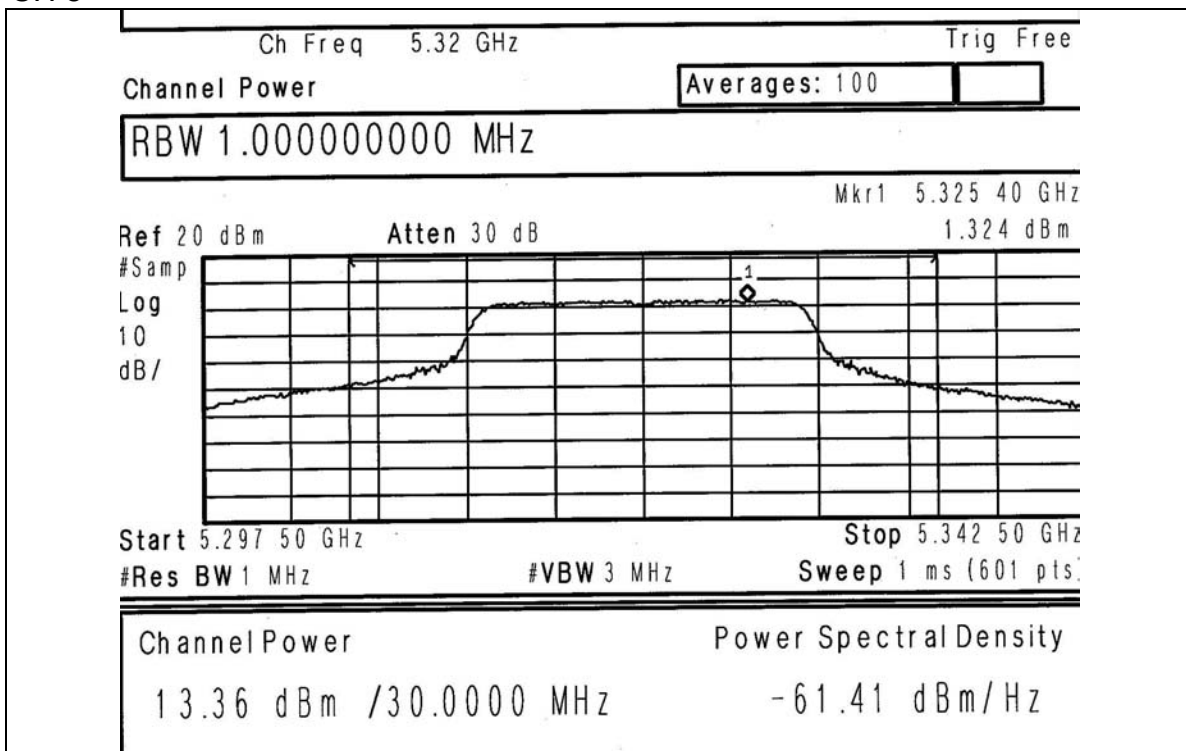




26dB Occupied Bandwidth:
CH 1

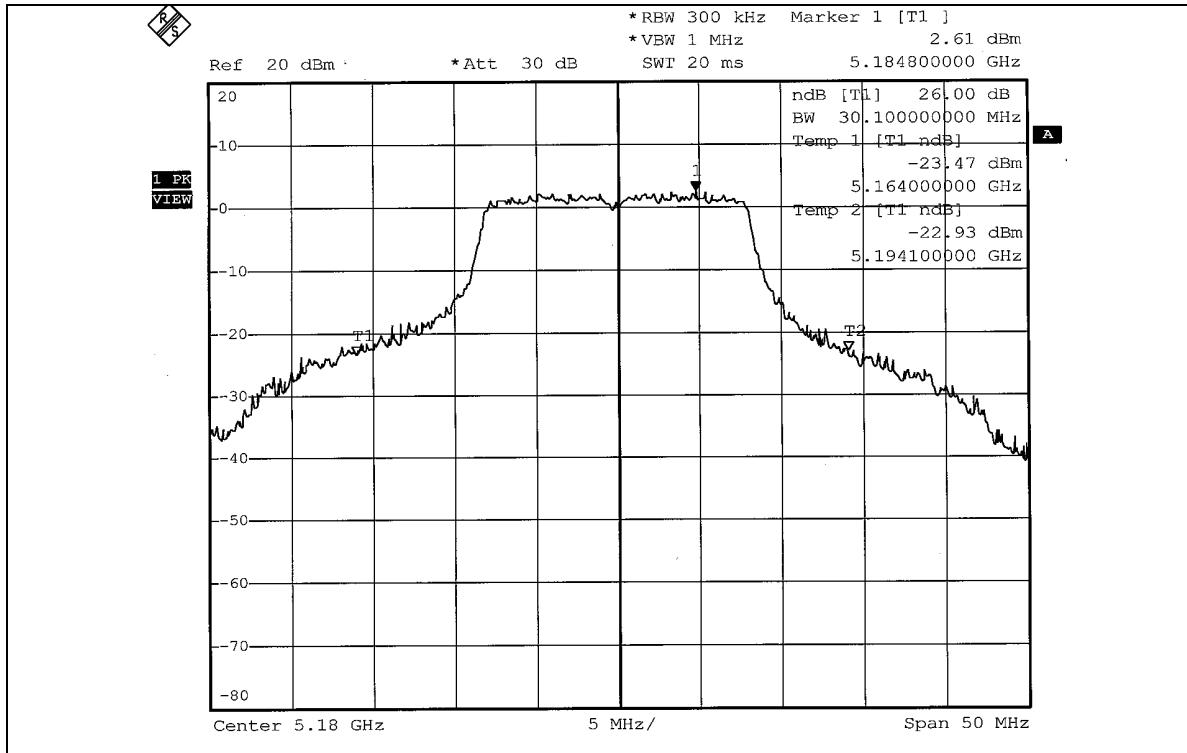


CH 4

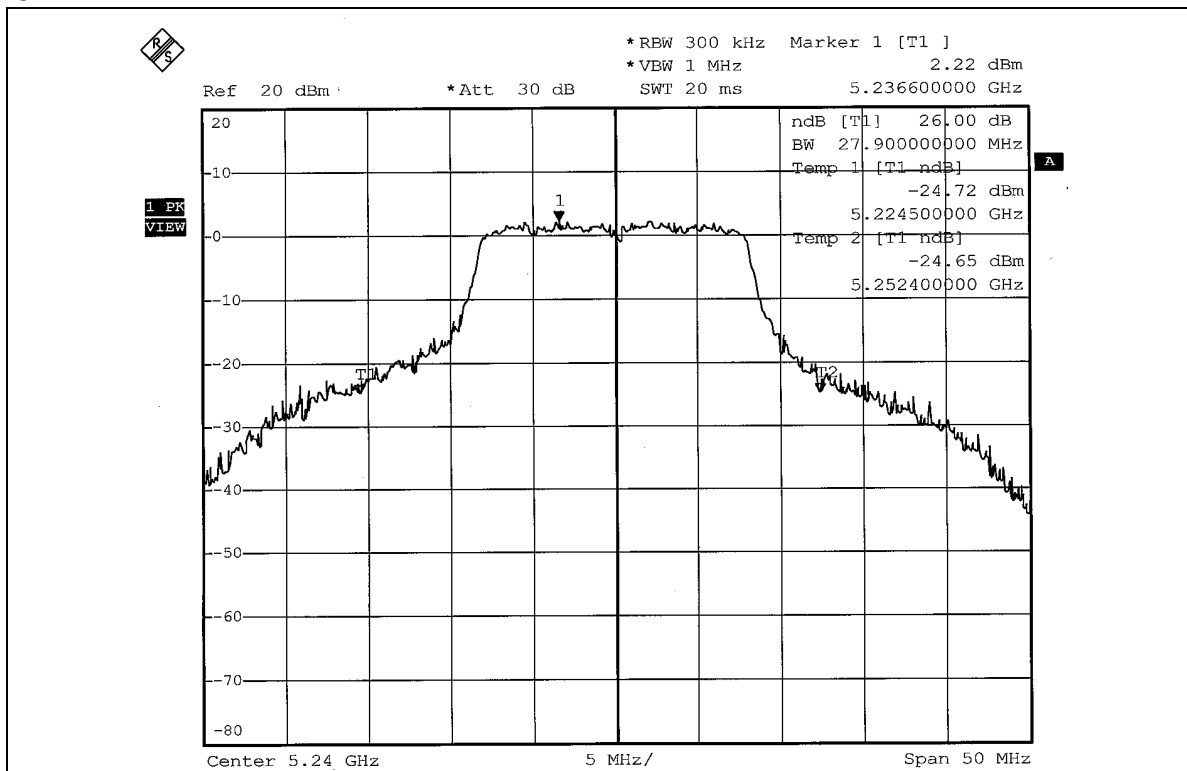




CH 5

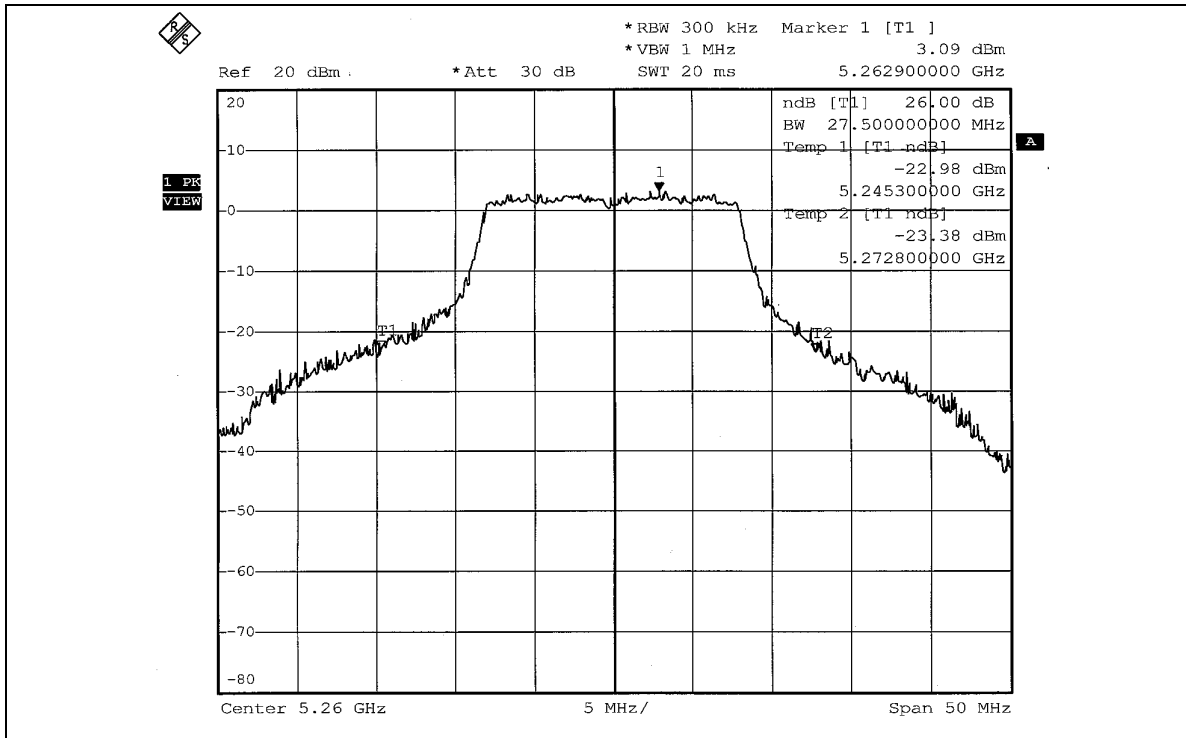

CH 8

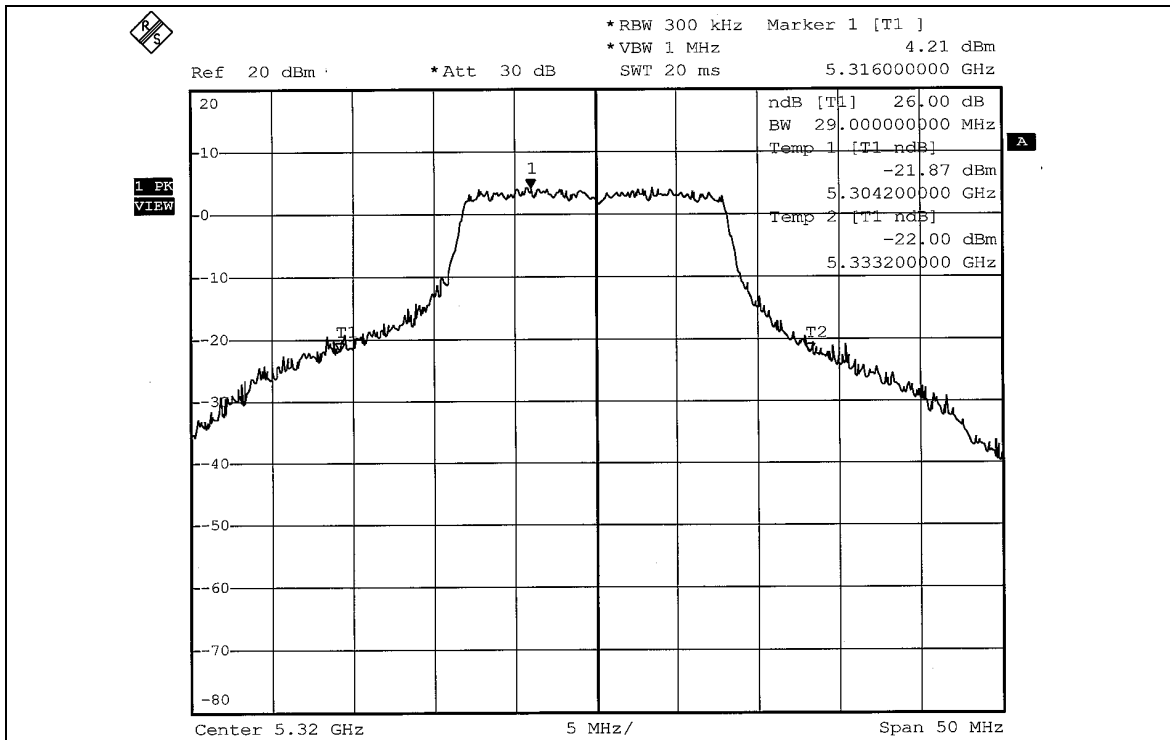

**802.11a Turbo OFDM modulation**


EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5210	21.086	13.24	17.00	53.00	PASS
2	5250	20.091	13.03	17.00	53.00	PASS
3	5290	21.478	13.32	24.00	55.20	PASS


NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.



Peak Power Output:
CH 1

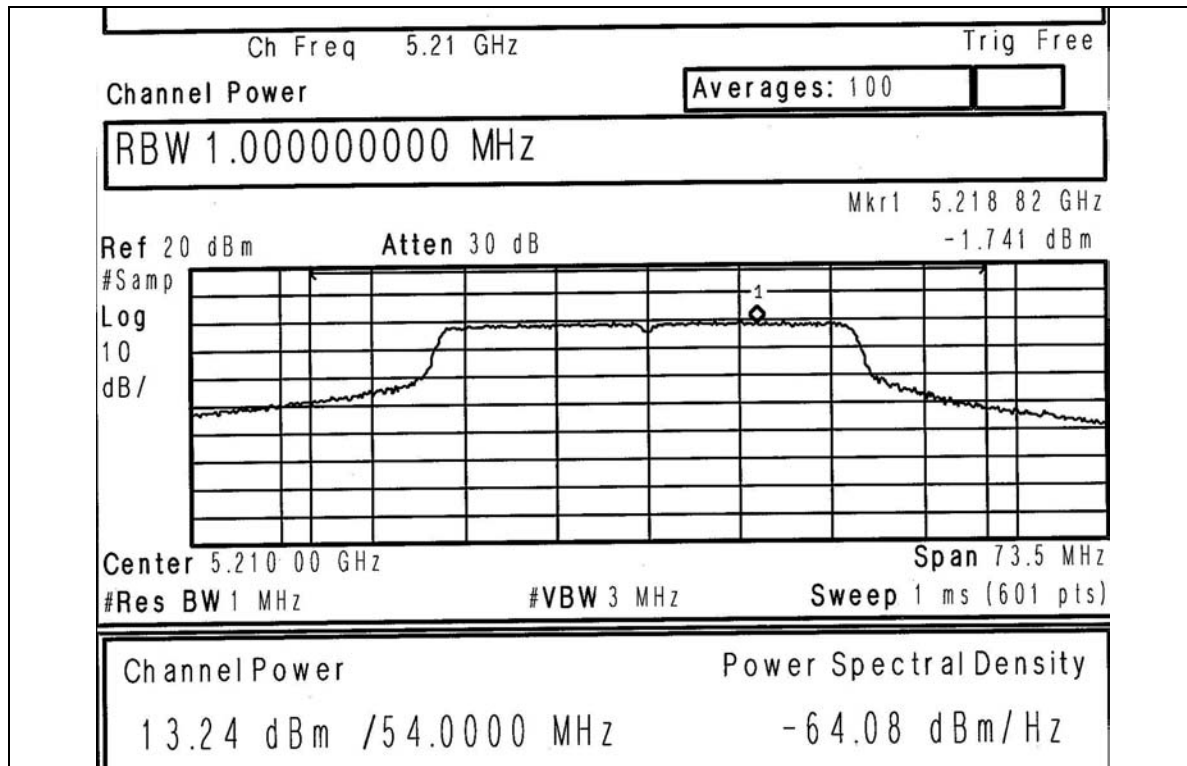


CH 2

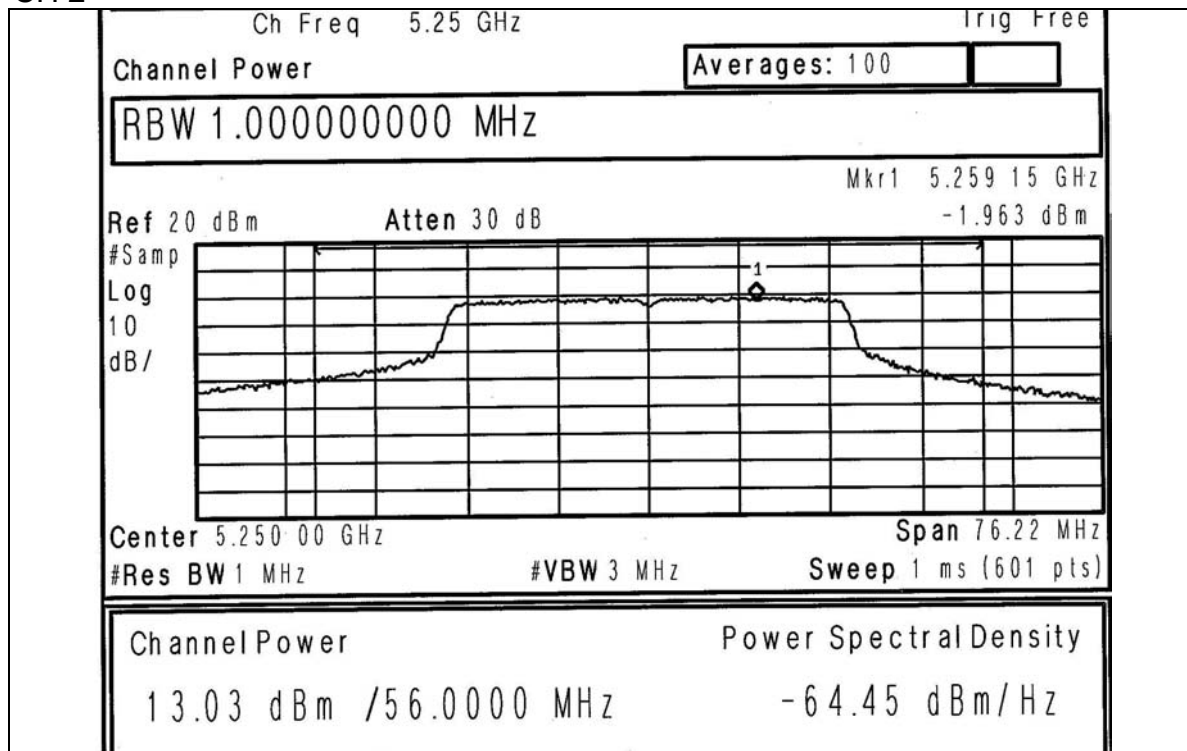




CH 3

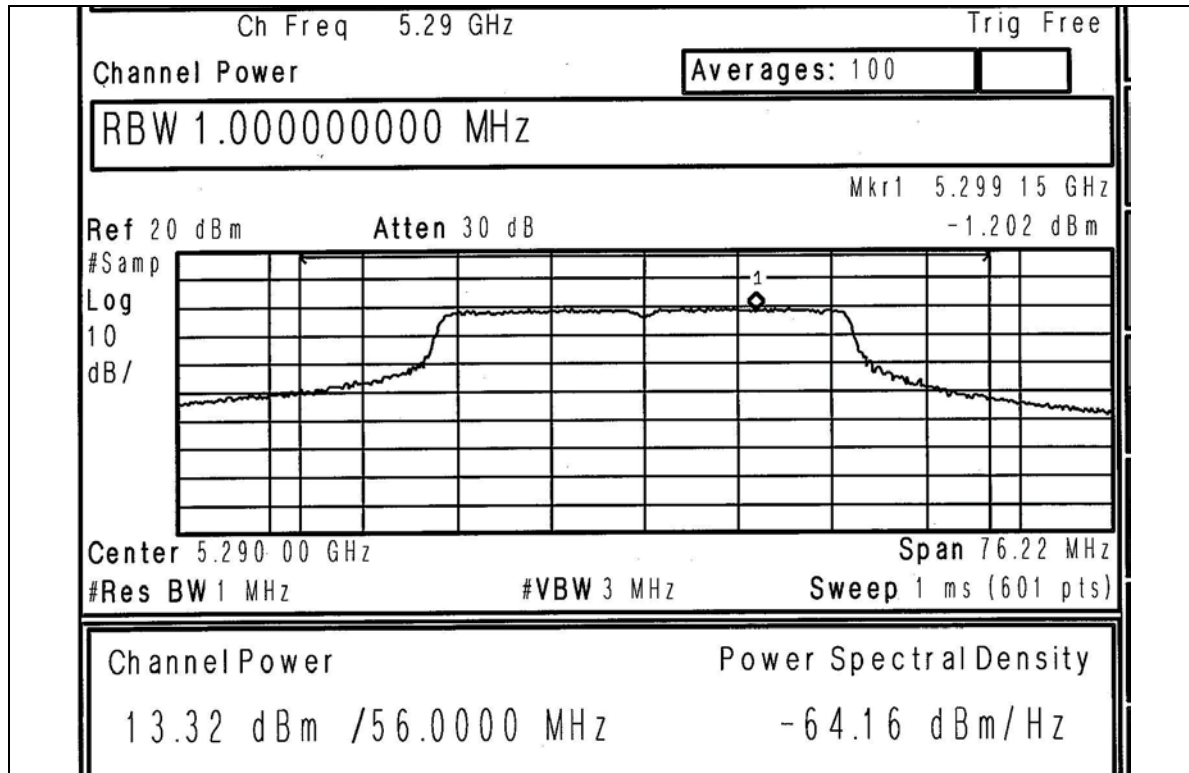




26dB Occupied Bandwidth:
CH 1

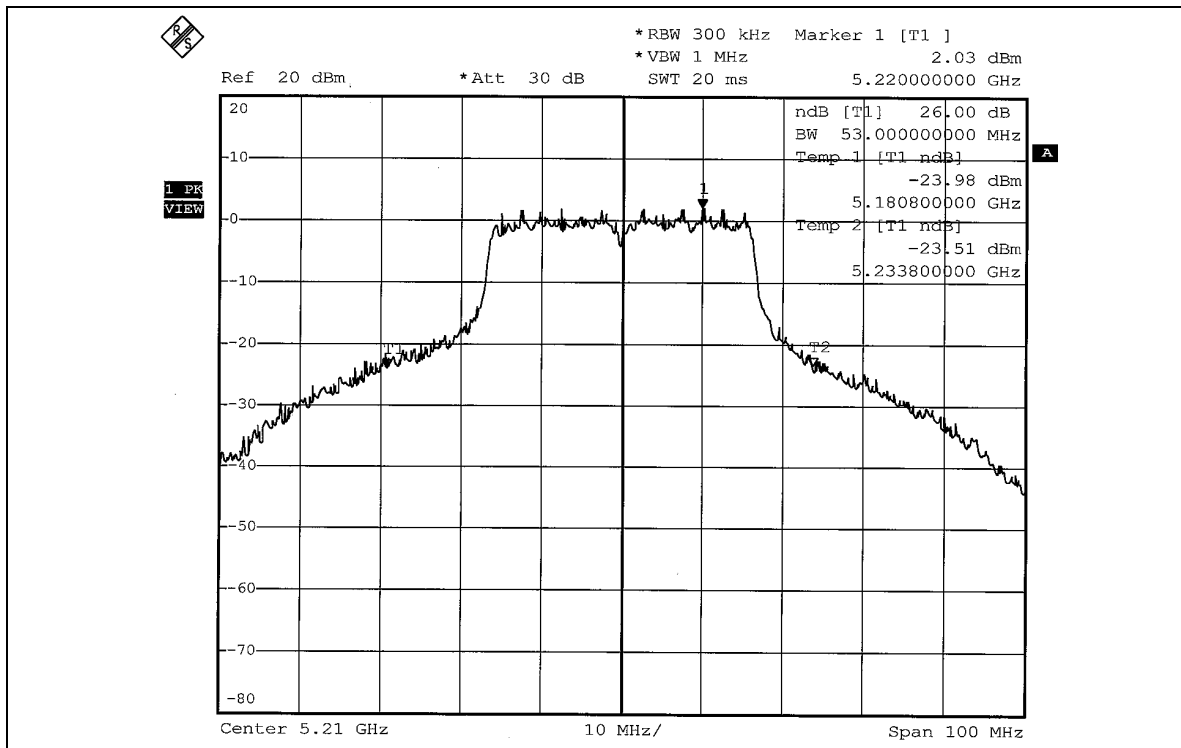


CH 2

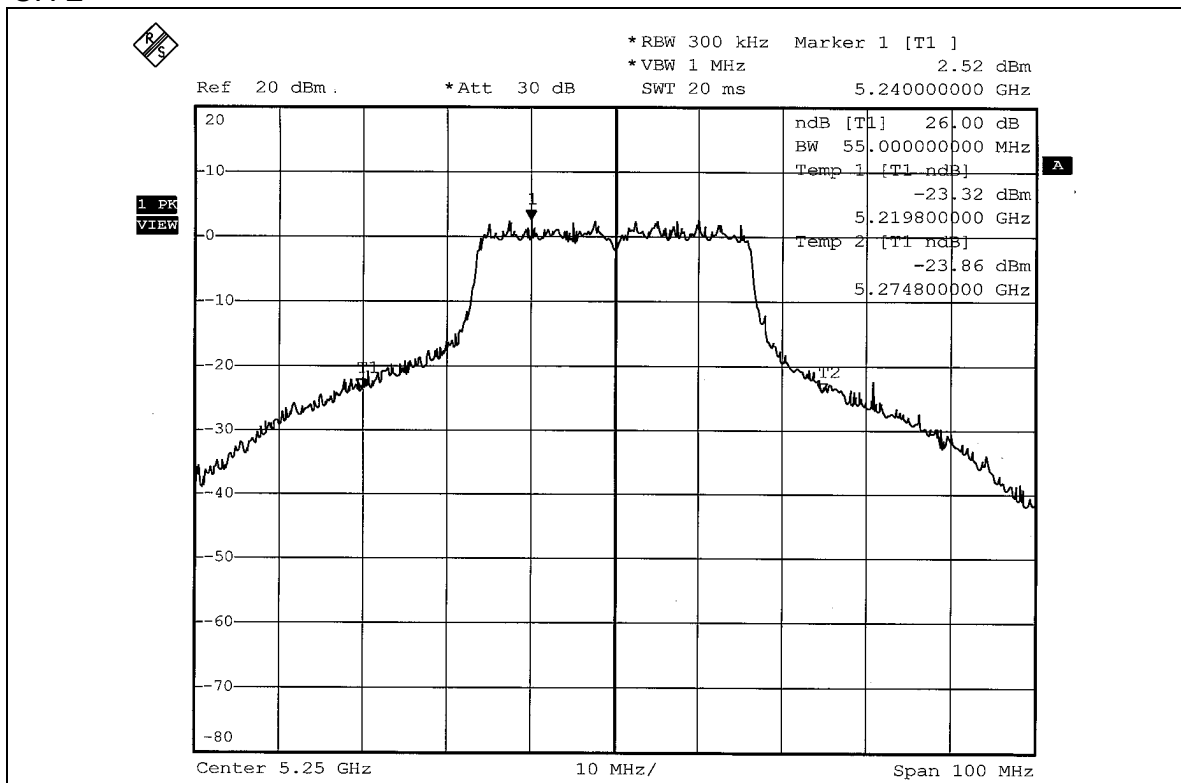



CH 3

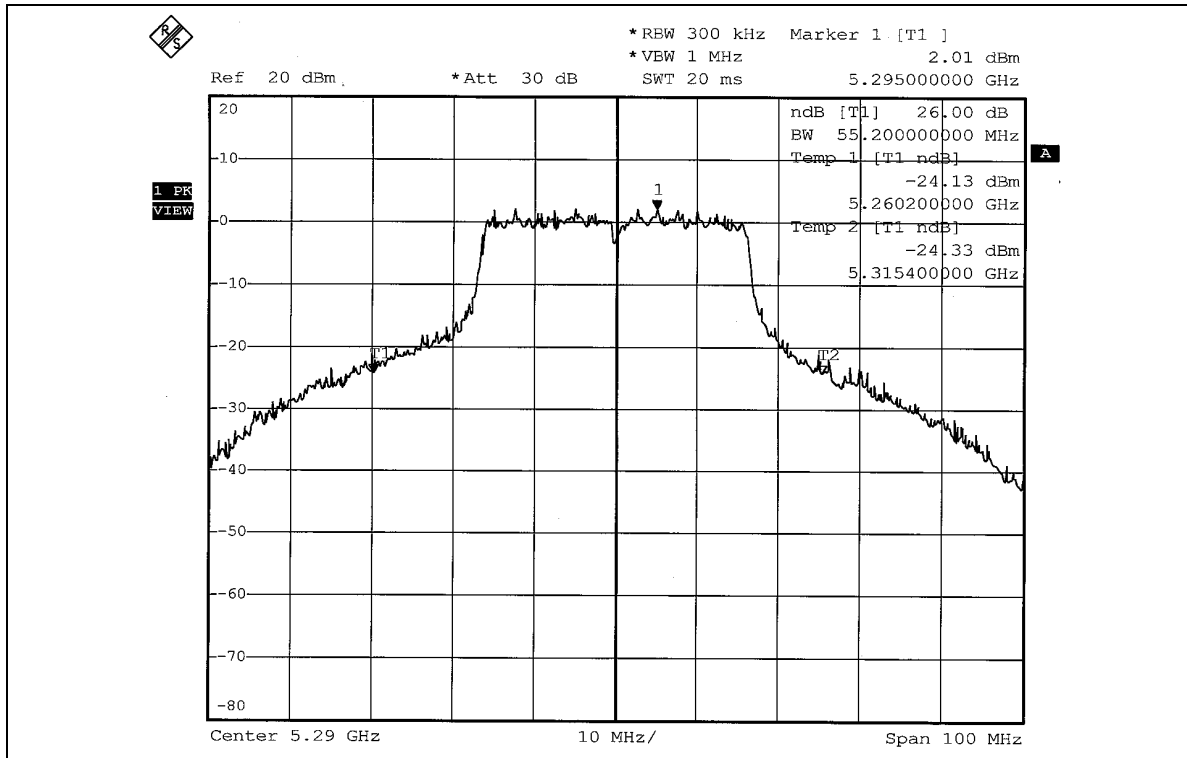



4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

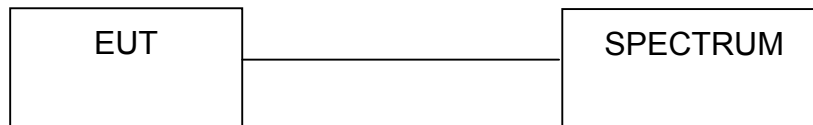

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



4.4.7 TEST RESULTS


802.11a OFDM modulation

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	7.31	13	PASS
4	5240	6.91	13	PASS
5	5260	6.81	13	PASS
8	5320	7.30	13	PASS



CH 1

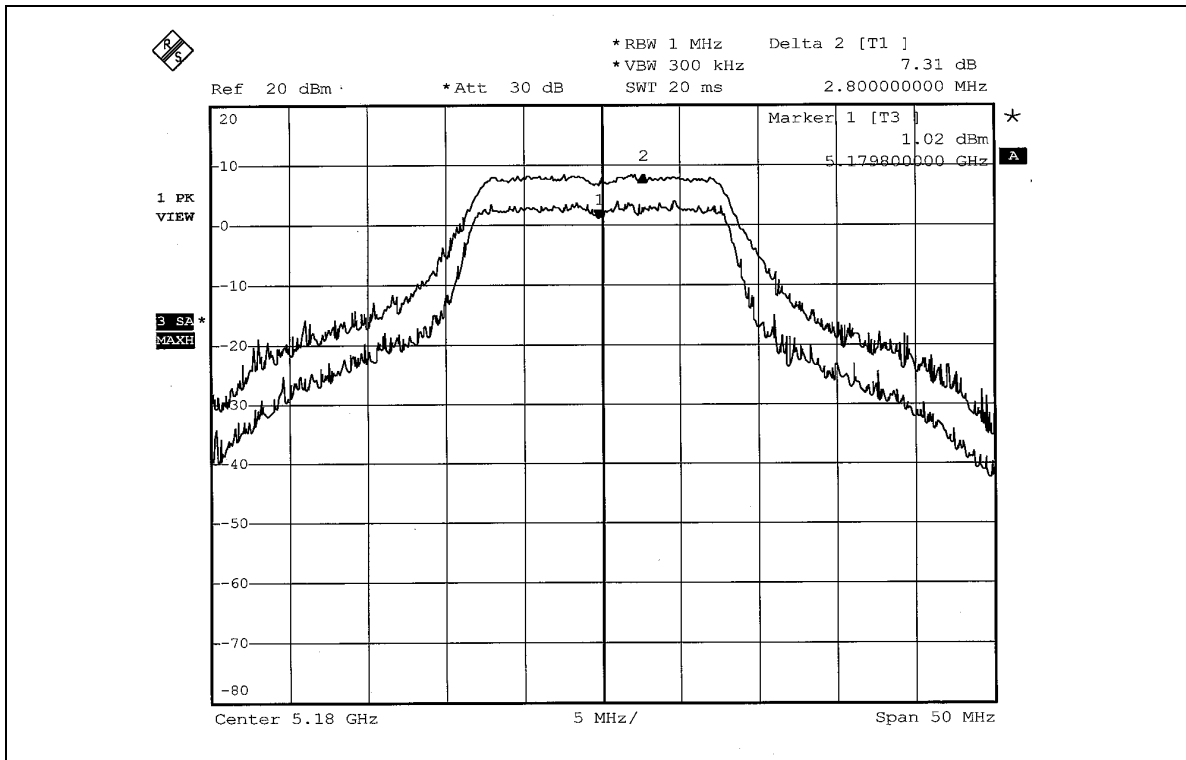


CH 4

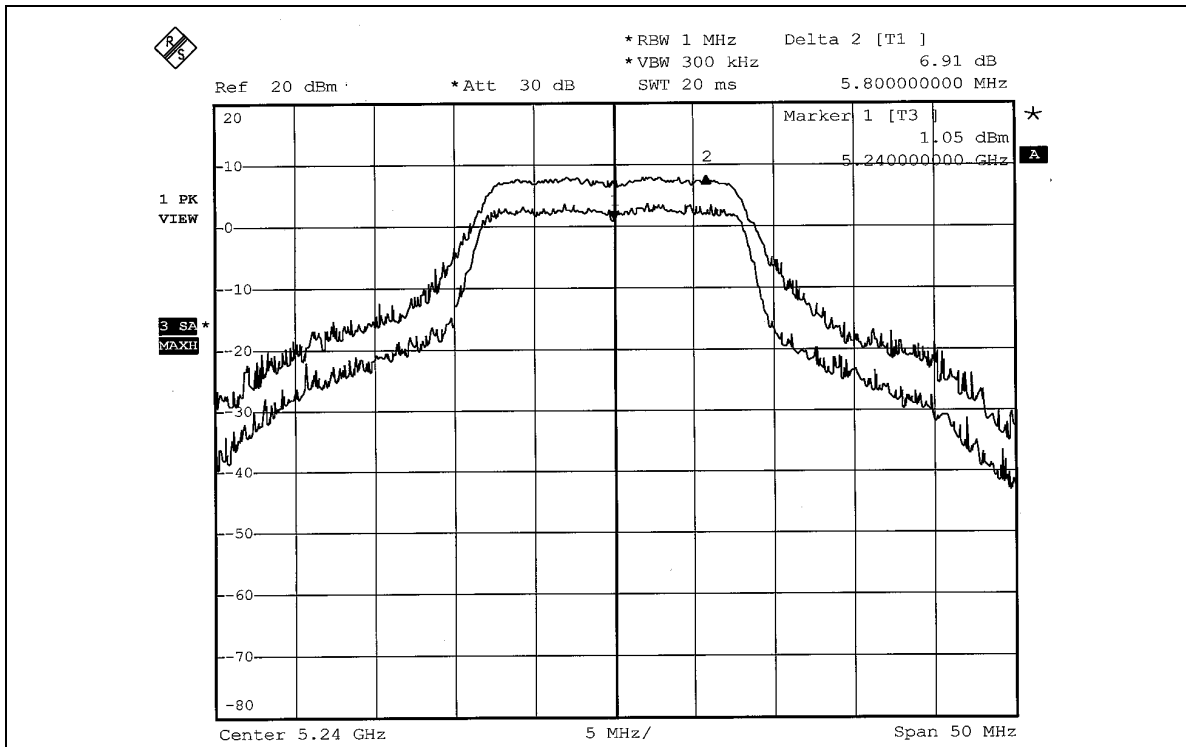




CH 5

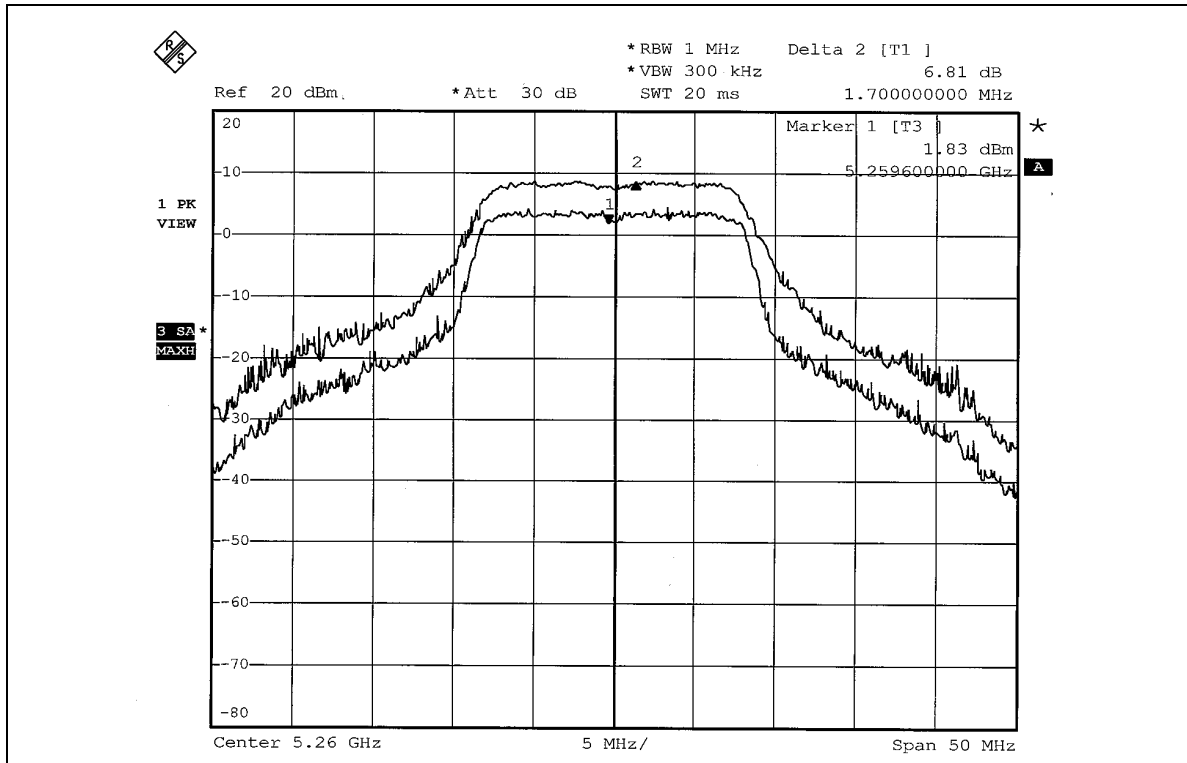

CH 8

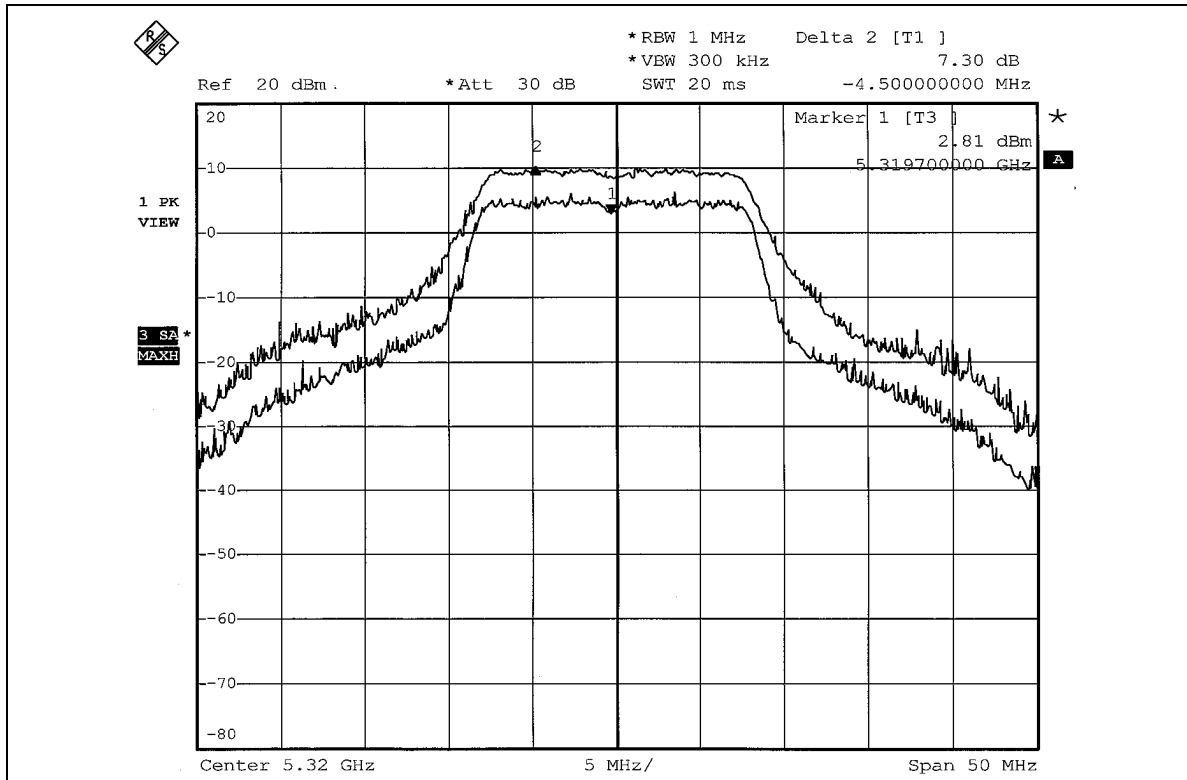


**802.11a Turbo OFDM modulation**

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5210	8.88	13	PASS
2	5250	7.72	13	PASS
3	5290	7.71	13	PASS



CH 1

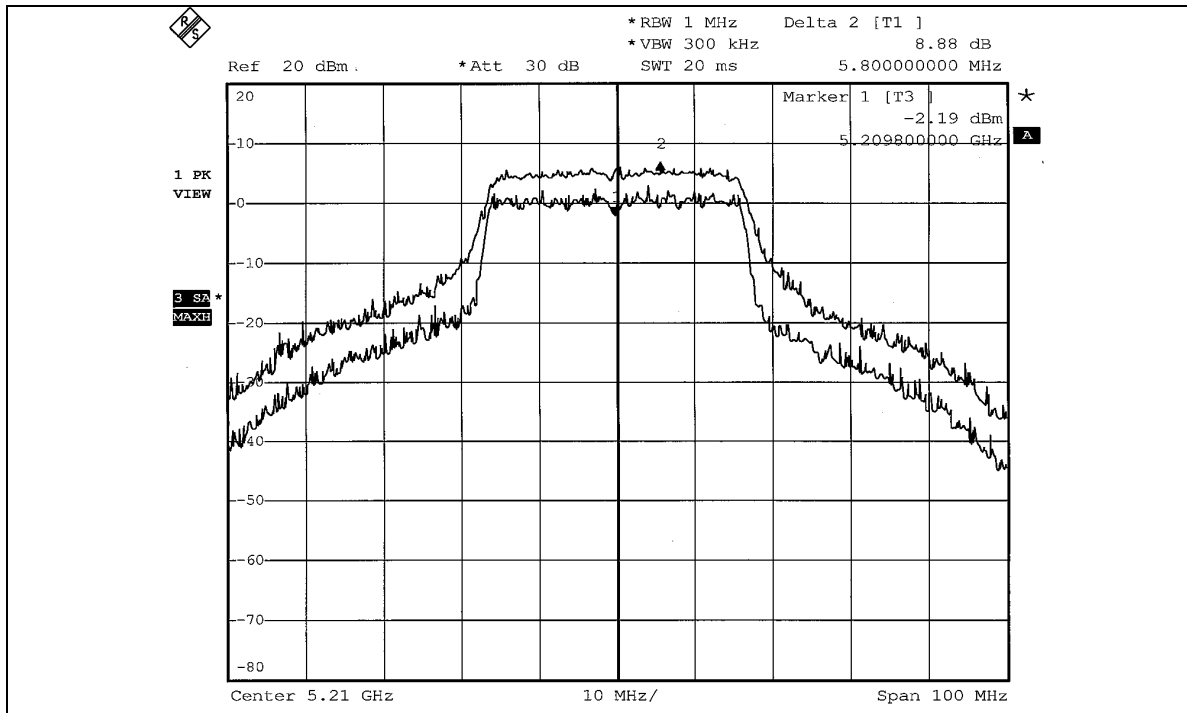


CH 2

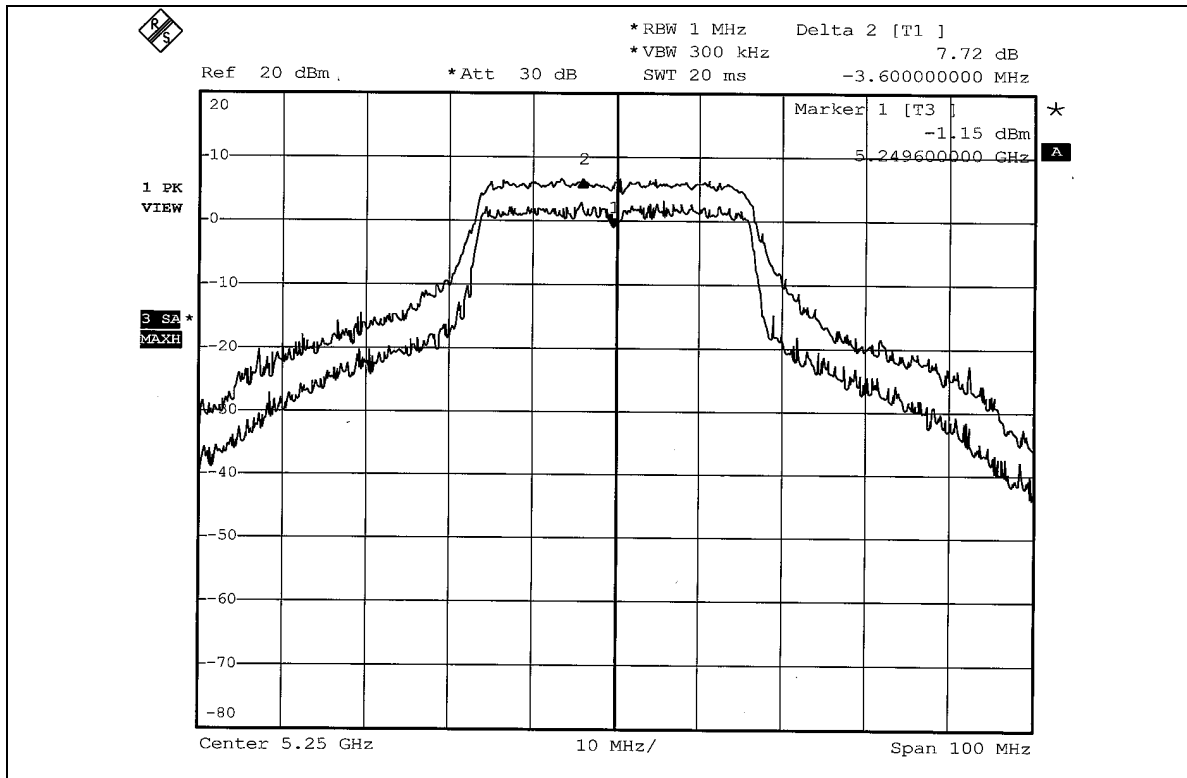



CH 3

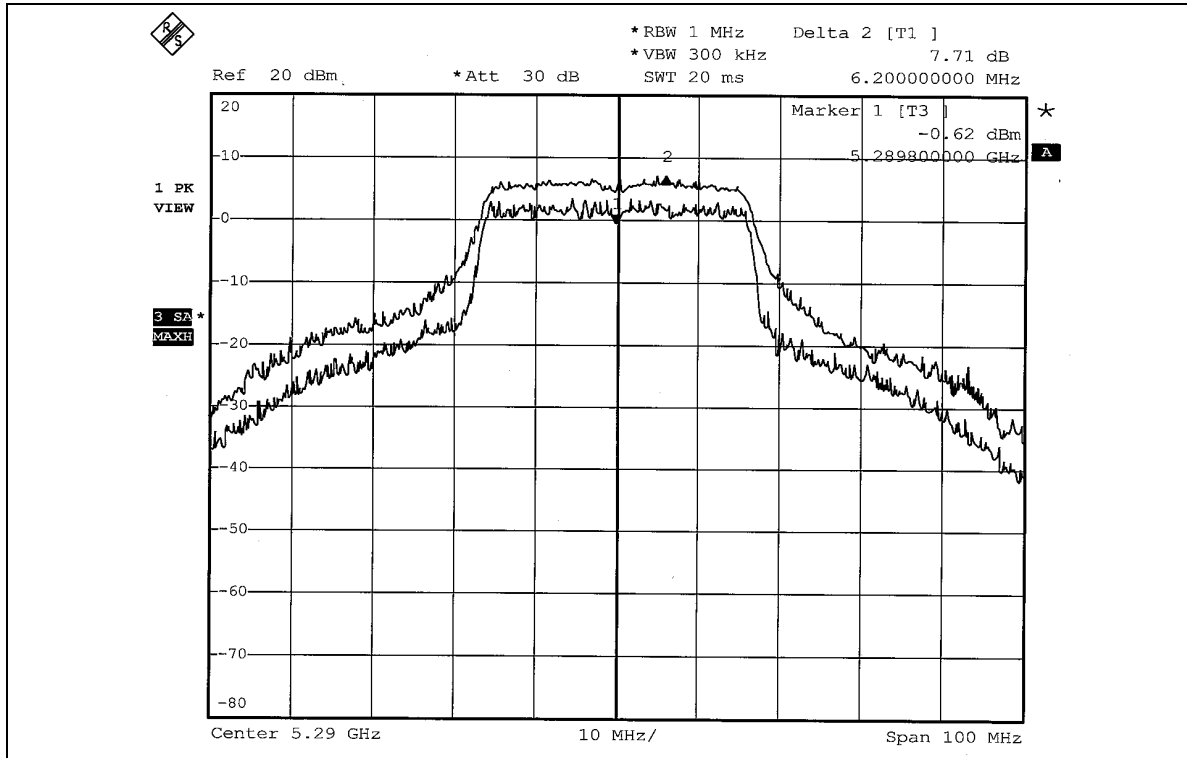



4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

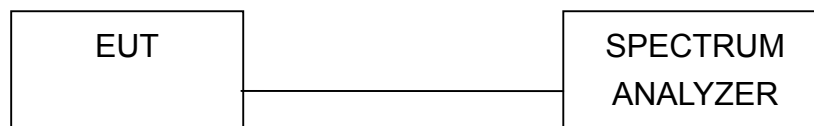

4.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6



4.5.7 TEST RESULTS


802.11a OFDM modulation

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5180	-2.17	4	PASS
4	5240	-1.76	4	PASS
5	5260	-1.18	11	PASS
8	5320	-0.54	11	PASS



CH 1

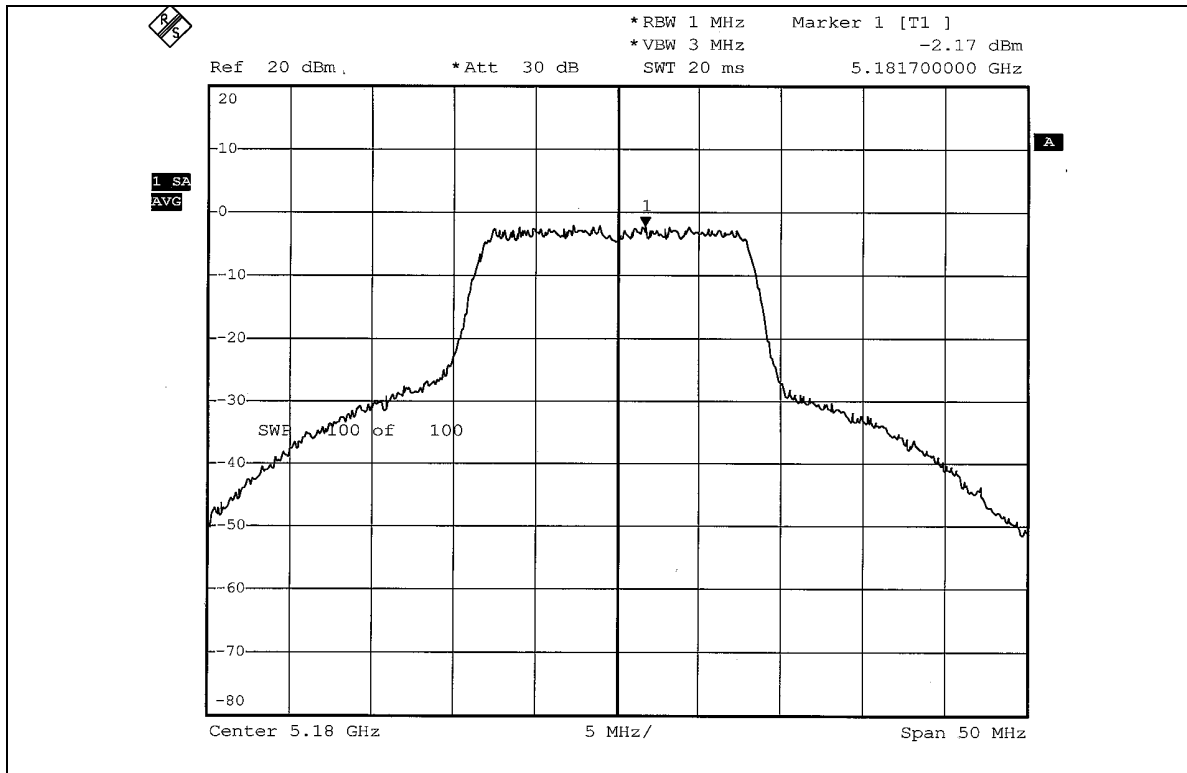


CH 4

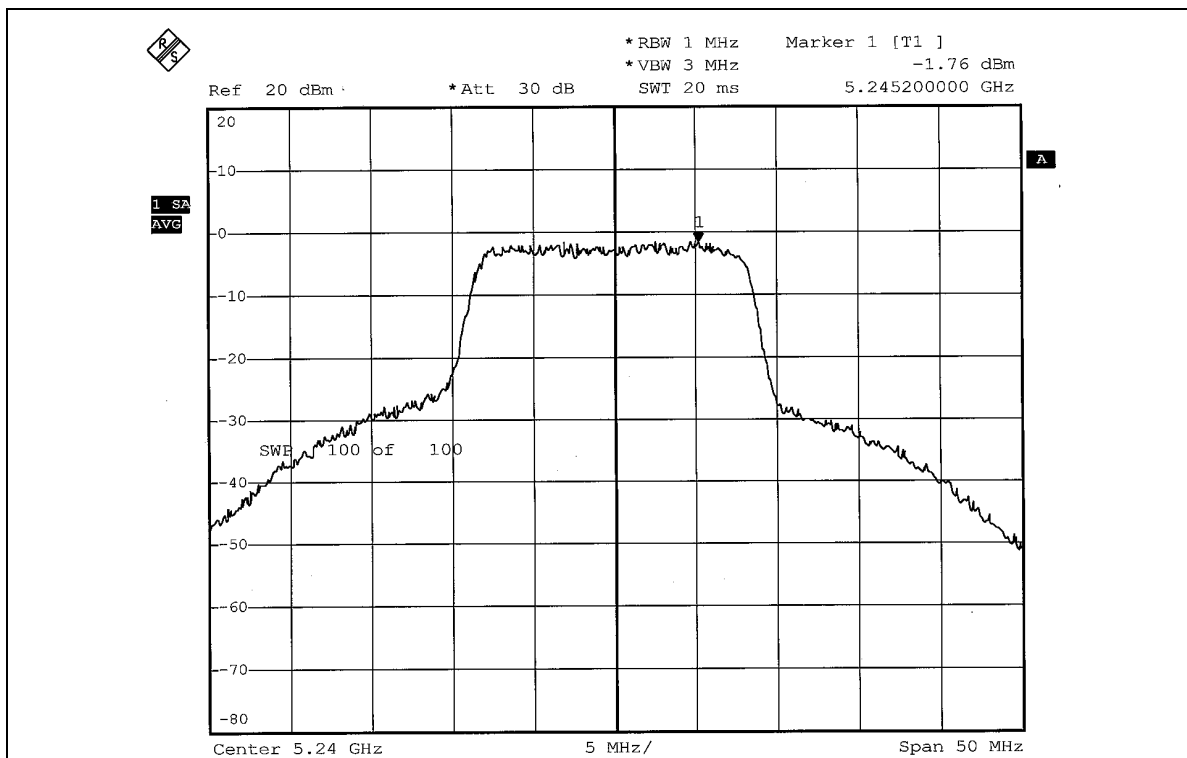




CH 5

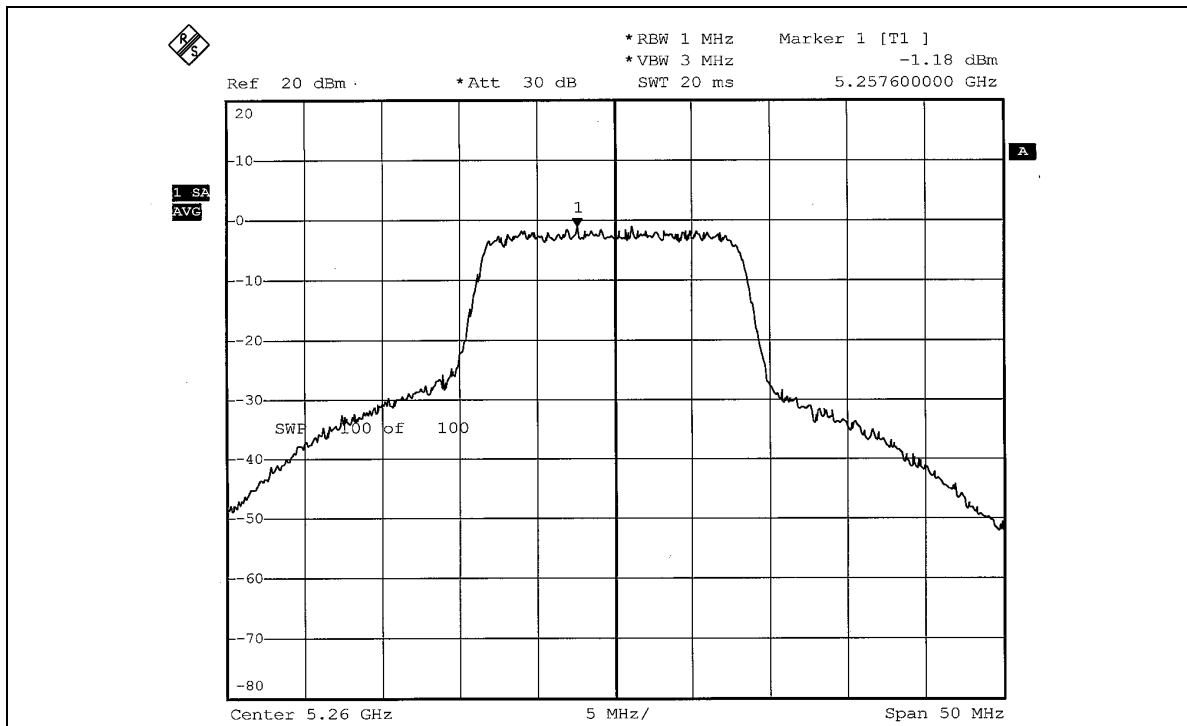

CH 8

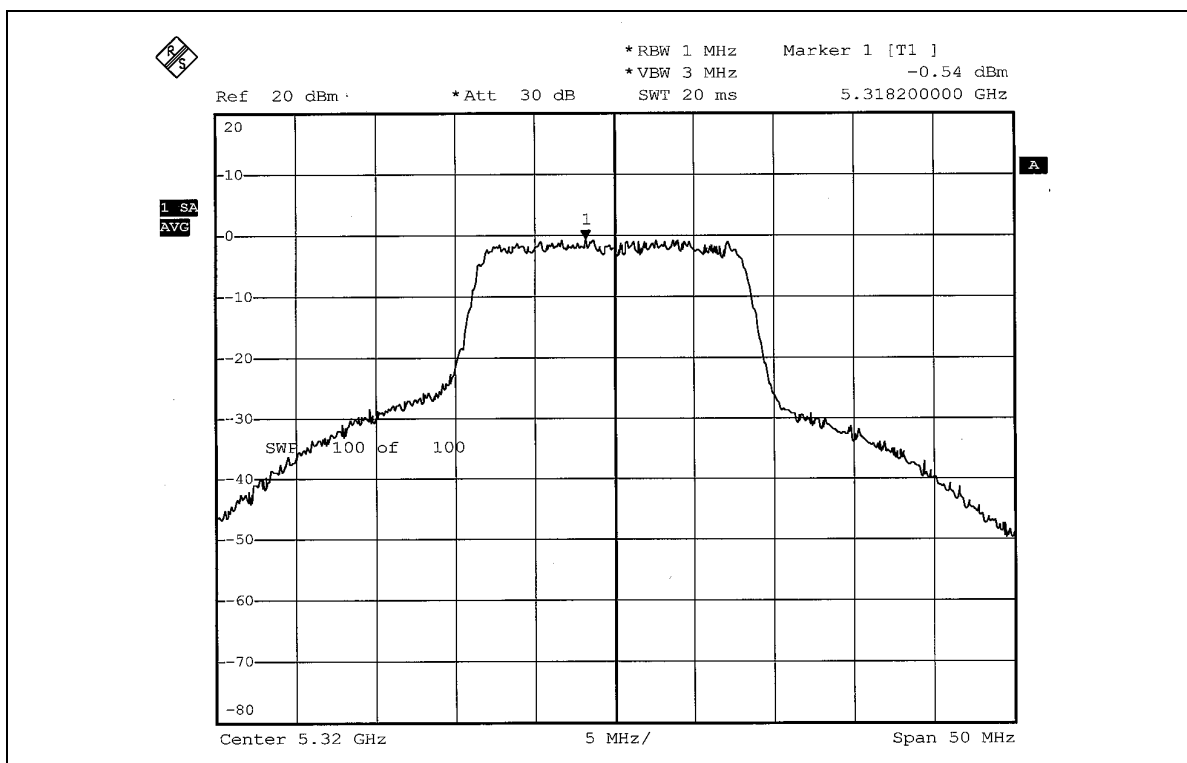


**802.11a Turbo OFDM modulation**

EUT	WLAN 802.11 a/b/g USB2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22deg.C, 55%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1 MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5210	-4.04	4	PASS
2	5250	-3.37	11	PASS
3	5290	-3.13	11	PASS



CH 1

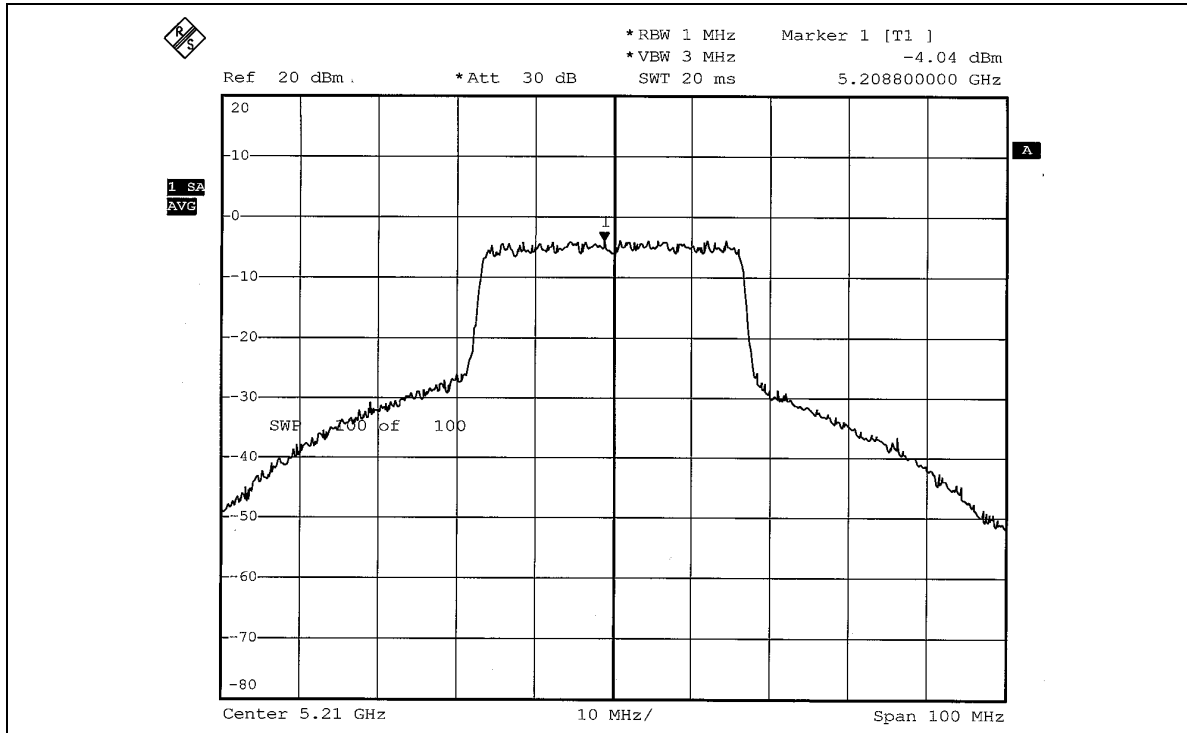


CH 2

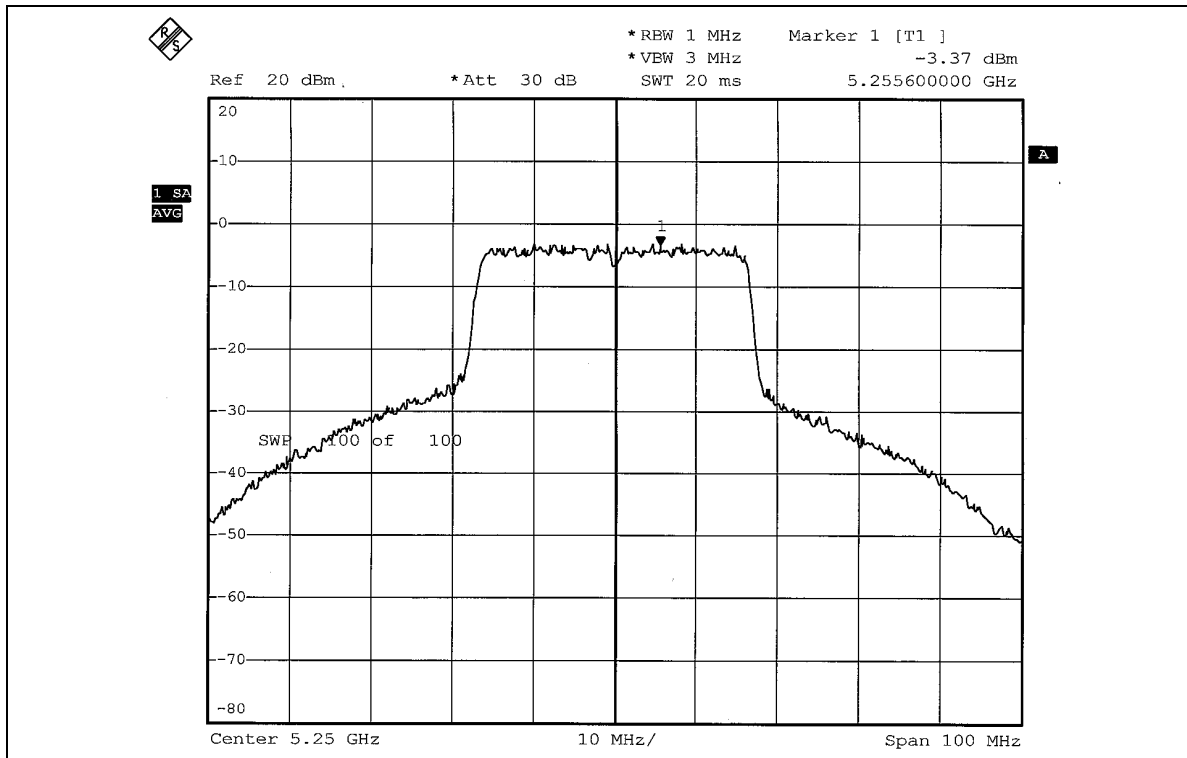



CH 3

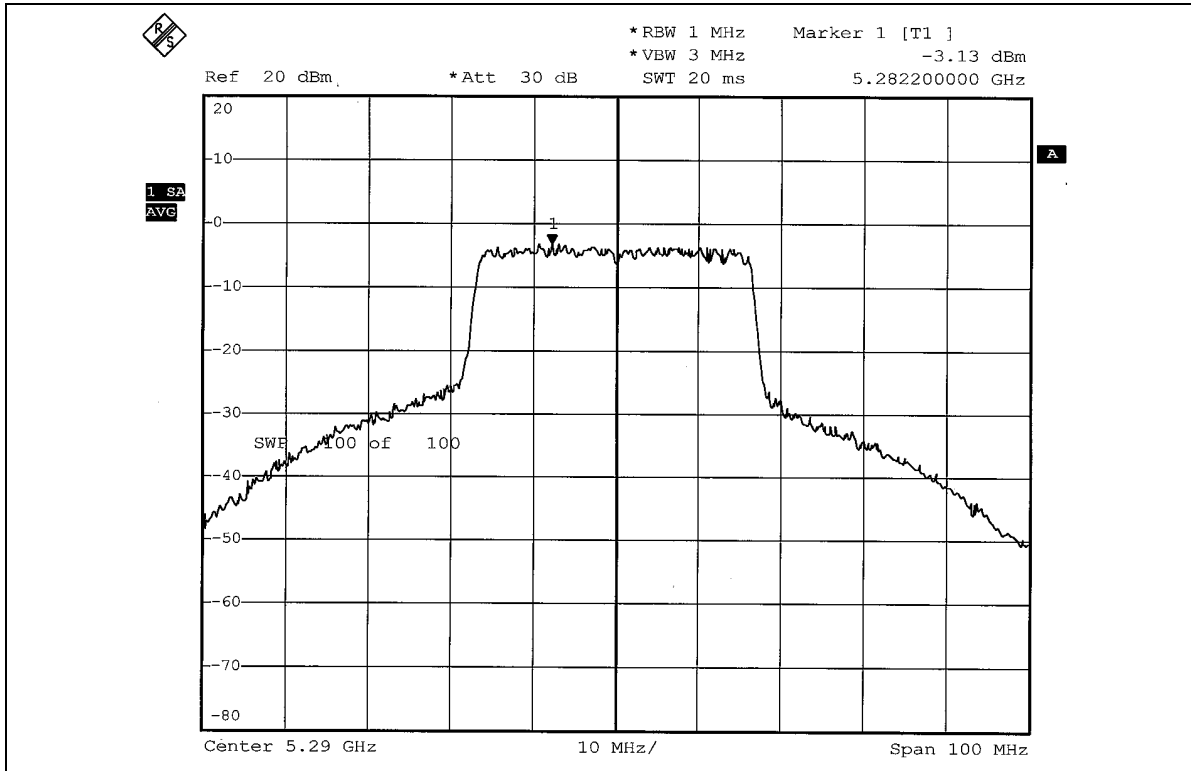



4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ANRITSU SPECTRUM ANALYZER	MS2667C	M10281	Aug. 12, 2005
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W901030	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

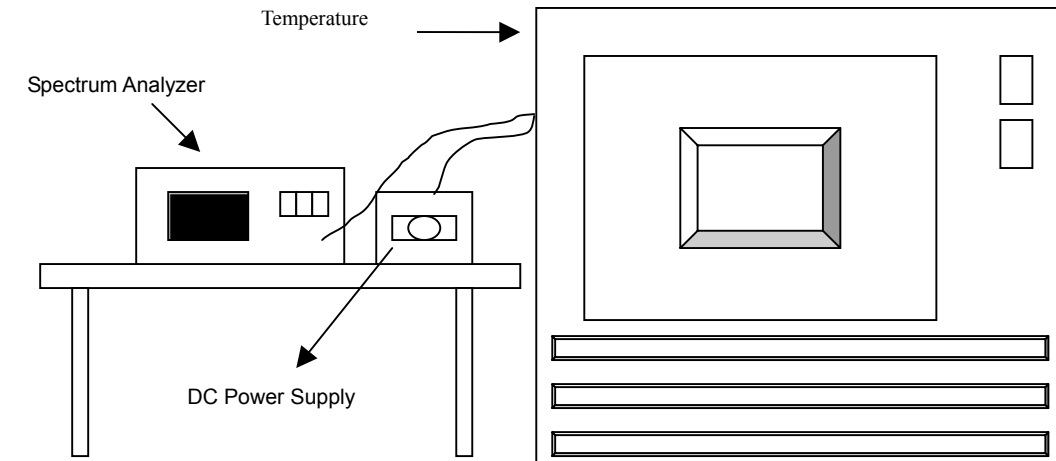

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.7 TEST RESULTS

		Operating frequency: 5320MHz				Limit : ± 0.015%			
Temp. (°C)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	138	5320.0185	0.0003477	5320.0188	0.0003534	5320.0185	0.0003477	5320.0186	0.0003496
	120	5320.0187	0.0003515	5320.0186	0.0003496	5320.0189	0.0003553	5320.0188	0.0003534
	102	5320.0182	0.0003421	5320.0181	0.0003402	5320.0184	0.0003459	5320.0181	0.0003402
40	138	5320.0125	0.0002350	5320.0122	0.0002293	5320.0125	0.0002350	5320.0129	0.0002425
	120	5320.1290	0.0024248	5320.0126	0.0002368	5320.0126	0.0002368	5320.0130	0.0002444
	102	5320.0122	0.0002293	5320.0127	0.0002387	5320.0122	0.0002293	5320.0127	0.0002387
30	138	5320.0092	0.0001729	5320.0091	0.0001711	5320.0093	0.0001748	5320.0095	0.0001786
	120	5320.0091	0.0001711	5320.0092	0.0001729	5320.0095	0.0001786	5320.0096	0.0001805
	102	5320.0094	0.0001767	5320.0094	0.0001767	5320.0092	0.0001729	5320.0093	0.0001748
20	138	5319.9925	-0.0001410	5319.9928	-0.0001353	5319.9923	-0.0001447	5319.9926	-0.0001391
	120	5319.9926	-0.0001391	5319.9923	-0.0001447	5319.9925	-0.0001410	5319.9927	-0.0001372
	102	5319.9928	-0.0001353	5319.9927	-0.0001372	5319.9920	-0.0001504	5319.9922	-0.0001466
10	138	5319.9882	-0.0002218	5319.9882	-0.0002218	5319.9883	-0.0002199	5319.9884	-0.0002180
	120	5319.9981	-0.0000357	5319.9885	-0.0002162	5319.9881	-0.0002237	5319.9886	-0.0002143
	102	5319.9988	-0.0000226	5319.9886	-0.0002143	5319.9884	-0.0002180	5319.9882	-0.0002218
0	138	5319.9852	-0.0002782	5319.9855	-0.0002726	5319.9856	-0.0002707	5319.9855	-0.0002726
	120	5319.9851	-0.0002801	5319.9856	-0.0002707	5319.9857	-0.0002688	5319.9857	-0.0002688
	102	5319.9856	-0.0002707	5319.9853	-0.0002763	5319.9852	-0.0002782	5319.9853	-0.0002763
-10	138	5319.9792	-0.0003910	5319.9793	-0.0003891	5319.9793	-0.0003891	5319.9795	-0.0003853
	120	5319.9793	-0.0003891	5319.9795	-0.0003853	5319.9795	-0.0003853	5319.9793	-0.0003891
	102	5319.9797	-0.0003816	5319.9792	-0.0003910	5319.9792	-0.0003910	5319.9792	-0.0003910
-20	138	5319.9728	-0.0005113	5319.9726	-0.0005150	5319.9723	-3.3839793	5319.9725	-0.0005169
	120	5319.9725	-0.0005169	5319.9728	-0.0005113	5319.9726	-0.0005150	5319.9723	-0.0005207
	102	5319.9722	-0.0005226	5319.9721	-0.0005244	5319.9722	-0.0005226	5319.9721	-0.0005244
-30	138	5319.9655	-0.0006485	5319.9654	-0.0006504	5319.9652	-0.0006541	5319.9653	-0.0006523
	120	5319.9652	-0.0006541	5319.9655	-0.0006485	5319.9657	-0.0006447	5319.9654	-0.0006504
	102	5319.9651	-0.0006560	5319.9657	-0.0006447	5319.9654	-0.0006504	5319.9658	-0.0006429

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak filed strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

**802.11a OFDM modulation**

Channel 1 (5180MHz)

The band edge emission plot on page 67 shows 38.24dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 109.60dBuV/m (Peak), so the maximum field strength in restrict band is $109.60-38.24=71.36$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 67 shows 51.18dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 99.56dBuV/m (Average), so the maximum field strength in restrict band is $99.56-51.18=48.38$ dBuV/m which is under 54dBuV/m limit.

Channel 8 (5320MHz)

The band edge emission plot on page 68 shows 45.41dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 is 111.87dBuV/m (Peak), so the maximum field strength in restrict band is $111.87-45.41=66.46$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 69 shows 51.06dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 is 100.85dBuV/m (Average), so the maximum field strength in restrict band is $100.85-51.06=49.79$ dBuV/m which is under 54dBuV/m limit.

802.11a Turbo OFDM modulation

Channel 1 (5210MHz)

The band edge emission plot on page 70 shows 41.45dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 107.04dBuV/m (Peak), so the maximum field strength in restrict band is $107.04-41.45=65.59$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 70 shows 49.39dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 96.24dBuV/m (Average), so the maximum field strength in restrict band is $96.24-49.39=46.85$ dBuV/m which is under 54dBuV/m limit.





Channel 3 (5290MHz)



The band edge emission plot on the pages 71 shows 46.07dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 3 is 107.86dBuV/m (Peak), so the maximum field strength in restrict band is $107.86-46.07=61.79$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the pages 72 shows 50.09dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 3 is 97.11dBuV/m (Average), so the maximum field strength in restrict band is $97.11-50.09=47.02$ dBuV/m which is under 54dBuV/m limit.



802.11a OFDM modulation

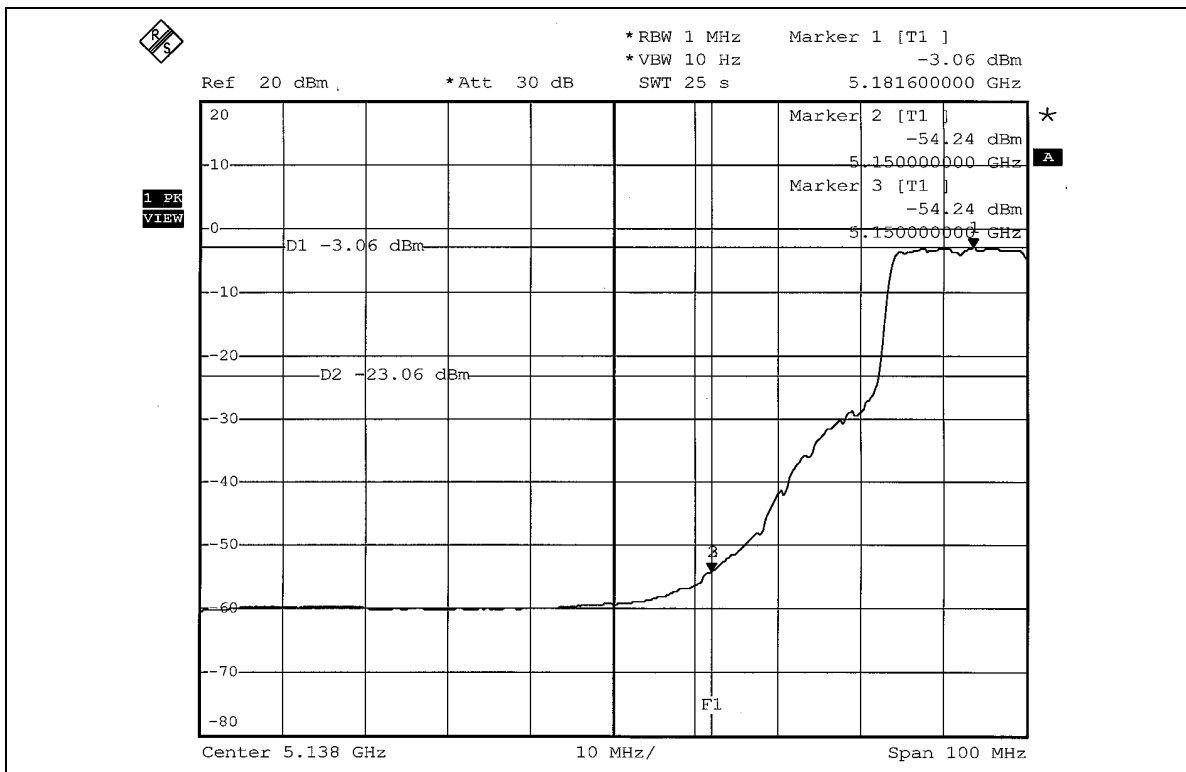
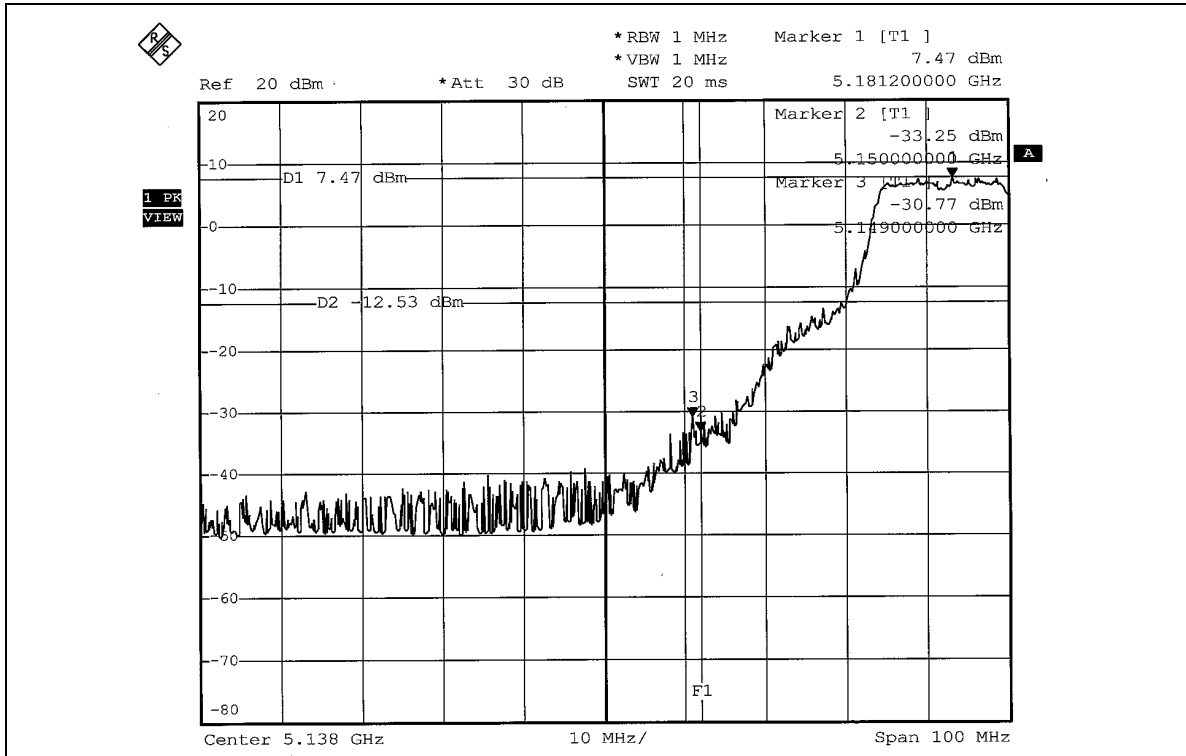


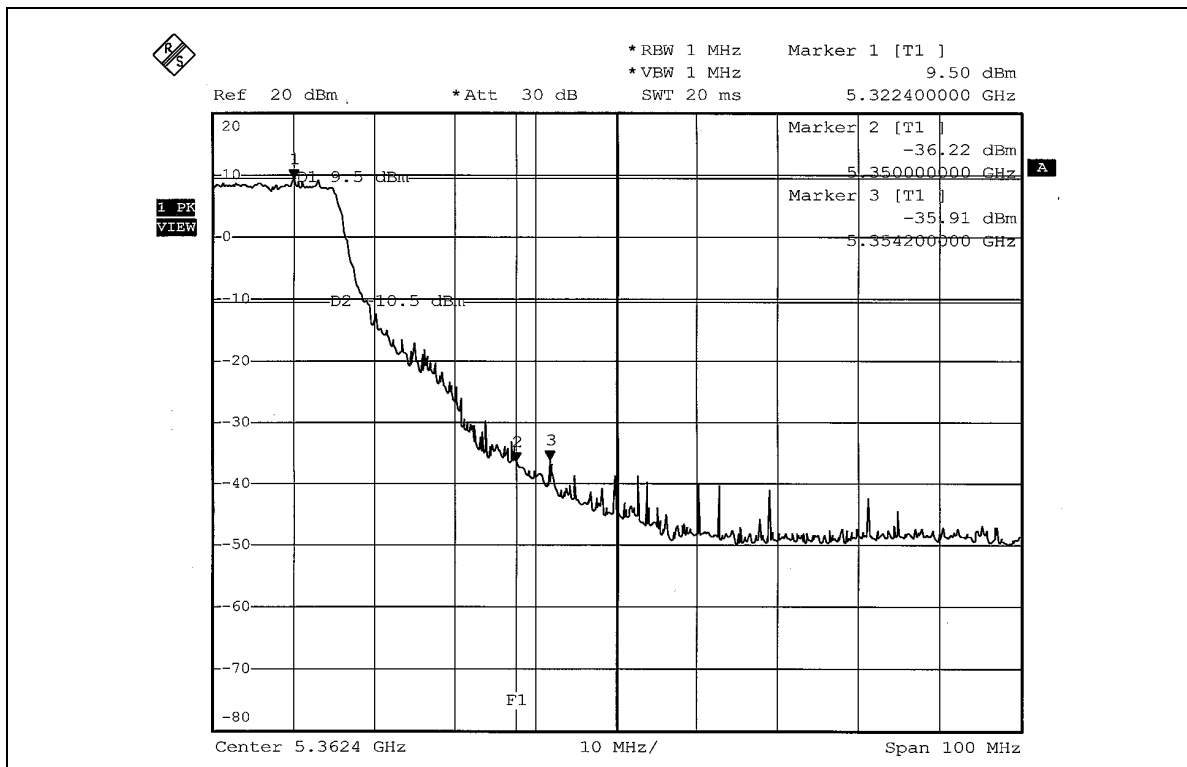
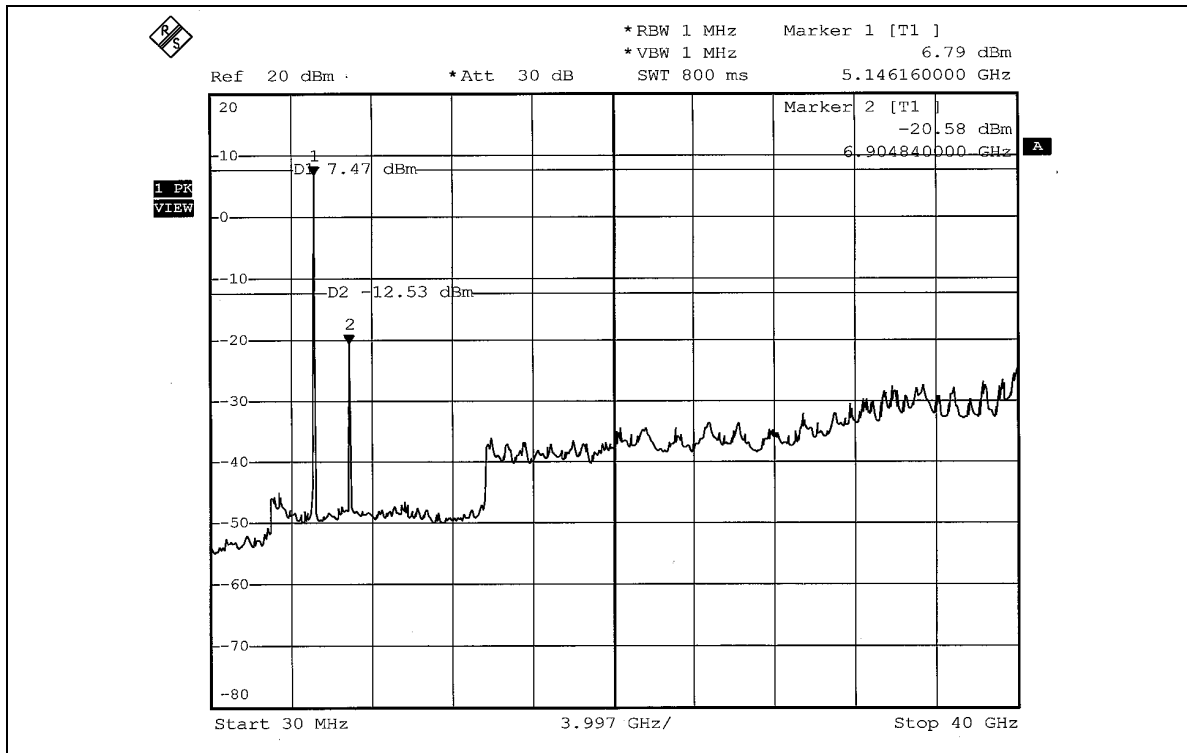


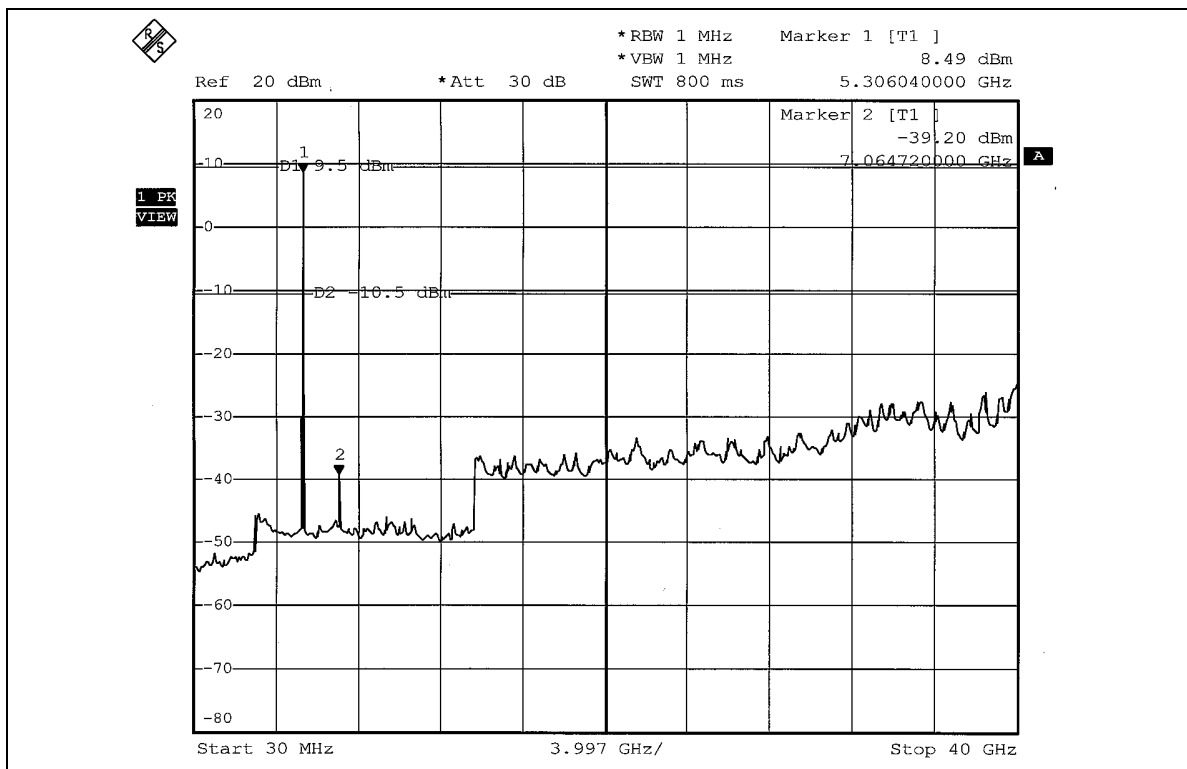
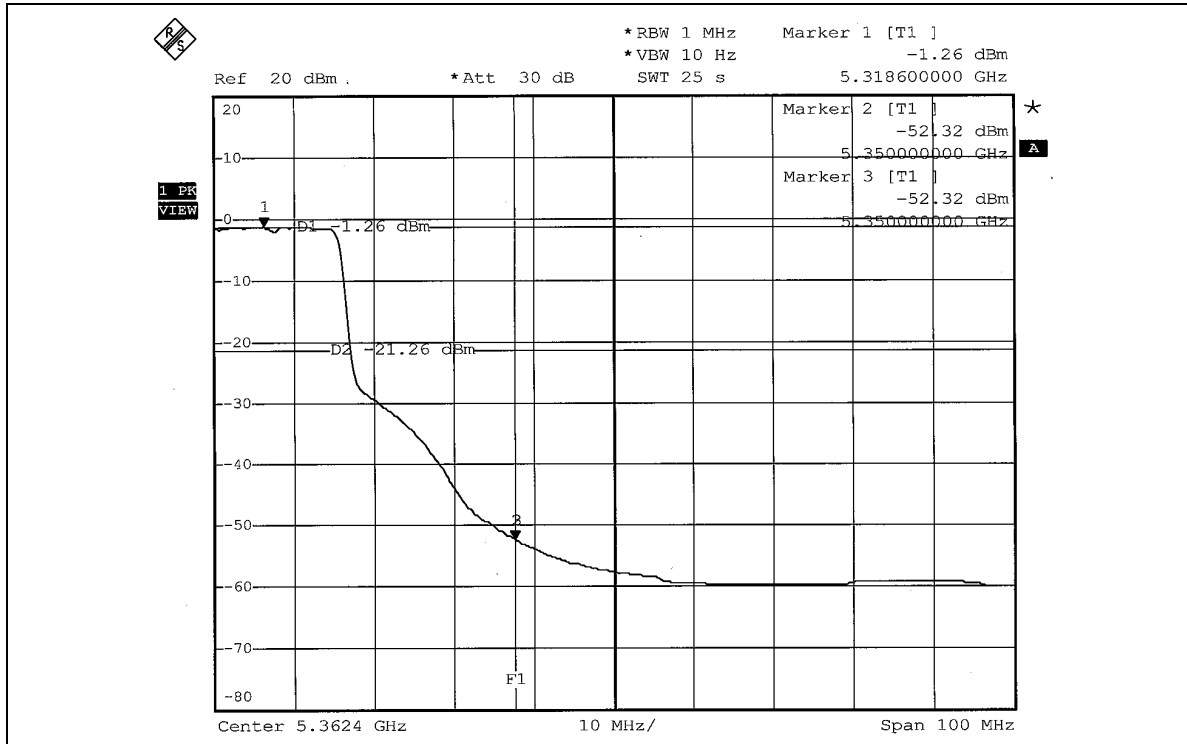




802.11a Turbo OFDM modulation

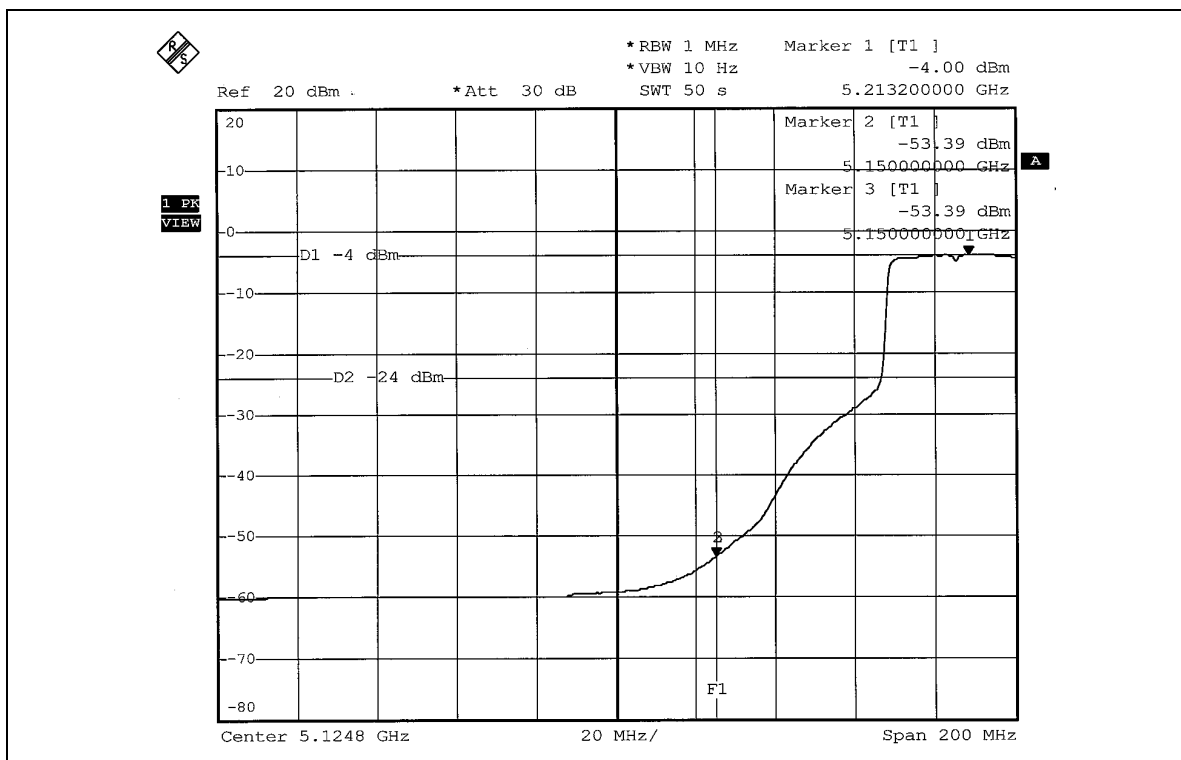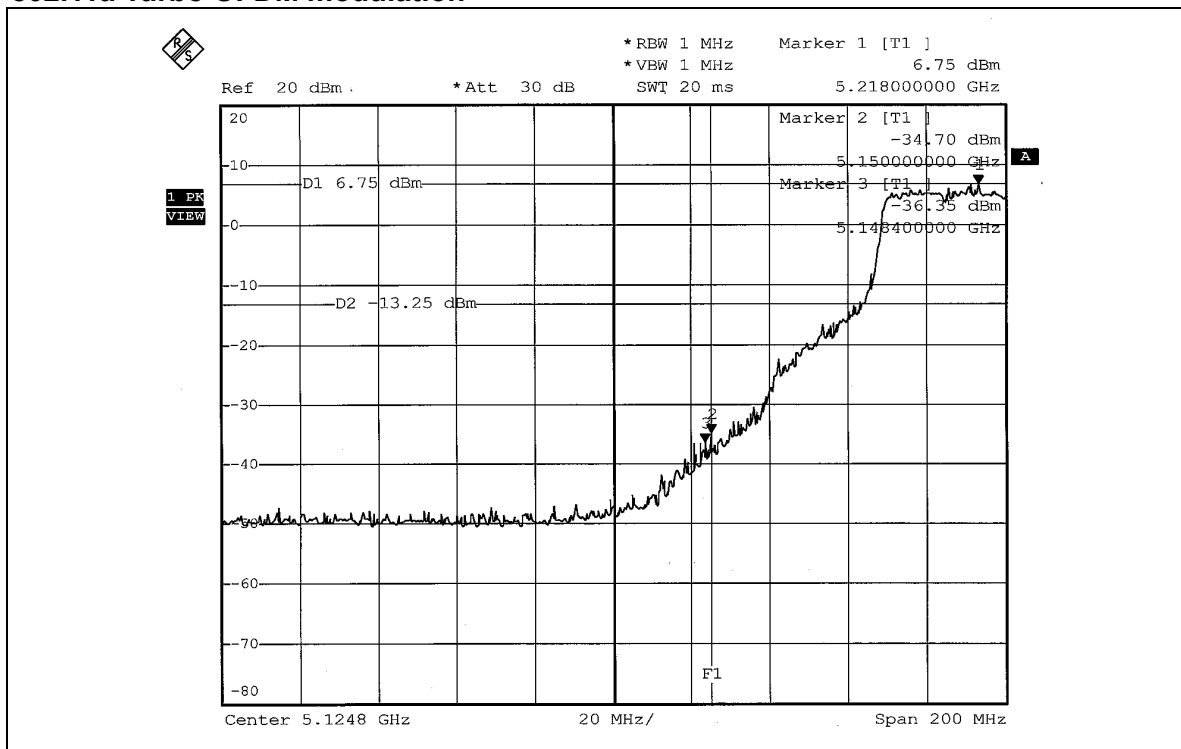

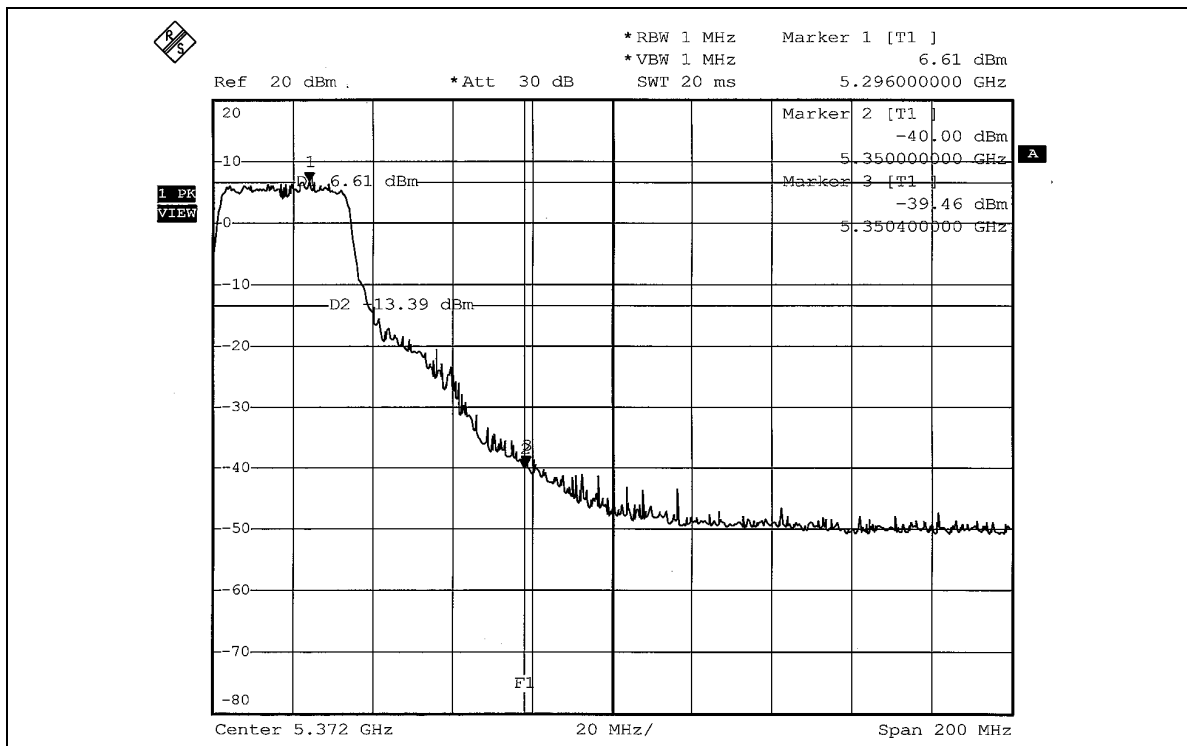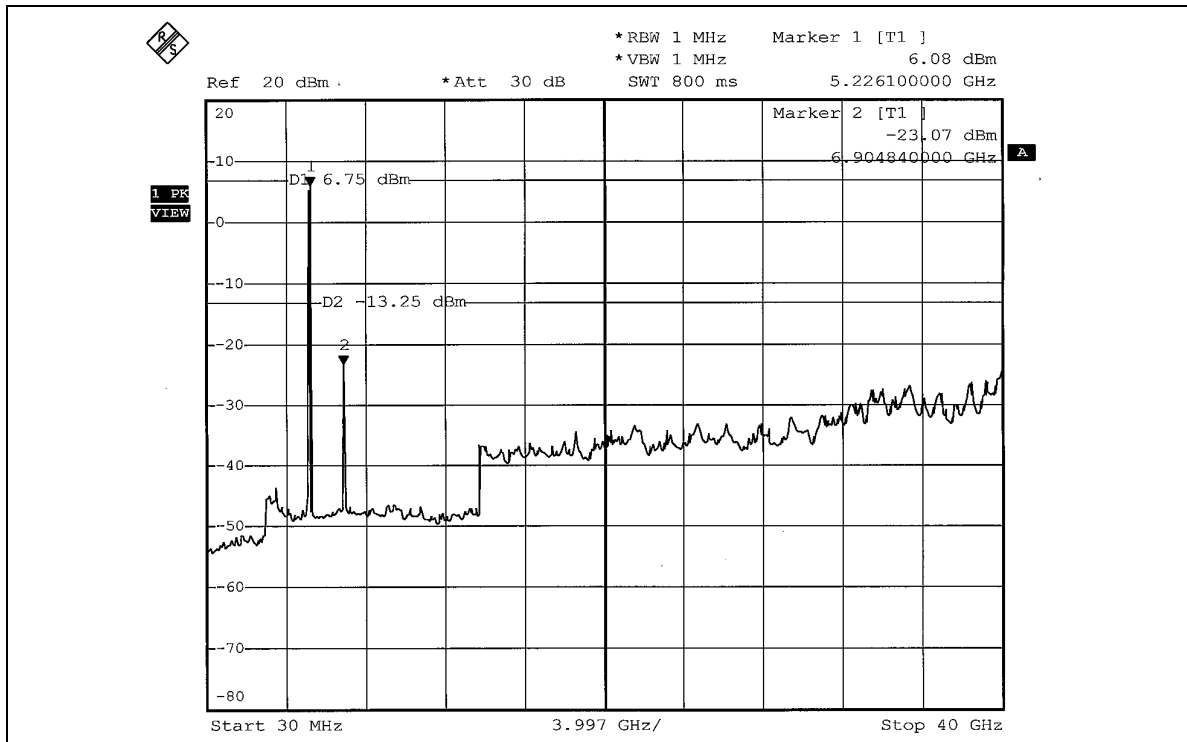

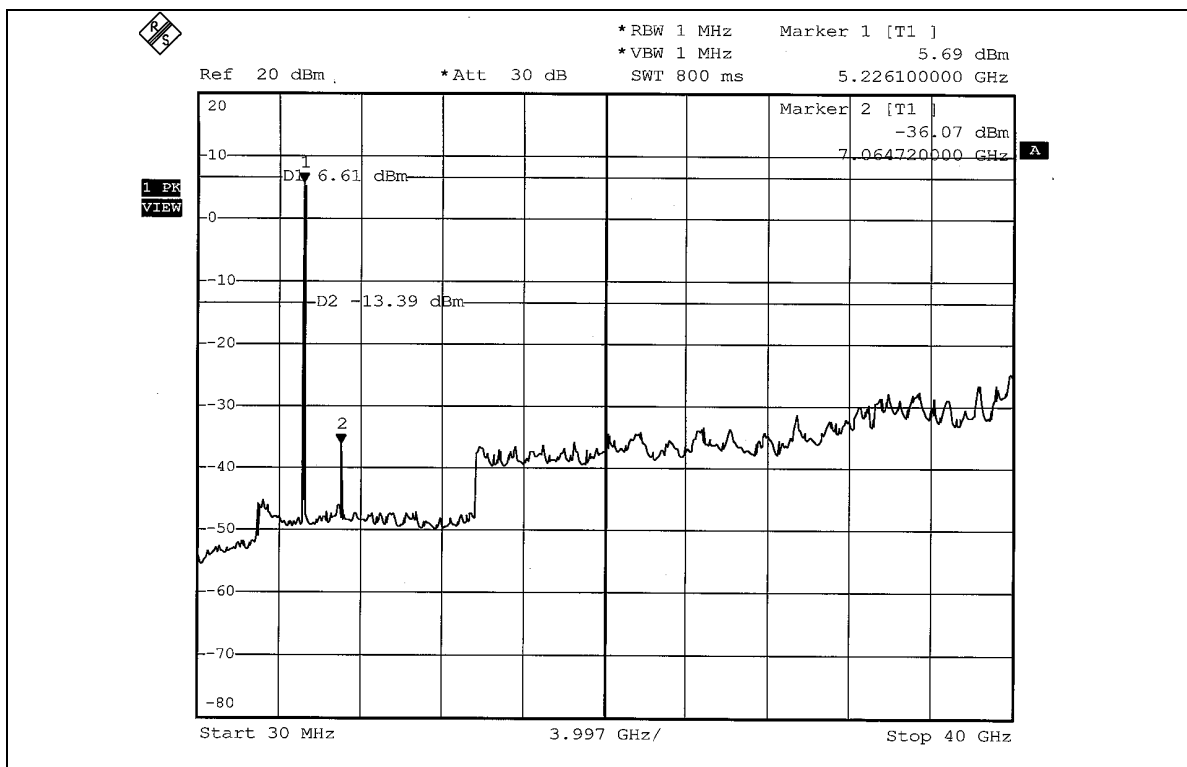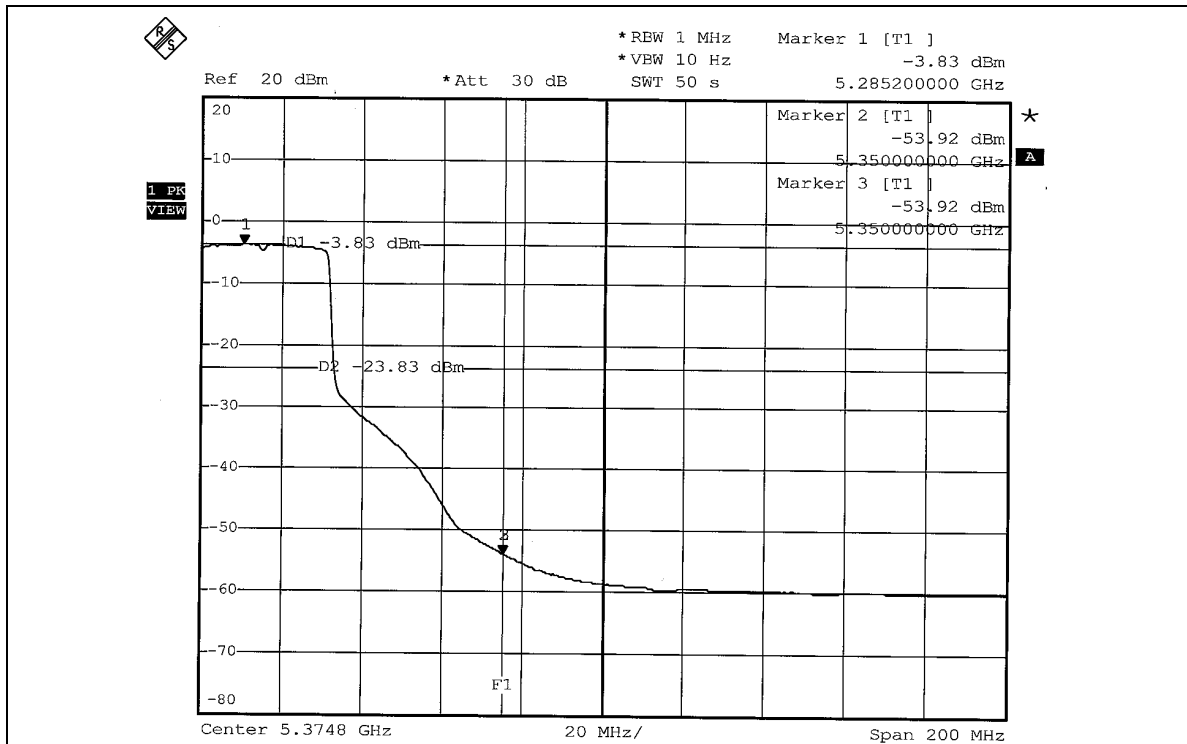



4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without connector. The maximum Gain of the antenna is 3.18dBi.


5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST


Test Mode 1

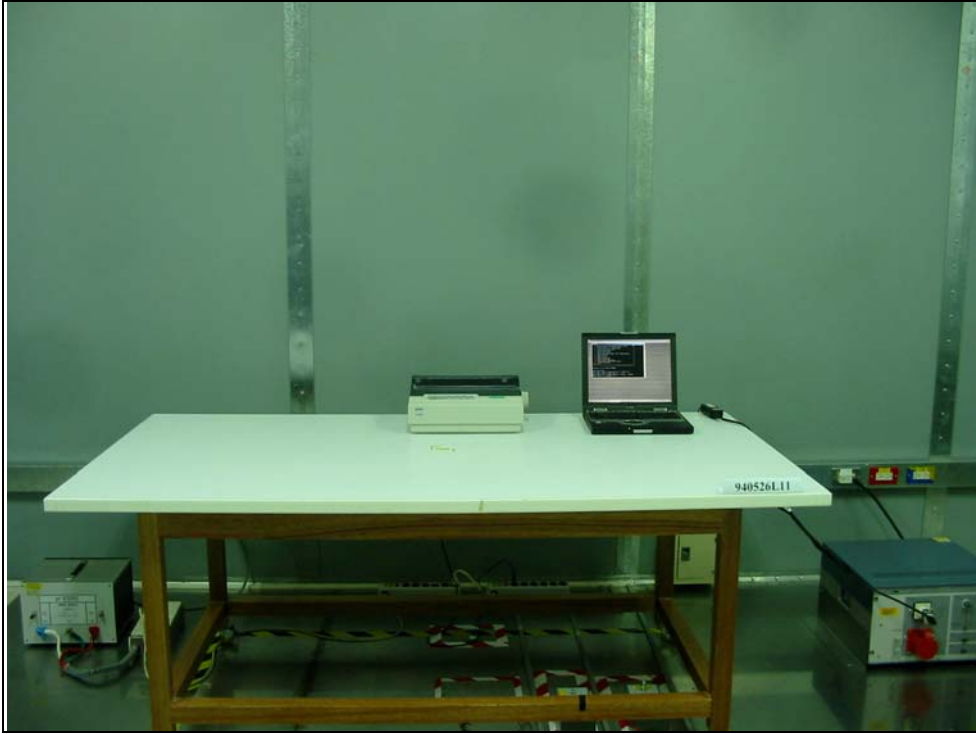


Test Mode 2

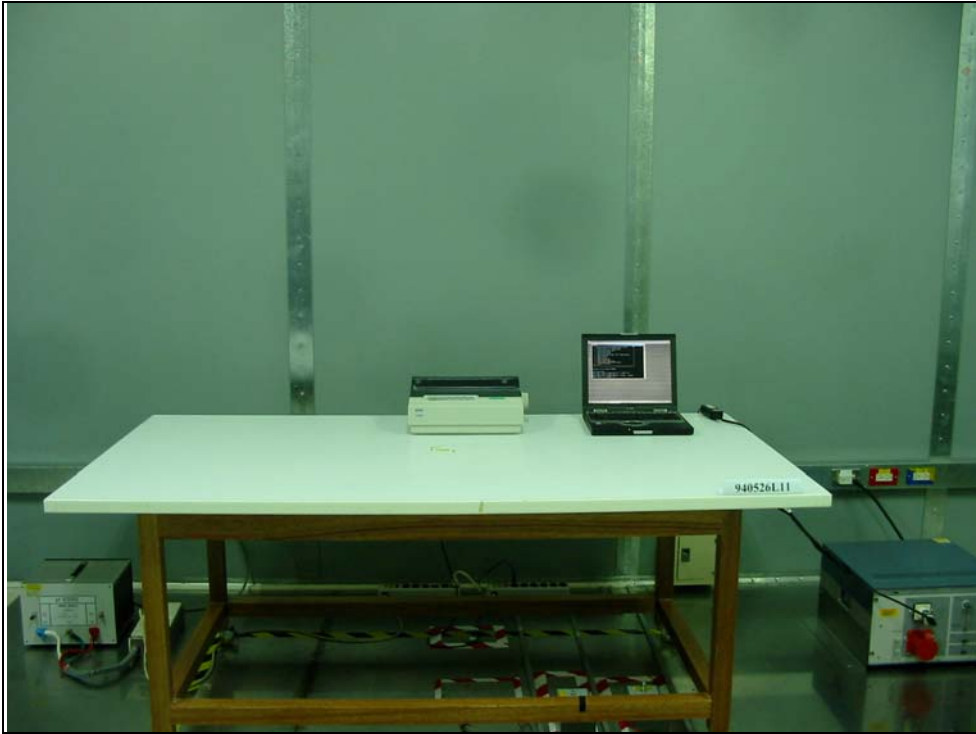

RADIATED EMISSION TEST
Test Mode 1

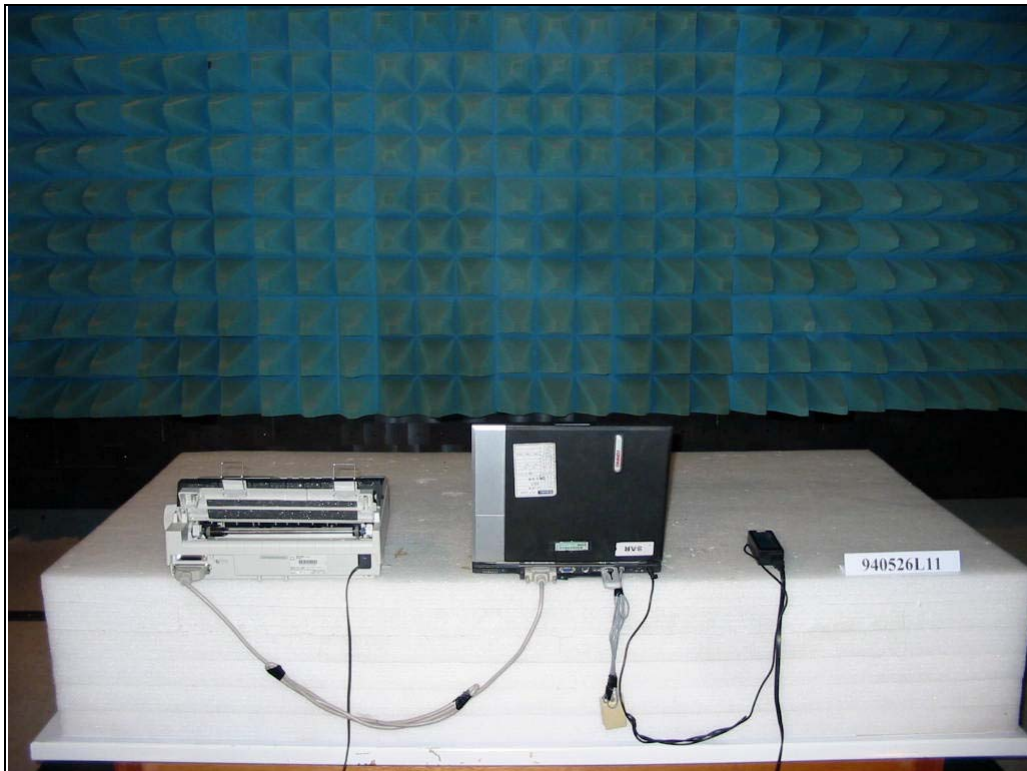

Test Mode 2

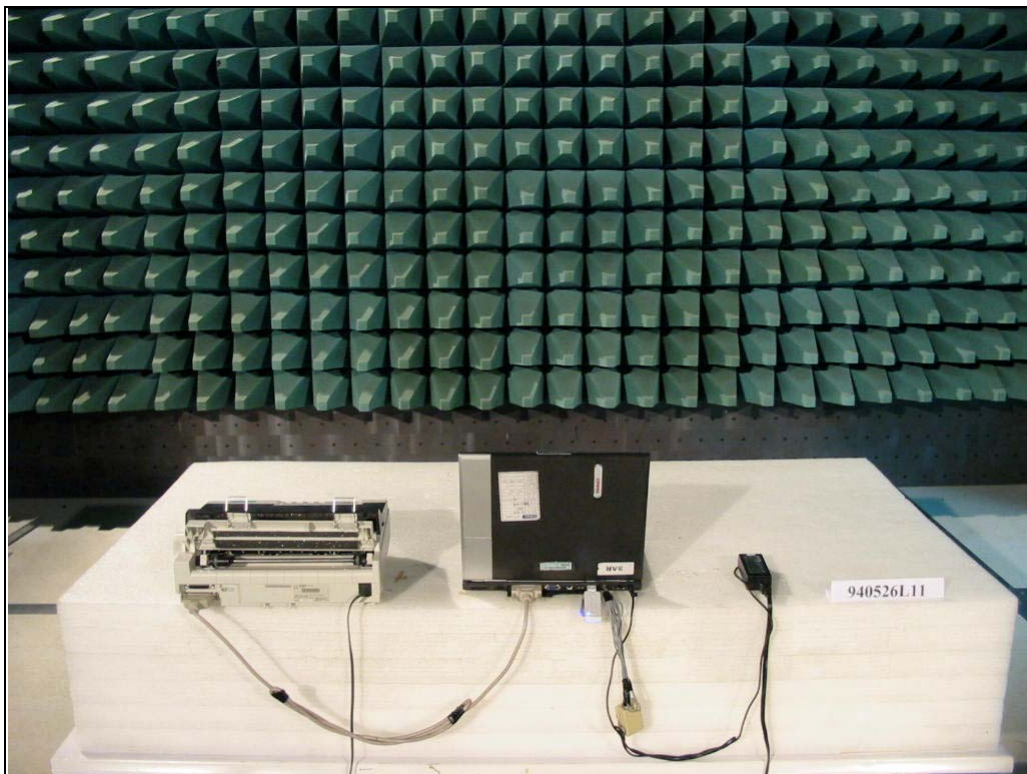



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index_5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also