

Partial FCC Test Report

(PART 22)

Report No.: RFBGSN-WTW-P20080589-9

FCC ID: NKS-MA1BA1TE1

Test Model: Trimble Gateway-MA1, Trimble Gateway-BA1, Trimble Gateway-TE1
(refer to item 3.1 for more details)

Received Date: Aug. 29, 2020

Test Date: Oct. 17, 2020 ~ Nov. 05, 2020

Issued Date: Nov. 13, 2020

Applicant: PeopleNet Communications Corporation

Address: 4400 Baker Road, Minnetonka Minnesota 55343-8684 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards and references.....	12
4 Test Types and Results	13
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results	15
4.2 Radiated Emission Measurement.....	16
4.2.1 Limits of Radiated Emission Measurement	16
4.2.2 Test Procedure	16
4.2.3 Deviation from Test Standard	16
4.2.4 Test Setup.....	17
4.2.5 Test Results	18
5 Pictures of Test Arrangements.....	30
Appendix – Information of the Testing Laboratories	31



Release Control Record

Issue No.	Description	Date Issued
RFBGSN-WTW-P20080589-9	Original Release	Nov. 13, 2020

1 Certificate of Conformity

Product: Trimble Gateway NA

Brand: Trimble

Test Model: Trimble Gateway-MA1, Trimble Gateway-BA1, Trimble Gateway-TE1
(refer to item 3.1 for more details)

Sample Status: Engineering Sample

Applicant: PeopleNet Communications Corporation

Test Date: Oct. 17, 2020 ~ Nov. 05, 2020

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Nov. 13, 2020

Vera Huang / Specialist

Approved by : , **Date:** Nov. 13, 2020

Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
22.913 (d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 22.355	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
22.917	Band Edge Measurements	N/A	Refer to Note
2.1051 22.917	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -13.87 dB at 2479.20 MHz.

Note:

1. Only ERP and Radiated Spurious Emissions are performed for the addendum. Refer to BV CPS report no. RFBGSN-WTW-P20080589 for the other test data.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2020	Mar. 17, 2021
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 12, 2019	Dec. 11, 2020
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
BILOG Antenna SCHWARZBECK	VULB 9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2019	Nov. 24, 2020
Preamplifier EMCI	EMC001340	980201	Oct. 21, 2020	Oct. 20, 2021
Preamplifier EMCI	EMC 012645	980115	Oct. 07, 2020	Oct. 06, 2021
Preamplifier EMCI	EMC 330H	980112	Oct. 07, 2020	Oct. 06, 2021
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	180409	Jan. 18, 2020	Jan. 17, 2021
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 07, 2020	Oct. 06, 2021
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 07, 2020	Oct. 06, 2021
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester- Wireless Agilent	8960 Series 10	MY53201073	Jul. 01, 2019	Jun. 30, 2021
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 13, 2020	Feb. 12, 2021

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Trimble Gateway NA	
Brand	Trimble	
Test Model	Trimble Gateway-MA1, Trimble Gateway-BA1, Trimble Gateway-TE1	
Model Difference	Refer to note for more details	
Status of EUT	Engineering Sample	
Power Supply Rating	12 Vdc (adapter)	
Modulation Type	WCDMA V	QPSK
Frequency Range	WCDMA V	826.4 ~ 846.6 MHz
Max. ERP Power	WCDMA V	154.53 mW
Antenna Type	Refer to Note as below	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:

1. The information of module collocated in the EUT is listed as below.

Module	Brand	Model	EUT Model		
			Trimble Gateway-MA2	Trimble Gateway-BA2	Trimble Gateway-TE2
BT/WLAN Module	msi	BM25	V	V	V
WWAN Module	Quectel	EC25-A	V	V	V

2. The difference between all models are listed as below.

Ant.	Brand	Model	Ant. Type	Remark	EUT Model		
					EUT 1	EUT 2	EUT 3
					Trimble Gateway-MA2	Trimble Gateway-BA2	Trimble Gateway-TE2
WWAN Antenna 1	TAOGLAS	PCS.06.A	SMD Antenna	Internal, Main Antenna	V		V
WWAN Antenna 2	TAOGLAS	PCS.06.B	SMD Antenna	Internal, Aux. Antenna	V	V	V
WWAN Antenna 3	TAOGLAS	MA240.LBI.001	Adhesive Mount Combination Antenna	External, Main Antenna	V		
WWAN Antenna 4	TAOGLAS	MA240.LBI.001	Adhesive Mount Combination Antenna	External, Aux. Antenna	V		
WWAN Antenna 5	PACCAR	PP407031	Exterior-mount Antenna	External, Main Antenna		V	
WLAN Antenna	TAOGLAS	FXP826.07.0120C	FPC Antenna	--	V	V	V

EUT Model	Connector
Trimble Gateway-MA2	a. 1 44-pin Sinbon connector b. 3 Fakra connectors for external antennas c. 1 M13 connector for ethernet
Trimble Gateway-BA2	a. 1 44-pin Sinbon connector b. 2 Fakra connectors for external antennas c. 1 M13 connector for ethernet
Trimble Gateway-TE2	1 44-pin Sinbon connector


3. The antenna gain is listed as below.

	Band	WCDMA V
Gain (dBi)	Antenna 1	0.53
	Antenna 2	0.75
	Antenna 3	0.94
	Antenna 4	1
	Antenna 5	3


4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

Mode A, D

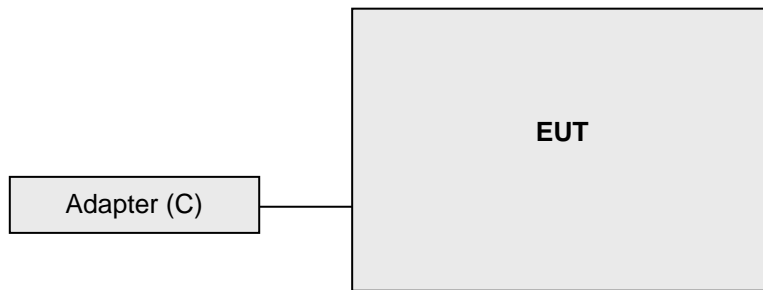

Mode B, C

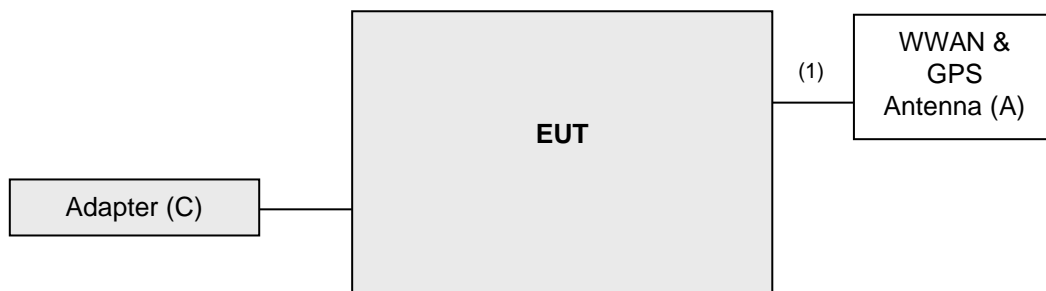

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	WWAN & GPS Antenna	TAOGLAS	MA240.LBI.001	NA	NA	For Mode B, Provided by client
		PACCAR	PP407031	NA	NA	For Mode C, Provided by client
B	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	NA	--
C	Adapter	TPT	PMW120300W8	NA	NA	Provided by client AC Input: 100-240V~, 50-60Hz, 1.1A MAX DC Output: 12V, 3.0A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item B acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RF Cable	3	3	N	0	-

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

EUT Configure Mode	Description	ERP	Radiated Emission
A	EUT 1 + Antenna 1 & 2	-	Y-axis
B	EUT 1 + Antenna 3 & 4	-	X-axis
C	EUT 2 + Antenna 2 & 5	X-plane	X-axis
D	EUT 3 + Antenna 1 & 2	-	Y-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
C	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
A, D	Radiated Emission	4132 to 4233	4233	WCDMA
B	Radiated Emission	4132 to 4233	4182	WCDMA
C	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA

Note:

1. This device was tested under all modulations. The worst case of conducted output power was found in WCDMA modulation. Therefore, all test items were performed under WCDMA mode only.
2. For radiated emissions below 1 GHz, select the worst radiated emission channel (above 1GHz) for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	12 Vdc	Cyril Chen / Tim Chen
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Cyril Chen / Tim Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW is 5 MHz for WCDMA, and VBW $\geq 3 \times$ RBW.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

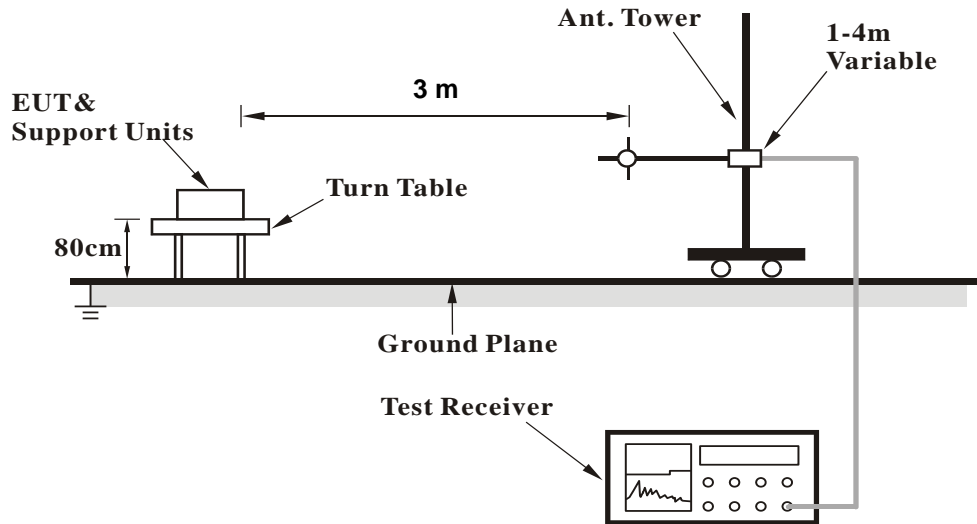


<Radiated Emission above 1 GHz>

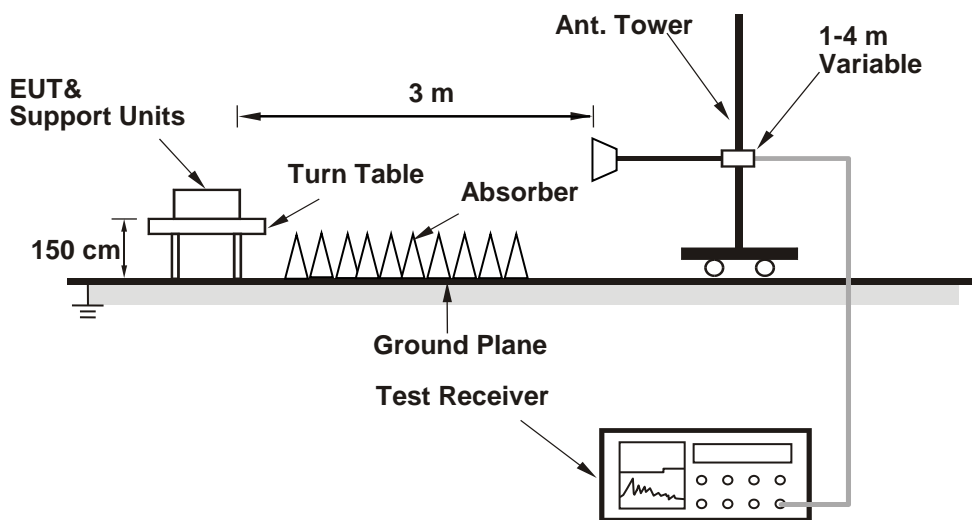

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:

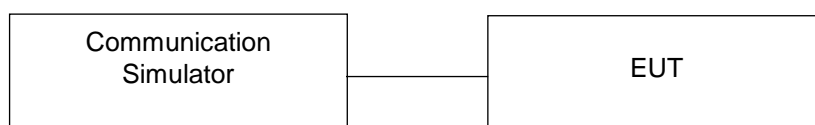

4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA V		
	4132	4182	4233
Channel	826.4	836.4	846.6
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	22.78	23.11	22.98
HSDPA Subtest-1	21.88	22.28	22.08
HSDPA Subtest-2	21.84	22.21	22.01
HSDPA Subtest-3	21.81	22.18	21.94
HSDPA Subtest-4	21.75	22.14	21.91
HSUPA Subtest-1	21.82	22.21	22.05
HSUPA Subtest-2	19.89	20.31	20.07
HSUPA Subtest-3	20.91	21.34	21.06
HSUPA Subtest-4	19.85	20.28	20.05
HSUPA Subtest-5	21.80	22.18	22.01

Mode C
ERP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	4132	826.4	-11.08	32.62	21.54	142.56	H
	4182	836.4	-10.63	32.52	21.89	154.53	
	4233	846.6	-11.38	32.65	21.27	133.97	
	4132	826.4	-17.93	32.76	14.83	30.41	V
	4182	836.4	-17.28	32.39	15.11	32.43	
	4233	846.6	-18.03	32.54	14.51	28.25	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- c. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

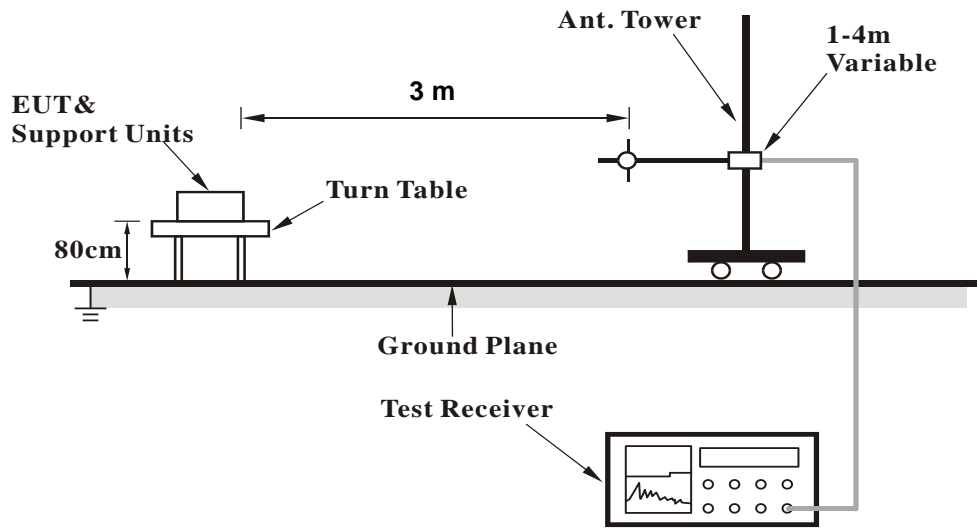

<Radiated Emission above 1 GHz>

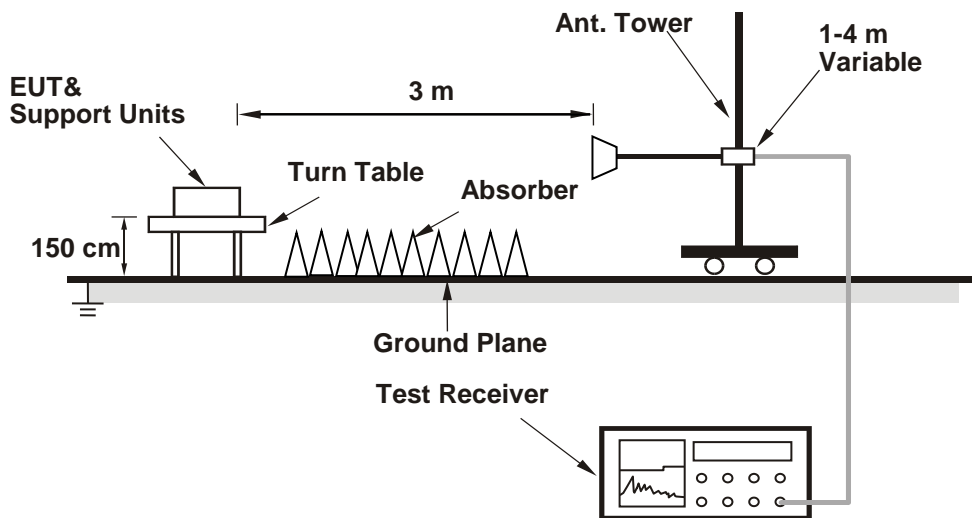

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Mode A

WCDMA:


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

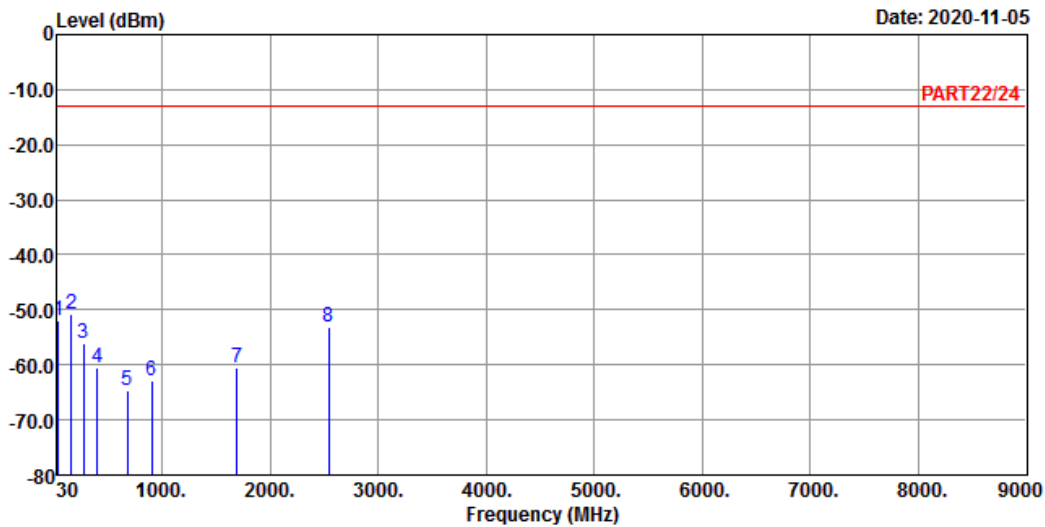

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 5 Link_H-CH
 Tested by: Cyril Chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	42.61	-51.98	-51.04	-13.00	-0.94	-38.98	Peak
2 pp	162.89	-50.78	-45.73	-13.00	-5.05	-37.78	Peak
3	271.53	-56.11	-49.68	-13.00	-6.43	-43.11	Peak
4	401.51	-60.55	-54.62	-13.00	-5.93	-47.55	Peak
5	678.93	-64.67	-64.24	-13.00	-0.43	-51.67	Peak
6	906.88	-62.84	-63.58	-13.00	0.74	-49.84	Peak
7	1693.20	-60.62	-46.60	-13.00	-14.02	-47.62	Peak
8	2539.80	-53.10	-43.04	-13.00	-10.06	-40.10	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2020-11-05

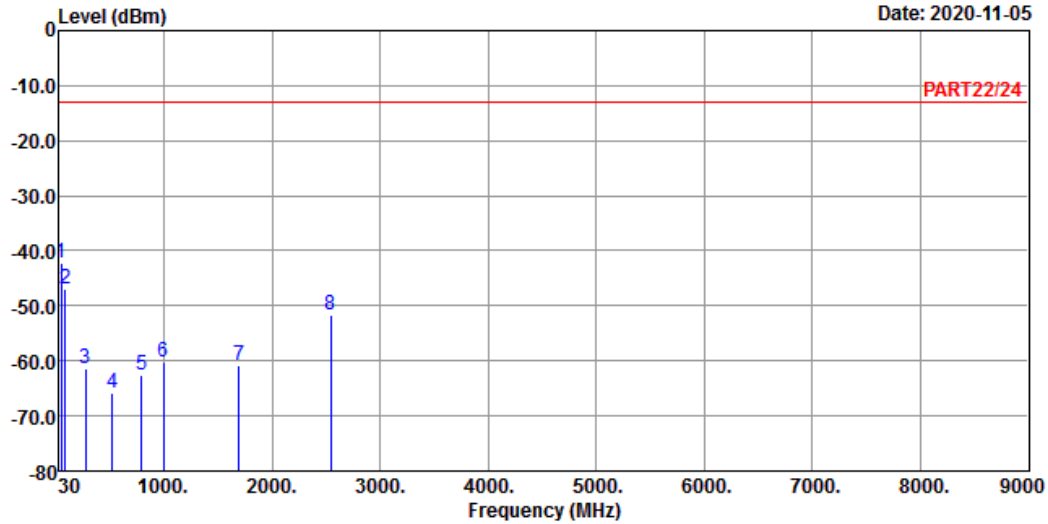

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 5 Link_H-CH
 Tested by: Cyril Chen

	Read	Limit	Over				
Freq	Level	Level	Line	Factor	Limit	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1 pp	43.58	-42.10	-40.63	-13.00	-1.47	-29.10	Peak
2	88.20	-46.80	-35.74	-13.00	-11.06	-33.80	Peak
3	272.50	-61.52	-55.07	-13.00	-6.45	-48.52	Peak
4	521.79	-65.96	-62.11	-13.00	-3.85	-52.96	Peak
5	790.48	-62.71	-63.47	-13.00	0.76	-49.71	Peak
6	997.09	-60.10	-63.58	-13.00	3.48	-47.10	Peak
7	1693.20	-60.91	-46.89	-13.00	-14.02	-47.91	Peak
8	2539.80	-51.75	-41.69	-13.00	-10.06	-38.75	Peak

Mode B

WCDMA:


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

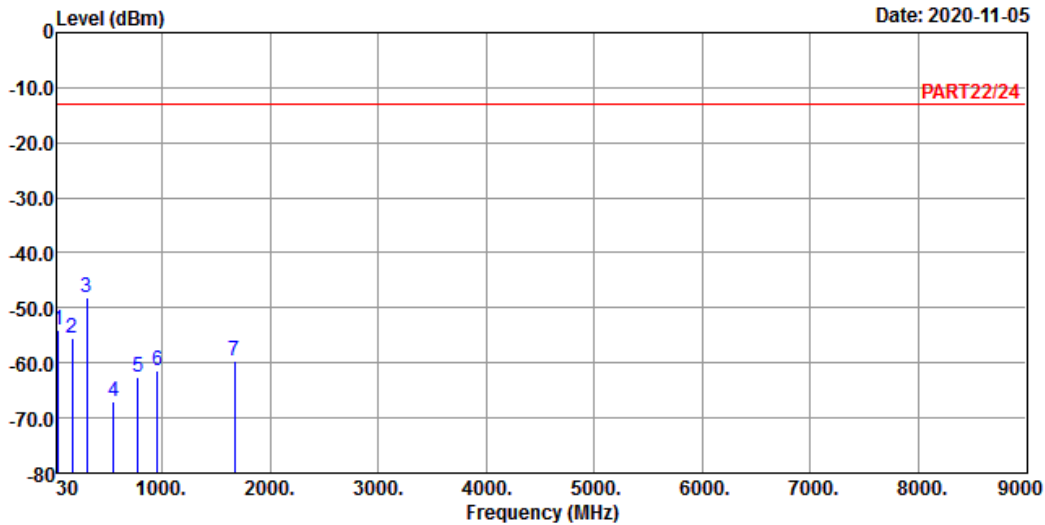

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 5 Link_M-CH
 Tested by: Cyril Chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.64	-53.97	-53.56	-13.00	-0.41	-40.97	Peak
2	164.83	-55.48	-50.29	-13.00	-5.19	-42.48	Peak
3 pp	301.60	-48.09	-41.11	-13.00	-6.98	-35.09	Peak
4	552.83	-67.08	-64.35	-13.00	-2.73	-54.08	Peak
5	778.84	-62.44	-63.24	-13.00	0.80	-49.44	Peak
6	954.41	-61.43	-63.40	-13.00	1.97	-48.43	Peak
7	1672.80	-59.51	-45.61	-13.00	-13.90	-46.51	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2020-11-05

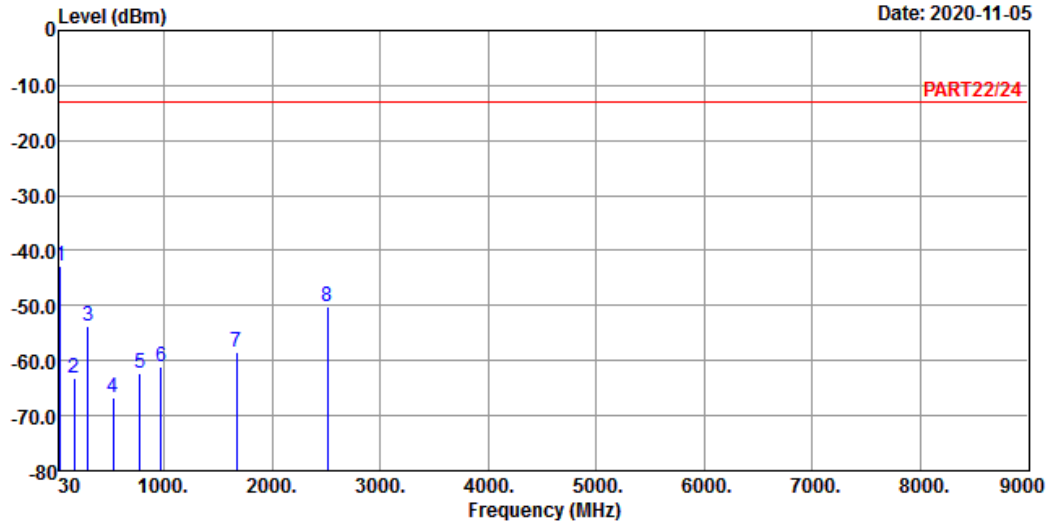

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 5 Link_M-CH
 Tested by: Cyril Chen

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-42.86	-41.92	-13.00	-0.94	-29.86	Peak
2	164.83	-63.13	-57.94	-13.00	-5.19	-50.13	Peak
3	295.78	-53.68	-46.75	-13.00	-6.93	-40.68	Peak
4	530.52	-66.76	-63.22	-13.00	-3.54	-53.76	Peak
5	774.96	-62.26	-63.07	-13.00	0.81	-49.26	Peak
6	970.90	-61.20	-63.75	-13.00	2.55	-48.20	Peak
7	1672.80	-58.44	-44.54	-13.00	-13.90	-45.44	Peak
8	2509.20	-50.30	-40.22	-13.00	-10.08	-37.30	Peak

Mode C

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

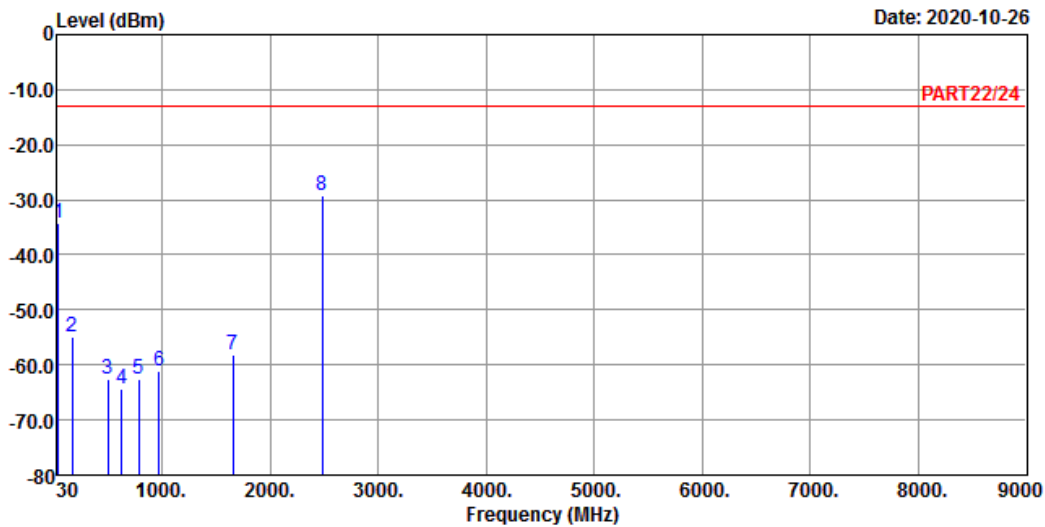

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 5 Link_L-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.64	-34.29	-33.88	-13.00	-0.41	-21.29	Peak
2	163.86	-55.04	-49.92	-13.00	-5.12	-42.04	Peak
3	494.63	-62.70	-57.98	-13.00	-4.72	-49.70	Peak
4	629.46	-64.31	-63.48	-13.00	-0.83	-51.31	Peak
5	780.78	-62.62	-63.41	-13.00	0.79	-49.62	Peak
6	970.90	-61.24	-63.79	-13.00	2.55	-48.24	Peak
7	1652.80	-58.05	-44.28	-13.00	-13.77	-45.05	Peak
8 pp	2479.20	-29.36	-19.33	-13.00	-10.03	-16.36	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2020-10-26

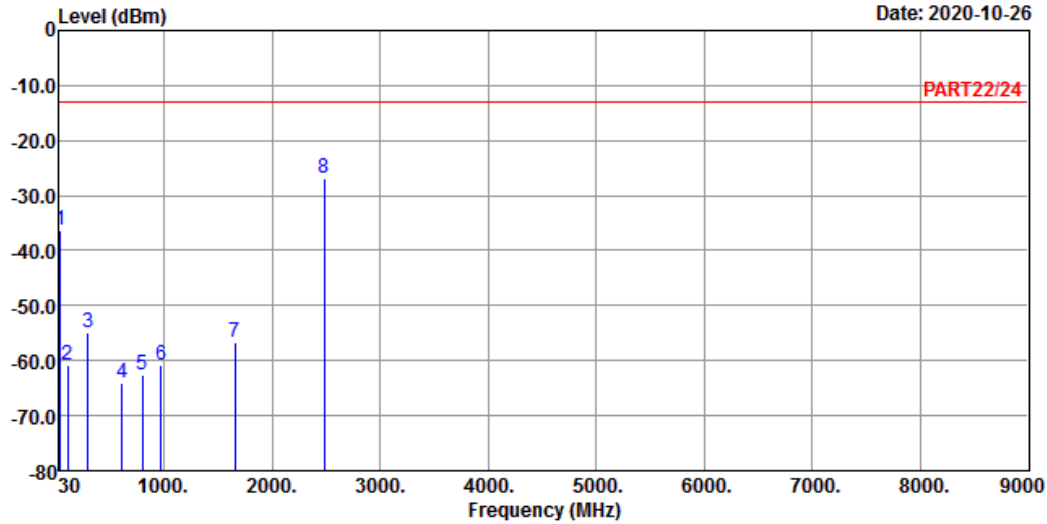

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 5 Link_L-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.64	-36.35	-35.94	-13.00	-0.41	-23.35	Peak
2	103.72	-60.78	-50.31	-13.00	-10.47	-47.78	Peak
3	295.78	-54.93	-48.00	-13.00	-6.93	-41.93	Peak
4	611.03	-64.15	-63.37	-13.00	-0.78	-51.15	Peak
5	795.33	-62.60	-63.35	-13.00	0.75	-49.60	Peak
6	974.78	-60.79	-63.48	-13.00	2.69	-47.79	Peak
7	1652.80	-56.80	-43.03	-13.00	-13.77	-43.80	Peak
8 pp	2479.20	-26.87	-16.84	-13.00	-10.03	-13.87	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

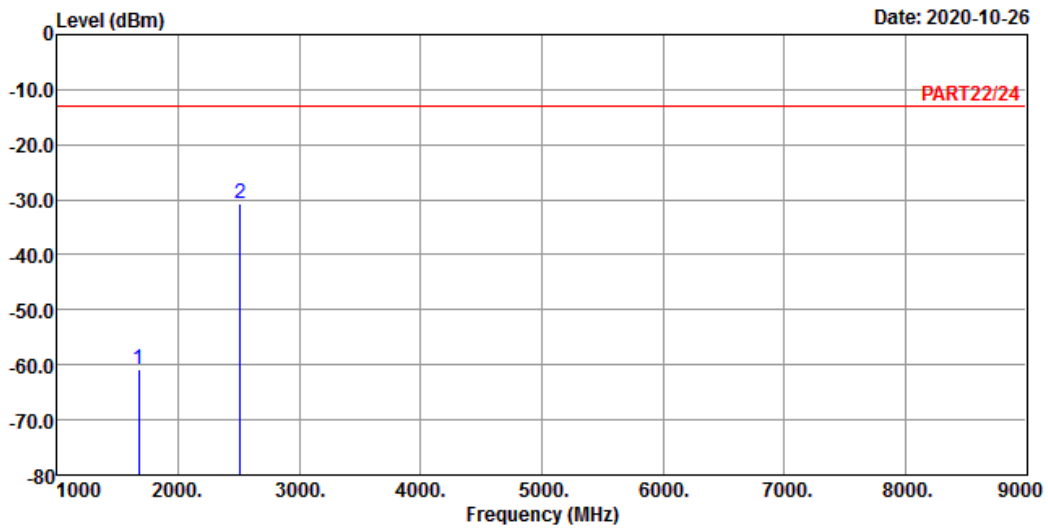

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 5 Link_M-CH
 Tested by: tim-chen


	Freq	Level	Read	Limit	Over		Remark
			Level	Line	Factor	Limit	
	MHz	dBm	dBm	dBm	dB	dB	
1	1672.80	-60.68	-46.78	-13.00	-13.90	-47.68	Peak
2 pp	2509.20	-30.64	-20.56	-13.00	-10.08	-17.64	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

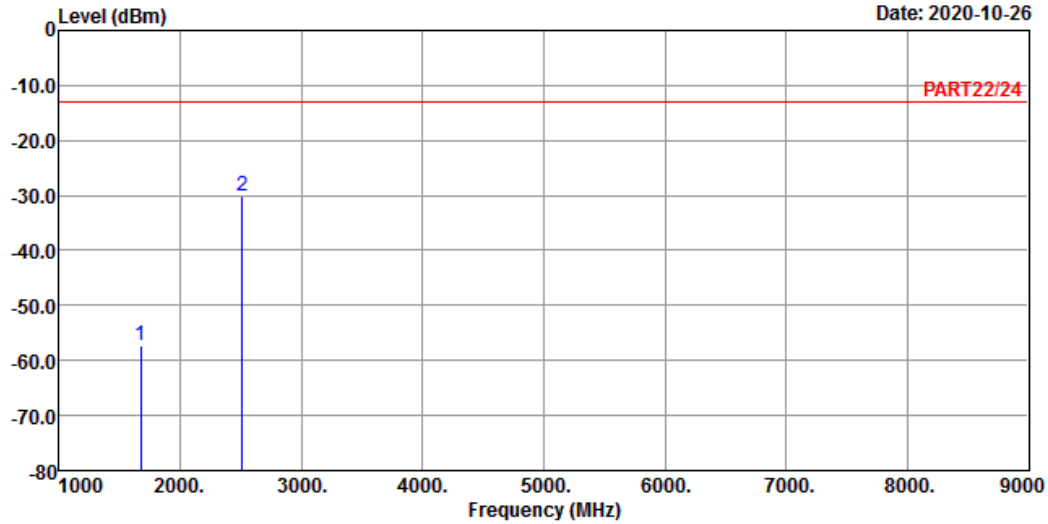

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 5 Link_M-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1672.80	-57.23	-43.33	-13.00	-13.90	-44.23	Peak
2	2509.20	-30.21	-20.13	-13.00	-10.08	-17.21	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

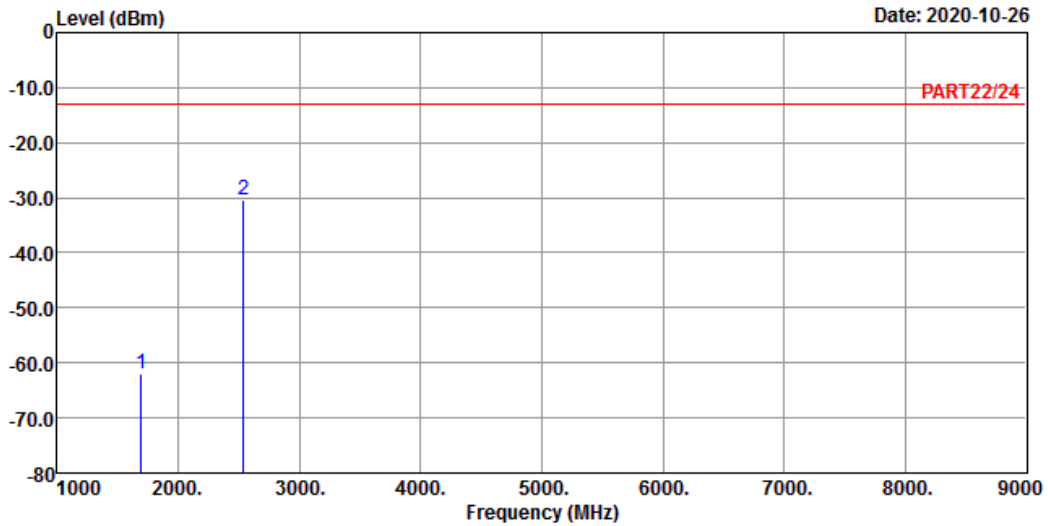

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 5 Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1693.20	-62.04	-48.02	-13.00	-14.02	-49.04	Peak
2 pp	2539.80	-30.46	-20.40	-13.00	-10.06	-17.46	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-10-26

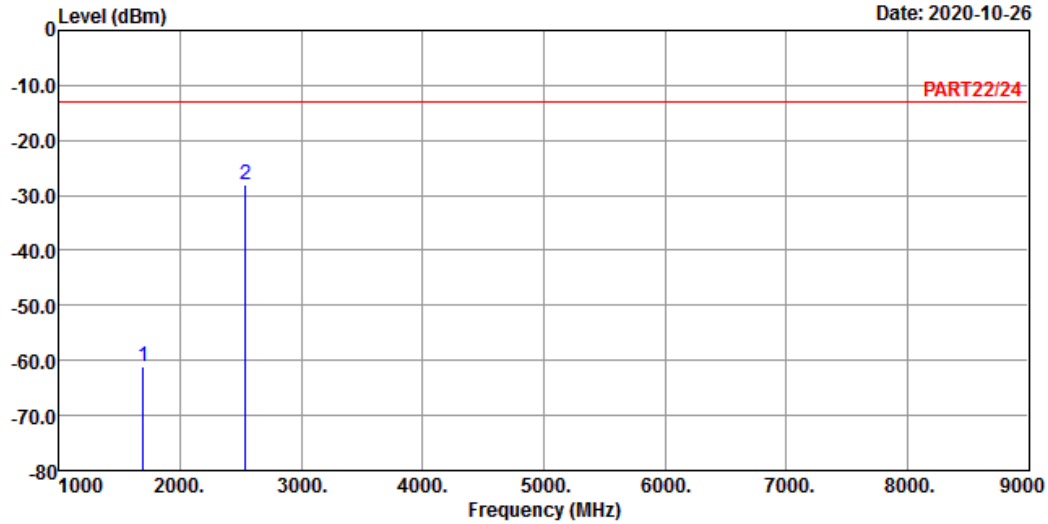

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 5 Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1693.20	-61.10	-47.08	-13.00	-14.02	-48.10	Peak
2	2539.80	-28.17	-18.11	-13.00	-10.06	-15.17	Peak


Mode D
WCDMA:
High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

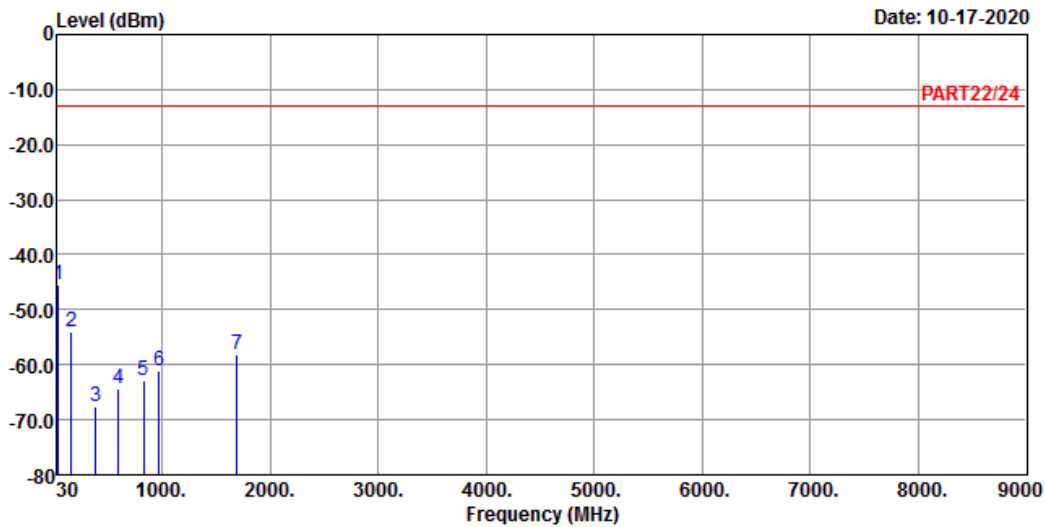

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : WCDMA Band 5 Link_H-CH
Tested by: Cyril Chen

	Freq	Level	Read Level	Limit	Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm		dB	dB	
1	pp	42.61	-45.51	-44.57	-13.00	-0.94	-32.51	Peak
2		162.89	-54.14	-49.09	-13.00	-5.05	-41.14	Peak
3		388.90	-67.50	-61.49	-13.00	-6.01	-54.50	Peak
4		599.39	-64.45	-63.66	-13.00	-0.79	-51.45	Peak
5		831.22	-62.84	-63.30	-13.00	0.46	-49.84	Peak
6		967.99	-61.06	-63.51	-13.00	2.45	-48.06	Peak
7		1693.20	-58.14	-44.12	-13.00	-14.02	-45.14	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 10-17-2020

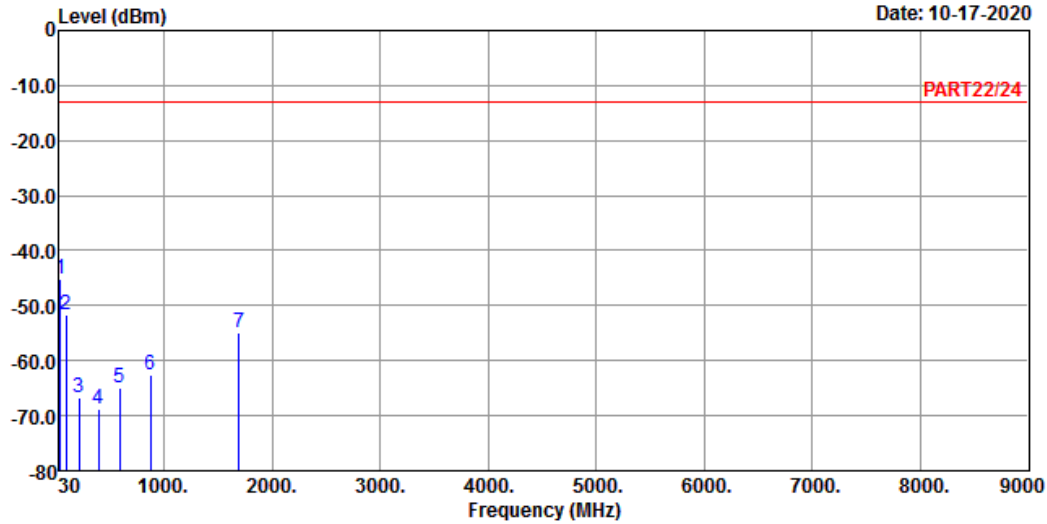

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band 5 Link_H-CH
 Tested by: Cyril Chen

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-45.22	-44.28	-13.00	-0.94	-32.22	Peak
2	89.17	-51.63	-40.54	-13.00	-11.09	-38.63	Peak
3	211.39	-66.82	-59.27	-13.00	-7.55	-53.82	Peak
4	394.72	-68.82	-62.84	-13.00	-5.98	-55.82	Peak
5	587.75	-64.88	-63.60	-13.00	-1.28	-51.88	Peak
6	875.84	-62.65	-63.09	-13.00	0.44	-49.65	Peak
7	1693.20	-54.91	-40.89	-13.00	-14.02	-41.91	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---