

TIMCO ENGINEERING, INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888-472-2424 F 352-472-2030 email: tei@timcoengr.com

Test Report

Product Name: REMOTE CONTROL

FCC ID: NLB27092TX

Applicant:

**DICKIE-SPIELZEUG GmbH & CO KG
WERKSTRABE 1
D-90765 FUERTH D-90765
GERMANY**

Date Receipt: 1/22/2007

Date Tested: 1/23/2007

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG
FCC ID: NLB27092TX
REPORT #: D\DICKIE\175UT7\175UT7TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING, INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888-472-2424 F 352-472-2030 email: tei@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG

FCC ID: NLB27092TX

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3.....RADIATION INTERFERENCE TEST DATA
PAGE 4.....OCCUPIED BANDWIDTH
PAGE 5.....OCCUPIED BANDWIDTH PLOT
PAGE 6.....TEST SET UP PHOTO

EXHIBITS INCLUDING:

BLOCK DIAGRAM
SCHEMATIC
INSTRUCTION MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRAPHS

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG
FCC ID: NLB27092TX
REPORT #: D\DICKIE\175UT7\175UT7TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING, INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888-472-2424 F 352-472-2030 email: tei@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Analyzer Blue Tower Quasi- Peak Adapter	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Analyzer Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/13/05	4/13/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/06	10/5/08
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Antenna: Log- Periodic	Eaton	96005	1243	CAL 12/14/05	12/14/07
Antenna: Passive Loop	EMC Test System	EMCO 6512	9706-1211	CAL 4/27/06	4/27/08

TIMCO ENGINEERING, INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888-472-2424 F 352-472-2030 email: tei@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°C with a humidity of 76%.

FORMULA OF CONVERSION FACTORS: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	METER READING	+ CL	+ ACF	= FS
33	20 dBuV	+ 1.02	+ 10.36 dB	= 30.36 dBuV/m @ 3m

ANSI C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

TIMCO ENGINEERING, INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888-472-2424 F 352-472-2030 email: tei@timcoengr.com

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG

FCC ID: NLB27092TX

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.227

REQUIREMENTS: CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

30 - 88 MHz	40.0 dBuV/M MEASURED AT 3 METERS
88 - 216 MHz	43.5 dBuV/M
216 - 960 MHz	46.0 dBuV/m
ABOVE 960 MHz	54.0 dBuV/m

TEST DATA:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
27.2	27.15	45.0	H	0.54	7.40	52.94	27.06
27.2	54.20	13.6	V	1.11	9.62	24.33	15.67
27.2	54.20	14.7	H	1.11	10.17	25.98	14.02
27.2	81.40	8.7	H	1.21	8.66	18.57	21.43
27.2	81.43	7.6	V	1.21	9.23	18.04	21.96
27.2	108.50	6.0	H	1.44	10.36	17.80	25.71
27.2	108.50	8.3	V	1.44	11.09	20.83	22.68
27.2	135.70	6.3	H	1.71	14.34	22.35	21.15
27.2	135.73	3.8	V	1.71	14.99	20.50	23.00
27.2	162.80	2.5	H	2.00	16.29	20.79	22.71
27.2	162.87	4.2	V	2.00	16.77	22.97	20.53
27.2	190.00	3.9	V	2.33	14.80	21.03	22.47
27.2	190.00	6.5	H	2.33	14.10	22.93	20.57
27.2	217.20	2.3	V	2.50	11.14	15.94	30.06
27.2	217.20	4.2	H	2.50	11.51	18.21	27.79
27.2	244.30	2.0	H	2.58	12.26	16.84	29.16
27.2	244.30	4.0	V	2.58	12.17	18.75	27.25
27.2	271.50	3.0	V	2.69	13.82	19.51	26.49
27.2	271.50	3.4	H	2.69	14.05	20.14	25.86

SAMPLE CALCULATION: FSdBuV/m = MR (dBuV) + ACFdB.

All measurements below 30 MHz were taken using an EMC Test Systems Passive Loop Antenna.

PERFORMED BY: RICHARD BLOCK

DATE: 1/23/2007

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG
FCC ID: NLB27092TX
REPORT #: D\DICKIE\175UT7\175UT7TestReport.doc

TIMCO ENGINEERING, INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888-472-2424 F 352-472-2030 email: tei@timcoengr.com

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG

FCC ID: NLB27092TX

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.227

REQUIREMENTS: The field strength of any emissions appearing outside of 26.96 and 27.28MHz shall be attenuated to the general limits of 15.209.

TEST DATA:

THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division.

PERFORMED BY: RICHARD BLOCK

DATE: 1/23/2007


APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG
FCC ID: NLB27092TX
REPORT #: D\DICKIE\175UT7\175UT7TestReport.doc

TIMCO ENGINEERING, INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888-472-2424 F 352-472-2030 email: tei@timcoengr.com

NOTES:

OCCUPIED BANDWIDTH
DICKIE-SPIELZEUG GmbH & CO -- FCC ID: NLB 27092TX

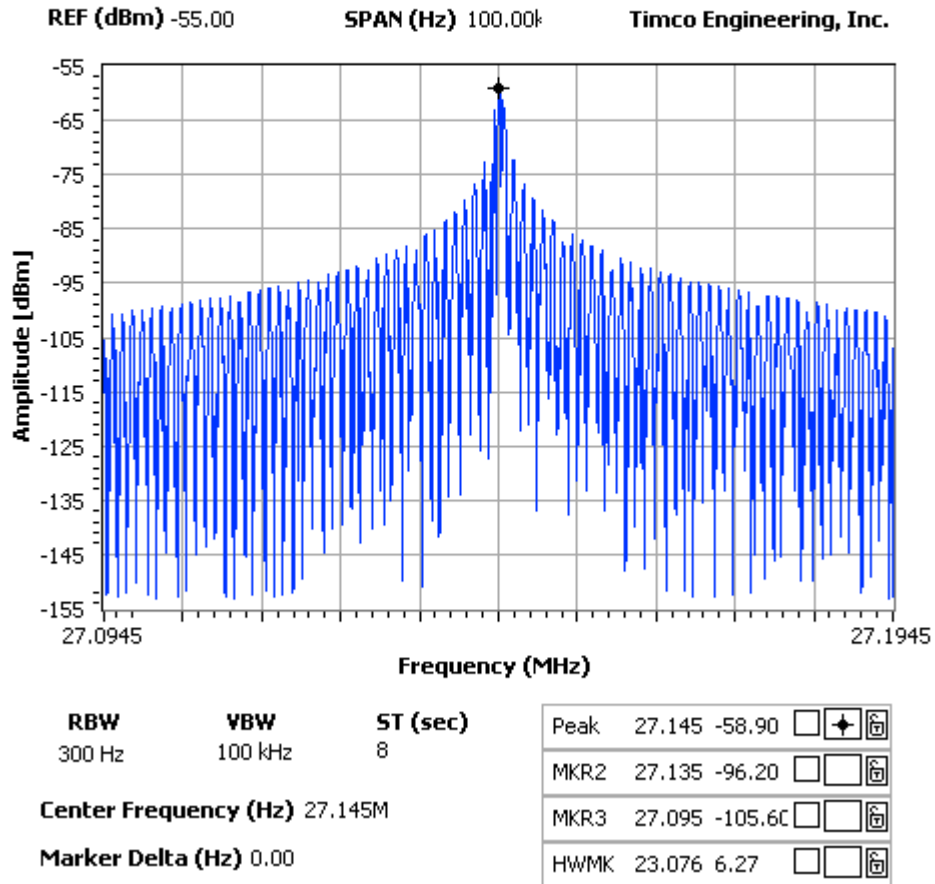

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG
FCC ID: NLB27092TX
REPORT #: D\DICKIE\175UT7\175UT7TestReport.doc


TIMCO ENGINEERING, INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888-472-2424 F 352-472-2030 email: tei@timcoengr.com

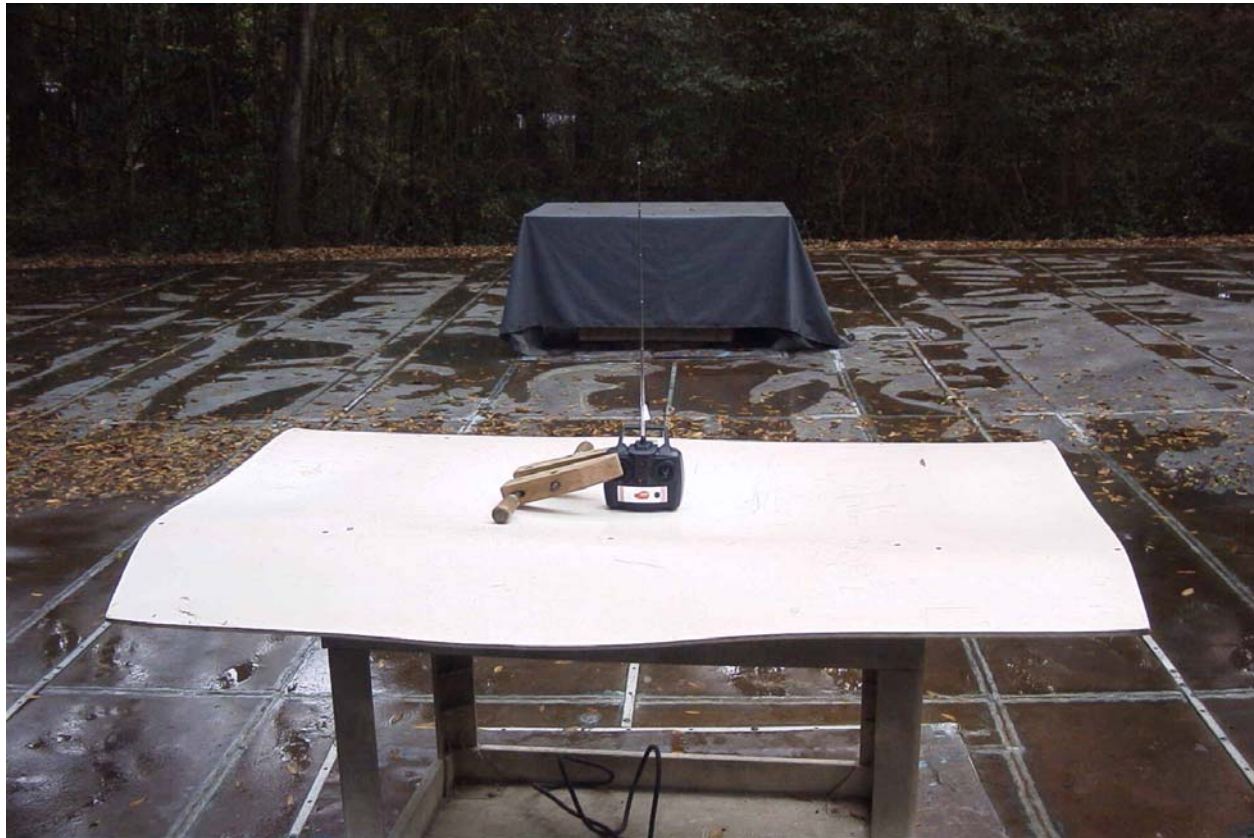

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG
FCC ID: NLB27092TX
REPORT #: D\DICKIE\175UT7\175UT7TestReport.doc