

## EMC TEST REPORT For FCC




Test Report No. : 2004060018  
Date of Issue : July 20, 2004  
FCC ID : NLMDIGIMAXV6  
Model/Type No. : Digimax V6 and Digimax V6000  
Kind of Product : Digital Camera  
Applicant : Samsung Techwin Co., Ltd.  
Applicant Address : 145-3, Sangdaewon 1-Dong, Jungwon-Gu, Sunghnam-City, Kyungki-Do, Korea  
Manufacturer : 1) Samsung Techwin Co., Ltd.  
2) Tianjin Samsung Opto-Electronics Co., Ltd.  
Manufacturer Address : 1) 42, Sungju-Dong, Changwon-City, Kyungnam, Korea  
2) 7 Pingchang Road, Nankai Dist., Tianjin, China  
Contact Person : Kun-Sop, Kim (Manager)  
Telephone : +82-31-740-8253  
Received Date : June 9, 2004  
Test period : Start : June 11, 2004 End : July 19, 2004  
Test Results :  **In Compliance**  **Not in Compliance**

The test results presented in this report relate only to the object tested.


CERTiTEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

*Tested by*

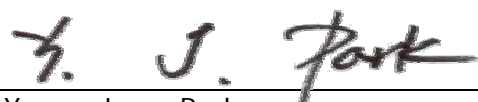

Young-Joon, Park  
EMC Test Engineer  
Date: July 20, 2004

*Reviewed by*

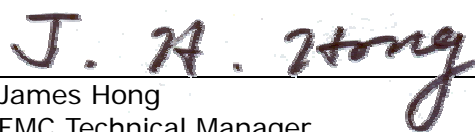

James Hong  
EMC Technical Manager  
Date: July 20, 2004



## REPORT REVISION HISTORY

Date	Revision	Page No
July 20, 2004	Issued (2004060018)	All

*This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. Personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.*



## TABLE OF CONTENTS

1.0 General Product Description .....	4
1.1 Model Differences .....	4
1.2 Device Modifications.....	4
1.3 EUT Configuration(s) .....	5
1.4 Test Software .....	5
1.5 EUT Operating Mode(s).....	5
1.6 Calibration Details of Equipment Used for Measurement .....	6
1.7 Test Facility .....	6
1.8 Measurement Procedure .....	6
1.9 Laboratory Accreditations and Listings .....	7
2.0 Emissions Test Regulations.....	8
2.1 Conducted Voltage Emissions .....	9
2.2 Radiated Electric Field Emissions.....	10
Configurations .....	11
APPENDIX A - TEST DATA.....	12
Conducted Voltage Emissions (Quasi-Peak reading) .....	12
Radiated Electric Field Emissions (Quasi-Peak reading).....	14

## 1.0 General Product Description

### 1.0.1 Tested Equipment

- Unless otherwise indicated, all tests were conducted on Model Digimax V6.
- Tests performed on Model Digimax V6 were considered to be representative of Model(s) Digimax V6000.

### 1.0.2 Equipment Size, Mobility and Identification

Dimensions: 105.5 (W) by 54.6 (H) by 38.0 (D)  mm  in  
Mobility:  Hand-Held  Table-top  Floor-standing  
Serial No.: Prototype

### 1.0.3 Electrical Ratings

Adaptor	Input:	100-250Vac, 50/60Hz
	Output:	5Vdc, 2.0A
EUT	Input:	5Vdc
	Output:	-

### 1.0.4 Test Voltage & Frequency (Using the adaptor)

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120Vac  
Frequency: 60Hz

### 1.0.5 Clock & Other Frequencies Utilized

32.768KHz, 13.5MHz, 54.0MHz, 108.0MHz

## 1.1 Model Differences

Digimax V6 and Digimax V6000 are identical to each other only except for model designations for the marketing purpose.

## 1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable

### 1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
Adaptor	AULT INC.	PW115KA0500N52	13104895	-
Personal Computer	Hewlett-Packard Company	PD1059P	-	DoC
LCD Monitor	TPU ELECTRONICS (FUJIAN) CO., LTD	HSTND-2A01	-	DoC
Keyboard (PS/2 type)	SAMSUNG	SEM-DT35	33008110	DoC
Mouse (PS/2 type)	SAMSUNG	OMS3CB	0303009873	DoC
Mouse (USB type)	SAMSUNG	OMS3CB	0303009881	DoC
Mouse (Serial type)	SAMSUNG	BASM1	4476257-20000	DoC
Printer (Parallel type)	Seiko Epson Corp.	Stylus Color 460	BWCE136524	DoC

Cable Description

#	Description	Ferrite Core	Length (m)	Other Details
1	USB cable, Shielded	Yes	1.3	Between the EUT and PC
2	DC In Cable, Unshielded	Yes	1.5	Between the EUT and Adaptor
3	Adaptor Power Cable, Unshielded	No	1.5	Connect to AC power
4	Mouse cable, Shielded	No	1.5	USB type
5	Mouse cable, Shielded	No	2.1	Serial type
6	Mouse cable, Shielded	No	1.5	PS/2 type
7	Keyboard cable, Shielded	No	1.5	PS/2 type
8	Monitor cable, Shielded	Yes	1.5	Between the PC and LCD Monitor
9	Printer cable, Shielded	No	1.5	Between the PC and Printer
10	AC power cable, Unshielded	No	1.5	Connect to AC power
11	AC power cable, Unshielded	No	1.5	Connect to AC power
12	AC power cable, Unshielded	No	1.5	Connect to AC power

### 1.4 Test Software

Pinging

Not applicable

### 1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Test program (H-Pattern)

Test program (color bar)

Standby

Test program (customer specific)

Practice operation – USB downloading mode

AV output monitoring mode

## 1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

## 1.7 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.8 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)






Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

\* Measurement procedures was In accordance with ANSI C63.4-2001 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2

## 1.9 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	<b>FCC</b>	3 and 10 meter Open Area Test Sites to perform FCC Part 15/18 measurements.	 93250
JAPAN	<b>VCCI</b>	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	<b>MIC</b>	EMI (CE, RE) EMS (ESD, Burst, RS, Surge, CS, Power-Frequency Susceptibility, Voltage Dips and Short Interruptions)	 No. 51, KR0025
International	<b>KOLAS</b>	EMC	 NO. 119
Europe	<b>GLAS</b>	EMC EN 55011, EN 55022, EN 55024, EN 61326, EN 50130-4, EN 50081-1, EN 50081-2, EN 50082-1, EN 50082-2, EN 61000-6-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61000-3-2, EN 61000-3-3	 No.13000796-02

## 2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

- |  |                                  |   |
|--|----------------------------------|---|
| <input type="checkbox"/> EN 50081-1:1992                               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 61000-6-3:2001                             | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 50081-2:1993                               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 61000-6-4:2001                             | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 50083-2:2001                               |                                  |   |
| <input type="checkbox"/> EN 55011:1998 +A1:1999                        | <input type="checkbox"/> Group 1 | <input type="checkbox"/> Group 2            |
|  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55013:1990 +A12:1994 +A13:1996 +A14:1999   |                                  |   |
| <input type="checkbox"/> EN 55013:2001                                 |                                  |   |
| <input type="checkbox"/> EN 55014-1:2000                               |                                  |   |
| <input type="checkbox"/> EN 55014-1:2000 +A1:2001                      |                                  |   |
| <input type="checkbox"/> EN 55015:2000                                 |                                  |   |
| <input type="checkbox"/> EN 55015:2000 +A1:2001                        |                                  |   |
| <input type="checkbox"/> EN 55022:1994 +A1:1995 +A2:1997               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55022:1998                                 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55022:1998 +A1:2000                        | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 61000-3-2:1995 +A1:1998 +A2:1998 +A14:2000 |                                  |   |
| <input type="checkbox"/> EN 61000-3-2:2000                             |                                  |   |
| <input type="checkbox"/> EN 61000-3-3:1995                             |                                  |   |
| <input type="checkbox"/> EN 61000-3-3:1995 +A1:2001                    |                                  |   |
| <input type="checkbox"/> VCCI V-3/2003.04                              | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> AS/NZS 3548:1995 +A1:1997 +A2:1997            | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input checked="" type="checkbox"/> FCC Part 15 Subpart B              | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> CISPR 22:1997                      | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B |
- The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109.
- |   |                                  |                                  |
|---|----------------------------------|----------------------------------|
| <input type="checkbox"/> CISPR 22:1997 +A1:2000 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
|---|----------------------------------|----------------------------------|



## 2.1 Conducted Voltage Emissions

### Test Date

June 12, 2004

### Test Location

EMI-CE: Shielded Room

### Test Instruments

<input checked="" type="checkbox"/> Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002
--	-----------------	--------	------------

### Test Accessories

<input type="checkbox"/> LISN	EMCO	3825/2	9206-1971
<input checked="" type="checkbox"/> LISN	EMCO	3825/2	9409-2246
<input checked="" type="checkbox"/> LISN	EMCO	3825/2	9607-2574
<input checked="" type="checkbox"/> Control PC	HP	Vectra 500	SG72000192

### Frequency Range of Measurement

150 kHz to 30 MHz  
 450 kHz to 30 MHz  
 \_\_\_\_\_

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

MET minimum margin is 15.5 dBuV at 1.56 MHz  
 NOT MET limit exceeded by maximum of \_\_\_\_ dBuV at \_\_\_\_ MHz  
 NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.2 Radiated Electric Field Emissions

### Test Date

July 19, 2004

### Test Location

- EMI-OATS: Testing was performed at a test distance of 10 m  
 EMI-OATS: Testing was performed at a test distance of 3 m

### Test Instruments

- |  |                      |        |            |
|--|----------------------|--------|------------|
| <input checked="" type="checkbox"/> Field Strength Meter | Rohde & Schwarz      | ESVS30 | 826638/008 |
| <input checked="" type="checkbox"/> EMC Analyzer         | Agilent Technologies | E7403A | MY42000054 |

### Test Accessories

- |   |                 |         |            |
|---|-----------------|---------|------------|
| <input checked="" type="checkbox"/> ULTRA Broadband Antenna | Rohde & Schwarz | HL562   | 361324/014 |
| <input type="checkbox"/> Biconical Antenna                  | Schwarzbeck     | BBA9106 | 41-00201   |
| <input type="checkbox"/> Biconical Antenna                  | EMCO            | 3110B   | 9607-2564  |
| <input type="checkbox"/> Log-periodic Antenna               | EMCO            | 3146    | 9607-4567  |

### Frequency Range of Measurement

30 MHz to 2 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results


The requirements are:

- MET minimum margin is 5.6 dBuV/m at 648.35 MHz  
 NOT MET limit exceeded by maximum of \_\_\_\_ dBuV/m at \_\_\_\_ MHz  
 NOT APPLICABLE

### Remarks

See Appendix A for test data

## Configuration


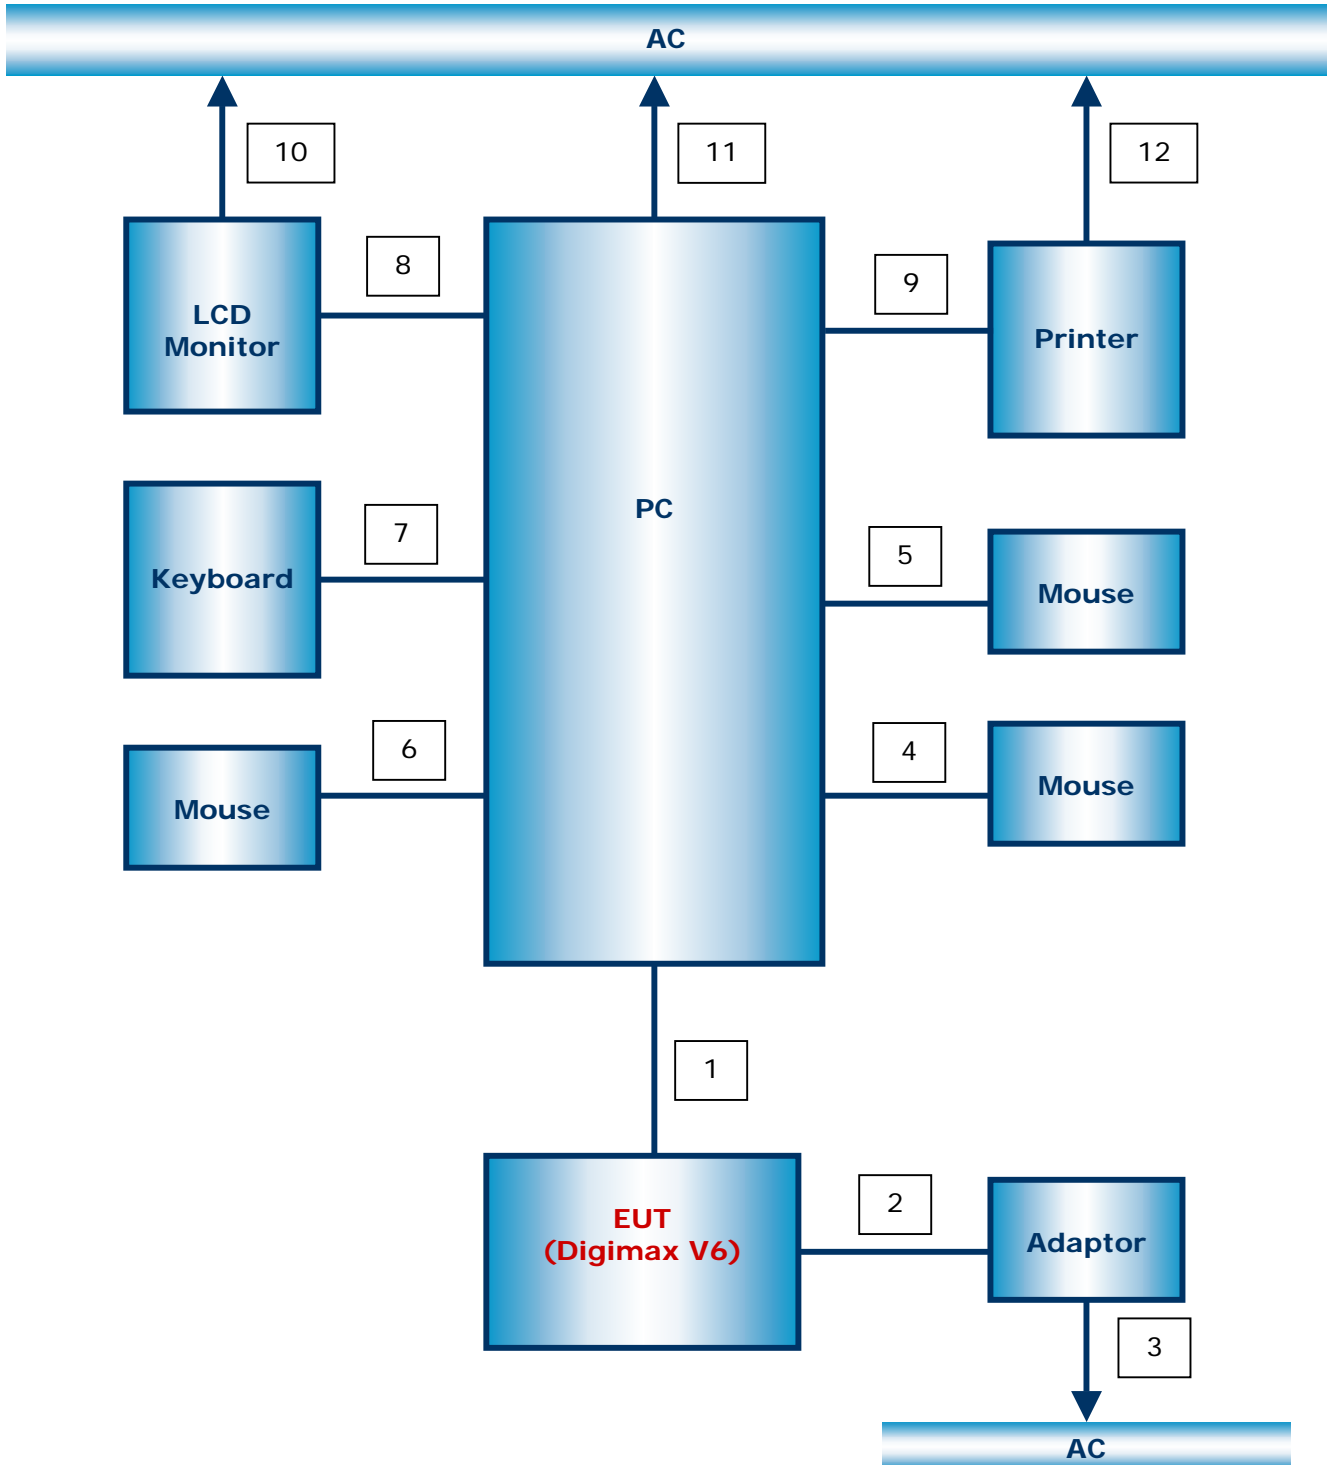


## APPENDIX A – TEST DATA

### Conducted Voltage Emissions (Quasi-Peak reading)

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
				[dBuV]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dB]
0.40	0.1	0.1	N	57.9	34.6	34.8	23.1	47.9	29.2	29.4	18.5
0.95	0.1	0.1	N	56.0	35.6	35.8	20.2	46.0	26.8	27.0	19.0
1.49	0.1	0.1	H	56.0	37.2	37.4	18.6	46.0	29.8	30.0	16.0
1.56	0.1	0.2	H	56.0	37.5	37.8	18.2	46.0	30.2	30.5	15.5
1.69	0.1	0.2	H	56.0	36.6	36.9	19.1	46.0	29.5	29.8	16.2
2.23	0.1	0.2	H	56.0	36.9	37.2	18.8	46.0	29.9	30.2	15.8
2.78	0.1	0.2	H	56.0	36.7	37.0	19.0	46.0	29.9	30.2	15.8
3.39	0.1	0.2	N	56.0	35.1	35.4	20.6	46.0	25.7	26.0	20.0

\* If the average limit is met when a quasi-peak detector is used, the EUT shall be deemed to meet both limit and measurement with the average detector is unnecessary.

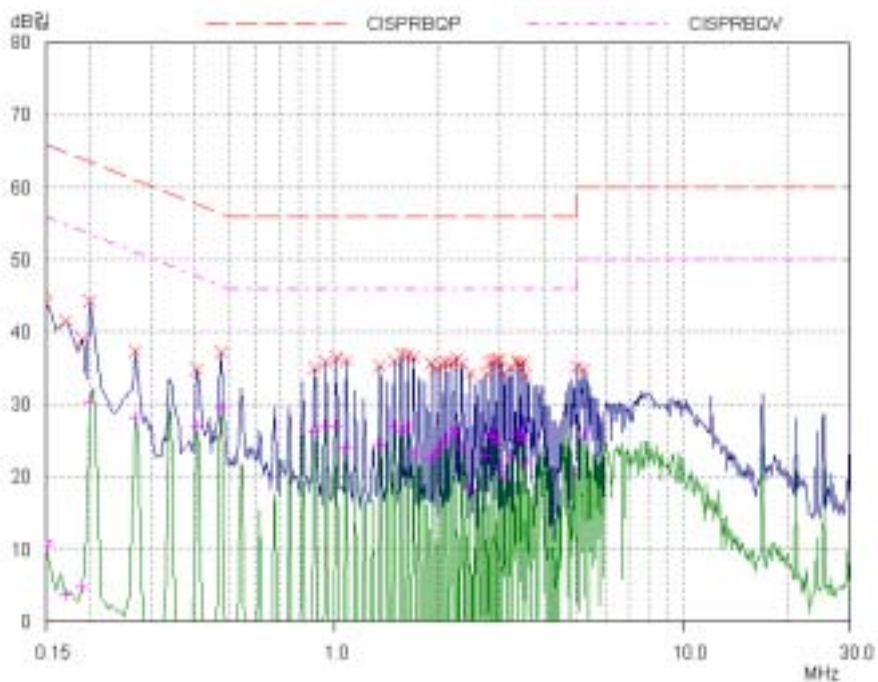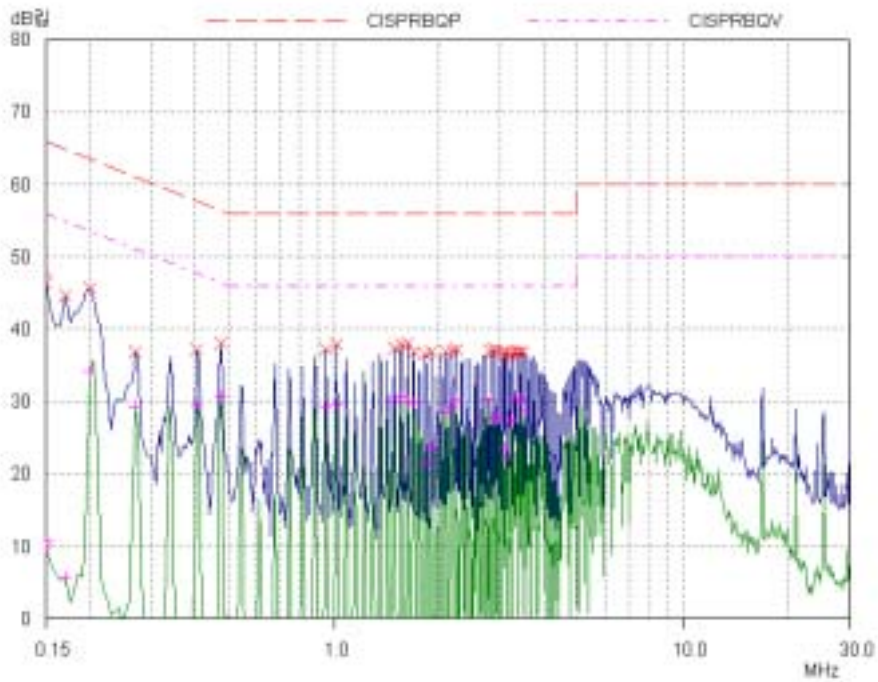



**Radiated Electric Field Emissions (Quasi-Peak reading)**

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
108.39	18.3	V	4.0	9.50	1.10	43.5	28.9	14.6
216.34	26.9	H	1.0	7.95	1.80	46.0	36.6	9.4
475.06	21.4	V	1.8	15.20	3.20	46.0	39.8	6.2
487.31	18.6	V	2.3	15.30	3.30	46.0	37.2	8.8
504.84	20.5	V	2.0	15.60	3.30	46.0	39.4	6.6
517.02	18.6	V	2.0	16.00	3.50	46.0	38.1	7.9
648.35	18.9	H	4.0	17.80	3.70	46.0	40.4	5.6
744.55	13.8	V	2.5	19.00	4.20	46.0	37.0	9.0
1189.26	13.3	H	1.3	23.20	5.55	54.0	42.0	12.0
1293.41	8.7	V	1.5	24.50	5.83	54.0	39.0	15.0
1403.02	7.9	V	1.0	24.60	6.18	54.0	38.7	15.3
1621.59	6.3	H	1.2	26.30	6.63	54.0	39.2	14.8