

EMC TEST REPORT For FCC



Test Report No. : 2004100015
Date of Issue : October 15, 2004
FCC ID : NLMDIGIMAXV70
Model/Type No. : Digimax V70 and Digimax α 7
Kind of Product : Digital Camera
Applicant : Samsung Techwin Co., Ltd.
Applicant Address : 145-3 Sangdaewon 1-Dong, Jungwon-Gu, Sunghnam-City,
Kyungki-Do, Korea
Manufacturer : 1) Samsung Techwin Co., Ltd.
2) Tianjin Samsung Opto-Electronics Co., LTD.
Manufacturer Address : 1) 42, Sungju-dong, Changwon City, Kyungnam, Korea
2) 7 Pingchang Road, Nabkai Dist., Tianjin, China
Contact Person : Ki-Deok, Kim(Engineer)
Telephone : +82-31-740-8468
Received Date : October 12, 2004
Test period : Start : October 13, 2004 End : October 14, 2004
Test Results : **In Compliance** **Not in Compliance**

The test results presented in this report relate only to the object tested.


CERTITEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by



Young-Joon, Park
EMC Test Engineer
Date: October 15, 2004

Reviewed by

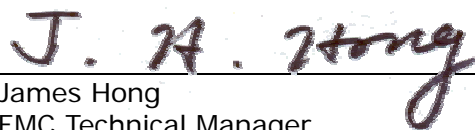

James Hong
EMC Technical Manager
Date: October 15, 2004



REPORT REVISION HISTORY

Date	Revision	Page No
October 15, 2004	Issued (2004100015)	All

This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. Personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications.....	4
1.3 EUT Configuration(s)	5
1.4 Test Software	5
1.5 EUT Operating Mode(s).....	5
1.6 Calibration Details of Equipment Used for Measurement	6
1.7 Test Facility	6
1.8 Measurement Procedure	6
1.9 Laboratory Accreditations and Listings	7
2.0 Emissions Test Regulations.....	8
2.1 Conducted Voltage Emissions	9
2.2 Radiated Electric Field Emissions.....	10
Configurations	11
APPENDIX A - TEST DATA.....	12
Conducted Voltage Emissions (Quasi-Peak reading)	12
Radiated Electric Field Emissions (Quasi-Peak reading).....	14

1.0 General Product Description

1.0.1 Tested Equipment

- Unless otherwise indicated, all tests were conducted on Model Digimax V70.
- Tests performed on Model Digimax V70 were considered to be representative of Model(s) Digimax α 7.

1.0.2 Equipment Size, Mobility and Identification

Dimensions: 38.5(L) by 160.5(W) by 57(H) mm inch
Mobility: Hand-Held Table-top Floor-standing
Serial No.: Prototype

1.0.3 Electrical Ratings

Input: 5Vdc, 2.0A, 10W
Output: -

* Equipment isn't sold with Adpator.

1.0.4 Test Voltage & Frequency (Using the adaptor)

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120Vac
Frequency: 60Hz

1.0.5 Clock & Other Frequencies Utilized

12 MHz, 27MHz, 67.5MHz

1.1 Model Differences

Digimax V70 and Digimax α 7 are identical to each other only except for model designations for the marketing purpose.

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)






Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-2001 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2

1.9 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 and 10 meter Open Area Test Sites to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	MIC	EMI (CE, RE) EMS (ESD, Burst, RS, Surge, CS, Power-Frequency Susceptibility, Voltage Dips and Short Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	 NO. 119
Europe	GLAS	EMC EN 55011, EN 55022, EN 55024, EN 61326, EN 50130-4, EN 50081-1, EN 50081-2, EN 50082-1, EN 50082-2, EN 61000-6-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61000-3-2, EN 61000-3-3	 No.13000796-02

2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

- | | | |
|--|----------------------------------|---|
| <input type="checkbox"/> EN 50081-1:1992 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 61000-6-3:2001 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 50081-2:1993 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 61000-6-4:2001 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 50083-2:2001 | | |
| <input type="checkbox"/> EN 55011:1998 +A1:1999 | <input type="checkbox"/> Group 1 | <input type="checkbox"/> Group 2 |
| | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 55013:1990 +A12:1994 +A13:1996 +A14:1999 | | |
| <input type="checkbox"/> EN 55013:2001 | | |
| <input type="checkbox"/> EN 55014-1:2000 | | |
| <input type="checkbox"/> EN 55014-1:2000 +A1:2001 | | |
| <input type="checkbox"/> EN 55015:2000 | | |
| <input type="checkbox"/> EN 55015:2000 +A1:2001 | | |
| <input type="checkbox"/> EN 55022:1994 +A1:1995 +A2:1997 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 55022:1998 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 55022:1998 +A1:2000 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> EN 61000-3-2:1995 +A1:1998 +A2:1998 +A14:2000 | | |
| <input type="checkbox"/> EN 61000-3-2:2000 | | |
| <input type="checkbox"/> EN 61000-3-3:1995 | | |
| <input type="checkbox"/> EN 61000-3-3:1995 +A1:2001 | | |
| <input type="checkbox"/> VCCI V-3/2003.04 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> AS/NZS 3548:1995 +A1:1997 +A2:1997 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> FCC Part 15 Subpart B | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> CISPR 22:1997 | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B |
- The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109.
- | | | |
|---|----------------------------------|----------------------------------|
| <input type="checkbox"/> CISPR 22:1997 +A1:2000 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
|---|----------------------------------|----------------------------------|

2.1 Conducted Voltage Emissions

Test Date

October 13, 2004

Test Location

EMI-CE: Shielded Room

Test Instruments

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2005-02-07

Test Accessories

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	9409-2246	2005-09-03
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	9607-2574	2005-09-03

Frequency Range of Measurement

- 150 kHz to 30 MHz
 450 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- MET minimum margin is 4.6 dBuV at 0.49 MHz
 NOT MET limit exceeded by maximum of ____ dBuV at ____ MHz
 NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Radiated Electric Field Emissions

Test Date

October 14, 2004

Test Location

- EMI-OATS: Testing was performed at a test distance of 10 m
 EMI-OATS: Testing was performed at a test distance of 3 m

Test Instruments

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESVS30	826638/008	2005-04-08

Test Accessories

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2005-05-21
<input type="checkbox"/>	Biconical Antenna	EMCO	3110	9202-1510	2005-04-09
<input type="checkbox"/>	Log-periodic Antenna	EMCO	3146	9607-4567	2005-04-06

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results


The requirements are:

- MET minimum margin is 4.4 dBuV/m at 480.12 MHz
 NOT MET limit exceeded by maximum of ___ dBuV/m at _____ MHz
 NOT APPLICABLE

Remarks

See Appendix A for test data



Configuration

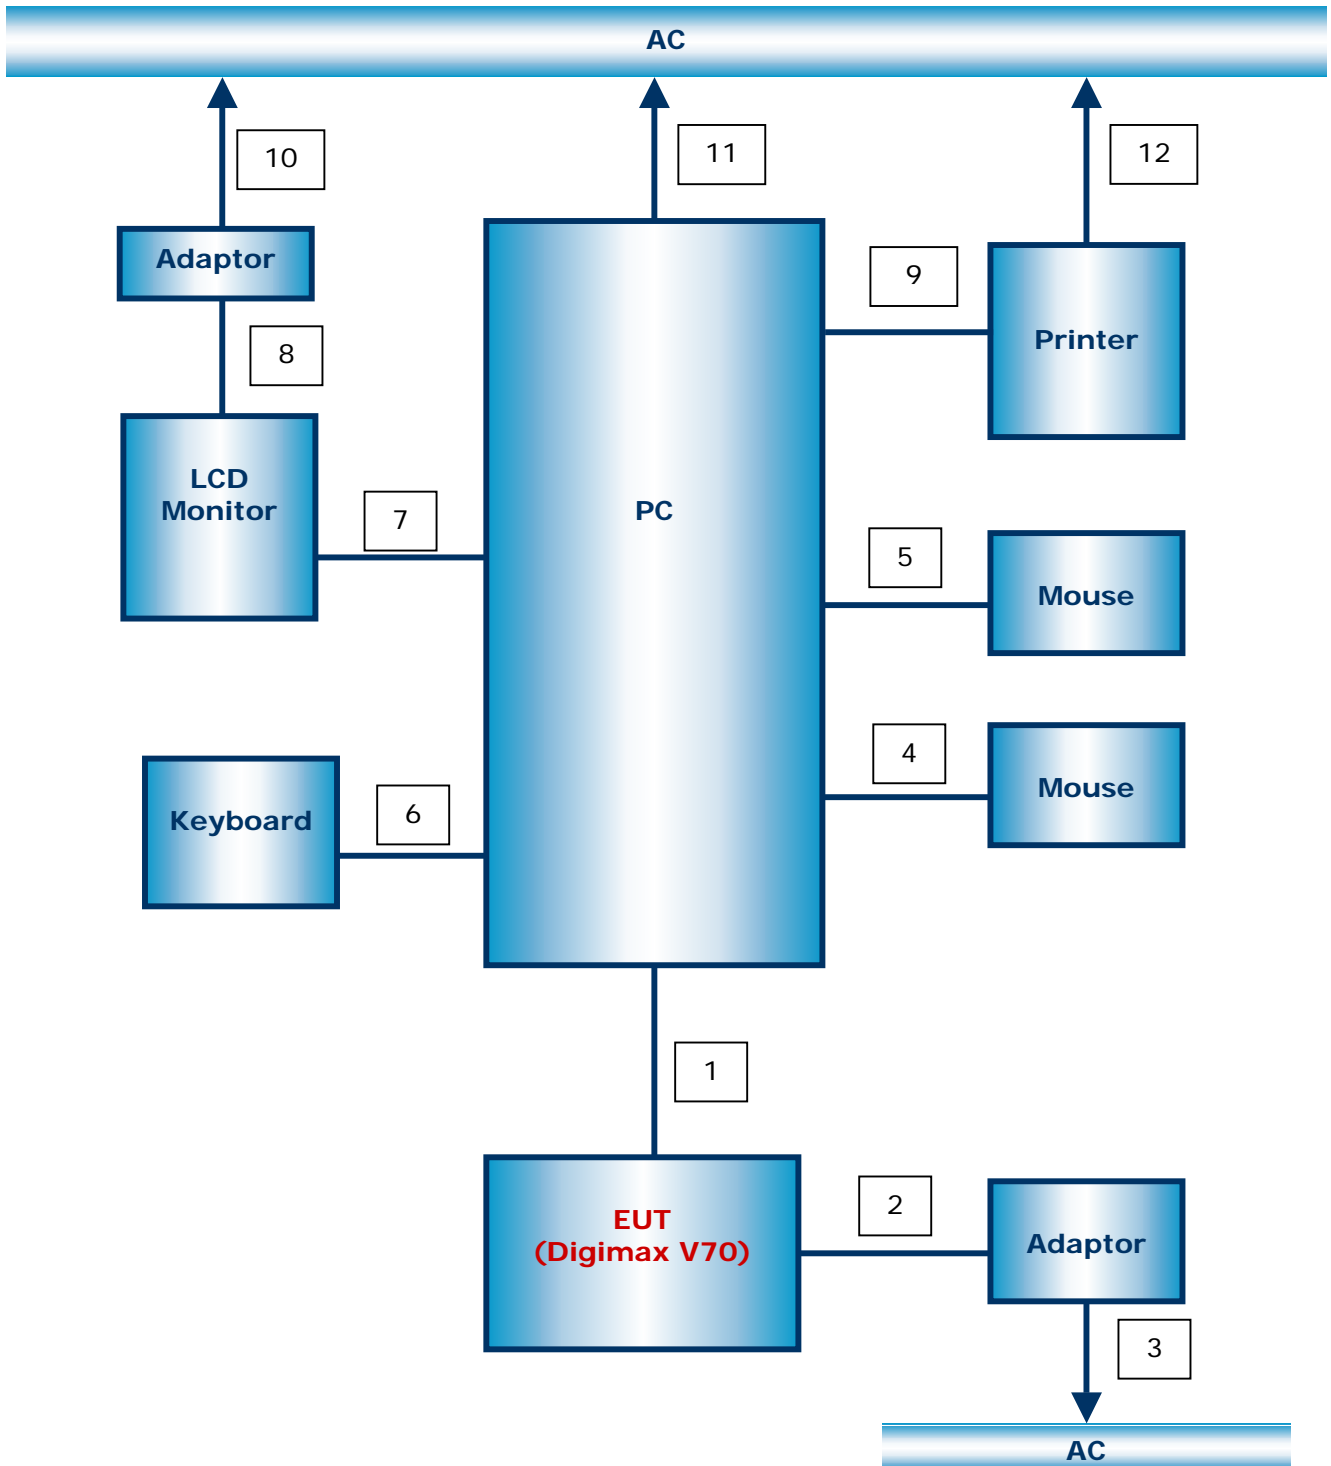

APPENDIX A – TEST DATA

Conducted Voltage Emissions (Quasi-Peak reading)

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
				[dBuV]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dB]
0.49	0.1	0.1	H	56.2	43.7	43.9	12.3	46.2	41.4	41.6	4.6
0.59	0.1	0.1	H	56.0	39.8	40.0	16.0	46.0	37.1	37.3	8.7
0.68	0.1	0.1	H	56.0	40.6	40.8	15.2	46.0	38.1	38.3	7.7
0.78	0.1	0.1	H	56.0	40.0	40.2	15.8	46.0	37.4	37.6	8.4
0.88	0.1	0.1	H	56.0	38.7	38.9	17.1	46.0	35.8	36.0	10.0
0.98	0.1	0.1	H	56.0	39.1	39.3	16.7	46.0	36.2	36.4	9.6

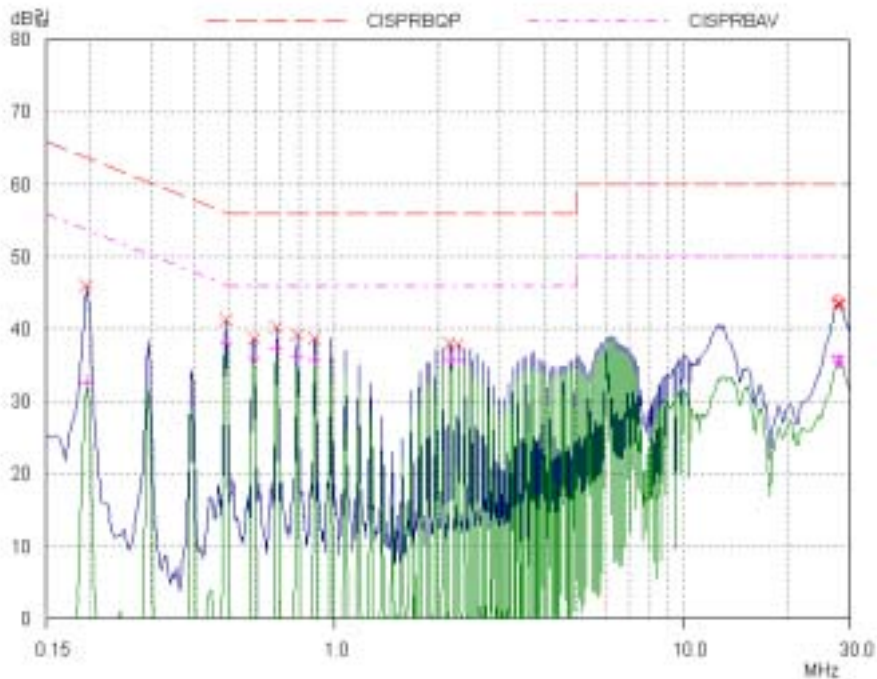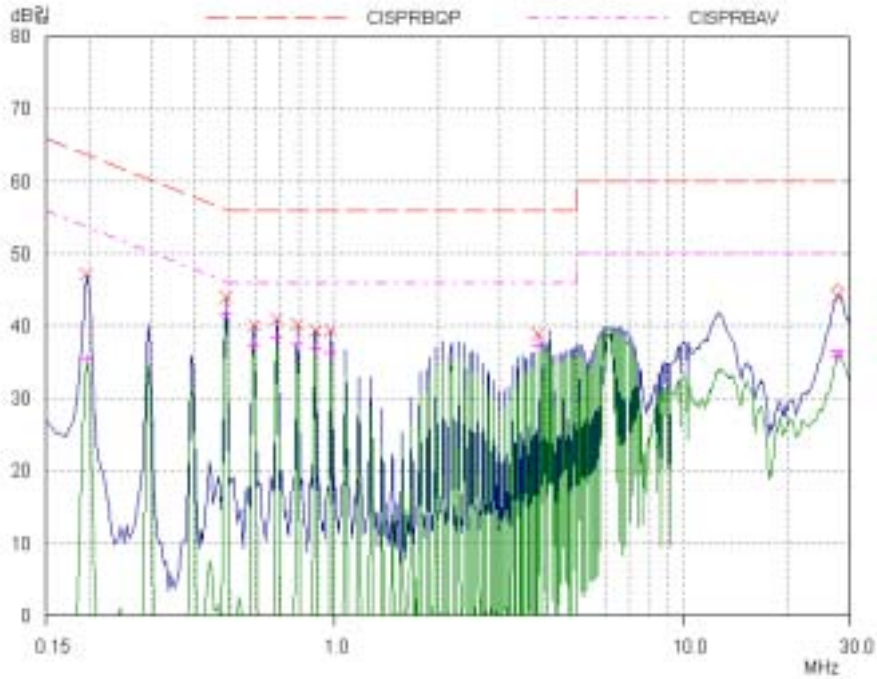

Radiated Electric Field Emissions (Quasi-Peak reading)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
266.34	18.9	H	1.0	10.0	3.2	37.0	32.1	4.9
312.19	14.9	H	4.0	11.3	3.4	37.0	29.6	7.4
480.12	13.1	H	4.0	15.2	4.3	37.0	32.6	4.4
561.12	7.6	V	1.8	16.4	4.5	37.0	28.5	8.5
673.92	6.0	H	2.0	18.1	5.0	37.0	29.1	7.9
720.41	7.6	H	2.0	18.8	5.2	37.0	31.6	5.4