

## EMC TEST REPORT For FCC



Test Report No. : 2005080017  
Date of Issue : August 9, 2005  
FCC ID : NLMDIGIMAXV800  
Model/Type No. : Digimax V800  
Kind of Product : Digital Camera  
Applicant : Samsung Techwin Co., Ltd.  
Applicant Address : 145-3 Sangdaewon 1-Dong, Jungwon-Gu, Sunghnam-City,  
Kyungki-Do, Korea  
Manufacturer : 1) Samsung Techwin Co., Ltd.  
2) Tianjin Samsung Opto-Electronics Co., LTD.  
Manufacturer Address : 1) 42, Sungju-dong, Changwon City, Kyungnam, Korea  
2) 7 Pingchang Road, Nabkai Dist., Tianjin, China  
Contact Person : Kun-Sop, Kim (Manager)  
Telephone : +82-31-740-8253  
Received Date : August 3, 2005  
Test period : Start : August 4, 2005 End : August 4, 2005  
Test Results :  **In Compliance**  **Not in Compliance**

The test results presented in this report relate only to the object tested.


CERTITEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by



Young-Kug, Song  
EMC Test Engineer  
Date: August 9, 2005

Reviewed by



James Hong  
EMC Technical Manager  
Date: August 9, 2005



# CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970 Fax: +82-31-339-9855

<http://www.certitek.com/>



CERTiTEK

## REPORT REVISION HISTORY

Date	Revision	Page No
August 9, 2005	Issued (2005080017)	All

*This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.*



## TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Model Differences .....	4
1.2 Device Modifications.....	5
1.3 EUT Configuration(s) .....	9
1.4 Test Software.....	9
1.5 EUT Operating Mode(s).....	9
1.6 Configuration.....	10
1.7 Calibration Details of Equipment Used for Measurement .....	11
1.8 Test Facility .....	11
1.9 Measurement Procedure .....	11
1.10 Laboratory Accreditations and Listings.....	12
2.0 Emissions Test Regulations.....	13
2.1 Conducted Voltage Emissions.....	14
2.2 Radiated Electric Field Emissions .....	15
APPENDIX A – TEST DATA .....	16
Conducted Voltage Emissions.....	16
Radiated Electric Field Emissions .....	18
APPENDIX B - Test Setup Photos and Configuration .....	20
Conducted Voltage Emissions.....	20
Radiated Electric Field Emissions .....	21
APPENDIX C – EUT Photographs .....	22
EUT External Photographs.....	23
EUT Internal Photographs .....	26
PCB .....	27
Photographs related to Label .....	31
FCC ID label location.....	32

## 1.0 General Product Description

### 1.0.1 Tested Equipment

- Unless otherwise indicated, all tests were conducted on Model Digimax V800.
- Tests performed on Model \_\_\_\_\_ were considered to be representative of Model(s) \_\_\_\_\_.

### 1.0.2 Equipment Size, Mobility and Identification

Dimensions:    Approx. 105 by 56.5 by 29.5     mm     inch

Mobility:         Hand-held     Table-top     Built-in

Traveling         Floor-standing

Serial No.:      Prototype

### 1.0.3 Electrical Ratings

Adaptor	Input:	100-250 Vac, 50/60 Hz, 0.3 A
	Output:	3.3 Vdc, 2.0 A
EUT	Input:	3.3 Vdc
	Output:	-

### 1.0.4 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage:        120 Vac  
Frequency:     60 Hz

### 1.0.5 Clock & Other Frequencies Utilized


12 MHz, 15.4 MHz, 36 MHz, 108 MHz

## 1.1 Model Differences

Not applicable


## 1.2 Device Modifications


The following modifications were necessary for compliance:


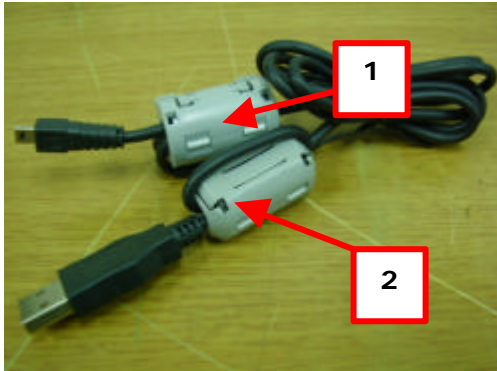



Ferrite Cores were inserted additionally.

Core location	Manufacturer	Part No.	Number of Cable Turn
1	TDK Corporation	ZCAT2032-0930	2
2	TDK Corporation	ZCAT2035-0930	1

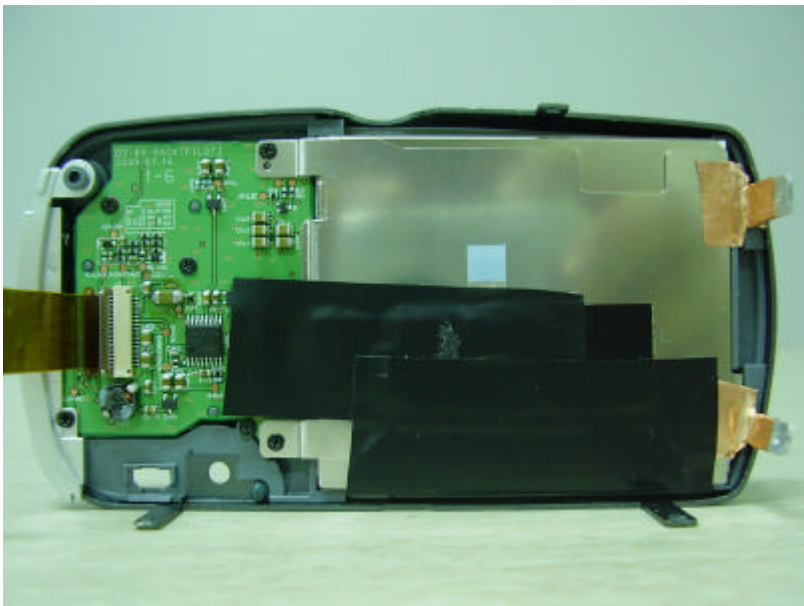

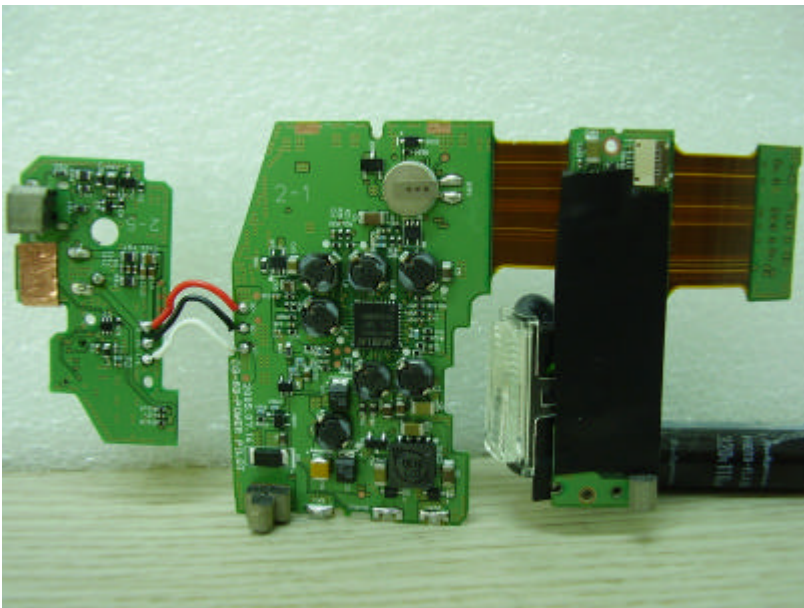

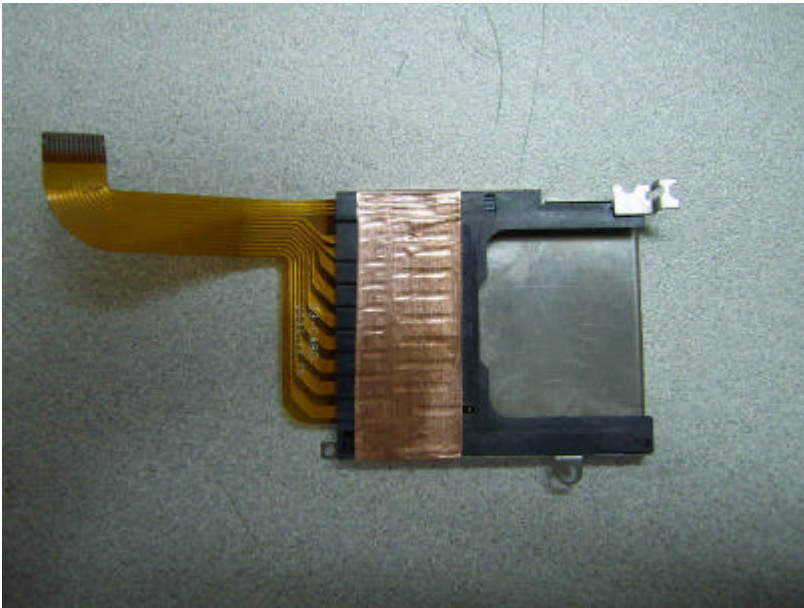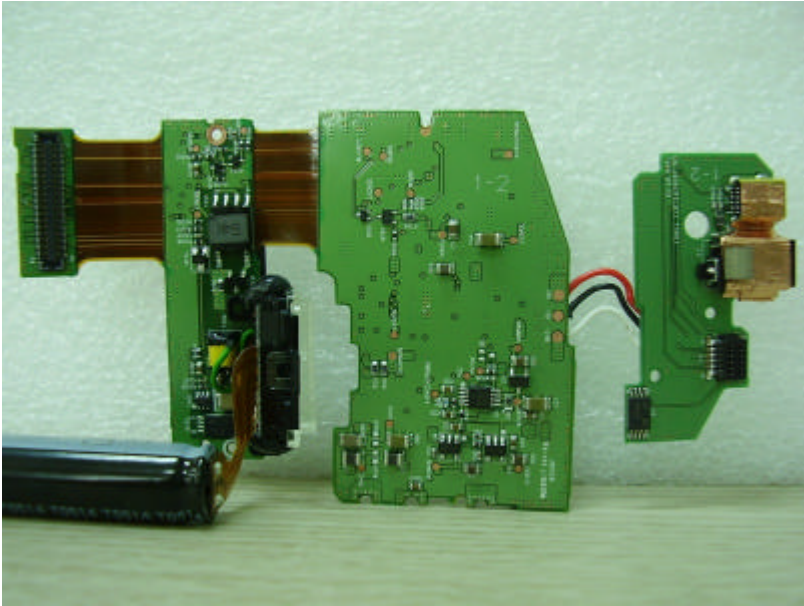

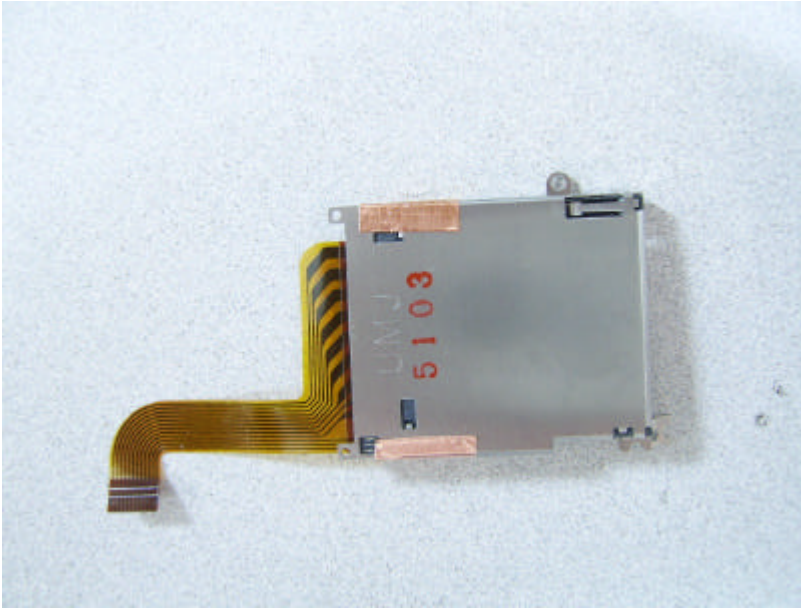



### 1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
Adaptor (for EUT)	AULT KOREA Corp.	PW137	-	-
Personal Computer	HEWLETT-PACKARD COMPANY	HP Pavilion t812k	KRJ50403HK	DoC
LCD Monitor	TIANJIN SAMSUNG ELECTRONICS DISPLAY	176T-DZ/KOR	N372HVEX225526	DoC
Adaptor (for LCD Monitor)	Anam Instruments (Shen Zhen) Co., Ltd.	APO4214-UV	-	-
Keyboard (PS/2 type)	HEWLETT-PACKARD COMPANY	5219	BN50107686	E5XKB5209
Mouse (PS/2 type)	HEWLETT-PACKARD COMPANY	N3+ Optical	K045205991	DoC
Mouse (USB type)	SAMSUNG	OMS3CB	0303009883	DoC
Printer (Parallel type)	Seiko Epson Corp.	Stylus Color 460	BWCE136524	DoC

Cable Description

#	Description	Ferrite Core	Length (m)	Other Details
1	Adaptor power Cable, Unshielded	No	1.8	Connect to AC power
2	AC power cable, Unshielded	No	1.8	Connect to AC power
3	AC power cable, Unshielded	No	1.8	Connect to AC power
4	Adaptor (for EUT) power Cable, Unshielded	No	1.5	Connect to AC power
5	DC In Cable, Unshielded	Yes	1.5	Between the LCD Monitor and Adaptor
6	Monitor cable, Shielded	Yes	1.5	Between the PC and LCD Monitor
7	Printer cable, Shielded	No	1.5	Between the PC and Printer
8	Keyboard cable, Shielded	No	1.5	PS/2 type
9	Mouse cable, Shielded	No	1.5	PS/2 type
10	Mouse cable, Shielded	No	1.5	USB type
11	USB cable, Shielded	Yes	1.2	Between the EUT and PC
12	DC In Cable, Unshielded	Yes	1.0	Between the EUT and Adaptor

### 1.4 Test Software


- EMC Test V 1.0  
 Display Test Patterns - V1.5  
 Ping.exe  
 Not applicable

### 1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

- Standby  
 Display circles pattern  
 Practice operation - USB downloading mode.  
 Scrolling 'H'  
 Read / Write  
 AV output monitoring mode.

## 1.6 Configuration

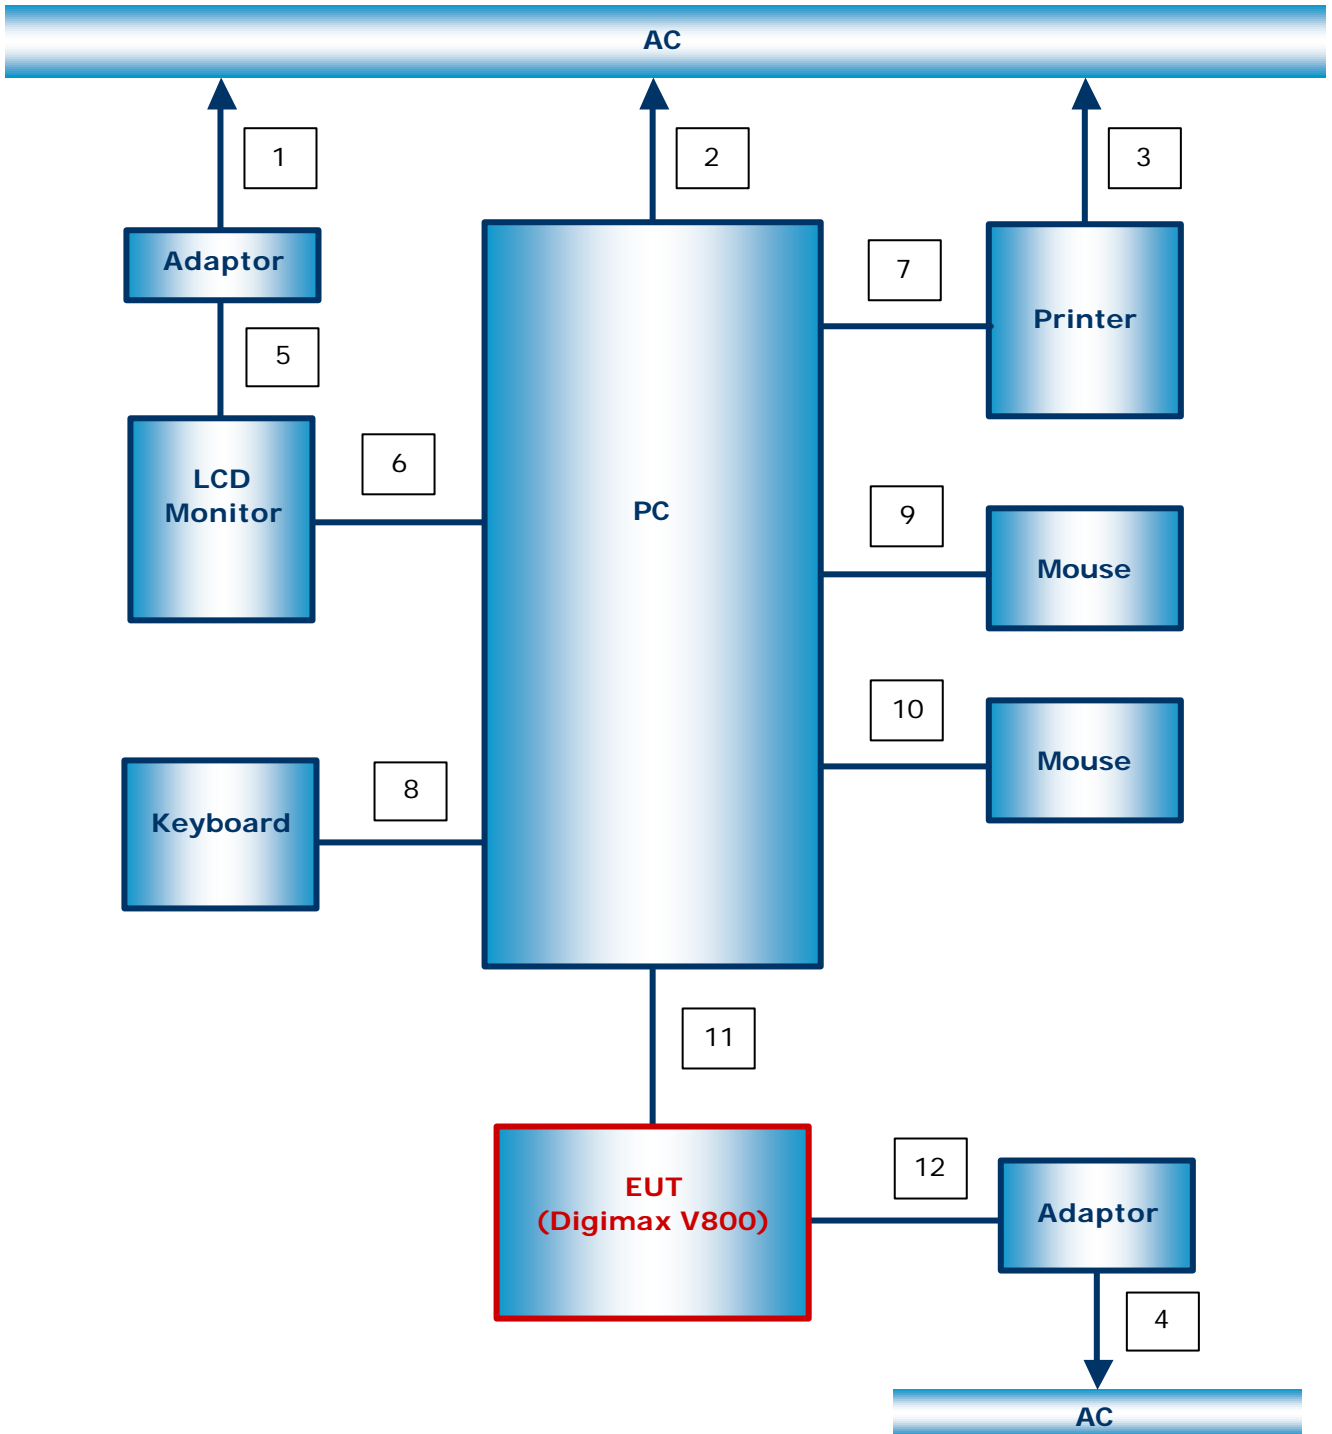

## 1.7 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

## 1.8 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.9 Measurement Procedure






Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)  
Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

\* Measurement procedures was In accordance with ANSI C63.4-2001 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2

## 1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	<b>FCC</b>	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 93250
JAPAN	<b>VCCI</b>	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	<b>MIC</b>	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 No. 51, KR0025
International	<b>KOLAS</b>	EMC	 NO-119
Europe	<b>GLAS</b>	EMC EN 55011, EN 55022, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 50130-4, EN 55024, EN 61204-3, EN 60601-1-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	 No.13000796-02

## 2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

- |  |                                  |   |
|--|----------------------------------|---|
| <input type="checkbox"/> EN 61000-6-3:2001                           | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 61000-6-4:2001                           | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 50083-2:2001                             |                                  |   |
| <input type="checkbox"/> EN 55011:1998 +A1:1999                      | <input type="checkbox"/> Group 1 | <input type="checkbox"/> Group 2            |
|  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55011:1998 +A1:1999 +A2:2002             | <input type="checkbox"/> Group 1 | <input type="checkbox"/> Group 2            |
|  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55013:1990 +A12:1994 +A13:1996 +A14:1999 |                                  |   |
| <input type="checkbox"/> EN 55013:2001                               |                                  |   |
| <input type="checkbox"/> EN 55014-1:2000                             |                                  |   |
| <input type="checkbox"/> EN 55014-1:2000 +A1:2001                    |                                  |   |
| <input type="checkbox"/> EN 55015:2000                               |                                  |   |
| <input type="checkbox"/> EN 55015:2000 +A1:2001                      |                                  |   |
| <input type="checkbox"/> EN 55022:1994 +A1:1995 +A2:1997             | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55022:1998                               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55022:1998 +A1:2000                      | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 55022:1998 +A1:2000 +A2:2003             | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> EN 61000-3-2:2000                           |                                  |   |
| <input type="checkbox"/> EN 61000-3-3:1995 +A1:2001                  |                                  |   |
| <input type="checkbox"/> VCCI V-3/2004.04                            | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input type="checkbox"/> AS/NZS 3548:1995 +A1:1997 +A2:1997          | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B            |
| <input checked="" type="checkbox"/> FCC Part 15 Subpart B            | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> CISPR 22:1997                    | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B |
- The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109.
- |   |                                  |                                  |
|---|----------------------------------|----------------------------------|
| <input type="checkbox"/> CISPR 22:1997 +A1:2000 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
|---|----------------------------------|----------------------------------|

## 2.1 Conducted Voltage Emissions

### Test Date

August 4, 2005

### Test Location

Shielded Room

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2006-02-01
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	9607-2574	2005-09-03
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	9409-2246	2005-09-03

### Frequency Range of Measurement

150 kHz to 30 MHz

### Test Results

The requirements are:

MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark
3.53	38.3	7.7	Average

NOT MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark

NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.2 Radiated Electric Field Emissions

### Test Date

August 4, 2005

### Test Location

Testing was performed at a test distance of 3 & 10 meter Open Area Test Site

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESVS30	829673/015	2005-11-15
<input checked="" type="checkbox"/>	EMC Analyzer	Agilent Technologies	E7403A	MY42000054	2006-01-15
<input checked="" type="checkbox"/>	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2006-05-27
<input type="checkbox"/>	Biconical Antenna	EMCO	3110	9202-1510	2006-04-13
<input type="checkbox"/>	Log-periodic Antenna	EMCO	3146	9607-4567	2006-04-08

### Frequency Range of Measurement

30 MHz to 1 GHz: 10 meter Open Area Test Site

1 GHz to 2 GHz: 3 meter Open Area Test Site

### Test Results

The requirements are:

MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
216.32	26.5	3.5	Quasi-peak

NOT MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark

NOT APPLICABLE

### Remarks



See Appendix A for test data

## APPENDIX A – TEST DATA

### Conducted Voltage Emissions

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]
	0.20	0.2		0.1	N	63.6	51.4	51.7	11.9	53.6	39.9
3.43	0.1	0.2	N	56.0	42.0	42.3	13.7	46.0	37.7	38.0	8.0
3.53	0.1	0.2	N	56.0	42.2	42.5	13.5	46.0	38.0	38.3	7.7
4.03	0.1	0.2	H	56.0	40.2	40.5	15.5	46.0	36.3	36.6	9.4
4.13	0.1	0.2	N	56.0	40.5	40.8	15.2	46.0	36.8	37.1	8.9
4.64	0.1	0.2	N	56.0	40.8	41.1	14.9	46.0	37.0	37.3	8.7



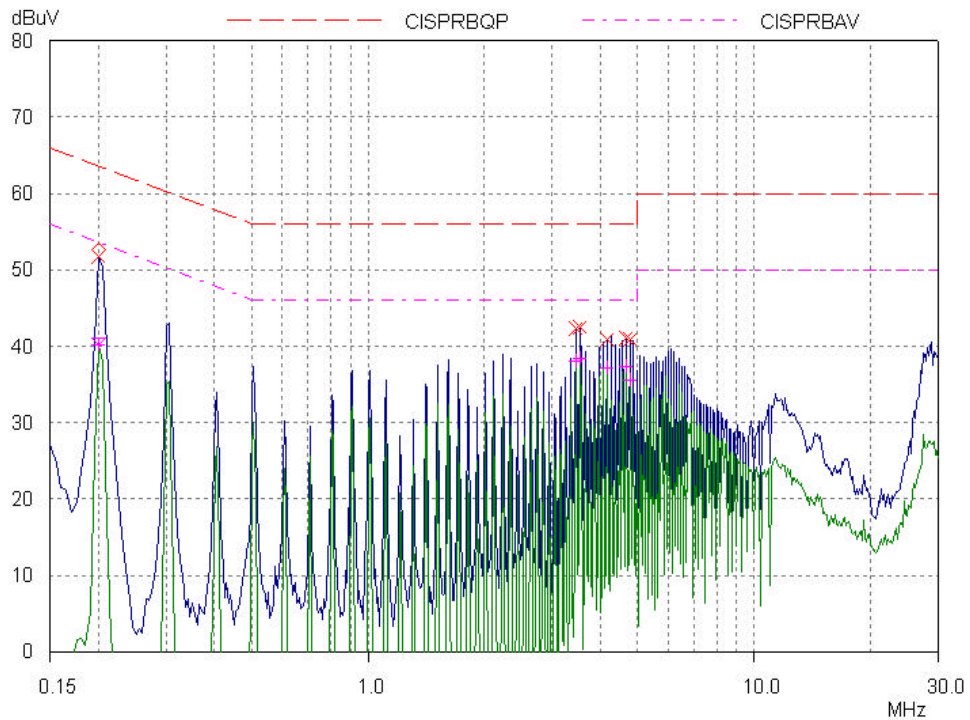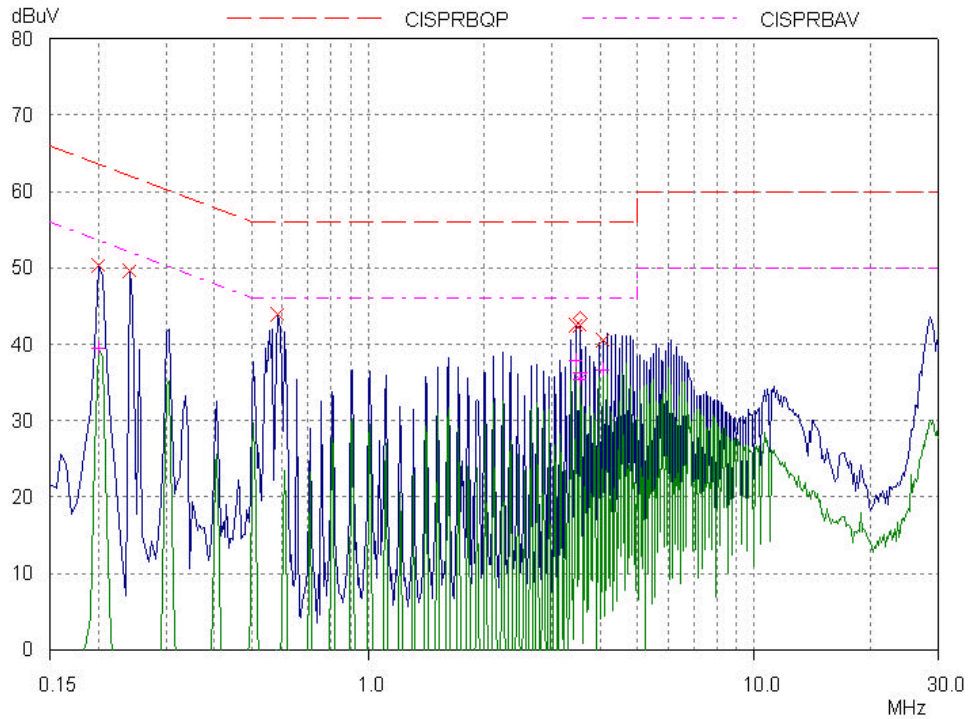

## Radiated Electric Field Emissions

30 MHz to 1 GHz: 10 meter Open Area Test Site

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
108.37	11.3	V	1.5	9.5	1.9	30.0	22.7	7.3
144.07	12.5	V	1.0	7.8	2.3	30.0	22.6	7.4
216.32	15.8	V	2.0	8.0	2.8	30.0	26.5	3.5
324.54	16.3	H	3.5	11.6	3.4	37.0	31.3	5.7
539.75	12.8	H	4.0	16.1	4.4	37.0	33.3	3.7
648.25	9.3	V	2.2	17.8	5.0	37.0	32.1	4.9

1 GHz to 2 GHz: 3 meter Open Area Test Site

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
1197.12	16.0	H	3.6	21.40	5.00	54.0	42.4	11.6
1499.53	11.5	V	1.0	21.40	5.00	54.0	37.9	16.1
1595.75	14.0	H	4.0	21.40	5.00	54.0	40.4	13.6