



# FCC RF Test Report

APPLICANT : HTC Corporation  
EQUIPMENT : Smartphone  
MODEL NAME : 0P9O300  
FCC ID : NM80P9O300  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jun. 05, 2014 and testing was completed on Jul. 04, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Applicable Standards ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Pre-Scanned RF Power ..... 8

    2.3 Test Mode ..... 9

    2.4 Connection Diagram of Test System ..... 10

    2.5 Support Unit used in test configuration and system ..... 11

    2.6 EUT Operation Test Setup ..... 11

    2.7 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB Bandwidth Measurement ..... 12

    3.2 Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 18

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 20

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 30

    3.6 AC Conducted Emission Measurement ..... 47

    3.7 Antenna Requirements ..... 53

**4 LIST OF MEASURING EQUIPMENT ..... 54**

**5 UNCERTAINTY OF EVALUATION ..... 55**



**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.62 dB at 2483.860 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.90 dB at 0.190 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**HTC Corporation**

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

## 1.2 Manufacturer

**HTC Corporation**

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Model Name	0P9O300
Sample 1	EUT with LCM, Camera Front, Camera Back, and Battery 1
Sample 2	EUT with LCM, Camera Front, Camera Back, and Battery 2
FCC ID	NM80P9O300
EUT supports Radios application	CDMA/EV-DO/LTE/NFC WLAN 11b/g/n HT20 Bluetooth v4.0 EDR/LE
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz.
Maximum (Peak) Output Power to Antenna	802.11b : 20.75 dBm (0.1189 W) 802.11g : 21.91 dBm (0.1552 W) 802.11n HT20 : 21.98 dBm (0.1578 W)
Antenna Type	802.11b/g/n : PIFA Antenna type with gain -0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH02-HY	CO05-HY	03CH07-HY

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	20.75	20.45	20.44	20.67

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	21.91	21.89	21.83	21.86	21.56	21.58	21.75	21.39

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	21.98	21.72	21.82	21.80	21.84	21.77	21.75	21.76





### 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11

Test Cases	
AC Conducted Emission	Mode 1 : LTE Band 13 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + GPS Rx + Earphone 1 + USB Cable 5 (Data Link with Notebook) for Sample 1


**Remark:** All the radiated test cases were performance with Sample 1.

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

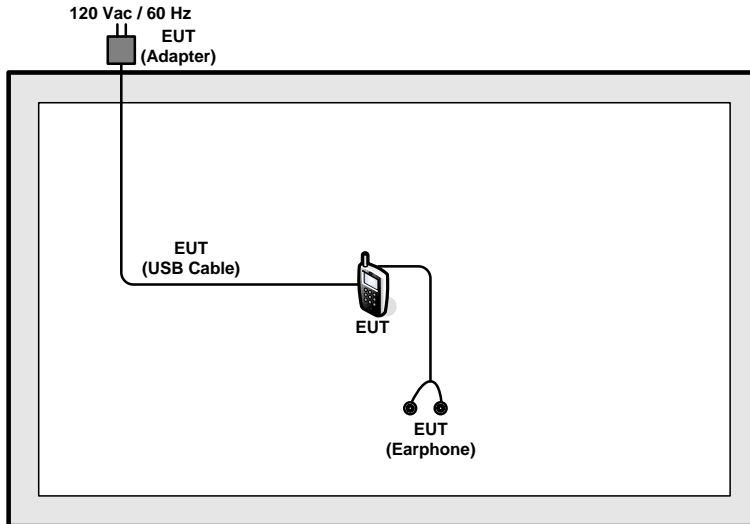

### <AC Conducted Emission Mode>

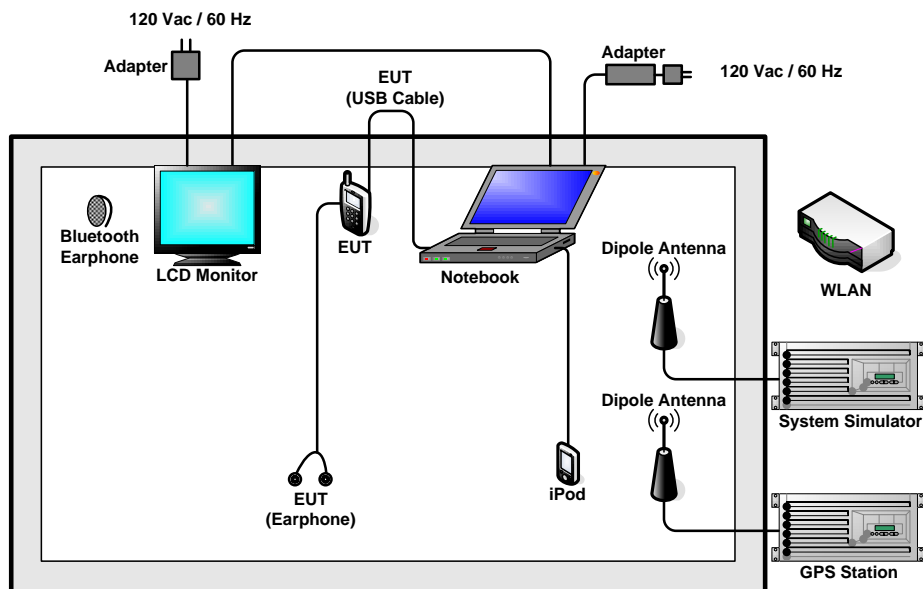



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
7.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Test Band :	2.4GHz	Temperature :	21~26°C
Test Engineer :	Stuart Lin	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	7.54	0.5	Pass
11b	1Mbps	1	6	2437	7.08	0.5	Pass
11b	1Mbps	1	11	2462	7.08	0.5	Pass
11g	6Mbps	1	1	2412	16.38	0.5	Pass
11g	6Mbps	1	6	2437	16.38	0.5	Pass
11g	6Mbps	1	11	2462	16.32	0.5	Pass
HT20	MCS0	1	1	2412	17.60	0.5	Pass
HT20	MCS0	1	6	2437	17.60	0.5	Pass
HT20	MCS0	1	11	2462	17.58	0.5	Pass

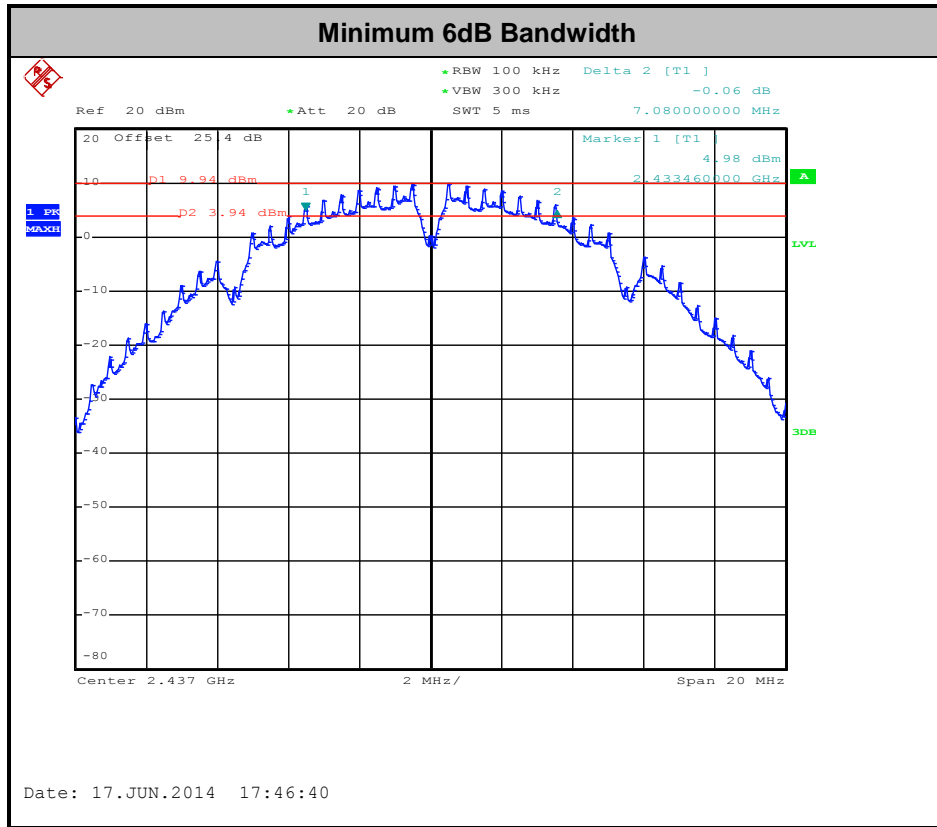

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

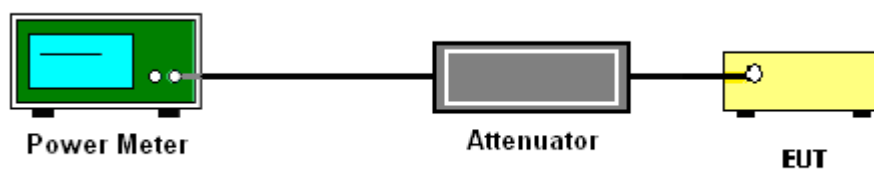



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	21~26°C
Test Engineer :	Stuart Lin	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	20.75	30	-0.50	Pass
11b	1Mbps	1	6	2437	20.54	30	-0.50	Pass
11b	1Mbps	1	11	2462	20.63	30	-0.50	Pass
11g	6Mbps	1	1	2412	21.45	30	-0.50	Pass
11g	6Mbps	1	6	2437	21.83	30	-0.50	Pass
11g	6Mbps	1	11	2462	21.91	30	-0.50	Pass
HT20	MCS0	1	1	2412	21.98	30	-0.50	Pass
HT20	MCS0	1	6	2437	21.85	30	-0.50	Pass
HT20	MCS0	1	11	2462	21.69	30	-0.50	Pass

Note: Measured power (dBm) has offset with cable loss.





3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	21~26°C
Test Engineer :	Stuart Lin	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.00	17.86	30	-0.50	Pass
11b	1Mbps	1	6	2437	0.00	17.57	30	-0.50	Pass
11b	1Mbps	1	11	2462	0.00	17.78	30	-0.50	Pass
11g	6Mbps	1	1	2412	0.16	12.75	30	-0.50	Pass
11g	6Mbps	1	6	2437	0.16	12.84	30	-0.50	Pass
11g	6Mbps	1	11	2462	0.16	12.99	30	-0.50	Pass
HT20	MCS0	1	1	2412	0.17	12.84	30	-0.50	Pass
HT20	MCS0	1	6	2437	0.17	12.52	30	-0.50	Pass
HT20	MCS0	1	11	2462	0.17	12.74	30	-0.50	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup






3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	21~26°C
Test Engineer :	Stuart Lin	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-3.13	8	-0.50	Pass
11b	1Mbps	1	6	2437	-4.67	8	-0.50	Pass
11b	1Mbps	1	11	2462	-3.08	8	-0.50	Pass
11g	6Mbps	1	1	2412	-12.46	8	-0.50	Pass
11g	6Mbps	1	6	2437	-12.63	8	-0.50	Pass
11g	6Mbps	1	11	2462	-12.19	8	-0.50	Pass
HT20	MCS0	1	1	2412	-13.04	8	-0.50	Pass
HT20	MCS0	1	6	2437	-12.32	8	-0.50	Pass
HT20	MCS0	1	11	2462	-12.77	8	-0.50	Pass

Note: Measured power density (dBm) has offset with cable loss.

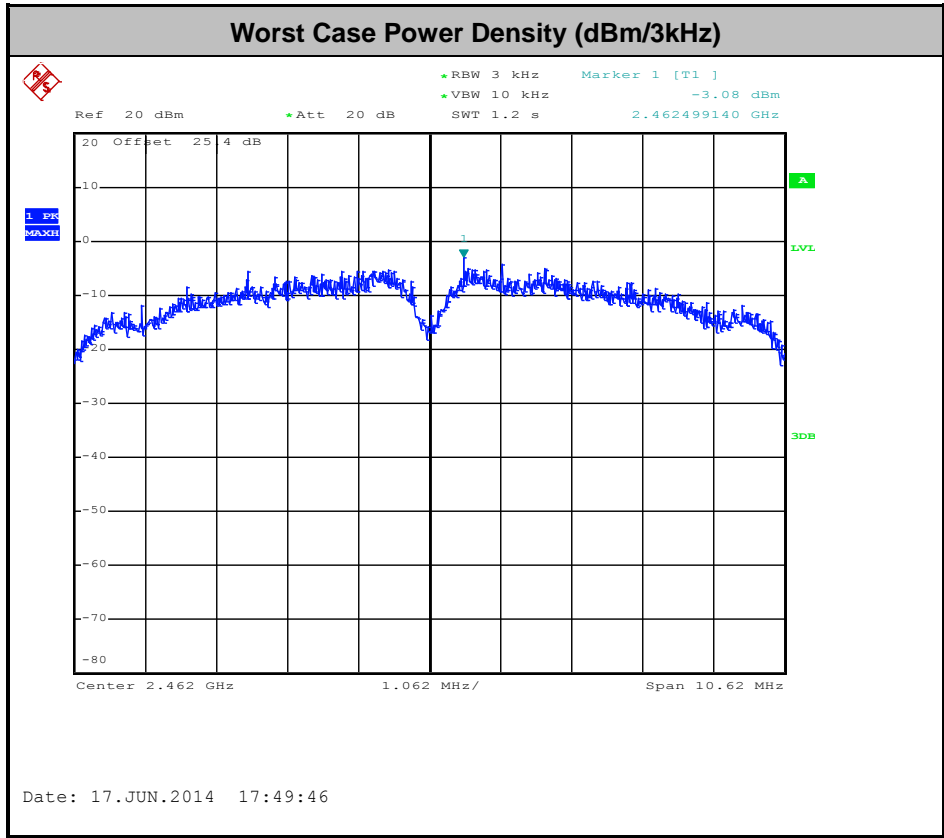

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

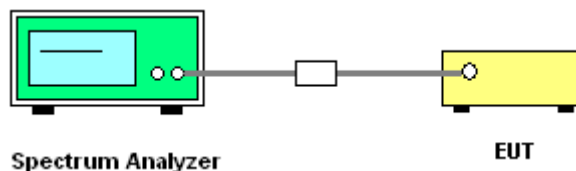





### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Stuart Lin

#### WLAN 802.11b Channel 01


<b>100kHz PSD reference Level</b>	<b>Low Channel Plot</b>
-----------------------------------	-------------------------

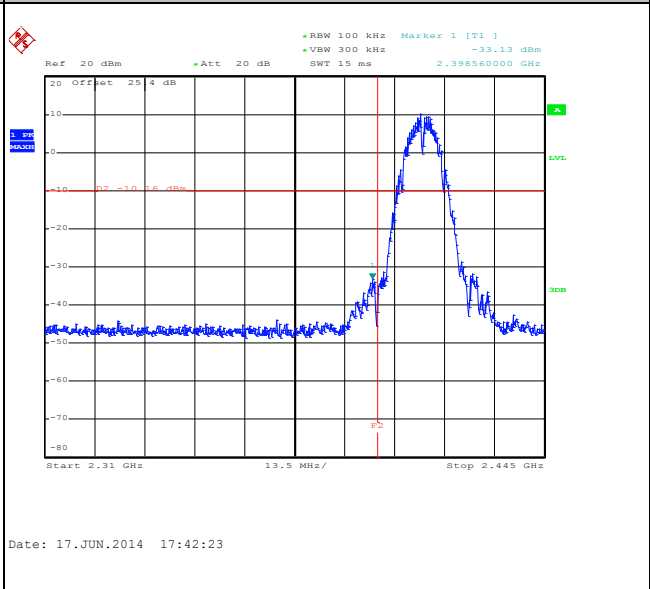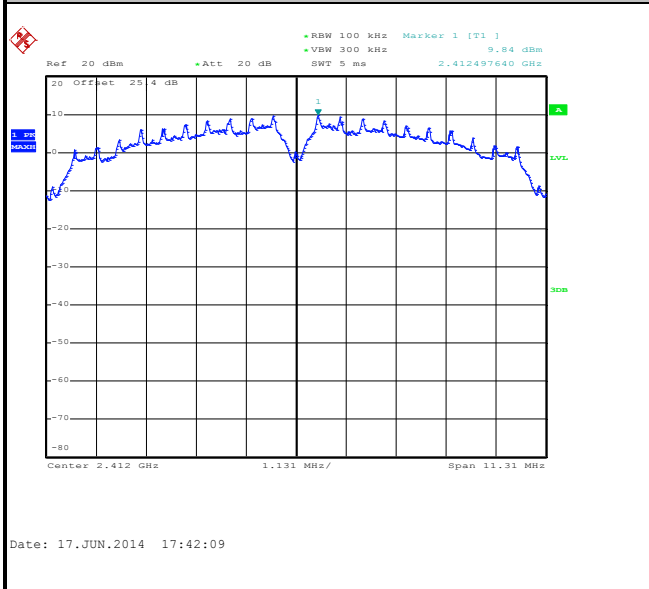

#### Spurious Emission 30MHz~3GHz

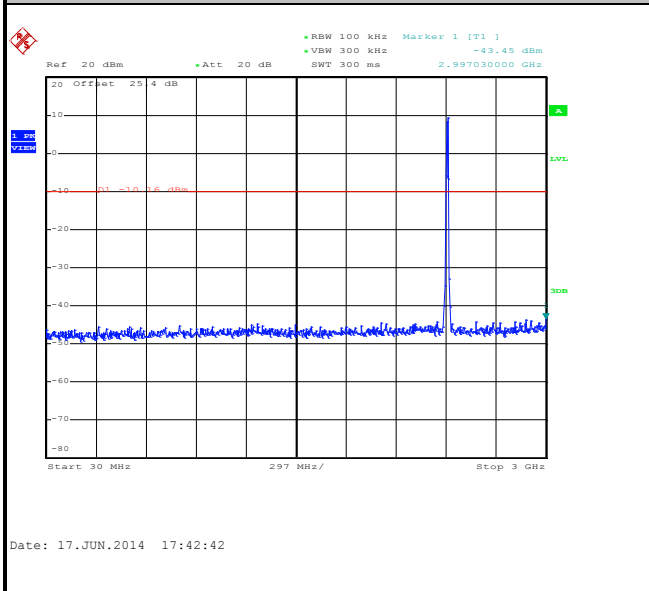

#### Spurious Emission 2GHz~25GHz

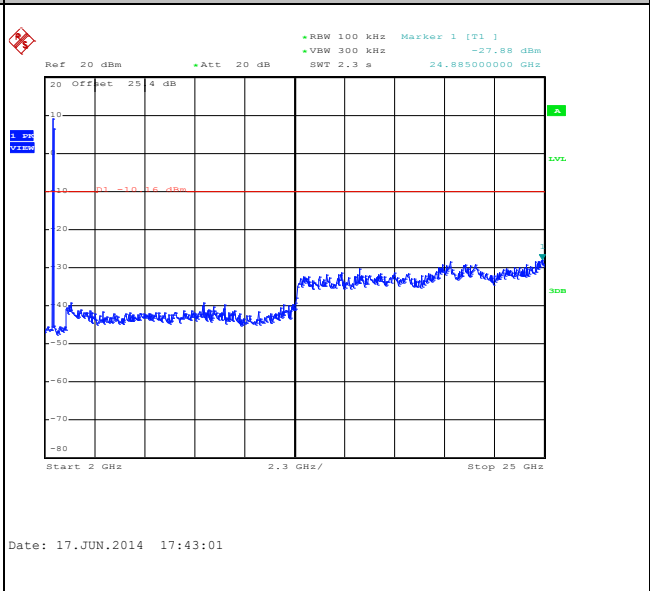





Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Stuart Lin

WLAN 802.11b Channel 06


100kHz PSD reference Level

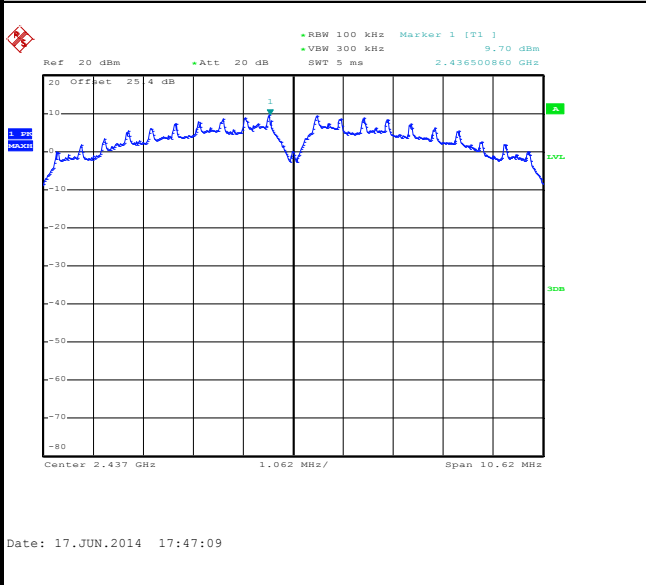

Spurious Emission 30MHz~3GHz

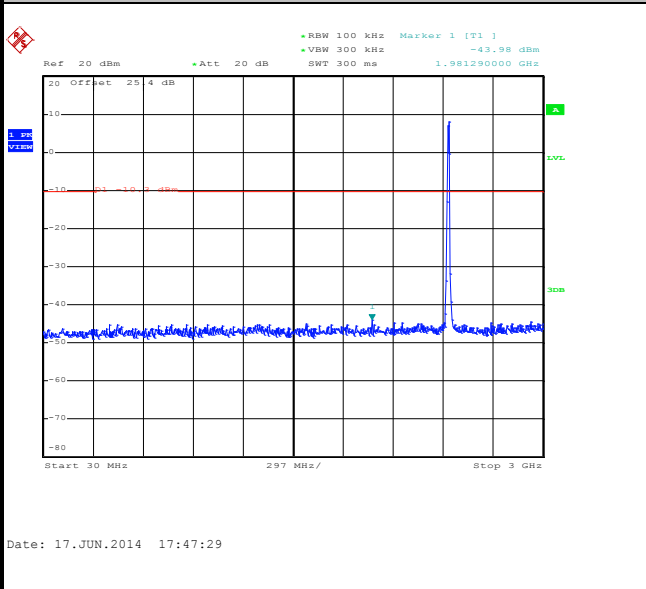

Spurious Emission 2GHz~25GHz

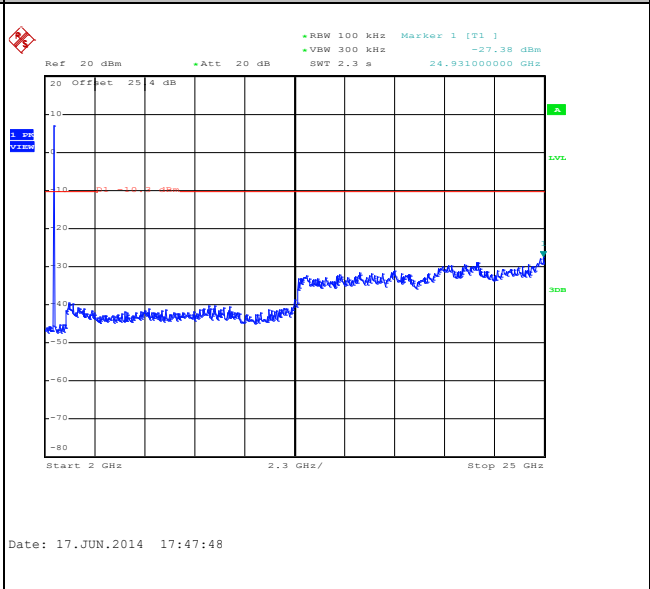





Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Stuart Lin

WLAN 802.11b Channel 11


100kHz PSD reference Level

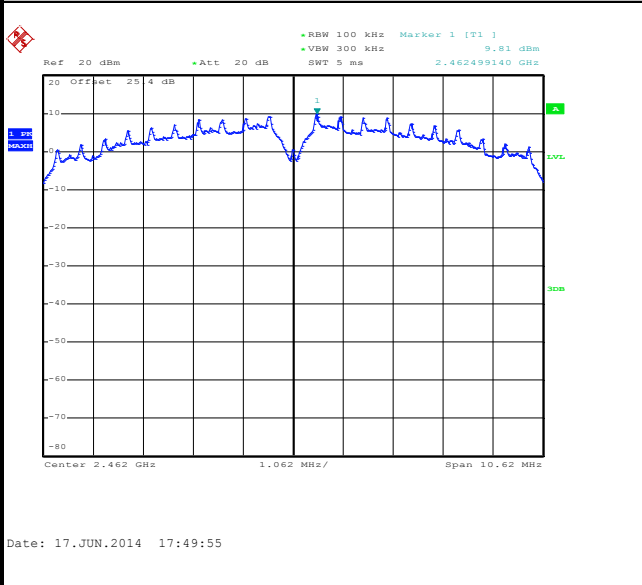


High Channel Plot

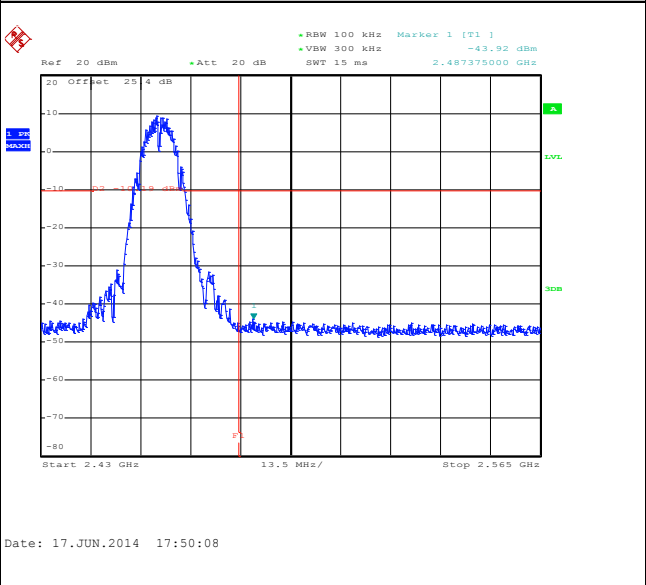

Spurious Emission 30MHz~3GHz

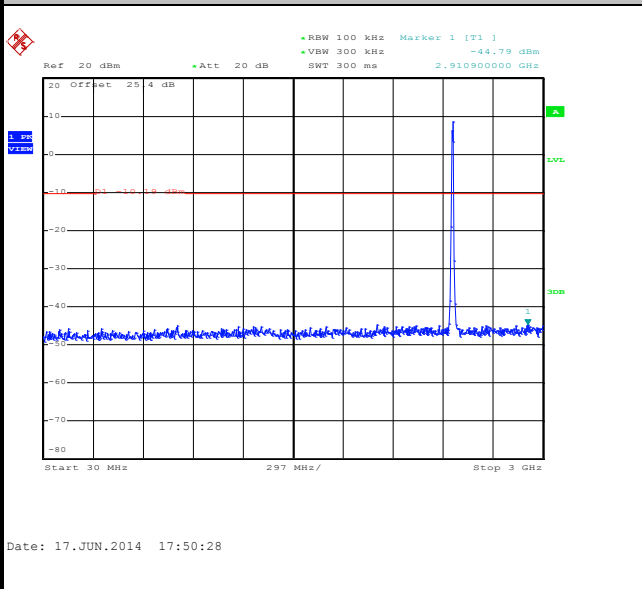

Spurious Emission 2GHz~25GHz

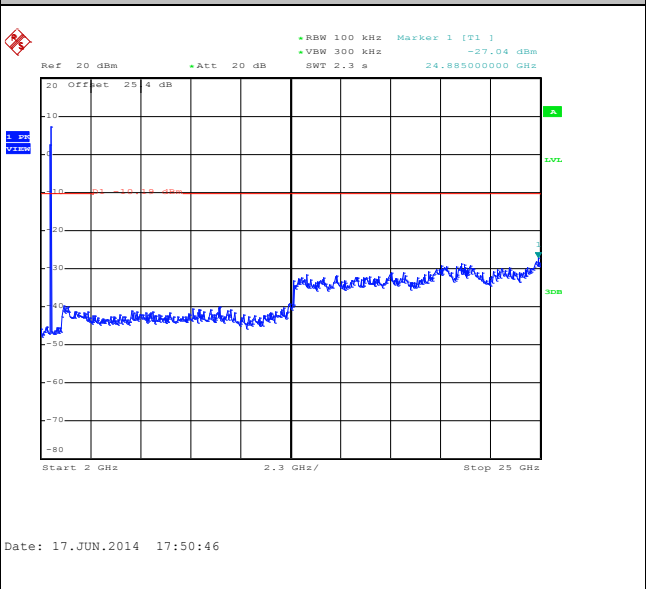





Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Stuart Lin

WLAN 802.11g Channel 01


100kHz PSD reference Level

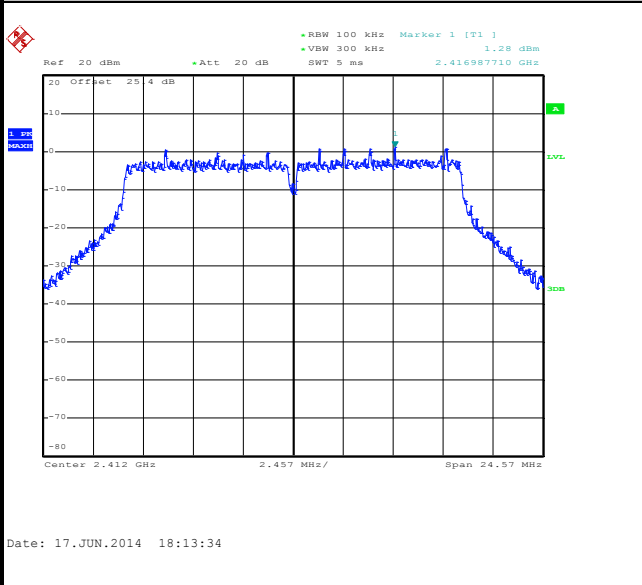


Low Channel Plot

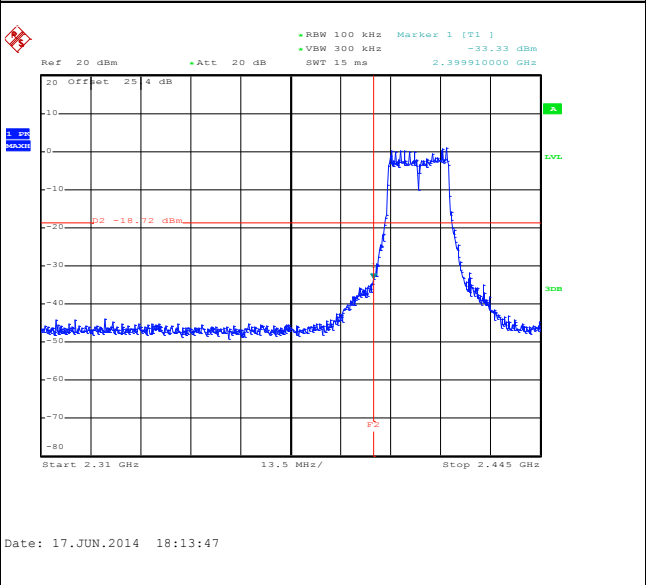

Spurious Emission 30MHz~3GHz

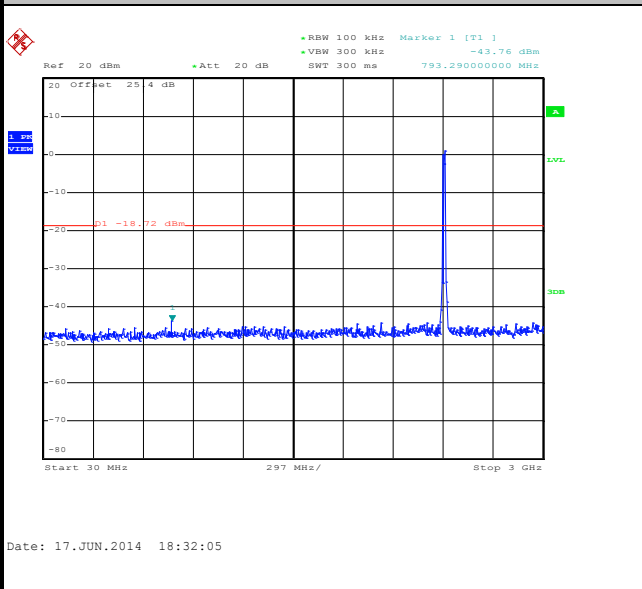

Spurious Emission 2GHz~25GHz

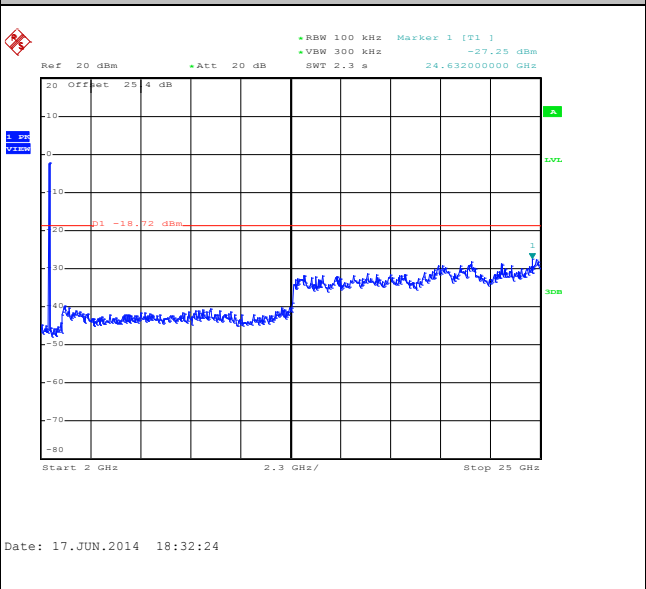







Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Stuart Lin

WLAN 802.11g Channel 06


100kHz PSD reference Level

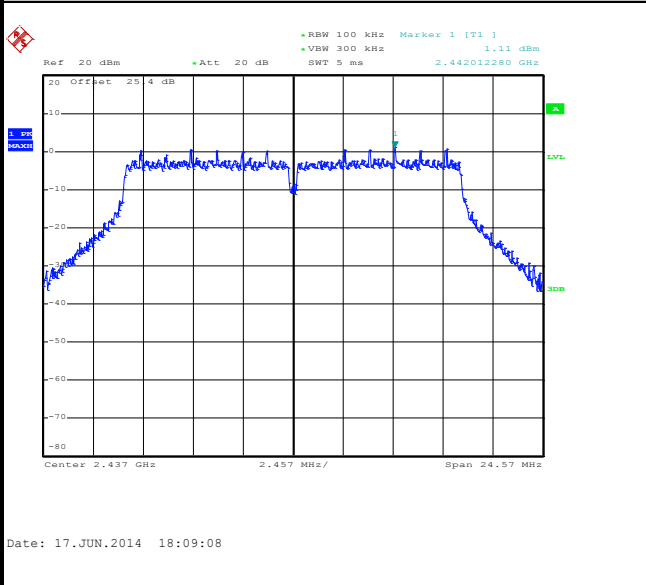

Spurious Emission 30MHz~3GHz

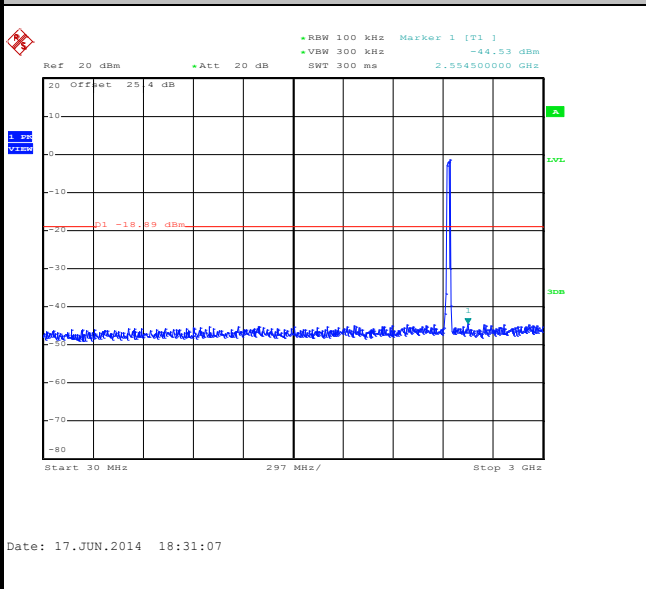

Spurious Emission 2GHz~25GHz

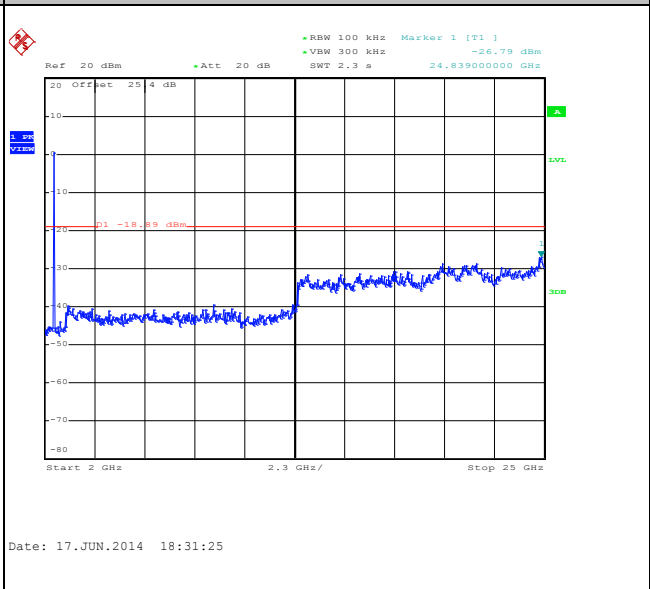





Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Stuart Lin

WLAN 802.11g Channel 11


100kHz PSD reference Level

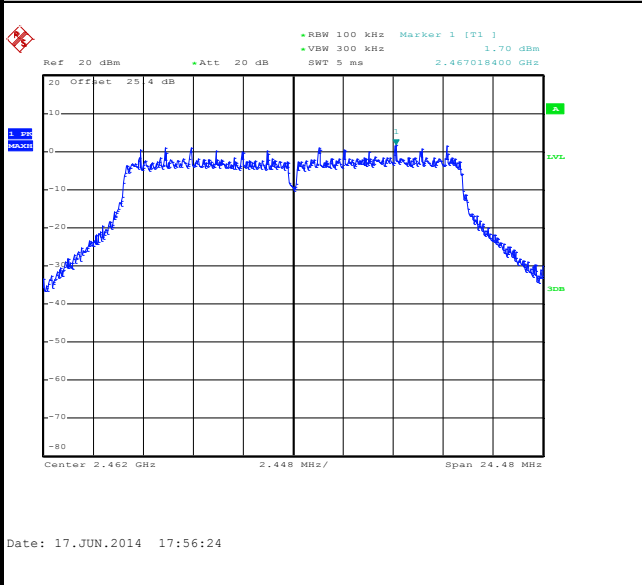


High Channel Plot

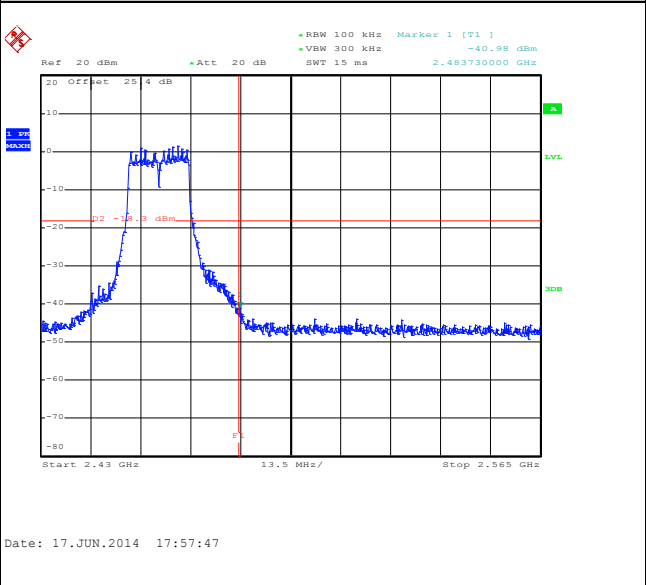

Spurious Emission 30MHz~3GHz

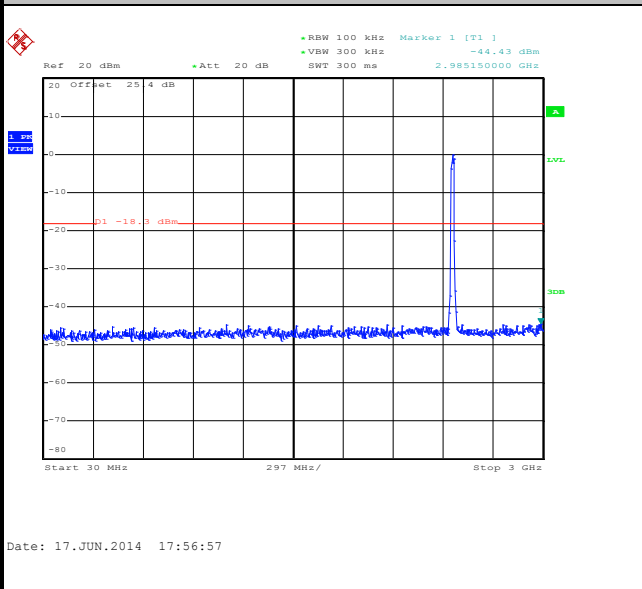

Spurious Emission 2GHz~25GHz

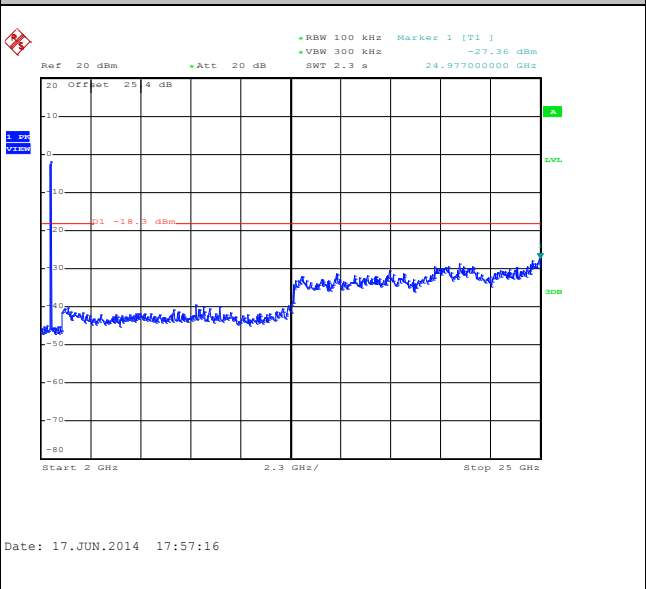





Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Stuart Lin

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

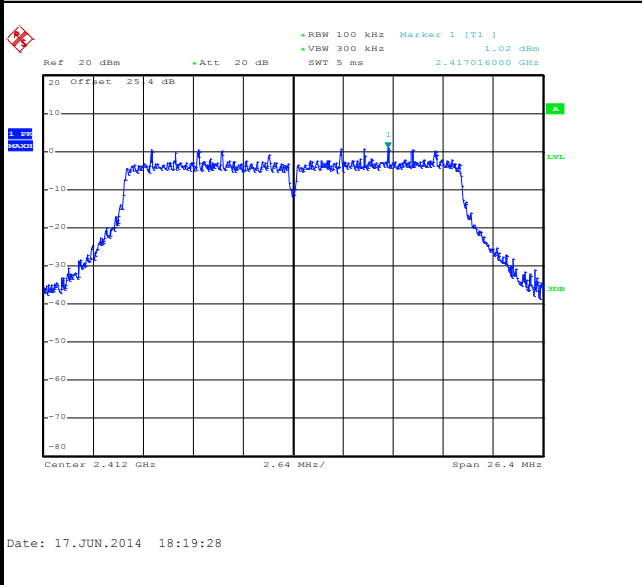


Low Channel Plot

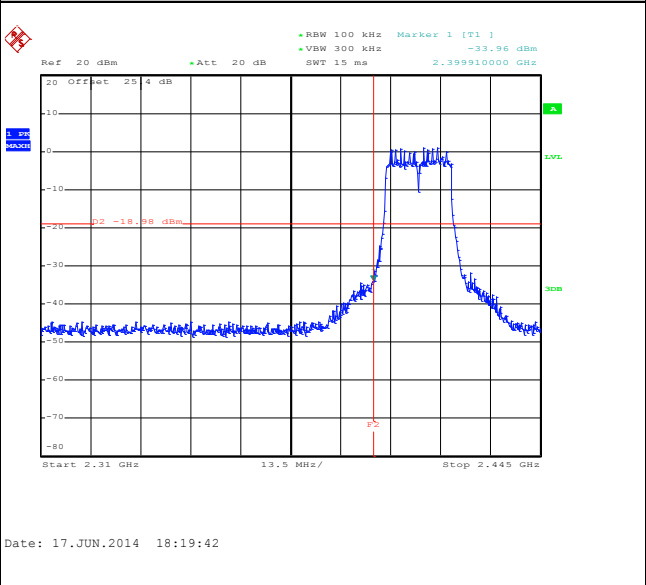

Spurious Emission 30MHz~3GHz

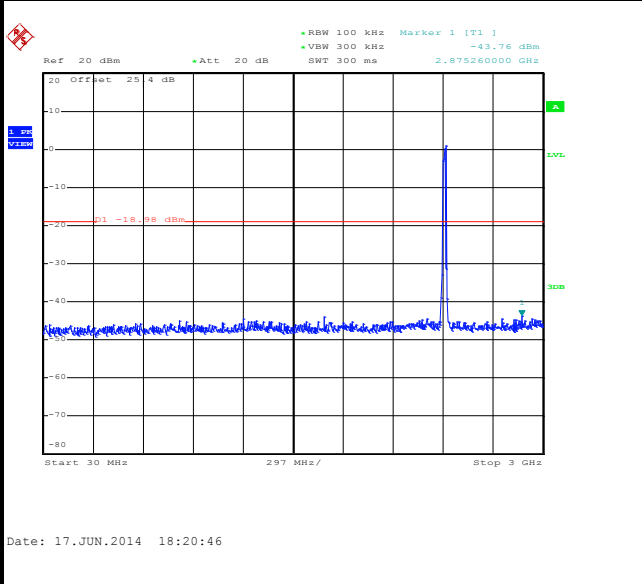

Spurious Emission 2GHz~25GHz

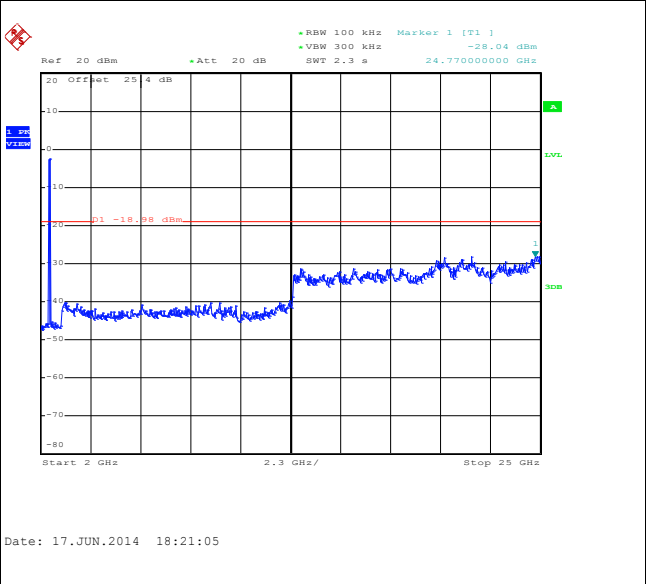




Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Stuart Lin


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

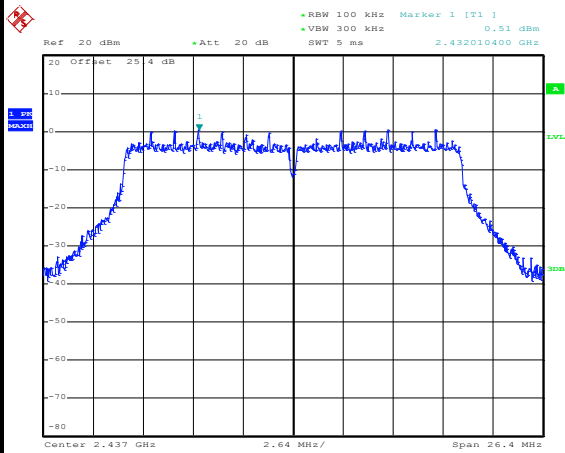


Date: 17.JUN.2014 18:23:02

Spurious Emission 30MHz~3GHz

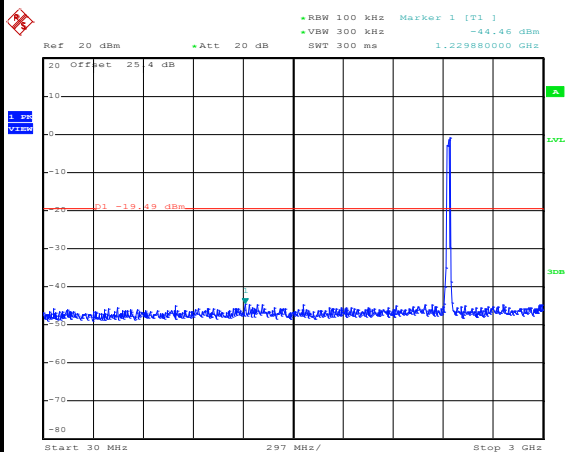

Date: 17.JUN.2014 18:28:58

Spurious Emission 2GHz~25GHz

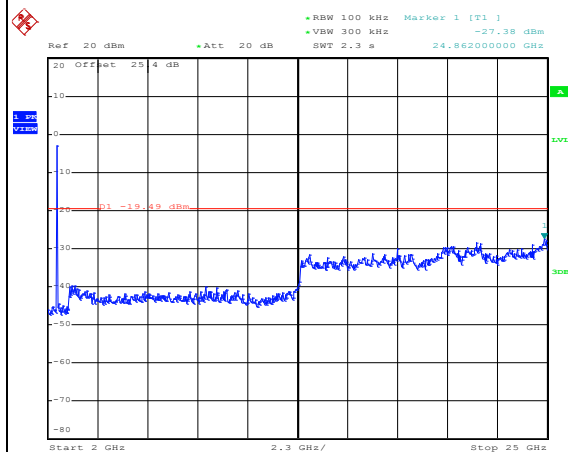


Date: 17.JUN.2014 18:29:17




Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Stuart Lin

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

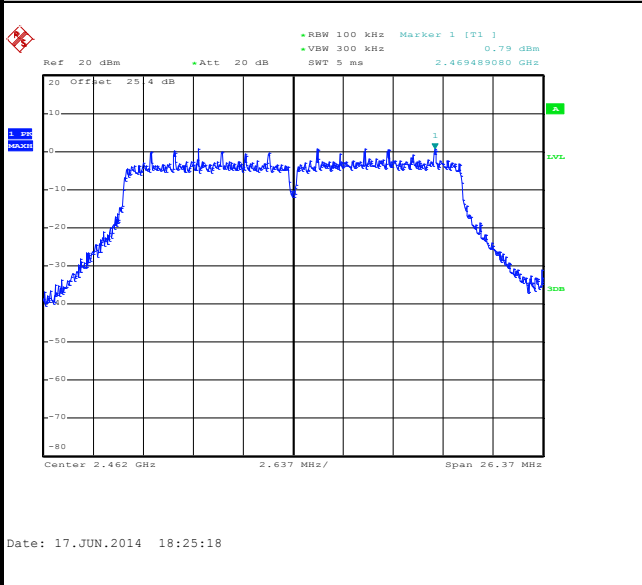


High Channel Plot

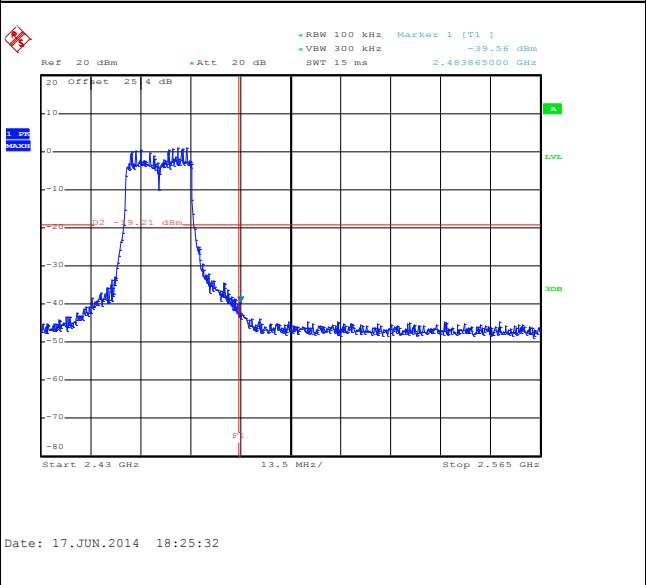

Spurious Emission 30MHz~3GHz

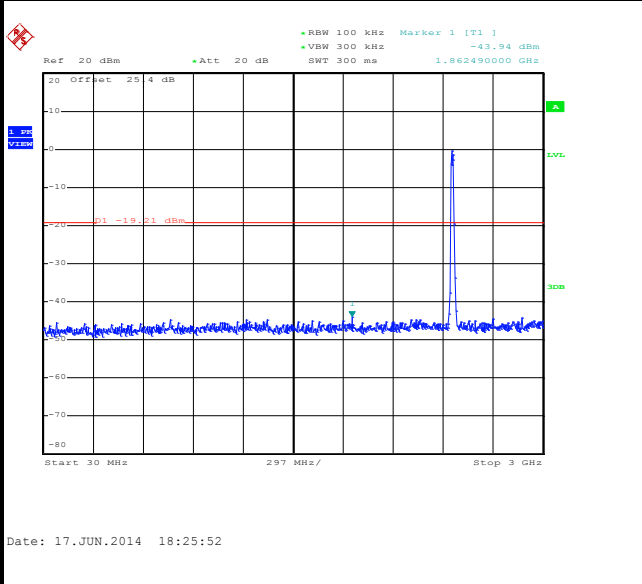

Spurious Emission 2GHz~25GHz

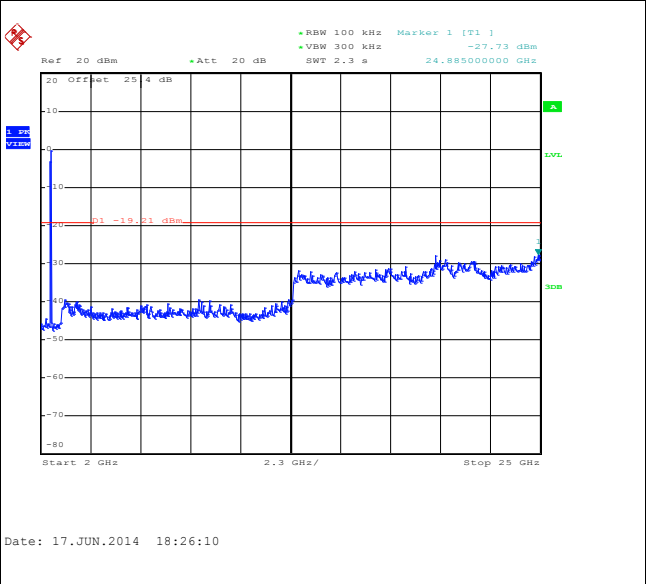



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.


For average measurement:

  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	96.48	1370	0.73	1kHz
2.4GHz 802.11n HT20	96.24	1280	0.78	1kHz

### 3.5.4 Test Setup

For radiated emissions below 30MHz

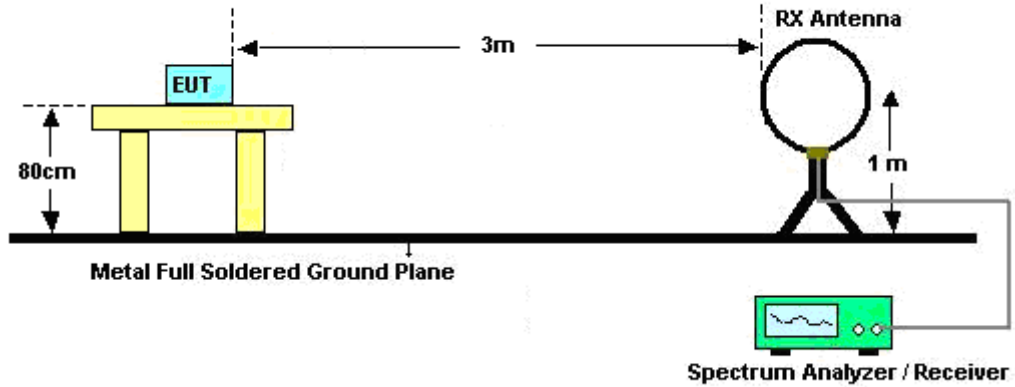


For radiated emissions from 30MHz to 1GHz

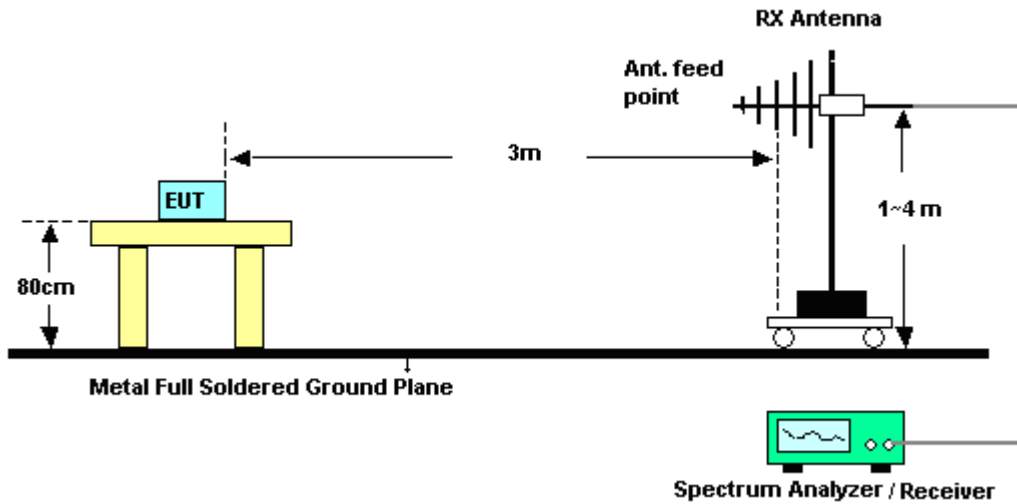



For radiated emissions above 1GHz

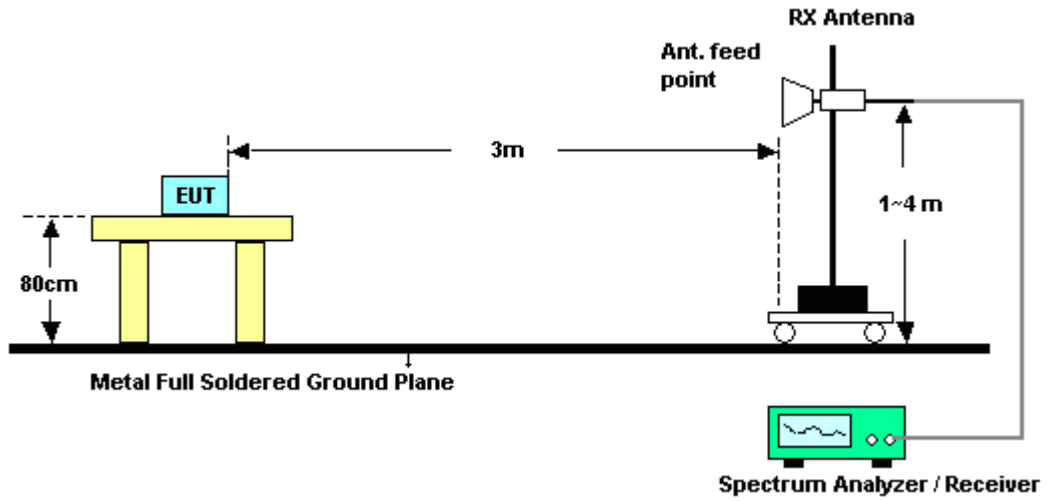

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	22~24°C
Test Band :	Low	Relative Humidity :	47~49%
Test Channel :	01	Test Engineer :	Kyle Jhuang and Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.39	51.27	-22.73	74	53.01	27.19	4.24	33.17	106	11	Peak
2387.13	44.7	-9.3	54	46.46	27.18	4.24	33.18	106	11	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2387.67	46.62	-27.38	74	48.36	27.19	4.24	33.17	100	290	Peak
2387.31	39.55	-14.45	54	41.31	27.18	4.24	33.18	100	290	Average

Test Mode :	802.11b	Temperature :	22~24°C
Test Band :	High	Relative Humidity :	47~49%
Test Channel :	11	Test Engineer :	Kyle Jhuang and Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2486.26	50.81	-23.19	74	52.2	27.46	4.29	33.14	100	318	Peak
2486.38	41.35	-12.65	54	42.74	27.46	4.29	33.14	100	318	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2486.2	47.17	-26.83	74	48.56	27.46	4.29	33.14	130	91	Peak
2486.62	36.78	-17.22	54	38.17	27.46	4.29	33.14	130	91	Average



Test Mode :	802.11g	Temperature :	22~24°C
Test Band :	Low	Relative Humidity :	47~49%
Test Channel :	01	Test Engineer :	Kyle Jhuang and Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.2	62.38	-11.62	74	64.12	27.19	4.24	33.17	101	316	Peak
2389.92	47.61	-6.39	54	49.35	27.19	4.24	33.17	101	316	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.92	41.52	-12.48	54	43.26	27.19	4.24	33.17	106	266	Peak
2389.74	55.41	-18.59	74	57.15	27.19	4.24	33.17	106	266	Average

Test Mode :	802.11g	Temperature :	22~24°C
Test Band :	High	Relative Humidity :	47~49%
Test Channel :	11	Test Engineer :	Kyle Jhuang and Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.98	70.83	-3.17	74	72.22	27.46	4.29	33.14	100	288	Peak
2483.5	47.18	-6.82	54	48.58	27.45	4.29	33.14	100	288	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.92	67.48	-6.52	74	68.88	27.45	4.29	33.14	104	271	Peak
2483.53	44.49	-9.51	54	45.89	27.45	4.29	33.14	104	271	Average



Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Band :	Low	Relative Humidity :	47~49%
Test Channel :	01	Test Engineer :	Kyle Jhuang and Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.47	65.98	-8.02	74	67.72	27.19	4.24	33.17	100	305	Peak
2389.83	47.76	-6.24	54	49.5	27.19	4.24	33.17	100	305	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.84	60.96	-13.04	74	62.7	27.19	4.24	33.17	105	273	Peak
2389.92	43.68	-10.32	54	45.42	27.19	4.24	33.17	105	273	Average

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Band :	High	Relative Humidity :	47~49%
Test Channel :	11	Test Engineer :	Kyle Jhuang and Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.86	71.38	-2.62	74	72.78	27.45	4.29	33.14	100	307	Peak
2483.74	48.13	-5.87	54	49.53	27.45	4.29	33.14	100	307	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.62	66.79	-7.21	74	68.19	27.45	4.29	33.14	129	245	Peak
2483.5	42.95	-11.05	54	44.35	27.45	4.29	33.14	129	245	Average



**3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	99.55	-	-	101.19	27.26	4.26	33.16	106	11	Average
2414	107.18	-	-	108.82	27.26	4.26	33.16	106	11	Peak
4824	42.9	-31.1	74	37.51	31.59	6.23	32.43	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	98.67	-	-	100.31	27.26	4.26	33.16	100	290	Average
2414	103.21	-	-	104.85	27.26	4.26	33.16	100	290	Peak
4824	43.19	-30.81	74	37.8	31.59	6.23	32.43	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2438 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2438	98.22	-	-	99.77	27.33	4.27	33.15	100	305	Average
2438	106.26	-	-	107.81	27.33	4.27	33.15	100	305	Peak
4875	42.91	-31.09	74	37.39	31.65	6.29	32.42	100	0	Peak
7311	49.1	-24.9	74	37.79	36.61	8.42	33.72	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2438 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2438	97.28	-	-	98.83	27.33	4.27	33.15	121	183	Average
2438	103.11	-	-	104.66	27.33	4.27	33.15	121	183	Peak
4875	42.51	-31.49	74	36.99	31.65	6.29	32.42	100	0	Peak
7311	49.21	-24.79	74	37.9	36.61	8.42	33.72	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2463 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2463	98.88	-	-	100.34	27.4	4.28	33.14	100	318	Average
2463	106.3	-	-	107.76	27.4	4.28	33.14	100	318	Peak
4923	44.87	-29.13	74	39.23	31.71	6.34	32.41	100	0	Peak
7386	49.57	-24.43	74	38.23	36.8	8.32	33.78	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2464 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2464	97.24	-	-	98.7	27.4	4.28	33.14	130	91	Average
2464	102.81	-	-	104.27	27.4	4.28	33.14	130	91	Peak
4923	43.58	-30.42	74	37.94	31.71	6.34	32.41	100	0	Peak
7386	49.02	-24.98	74	37.68	36.8	8.32	33.78	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2413 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	95.68	-	-	97.32	27.26	4.26	33.16	101	316	Average
2413	105.34	-	-	106.98	27.26	4.26	33.16	101	316	Peak
4824	42.63	-31.37	74	37.24	31.59	6.23	32.43	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2413 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	91.67	-	-	93.31	27.26	4.26	33.16	106	266	Average
2413	100.38	-	-	102.02	27.26	4.26	33.16	106	266	Peak
4824	42.47	-31.53	74	37.08	31.59	6.23	32.43	100	0	Peak





<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2436 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2436	94.03	-	-	95.6	27.32	4.27	33.16	100	60	Average
2436	103.34	-	-	104.93	27.31	4.26	33.16	100	60	Peak
4875	43.45	-30.55	74	37.93	31.65	6.29	32.42	100	0	Peak
7311	49.29	-24.71	74	37.98	36.61	8.42	33.72	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2435 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2435	92.8	-	-	94.37	27.32	4.27	33.16	104	246	Average
2435	100.87	-	-	102.46	27.31	4.26	33.16	104	246	Peak
4875	42.34	-31.66	74	36.82	31.65	6.29	32.42	100	0	Peak
7311	48.61	-25.39	74	37.3	36.61	8.42	33.72	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2463 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2463	95.83	-	-	97.29	27.4	4.28	33.14	100	288	Average
2463	105.49	-	-	106.93	27.42	4.28	33.14	100	288	Peak
4923	43.68	-30.32	74	38.04	31.71	6.34	32.41	100	0	Peak
7386	49.18	-24.82	74	37.84	36.8	8.32	33.78	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2463 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2463	93.99	-	-	95.45	27.4	4.28	33.14	104	271	Average
2463	102.55	-	-	104	27.41	4.28	33.14	104	271	Peak
4923	42.92	-31.08	74	37.28	31.71	6.34	32.41	100	0	Peak
7386	49.37	-24.63	74	38.03	36.8	8.32	33.78	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	95.67	-	-	97.31	27.26	4.26	33.16	100	305	Average
2414	105.07	-	-	106.69	27.28	4.26	33.16	100	305	Peak
4824	42.1	-31.9	74	36.71	31.59	6.23	32.43	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	92.33	-	-	93.97	27.26	4.26	33.16	105	273	Average
2414	101.12	-	-	102.74	27.28	4.26	33.16	105	273	Peak
4824	43.42	-30.58	74	38.03	31.59	6.23	32.43	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2435 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2435	94.75	-	-	96.32	27.32	4.27	33.16	100	306	Average
2435	103.98	-	-	105.57	27.31	4.26	33.16	100	306	Peak
4875	42.83	-31.17	74	37.31	31.65	6.29	32.42	100	0	Peak
7311	49.49	-24.51	74	38.18	36.61	8.42	33.72	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2435 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2435	90.18	-	-	91.75	27.32	4.27	33.16	129	267	Average
2435	99.25	-	-	100.84	27.31	4.26	33.16	129	267	Peak
4875	43.41	-30.59	74	37.89	31.65	6.29	32.42	100	0	Peak
7311	48.48	-25.52	74	37.17	36.61	8.42	33.72	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2460 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
62.4	23.97	-16.03	40	38.02	13.34	0.65	28.04	100	113	Peak
163.92	24.21	-19.29	43.5	37.86	13.5	1	28.15	-	-	Peak
223.05	25.94	-20.06	46	41.72	11.18	1.2	28.16	-	-	Peak
448.4	22.64	-23.36	46	31.35	17.56	1.77	28.04	-	-	Peak
724.9	26.91	-19.09	46	30.63	21.7	2.23	27.65	-	-	Peak
883.8	29.62	-16.38	46	30.69	23.61	2.51	27.19	-	-	Peak
2460	95.22	-	-	96.7	27.39	4.28	33.15	100	307	Average
2460	102.78	-	-	104.26	27.39	4.28	33.15	100	307	Peak
4923	43.18	-30.82	74	37.54	31.71	6.34	32.41	100	0	Peak
7386	49.55	-24.45	74	38.21	36.8	8.32	33.78	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Kyle Jhuang and Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2461 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.08	35.43	-4.57	40	49.42	13.58	0.42	27.99	100	51	Peak
85.89	20.44	-19.56	40	39.07	8.72	0.75	28.1	-	-	Peak
224.4	21.88	-24.12	46	37.58	11.26	1.2	28.16	-	-	Peak
324.5	24.46	-21.54	46	36.51	14.64	1.47	28.16	-	-	Peak
595.4	25.56	-20.44	46	31.31	20.07	2.04	27.86	-	-	Peak
781.6	27.97	-18.03	46	30.74	22.42	2.33	27.52	-	-	Peak
2461	91.16	-	-	92.62	27.4	4.28	33.14	129	245	Average
2461	99.07	-	-	100.52	27.41	4.28	33.14	129	245	Peak
4923	42.84	-31.16	74	37.2	31.71	6.34	32.41	100	0	Peak
7386	49.06	-24.94	74	37.72	36.8	8.32	33.78	100	0	Peak



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.6.4 Test Setup

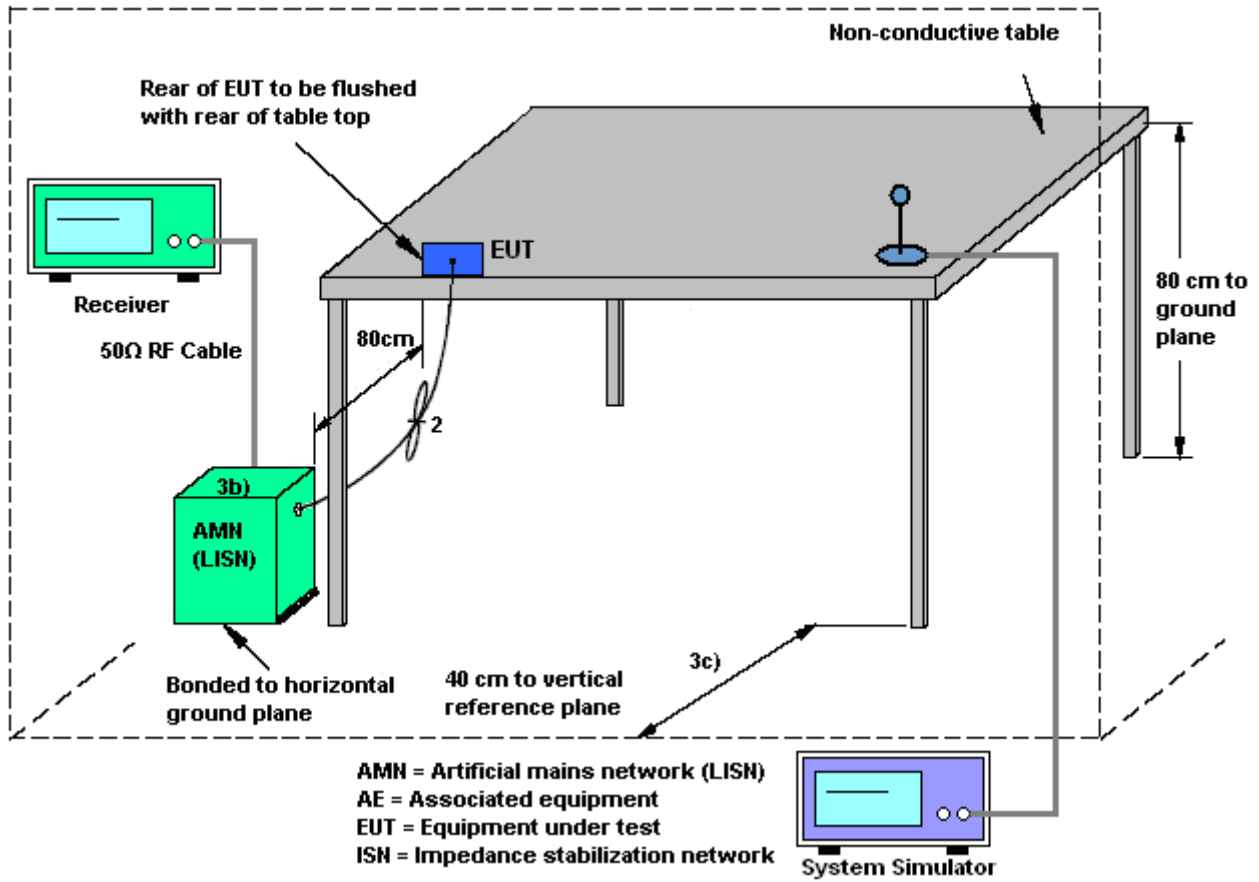



### 3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 13 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + GPS Rx + Earphone 1 + USB Cable 5 (Data Link with Notebook) for Sample 1		

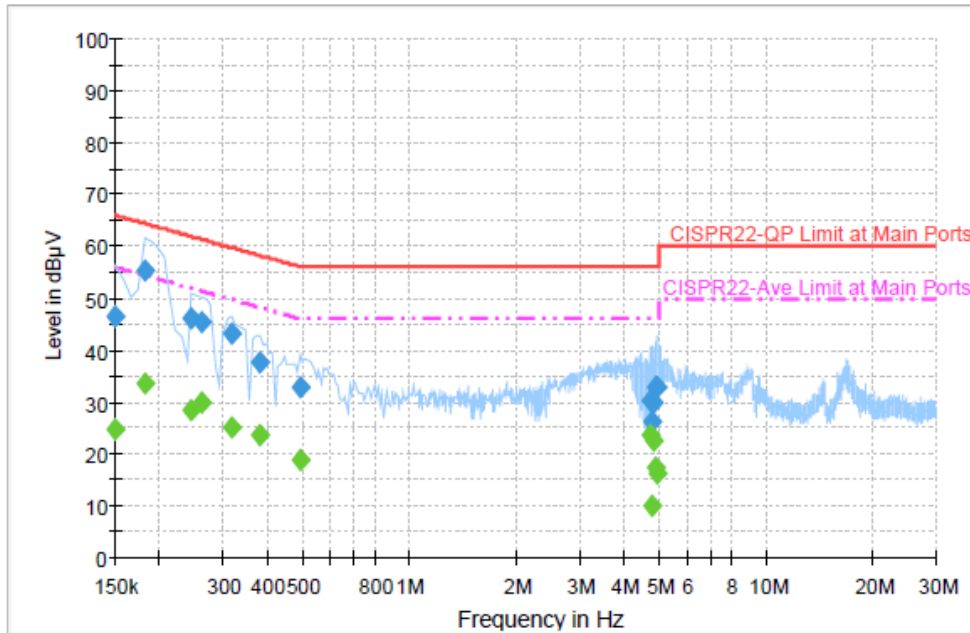


**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.4	Off	L1	19.3	19.6	66.0
0.182000	55.4	Off	L1	19.4	9.0	64.4
0.246000	46.0	Off	L1	19.4	15.9	61.9
0.262000	45.5	Off	L1	19.4	15.9	61.4
0.318000	43.2	Off	L1	19.4	16.6	59.8
0.382000	37.5	Off	L1	19.4	20.7	58.2
0.494000	33.0	Off	L1	19.4	23.1	56.1
4.718000	30.3	Off	L1	19.6	25.7	56.0
4.774000	26.2	Off	L1	19.6	29.8	56.0
4.854000	29.8	Off	L1	19.6	26.2	56.0
4.918000	32.9	Off	L1	19.6	23.1	56.0
4.974000	33.0	Off	L1	19.7	23.0	56.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 13 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + GPS Rx + Earphone 1 + USB Cable 5 (Data Link with Notebook) for Sample 1		

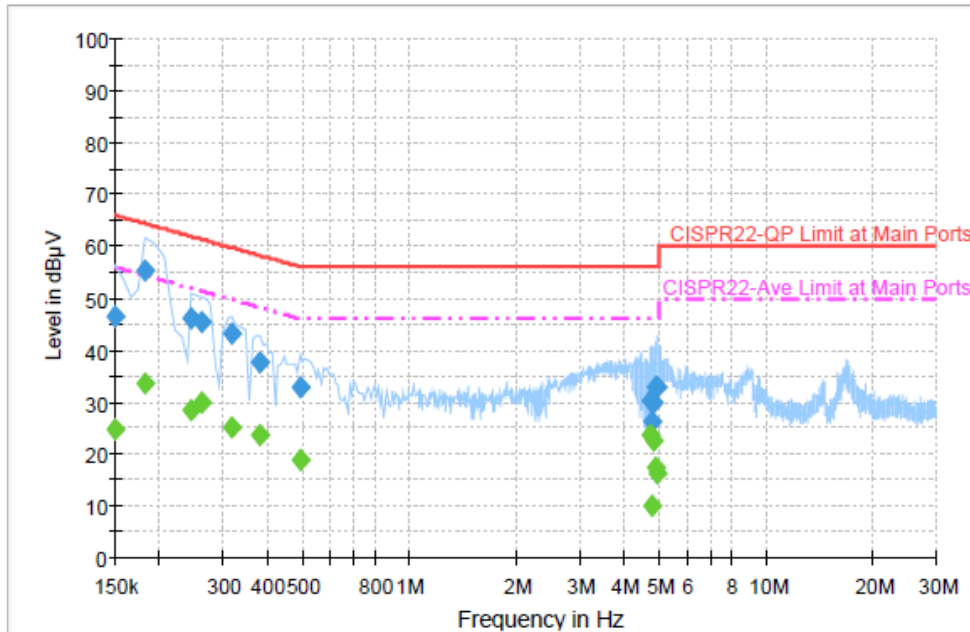


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	24.9	Off	L1	19.3	31.1	56.0
0.182000	33.6	Off	L1	19.4	20.8	54.4
0.246000	28.4	Off	L1	19.4	23.5	51.9
0.262000	29.9	Off	L1	19.4	21.5	51.4
0.318000	24.9	Off	L1	19.4	24.9	49.8
0.382000	23.7	Off	L1	19.4	24.5	48.2
0.494000	19.0	Off	L1	19.4	27.1	46.1
4.718000	23.7	Off	L1	19.6	22.3	46.0
4.774000	9.9	Off	L1	19.6	36.1	46.0
4.854000	22.5	Off	L1	19.6	23.5	46.0
4.918000	17.3	Off	L1	19.6	28.7	46.0
4.974000	16.1	Off	L1	19.7	29.9	46.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 13 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + GPS Rx + Earphone 1 + USB Cable 5 (Data Link with Notebook) for Sample 1		

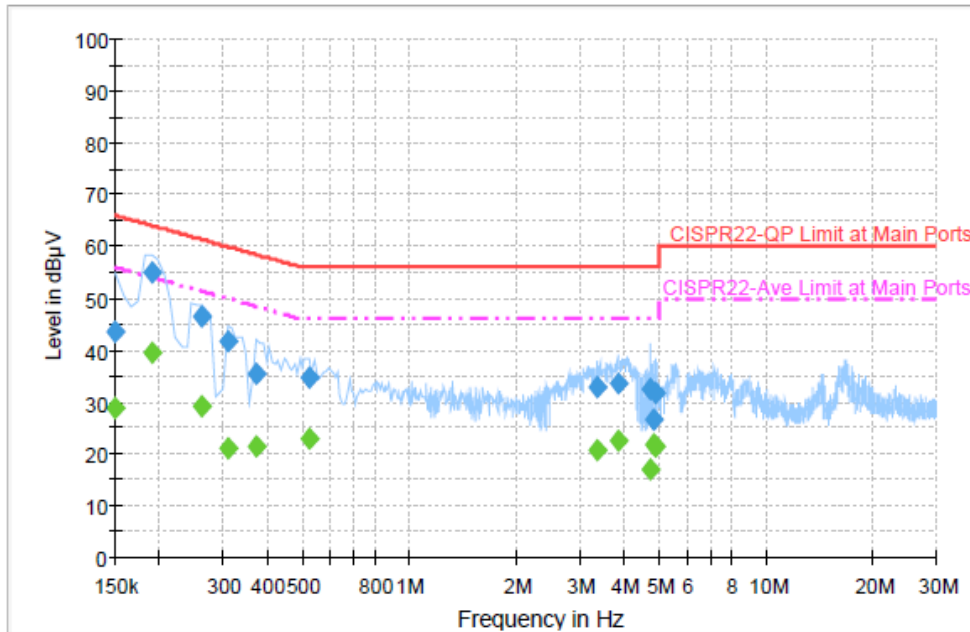


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.6	Off	N	19.4	22.4	66.0
0.190000	55.1	Off	N	19.3	8.9	64.0
0.262000	46.6	Off	N	19.4	14.8	61.4
0.310000	41.7	Off	N	19.4	18.3	60.0
0.374000	35.4	Off	N	19.4	23.0	58.4
0.526000	34.5	Off	N	19.4	21.5	56.0
3.350000	32.9	Off	N	19.6	23.1	56.0
3.838000	33.4	Off	N	19.6	22.6	56.0
4.742000	32.4	Off	N	19.6	23.6	56.0
4.862000	26.5	Off	N	19.6	29.5	56.0
4.918000	31.9	Off	N	19.6	24.1	56.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 13 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + GPS Rx + Earphone 1 + USB Cable 5 (Data Link with Notebook) for Sample 1		

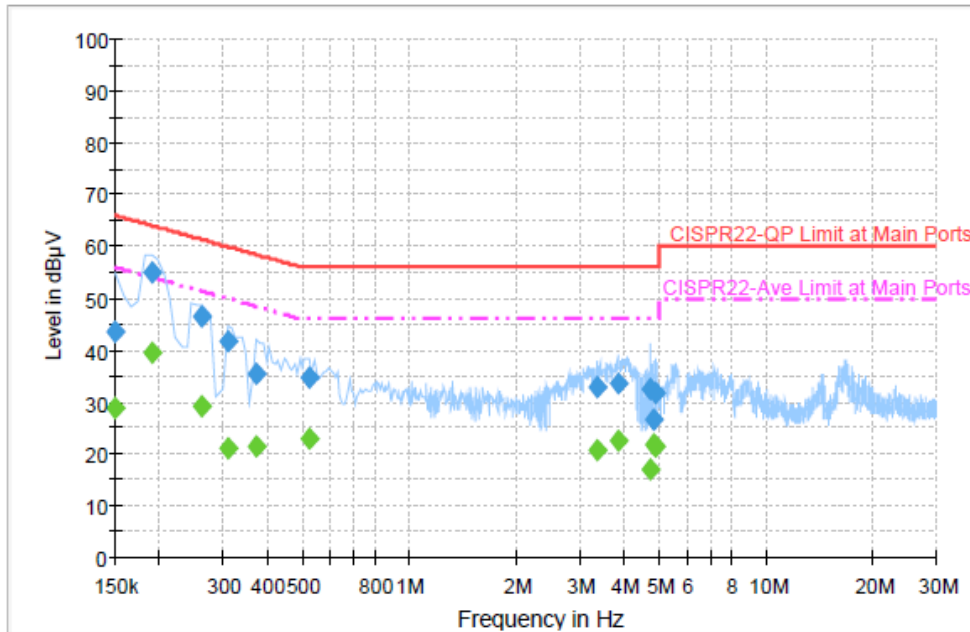

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	28.6	Off	N	19.4	27.4	56.0
0.190000	39.5	Off	N	19.3	14.5	54.0
0.262000	29.0	Off	N	19.4	22.4	51.4
0.310000	21.2	Off	N	19.4	28.8	50.0
0.374000	21.3	Off	N	19.4	27.1	48.4
0.526000	23.0	Off	N	19.4	23.0	46.0
3.350000	20.8	Off	N	19.6	25.2	46.0
3.838000	22.5	Off	N	19.6	23.5	46.0
4.742000	16.8	Off	N	19.6	29.2	46.0
4.862000	21.7	Off	N	19.6	24.3	46.0
4.918000	21.2	Off	N	19.6	24.8	46.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Jun. 10, 2014~ Jun. 17, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 17, 2013	Jun. 10, 2014~ Jun. 17, 2014	Aug. 16, 2014	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 17, 2013	Jun. 10, 2014~ Jun. 17, 2014	Aug. 16, 2014	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Sep. 06, 2013	Jul. 02, 2014~ Jul. 04, 2014	Sep. 05, 2014	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Jul. 02, 2014~ Jul. 04, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Loop Antenna	TESEQ	HLA6120	31244	9 kHz~30 MHz	Dec. 03, 2012	Jul. 02, 2014~ Jul. 04, 2014	Dec. 02, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30 MHz ~ 1 GHz	Oct. 10, 2013	Jul. 02, 2014~ Jul. 04, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1 GHz~18 GHz	Aug. 22, 2013	Jul. 02, 2014~ Jul. 04, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15 GHz- 40 GHz	Oct. 03, 2013	Jul. 02, 2014~ Jul. 04, 2014	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Jul. 02, 2014~ Jul. 04, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Jul. 02, 2014~ Jul. 04, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 G High	Jul. 09, 2013	Jul. 02, 2014~ Jul. 04, 2014	Jul. 08, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jul. 02, 2014~ Jul. 04, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Jul. 02, 2014~ Jul. 04, 2014	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	Jul .03, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Jul .03, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Jul .03, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul .03, 2014	N/A	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------