



FCC TEST REPORT (PART 27)

REPORT NO.: RF150324C18-2
MODEL NAME: 0PM9200
FCC ID: NM80PM9200
RECEIVED: Mar. 24, 2015
TESTED: Apr. 19, 2015 ~ Jun. 04, 2015
ISSUED: Jun. 04, 2015

APPLICANT: HTC Corporation

ADDRESS: 1F, 6-3 Baoqiang Road, Xindian District, New Taipei City, Taiwan 231

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS.....	5
2.1 MEASUREMENT UNCERTAINTY	6
2.2 TEST SITE AND INSTRUMENTS	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST.....	10
3.3 DESCRIPTION OF SUPPORT UNITS.....	10
3.4 DESCRIPTION OF TEST MODES.....	11
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	14
4 TEST TYPES AND RESULTS.....	15
4.1 OUTPUT POWER MEASUREMENT	15
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	15
4.1.2 TEST PROCEDURES.....	15
4.1.3 TEST SETUP	16
4.1.4 TEST RESULTS	17
4.2 FREQUENCY STABILITY MEASUREMENT	29
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	29
4.2.2 TEST PROCEDURE	29
4.2.3 TEST SETUP	29
4.2.4 TEST RESULTS	30
4.3 OCCUPIED BANDWIDTH MEASUREMENT.....	32
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT.....	32
4.3.2 TEST SETUP	32
4.3.3 TEST PROCEDURES.....	32
4.3.4 TEST RESULTS	33
4.4 PEAK TO AVERAGE RATIO.....	38
4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	38
4.4.2 TEST SETUP	38
4.4.3 TEST PROCEDURES.....	38
4.4.4 TEST RESULTS	39
4.5 BAND EDGE MEASUREMENT	44
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	44
4.5.2 TEST SETUP	44
4.5.3 TEST PROCEDURES.....	45
4.5.4 TEST RESULTS	46
4.6 CONDUCTED SPURIOUS EMISSIONS.....	56
4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT.....	56
4.6.2 TEST PROCEDURE	56
4.6.3 TEST SETUP	56
4.6.4 TEST RESULTS	57
4.7 RADIATED EMISSION MEASUREMENT	59
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT	59
4.7.2 TEST PROCEDURES.....	59
4.7.3 DEVIATION FROM TEST STANDARD	59
4.7.4 TEST SETUP	60
4.7.5 TEST RESULTS	61
5 INFORMATION ON THE TESTING LABORATORIES	65
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	66



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF150324C18-2	Original release	Jun. 04, 2015



1 CERTIFICATION

PRODUCT: Smartphone
MODEL: OPM9200
BRAND: HTC
APPLICANT: HTC Corporation
TESTED: Apr. 19, 2015 ~ Jun. 04, 2015
TEST SAMPLE: Production Unit
TEST STANDARDS: **FCC Part 27, Subpart C, L**
FCC Part 2

The above equipment (model: OPM9200) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE:** Jun. 04, 2015
Ivonne Wu / Supervisor

APPROVED BY : Sam Chen , **DATE:** Jun. 04, 2015
Sam Chen / Senior Project Engineer

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

LTE Band 4			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(d)(4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	PASS	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -34.63dB at 48.09MHz.

LTE BAND 12			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(C)(10)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	PASS	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -19.67dB at 1415.00MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2015	Jan. 21, 2016
Spectrum Analyzer Agilent	N9010A	MY52220314	Sep. 03, 2014	Sep. 02, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 10, 2014	Dec. 09, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 04, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 09, 2015	Feb. 09, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Feb. 04, 2015	Feb. 04, 2016
Preamplifier EMCI	EMC 012645	980115	Dec. 12, 2014	Dec. 11, 2015
Preamplifier EMCI	EMC 184045	980116	Jan. 09, 2015	Jan. 08, 2016
Preamplifier EMCI	EMC 330H	980112	Dec. 27, 2014	Dec. 26, 2015
Power Meter Anritsu	ML2495A	1232002	Sep. 17, 2014	Sep. 16, 2015
Power Sensor Anritsu	MA2411B	1207325	Sep. 17, 2014	Sep. 16, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2014	Oct. 17, 2015
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Nov. 07, 2014	Nov. 06, 2015
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 01, 2013	Jul. 31, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 690701.
 5. The IC Site Registration No. is IC 7450F-10.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Smartphone		
MODEL NAME	0PM9200		
POWER SUPPLY	5Vdc (adapter or host equipment) 3.85Vdc or 3.8Vdc (battery)		
MODULATION TECHNOLOGY	LTE Band 4	QPSK, 16QAM	
	LTE Band 12	QPSK, 16QAM	
FREQUENCY RANGE	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~1754.3MHz	
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~1753.5MHz	
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~1752.5MHz	
	LTE Band 4 Channel Bandwidth: 10MHz	1715.0MHz ~1750.0MHz	
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~1747.5MHz	
	LTE Band 4 Channel Bandwidth: 20MHz	1720.0MHz ~1745.0MHz	
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz	
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz	
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz	
	LTE Band 12 Channel Bandwidth: 10MHz	704.0MHz ~ 711.0MHz	
	EMISSION DESIGNATOR	LTE Band 4 Channel Bandwidth: 1.4MHz	1M09G7D
		LTE Band 4 Channel Bandwidth: 3MHz	2M70W7D
LTE Band 4 Channel Bandwidth: 5MHz		4M50G7D	
LTE Band 4 Channel Bandwidth: 10MHz		8M97G7D	
LTE Band 4 Channel Bandwidth: 15MHz		13M5G7D	
LTE Band 4 Channel Bandwidth: 20MHz		18M0W7D	
LTE Band 12 Channel Bandwidth: 1.4MHz		1M09G7D	
LTE Band 12 Channel Bandwidth: 3MHz		2M70W7D	
LTE Band 12 Channel Bandwidth: 5MHz		4M50G7D	
LTE Band 12 Channel Bandwidth: 10MHz		8M97W7D	




A D T

MAX. ERP POWER	LTE Band 12 Channel Bandwidth: 1.4MHz	60.55mW
	LTE Band 12 Channel Bandwidth: 3MHz	60.69mW
	LTE Band 12 Channel Bandwidth: 5MHz	63.52mW
	LTE Band 12 Channel Bandwidth: 10MHz	67.13mW
MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 1.4MHz	156.57mW
	LTE Band 4 Channel Bandwidth: 3MHz	170.61mW
	LTE Band 4 Channel Bandwidth: 5MHz	171.99mW
	LTE Band 4 Channel Bandwidth: 10MHz	175.39mW
	LTE Band 4 Channel Bandwidth: 15MHz	163.12mW
	LTE Band 4 Channel Bandwidth: 20MHz	169.63mW
ANTENNA TYPE	Fixed Internal Antenna	
DATA CABLE	Refer to Note as below	
I/O PORTS	Refer to users' manual	
ACCESSORY DEVICES	Refer to Note as below	


NOTE:

1. There're 2 configurations for the EUT listed as below.
Main sample (A): Phone + Battery 1 + LCD Panel 1
2nd sample (B): Phone + Battery 2 + LCD Panel 2
✧ Only the worst test data was presented in the report.
2. The EUT's accessories list refers to Ext. Pho.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

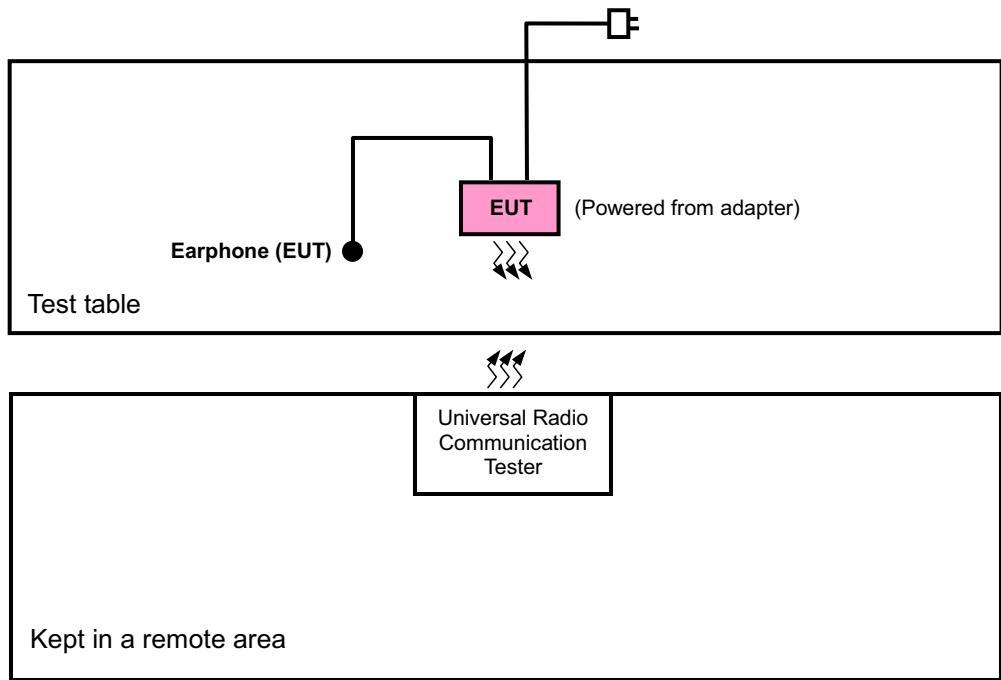

FOR E.R.P. / E.I.R.P. TEST

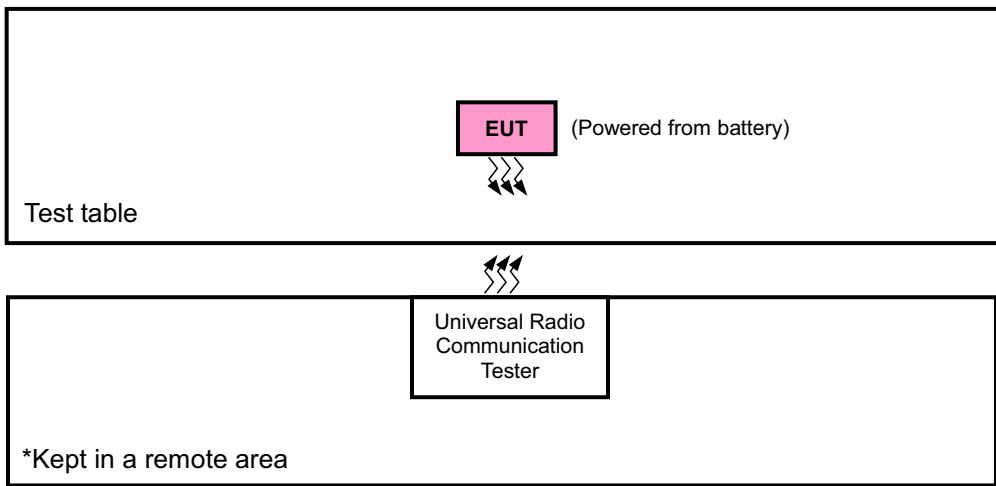

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found as the list below. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	Main sample
B	2 nd sample

EUT CONFIGURE MODE	ERP / EIRP	RADIATED EMISSION
A	X-plane (LTE 4) Y-plane (LTE 12)	Z-axis (LTE 4) X-axis (LTE 12)
B	X-plane (LTE 4) Y-plane (LTE 12)	-

LTE Band 4

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
B	EIRP	20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	FREQUENCY STABILITY	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset



A D T

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
A	PEAK TO AVERAGE RATIO	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 2 RB Offset		
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 7 RB Offset		
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	12 RB / 0 RB Offset		
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset		
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	36 RB / 0 RB Offset		
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
A	BAND EDGE	19957 to 20393	19957	1.4MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			20393	1.4MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		19965 to 20385	19965	3MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			20385	3MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		19975 to 20375	19975	5MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			20375	5MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			20350	10MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		20025 to 20325	20025	15MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			20325	15MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		20050 to 20300	20050	20MHz	QPSK	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			20300	20MHz	QPSK	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		A	CONDUCTED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 2 RB Offset
				19965 to 20385	20175	3MHz	QPSK	1 RB / 7 RB Offset
				19975 to 20375	20175	5MHz	QPSK	12 RB / 0 RB Offset
				20000 to 20350	20175	10MHz	QPSK	50 RB / 0 RB Offset
				20025 to 20325	20175	15MHz	QPSK	36 RB / 0 RB Offset
				20050 to 20300	20175	20MHz	QPSK	50 RB / 0 RB Offset
A	RADIATED EMISSION	20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 12

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
A	ERP	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK, 16QAM	1 RB / 2 RB Offset		
		23025 to 23165	23025, 23095, 23165	3MHz	QPSK, 16QAM	1 RB / 7 RB Offset		
		23035 to 23155	23035, 23095, 23155	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset		
		23060 to 23130	23060, 23095, 23130	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset		
B	ERP	23060 to 23130	23060, 23095, 23130	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset		
A	FREQUENCY STABILITY	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 2 RB Offset		
		23025 to 23165	23095	3MHz	QPSK	1 RB / 7 RB Offset		
		23035 to 23155	23095	5MHz	QPSK	1 RB / 12 RB Offset		
		23060 to 23130	23095	10MHz	QPSK	1 RB / 24 RB Offset		
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		23025 to 23165	23025, 23095, 23165	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		23035 to 23155	23035, 23095, 23155	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		23060 to 23130	23060, 23095, 23130	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
A	PEAK TO AVERAGE RATIO	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23025 to 23165	23025, 23095, 23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23035 to 23155	23035, 23095, 23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095, 23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			23173	1.4MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		23025 to 23165	23025	3MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			23165	3MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		23035 to 23155	23035	5MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			23155	5MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		23060 to 23130	23060	10MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			23130	10MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		A	CONDUCTED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset
				23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset
				23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset
				23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23060 to 23130	23095	10MHz	QPSK	1 RB / 24 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP/EIRP	26deg. C, 58%RH	3.8Vdc	Hwa Chiang
FREQUENCY STABILITY	26deg. C, 58%RH	3.8Vdc	Taylor Liu
OCCUPIED BANDWIDTH	26deg. C, 58%RH	3.8Vdc	Taylor Liu
PEAK TO AVERAGE RATIO	26deg. C, 58%RH	3.8Vdc	Taylor Liu
BAND EDGE	26deg. C, 58%RH	3.8Vdc	Taylor Liu
CONDUCTED EMISSION	26deg. C, 58%RH	3.8Vdc	Taylor Liu
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Hwa Chiang / Charles Hsiao

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 704-716 MHz band are limited to 3 watts ERP

4.1.2 TEST PROCEDURES

EIRP MEASUREMENT:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for CDMA & WCDMA, and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

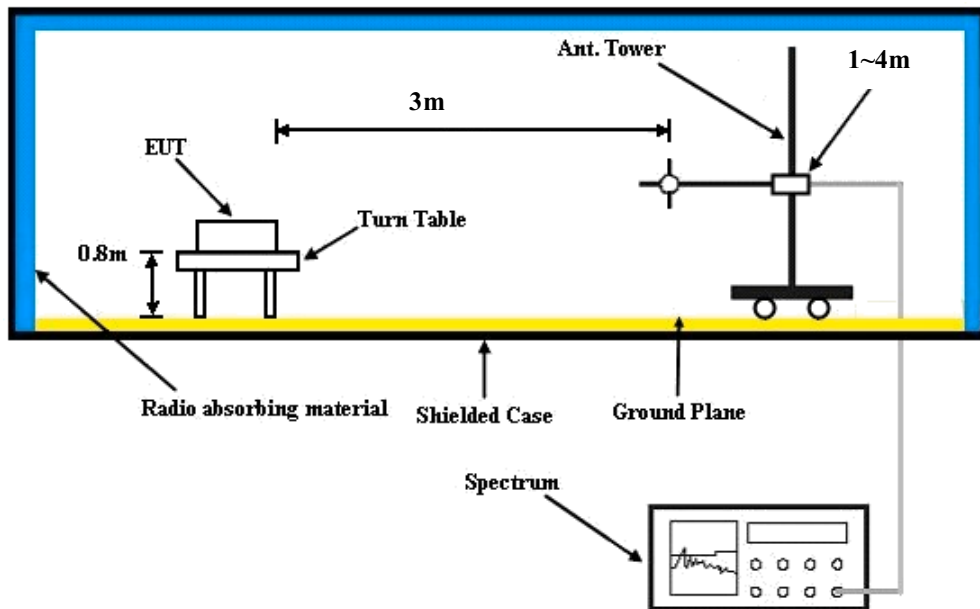

CONDUCTED POWER MEASUREMENT:



4.1.4 TEST RESULTS

Average Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23017	Mid CH 23095	High CH 23173		Low CH 23017	Mid CH 23095	High CH 23173	
			699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz	
12 / 1.4M	1	0	22.10	21.85	22.01	0	21.08	20.83	20.99	1
	1	2	22.40	22.19	22.35	0	21.42	21.17	21.33	1
	1	5	22.06	21.81	21.97	0	21.04	20.79	20.95	1
	3	0	22.06	21.81	21.97	0	21.04	20.79	20.95	1
	3	1	22.08	21.83	21.99	0	21.06	20.81	20.97	1
	3	3	21.94	21.69	21.85	0	20.92	20.67	20.83	1
	6	0	21.18	20.93	21.09	1	20.16	19.91	20.07	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23025	Mid CH 23095	High CH 23165		Low CH 23025	Mid CH 23095	High CH 23165	
			700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz	
12 / 3M	1	0	22.19	21.94	22.10	0	21.17	20.92	21.08	1
	1	7	22.43	22.28	22.34	0	21.51	21.26	21.42	1
	1	14	22.15	21.90	22.06	0	21.13	20.88	21.04	1
	8	0	21.35	21.10	21.26	1	20.33	20.08	20.24	2
	8	3	21.37	21.12	21.28	1	20.35	20.10	20.26	2
	8	7	21.23	20.98	21.14	1	20.21	19.96	20.12	2
	15	0	21.27	21.02	21.18	1	20.25	20.00	20.16	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23035	Mid CH 23095	High CH 23155		Low CH 23035	Mid CH 23095	High CH 23155	
			701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz	
12 / 5M	1	0	22.24	21.99	22.15	0	21.22	20.97	21.13	1
	1	12	22.48	22.33	22.47	0	21.56	21.31	21.47	1
	1	24	22.20	21.95	22.11	0	21.18	20.93	21.09	1
	12	0	21.40	21.15	21.31	1	20.38	20.13	20.29	2
	12	6	21.42	21.17	21.33	1	20.40	20.15	20.31	2
	12	13	21.28	21.03	21.19	1	20.26	20.01	20.17	2
	25	0	21.32	21.07	21.23	1	20.30	20.05	20.21	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23060	Mid CH 23095	High CH 23130		Low CH 23060	Mid CH 23095	High CH 23130	
			704.0 MHz	707.5 MHz	711.0 MHz		704.0 MHz	707.5 MHz	711.0 MHz	
12 / 10M	1	0	22.32	22.07	22.23	0	21.30	21.05	21.21	1
	1	24	22.50	22.41	22.49	0	21.64	21.39	21.55	1
	1	49	22.28	22.03	22.19	0	21.26	21.01	21.17	1
	25	0	21.48	21.23	21.39	1	20.46	20.21	20.37	2
	25	12	21.50	21.25	21.41	1	20.48	20.23	20.39	2
	25	25	21.36	21.11	21.27	1	20.34	20.09	20.25	2
	50	0	21.40	21.15	21.31	1	20.38	20.13	20.29	2



A D T

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 19957	Mid CH 20175	High CH 20393		Low CH 19957	Mid CH 20175	High CH 20393	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	21.80	21.68	21.66	0	20.79	20.67	20.65	1
	1	2	21.75	21.63	21.61	0	20.74	20.62	20.60	1
	1	5	21.45	21.33	21.31	0	20.44	20.32	20.30	1
	3	0	21.02	20.90	20.88	0	20.01	19.89	19.87	1
	3	1	20.81	20.69	20.67	0	19.80	19.68	19.66	1
	3	3	20.64	20.52	20.50	0	19.63	19.51	19.49	1
	6	0	20.76	20.64	20.62	1	19.75	19.63	19.61	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 19965	Mid CH 20175	High CH 20385		Low CH 19965	Mid CH 20175	High CH 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	21.91	21.79	21.77	0	20.90	20.78	20.76	1
	1	7	21.86	21.74	21.72	0	20.85	20.73	20.71	1
	1	14	21.56	21.44	21.42	0	20.55	20.43	20.41	1
	8	0	21.05	20.93	20.91	1	20.04	19.92	19.90	2
	8	3	20.84	20.72	20.70	1	19.83	19.71	19.69	2
	8	7	20.67	20.55	20.53	1	19.66	19.54	19.52	2
	15	0	20.87	20.75	20.73	1	19.86	19.74	19.72	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 19975	Mid CH 20175	High CH 20375		Low CH 19975	Mid CH 20175	High CH 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	22.01	21.89	21.87	0	21.00	20.88	20.86	1
	1	12	21.96	21.84	21.82	0	20.95	20.83	20.81	1
	1	24	21.66	21.54	21.52	0	20.65	20.53	20.51	1
	12	0	21.15	21.03	21.01	1	20.14	20.02	20.00	2
	12	6	20.94	20.82	20.80	1	19.93	19.81	19.79	2
	12	13	20.77	20.65	20.63	1	19.76	19.64	19.62	2
	25	0	20.97	20.85	20.83	1	19.96	19.84	19.82	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20000	Mid CH 20175	High CH 20350		Low CH 20000	Mid CH 20175	High CH 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	22.08	21.96	21.94	0	21.07	20.95	20.93	1
	1	24	22.03	21.91	21.89	0	21.02	20.90	20.88	1
	1	49	21.73	21.61	21.59	0	20.72	20.60	20.58	1
	25	0	21.22	21.10	21.08	1	20.21	20.09	20.07	2
	25	12	21.01	20.89	20.87	1	20.00	19.88	19.86	2
	25	25	20.84	20.72	20.70	1	19.83	19.71	19.69	2
	50	0	21.04	20.92	20.90	1	20.03	19.91	19.89	2



Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20025	Mid CH 20175	High CH 20325		Low CH 20025	Mid CH 20175	High CH 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	22.16	22.04	22.02	0	21.15	21.03	21.01	1
	1	37	22.11	21.99	21.97	0	21.10	20.98	20.96	1
	1	74	21.81	21.69	21.67	0	20.80	20.68	20.66	1
	36	0	21.30	21.18	21.16	1	20.29	20.17	20.15	2
	36	19	21.09	20.97	20.95	1	20.08	19.96	19.94	2
	36	39	20.92	20.80	20.78	1	19.91	19.79	19.77	2
	75	0	21.12	21.00	20.98	1	20.11	19.99	19.97	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20050	Mid CH 20175	High CH 20300		Low CH 20050	Mid CH 20175	High CH 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	22.21	22.09	22.07	0	21.20	21.08	21.06	1
	1	50	22.16	22.04	22.02	0	21.15	21.03	21.01	1
	1	99	21.86	21.74	21.72	0	20.85	20.73	20.71	1
	50	0	21.35	21.23	21.21	1	20.34	20.22	20.20	2
	50	25	21.14	21.02	21.00	1	20.13	20.01	19.99	2
	50	50	20.97	20.85	20.83	1	19.96	19.84	19.82	2
	100	0	21.17	21.05	21.03	1	20.16	20.04	20.02	2



AVERAGE ERP (dBm)

MODE A

LTE Band 12							
Channel Bandwidth: 1.4MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23017	699.7	-13.19	32.719	17.38	54.69	H
	23095	707.5	-12.91	32.736	17.68	58.56	
	23173	715.3	-12.62	32.591	17.82	60.55	
	23017	699.7	-17.72	32.69	12.82	19.14	V
	23095	707.5	-18.18	32.81	12.48	17.70	
	23173	715.3	-18.02	32.74	12.57	18.07	

LTE Band 12							
Channel Bandwidth: 1.4MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23017	699.7	-14.25	32.719	16.32	42.84	H
	23095	707.5	-14.24	32.736	16.35	43.11	
	23173	715.3	-13.89	32.591	16.55	45.20	
	23017	699.7	-18.99	32.69	11.55	14.29	V
	23095	707.5	-19.18	32.81	11.48	14.06	
	23173	715.3	-19.13	32.74	11.46	14.00	

LTE Band 12							
Channel Bandwidth: 3MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23025	700.5	-12.75	32.719	17.82	60.52	H
	23095	707.5	-12.77	32.736	17.82	60.48	
	23165	714.5	-12.61	32.591	17.83	60.69	
	23025	700.5	-17.75	32.69	12.79	19.01	V
	23095	707.5	-18.11	32.81	12.55	17.99	
	23165	714.5	-17.94	32.74	12.65	18.41	



A D T

LTE Band 12							
Channel Bandwidth: 3MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23025	700.5	-13.44	32.719	17.13	51.63	H
	23095	707.5	-14.08	32.736	16.51	44.73	
	23165	714.5	-13.44	32.591	17.00	50.13	
	23025	700.5	-19.00	32.69	11.54	14.26	V
	23095	707.5	-18.59	32.81	12.07	16.11	
	23165	714.5	-19.29	32.74	11.30	13.49	

LTE Band 12							
Channel Bandwidth: 5MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23035	701.5	-12.54	32.719	18.03	63.52	H
	23095	707.5	-12.70	32.736	17.89	61.46	
	23155	713.5	-12.59	32.591	17.85	60.97	
	23035	701.5	-17.98	32.69	12.56	18.03	V
	23095	707.5	-17.80	32.81	12.86	19.32	
	23155	713.5	-17.75	32.74	12.84	19.23	

LTE Band 12							
Channel Bandwidth: 5MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23035	701.5	-13.42	32.719	17.15	51.87	H
	23095	707.5	-14.11	32.736	16.48	44.42	
	23155	713.5	-13.44	32.591	17.00	50.13	
	23035	701.5	-18.83	32.69	11.71	14.83	V
	23095	707.5	-19.16	32.81	11.50	14.13	
	23155	713.5	-18.56	32.74	12.03	15.96	



A D T

LTE Band 12							
Channel Bandwidth: 10MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23060	704.0	-12.43	32.727	18.15	65.27	H
	23095	707.5	-12.83	32.739	17.76	59.69	
	23130	711.0	-12.55	32.728	18.03	63.50	
	23060	704.0	-17.87	32.75	12.73	18.75	V
	23095	707.5	-17.75	32.81	12.91	19.54	
	23130	711.0	-18.25	32.84	12.44	17.54	

LTE Band 12							
Channel Bandwidth: 10MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23060	704.0	-13.59	32.727	16.99	49.97	H
	23095	707.5	-13.72	32.739	16.87	48.63	
	23130	711.0	-13.71	32.728	16.87	48.62	
	23060	704.0	-18.92	32.75	11.68	14.72	V
	23095	707.5	-19.14	32.81	11.52	14.19	
	23130	711.0	-18.19	32.84	12.50	17.78	



MODE B

LTE Band 12							
Channel Bandwidth: 10MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23060	704.0	-12.67	32.727	17.91	61.76	H
	23095	707.5	-12.32	32.739	18.27	67.13	
	23130	711.0	-12.98	32.728	17.60	57.52	
	23060	704.0	-17.64	32.75	12.96	19.77	V
	23095	707.5	-17.52	32.81	13.14	20.61	
	23130	711.0	-17.90	32.84	12.79	19.01	

LTE Band 12							
Channel Bandwidth: 10MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
Y	23060	704.0	-13.31	32.727	17.27	53.30	H
	23095	707.5	-13.43	32.739	17.16	51.99	
	23130	711.0	-13.81	32.728	16.77	47.51	
	23060	704.0	-18.86	32.75	11.74	14.93	V
	23095	707.5	-18.86	32.81	11.80	15.14	
	23130	711.0	-18.68	32.84	12.01	15.89	



AVERAGE EIRP (dBm)

MODE A

LTE Band 4							
Channel Bandwidth: 1.4MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	19957	1710.7	-21.03	42.49	21.46	139.80	H
	20175	1732.5	-20.38	42.33	21.95	156.57	
	20393	1754.3	-20.33	42.10	21.77	150.31	
	19957	1710.7	-29.62	42.99	13.37	21.73	V
	20175	1732.5	-29.42	42.74	13.32	21.48	
	20393	1754.3	-28.45	42.21	13.76	23.77	

LTE Band 4							
Channel Bandwidth: 1.4MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	19957	1710.7	-21.93	42.49	20.56	113.63	H
	20175	1732.5	-21.93	42.33	20.40	109.57	
	20393	1754.3	-21.73	42.10	20.37	108.89	
	19957	1710.7	-30.14	42.99	12.85	19.28	V
	20175	1732.5	-29.87	42.74	12.87	19.36	
	20393	1754.3	-29.27	42.21	12.94	19.68	

LTE Band 4							
Channel Bandwidth: 3MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	19965	1711.5	-20.46	42.49	22.03	159.40	H
	20175	1732.5	-20.10	42.33	22.23	166.99	
	20385	1753.5	-19.78	42.10	22.32	170.61	
	19965	1711.5	-29.07	42.99	13.92	24.66	V
	20175	1732.5	-29.13	42.74	13.61	22.96	
	20385	1753.5	-28.77	42.21	13.44	22.08	



A D T

LTE Band 4							
Channel Bandwidth: 3MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	19965	1711.5	-22.07	42.49	20.42	110.03	H
	20175	1732.5	-21.99	42.33	20.34	108.07	
	20385	1753.5	-21.67	42.10	20.43	110.41	
	19965	1711.5	-30.61	42.99	12.38	17.30	V
	20175	1732.5	-30.23	42.74	12.51	17.82	
	20385	1753.5	-30.02	42.21	12.19	16.56	

LTE Band 4							
Channel Bandwidth: 5MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	19975	1712.5	-20.13	42.49	22.36	171.99	H
	20175	1732.5	-20.09	42.33	22.24	167.38	
	20375	1752.5	-20.54	42.10	21.56	143.22	
	19975	1712.5	-29.52	42.99	13.47	22.23	V
	20175	1732.5	-29.16	42.74	13.58	22.80	
	20375	1752.5	-28.99	42.21	13.22	20.99	

LTE Band 4							
Channel Bandwidth: 5MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	19975	1712.5	-22.19	42.49	20.30	107.03	H
	20175	1732.5	-21.47	42.33	20.86	121.81	
	20375	1752.5	-21.61	42.10	20.49	111.94	
	19975	1712.5	-29.84	42.99	13.15	20.65	V
	20175	1732.5	-29.66	42.74	13.08	20.32	
	20375	1752.5	-29.90	42.21	12.31	17.02	



LTE Band 4							
Channel Bandwidth: 10MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20000	1715.0	-20.78	42.49	21.71	148.08	H
	20175	1732.5	-20.34	42.33	21.99	158.02	
	20350	1750.0	-19.66	42.10	22.44	175.39	
	20000	1715.0	-29.64	42.99	13.35	21.63	V
	20175	1732.5	-28.88	42.74	13.86	24.32	
	20350	1750.0	-28.06	42.21	14.15	26.00	

LTE Band 4							
Channel Bandwidth: 10MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20000	1715.0	-21.87	42.49	20.62	115.21	H
	20175	1732.5	-21.45	42.33	20.88	122.38	
	20350	1750.0	-21.49	42.10	20.61	115.08	
	20000	1715.0	-30.33	42.99	12.66	18.45	V
	20175	1732.5	-30.20	42.74	12.54	17.95	
	20350	1750.0	-29.20	42.21	13.01	20.00	

LTE Band 4							
Channel Bandwidth: 15MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20025	1717.5	-20.36	42.49	22.13	163.12	H
	20175	1732.5	-20.55	42.33	21.78	150.56	
	20325	1747.5	-20.52	42.10	21.58	143.88	
	20025	1717.5	-29.43	42.99	13.56	22.70	V
	20175	1732.5	-29.38	42.74	13.36	21.68	
	20325	1747.5	-28.72	42.21	13.49	22.34	



LTE Band 4							
Channel Bandwidth: 15MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20025	1717.5	-21.57	42.49	20.92	123.45	H
	20175	1732.5	-21.49	42.33	20.84	121.26	
	20325	1747.5	-21.80	42.10	20.30	107.15	
	20025	1717.5	-29.75	42.99	13.24	21.09	V
	20175	1732.5	-29.59	42.74	13.15	20.65	
	20325	1747.5	-29.45	42.21	12.76	18.88	

LTE Band 4							
Channel Bandwidth: 20MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20050	1720.0	-20.19	42.49	22.30	169.63	H
	20175	1732.5	-20.68	42.33	21.65	146.12	
	20300	1745.0	-20.19	42.10	21.91	155.24	
	20050	1720.0	-28.97	42.99	14.02	25.23	V
	20175	1732.5	-28.75	42.74	13.99	25.06	
	20300	1745.0	-28.78	42.21	13.43	22.03	

LTE Band 4							
Channel Bandwidth: 20MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20050	1720.0	-21.45	42.49	21.04	126.91	H
	20175	1732.5	-20.94	42.33	21.39	137.63	
	20300	1745.0	-21.14	42.10	20.96	124.74	
	20050	1720.0	-30.22	42.99	12.77	18.92	V
	20175	1732.5	-29.73	42.74	13.01	20.00	
	20300	1745.0	-29.39	42.21	12.82	19.14	



MODE B

LTE Band 4							
Channel Bandwidth: 20MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20050	1720.0	-20.41	42.49	22.08	161.25	H
	20175	1732.5	-20.51	42.33	21.82	151.95	
	20300	1745.0	-20.27	42.10	21.83	152.41	
	20050	1720.0	-29.04	42.99	13.95	24.83	V
	20175	1732.5	-28.82	42.74	13.92	24.66	
	20300	1745.0	-28.49	42.21	13.72	23.55	

LTE Band 4							
Channel Bandwidth: 20MHz / 16QAM							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	20050	1720.0	-21.55	42.49	20.94	124.02	H
	20175	1732.5	-21.18	42.33	21.15	130.23	
	20300	1745.0	-21.16	42.10	20.94	124.17	
	20050	1720.0	-30.38	42.99	12.61	18.24	V
	20175	1732.5	-29.86	42.74	12.88	19.41	
	20300	1745.0	-29.41	42.21	12.80	19.05	

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

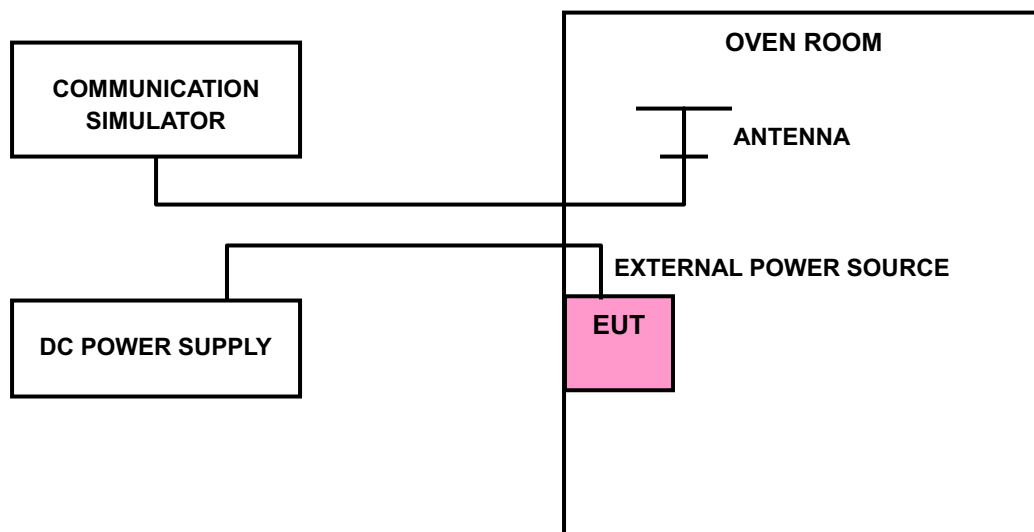

4.2.4 TEST RESULTS

FREQUENCY ERROR vs. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	LTE BAND 4						
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
3.8	0.002	0.002	0.001	0.002	0.001	0.001	2.5
3.6	0.001	0.001	0.001	0.001	0.002	0.002	2.5
4.4	0.002	0.001	0.002	0.002	0.001	0.002	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE

TEMP. (°C)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	LTE BAND 4						
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
-30	0.002	0.002	0.002	0.001	-0.002	0.002	2.5
-20	0.002	0.001	0.001	0.002	0.001	0.001	2.5
-10	0.001	0.001	-0.002	0.001	-0.002	0.001	2.5
0	0.001	-0.002	-0.002	-0.001	-0.001	0.002	2.5
10	-0.002	-0.001	-0.001	-0.001	-0.001	0.002	2.5
20	-0.001	-0.001	-0.002	-0.002	-0.002	-0.001	2.5
30	-0.002	-0.001	-0.001	-0.001	-0.002	-0.001	2.5
40	-0.002	-0.002	0.002	-0.002	0.001	-0.001	2.5
50	-0.001	0.002	0.001	0.001	0.001	-0.001	2.5
55	0.001	0.002	0.001	0.002	0.002	-0.002	2.5



FREQUENCY ERROR vs. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)				LIMIT (ppm)
	LTE BAND 12				
	1.4MHz	3MHz	5MHz	10MHz	
3.8	0.004	0.002	0.004	0.005	2.5
3.6	0.002	0.005	0.004	0.003	2.5
4.4	0.004	0.004	0.002	0.003	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE


TEMP. (°C)	FREQUENCY ERROR (ppm)				LIMIT (ppm)
	LTE BAND 4				
	1.4MHz	3MHz	5MHz	10MHz	
-30	0.004	-0.005	0.005	-0.006	2.5
-20	0.004	0.002	0.005	0.003	2.5
-10	0.002	-0.004	0.003	-0.005	2.5
0	-0.005	-0.003	0.002	-0.003	2.5
10	-0.002	-0.005	-0.004	-0.004	2.5
20	-0.004	-0.002	-0.002	-0.005	2.5
30	-0.005	-0.004	-0.004	-0.003	2.5
40	-0.004	0.005	-0.005	0.004	2.5
50	0.004	0.003	-0.003	0.002	2.5
55	0.006	0.004	0.004	0.004	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.2 TEST SETUP

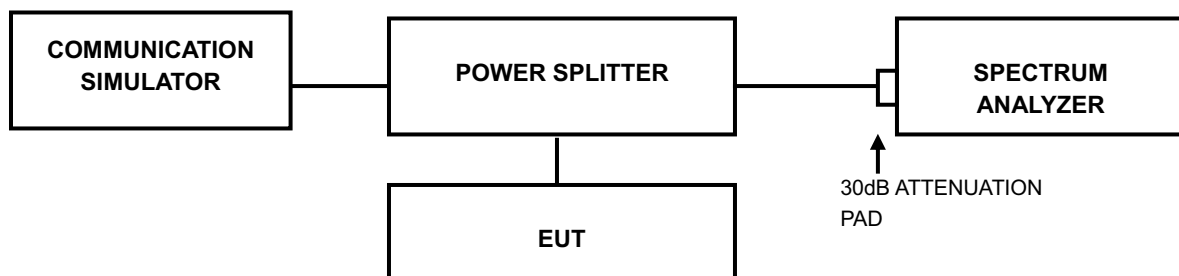


4.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.




4.3.4 TEST RESULTS

LTE BAND 4							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.0921	1.0888	19965	1711.5	2.6957	2.6957
20175	1732.5	1.0933	1.0885	20175	1732.5	2.6958	2.6963
20393	1754.3	1.0923	1.0894	20385	1753.5	2.6981	2.6984

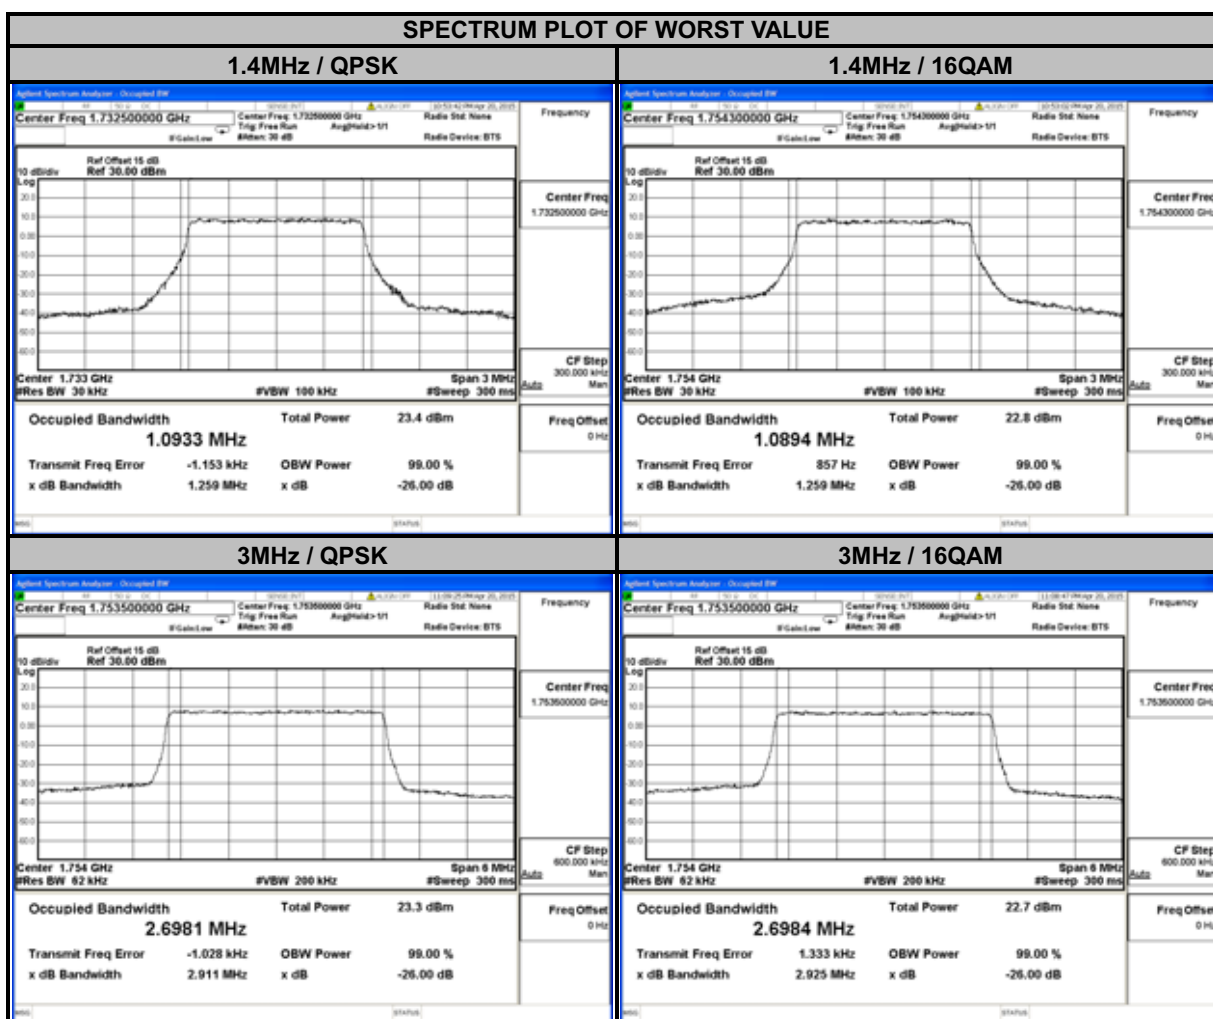




LTE BAND 4							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.4986	4.4920	20000	1715.0	8.9677	8.9659
20175	1732.5	4.4984	4.4930	20175	1732.5	8.9609	8.9582
20375	1752.5	4.4967	4.4951	20350	1750.0	8.9687	8.9664

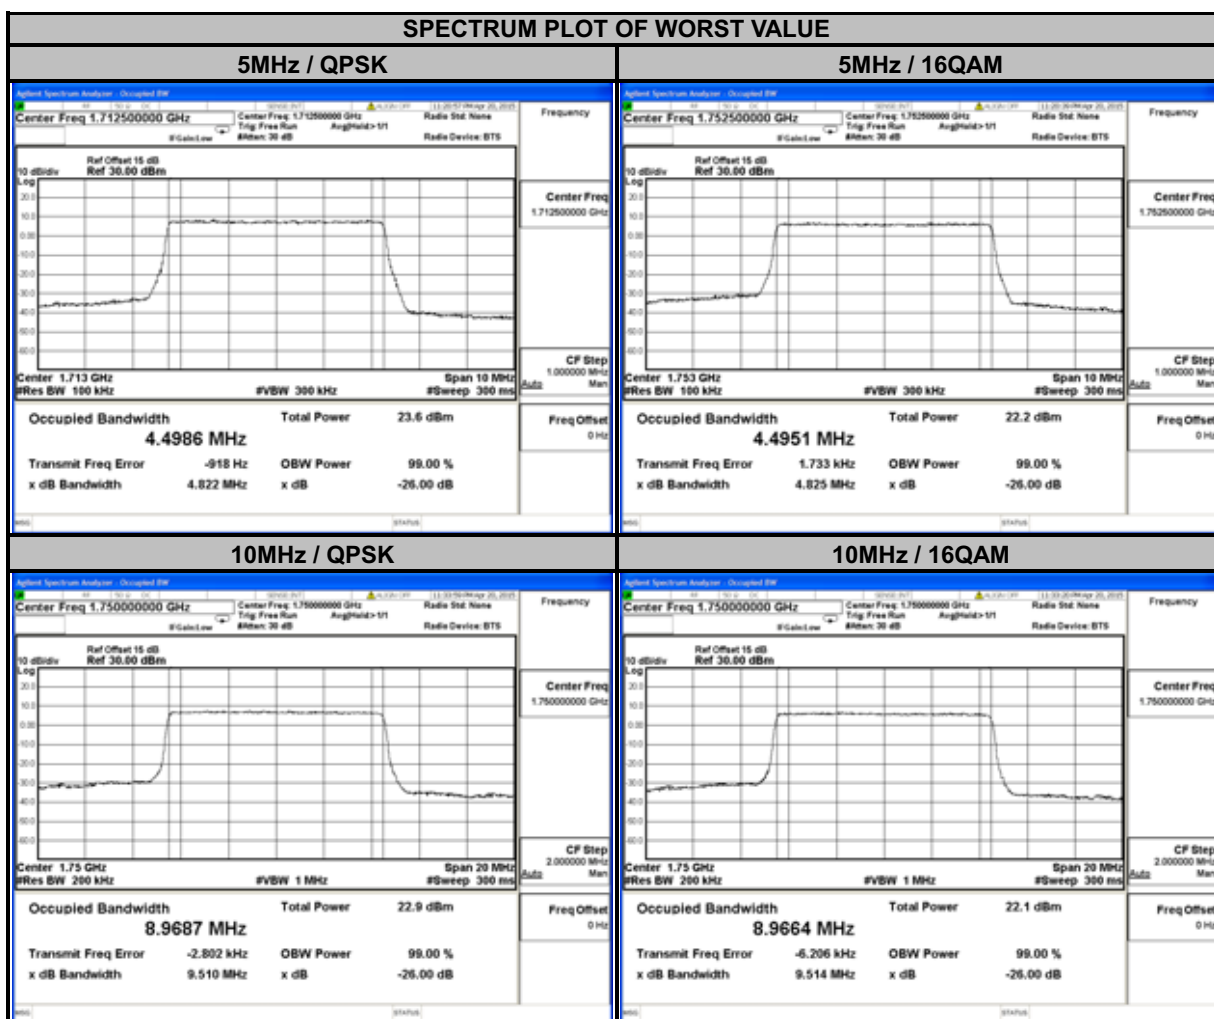




LTE BAND 4							
CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.471	13.461	20050	1720.0	17.951	17.960
20175	1732.5	13.456	13.446	20175	1732.5	17.913	17.918
20325	1747.5	13.474	13.464	20300	1745.0	17.950	17.949

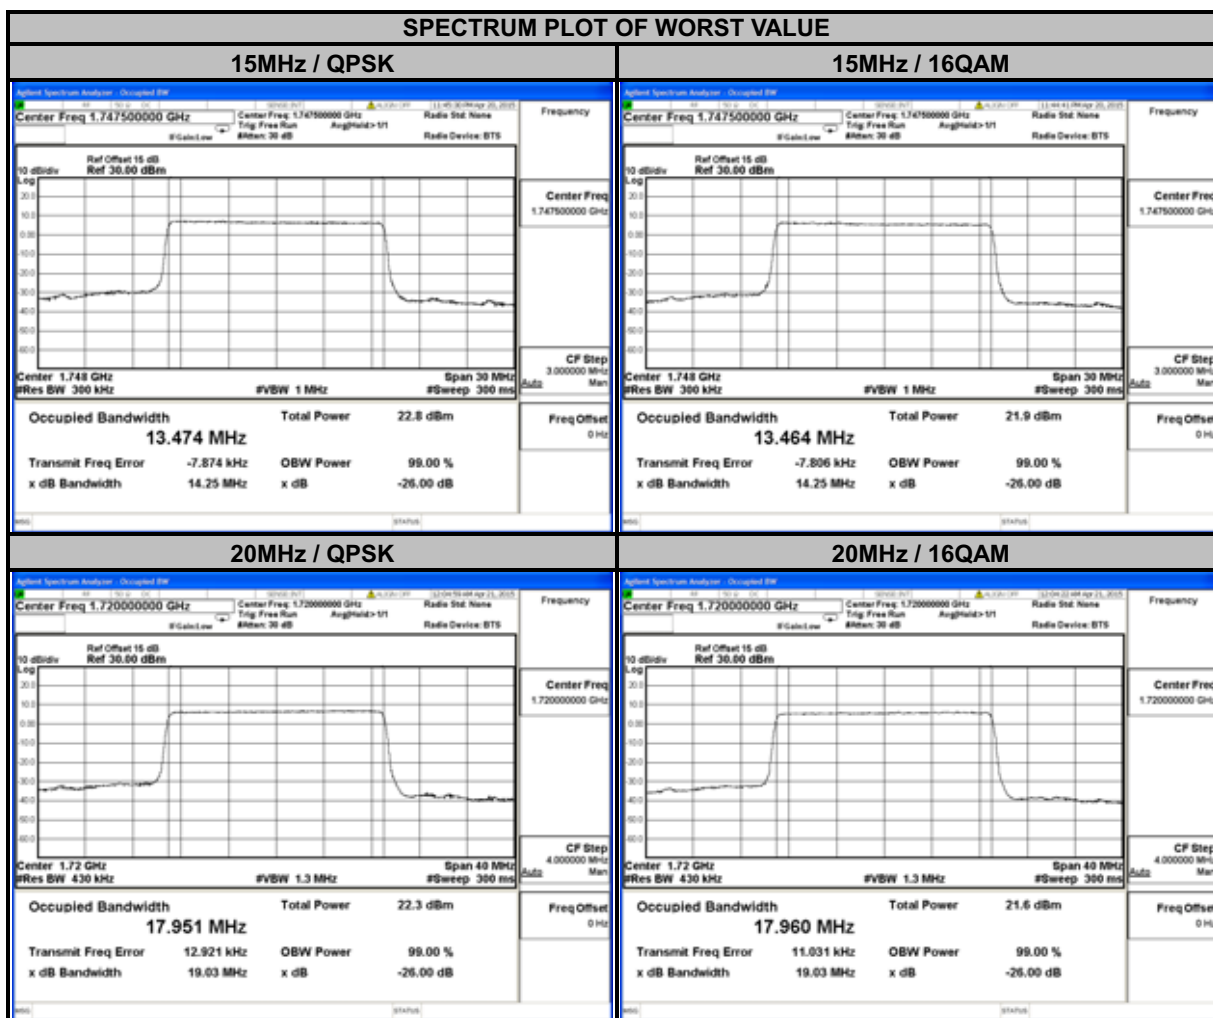




LTE BAND 12							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.0901	1.0897	23025	700.5	2.6951	2.6980
23095	707.5	1.0911	1.0885	23095	707.5	2.6962	2.6975
23173	715.3	1.0906	1.0882	23165	714.5	2.7000	2.7002

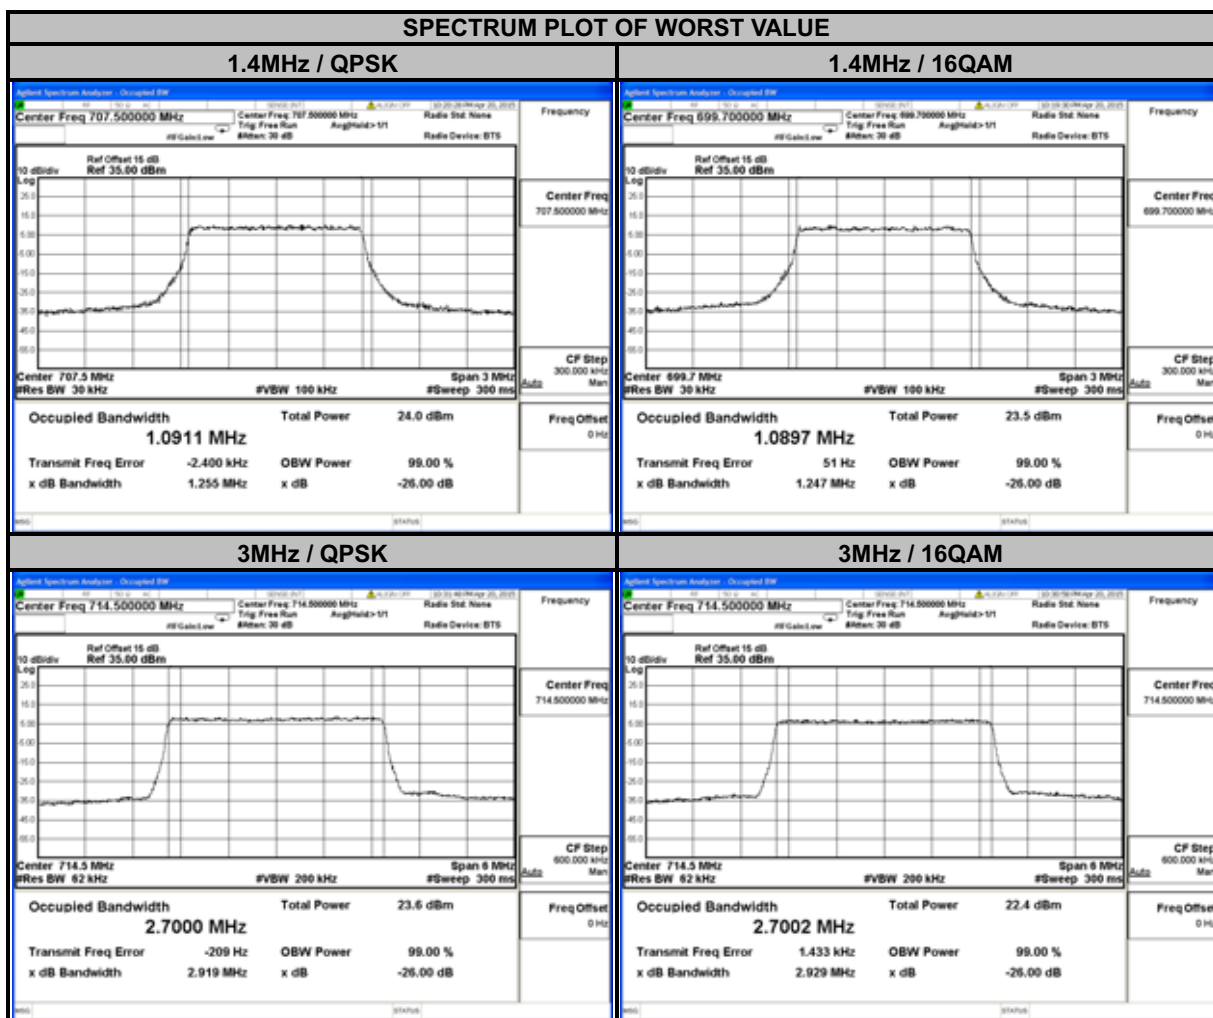



LTE BAND 12							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.4985	4.4979	23060	704.0	8.9728	8.9730
23095	707.5	4.4919	4.4920	23095	707.5	8.9584	8.9625
23155	713.5	4.5033	4.4986	23130	711.0	8.9710	8.9688

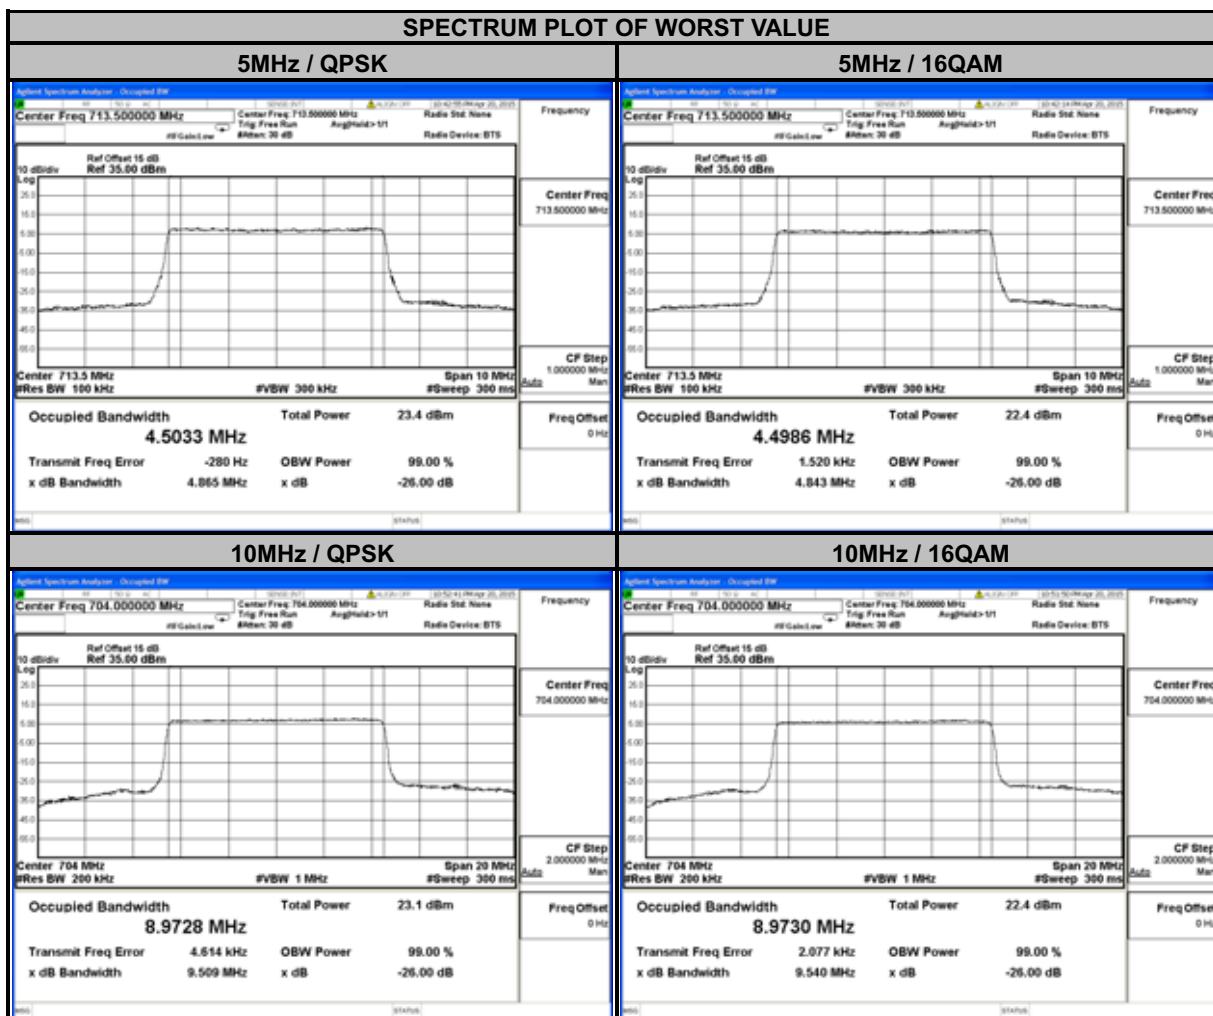


4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.4.2 TEST SETUP

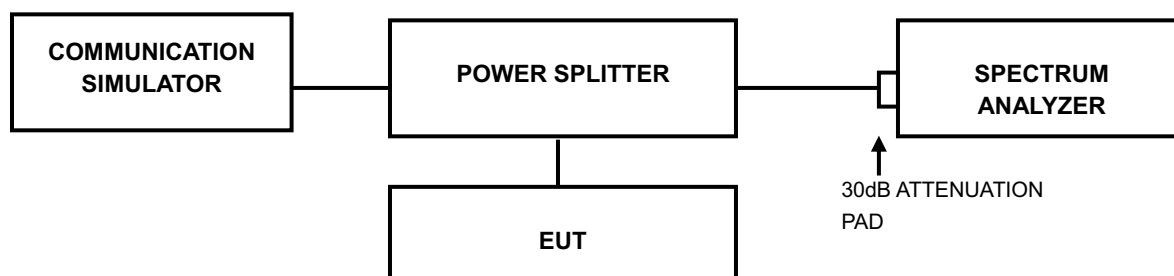


4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.


4.4.4 TEST RESULTS

LTE BAND 4							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.38	5.06	19965	1711.5	4.22	5.07
20175	1732.5	4.15	5.00	20175	1732.5	4.10	5.03
20393	1754.3	4.61	5.44	20385	1753.5	4.44	5.41

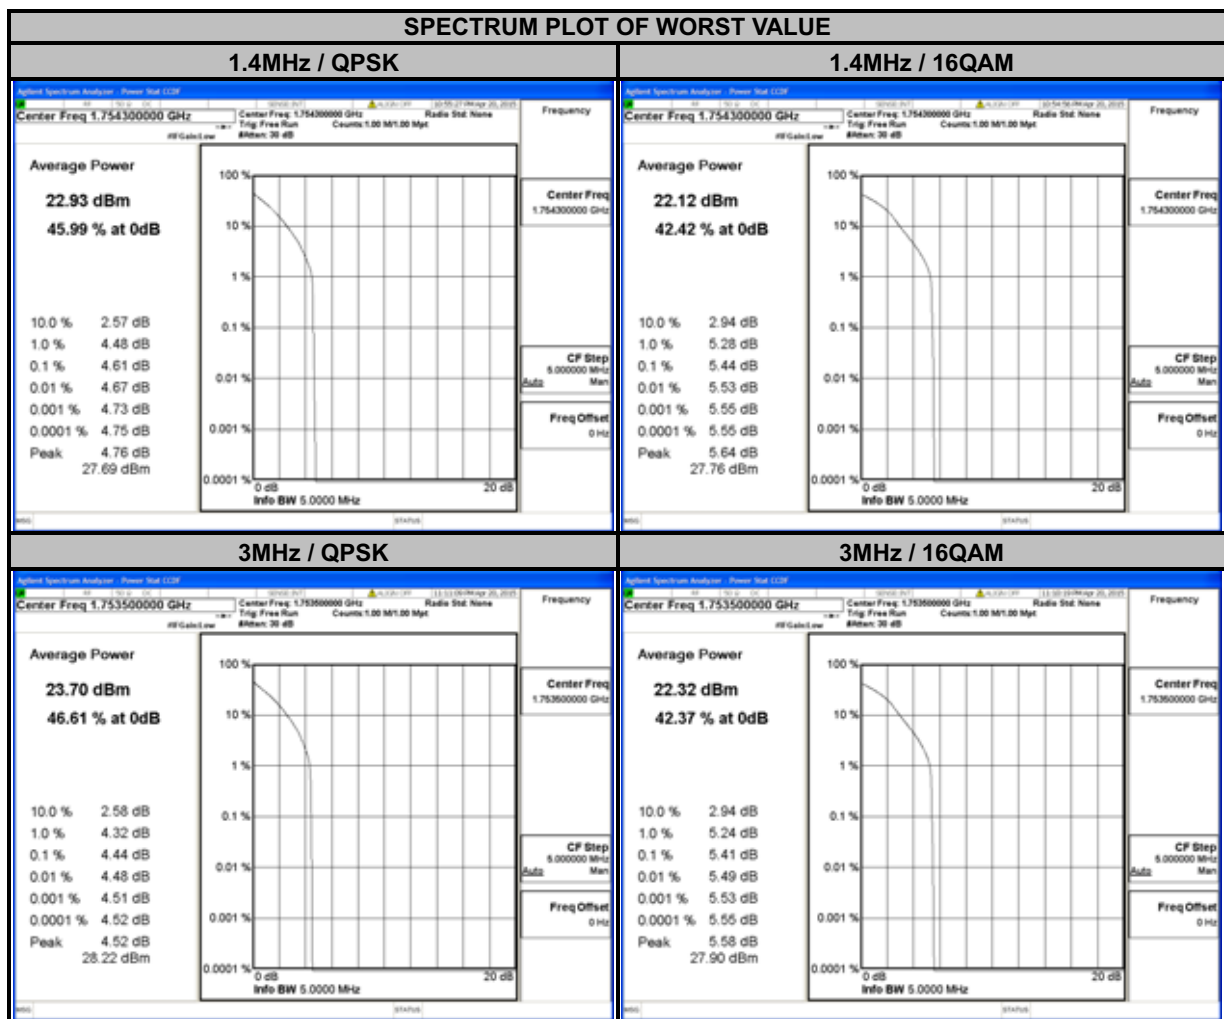




LTE BAND 4							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.24	5.08	20000	1715.0	4.25	5.07
20175	1732.5	4.22	5.04	20175	1732.5	4.23	4.92
20375	1752.5	4.50	5.33	20350	1750.0	4.16	5.08

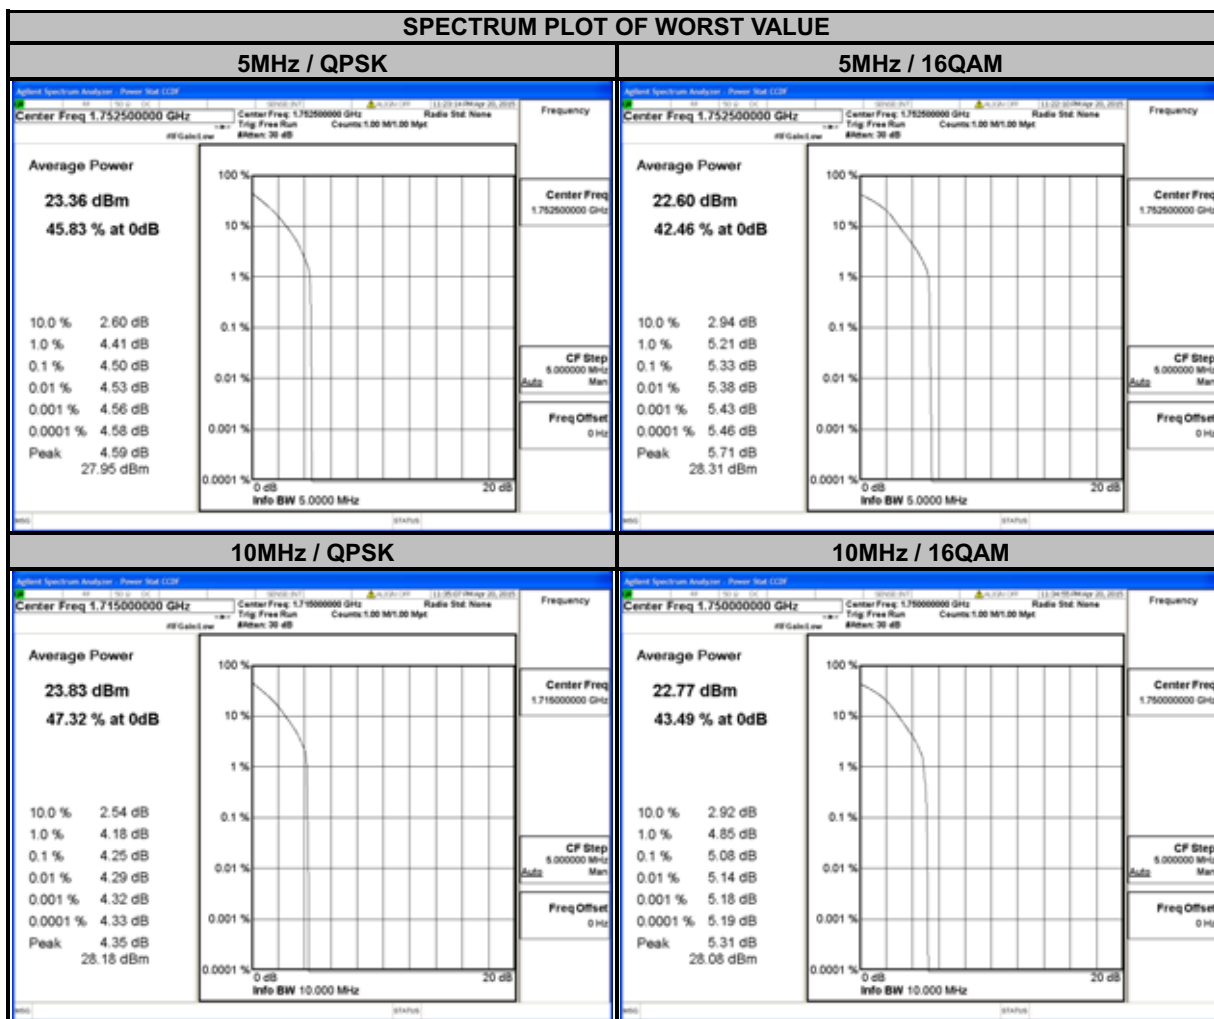




LTE BAND 4							
CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.21	5.05	20050	1720	4.22	5.03
20175	1732.5	4.15	4.99	20175	1732.5	4.28	5.10
20325	1747.5	3.95	4.84	20300	1745	3.89	4.59

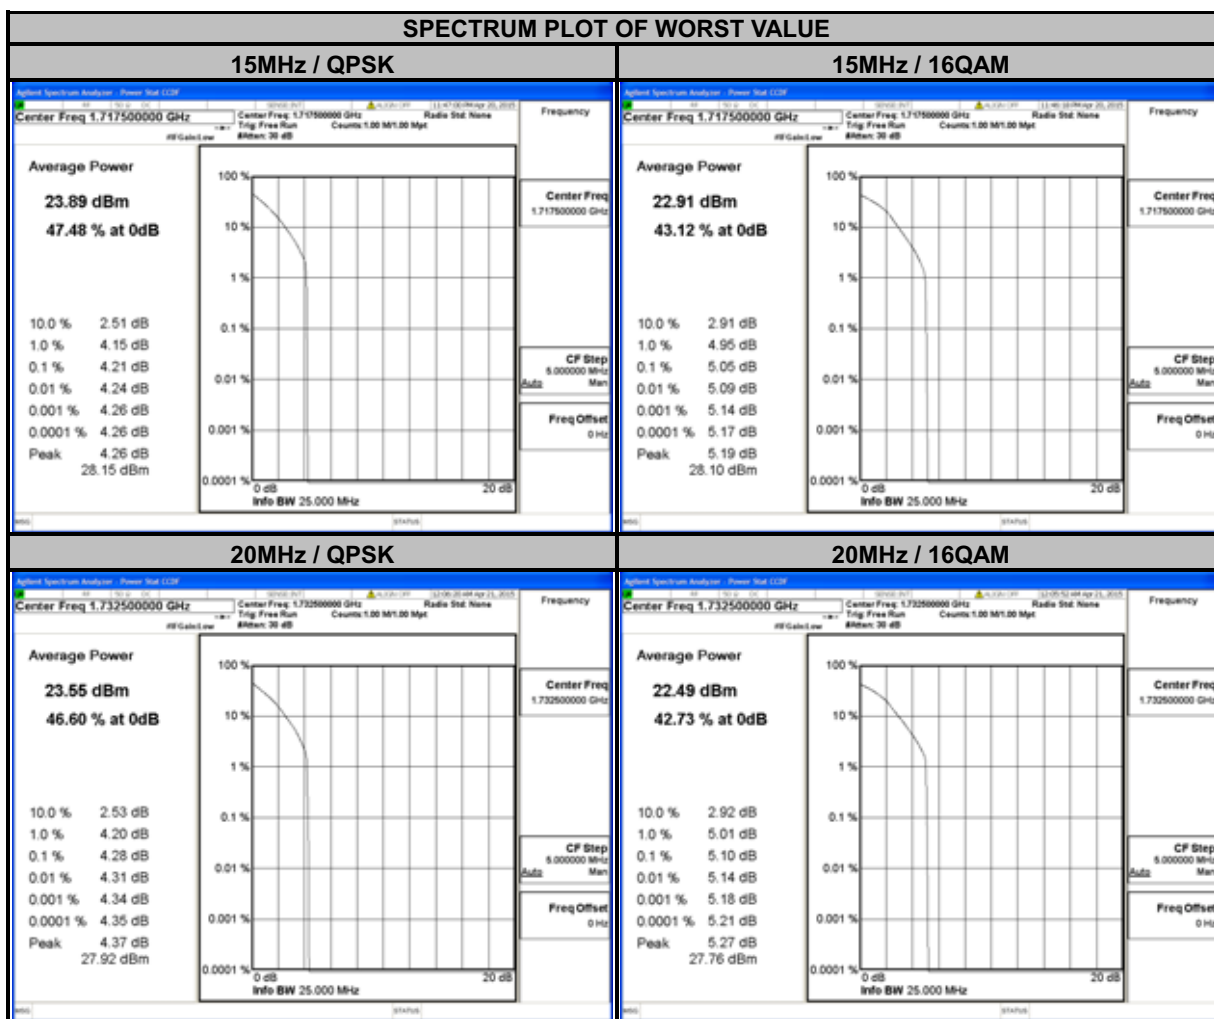




LTE BAND 12							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	4.12	5.04	23025	700.5	4.05	4.87
23095	707.5	4.53	5.28	23095	707.5	4.50	5.34
23173	715.3	4.40	5.27	23165	714.5	4.53	5.29

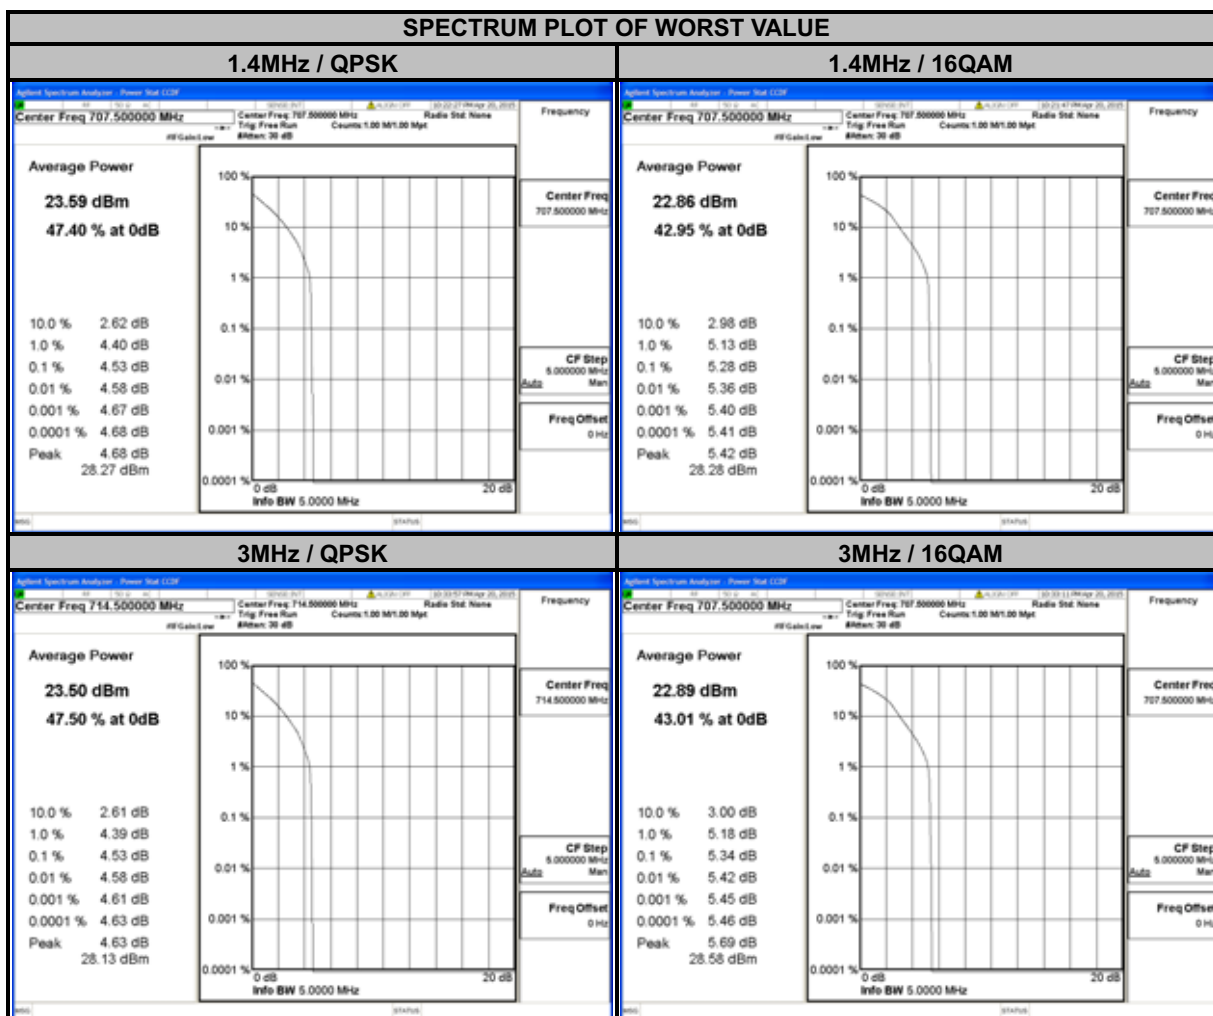



LTE BAND 12							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.07	4.89	23060	704.0	4.10	4.89
23095	707.5	4.54	5.40	23095	707.5	4.35	5.26
23155	713.5	4.35	5.17	23130	711.0	4.40	5.26

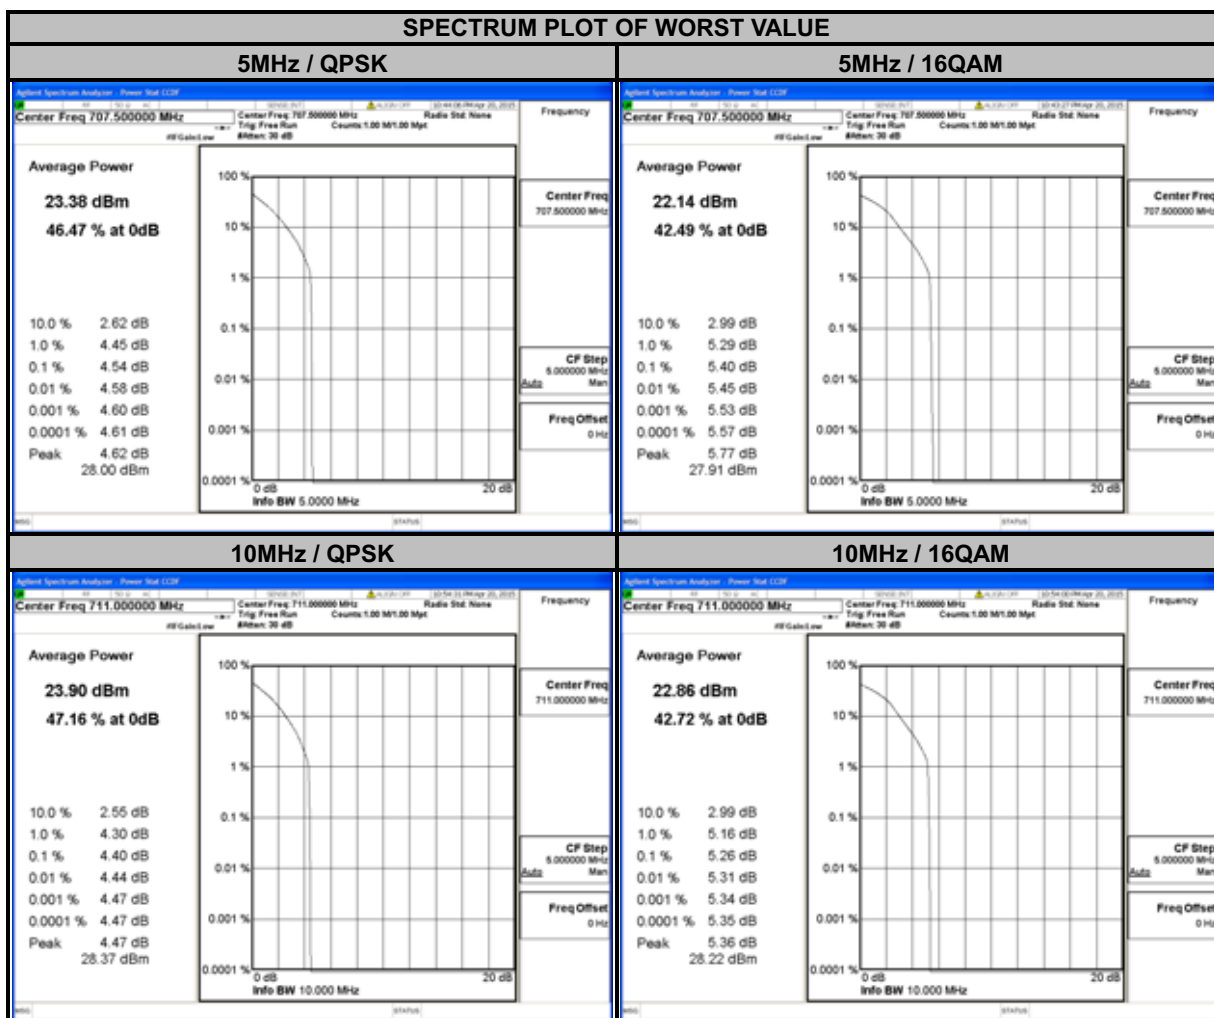


4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

For operations in the 704-716 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

4.5.2 TEST SETUP

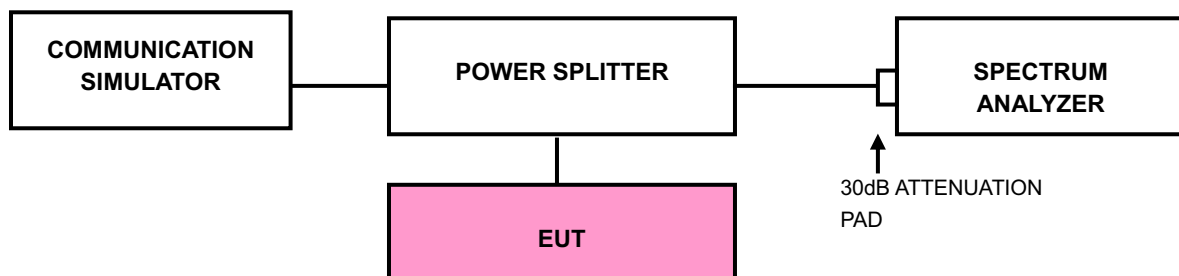


4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (Channel Bandwidth 1.4MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (Channel Bandwidth 3MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (Channel Bandwidth 5MHz / 10MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150kHz and VB of the spectrum is 470kHz (Channel Bandwidth 15MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 180kHz and VB of the spectrum is 560kHz (Channel Bandwidth 20MHz).
- h. Record the max trace plot into the test report.




4.5.4 TEST RESULTS

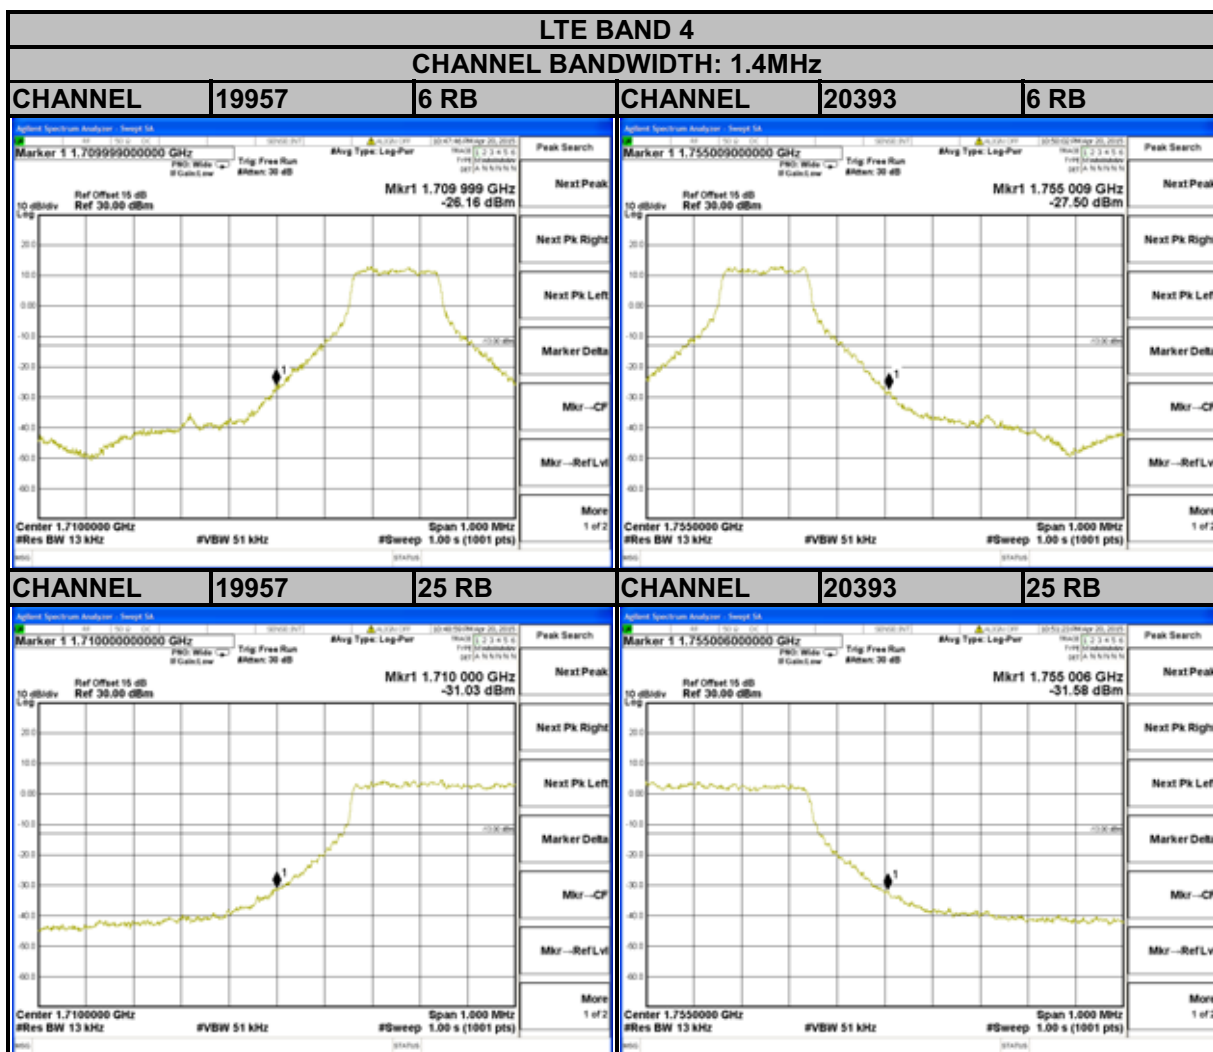





A D T

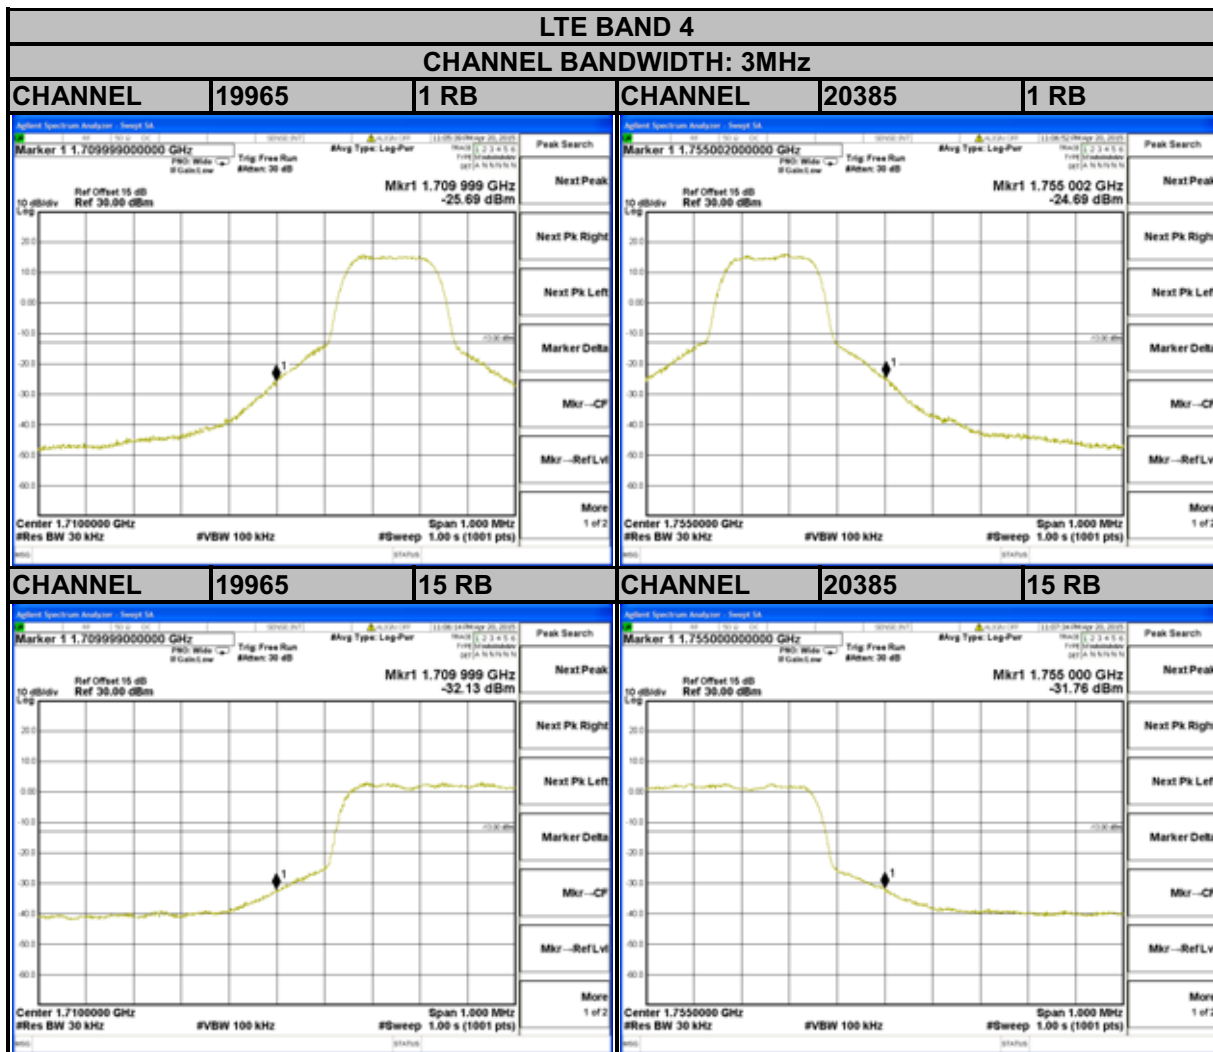




A D T

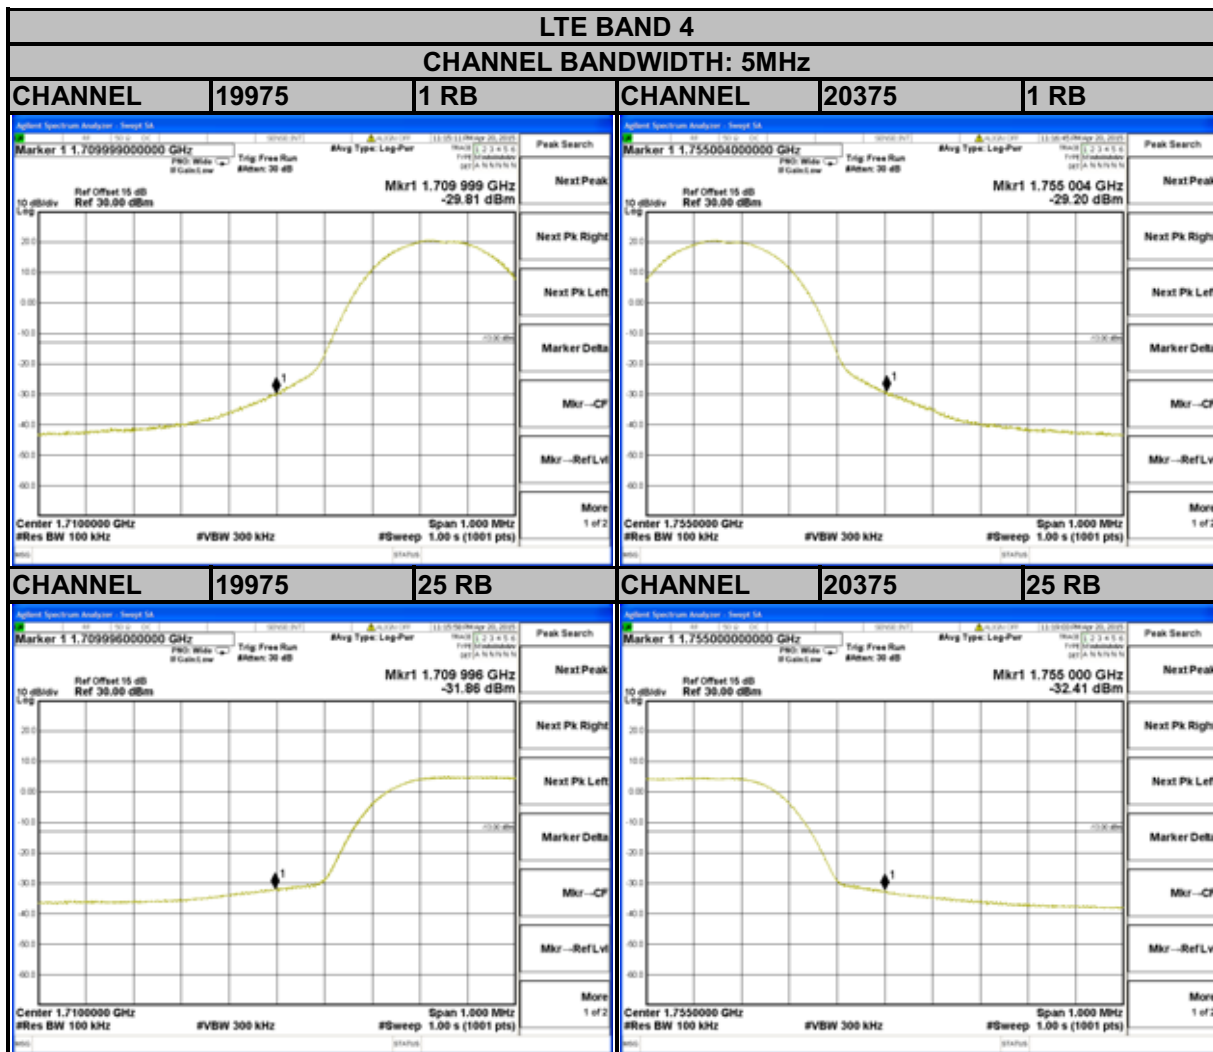


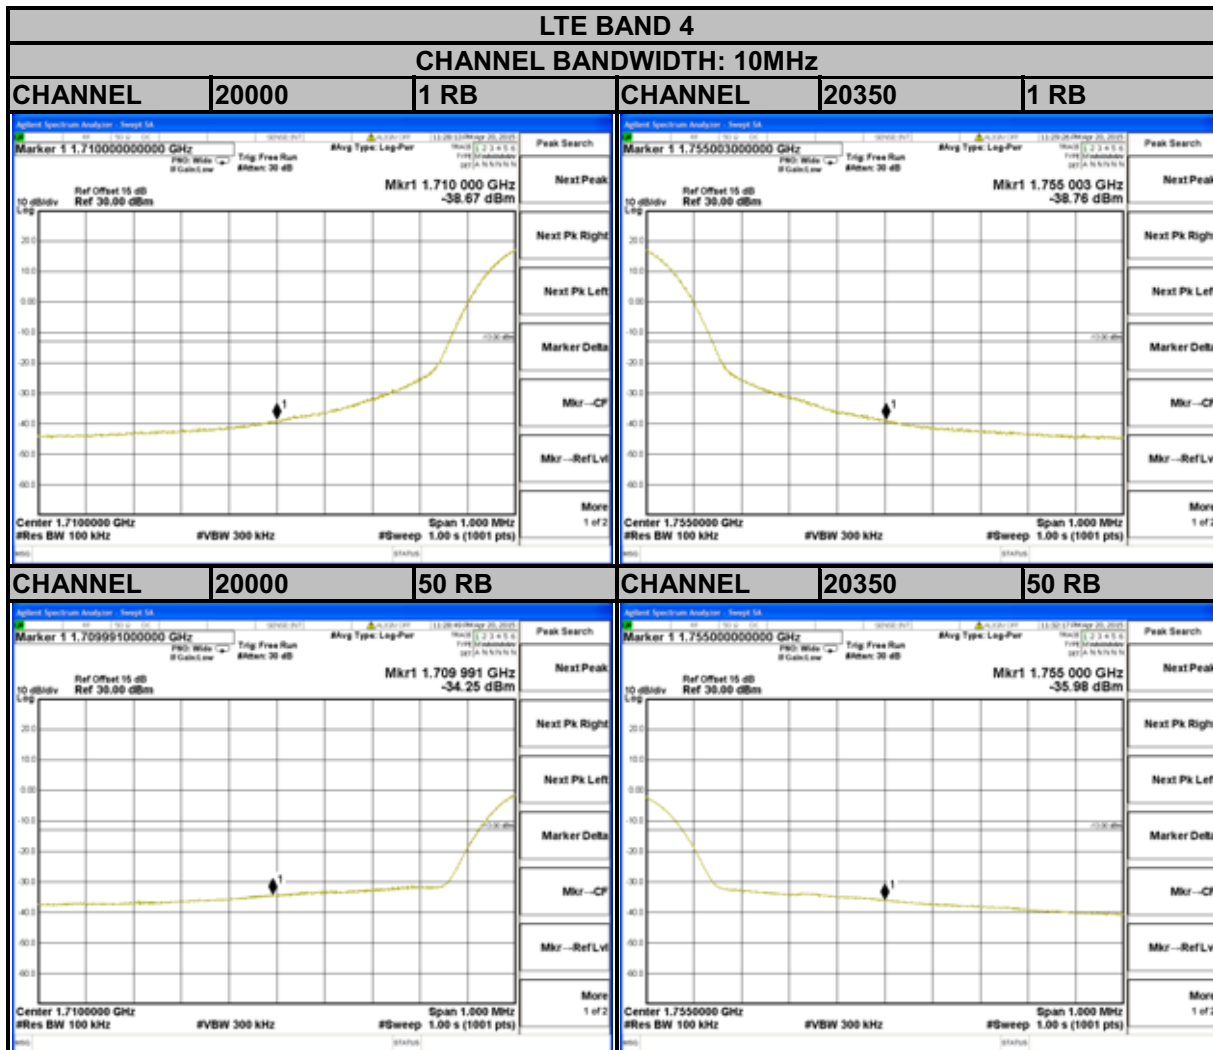





A D T

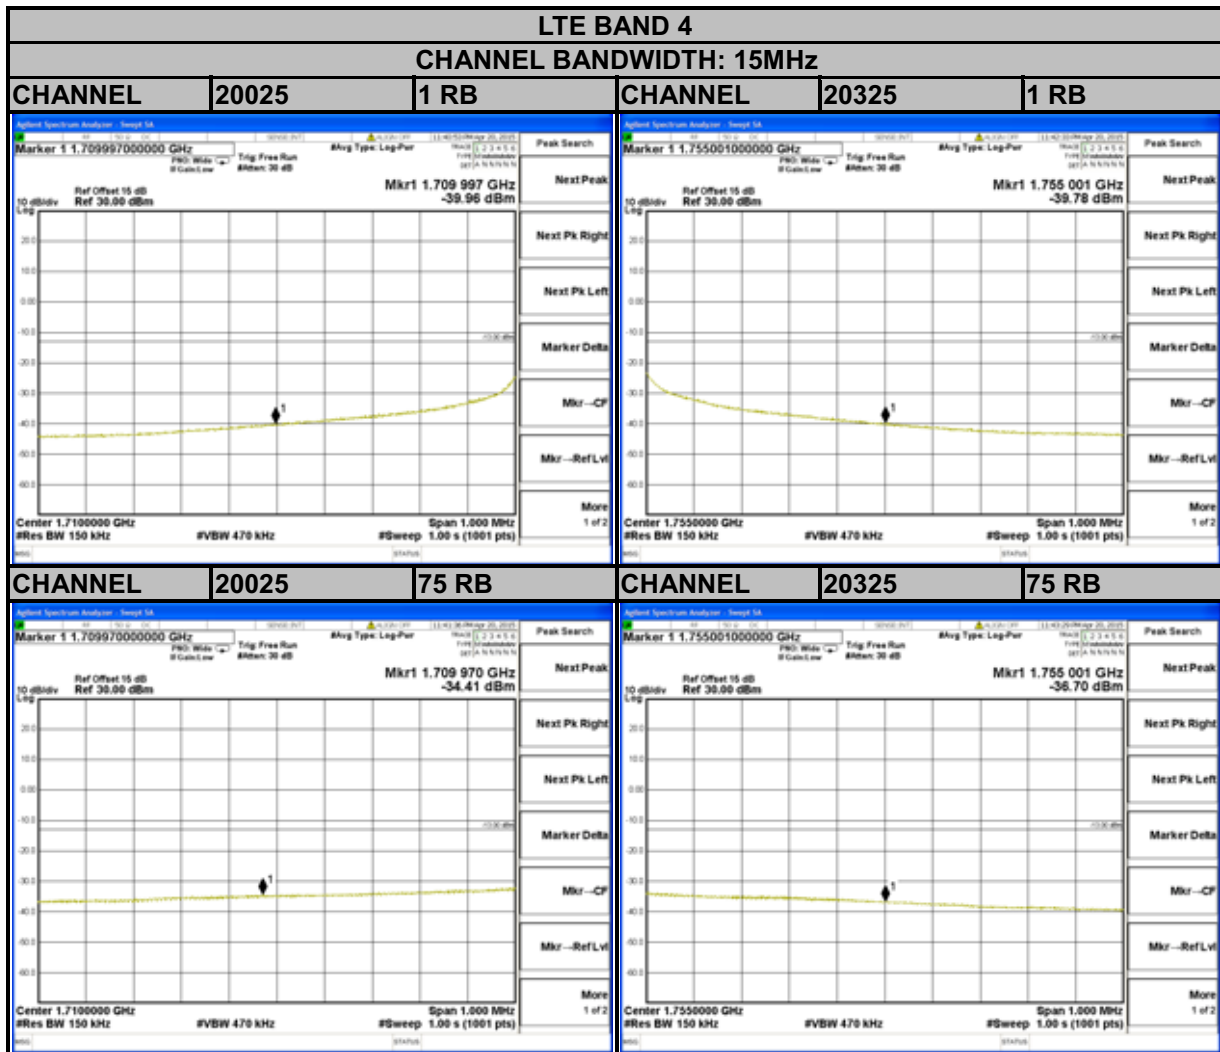

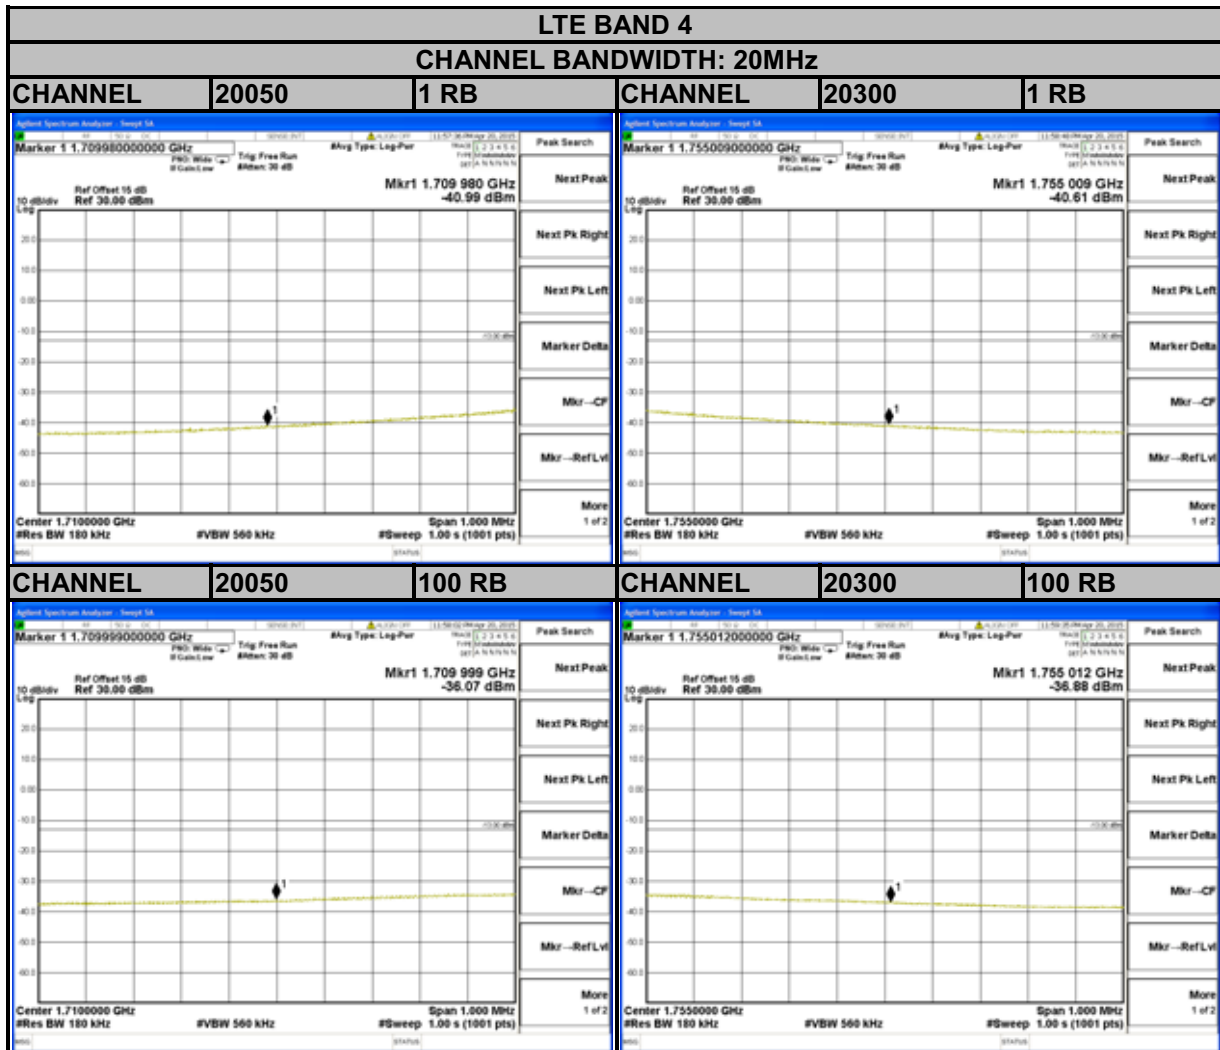


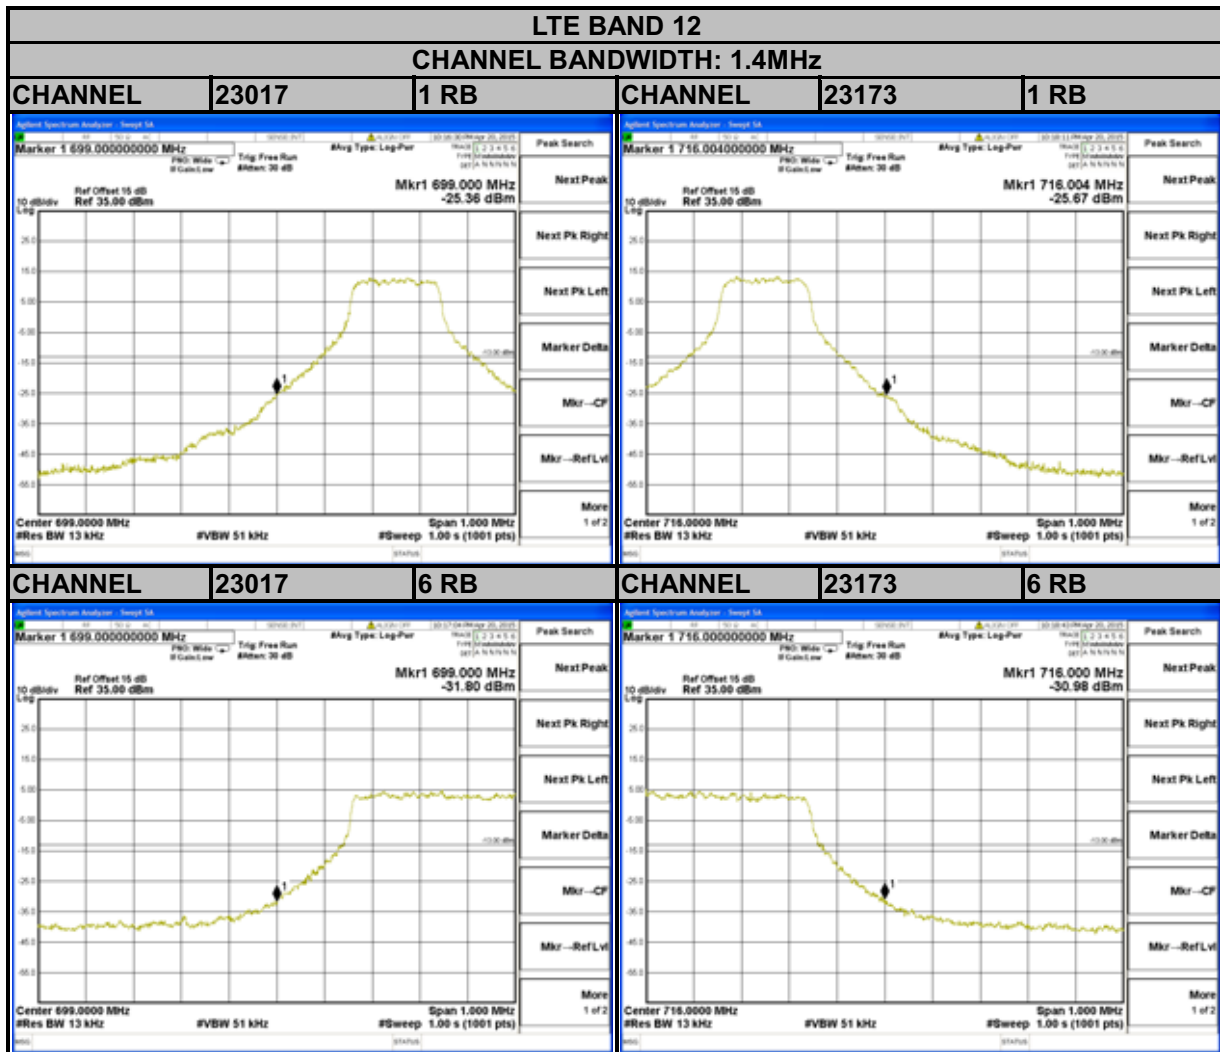

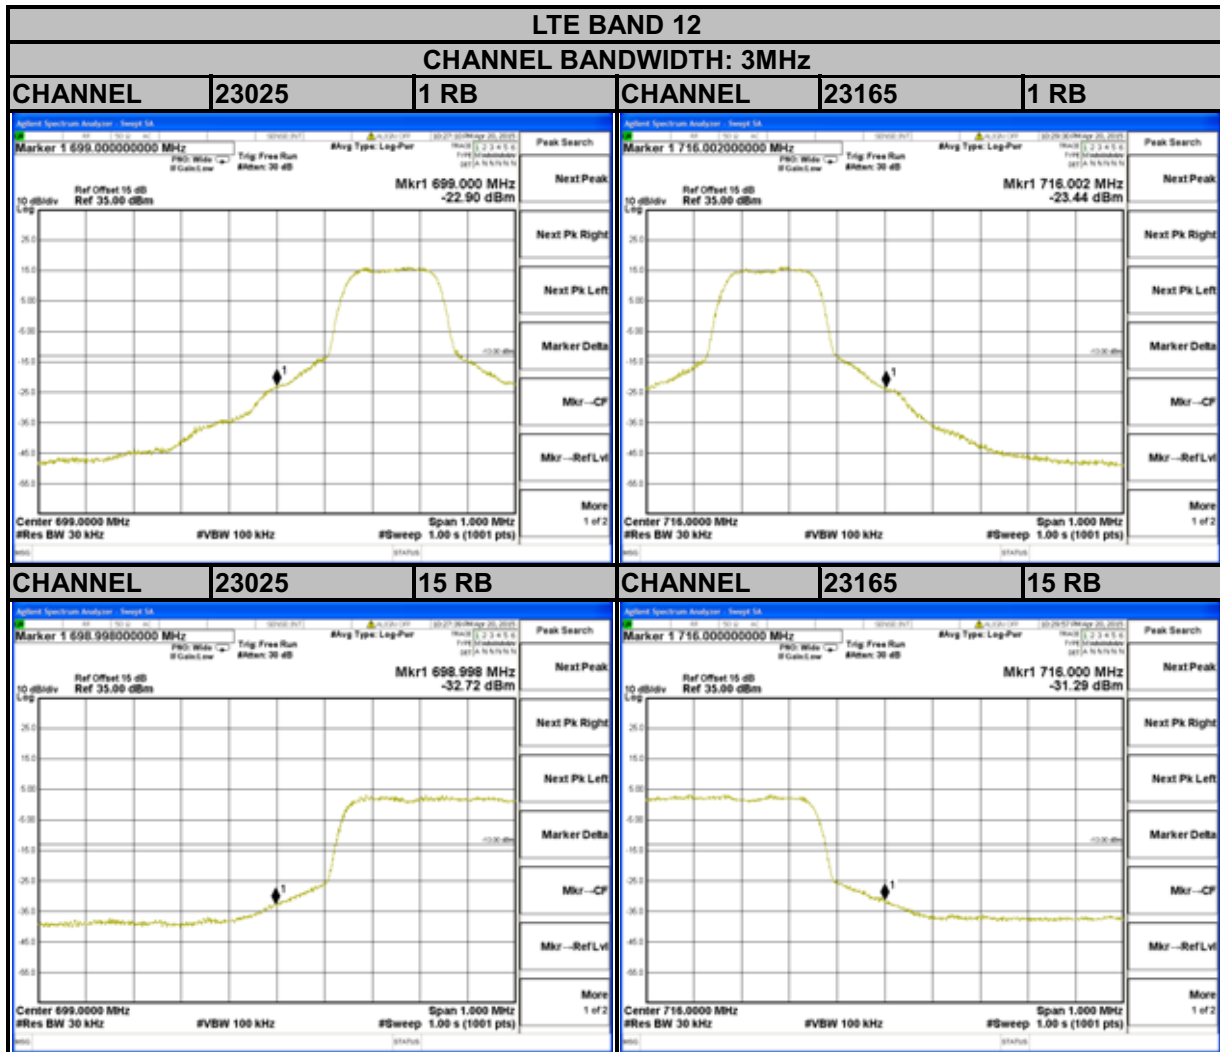




A D T

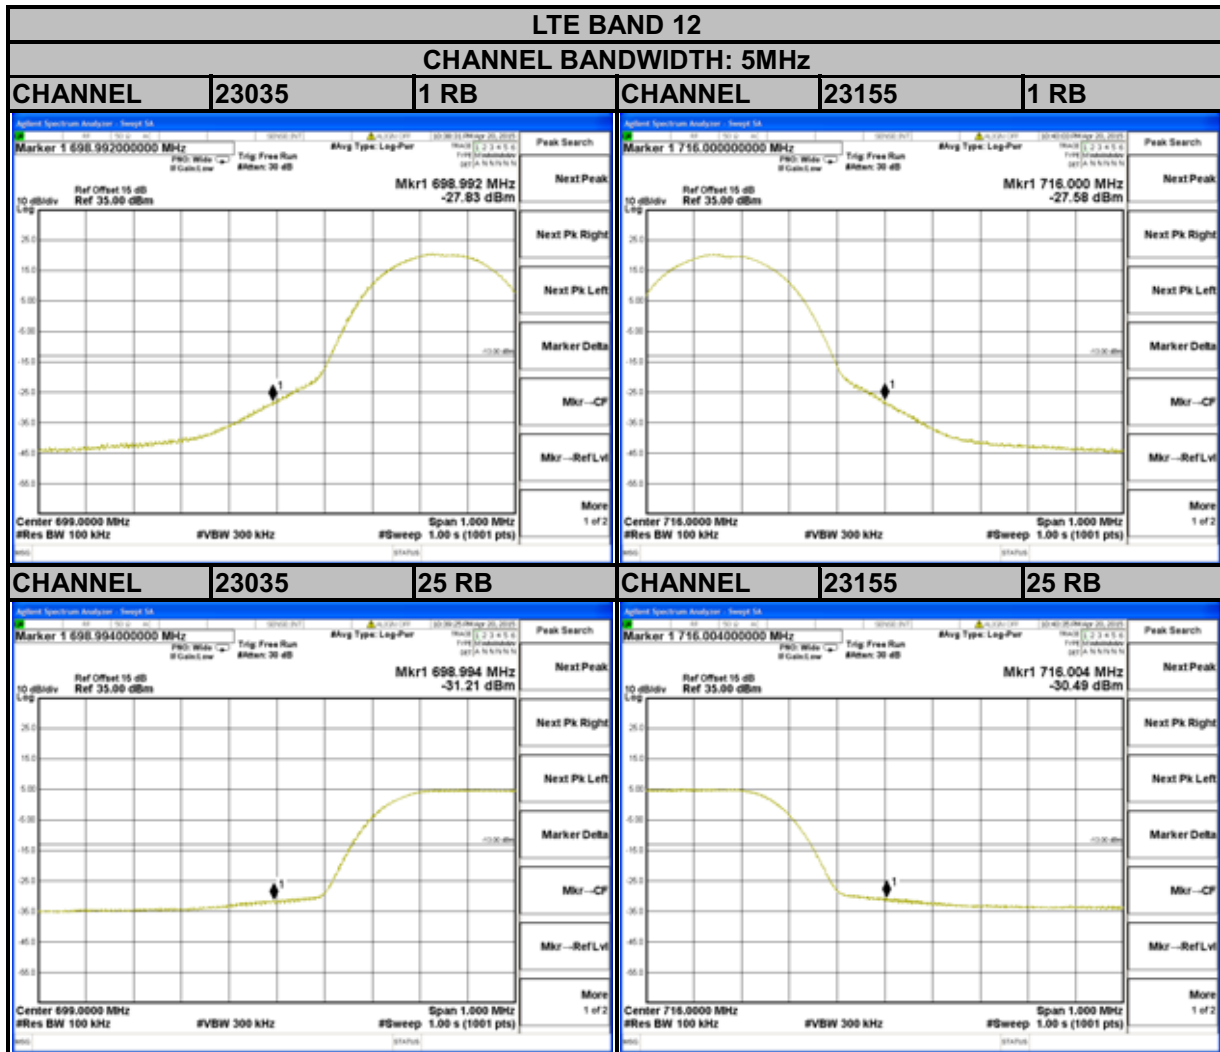



A D T

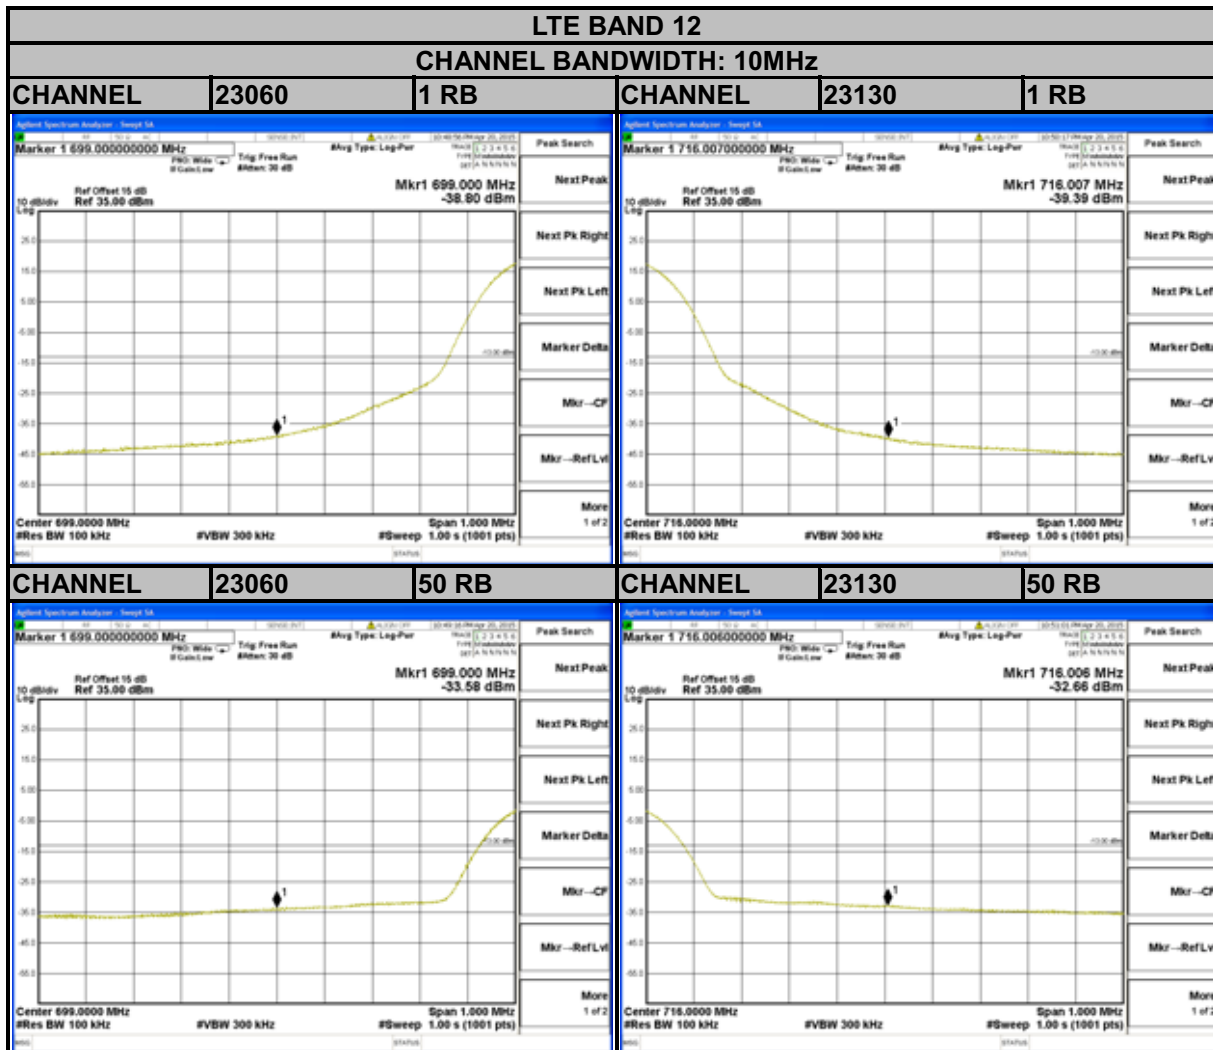

4.6 CONDUCTED SPURIOUS EMISSIONS


4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13dBm.

4.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30 MHz to 8GHz for LTE Band 12 and from 30MHz to 18GHz for LTE Band 4. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

4.6.3 TEST SETUP

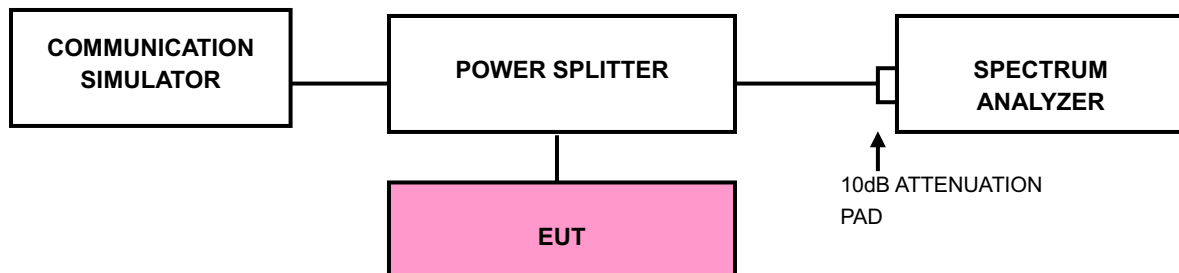




A D T


4.6.4 TEST RESULTS

FREQUENCY RANGE: 30MHz~8GHz

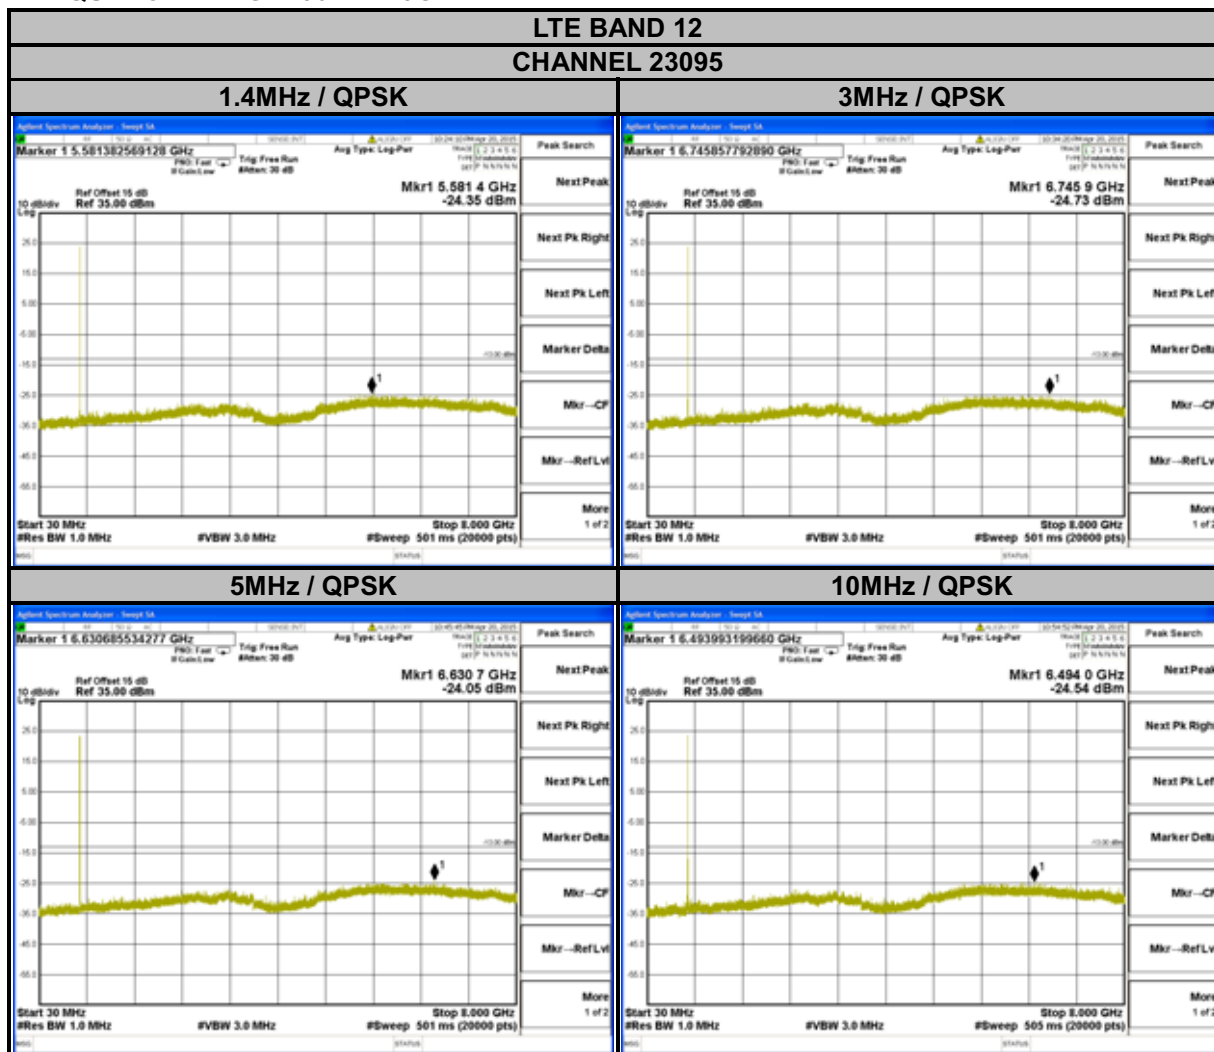



FREQUENCY RANGE: 30MHz~18GHz

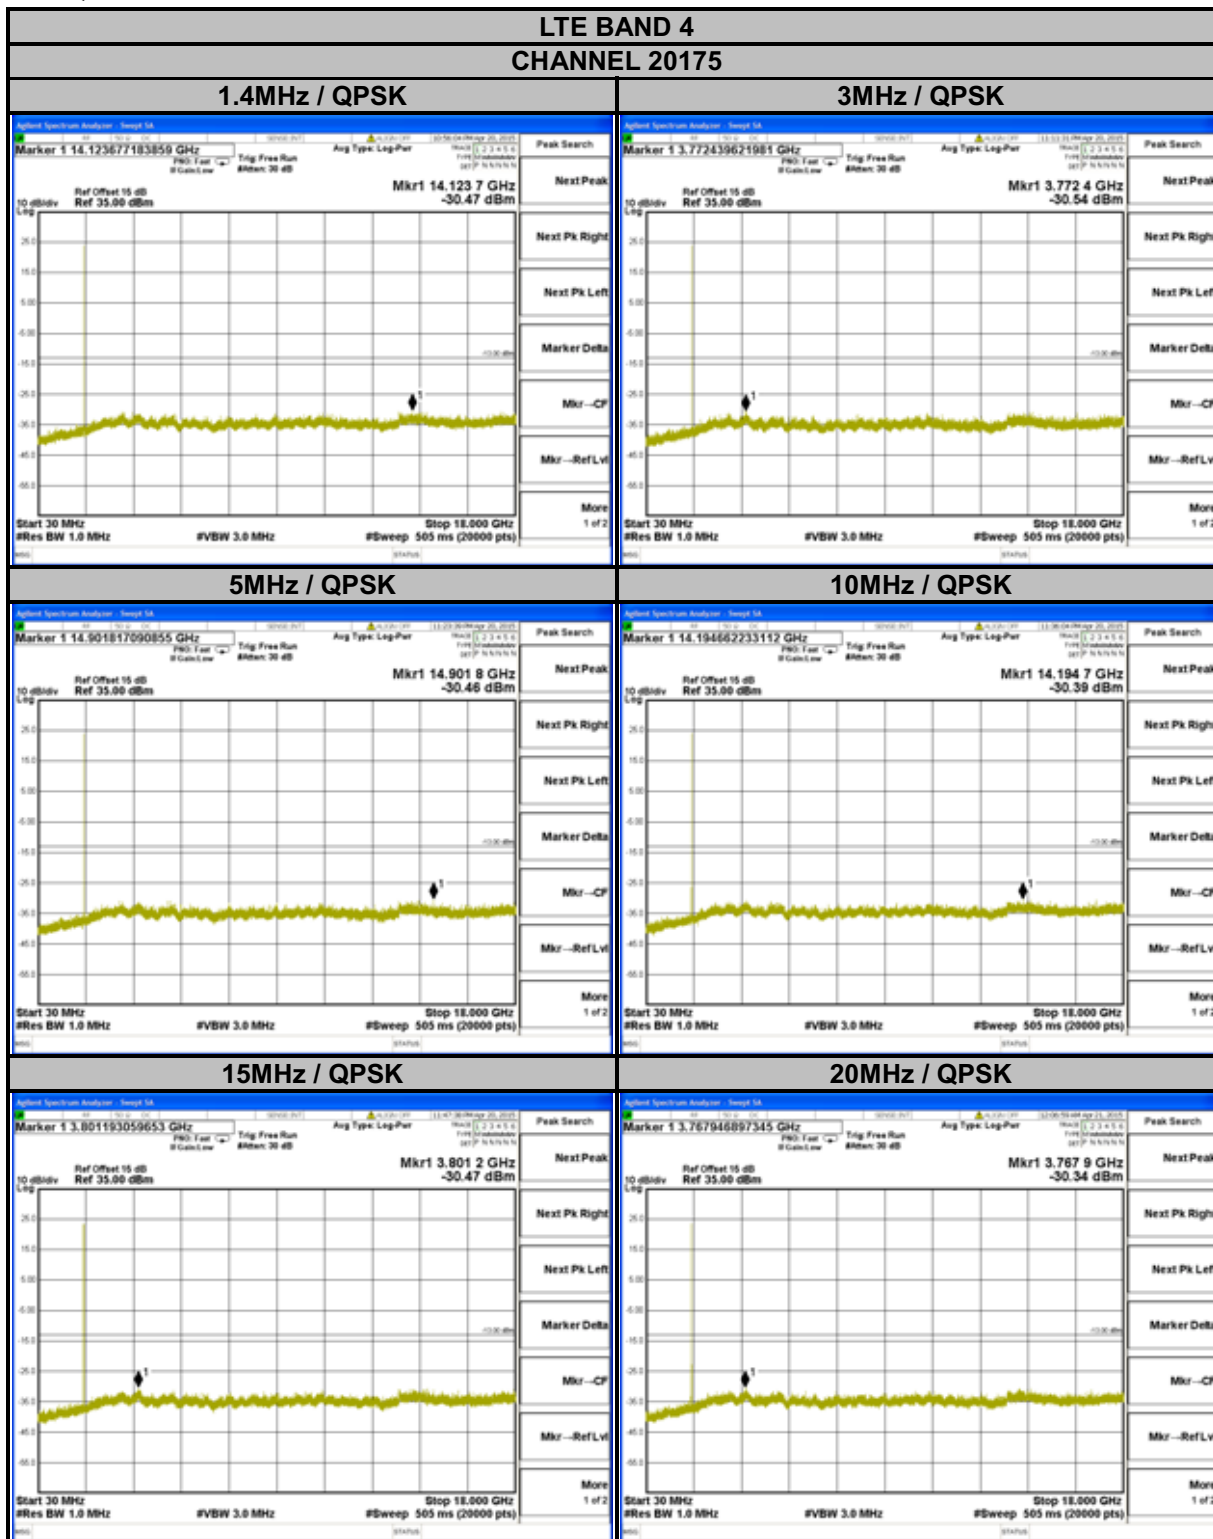

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

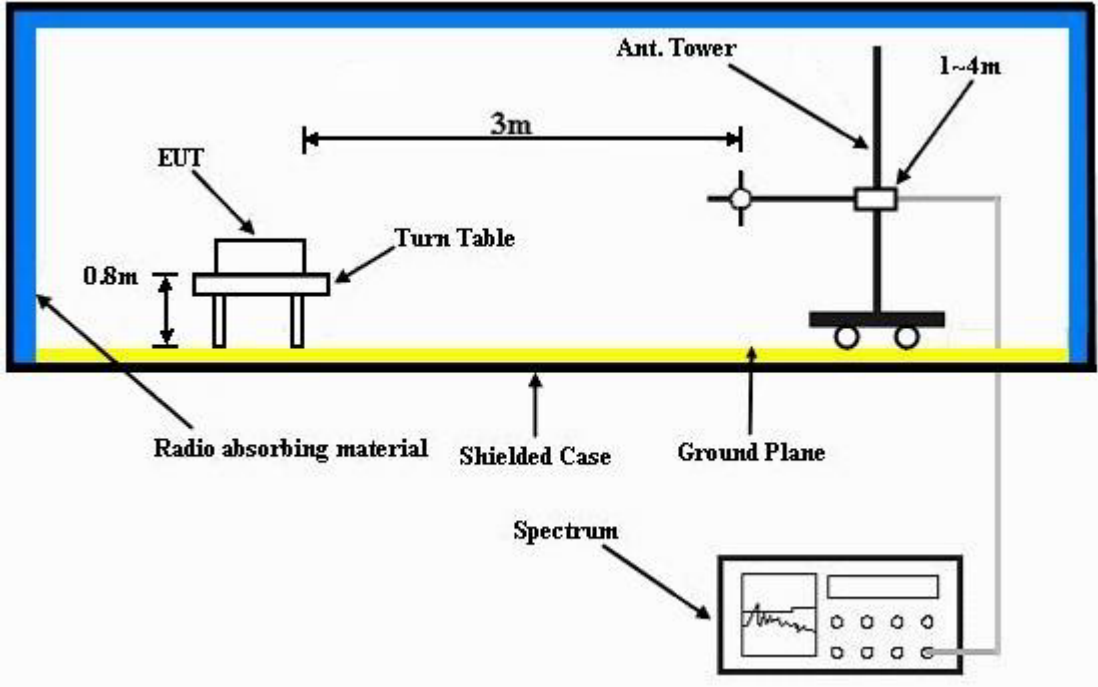

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 TEST RESULTS

MODE A

LTE BAND 4

CHANNEL BANDWIDTH: 20MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2015-04-20

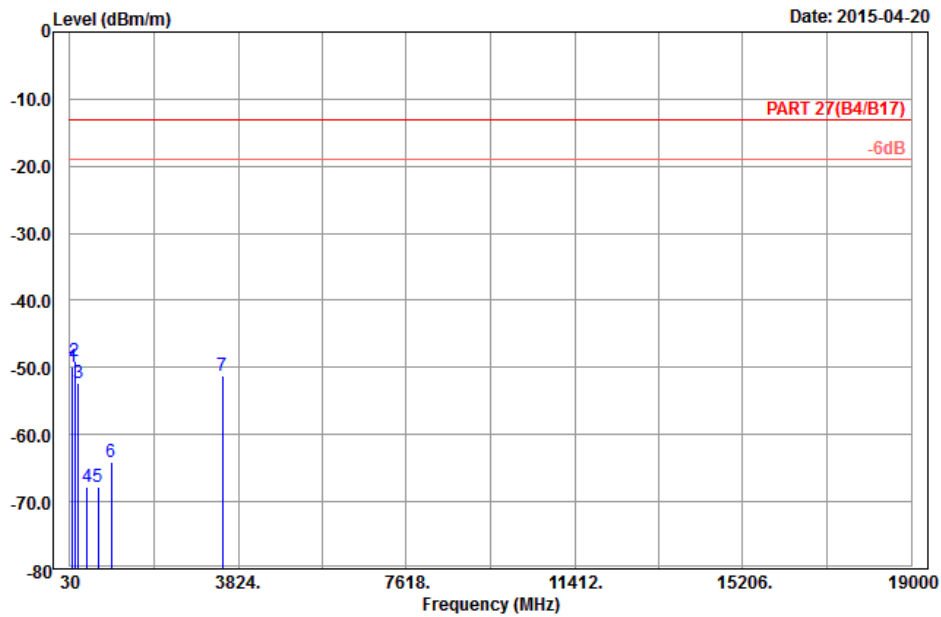


Site : 966 chamber 1
 Condition: PART 27(B4/B17) 3m Horizontal
 Remark : LTE_Band 4_QPSK(1,0)_20M_CH20175
 Tested by: Hwa Chiang
 Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	94.80	-49.85	-39.45	-13.00	-36.85	-10.40	Peak
2	pp 138.54	-49.14	-41.45	-13.00	-36.14	-7.69	Peak
3	219.00	-52.32	-46.40	-13.00	-39.32	-5.92	Peak
4	420.40	-67.88	-64.69	-13.00	-54.88	-3.19	Peak
5	659.80	-67.72	-67.54	-13.00	-54.72	-0.18	Peak
6	969.90	-63.98	-69.15	-13.00	-50.98	5.17	Peak
7	3465.00	-51.26	-65.60	-13.00	-38.26	14.34	Peak

Data: 14

Date: 2015-04-20

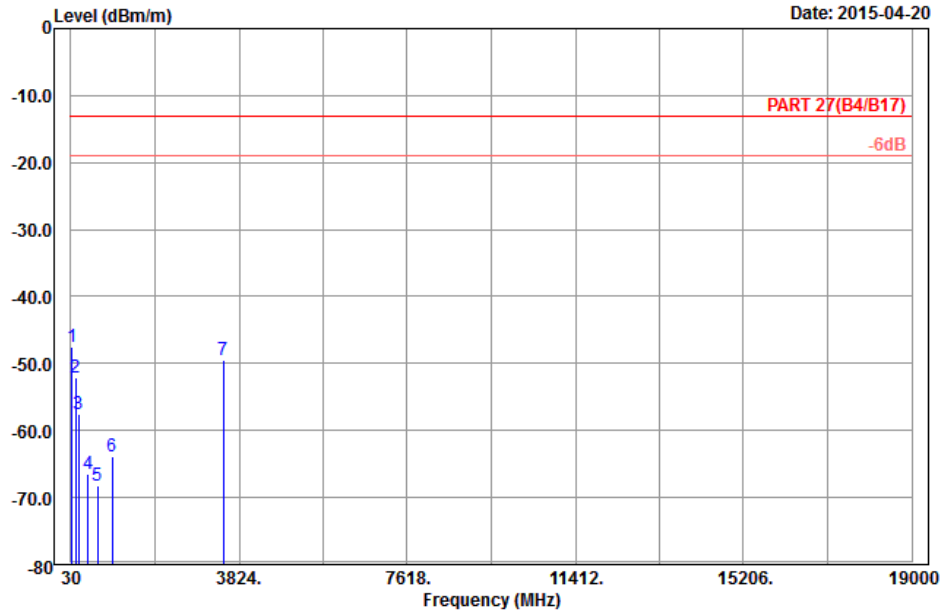

Site : 966 chamber 1
 Condition: PART 27(B4/B17) 3m Vertical
 Remark : LTE_Band 4_QPSK(1,0)_20M_CH20175
 Tested by: Hwa Chiang
 Plane : Z


	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 pp	48.09	-47.63	-34.20	-13.00	-34.63	-13.43	Peak
2	138.54	-52.05	-44.36	-13.00	-39.05	-7.69	Peak
3	204.69	-57.51	-51.39	-13.00	-44.51	-6.12	Peak
4	420.40	-66.54	-63.35	-13.00	-53.54	-3.19	Peak
5	626.90	-68.27	-68.40	-13.00	-55.27	0.13	Peak
6	959.40	-63.85	-68.99	-13.00	-50.85	5.14	Peak
7	3465.00	-49.59	-63.93	-13.00	-36.59	14.34	Peak

LTE BAND 12
CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

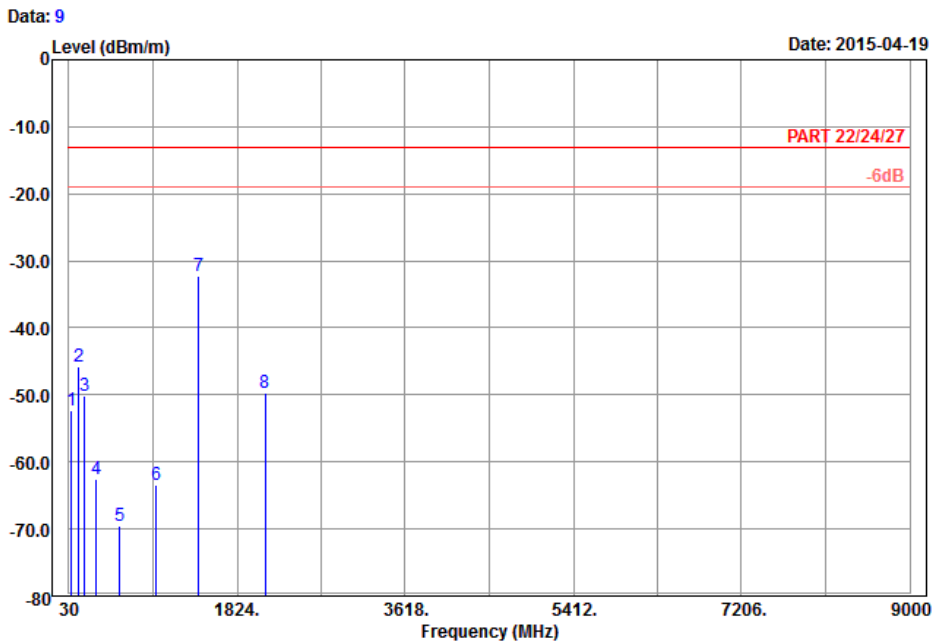


Site : 966 chamber 1
 Condition: PART 22/24/27 3m Horizontal
 Remark : LTE_Band 12_QPSK(1,24)_10M_CH23095
 Tested by: Hwa Chiang
 Plane : X

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	58.35	-52.41	-38.35	-13.00	-39.41	-14.06 Peak
2	138.81	-45.86	-38.17	-13.00	-32.86	-7.69 Peak
3	199.29	-50.16	-43.98	-13.00	-37.16	-6.18 Peak
4	320.30	-62.59	-56.87	-13.00	-49.59	-5.72 Peak
5	573.00	-69.45	-68.75	-13.00	-56.45	-0.70 Peak
6	962.90	-63.39	-68.54	-13.00	-50.39	5.15 Peak
7 pp	1415.00	-32.24	-38.60	-13.00	-19.24	6.36 Peak
8	2122.50	-49.73	-60.84	-13.00	-36.73	11.11 Peak

Data: 10

Date: 2015-04-19

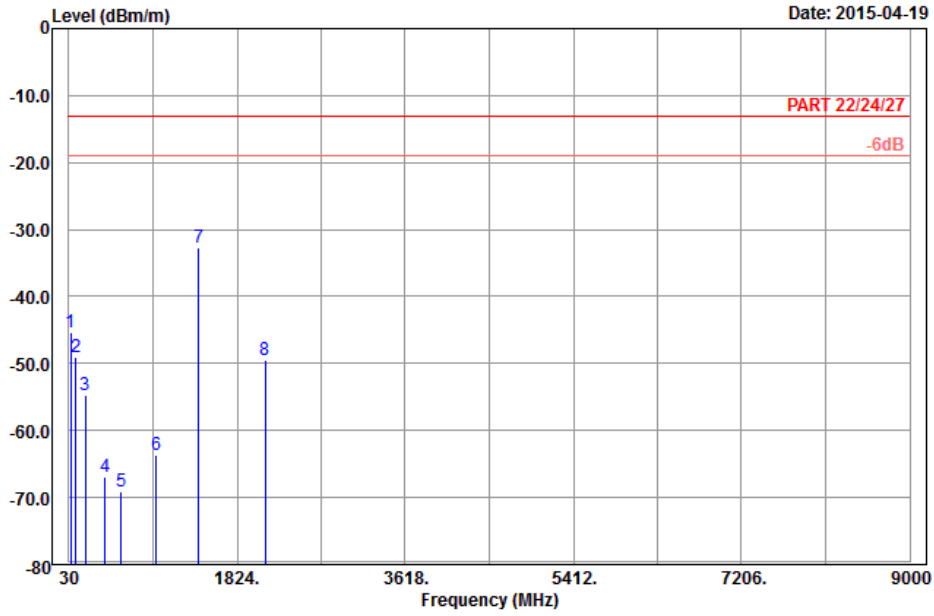

Site : 966 chamber 1
 Condition: PART 22/24/27 3m Vertical
 Remark : LTE_Band 12_QPSK(1,24)_10M_CH23095
 Tested by: Hwa Chiang
 Plane : X

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	47.55	-45.33	-32.22	-13.00	-32.33	-13.11 Peak
2	102.09	-48.98	-39.09	-13.00	-35.98	-9.89 Peak
3	205.23	-54.73	-48.62	-13.00	-41.73	-6.11 Peak
4	414.10	-66.82	-63.76	-13.00	-53.82	-3.06 Peak
5	584.20	-69.05	-68.79	-13.00	-56.05	-0.26 Peak
6	965.00	-63.69	-68.85	-13.00	-50.69	5.16 Peak
7 pp	1415.00	-32.67	-39.03	-13.00	-19.67	6.36 Peak
8	2122.50	-49.54	-60.65	-13.00	-36.54	11.11 Peak



5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---