



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	High Tech Computer Corp.
Applicant Address	23 Hsin Hua Rd., Taoyuan 330, Taiwan
FCC ID	NM8DSDN
Manufacturer's company	High Tech Computer Corp.
Manufacturer Address	23 Hsin Hua Rd., Taoyuan 330, Taiwan

Product Name	Pocket PC
Brand Name	FUJITSU SIEMENS COMPUTER
Model Name	C550 (VGA with BT + WiFi, CPU520); N560 (VGA with GPS + BT + WiFi, CPU624)
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Receive Date	Feb. 09, 2006
Test Date	Feb. 15, 2006
Submission Type	Original Equipment



Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAQ®

Lab Code: 200079-0



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units	5
3.8. Table for Parameters of Test Software Setting	5
3.9. Test Configurations	5
4. TEST RESULT	7
4.1. AC Power Line Conducted Emissions Measurement.....	7
4.2. Maximum Peak Output Power Measurement	12
4.3. Hopping Channel Separation Measurement	14
4.4. Number of Hopping Frequency Measurement.....	19
4.5. Dwell Time Measurement.....	21
4.6. Radiated Emissions Measurement	28
4.7. Band Edge Emissions Measurement	42
4.8. Antenna Requirements	47
5. LIST OF MEASURING EQUIPMENTS	48
6. SPORTON COMPANY PROFILE	50
6.1. Test Location.....	50
7. NVLAP CERTIFICATE OF ACCREDITATION	51
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A21
APPENDIX B. TEST PHOTOS.....	B1 ~ B3



History of This Test Report

Original Issue Date: Feb. 15, 2006

Report No.: FR620911

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : Pocket PC
Brand Name : FUJITSU SIEMENS COMPUTER
Model Name : C550 (VGA with BT + WiFi, CPU520); N560 (VGA with GPS + BT + WiFi, CPU624)
Applicant : High Tech Computer Corp.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 09, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Supervisor
Sporton International Inc.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	20.78 dB
4.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	27.03 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	4.95 dB
4.7	15.247(d)	Band Edge Emissions	Complies	1.22 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.26\text{dB}$	Confidence levels of 95%
Maximum Peak Conducted Output Power	$\pm 0.5\text{dB}$	Confidence levels of 95%
Hopping Channel Separation / Dwell Time	$\pm 6.25 \times 10^{-7}$	Confidence levels of 95%
Radiated Emissions / Band Edge Emissions	$\pm 3.72\text{dB}$	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

EUT is a pocket PC with two models. C550 with IEEE 802.11b/g and Bluetooth radio functions. N560 with IEEE 802.11b/g, GPS and Bluetooth radio functions. Only the radio detail of BT is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Radio Type	Intentional Transceiver
Power Type	Power Adapter & Host (Base) & Battery
Interface Type	USB
Modulation	FHSS (GFSK)
Data Rate (Mbps)	1
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	888.00 kHz
Conducted Output Power	2.97 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	JS P	PSC11R-050	Input: 100~240VAC Output: 5VDC
Battery	FUJITSU SIEMENS	PC500BS	3.7VDC, 1200 mAh
Cradle	FUJITSU SIEMENS	PL500CS	
Others			
USB Cable			

3.3. Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	Chip Antenna	NA	0.00

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

3.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	1 Mbps	Hopping 0~78	1
Max. Conducted Output Power	GFSK	1 Mbps	0/39/78	NA
Hopping Channel Separation	GFSK	1 Mbps	0~1/39~40/77~78	NA
Number of Hopping Frequency	GFSK	1 Mbps	0~78	NA
Dwell Time	DH1/DH3/DH5	1 Mbps	0/39/78	NA
Radiated Emissions Below 1GHz	GFSK	1 Mbps	39	1
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	1
Band Edge Emissions				
Band Edge Emissions	GFSK / 11b/CCK	1/11Mbps	0/1, 78/11	1
	GFSK / 11g/BPSK	1/6 Mbps	0/1, 78/11	1

During testing the Bluetooth, the WLAN function was powered on and was programmed accordingly to evaluate the collocation condition.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

NA

3.8. Table for Parameters of Test Software Setting


During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Bluetooth


Test Software Version	BTESTMODE2		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	7	7	7

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration

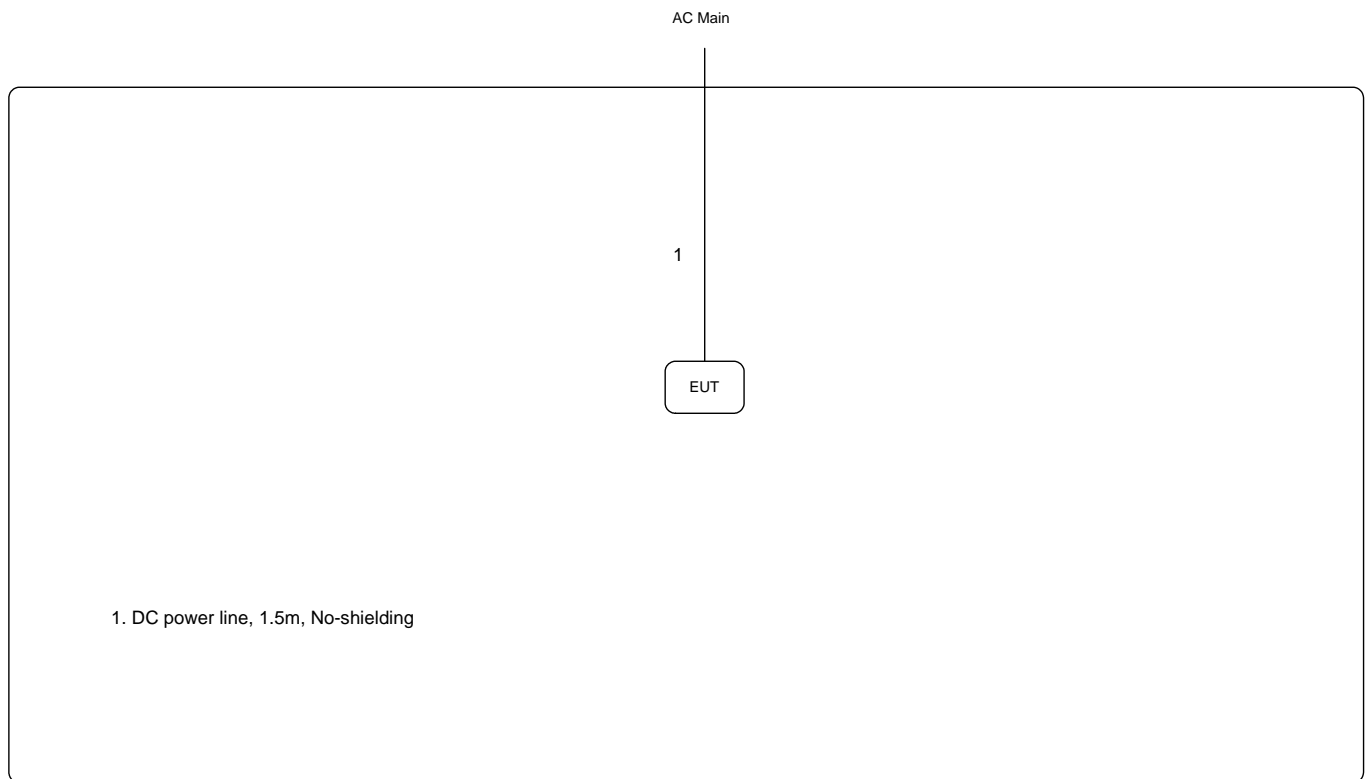

3.9.2. AC Power Line Conduction Emissions Test Configuration

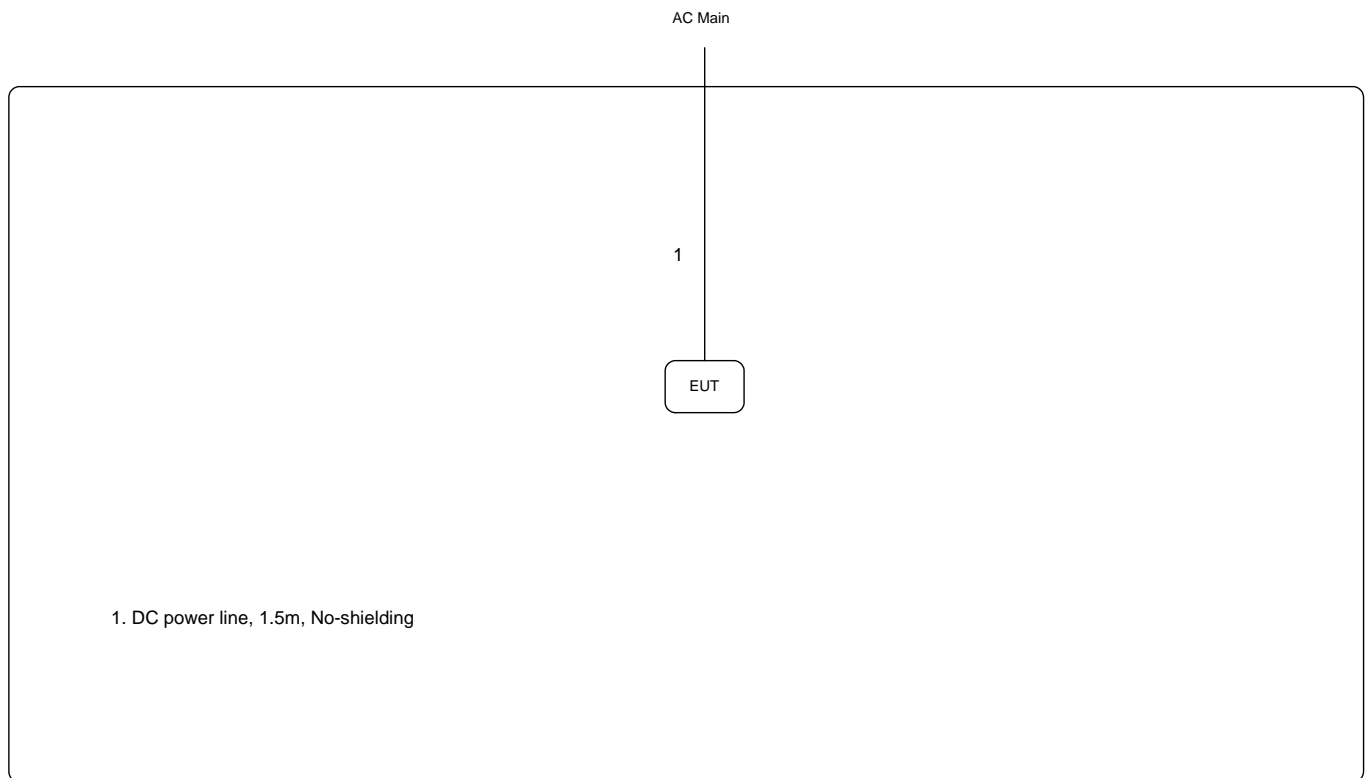

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

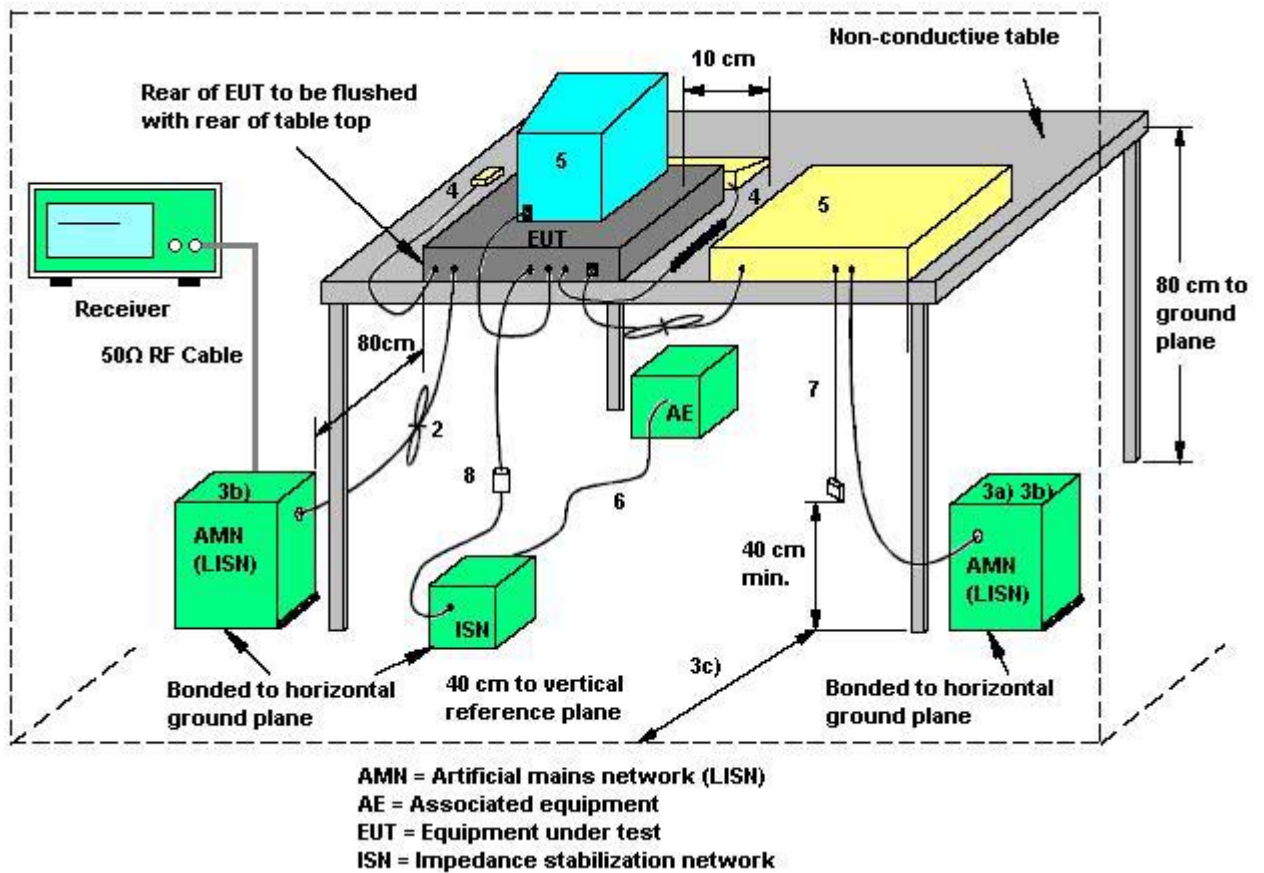

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mice, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	26	Humidity	46%
Test Engineer	Ted Chiu	Phase	Line
Configuration	Normal Link		

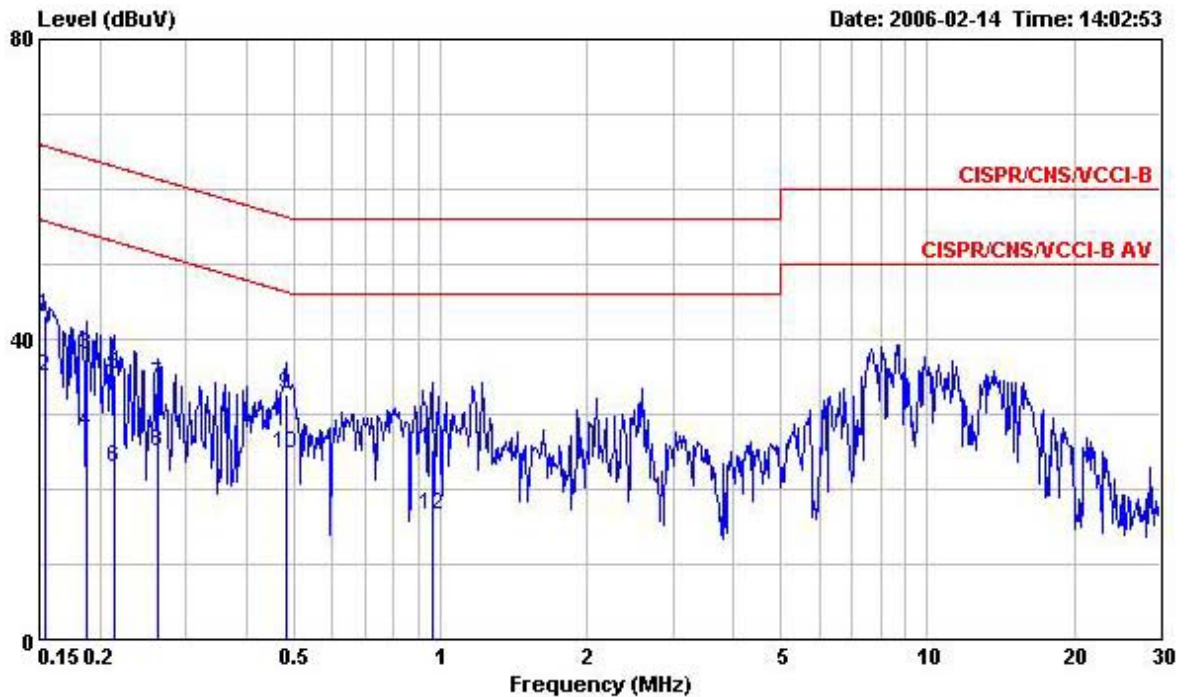

SPORTON LAB.

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	@0.1540270	43.07	-22.71	65.78	42.46	0.10	0.51	QP
2	@0.1540270	35.00	-20.78	55.78	34.39	0.10	0.51	Average
3	0.1873850	37.86	-26.29	64.15	37.48	0.10	0.28	QP
4	0.1873850	27.75	-26.40	54.15	27.37	0.10	0.28	Average
5	0.2139240	35.26	-27.79	63.05	34.94	0.10	0.22	QP
6	0.2139240	23.00	-30.05	53.05	22.68	0.10	0.22	Average
7	0.2616370	33.88	-27.50	61.38	33.50	0.10	0.28	QP
8	0.2616370	24.88	-26.50	51.38	24.50	0.10	0.28	Average
9	@0.4811910	32.54	-23.78	56.32	32.23	0.10	0.21	QP
10	@0.4811910	24.70	-21.62	46.32	24.39	0.10	0.21	Average
11	0.9632810	25.35	-30.65	56.00	24.60	0.10	0.65	QP
12	0.9632810	16.50	-29.50	46.00	15.75	0.10	0.65	Average

Temperature	26	Humidity	46%
Test Engineer	Ted Chiu	Phase	Neutral
Configuration	Normal Link		

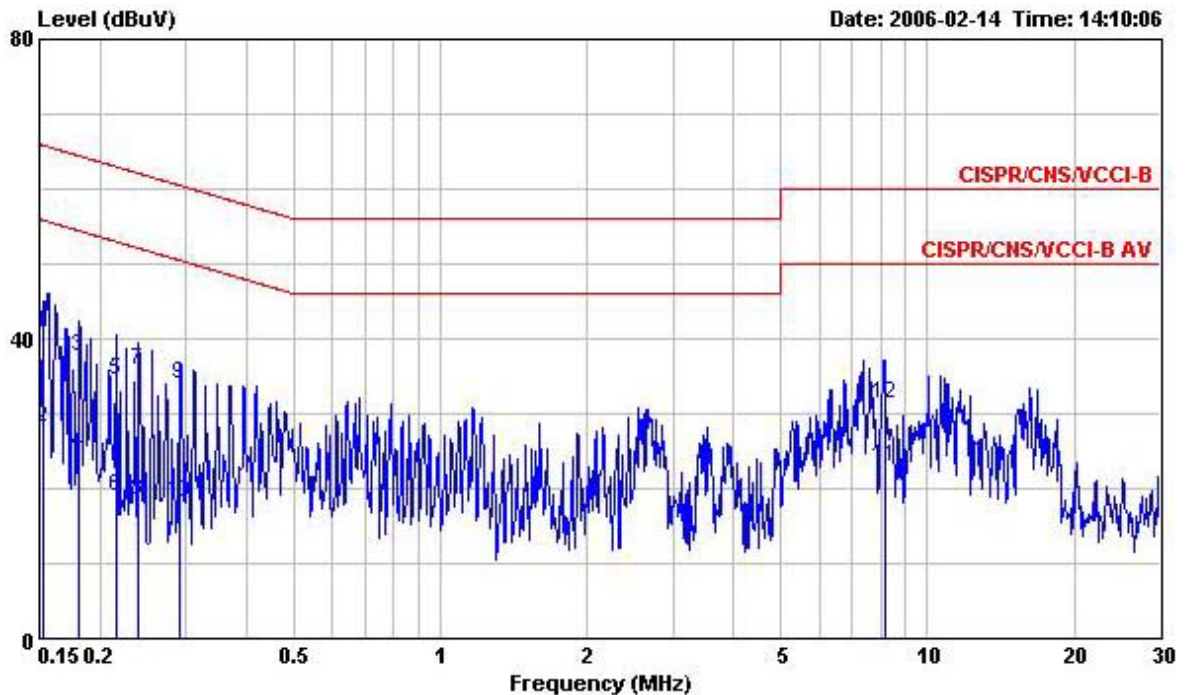

0.000000 0.000000

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	@0.1526650	40.69	-25.16	65.85	40.07	0.10	0.52	QP
2	0.1526650	28.05	-27.80	55.85	27.43	0.10	0.52	Average
3	0.1815220	37.54	-26.88	64.42	37.13	0.10	0.31	QP
4	0.1815220	24.79	-29.63	54.42	24.38	0.10	0.31	Average
5	0.2162030	34.34	-28.62	62.96	34.02	0.10	0.22	QP
6	0.2162030	18.84	-34.12	52.96	18.52	0.10	0.22	Average
7	0.2403720	35.79	-26.29	62.08	35.44	0.10	0.25	QP
8	0.2403720	18.44	-33.64	52.08	18.09	0.10	0.25	Average
9	0.2924290	33.98	-26.48	60.46	33.57	0.10	0.31	QP
10	0.2924290	18.12	-32.34	50.46	17.71	0.10	0.31	Average
11	8.150	22.80	-27.20	50.00	22.34	0.18	0.28	Average
12	8.150	31.23	-28.77	60.00	30.77	0.18	0.28	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

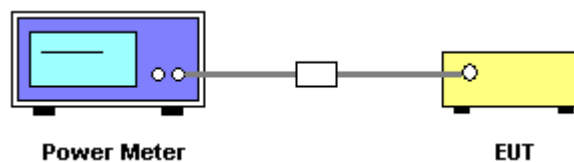

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	28	Humidity	58%
Test Engineer	Sam Lee	Configurations	FHSS (GFSK)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	2.92	30.00	Complies
39	2441 MHz	2.97	30.00	Complies
78	2480 MHz	2.65	30.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

4.3.4. Test Setup Layout

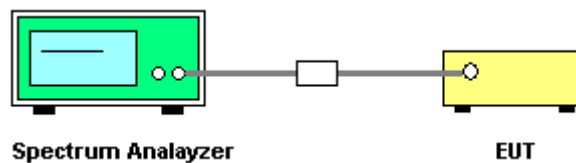

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.3.7. Test Result of Hopping Channel Separation

Temperature	28	Humidity	58%
Test Engineer	Sam Lee	Configurations	FHSS (GFSK)

Frequency	Ch. Separation (MHz)	20dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Result
2402 MHz	1.00	952.00	876.00	Complies
2441 MHz	1.00	952.00	872.00	Complies
2480 MHz	1.00	956.00	888.00	Complies


Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

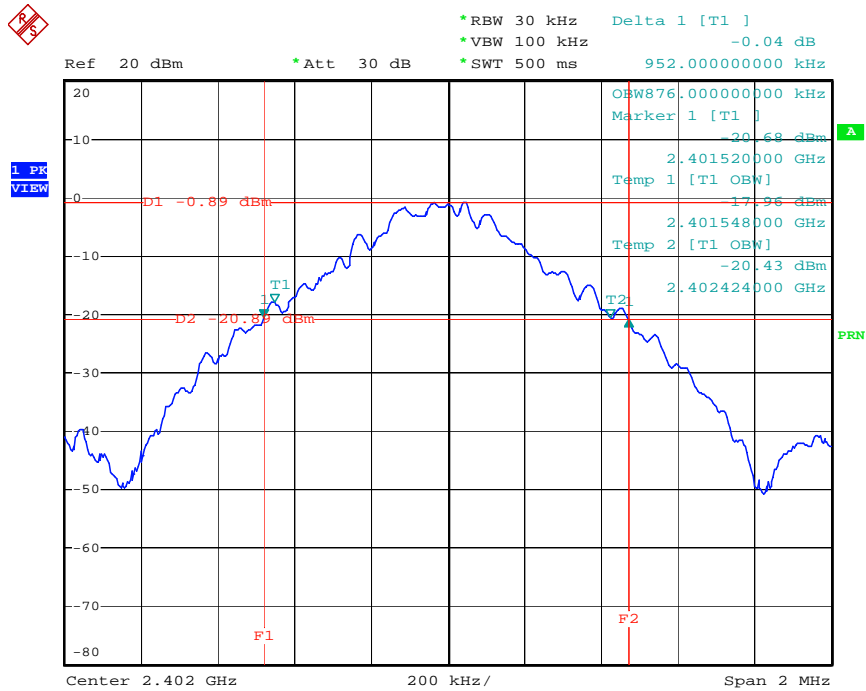


Date: 10.FEB.2006 15:52:45

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

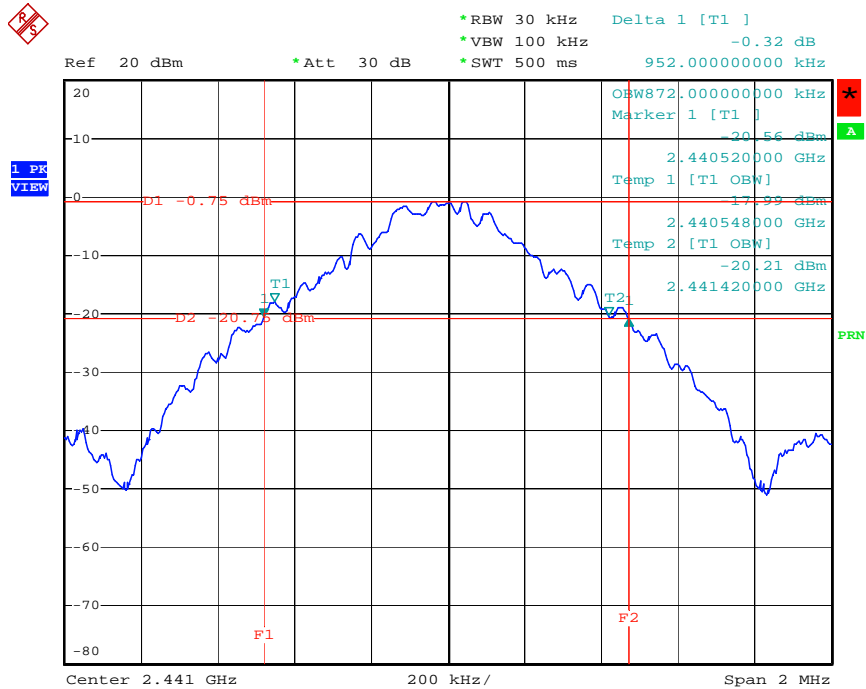


Date: 10.FEB.2006 15:55:24

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

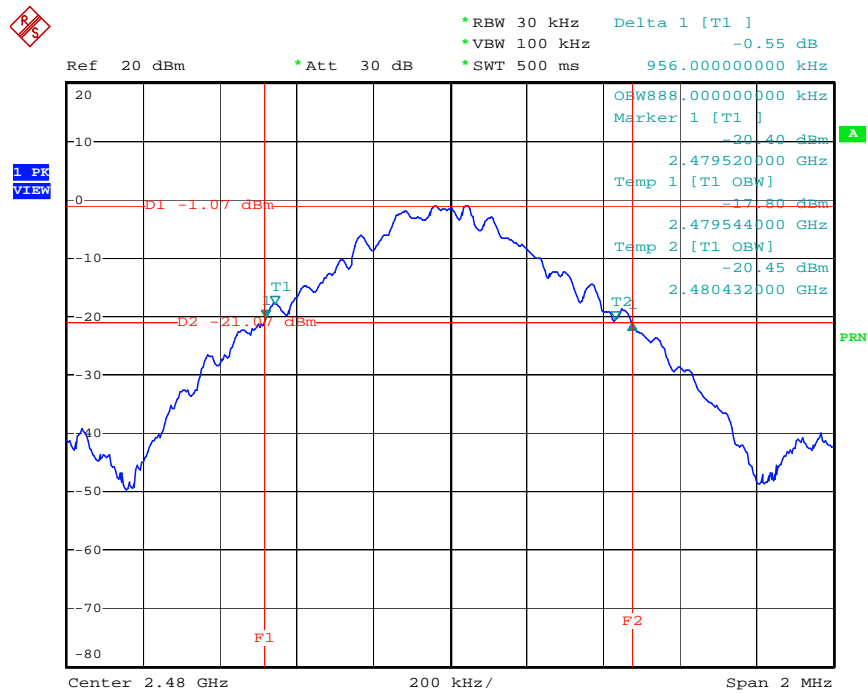


Date: 10.FEB.2006 15:56:35

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

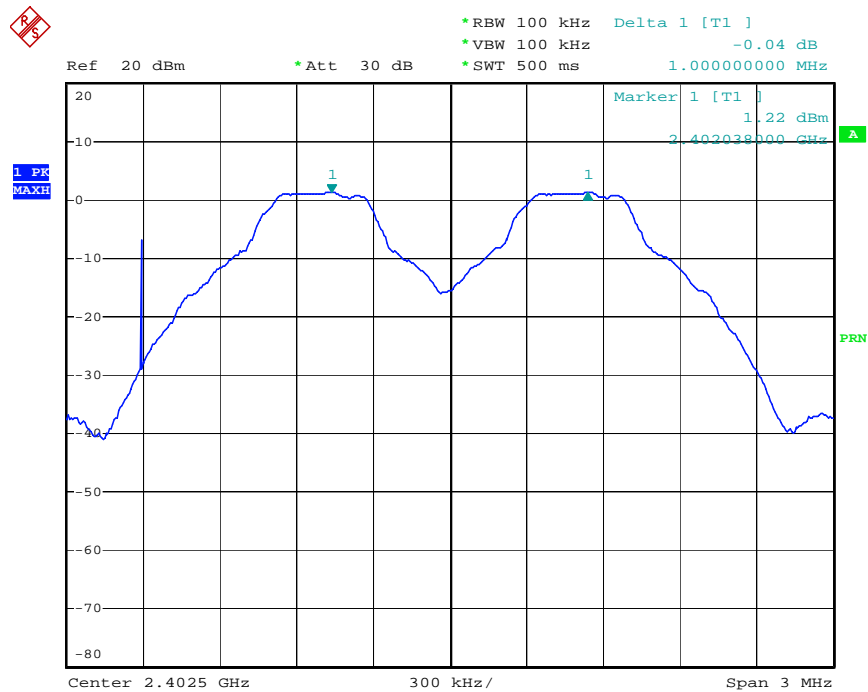


Date: 10.FEB.2006 17:10:28

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

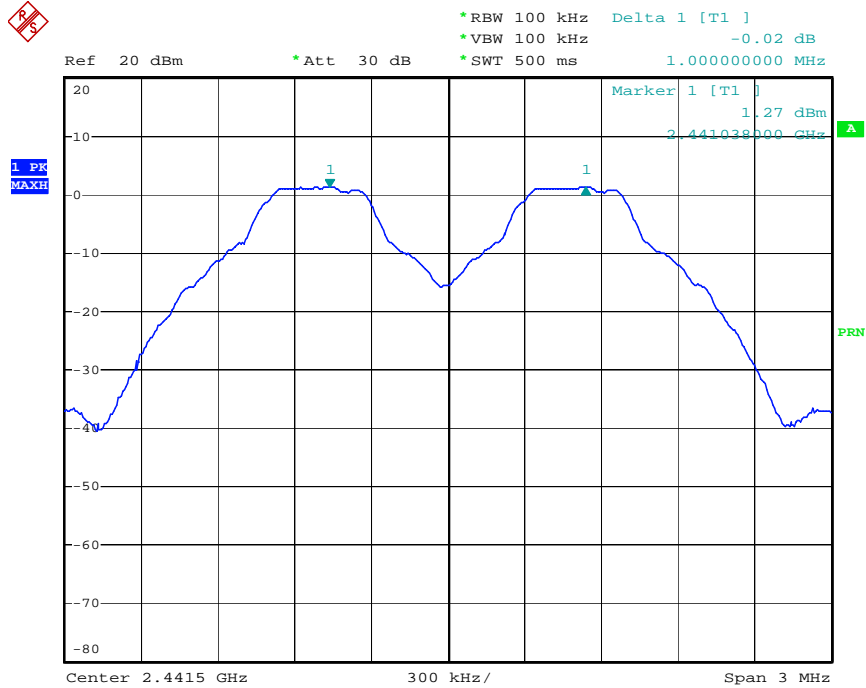

Date: 10.FEB.2006 17:09:45

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

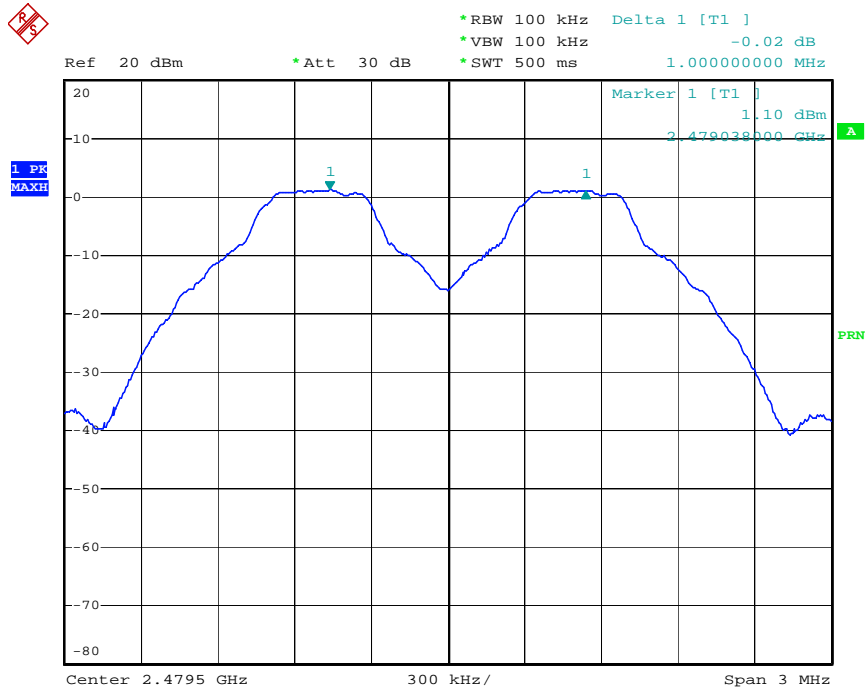

Date: 10.FEB.2006 17:09:00

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

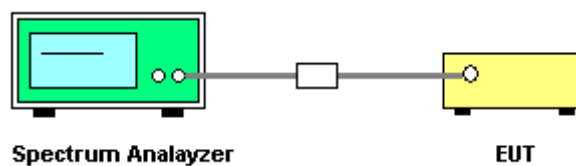

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	28	Humidity	58%
Test Engineer	Sam Lee	Configurations	FHSS (GFSK)

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	75	Complies

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

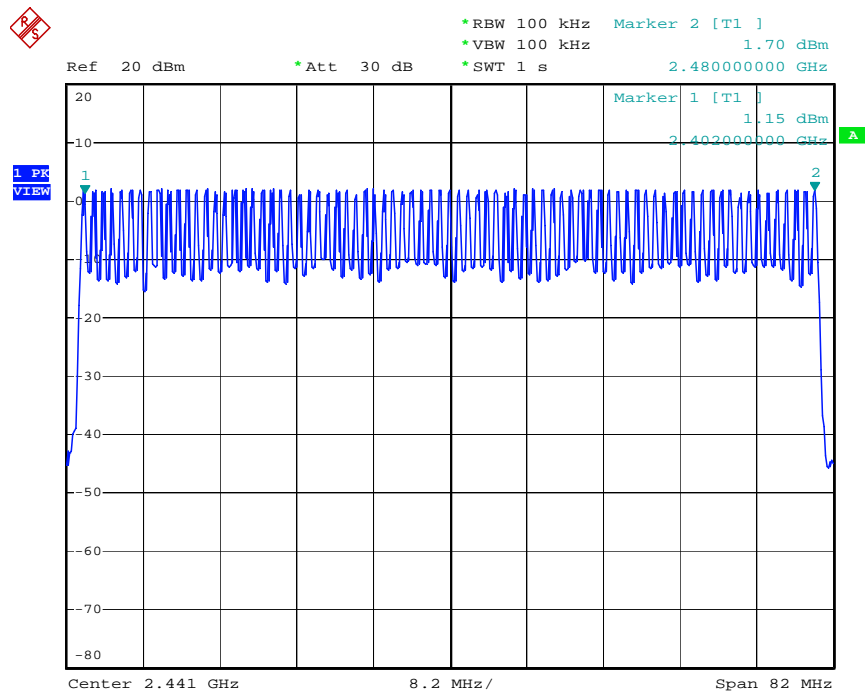

Date: 10.FEB.2006 17:07:34

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
10. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
11. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

4.5.4. Test Setup Layout

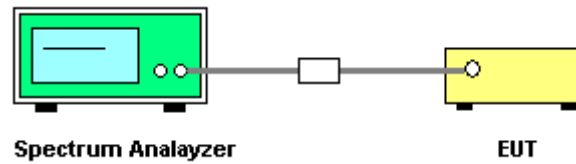

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

Temperature	28	Humidity	58%
Test Engineer	Sam Lee	Configurations	FHSS (GFSK)


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.9800	0.3179	0.4000	Complies
DH3	2402 MHz	1.7400	0.2784	0.4000	Complies
DH1	2402 MHz	0.4800	0.1536	0.4000	Complies
DH5	2441 MHz	2.9800	0.3179	0.4000	Complies
DH3	2441 MHz	1.7400	0.2784	0.4000	Complies
DH1	2441 MHz	0.4800	0.1536	0.4000	Complies
DH5	2480 MHz	2.9800	0.3179	0.4000	Complies
DH3	2480 MHz	1.7400	0.2784	0.4000	Complies
DH1	2480 MHz	0.4800	0.1536	0.4000	Complies

DH5 Dwell Time Plot on Channel 0 / 2402 MHz

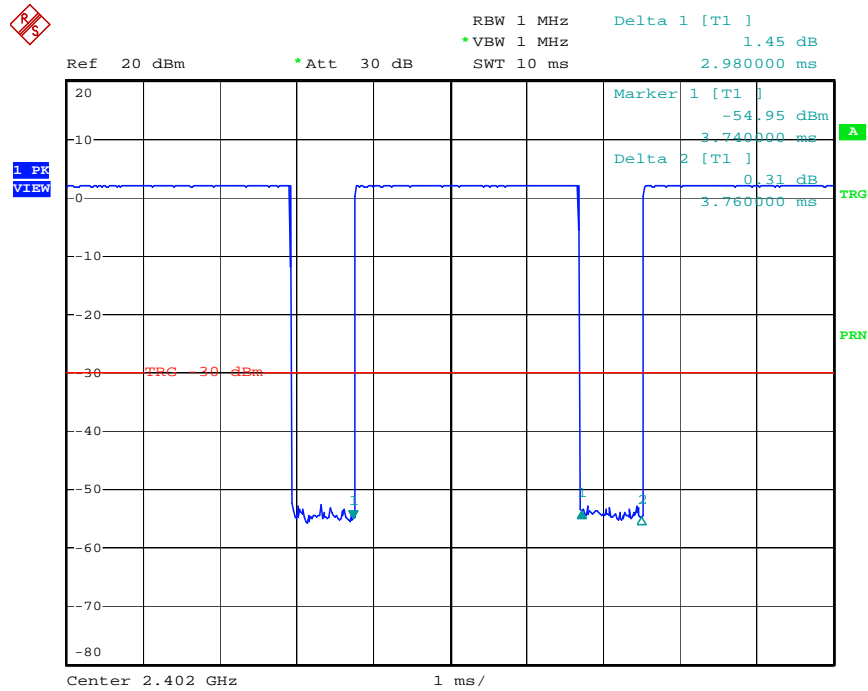


Date: 10.FEB.2006 16:37:44

DH3 Dwell Time Plot on Channel 0 / 2402 MHz

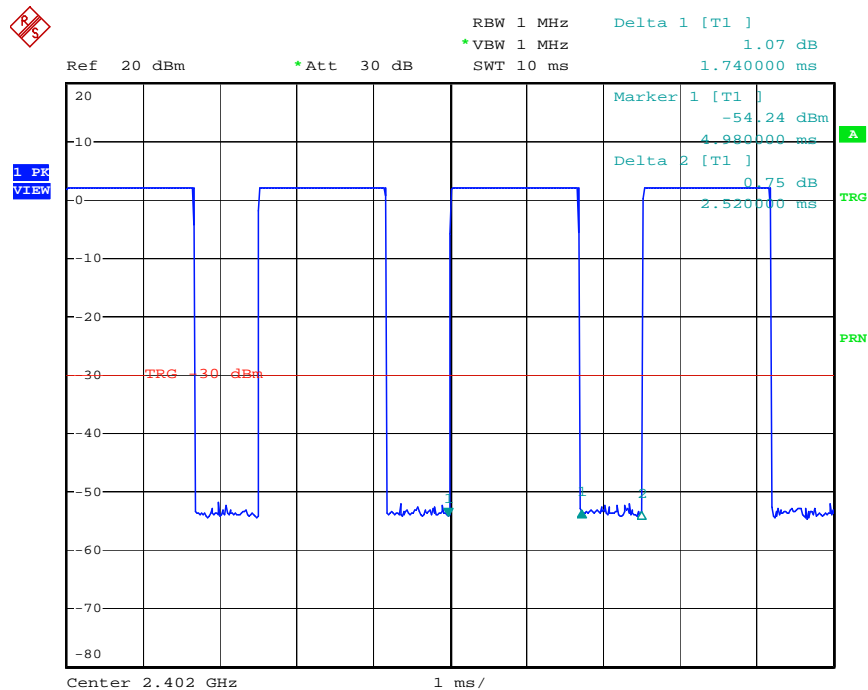


Date: 10.FEB.2006 16:36:15

DH1 Dwell Time Plot on Channel 0 / 2402 MHz

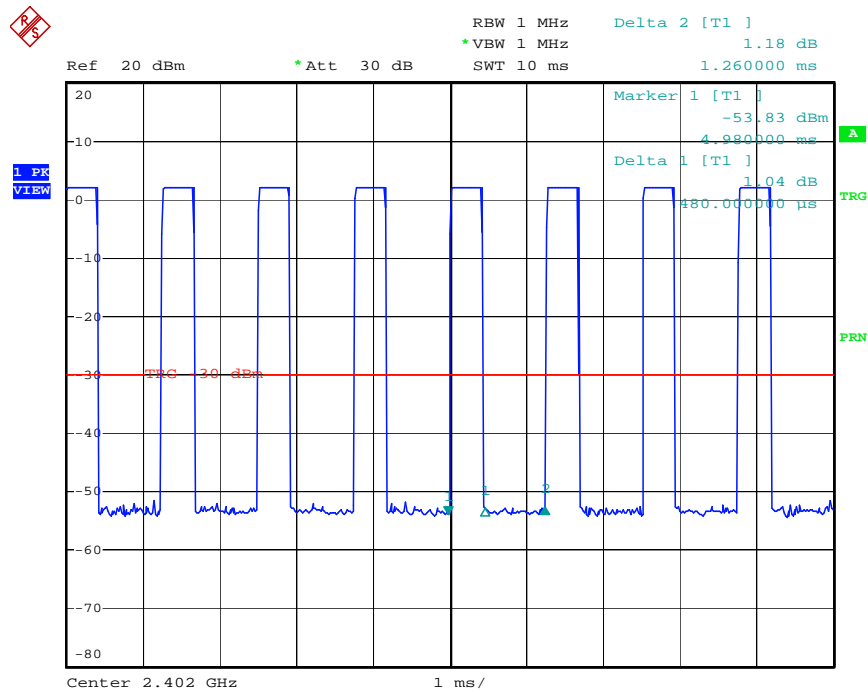


Date: 10.FEB.2006 16:31:33

DH5 Dwell Time Plot on Channel 39 / 2441 MHz

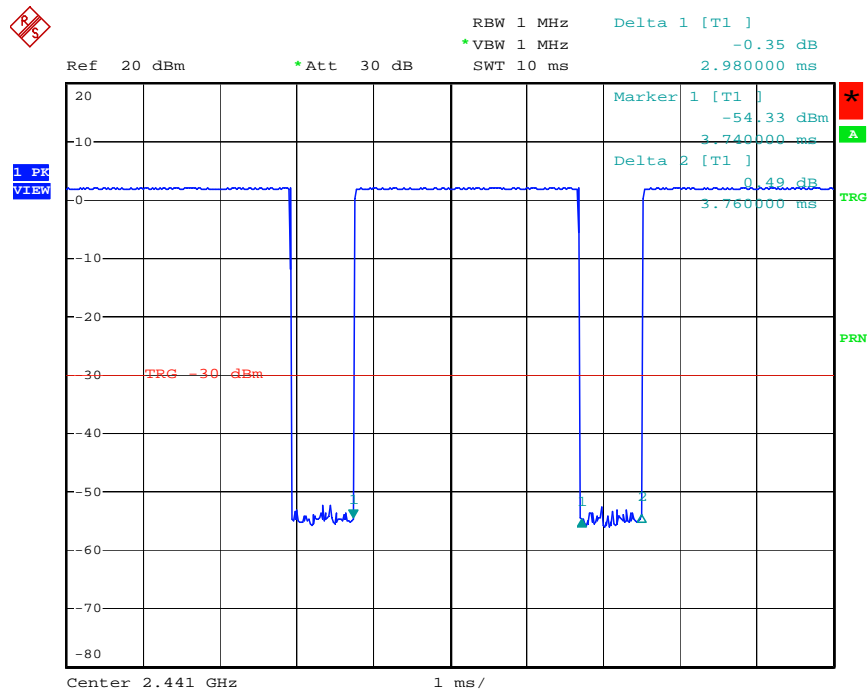


Date: 10.FEB.2006 16:38:08

DH3 Dwell Time Plot on Channel 39 / 2441 MHz

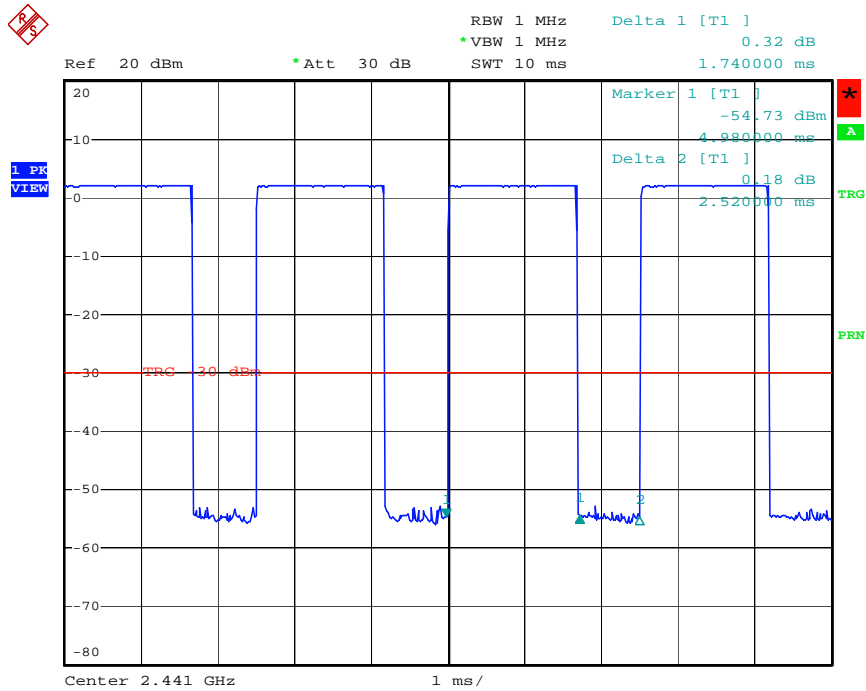


Date: 10.FEB.2006 16:36:38

DH1 Dwell Time Plot on Channel 39 / 2441 MHz

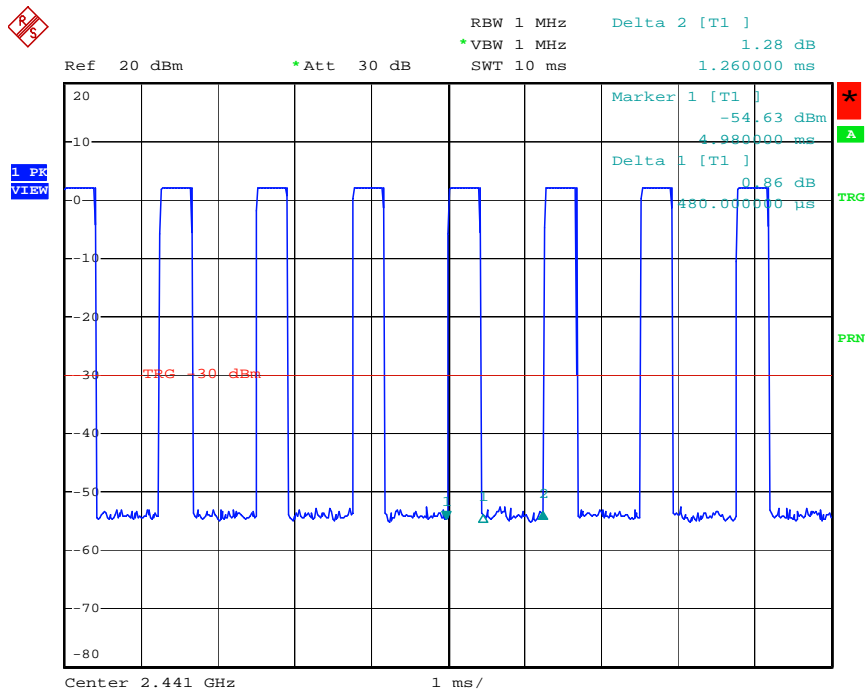


Date: 10.FEB.2006 16:32:16

DH5 Dwell Time Plot on Channel 78 / 2480 MHz

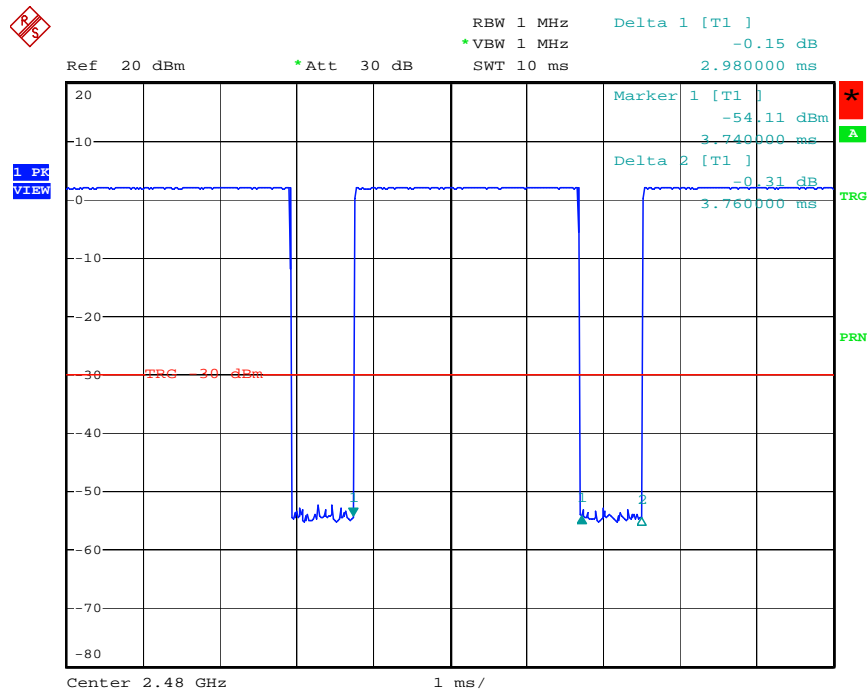


Date: 10.FEB.2006 16:38:33

DH3 Dwell Time Plot on Channel 78 / 2480 MHz

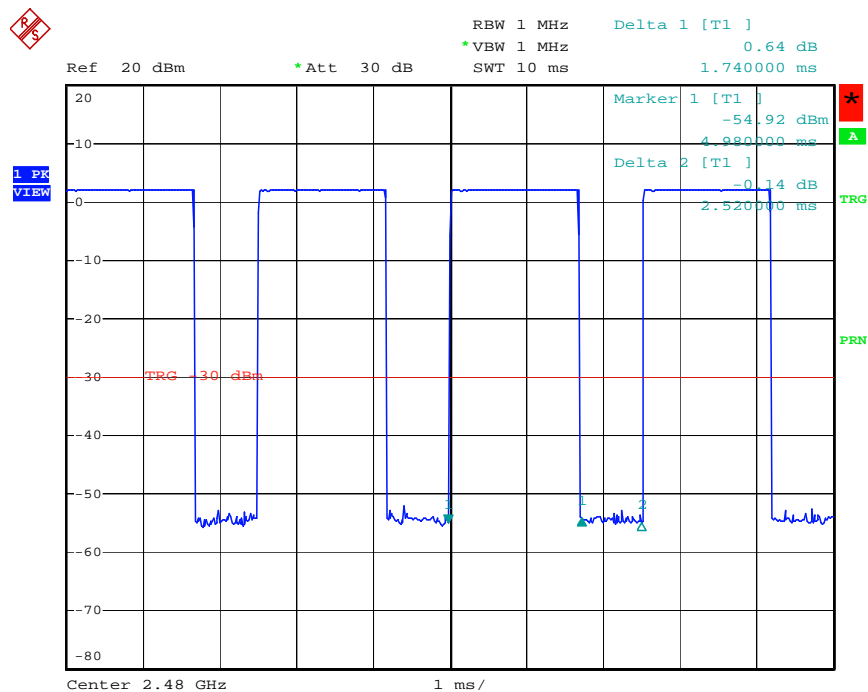

Date: 10.FEB.2006 16:37:02

DH1 Dwell Time Plot on Channel 78 / 2480 MHz

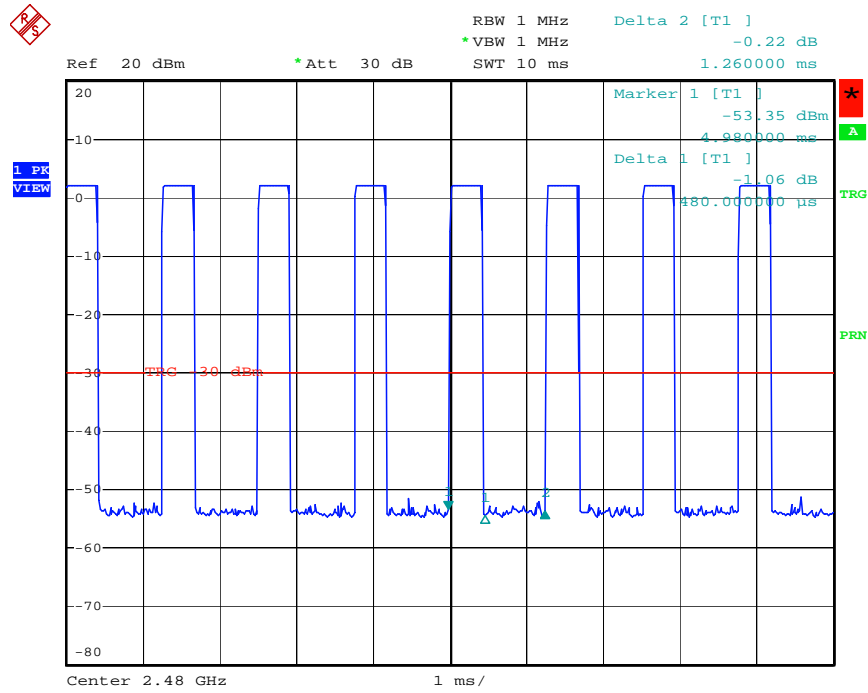

Date: 10.FEB.2006 16:32:45

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

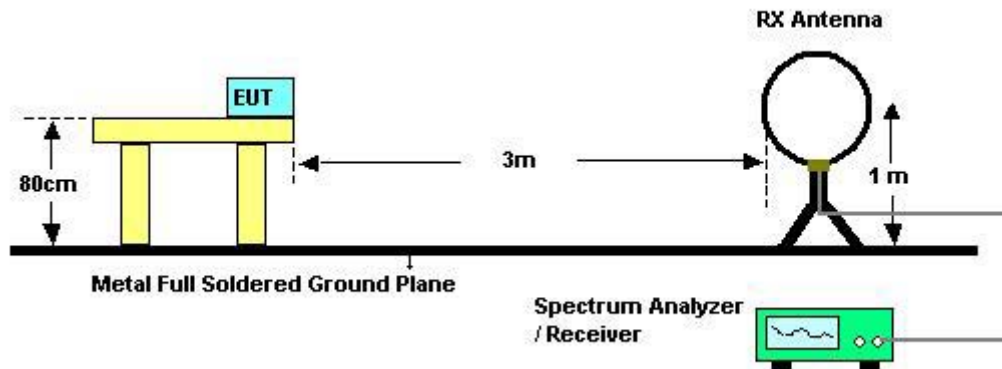

For radiated emissions above 30MHz

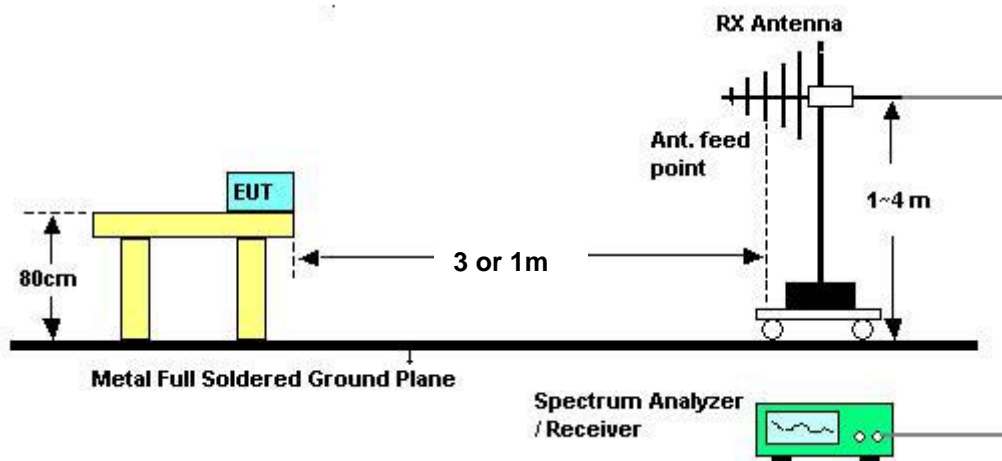

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	channel 39

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	channel 39

Horizontal

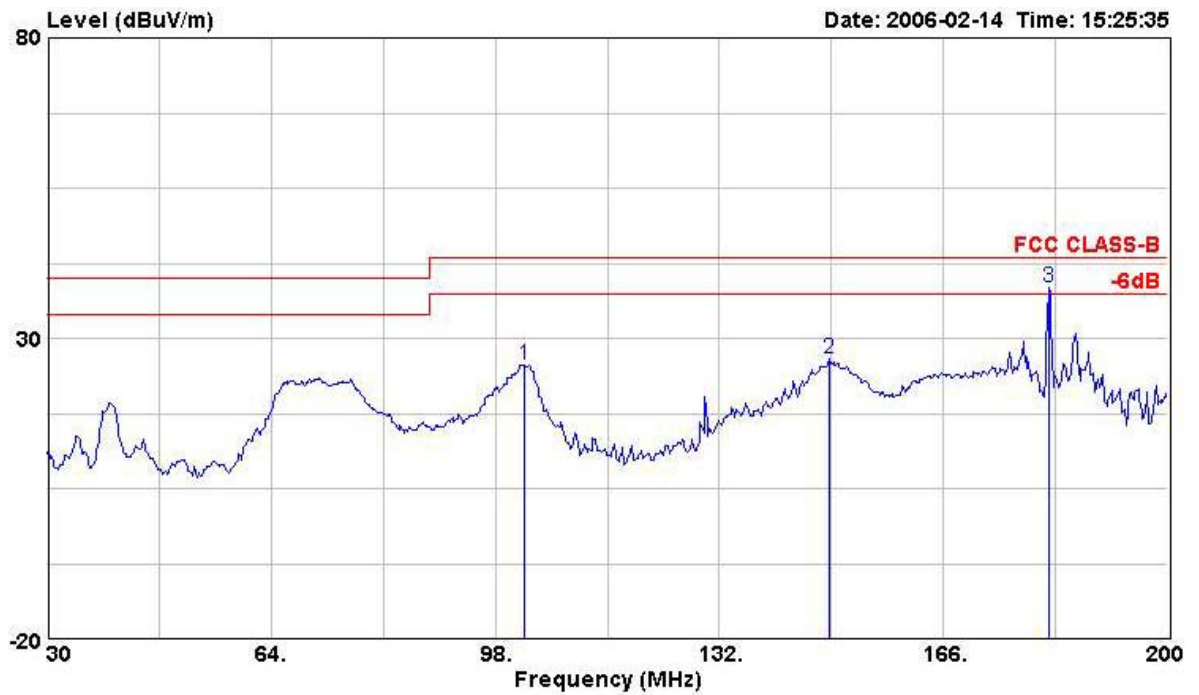


	Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
1	102.420	25.64	-17.86	44.92	43.50	1.44	9.33	30.05	Peak	---	---
2	148.660	26.64	-16.86	42.91	43.50	1.89	11.99	30.14	Peak	---	---
3 !	181.980	38.55	-4.95	51.83	43.50	2.41	14.35	30.05	Peak	---	---

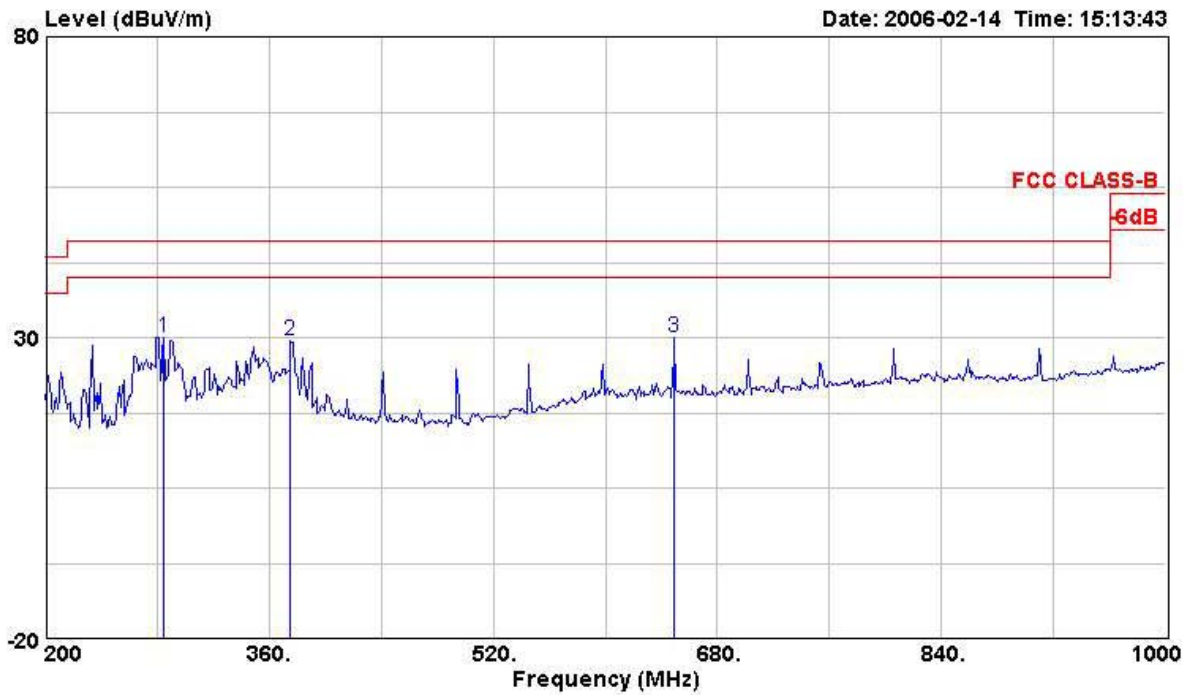


	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp	Remark	Table	Ant
	MHz	dBUV/m	Limit	Level	Line	Loss	Factor	Factor		Pos	Pos
			dB	dBuV	dBUV/m	dB	dB/m	dB		deg	cm
1	284.800	30.10	-15.90	44.43	46.00	2.74	13.36	30.44	Peak	---	---
2	375.200	29.43	-16.57	40.59	46.00	3.42	16.06	30.63	Peak	---	---
3	649.600	30.05	-15.95	35.76	46.00	4.58	20.55	30.84	Peak	---	---

Vertical

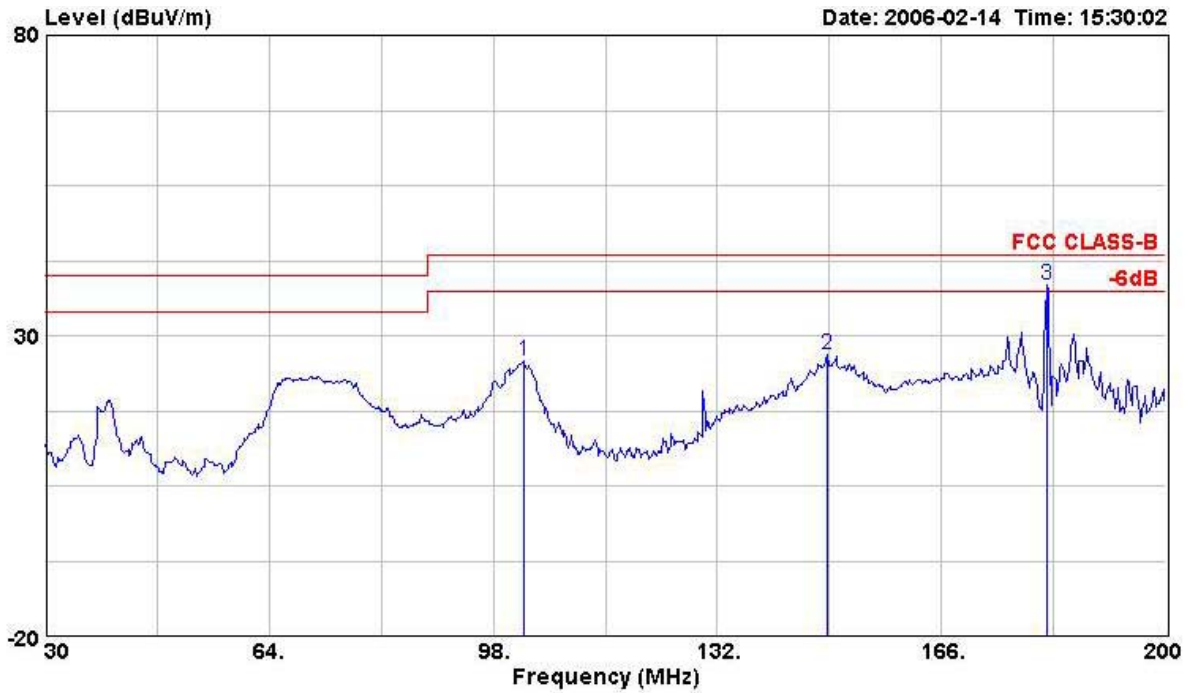

	Freq	Level	Over	Read	Limit	CableAntenna	Preamp		Table	Ant
	MHz	dBUV/m	Limit	Level	Line	Loss	Factor	Factor	Pos	Pos
			dB	dBuV	dBUV/m	dB	dB/m	dB	deg	cm
1	102.590	25.67	-17.83	44.91	43.50	1.46	9.36	30.05	Peak	---
2	148.660	26.80	-16.70	43.07	43.50	1.89	11.99	30.14	Peak	---
3 !	181.980	38.33	-5.17	51.61	43.50	2.41	14.35	30.05	Peak	---

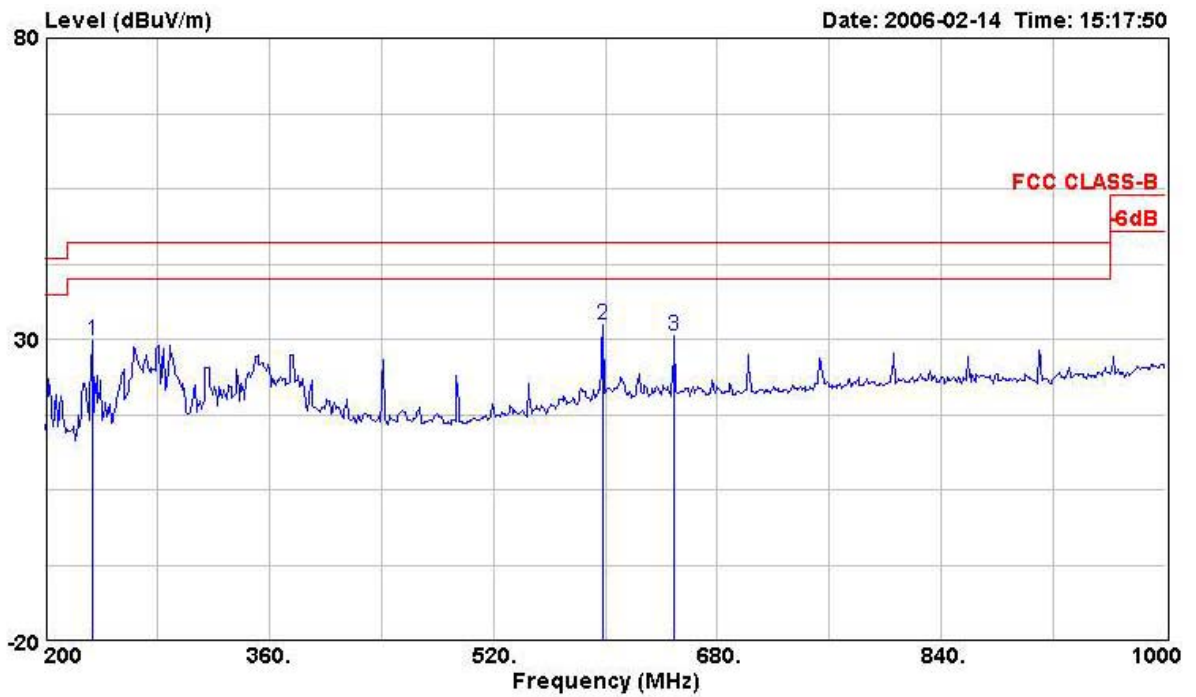

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
1	233.600	29.72	-16.28	43.80	46.00	2.61	13.58	30.27	Peak	---	---
2	598.400	32.34	-13.66	38.12	46.00	4.53	20.33	30.64	Peak	---	---
3	649.600	30.55	-15.45	36.26	46.00	4.58	20.55	30.84	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	BT channel 0 / 802.11b channel 1

Horizontal

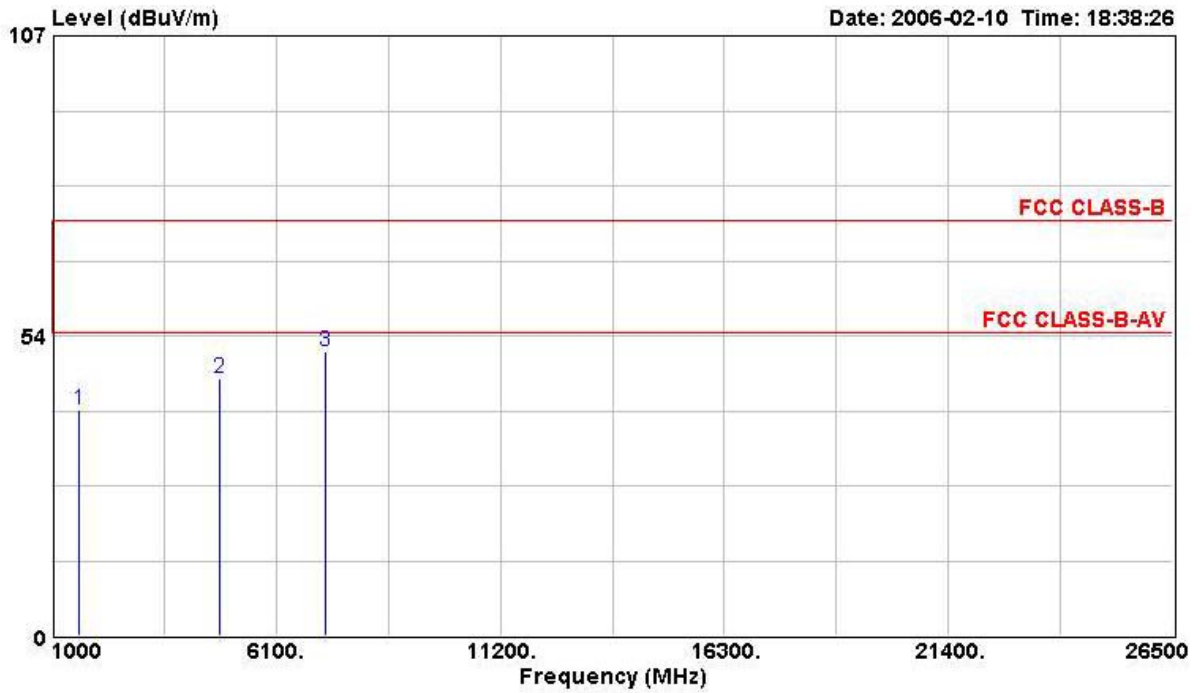

	Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
1	1620.000	40.41	-33.59	45.18	74.00	2.38	25.81	32.96	PEAK	---	---
2	4804.000	45.79	-28.21	41.02	74.00	4.22	33.10	32.54	PEAK	---	---
3	7206.000	50.80	-23.20	41.97	74.00	5.29	35.90	32.35	PEAK	---	---


Vertical

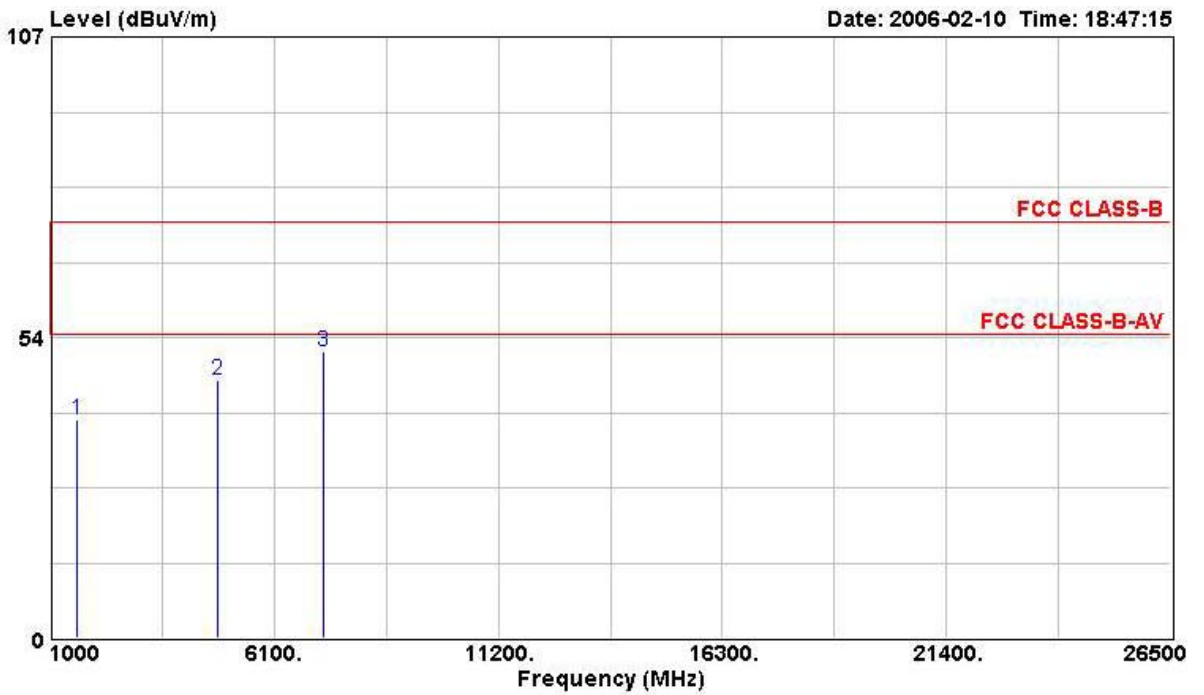

	Freq	Level	Over	Read	Limit	CableAntenna	Preamp	Remark	Table	Ant
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor		Pos	Pos
			dB	dBuV	dBuV/m	dB	dB/m	dB	deg	cm
1	1620.000	38.80	-35.20	43.58	74.00	2.38	25.81	32.96 PEAK	---	---
2	4804.000	46.00	-28.00	41.22	74.00	4.22	33.10	32.54 PEAK	---	---
3	7206.000	50.87	-23.13	42.04	74.00	5.29	35.90	32.35 PEAK	---	---


Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	BTchannel 39/ 802.11b channel 6

Horizontal

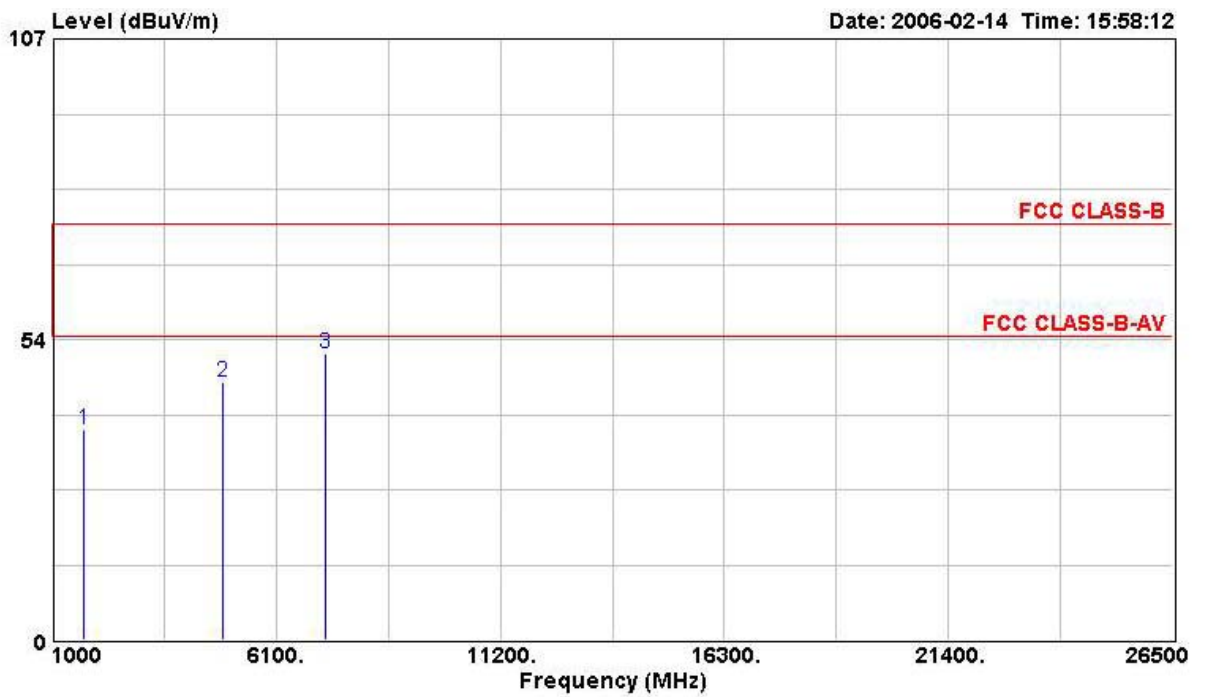

	Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
1	1728.000	37.39	-36.61	41.48	74.00	2.46	26.33	32.87	PEAK	---	---
2	4882.000	45.88	-28.12	40.97	74.00	4.25	33.21	32.55	PEAK	---	---
3	7232.000	50.88	-23.12	42.02	74.00	5.29	35.98	32.40	PEAK	---	---

Vertical

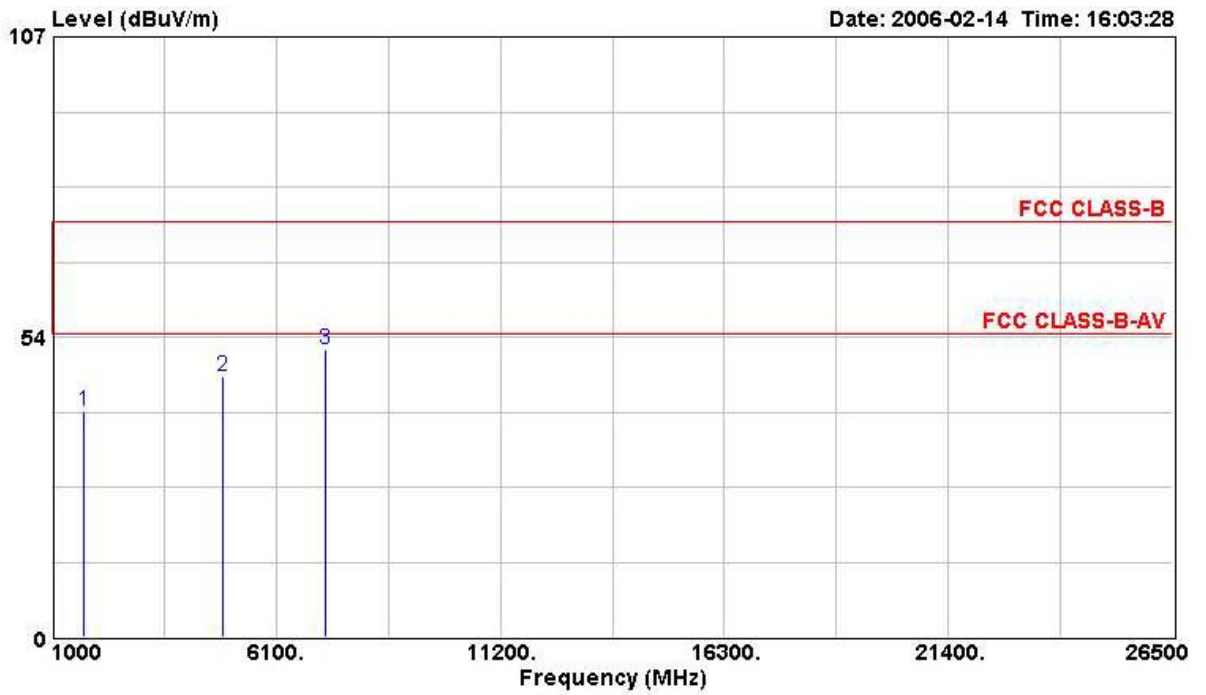


	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp	Remark	Table	Ant
	MHz	dBUV/m	Limit	Level	Line	Loss	Factor	Factor		Pos	Pos
			dB	dBuV	dBUV/m	dB	dB/m	dB		deg	cm
1	1728.000	40.29	-33.71	44.38	74.00	2.46	26.33	32.87	PEAK	---	---
2	4882.000	46.45	-27.55	41.54	74.00	4.25	33.21	32.55	PEAK	---	---
3	7232.000	51.21	-22.79	42.35	74.00	5.29	35.98	32.40	PEAK	---	---




Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	BT channel 78 / 802.11b channel 11

Horizontal

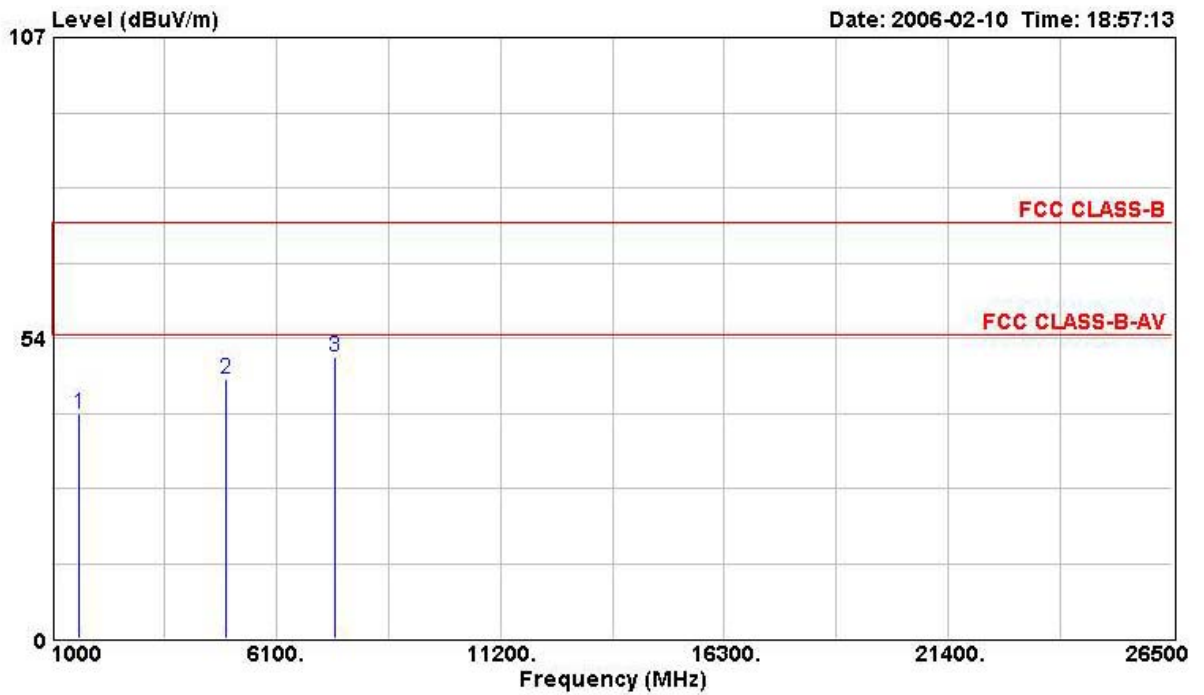

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
1	1616.000	39.98	-34.02	44.75	74.00	2.38	25.81	32.96	PEAK	---	---
2	4960.000	46.25	-27.75	41.19	74.00	4.28	33.34	32.56	PEAK	---	---
3	7440.000	50.17	-23.83	41.42	74.00	5.14	36.48	32.87	PEAK	---	---

Vertical

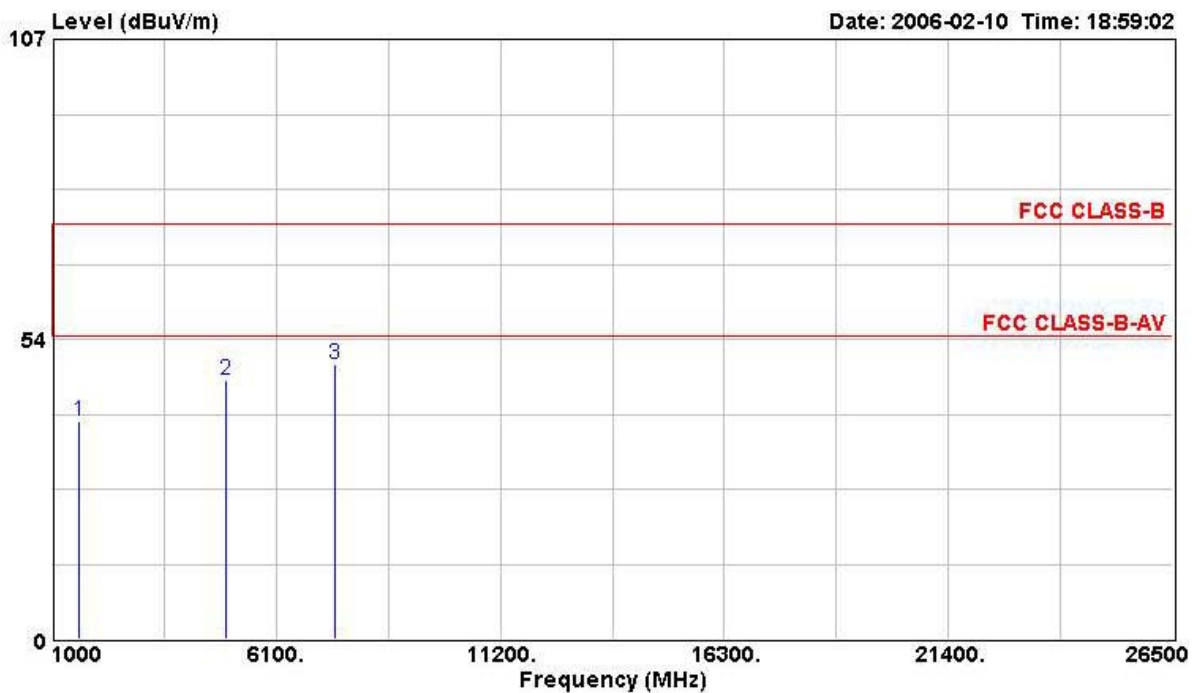

	Freq	Level	Over	Read	Limit	CableAntenna	Preamp		Table	Ant	
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Pos	Pos	
			dB	dBuV	dBuV/m	dB	dB/m	dB	deg	cm	
1	1620.000	38.85	-35.15	43.62	74.00	2.38	25.81	32.96	PEAK	---	---
2	4960.000	46.32	-27.68	41.26	74.00	4.28	33.34	32.56	PEAK	---	---
3	7440.000	49.06	-24.94	40.32	74.00	5.14	36.48	32.87	PEAK	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge Emissions and Field Strength

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	channel 0

Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2390.000	54.81	-19.19	23.79	74.00	2.81	28.21	0.00	Peak	---	---
2401.770	102.32	28.32	71.30		2.81	28.21	0.00	Peak	---	---
2390.000	43.52	-10.48	12.50	54.00	2.81	28.21	0.00	Average	---	---
2401.770	101.90	47.90	70.88		2.81	28.21	0.00	Average	---	---

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	channel 39

Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2441.100	100.53	26.53	69.40		2.83	28.31	0.00	Peak	---	---
2441.100	99.74	45.74	68.61		2.83	28.31	0.00	Average	---	---

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	channel 78

Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2479.860	98.30	24.30	67.09		2.84	28.37	0.00	Peak	---	---
2483.500	62.16	-11.84	30.95	74.00	2.84	28.37	0.00	Peak	---	---
2480.050	97.85	43.85	66.64		2.84	28.37	0.00	Average	---	---
2483.500	50.33	-3.67	19.12	54.00	2.84	28.37	0.00	Average	---	---



Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	802.11b channel 1 + BT channel 00

Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2390.000	69.31	-4.69	38.29	74.00	2.81	28.21	0.00	Peak	---	---
2410.890	107.89	33.89	76.84		2.81	28.24	0.00	Peak	---	---
2390.000	52.78	-1.22	21.76	54.00	2.81	28.21	0.00	Average	---	---
2410.130	99.50	45.50	68.45		2.81	28.24	0.00	Average	---	---

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	802.11b channel 11 + BT channel 78

Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2462.570	104.62	30.62	73.44		2.84	28.34	0.00	Peak	---	---
2483.500	61.69	-12.31	30.48	74.00	2.84	28.37	0.00	Peak	---	---
2462.570	96.68	42.68	65.50		2.84	28.34	0.00	Average	---	---
2483.500	48.98	-5.02	17.77	54.00	2.84	28.37	0.00	Average	---	---



Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	802.11g channel 1 + BT channel 00

Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2387.900	67.15	-6.85	36.13	74.00	2.81	28.21	0.00	Peak	---	---
2404.050	106.03	32.03	74.98		2.81	28.24	0.00	Peak	---	---
2387.900	48.34	-5.66	17.32	54.00	2.81	28.21	0.00	Average	---	---
2406.330	93.60	39.60	62.55		2.81	28.24	0.00	Average	---	---

Temperature	26	Humidity	58%
Test Engineer	Vic Xiao	Configurations	802.11g channel 11 + BT channel 78

Freq	Level	Over Limit	Read Level	Limit Line	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	Table Pos	Ant Pos
MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		deg	cm
2457.820	103.79	29.79	72.63		2.83	28.34	0.00	Peak	---	---
2483.500	62.28	-11.72	31.07	74.00	2.84	28.37	0.00	Peak	---	---
2458.010	90.79	36.79	59.63		2.83	28.34	0.00	Average	---	---
2483.500	49.85	-4.15	18.64	54.00	2.84	28.37	0.00	Average	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Receiving maximum band edge emissions are Vertical Polarization.


For Emission not in Restricted Band

Low Band Edge Plot on Channel 0 / 2402 MHz

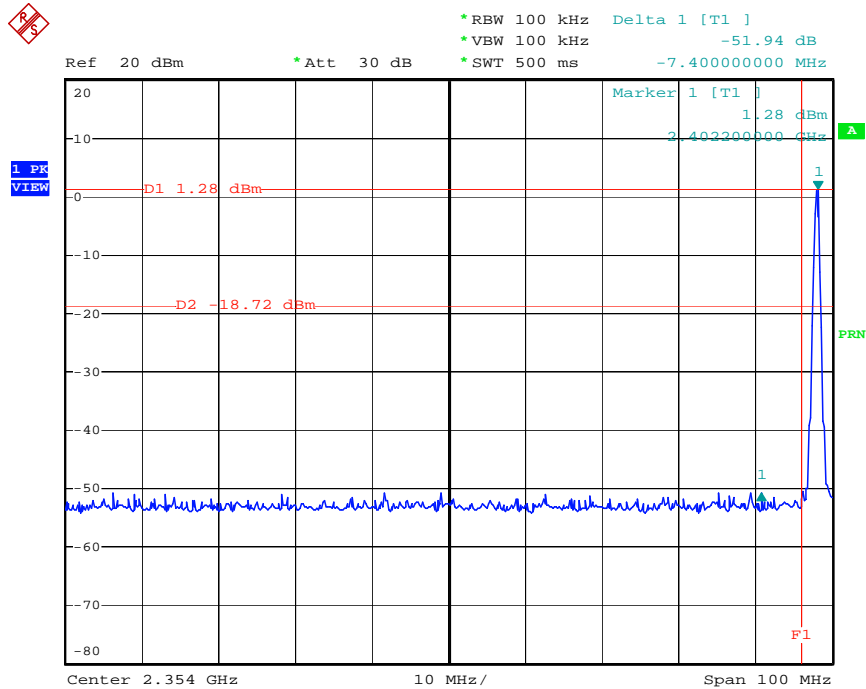

Date: 10.FEB.2006 16:25:51

High Band Edge Plot on Channel 78 / 2480 MHz

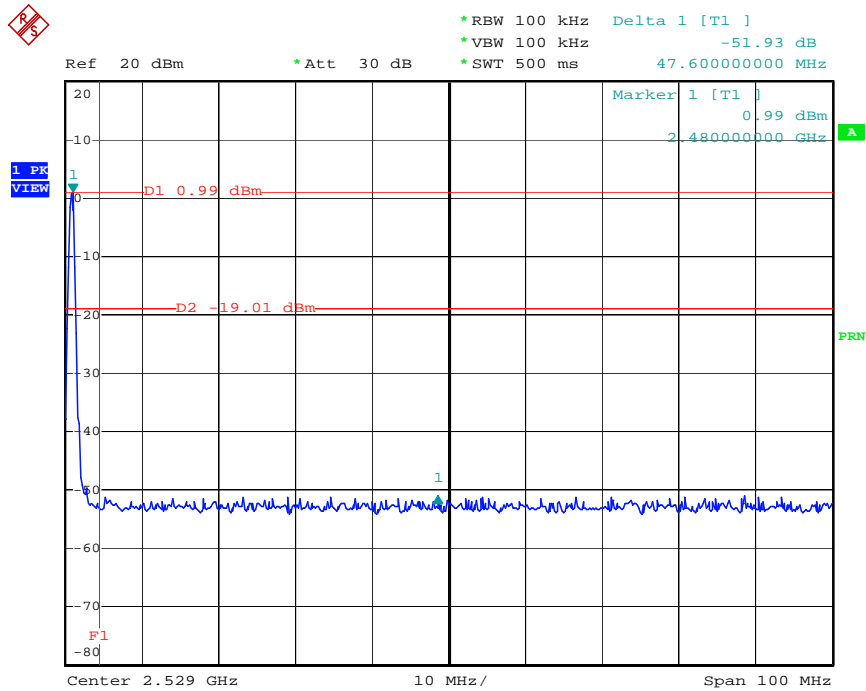

Date: 10.FEB.2006 15:59:31

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, all antenna connectors comply with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 16, 2005	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 15, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 14, 2005	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 31, 2005	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 24, 2004*	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz - 200 MHz	Jul. 22, 2005	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz - 1 GHz	Jul. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1 GHz - 18 GHz	Apr. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Feb. 06, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.01, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

6. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

6.1. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihsu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. TEL : 03-656-9065 FAX : 03-656-9085

7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

Sporton International, Inc. Hwa Ya EMC Laboratory

Tao Yuan Hsien 333


TAIWAN

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999. Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

2006-01-01 through 2006-12-31

Effective dates



For the National Institute of Standards and Technology