



FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Smartphone
MODEL NAME : PG58110
FCC ID : NM8PG58110
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS)

The product was received on Apr. 11, 2011 and completely tested on May 15, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant5

 1.2 Manufacturer.....5

 1.3 Feature of Equipment Under Test5

 1.4 Testing Site.....6

 1.5 Applied Standards6

 1.6 Ancillary Equipment List6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST7

 2.1 RF Power.....7

 2.2 Test Mode.....8

 2.3 Connection Diagram of Test System.....9

 2.4 RF Utility10

3 TEST RESULT.....11

 3.1 6dB Bandwidth Measurement11

 3.2 Output Power Measurement.....18

 3.3 Band Edges Measurement20

 3.4 Spurious Emission Measurement.....28

 3.5 Power Spectral Density Measurement38

 3.6 AC Conducted Emission Measurement.....45

 3.7 Radiated Emission Measurement.....49

 3.8 Antenna Requirements70

4 LIST OF MEASURING EQUIPMENT71

5 UNCERTAINTY OF EVALUATION.....72

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR141115-01B	Rev. 01	Initial issue of report	May 27, 2011



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 7.2 dB at 0.25 MHz
3.7	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.96 dB at 2483.85 MHz
3.8	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smartphone
Model Name	PG58110
FCC ID	NM8PG58110
Sample 1	EUT with LCM-Main, Camera-Main, and Video Camera 1
Sample 2	EUT with LCM-2 nd , Camera-2 nd , and Video Camera 2
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 21.65 dBm (0.15 W) 802.11g : 22.03 dBm (0.16 W) 802.11n (BW 20MHz) : 21.99 dBm (0.16 W)
Antenna Type	PIFA Antenna with gain 0.60 dBi
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	21.14	-	-	21.3
CH 06	2437 MHz	21.44	21.59	21.63	21.65
CH 11	2462 MHz	21.33	-	-	21.49

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.93	-	-	-	-	-	-	-
CH 06	2437 MHz	22.03	21.85	21.78	21.65	21.56	21.52	21.32	21.76
CH 11	2462 MHz	21.94	-	-	-	-	-	-	-

Channel	Frequency	2.4GHz 802.11n (BW 20MHz) RF Power (dBm)							
		OFDM Data Rate							
		MCS=0	MCS=1	MCS=2	MCS=3	MCS=4	MCS=5	MCS=6	MCS=7
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	21.78	-	-	-	-	-	-	-
CH 06	2437 MHz	21.99	21.79	21.57	21.45	21.7	21.69	21.54	21.66
CH 11	2462 MHz	21.78	-	-	-	-	-	-	-

Remark:

1. The data rates of WLAN 802.11b/g/n were set in 11Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n (BW 20MHz) for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases		
Test Item	802.11b (Modulation : DSSS)	802.11g/n (Modulation : OFDM)
Conducted TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz Mode 7: 802.11n (BW 20M)_CH01_2412 MHz Mode 8: 802.11n (BW 20M)_CH06_2437 MHz Mode 9: 802.11n (BW 20M)_CH11_2462 MHz
Radiated TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz Mode 7: 802.11n (BW 20M)_CH01_2412 MHz Mode 8: 802.11n (BW 20M)_CH06_2437 MHz Mode 9: 802.11n (BW 20M)_CH11_2462 MHz
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1 Mode 2 : GSM1900 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1 Mode 3 : WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 3 + USB Cable 3 (Charging from Adapter 3) for Sample 2 Mode 4 : GSM1900 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 4) for Sample 1	
Remark: The worst case of conducted emission is mode 2; only the test data of it was reported.		

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

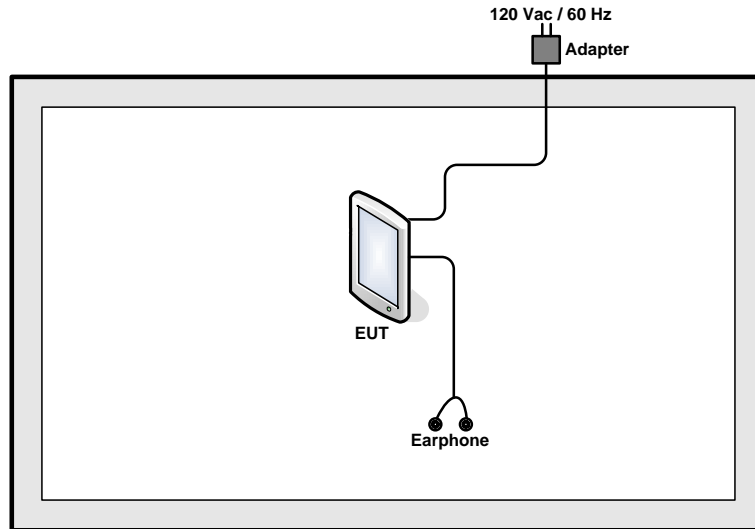

<AC Conducted Emission Mode>

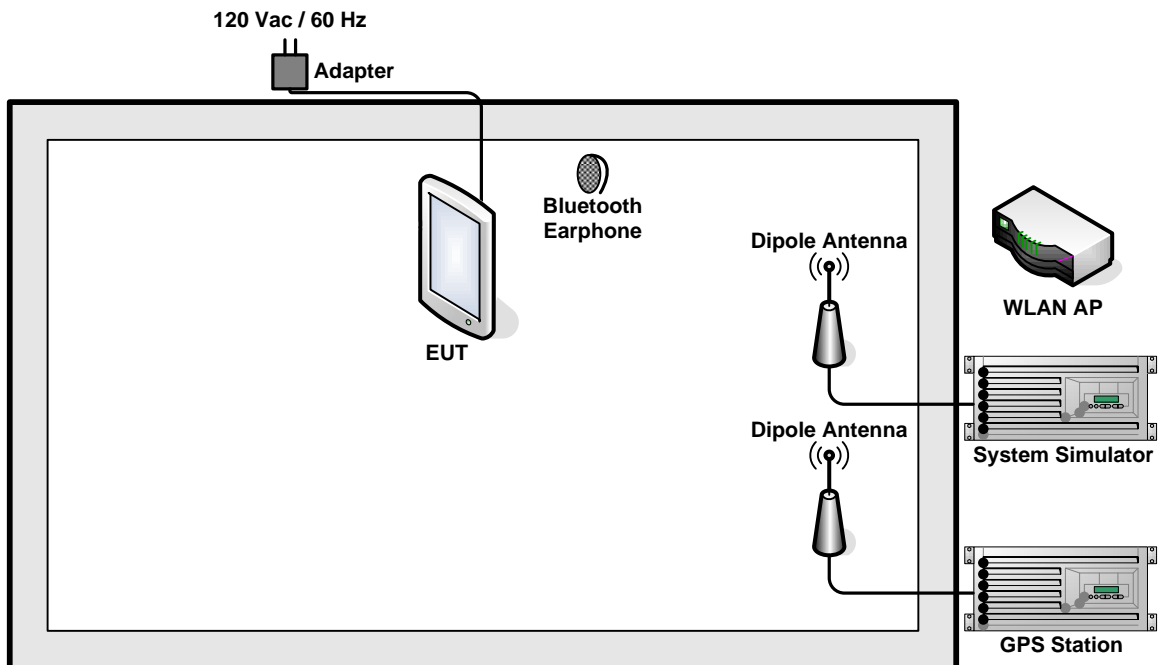



2.4 RF Utility

The programmed RF utility "Remote 432X controller" is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

3.1.4 Test Setup

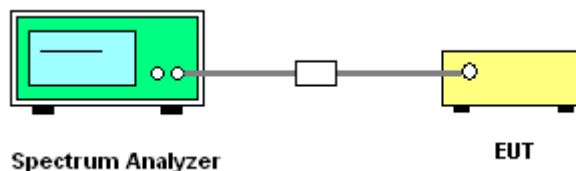




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	7.50	0.5	Pass
06	2437	7.56	0.5	Pass
11	2462	7.56	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

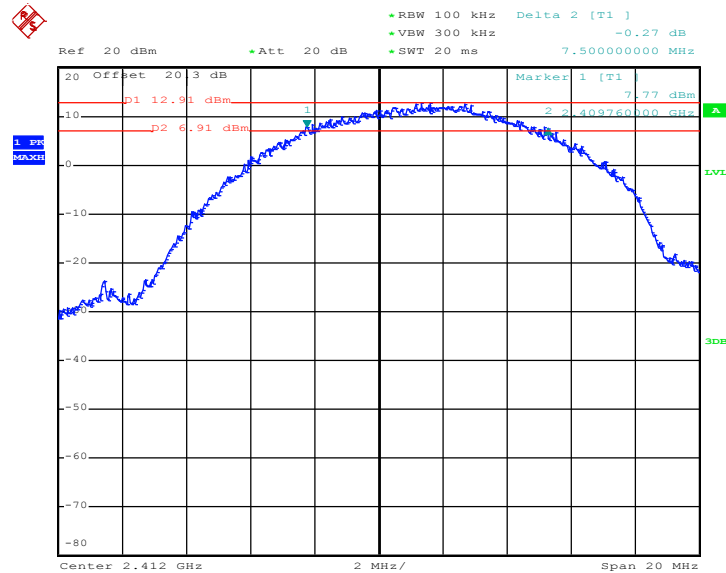

Date: 18.APR.2011 19:44:05




Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

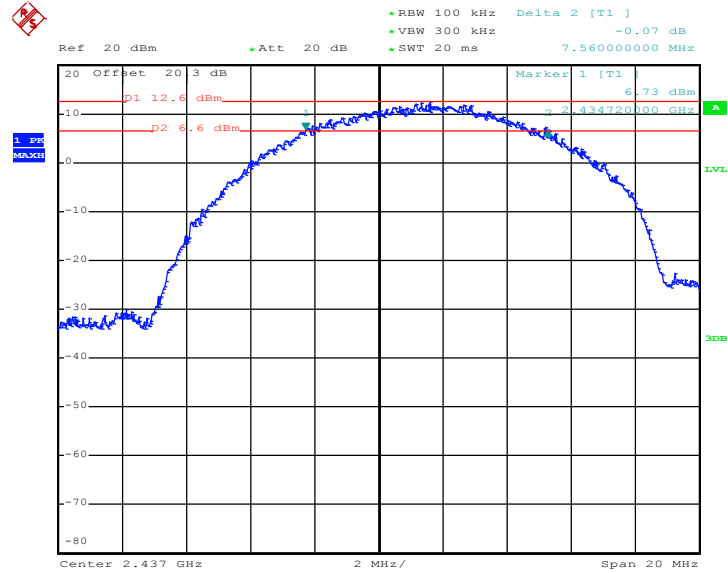

Date: 18.APR.2011 19:48:42

Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11

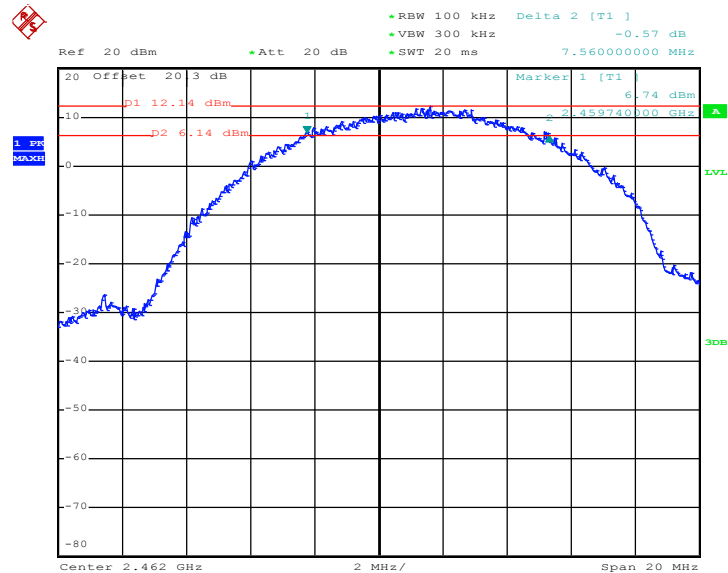


Date: 18.APR.2011 19:50:29



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.76	0.5	Pass
06	2437	15.76	0.5	Pass
11	2462	15.80	0.5	Pass


Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01

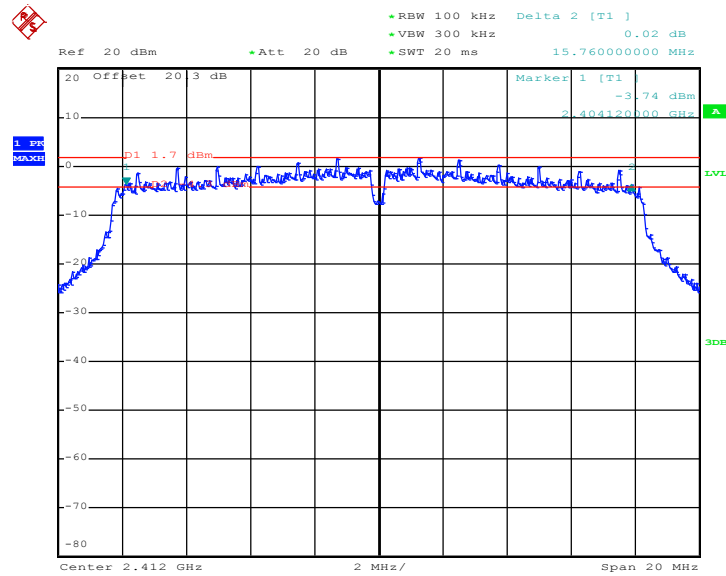

Date: 18.APR.2011 19:59:20




Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

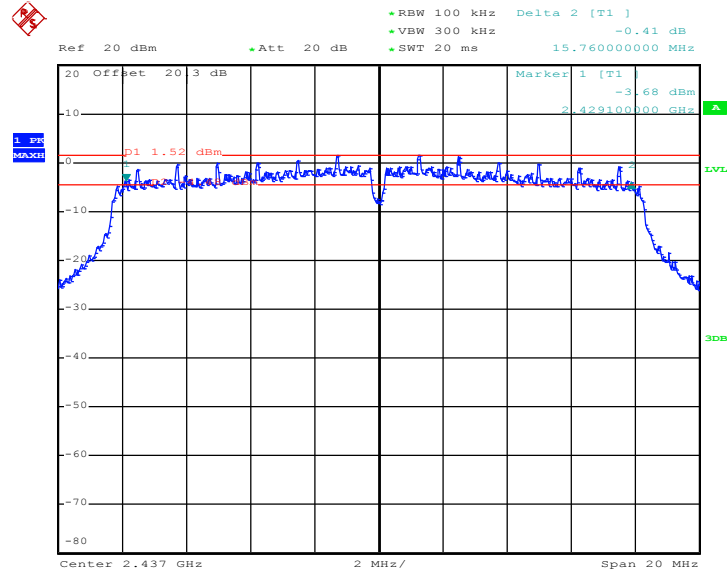

Date: 18.APR.2011 19:56:20

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

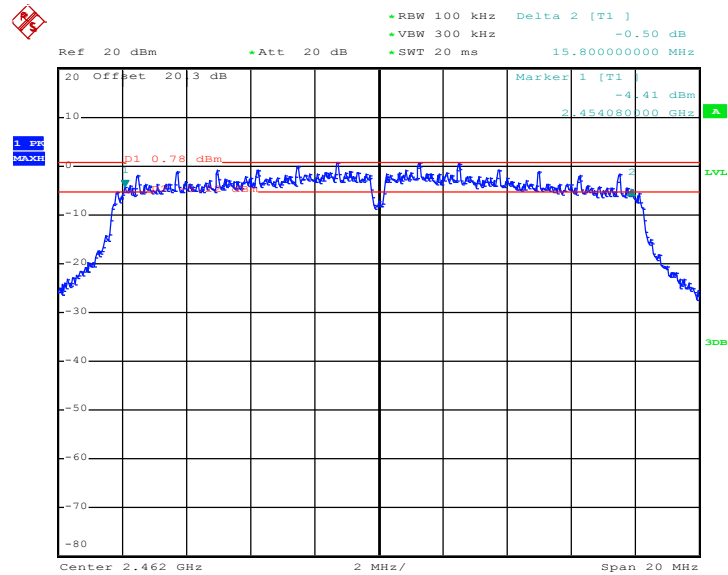


Date: 18.APR.2011 19:53:17



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n (BW 20MHz) 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.64	0.5	Pass
06	2437	15.76	0.5	Pass
11	2462	16.26	0.5	Pass


Mode 7 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 01

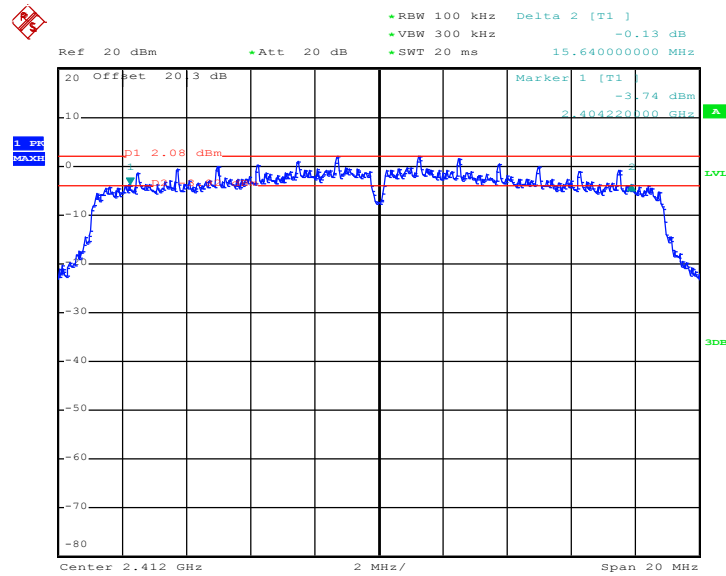

Date: 18.APR.2011 20:02:39




Mode 8 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 06

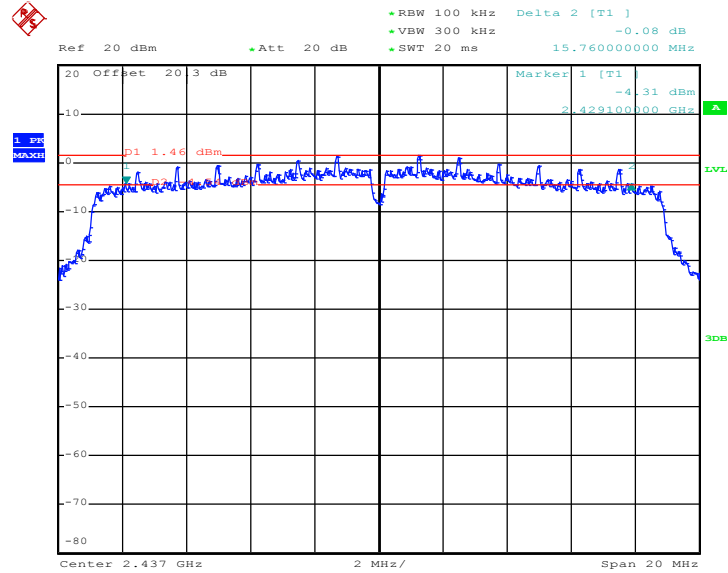

Date: 18.APR.2011 20:09:23

Mode 9 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 11

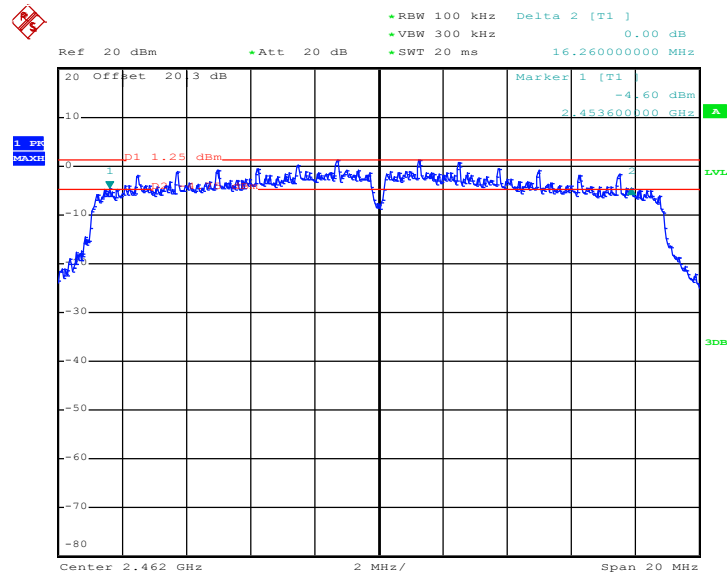

Date: 18.APR.2011 20:05:54

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

3.2.4 Test Setup

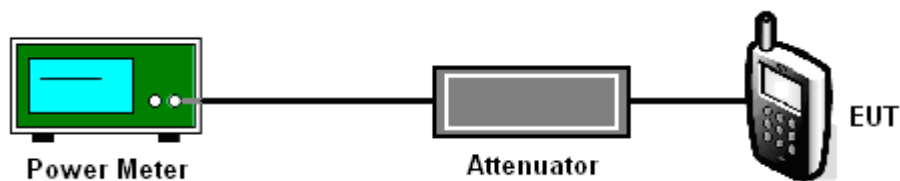



3.2.5 Test Result of Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.3	30	Pass
06	2437	21.65	30	Pass
11	2462	21.49	30	Pass

Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.93	30	Pass
06	2437	22.03	30	Pass
11	2462	21.94	30	Pass

Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.78	30	Pass
06	2437	21.99	30	Pass
11	2462	21.78	30	Pass



3.3 Band Edges Measurement

3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

3.3.4 Test Setup

<Radiated Band Edges>

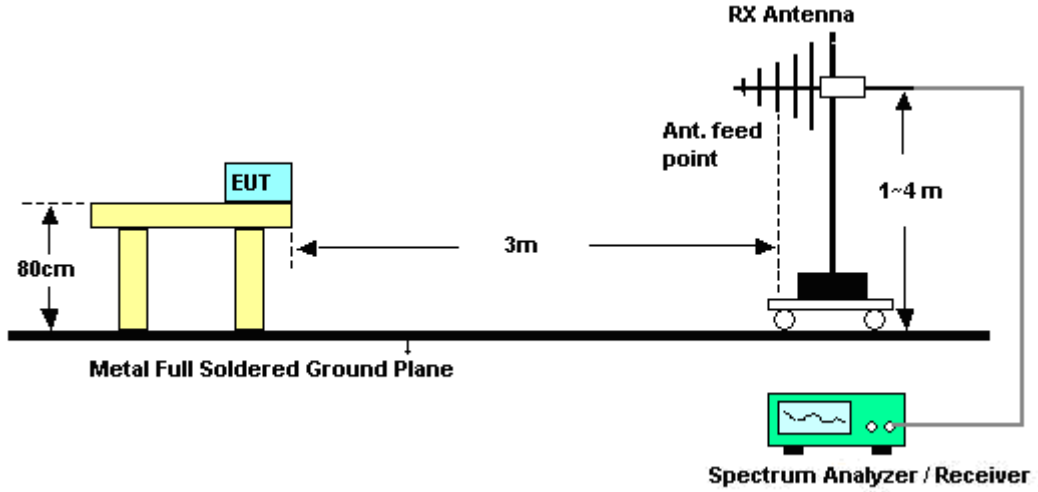

<Conducted Band Edges>

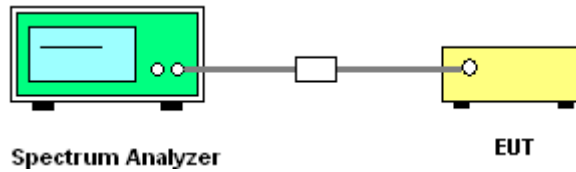



3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 4	Temperature :	21~24°C
Test Band :	802.11b	Relative Humidity :	45~52%
Test Channel :	01	Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.42	53.51	-20.49	74	49.15	32.18	6.03	33.85	100	332	Peak
2389.42	40.41	-13.59	54	36.05	32.18	6.03	33.85	100	332	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.61	50.37	-23.63	74	46.01	32.18	6.03	33.85	122	289	Peak
2389.61	37.38	-16.62	54	33.02	32.18	6.03	33.85	122	289	Average

Test Mode :	Mode 6	Temperature :	21~24°C
Test Band :	802.11b	Relative Humidity :	45~52%
Test Channel :	11	Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.66	64.4	-9.6	74	59.84	32.28	6.18	33.9	103	317	Peak
2483.66	48.92	-5.08	54	44.36	32.28	6.18	33.9	103	317	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.66	59.97	-14.03	74	55.41	32.28	6.18	33.9	122	279	Peak
2483.66	45.74	-8.26	54	41.18	32.28	6.18	33.9	122	279	Average



Test Mode :	Mode 7	Temperature :	21~24°C
Test Band :	802.11g	Relative Humidity :	45~52%
Test Channel :	01	Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	53.42	-20.58	74	49.06	32.18	6.03	33.85	100	347	Peak
2390	38.51	-15.49	54	34.15	32.18	6.03	33.85	100	347	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	51.25	-22.75	74	46.89	32.18	6.03	33.85	100	256	Peak
2390	34.96	-19.04	54	30.6	32.18	6.03	33.85	100	256	Average

Test Mode :	Mode 9	Temperature :	21~24°C
Test Band :	802.11g	Relative Humidity :	45~52%
Test Channel :	11	Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.85	68.13	-5.87	74	63.57	32.28	6.18	33.9	100	351	Peak
2483.85	48.38	-5.62	54	43.82	32.28	6.18	33.9	100	351	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	63.25	-10.75	74	58.69	32.28	6.18	33.9	100	261	Peak
2483.5	43.55	-10.45	54	38.99	32.28	6.18	33.9	100	261	Average



Test Mode :	Mode 10	Temperature :	21~24°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~52%
Test Channel :	01	Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	57.06	-16.94	74	52.7	32.18	6.03	33.85	100	331	Peak
2390	38.7	-15.3	54	34.34	32.18	6.03	33.85	100	331	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	52.97	-21.03	74	48.61	32.18	6.03	33.85	128	282	Peak
2390	36.65	-17.35	54	32.29	32.18	6.03	33.85	128	282	Average

Test Mode :	Mode 12	Temperature :	21~24°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~52%
Test Channel :	11	Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.85	70.04	-3.96	74	65.48	32.28	6.18	33.9	100	352	Peak
2483.85	48.41	-5.59	54	43.85	32.28	6.18	33.9	100	352	Average


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	63.65	-10.35	74	59.09	32.28	6.18	33.9	100	261	Peak
2483.5	43.23	-10.77	54	38.67	32.28	6.18	33.9	100	261	Average



3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	24~26°C
Test Band :	802.11b	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Hank Yu

Low Band Edge Plot on 802.11b Channel 01

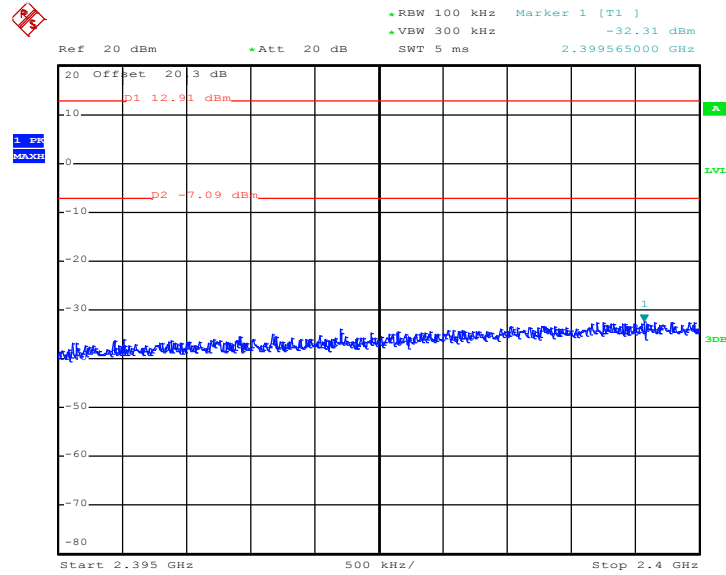

Date: 18.APR.2011 19:45:13

High Band Edge Plot on 802.11b Channel 11

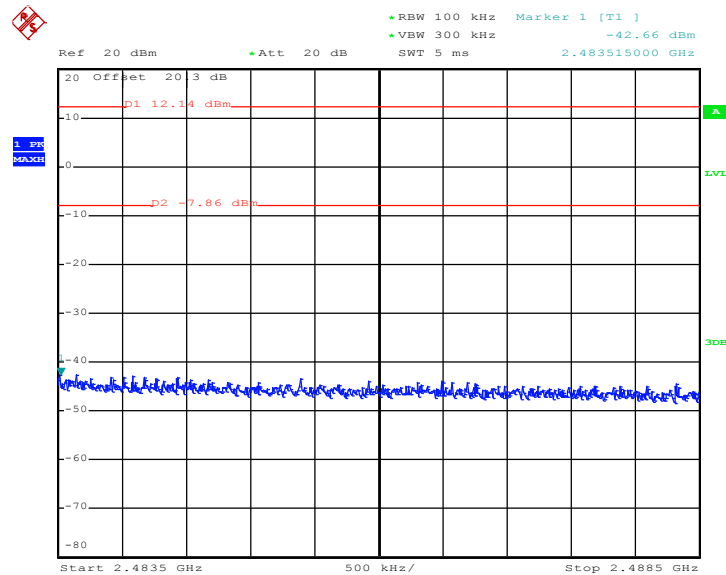


Date: 18.APR.2011 19:51:15




Test Mode :	Mode 4 and 6	Temperature :	24~26°C
Test Band :	802.11g	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Hank Yu

Low Band Edge Plot on 802.11g Channel 01

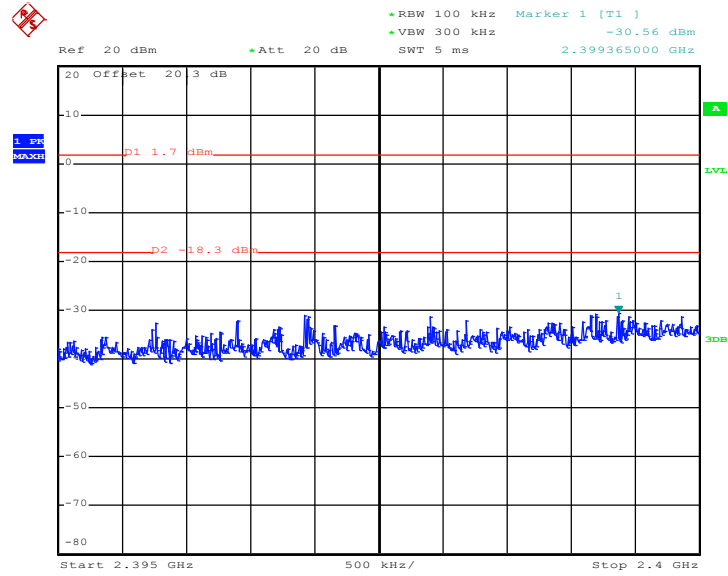

Date: 18.APR.2011 20:00:28

High Band Edge Plot on 802.11g Channel 11

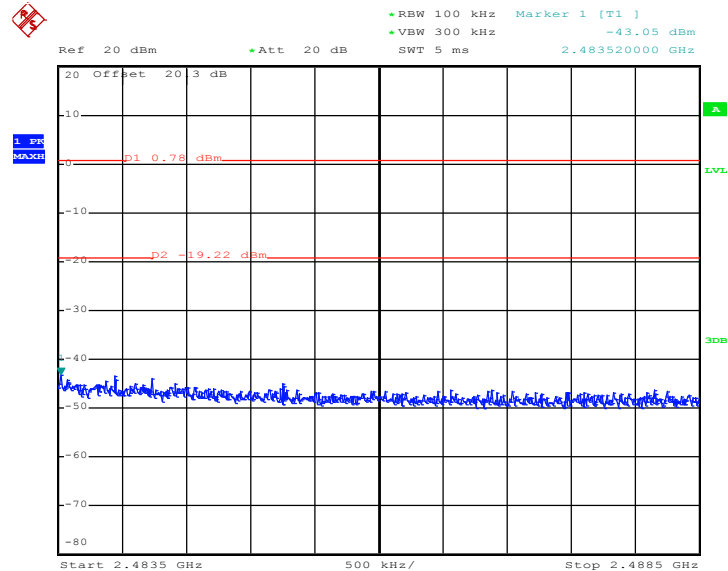


Date: 18.APR.2011 19:54:03




Test Mode :	Mode 7 and 9	Temperature :	24~26°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Hank Yu

Low Band Edge Plot on 802.11n (BW 20MHz) Channel 01

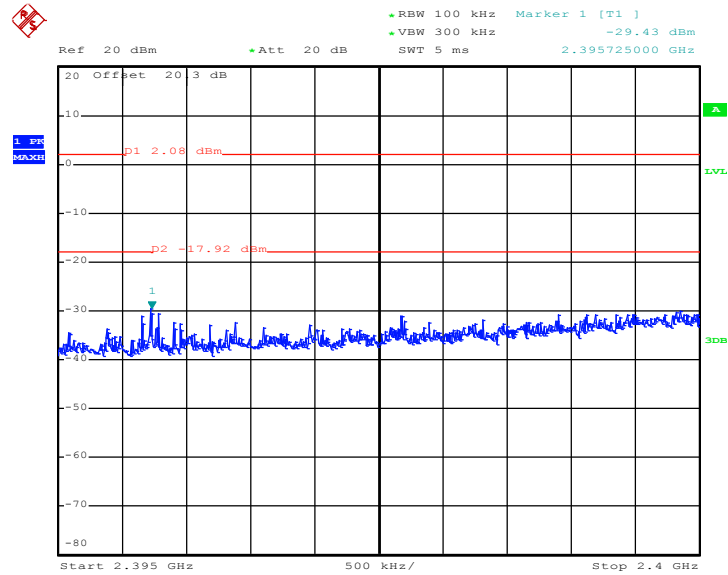

Date: 18.APR.2011 20:03:47

High Band Edge Plot on 802.11n (BW 20MHz) Channel 11

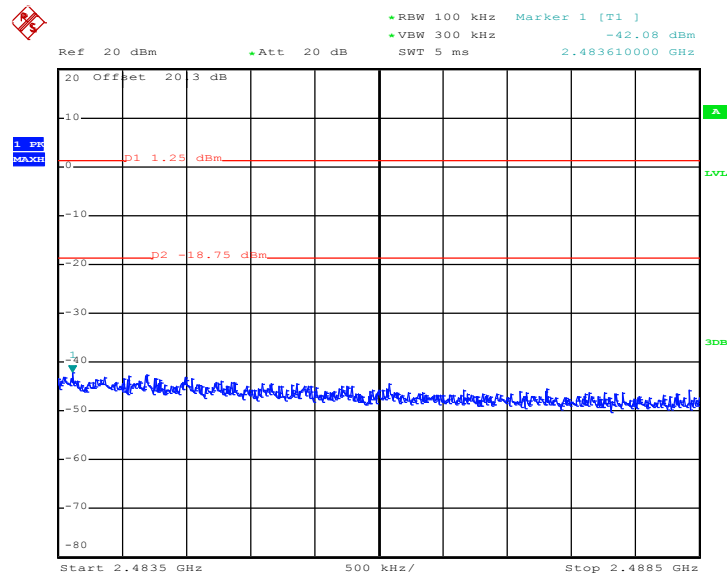

Date: 18.APR.2011 20:06:41

3.4 Spurious Emission Measurement

3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.4.4 Test Setup

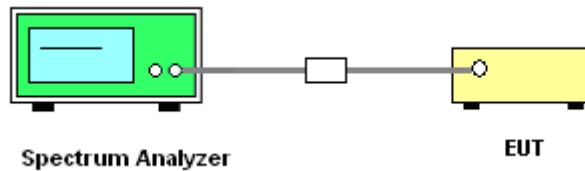




3.4.5 Test Plots of Spurious Emission


Test Mode :	Mode 1	Temperature :	24~26°C
Test Band :	802.11b	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

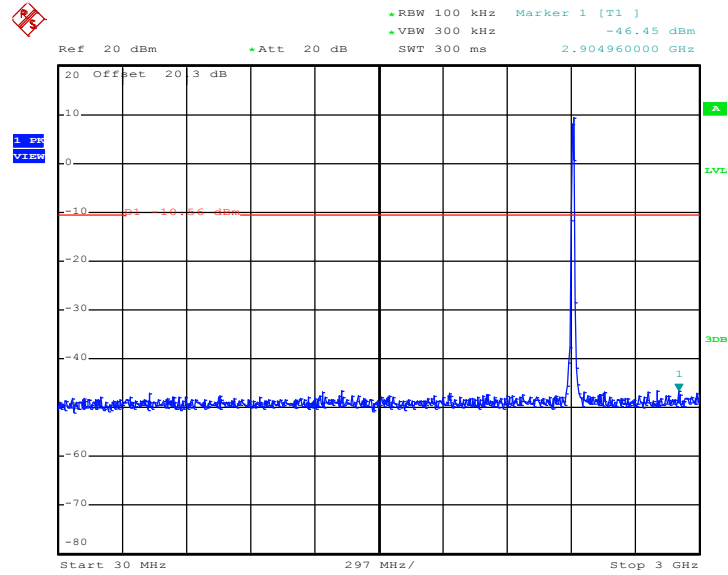

Date: 15.APR.2011 11:39:38

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

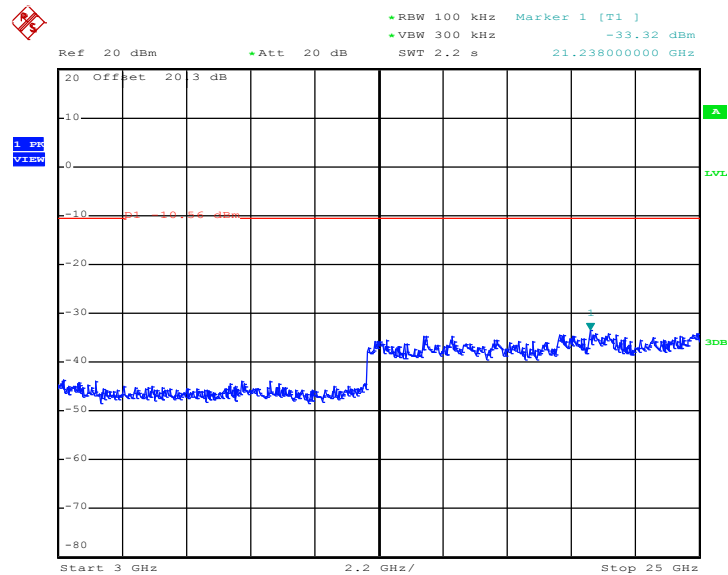


Date: 15.APR.2011 11:39:55




Test Mode :	Mode 2	Temperature :	24~26°C
Test Band :	802.11b	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

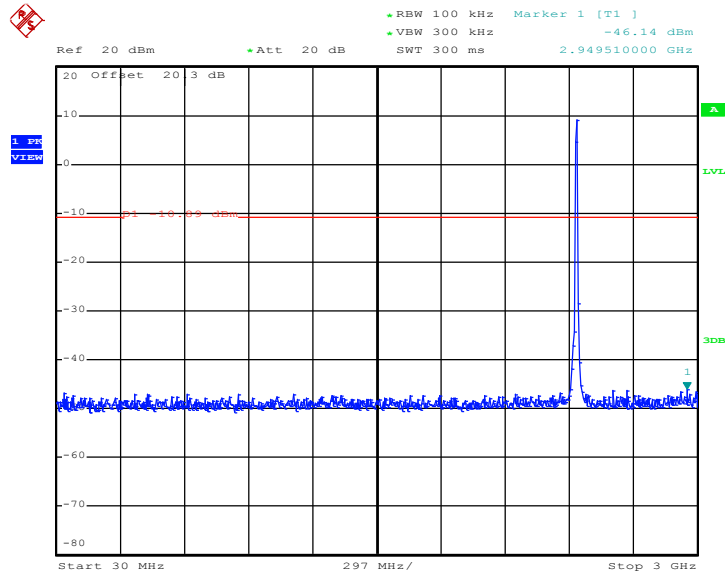

Date: 15.APR.2011 11:57:25

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

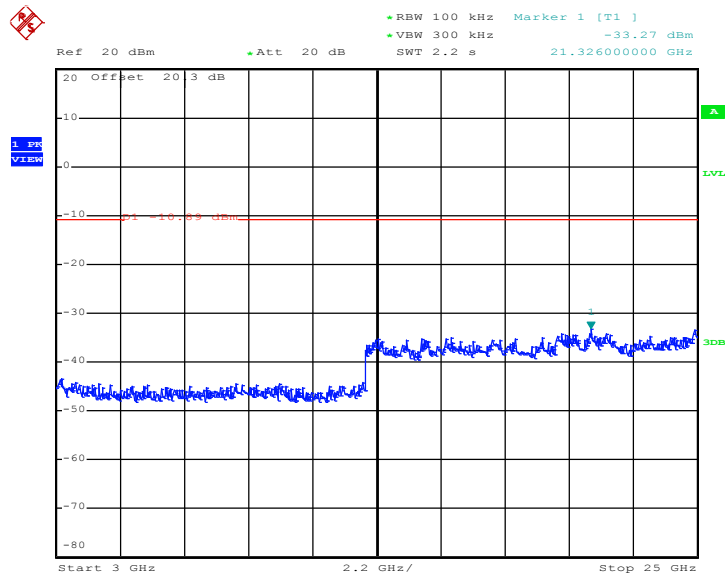


Date: 15.APR.2011 11:57:42




Test Mode :	Mode 3	Temperature :	24~26°C
Test Band :	802.11b	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

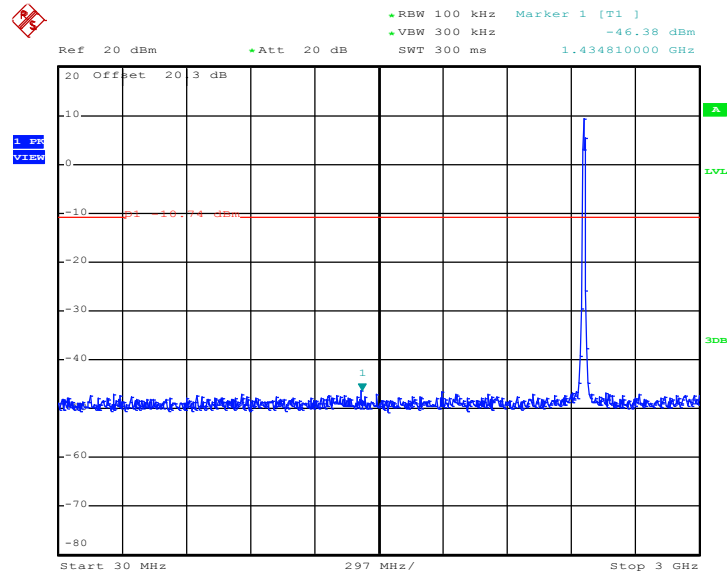

Date: 15.APR.2011 11:59:08

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

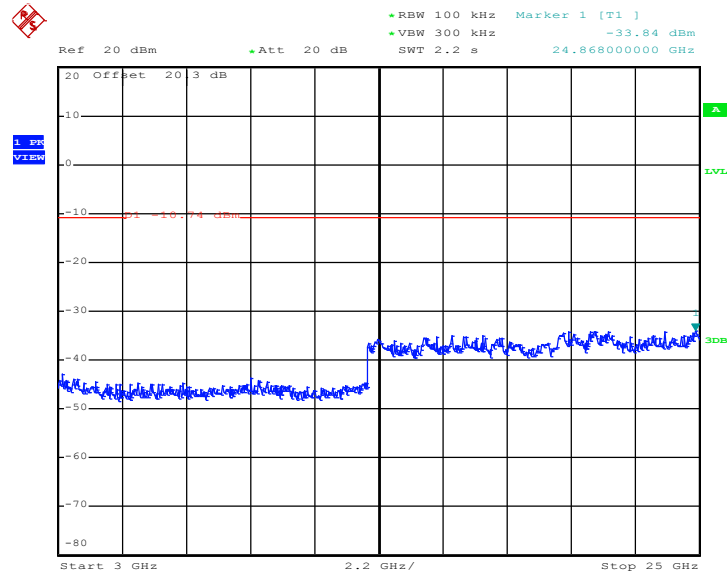


Date: 15.APR.2011 11:59:24




Test Mode :	Mode 4	Temperature :	24~26°C
Test Band :	802.11g	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

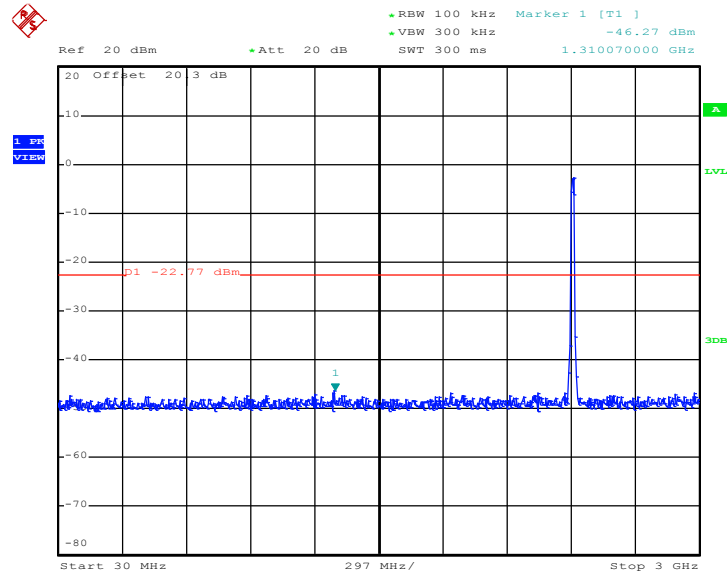

Date: 15.APR.2011 12:45:40

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

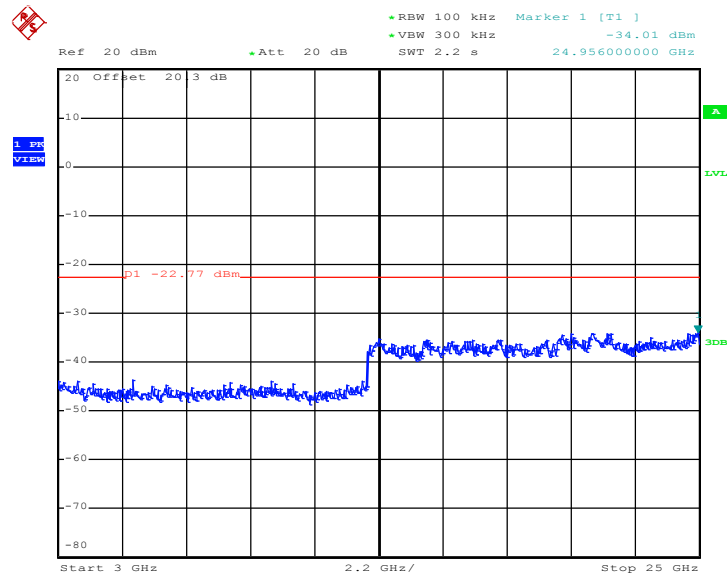


Date: 15.APR.2011 12:45:57




Test Mode :	Mode 5	Temperature :	24~26
Test Band :	802.11g	Relative Humidity :	50~53
Test Channel :	06	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

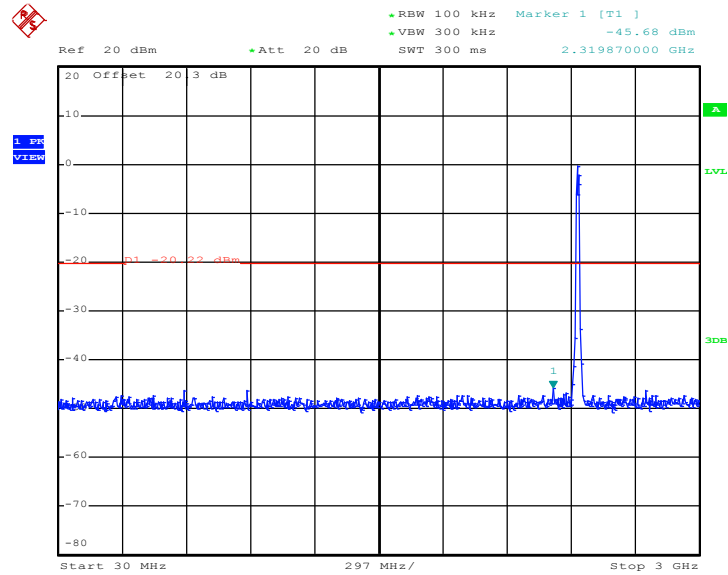

Date: 15.APR.2011 12:35:04

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

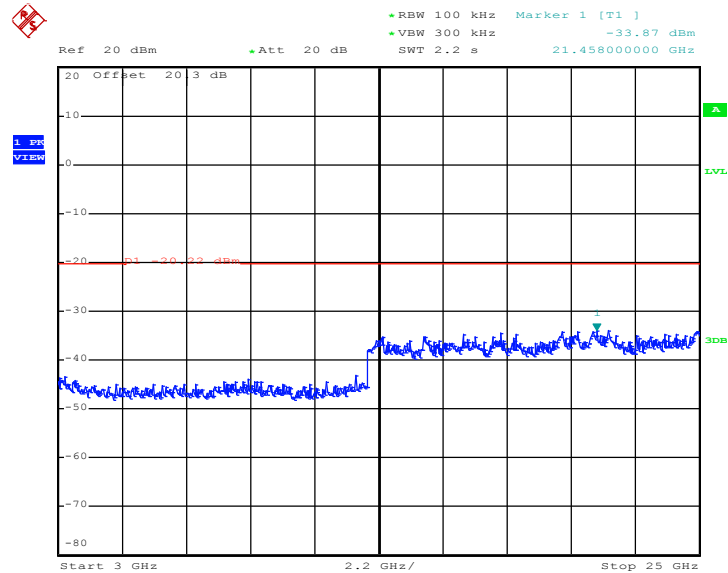


Date: 15.APR.2011 12:35:21




Test Mode :	Mode 6	Temperature :	24~26°C
Test Band :	802.11g	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

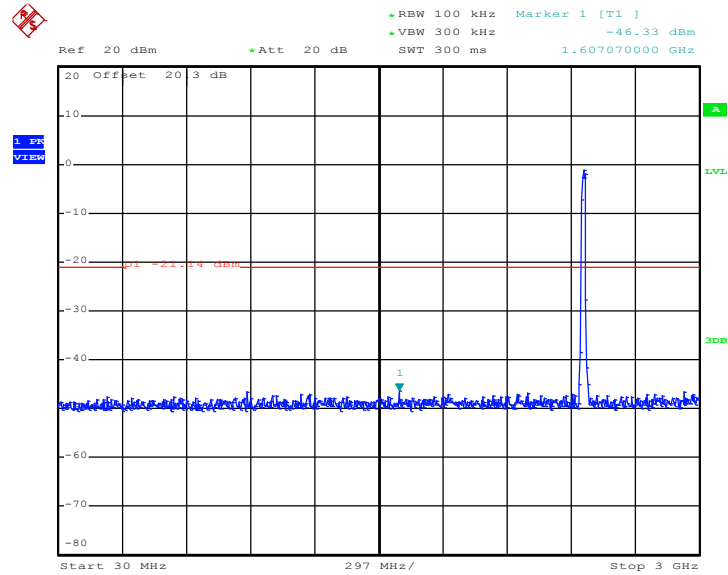

Date: 15.APR.2011 12:23:44

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

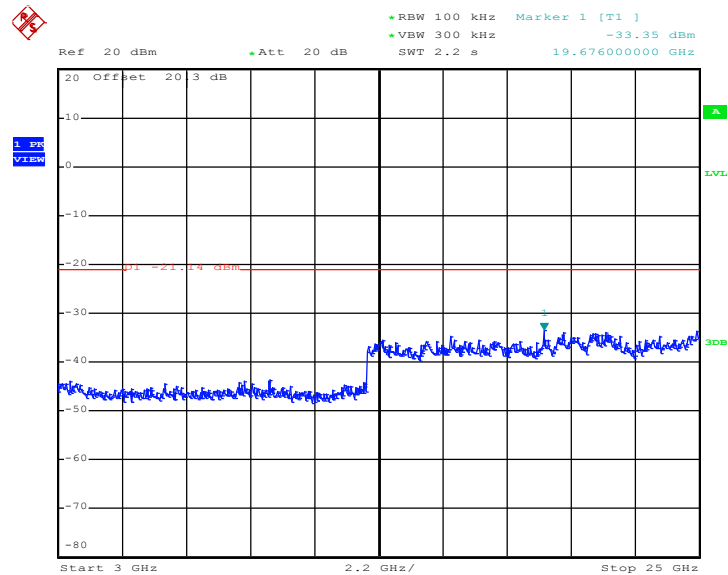


Date: 15.APR.2011 12:24:01




Test Mode :	Mode 7	Temperature :	24~26°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

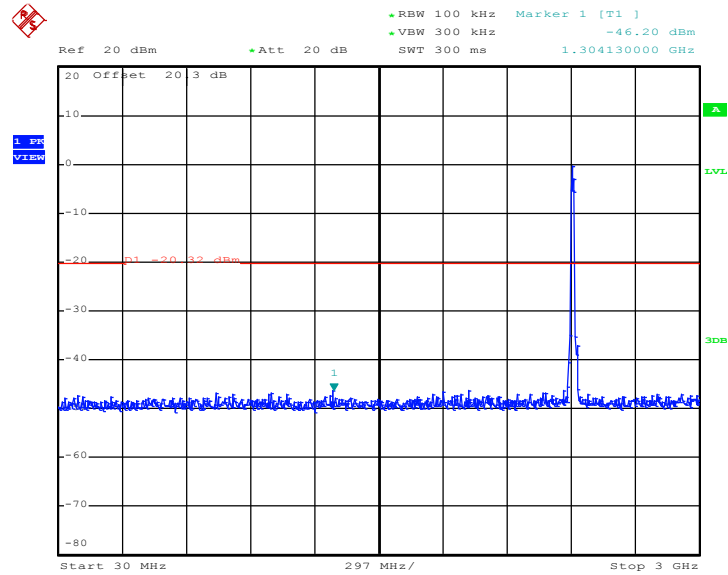

Date: 15.APR.2011 13:40:53

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

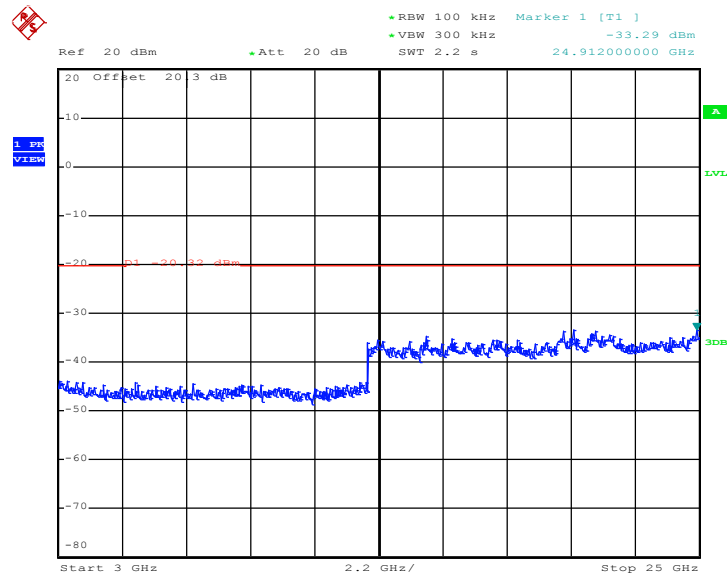


Date: 15.APR.2011 13:41:10




Test Mode :	Mode 8	Temperature :	24~26°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

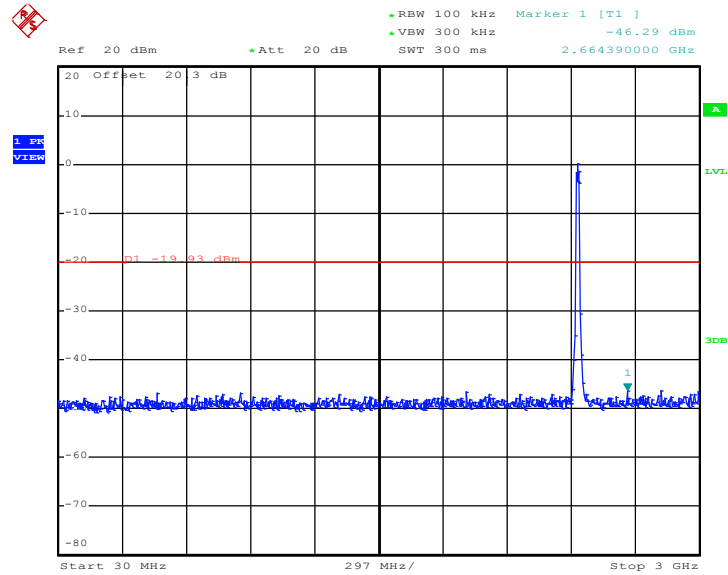

Date: 15.APR.2011 14:22:02

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

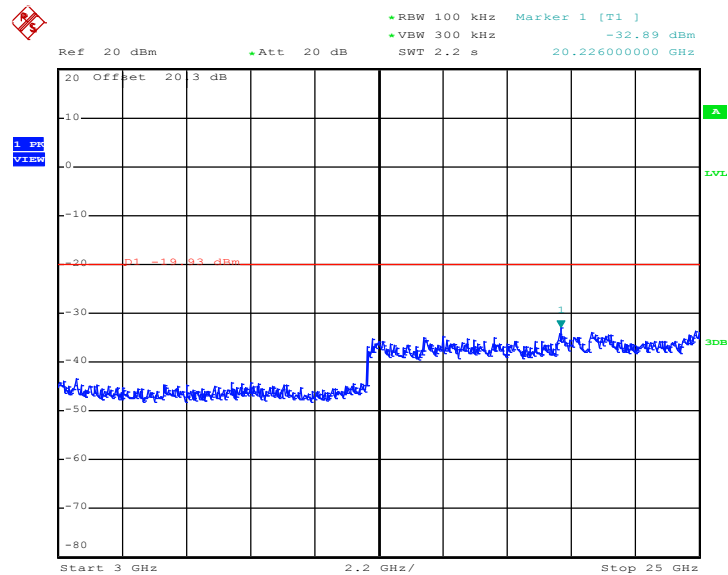


Date: 15.APR.2011 14:22:19




Test Mode :	Mode 9	Temperature :	24~26°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

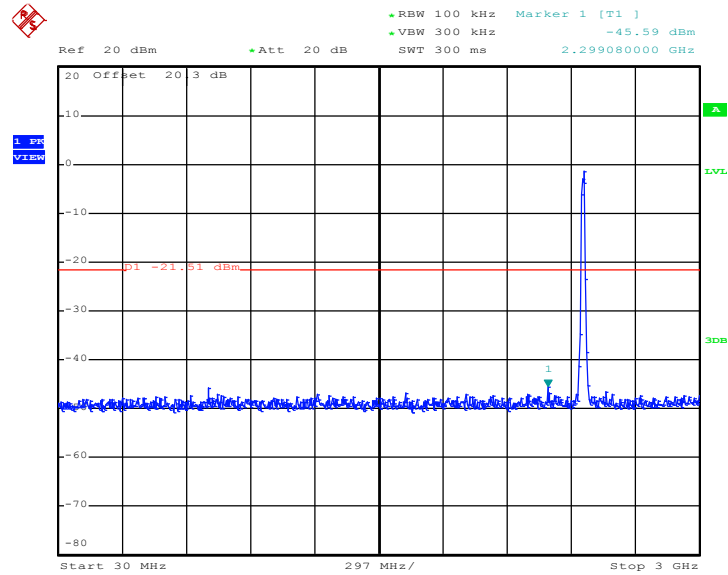

Date: 15.APR.2011 14:24:16

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

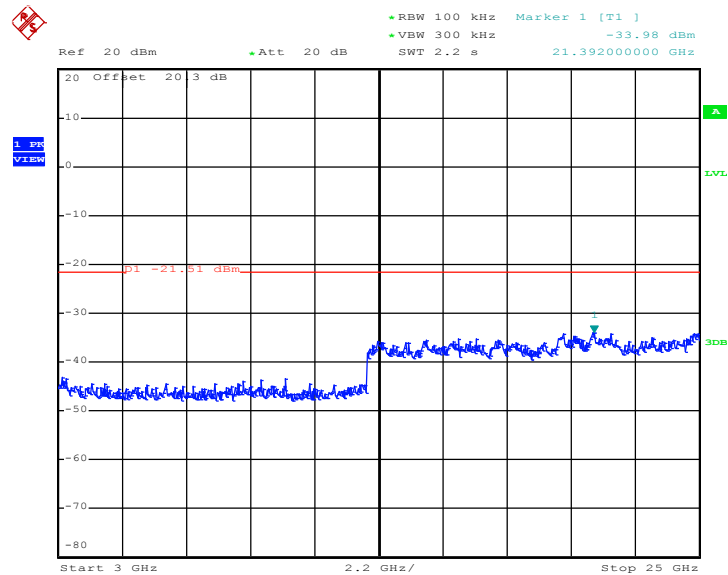

Date: 15.APR.2011 14:24:33

3.5 Power Spectral Density Measurement

3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

3.5.4 Test Setup

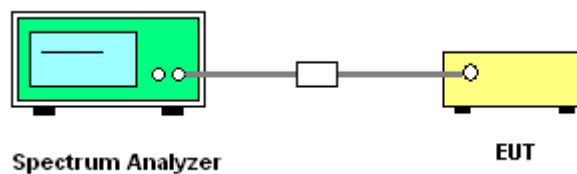




3.5.5 Test Result of Power Spectral Density

Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-2.91	8	Pass
06	2437	-3.46	8	Pass
11	2462	-3.77	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

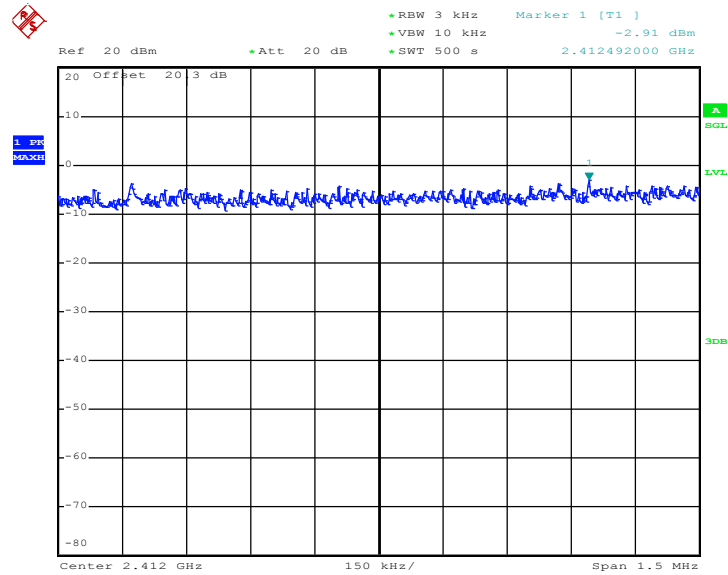

Date: 15.APR.2011 11:39:17




Mode 2 : PSD Plot on 802.11b Channel 06

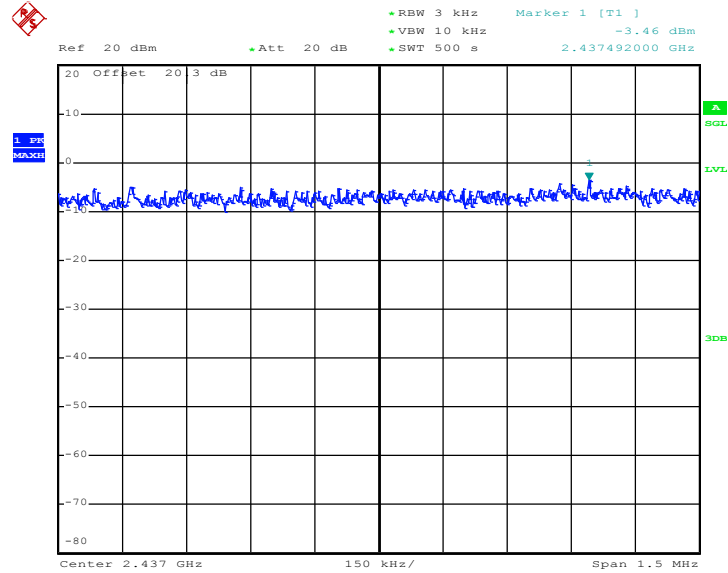

Date: 15.APR.2011 11:57:01

Mode 3 : PSD Plot on 802.11b Channel 11

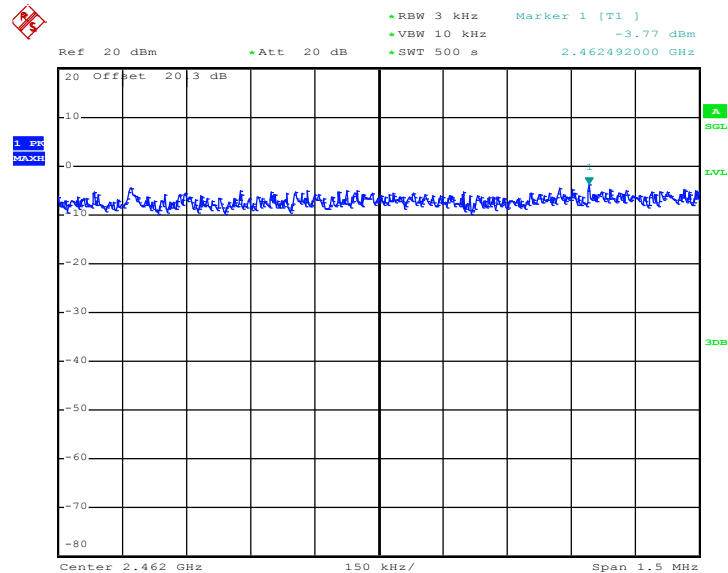


Date: 15.APR.2011 12:21:01



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-13.12	8	Pass
06	2437	-13.59	8	Pass
11	2462	-13.12	8	Pass


Mode 4 : PSD Plot on 802.11g Channel 01

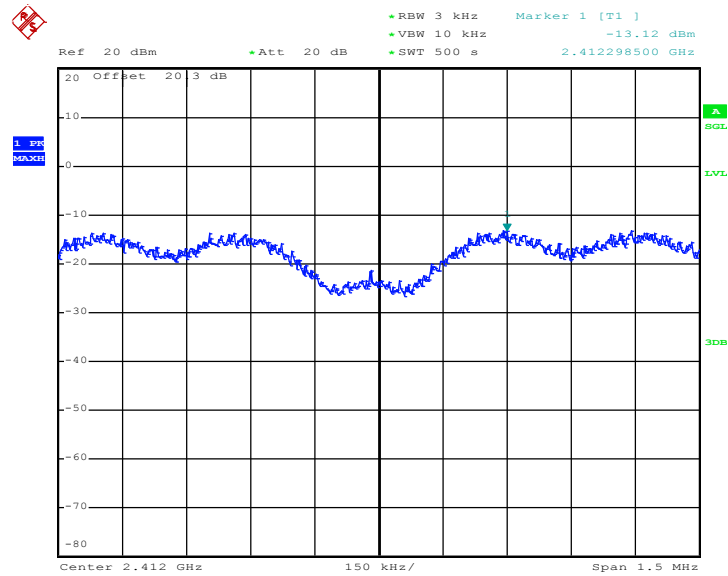

Date: 15.APR.2011 13:26:29




Mode 5 : PSD Plot on 802.11g Channel 06

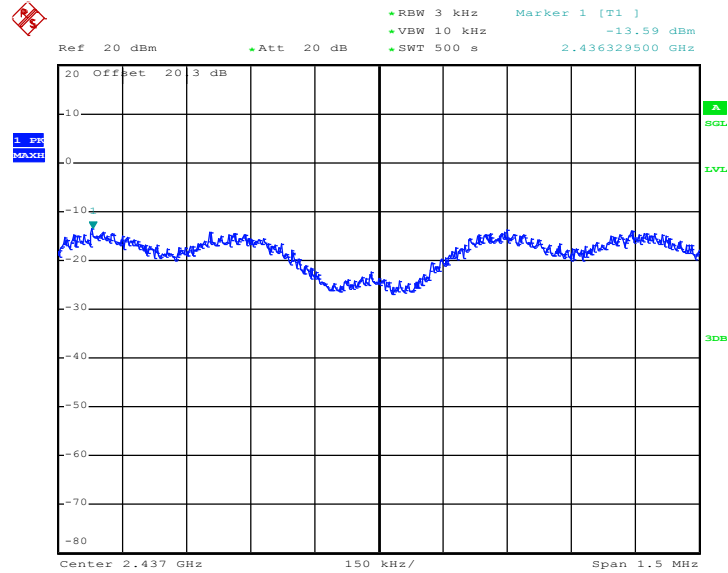

Date: 15.APR.2011 12:44:04

Mode 6 : PSD Plot on 802.11g Channel 11

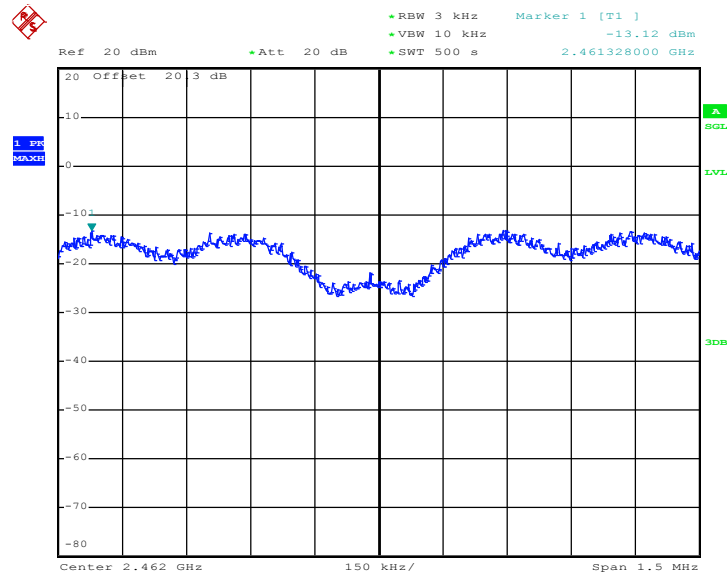


Date: 15.APR.2011 12:33:56



Test Mode :	Mode 10, 11, 12	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-12.66	8	Pass
06	2437	-11.70	8	Pass
11	2462	-10.87	8	Pass


Mode 7 : PSD Plot on 802.11n (BW 20MHz) Channel 01

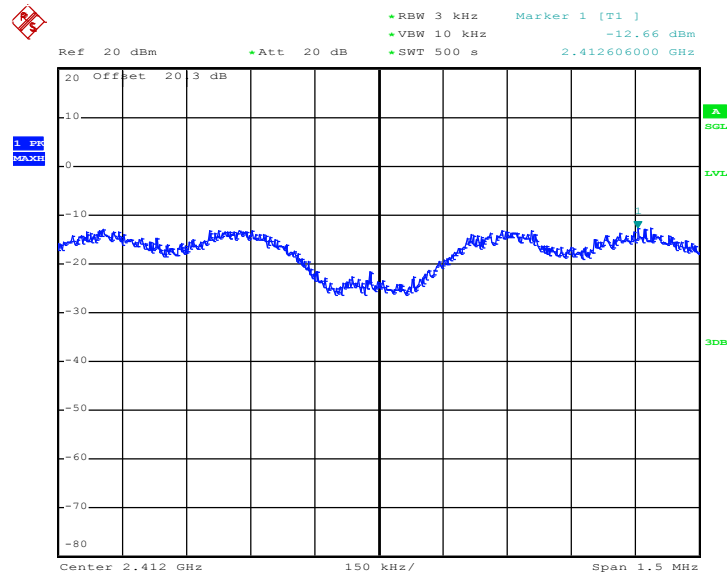

Date: 15.APR.2011 13:52:42




Mode 8 : PSD Plot on 802.11n (BW 20MHz) Channel 06

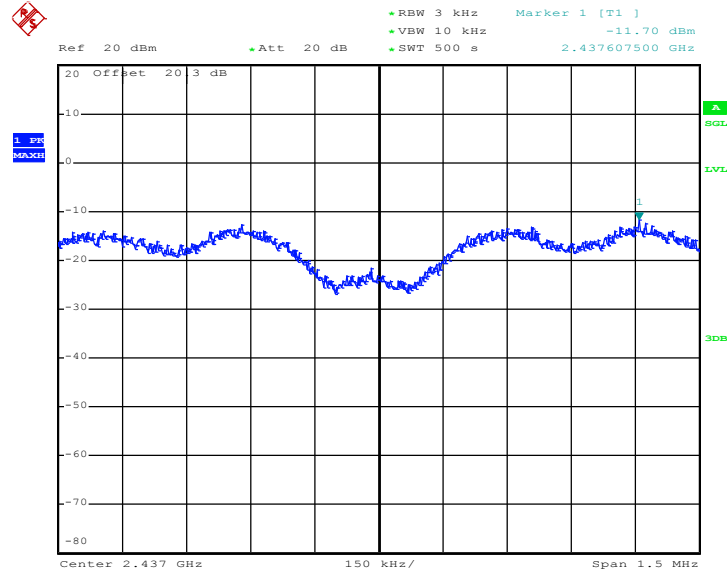

Date: 15.APR.2011 14:11:37

Mode 9 : PSD Plot on 802.11n (BW 20MHz) Channel 11

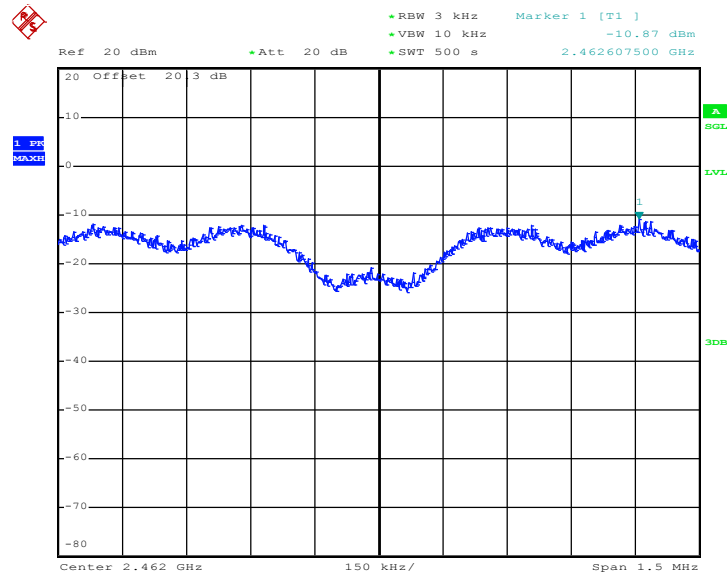

Date: 15.APR.2011 14:34:54

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

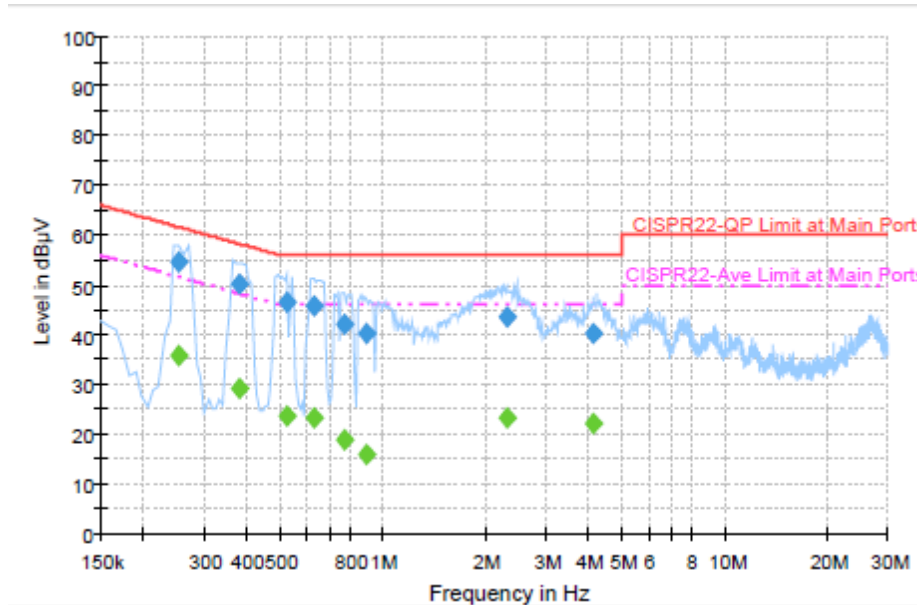

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.254000	54.4	Off	L1	19.4	7.2	61.6
0.382000	50.1	Off	L1	19.4	8.1	58.2
0.526000	46.5	Off	L1	19.4	9.5	56.0
0.630000	45.8	Off	L1	19.4	10.2	56.0
0.774000	42.0	Off	L1	19.4	14.0	56.0
0.902000	40.2	Off	L1	19.4	15.8	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.254000	35.8	Off	L1	19.4	15.8	51.6
0.382000	29.2	Off	L1	19.4	19.0	48.2
0.526000	23.5	Off	L1	19.4	22.5	46.0
0.630000	23.2	Off	L1	19.4	22.8	46.0
0.774000	18.8	Off	L1	19.4	27.2	46.0
0.902000	16.0	Off	L1	19.4	30.0	46.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

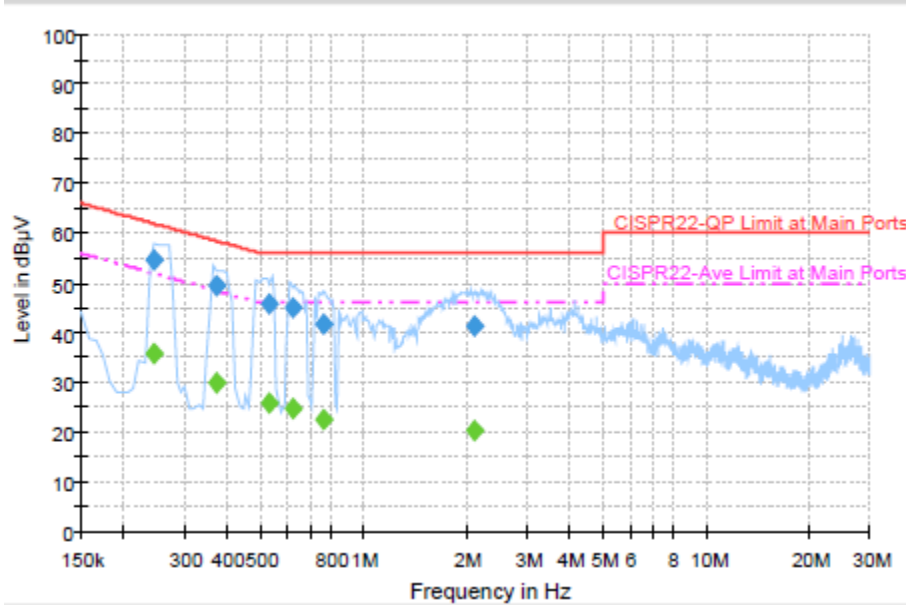

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.246000	54.4	Off	N	19.4	7.5	61.9
0.374000	49.5	Off	N	19.4	8.9	58.4
0.534000	45.8	Off	N	19.4	10.2	56.0
0.622000	45.0	Off	N	19.4	11.0	56.0
0.766000	41.7	Off	N	19.4	14.3	56.0
2.102000	41.4	Off	N	19.5	14.6	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.246000	35.6	Off	N	19.4	16.3	51.9
0.374000	29.9	Off	N	19.4	18.5	48.4
0.534000	25.8	Off	N	19.4	20.2	46.0
0.622000	24.8	Off	N	19.4	21.2	46.0
0.766000	22.7	Off	N	19.4	23.3	46.0
2.102000	20.3	Off	N	19.5	25.7	46.0

3.7 Radiated Emission Measurement

3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.7.4 Test Setup


For radiated emissions below 30MHz

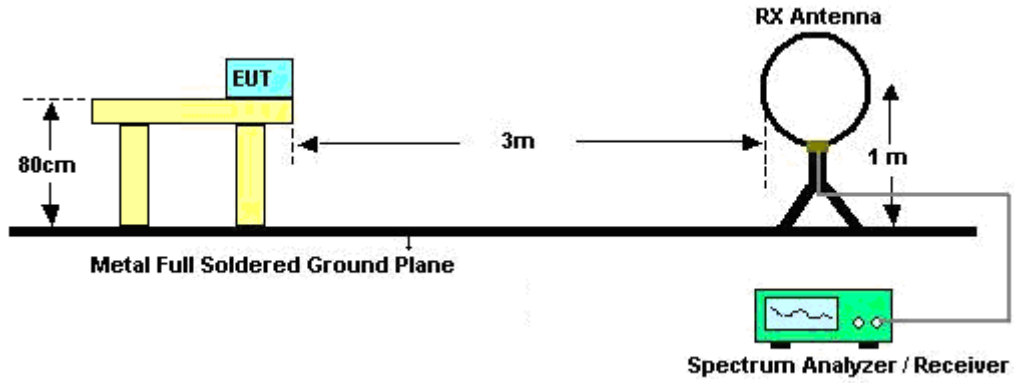

For radiated emissions from 30MHz to 1GHz

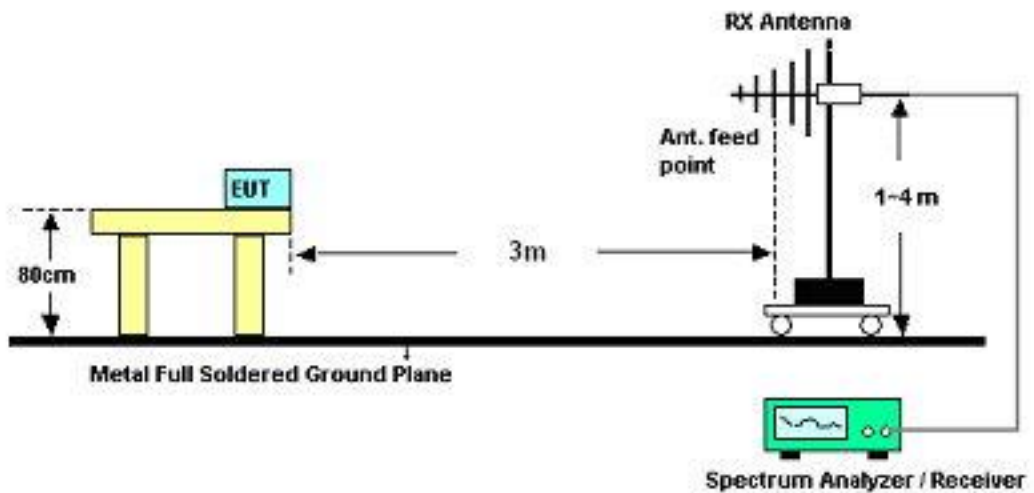

For radiated emissions above 1GHz

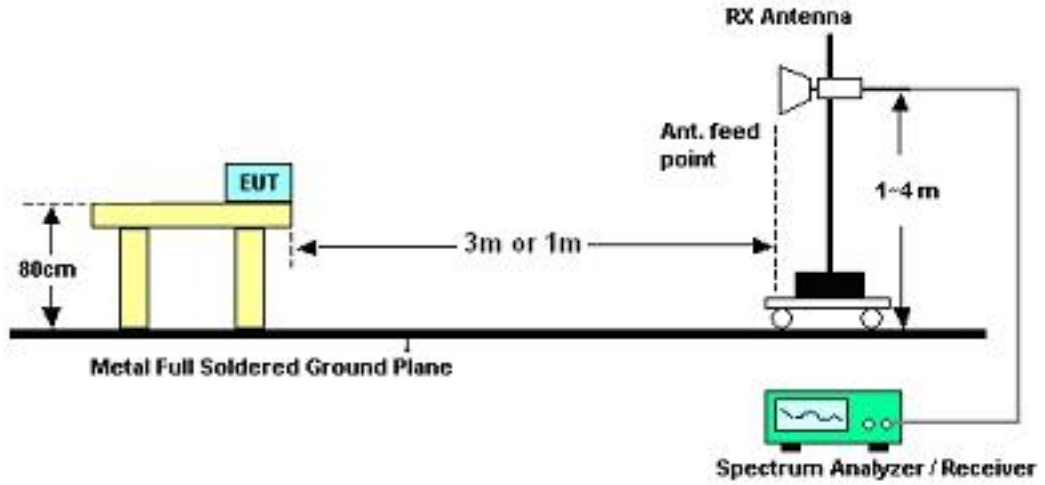

3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	David Yang	Temperature :	21~24°C	
		Relative Humidity :	45~52%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.7.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 4	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
47.82	28.18	-11.82	40	49.55	9.48	0.67	31.52	100	321	Peak
94.26	15.98	-27.52	43.5	37.42	9.12	0.97	31.53	-	-	Peak
151.5	20.71	-22.79	43.5	40.02	11.03	1.21	31.55	-	-	Peak
318.9	16.91	-29.09	46	32.36	14.06	1.81	31.32	-	-	Peak
379.8	18.49	-27.51	46	31.67	15.96	2.1	31.24	-	-	Peak
458.2	19.52	-26.48	46	30.76	17.52	2.32	31.08	-	-	Peak
2389.42	53.51	-20.49	74	49.15	32.18	6.03	33.85	100	332	Peak
2389.42	40.41	-13.59	54	36.05	32.18	6.03	33.85	100	332	Average
2412	108.91	-	-	104.51	32.2	6.07	33.87	100	332	Peak
2412	96.69	-	-	92.29	32.2	6.07	33.87	100	332	Average
2494	36.74	-17.26	54	32.16	32.3	6.18	33.9	100	332	Average
2494	49.29	-24.71	74	44.71	32.3	6.18	33.9	100	332	Peak
4824	51.79	-22.21	74	67.71	34.07	9.12	59.11	138	332	Peak
4824	40.87	-13.13	54	56.79	34.07	9.12	59.11	138	332	Average



Test Mode :	Mode 4	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
51.33	32.63	-7.37	40	55.44	8.02	0.71	31.54	100	168	Peak
97.5	22.78	-20.72	43.5	43.75	9.57	0.99	31.53	-	-	Peak
137.73	20.95	-22.55	43.5	39.72	11.59	1.19	31.55	-	-	Peak
318.9	21.02	-24.98	46	36.47	14.06	1.81	31.32	-	-	Peak
360.9	16.41	-29.59	46	30.26	15.36	2.06	31.27	-	-	Peak
447	18.48	-27.52	46	29.95	17.35	2.29	31.11	-	-	Peak
2389.61	50.37	-23.63	74	46.01	32.18	6.03	33.85	122	289	Peak
2389.61	37.38	-16.62	54	33.02	32.18	6.03	33.85	122	289	Average
2412	105.53	-	-	101.13	32.2	6.07	33.87	122	289	Peak
2412	93.1	-	-	88.7	32.2	6.07	33.87	122	289	Average
2486	33.59	-20.41	54	29.03	32.28	6.18	33.9	122	289	Average
2486	45.7	-28.3	74	41.14	32.28	6.18	33.9	122	289	Peak
4824	46.43	-27.57	74	62.35	34.07	9.12	59.11	100	0	Peak



Test Mode :	Mode 5	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.09	28.55	-11.45	40	50.31	9.08	0.68	31.52	121	111	Peak
92.37	16.14	-27.36	43.5	37.8	8.9	0.96	31.52	-	-	Peak
150.69	21.26	-22.24	43.5	40.51	11.1	1.21	31.56	-	-	Peak
366.5	17.48	-28.52	46	31.13	15.54	2.07	31.26	-	-	Peak
436.5	19.73	-26.27	46	31.42	17.17	2.27	31.13	-	-	Peak
533.8	19.67	-26.33	46	29.42	18.74	2.52	31.01	-	-	Peak
2390	48.56	-25.44	74	44.2	32.18	6.03	33.85	100	350	Peak
2390	35.03	-18.97	54	30.67	32.18	6.03	33.85	100	350	Average
2437	110.57	-	-	106.1	32.24	6.11	33.88	100	350	Peak
2437	98.21	-	-	93.74	32.24	6.11	33.88	100	350	Average
2492	51.09	-22.91	74	46.51	32.3	6.18	33.9	100	350	Peak
2492	37.9	-16.1	54	33.32	32.3	6.18	33.9	100	350	Average
4874	52.58	-21.42	74	68.41	34.08	9.13	59.04	100	325	Peak
4874	38.43	-15.57	54	54.26	34.08	9.13	59.04	100	325	Average
7311	44.26	-29.74	74	56.88	35.45	10.06	58.13	100	0	Peak



Test Mode :	Mode 5	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.52	32.66	-7.34	40	55.22	8.28	0.7	31.54	100	215	Peak
97.5	21.01	-22.49	43.5	41.98	9.57	0.99	31.53	-	-	Peak
149.34	18.15	-25.35	43.5	37.35	11.15	1.21	31.56	-	-	Peak
363	16.25	-29.75	46	30.03	15.42	2.07	31.27	-	-	Peak
461	18.76	-27.24	46	29.95	17.57	2.32	31.08	-	-	Peak
554.1	20.27	-25.73	46	29.63	19.05	2.56	30.97	-	-	Peak
2390	44.59	-29.41	74	40.23	32.18	6.03	33.85	100	268	Peak
2390	33.53	-20.47	54	29.17	32.18	6.03	33.85	100	268	Average
2437	105.86	-	-	101.39	32.24	6.11	33.88	100	268	Peak
2437	93.82	-	-	89.35	32.24	6.11	33.88	100	268	Average
2492	46.75	-27.25	74	42.17	32.3	6.18	33.9	100	268	Peak
2492	34.14	-19.86	54	29.56	32.3	6.18	33.9	100	268	Average
4874	46.06	-27.94	74	61.89	34.08	9.13	59.04	100	0	Peak



Test Mode :	Mode 6	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.09	28.88	-11.12	40	50.64	9.08	0.68	31.52	100	211	Peak
92.37	16.63	-26.87	43.5	38.29	8.9	0.96	31.52	-	-	Peak
151.77	20.52	-22.98	43.5	39.9	10.96	1.21	31.55	-	-	Peak
321.7	17.24	-28.76	46	32.59	14.15	1.82	31.32	-	-	Peak
430.9	19.28	-26.72	46	31.09	17.07	2.25	31.13	-	-	Peak
567.4	19.69	-26.31	46	28.79	19.26	2.6	30.96	-	-	Peak
2390	47.04	-26.96	74	42.68	32.18	6.03	33.85	103	317	Peak
2390	34.96	-19.04	54	30.6	32.18	6.03	33.85	103	317	Average
2462	114.1	-	-	109.59	32.26	6.14	33.89	103	317	Peak
2462	101.56	-	-	97.05	32.26	6.14	33.89	103	317	Average
2483.66	64.4	-9.6	74	59.84	32.28	6.18	33.9	103	317	Peak
2483.66	48.92	-5.08	54	44.36	32.28	6.18	33.9	103	317	Average
4924	47.57	-26.43	74	63.29	34.09	9.15	58.96	100	0	Peak



Test Mode :	Mode 6	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.25	32.73	-7.27	40	55.29	8.28	0.7	31.54	100	315	Peak
98.85	28.91	-14.59	43.5	49.78	9.68	0.99	31.54	-	-	Peak
203.61	22.93	-20.57	43.5	43.71	9.37	1.33	31.48	-	-	Peak
377	17.71	-28.29	46	30.99	15.87	2.09	31.24	-	-	Peak
464.5	18.87	-27.13	46	29.98	17.64	2.33	31.08	-	-	Peak
508.6	19.75	-26.25	46	29.98	18.35	2.47	31.05	-	-	Peak
2390	45.62	-28.38	74	41.26	32.18	6.03	33.85	122	279	Peak
2390	34.22	-19.78	54	29.86	32.18	6.03	33.85	122	279	Average
2462	111.49	-	-	106.98	32.26	6.14	33.89	122	279	Peak
2462	99.21	-	-	94.7	32.26	6.14	33.89	122	279	Average
2483.66	59.97	-14.03	74	55.41	32.28	6.18	33.9	122	279	Peak
2483.66	45.74	-8.26	54	41.18	32.28	6.18	33.9	122	279	Average
4924	44.83	-29.17	74	60.55	34.09	9.15	58.96	100	0	Peak
7386	45.29	-28.71	74	57.98	35.38	10.1	58.17	100	0	Peak



Test Mode :	Mode 7	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
47.82	28.48	-11.52	40	49.85	9.48	0.67	31.52	100	311	Peak
92.37	17.4	-26.1	43.5	39.06	8.9	0.96	31.52	-	-	Peak
151.5	21.19	-22.31	43.5	40.5	11.03	1.21	31.55	-	-	Peak
324.5	17.03	-28.97	46	32.28	14.24	1.83	31.32	-	-	Peak
374.2	18.04	-27.96	46	31.42	15.78	2.09	31.25	-	-	Peak
458.9	20.19	-25.81	46	31.41	17.54	2.32	31.08	-	-	Peak
2390	53.42	-20.58	74	49.06	32.18	6.03	33.85	100	347	Peak
2390	38.51	-15.49	54	34.15	32.18	6.03	33.85	100	347	Average
2412	100.65	-	-	96.25	32.2	6.07	33.87	100	347	Peak
2412	88.49	-	-	84.09	32.2	6.07	33.87	100	347	Average
2486	34.13	-19.87	54	29.57	32.28	6.18	33.9	100	347	Average
2486	45.68	-28.32	74	41.12	32.28	6.18	33.9	100	347	Peak
4824	43.41	-30.59	74	59.33	34.07	9.12	59.11	100	0	Peak



Test Mode :	Mode 7	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.25	33.15	-6.85	40	55.71	8.28	0.7	31.54	100	219	Peak
97.5	21.96	-21.54	43.5	42.93	9.57	0.99	31.53	-	-	Peak
216.57	18.73	-27.27	46	38.52	10.27	1.4	31.46	-	-	Peak
310.5	15.99	-30.01	46	31.73	13.79	1.79	31.32	-	-	Peak
344.1	20.03	-25.97	46	34.56	14.84	1.92	31.29	-	-	Peak
413.4	20.11	-25.89	46	32.3	16.78	2.19	31.16	-	-	Peak
2390	51.25	-22.75	74	46.89	32.18	6.03	33.85	100	256	Peak
2390	34.96	-19.04	54	30.6	32.18	6.03	33.85	100	256	Average
2412	95.3	-	-	90.9	32.2	6.07	33.87	100	256	Peak
2412	83.34	-	-	78.94	32.2	6.07	33.87	100	256	Average
2492	44.29	-29.71	74	39.71	32.3	6.18	33.9	100	256	Peak
2492	32.7	-21.3	54	28.12	32.3	6.18	33.9	100	256	Average



Test Mode :	Mode 8	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.09	26.24	-13.76	40	48	9.08	0.68	31.52	133	115	Peak
92.37	14.41	-29.09	43.5	36.07	8.9	0.96	31.52	-	-	Peak
149.34	17.77	-25.73	43.5	36.97	11.15	1.21	31.56	-	-	Peak
321.7	15.95	-30.05	46	31.3	14.15	1.82	31.32	-	-	Peak
427.4	18.31	-27.69	46	30.18	17.03	2.24	31.14	-	-	Peak
500.2	19.46	-26.54	46	29.85	18.23	2.45	31.07	-	-	Peak
2390	45.58	-28.42	74	41.22	32.18	6.03	33.85	100	349	Peak
2390	33.65	-20.35	54	29.29	32.18	6.03	33.85	100	349	Average
2437	101.28	-	-	96.81	32.24	6.11	33.88	100	349	Peak
2437	89.49	-	-	85.02	32.24	6.11	33.88	100	349	Average
2484	47.93	-26.07	74	43.37	32.28	6.18	33.9	100	349	Peak
2484	35.25	-18.75	54	30.69	32.28	6.18	33.9	100	349	Average
4874	43.1	-30.9	74	58.93	34.08	9.13	59.04	100	0	Peak



Test Mode :	Mode 8	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.25	33.42	-6.58	40	55.98	8.28	0.7	31.54	123	111	Peak
97.5	22.47	-21.03	43.5	43.44	9.57	0.99	31.53	-	-	Peak
123.69	19.09	-24.41	43.5	37.98	11.55	1.12	31.56	-	-	Peak
383.3	17.62	-28.38	46	30.69	16.05	2.11	31.23	-	-	Peak
486.9	19.55	-26.45	46	30.2	18.01	2.4	31.06	-	-	Peak
554.1	20.12	-25.88	46	29.48	19.05	2.56	30.97	-	-	Peak
2390	44.88	-29.12	74	40.52	32.18	6.03	33.85	100	287	Peak
2390	32.96	-21.04	54	28.6	32.18	6.03	33.85	100	287	Average
2437	96.89	-	-	92.42	32.24	6.11	33.88	100	287	Peak
2437	85.34	-	-	80.87	32.24	6.11	33.88	100	287	Average
2486	45.41	-28.59	74	40.85	32.28	6.18	33.9	100	287	Peak
2486	32.9	-21.1	54	28.34	32.28	6.18	33.9	100	287	Average



Test Mode :	Mode 9	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.09	28.32	-11.68	40	50.08	9.08	0.68	31.52	100	315	Peak
92.37	18.53	-24.97	43.5	40.19	8.9	0.96	31.52	-	-	Peak
153.93	19.35	-24.15	43.5	38.87	10.81	1.21	31.54	-	-	Peak
324.5	16.54	-29.46	46	31.79	14.24	1.83	31.32	-	-	Peak
430.2	18.73	-27.27	46	30.54	17.07	2.25	31.13	-	-	Peak
663.3	21.79	-24.21	46	29.3	20.48	2.87	30.86	-	-	Peak
2382	44.9	-29.1	74	40.56	32.16	6.03	33.85	100	351	Peak
2382	33.24	-20.76	54	28.9	32.16	6.03	33.85	100	351	Average
2462	105.75	-	-	101.24	32.26	6.14	33.89	100	351	Peak
2462	93.34	-	-	88.83	32.26	6.14	33.89	100	351	Average
2483.85	68.13	-5.87	74	63.57	32.28	6.18	33.9	100	351	Peak
2483.85	48.38	-5.62	54	43.82	32.28	6.18	33.9	100	351	Average



Test Mode :	Mode 9	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
51.06	33.39	-6.61	40	56.2	8.02	0.71	31.54	166	158	Peak
97.5	21.46	-22.04	43.5	42.43	9.57	0.99	31.53	-	-	Peak
212.25	18.69	-24.81	43.5	38.8	9.99	1.37	31.47	-	-	Peak
304.9	20.54	-25.46	46	36.48	13.61	1.78	31.33	-	-	Peak
338.5	19.92	-26.08	46	34.68	14.66	1.88	31.3	-	-	Peak
463.8	19.36	-26.64	46	30.49	17.62	2.33	31.08	-	-	Peak
2356	45.11	-28.89	74	40.86	32.13	5.95	33.83	100	261	Peak
2356	32.4	-21.6	54	28.15	32.13	5.95	33.83	100	261	Average
2462	101.5	-	-	96.99	32.26	6.14	33.89	100	261	Peak
2462	89.56	-	-	85.05	32.26	6.14	33.89	100	261	Average
2483.5	63.25	-10.75	74	58.69	32.28	6.18	33.9	100	261	Peak
2483.5	43.55	-10.45	54	38.99	32.28	6.18	33.9	100	261	Average



Test Mode :	Mode 10	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
58.62	30.81	-9.19	40	55.67	5.93	0.75	31.54	131	115	Peak
148.53	20.3	-23.2	43.5	39.46	11.19	1.21	31.56	-	-	Peak
191.73	21.64	-21.86	43.5	42.77	9.08	1.29	31.5	-	-	Peak
385.4	19.86	-26.14	46	32.86	16.11	2.11	31.22	-	-	Peak
455.4	20.11	-25.89	46	31.4	17.49	2.31	31.09	-	-	Peak
598.2	20.74	-25.26	46	29.24	19.74	2.68	30.92	-	-	Peak
2390	57.06	-16.94	74	52.7	32.18	6.03	33.85	100	331	Peak
2390	38.7	-15.3	54	34.34	32.18	6.03	33.85	100	331	Average
2412	100.56	-	-	96.16	32.2	6.07	33.87	100	331	Peak
2412	88.27	-	-	83.87	32.2	6.07	33.87	100	331	Average
2492	33.87	-20.13	54	29.29	32.3	6.18	33.9	100	331	Average
2492	45.48	-28.52	74	40.9	32.3	6.18	33.9	100	331	Peak



Test Mode :	Mode 10	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
49.98	33.04	-6.96	40	55.6	8.28	0.7	31.54	100	215	Peak
98.58	21.87	-21.63	43.5	42.74	9.68	0.99	31.54	-	-	Peak
150.42	18.31	-25.19	43.5	37.56	11.1	1.21	31.56	-	-	Peak
344.1	16.23	-29.77	46	30.76	14.84	1.92	31.29	-	-	Peak
466.6	20.26	-25.74	46	31.32	17.67	2.34	31.07	-	-	Peak
581.4	20.11	-25.89	46	28.94	19.47	2.64	30.94	-	-	Peak
2390	52.97	-21.03	74	48.61	32.18	6.03	33.85	128	282	Peak
2390	36.65	-17.35	54	32.29	32.18	6.03	33.85	128	282	Average
2412	98.07	-	-	93.67	32.2	6.07	33.87	128	282	Peak
2412	85.54	-	-	81.14	32.2	6.07	33.87	128	282	Average
2494	32.52	-21.48	54	27.94	32.3	6.18	33.9	128	282	Average
2494	43.79	-30.21	74	39.21	32.3	6.18	33.9	128	282	Peak



Test Mode :	Mode 11	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.09	29.05	-10.95	40	50.81	9.08	0.68	31.52	131	165	Peak
92.37	19.07	-24.43	43.5	40.73	8.9	0.96	31.52	-	-	Peak
151.77	21.57	-21.93	43.5	40.95	10.96	1.21	31.55	-	-	Peak
366.5	18.12	-27.88	46	31.77	15.54	2.07	31.26	-	-	Peak
475	20.5	-25.5	46	31.38	17.81	2.37	31.06	-	-	Peak
584.9	20.77	-25.23	46	29.53	19.53	2.65	30.94	-	-	Peak
2382	45.84	-28.16	74	41.5	32.16	6.03	33.85	100	348	Peak
2382	32.78	-21.22	54	28.44	32.16	6.03	33.85	100	348	Average
2437	101.07	-	-	96.6	32.24	6.11	33.88	100	348	Peak
2437	88.6	-	-	84.13	32.24	6.11	33.88	100	348	Average
2494	46.9	-27.1	74	42.32	32.3	6.18	33.9	100	348	Peak
2494	34.42	-19.58	54	29.84	32.3	6.18	33.9	100	348	Average
4874	43.14	-30.86	74	58.97	34.08	9.13	59.04	100	0	Peak



Test Mode :	Mode 11	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.25	33.14	-6.86	40	55.7	8.28	0.7	31.54	131	169	Peak
97.5	22.25	-21.25	43.5	43.22	9.57	0.99	31.53	-	-	Peak
150.42	18.07	-25.43	43.5	37.32	11.1	1.21	31.56	-	-	Peak
338.5	19.8	-26.2	46	34.56	14.66	1.88	31.3	-	-	Peak
433	18.59	-27.41	46	30.36	17.11	2.25	31.13	-	-	Peak
483.4	19.92	-26.08	46	30.65	17.94	2.39	31.06	-	-	Peak
2358	44.72	-29.28	74	40.44	32.13	5.99	33.84	121	285	Peak
2358	32.31	-21.69	54	28.03	32.13	5.99	33.84	121	285	Average
2437	97.95	-	-	93.48	32.24	6.11	33.88	121	285	Peak
2437	85.58	-	-	81.11	32.24	6.11	33.88	121	285	Average
2484	44.97	-29.03	74	40.41	32.28	6.18	33.9	121	285	Peak
2484	33.52	-20.48	54	28.96	32.28	6.18	33.9	121	285	Average



Test Mode :	Mode 12	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.09	28.15	-11.85	40	49.91	9.08	0.68	31.52	109	41	Peak
92.37	17.29	-26.21	43.5	38.95	8.9	0.96	31.52	-	-	Peak
150.69	20.8	-22.7	43.5	40.05	11.1	1.21	31.56	-	-	Peak
382.6	19.37	-26.63	46	32.44	16.05	2.11	31.23	-	-	Peak
536.6	20.26	-25.74	46	29.96	18.78	2.52	31	-	-	Peak
680.1	22.63	-23.37	46	29.91	20.66	2.9	30.84	-	-	Peak
2388	45.1	-28.9	74	40.74	32.18	6.03	33.85	100	352	Peak
2388	33.17	-20.83	54	28.81	32.18	6.03	33.85	100	352	Average
2462	104.98	-	-	100.47	32.26	6.14	33.89	100	352	Peak
2462	92.29	-	-	87.78	32.26	6.14	33.89	100	352	Average
2483.85	70.04	-3.96	74	65.48	32.28	6.18	33.9	100	352	Peak
2483.85	48.41	-5.59	54	43.85	32.28	6.18	33.9	100	352	Average



Test Mode :	Mode 12	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
51.06	33.16	-6.84	40	55.97	8.02	0.71	31.54	139	191	Peak
98.58	21.58	-21.92	43.5	42.45	9.68	0.99	31.54	-	-	Peak
149.61	19.08	-24.42	43.5	38.28	11.15	1.21	31.56	-	-	Peak
341.3	17.32	-28.68	46	31.97	14.75	1.9	31.3	-	-	Peak
458.2	19.86	-26.14	46	31.1	17.52	2.32	31.08	-	-	Peak
595.4	20.81	-25.19	46	29.36	19.7	2.68	30.93	-	-	Peak
2388	44.56	-29.44	74	40.2	32.18	6.03	33.85	100	261	Peak
2388	32.83	-21.17	54	28.47	32.18	6.03	33.85	100	261	Average
2462	100.64	-	-	96.13	32.26	6.14	33.89	100	261	Peak
2462	88.42	-	-	83.91	32.26	6.14	33.89	100	261	Average
2483.5	63.65	-10.35	74	59.09	32.28	6.18	33.9	100	261	Peak
2483.5	43.23	-10.77	54	38.67	32.28	6.18	33.9	100	261	Average



3.8 Antenna Requirements

3.8.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.8.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jun. 08, 2009	Jun. 07, 2011	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 11, 2010	Jun. 10, 2011	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 18, 2011	Feb. 17, 2012	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 18, 2011	Feb. 17, 2012	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 30, 2010	Jul. 29, 2011	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 18, 2010	May 17, 2011	Radiation (03CH05-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 18, 2010	Oct. 17, 2011	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				