

# FCC RF Test Report

**APPLICANT** : HTC Corporation  
**EQUIPMENT** : Smart Phone  
**MODEL NAME** : PH44100  
**FCC ID** : NM8PH44100  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Spread Spectrum (DSS)

The product was received on Mar. 29, 2011 and completely tested on Apr. 22, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PH44100

Page Number : 1 of 52

Report Issued Date : May 20, 2011

Report Version : Rev. 01



# TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

    2.1 RF Output Power ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 10

    2.4 RF Utility ..... 10

**3 TEST RESULT ..... 11**

    3.1 Number of Channel Measurement ..... 11

    3.2 20dB Bandwidth Measurement ..... 13

    3.3 Hopping Channel Separation Measurement ..... 20

    3.4 Dwell Time Measurement..... 23

    3.5 Peak Output Power Measurement ..... 25

    3.6 Band Edges Measurement ..... 28

    3.7 Spurious Emission Measurement..... 32

    3.8 AC Conducted Emission Measurement..... 36

    3.9 Radiated Emission Measurement..... 40

    3.10 Antenna Requirements ..... 49

**4 LIST OF MEASURING EQUIPMENT..... 50**

**5 UNCERTAINTY OF EVALUATION..... 51**

**APPENDIX A. SETUP PHOTOGRAPHS**



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR132949A	Rev. 01	Initial issue of report	May 20, 2011



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 7.7 dB at 0.79 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.7 dB at 57.54 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

HTC Corporation

1F., No. 6-3, Baoqiang Rd., Xindian City, Taipei, Taiwan

## 1.2 Manufacturer

HTC Corporation

1F., No. 6-3, Baoqiang Rd., Xindian City, Taipei, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart Phone
Model Name	PH44100
FCC ID	NM8PH44100
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 1.28 dBm (0.001 W) Bluetooth EDR (2Mbps) : 4.05 dBm (0.003 W) Bluetooth EDR (3Mbps) : 1.90 dBm (0.002 W)
Antenna Type	PIFA Antenna with gain -3 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Production Unit

### Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH07-HY	722060/4086B-1

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Agilent	E6651A	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
6.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF peak output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	0.15 dBm	2.96 dBm	0.54 dBm
Ch39	2441MHz	1.28 dBm	<b>4.05 dBm</b>	1.90 dBm
Ch78	2480MHz	0.58 dBm	3.24 dBm	1.25 dBm

**Remark:**

1. The data rate was set in 2Mbps for all the test items due to the highest RF peak output power.
2. The EUT is programmed to transmit signals continuously for all testing.



## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


<b>Test Cases</b>			
<b>Test Item</b>	<b>Data Rate / Modulation</b>		
	<b>Bluetooth 1Mbps GFSK</b>	<b>Bluetooth EDR 2Mbps <math>\pi/4</math>-DQPSK</b>	<b>Bluetooth EDR 3Mbps 8-DPSK</b>
<b>Conducted TCs</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated TCs</b>	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A
<b>AC Conducted Emission</b>	Mode 1 :CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + GPS Rx + WiMAX Idle + Battery 1 + Earphone + USB Cable 1 (Charging from Adapter 1) Mode 2 :CDMA2000 BC1 Idle + Bluetooth Link + WLAN Link + GPS Rx + WiMAX Idle + Battery 2 + Earphone + USB Cable 2 (Charging from Adapter 2)		
<b>Remark:</b>			
<ol style="list-style-type: none"> <li>1. The Radiation test was performed with Battery 1, USB Cable 3, Earphone, and Adapter 1.</li> <li>2. For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported.</li> <li>3. For conducted emission, the worst case is mode 2; only the test data of this mode was reported.</li> </ol>			

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

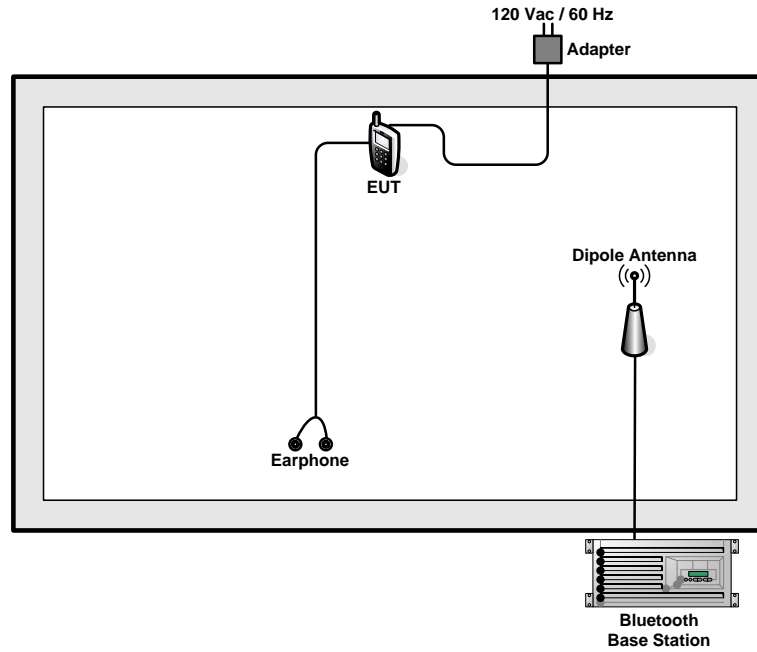

<AC Conducted Emission Mode>

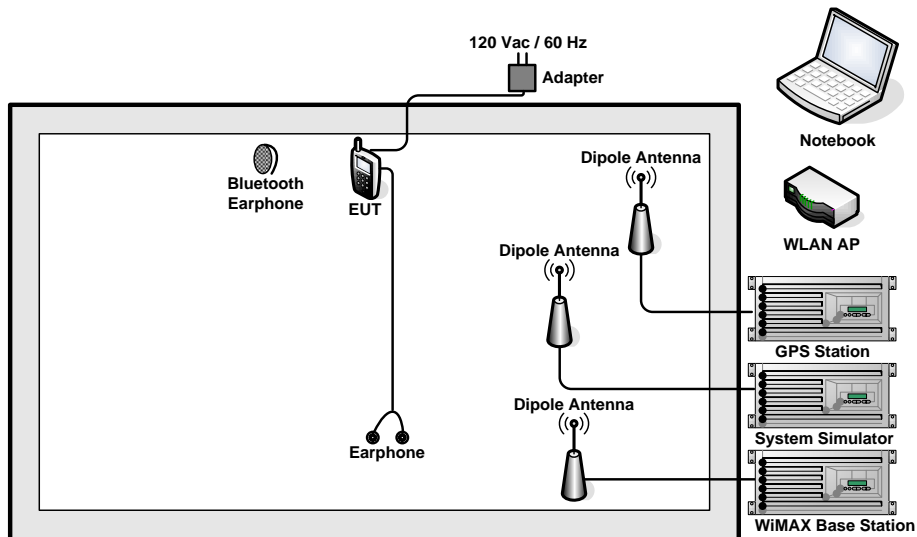

## 2.4 RF Utility

For Bluetooth function, the RF utility, “Bluetooth Test Mode” was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

##### 3.1.4 Test Setup

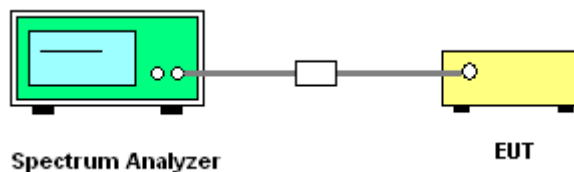


##### 3.1.5 Test Result of Number of Hopping Frequency


<b>Test Mode :</b>	Mode 4~6	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Pinkston Tu	<b>Relative Humidity :</b>	51~54%
<b>Number of Hopping Channels (Channel)</b>		<b>Limits (Channel)</b>	<b>Pass/Fail</b>
79		> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

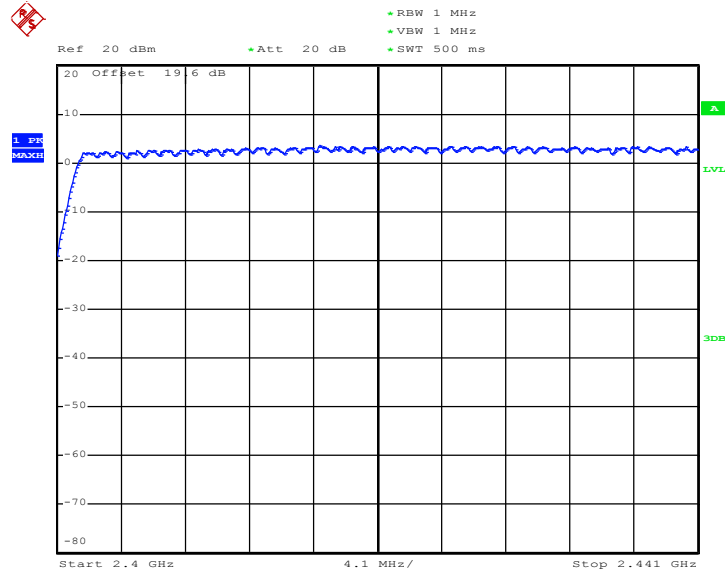

Date: 6.APR.2011 15:48:06

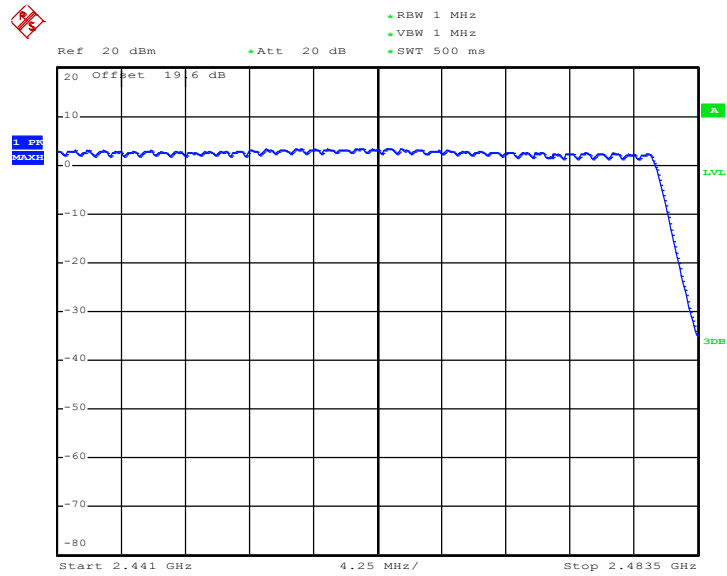

Date: 6.APR.2011 15:52:17

## 3.2 20dB Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

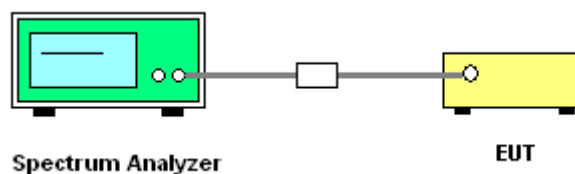




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~25°C
Test Engineer :	Pinkston Tu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.992
39	2441	0.988
78	2480	0.984


20 dB Bandwidth Plot on Channel 00

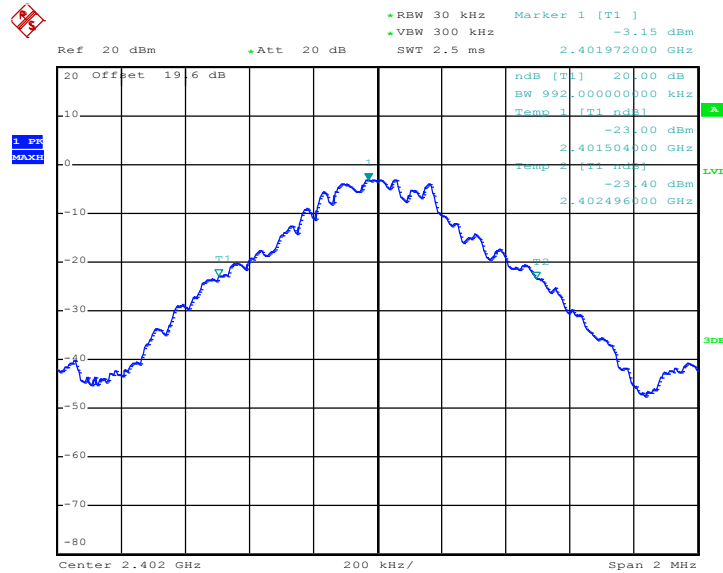

Date: 6.APR.2011 14:27:36




### 20 dB Bandwidth Plot on Channel 39

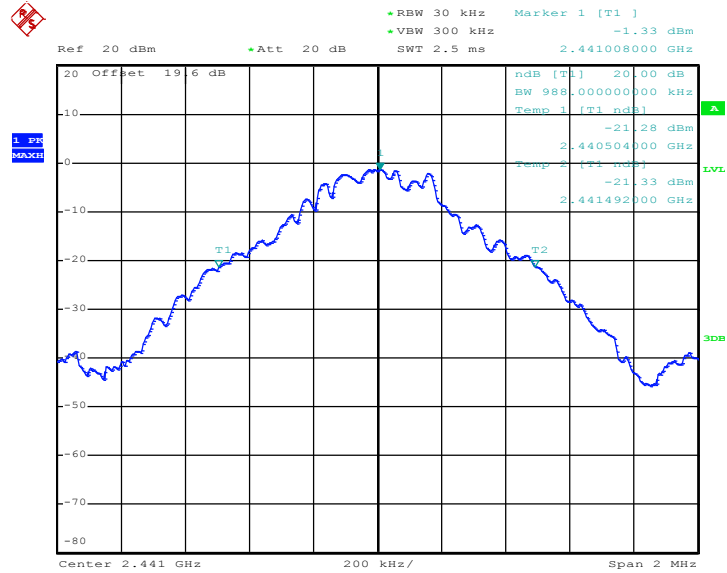

Date: 6.APR.2011 14:28:13

### 20 dB Bandwidth Plot on Channel 78

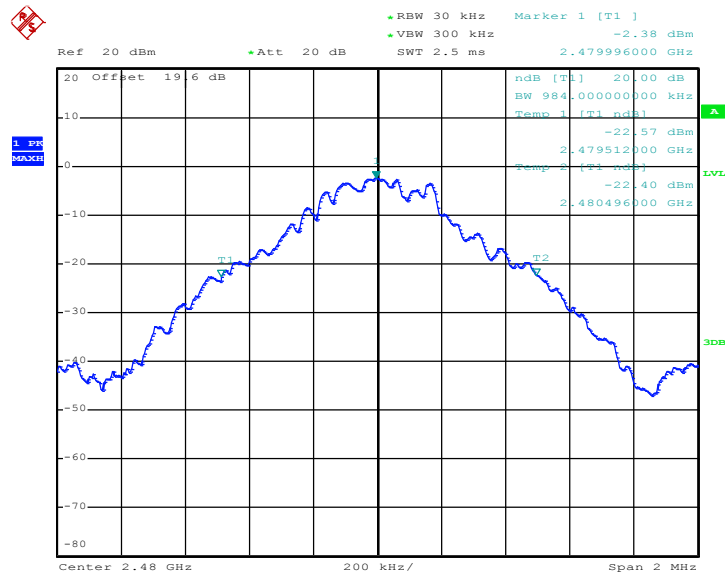


Date: 6.APR.2011 14:28:37



Test Mode :	Mode 4, 5, 6	Temperature :	23~25°C
Test Engineer :	Pinkston Tu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.332
39	2441	1.332
78	2480	1.332

20 dB Bandwidth Plot on Channel 00

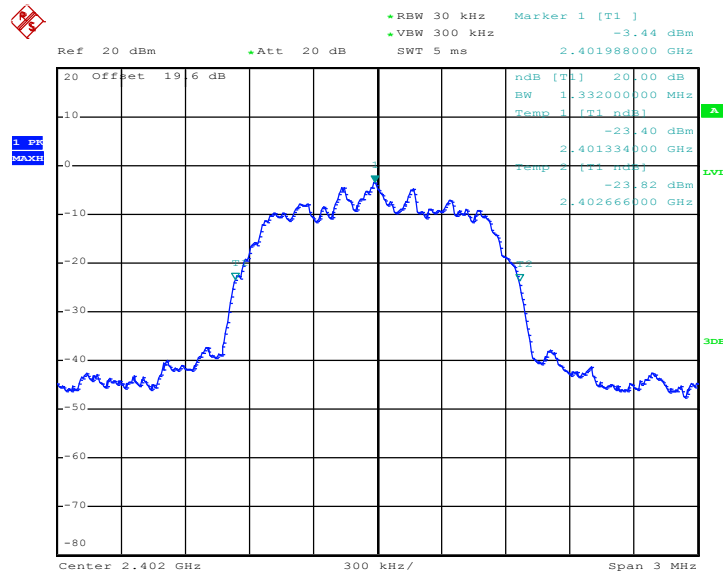


Date: 6.APR.2011 14:29:21






### 20 dB Bandwidth Plot on Channel 39

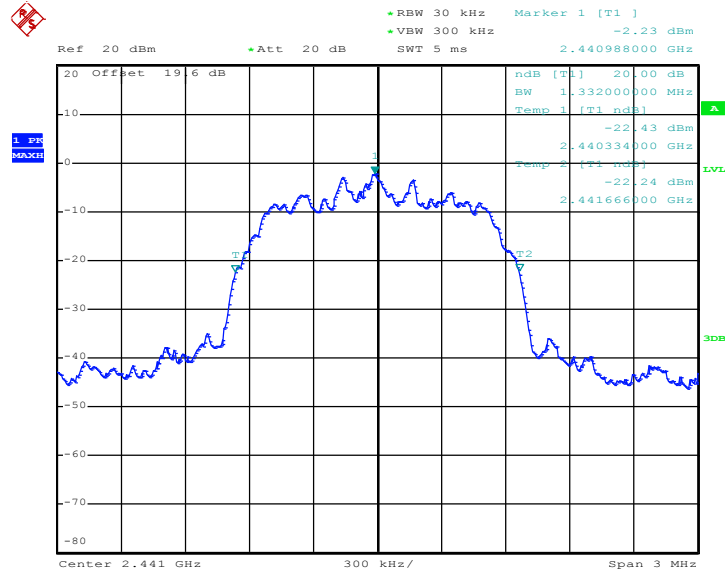

Date: 6.APR.2011 14:29:47

### 20 dB Bandwidth Plot on Channel 78

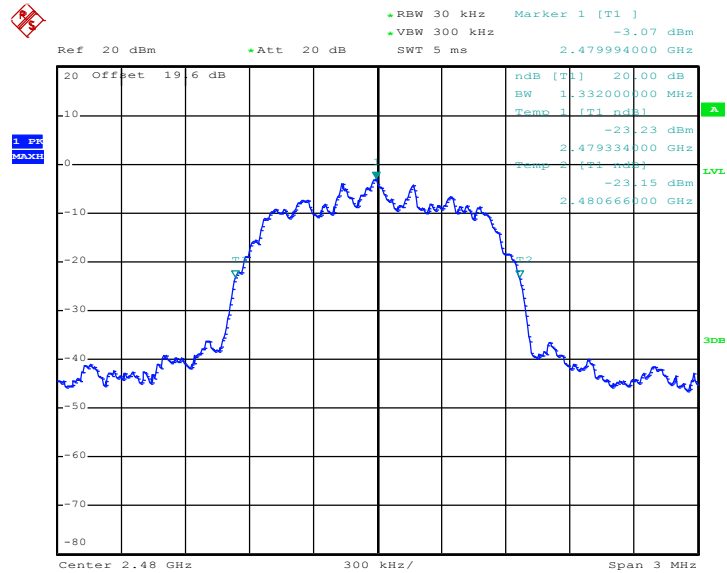


Date: 6.APR.2011 14:30:08



Test Mode :	Mode 7, 8, 9	Temperature :	23~25°C
Test Engineer :	Pinkston Tu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.320
78	2480	1.320


20 dB Bandwidth Plot on Channel 00

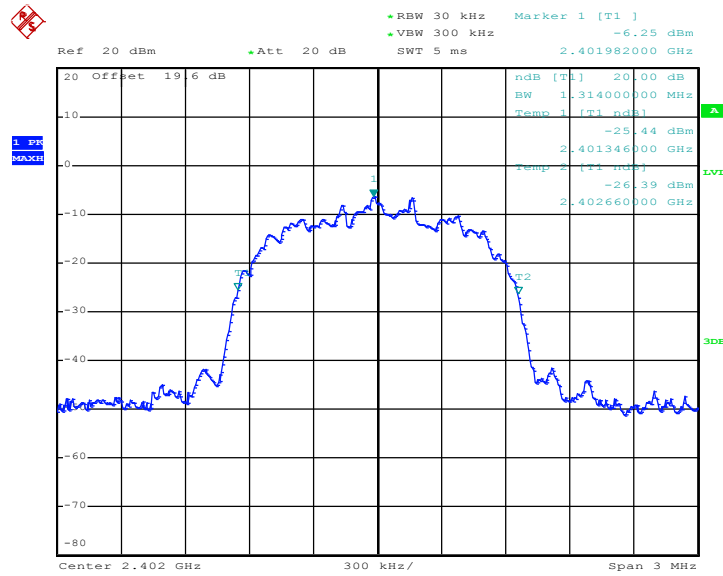

Date: 6.APR.2011 14:31:11




20 dB Bandwidth Plot on Channel 39

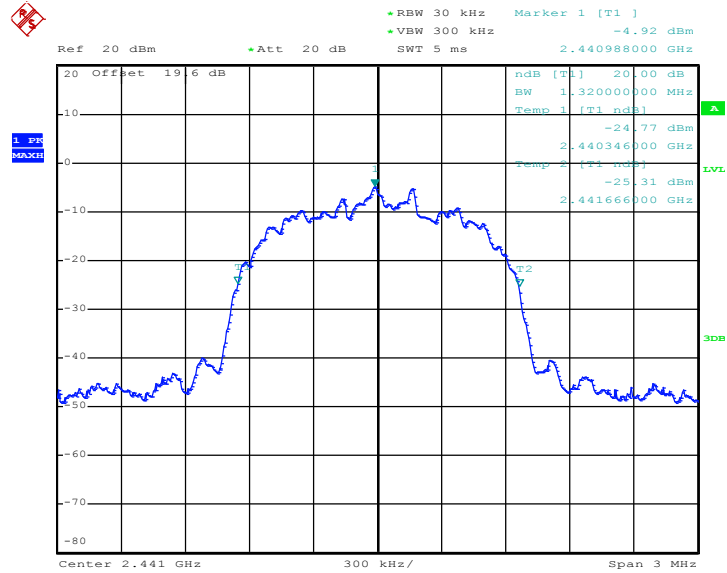

Date: 6.APR.2011 14:31:38

20 dB Bandwidth Plot on Channel 78

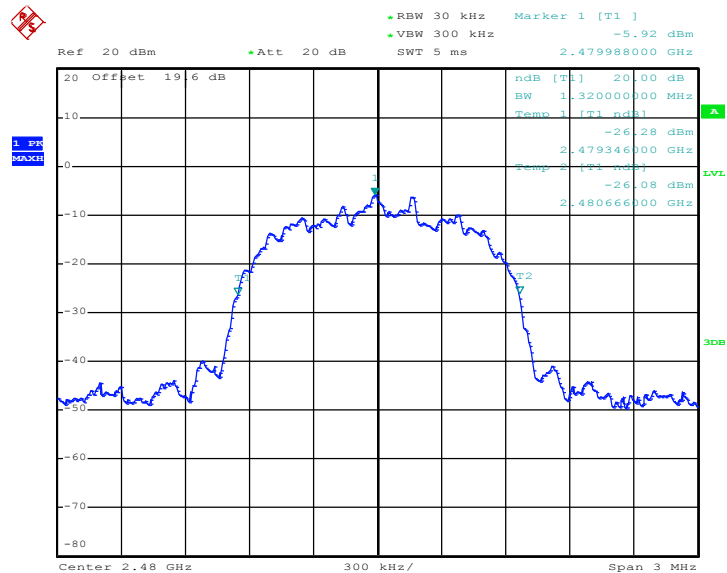

Date: 6.APR.2011 14:31:58

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

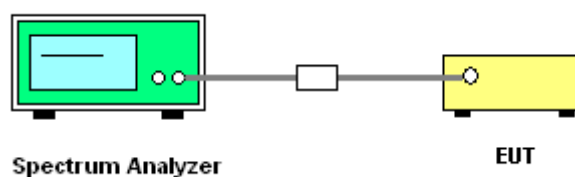




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 4, 5, 6	Temperature :	23~25°C
Test Engineer :	Pinkston Tu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.888	Pass
39	2441	1.002	0.888	Pass
78	2480	1.002	0.888	Pass


Channel Separation Plot on Channel 00 - 01

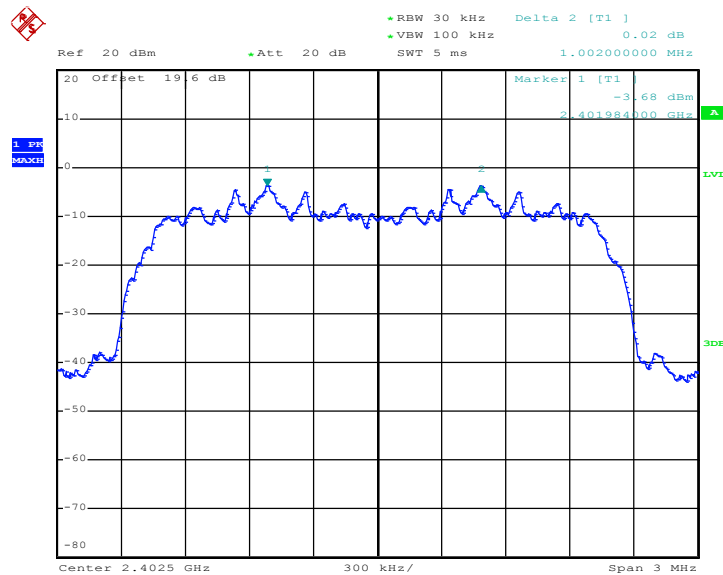

Date: 6.APR.2011 14:17:14




Channel Separation Plot on Channel 39 - 40

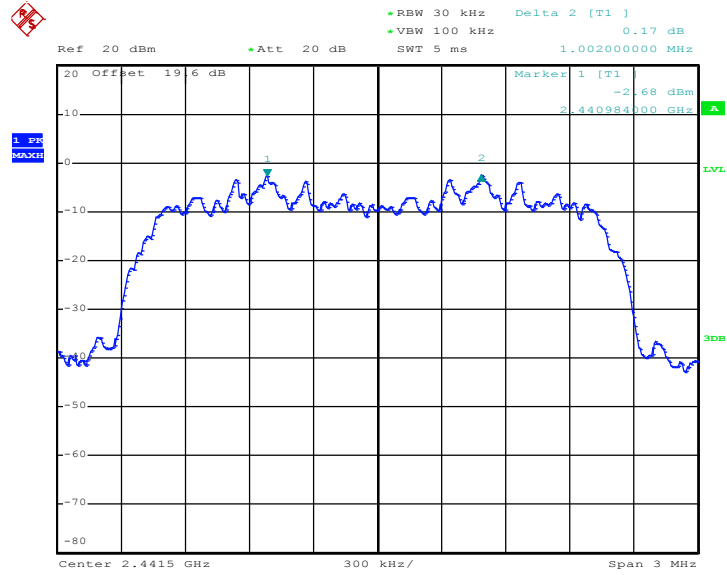

Date: 6.APR.2011 14:17:57

Channel Separation Plot on Channel 77 - 78

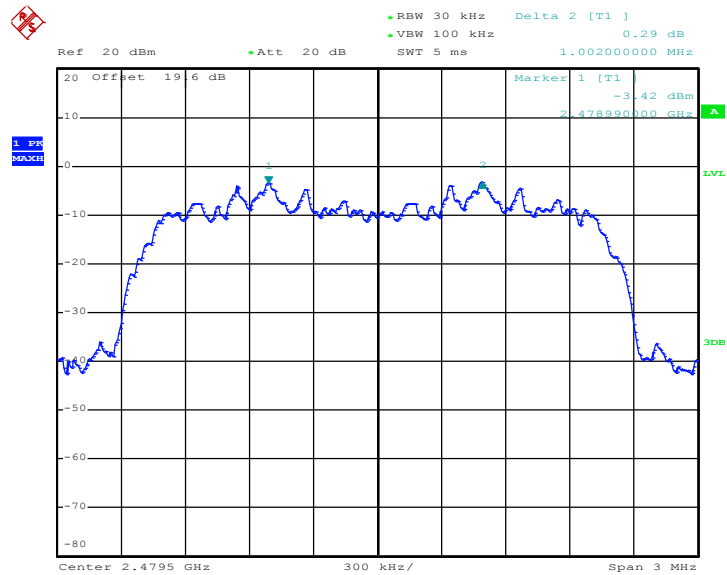

Date: 6.APR.2011 14:18:44

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

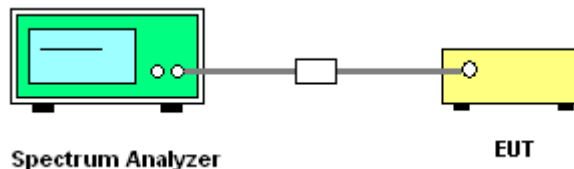

#### 3.4.5 Test Result of Dwell Time

<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Pinkston Tu	<b>Relative Humidity :</b>	51~54%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.00	3070.00	0.29	0.4	Pass

**Remark:**

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




### 2DH5 Dwell Time (One Pulse) Plot on Channel 39

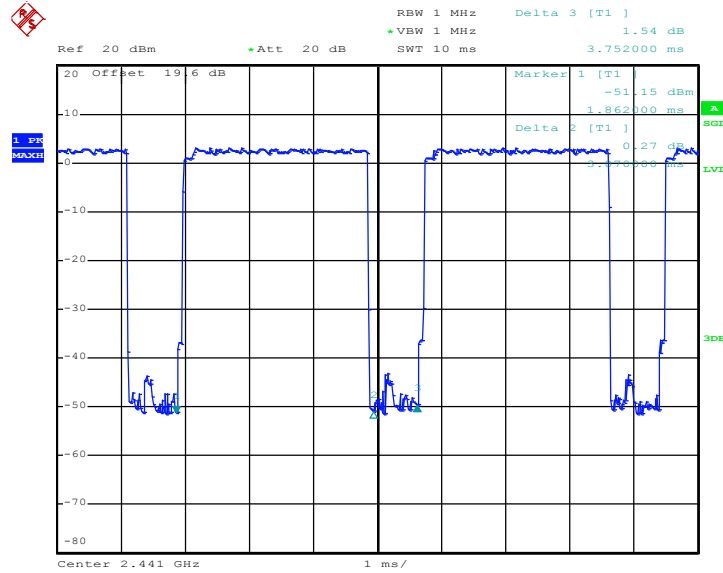

Date: 6.APR.2011 14:09:17

### 2DH5 Dwell Time (Count Pulses) Plot on Channel 39

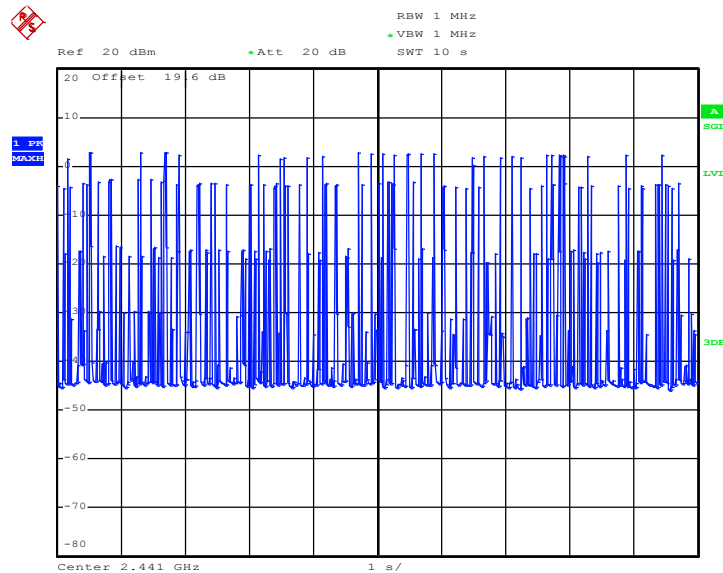

Date: 6.APR.2011 14:25:47



### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

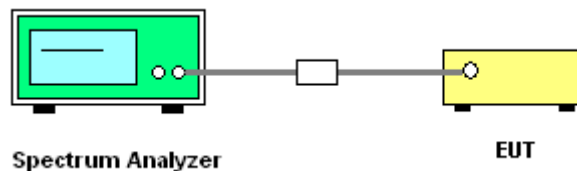


#### 3.5.5 Test Result of Peak Output Power

<b>Test Mode :</b>	Mode 4, 5, 6	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Pinkston Tu	<b>Relative Humidity :</b>	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	2.96	20.97	Pass
39	2441	4.05	20.97	Pass
78	2480	3.24	20.97	Pass




### Peak Output Power Plot on Channel 00

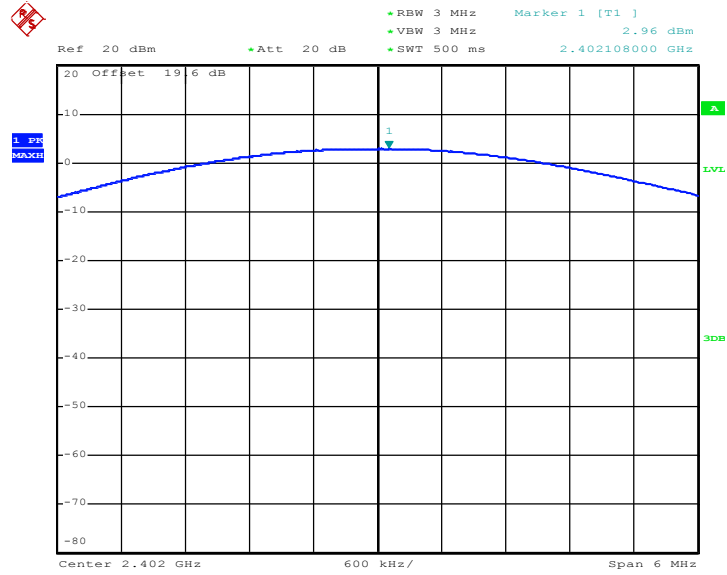

Date: 6.APR.2011 13:59:41


### Peak Output Power Plot on Channel 39

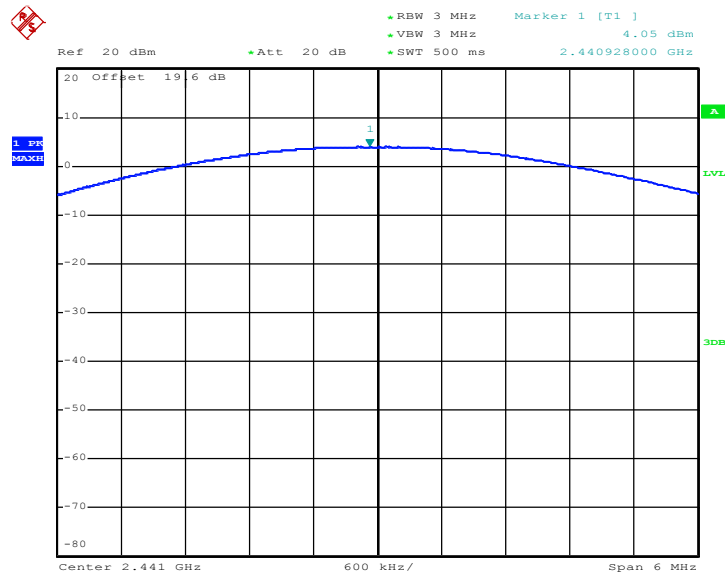

Date: 6.APR.2011 14:00:55



Peak Output Power Plot on Channel 78

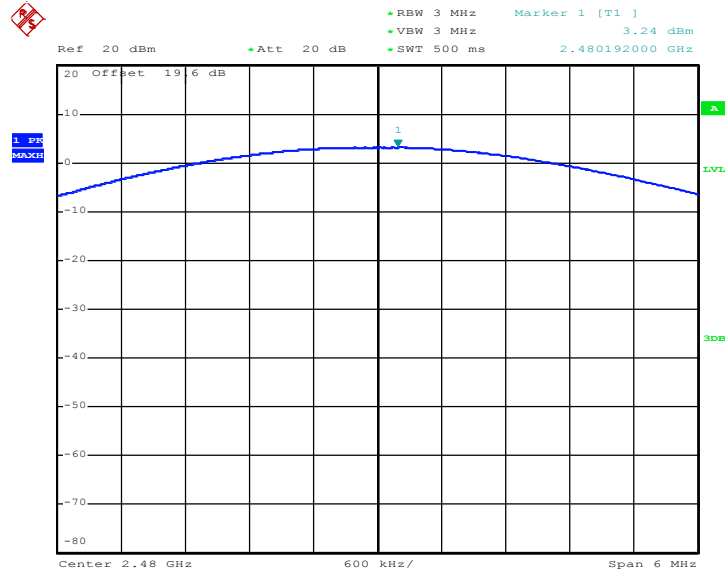

Date: 6.APR.2011 14:02:09



## **3.6 Band Edges Measurement**

### **3.6.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

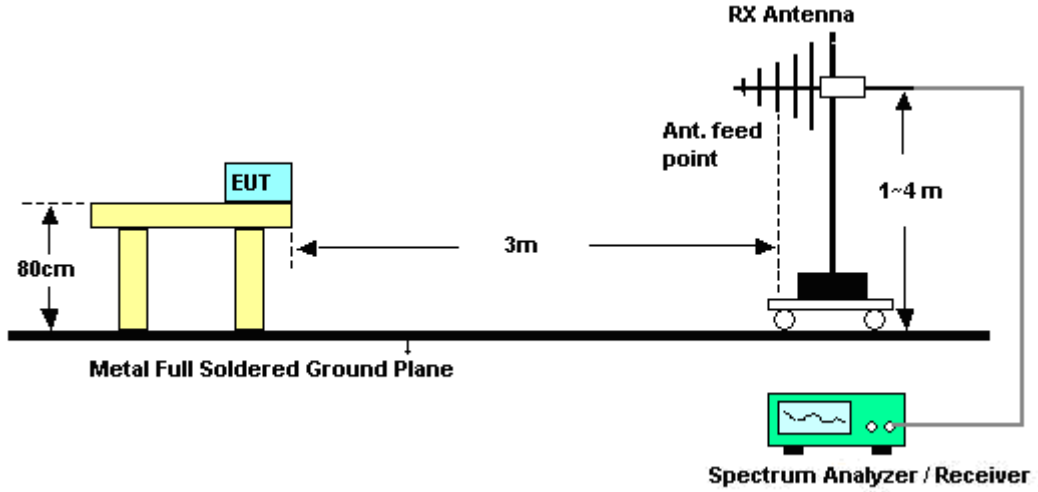

#### <Conducted Band Edges>

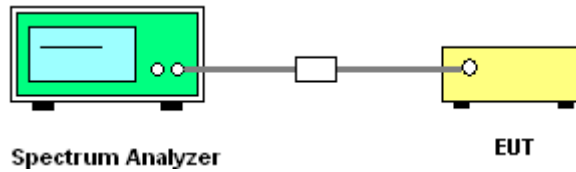



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	47~48%
		Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2340.97	45.81	-28.19	74	43.04	31.84	5.34	34.41	100	323	Peak
2340.97	32.94	-21.06	54	30.17	31.84	5.34	34.41	100	323	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2340.97	46.4	-27.6	74	43.69	31.81	5.31	34.41	103	237	Peak
2340.97	32.94	-21.06	54	30.23	31.81	5.31	34.41	103	234	Average

Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	47~48%
		Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	53.99	-20.01	74	50.86	31.98	5.52	34.37	100	334	Peak
2483.5	42.65	-11.35	54	39.52	31.98	5.52	34.37	100	334	Average


ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	54.02	-19.98	74	50.89	31.98	5.52	34.37	106	342	Peak
2483.5	42.38	-11.62	54	39.25	31.98	5.52	34.37	106	342	Average



### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	23~25°C
Test Channel :	00 and 78	Relative Humidity :	51~54%
		Test Engineer :	Pinkston Tu

Low Band Edge Plot on Channel 00

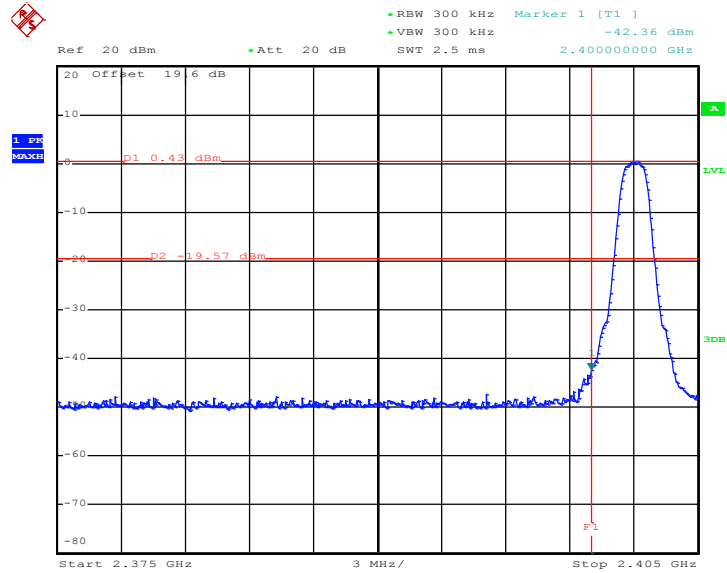

Date: 6.APR.2011 14:45:57

High Band Edge Plot on Channel 78

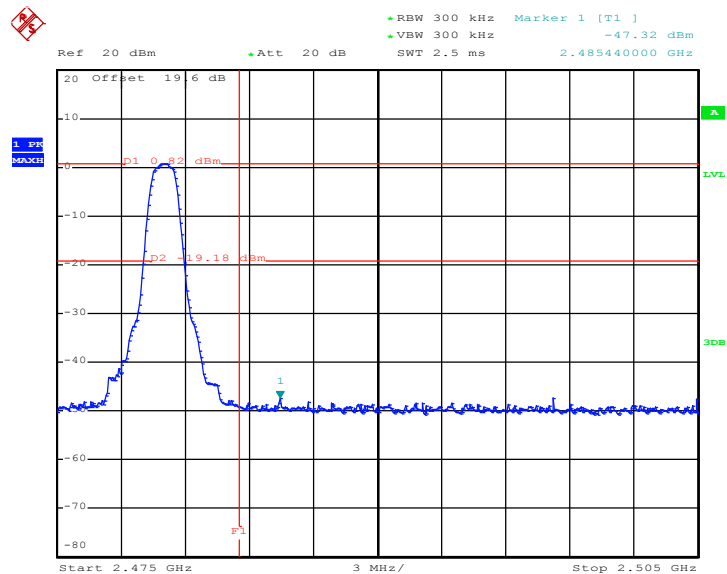

Date: 6.APR.2011 14:47:00

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### 3.7.4 Test Setup

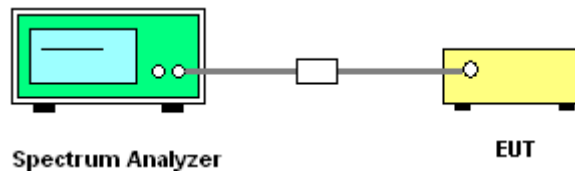






3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

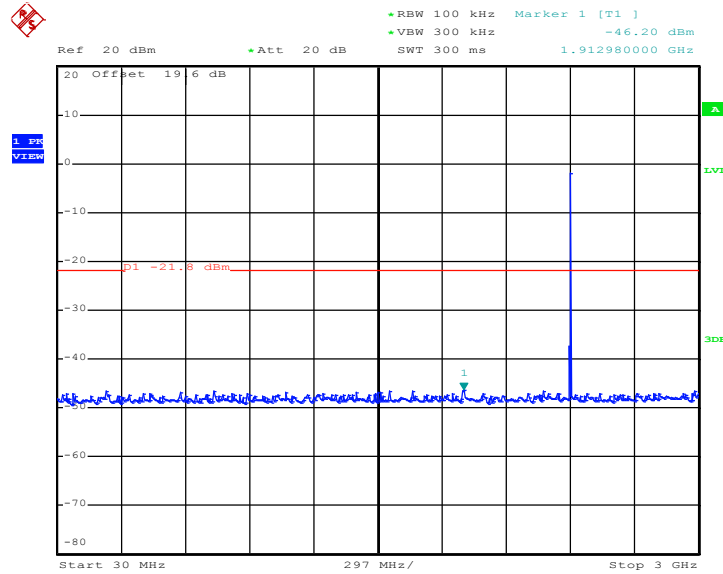

Date: 6.APR.2011 14:55:12

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

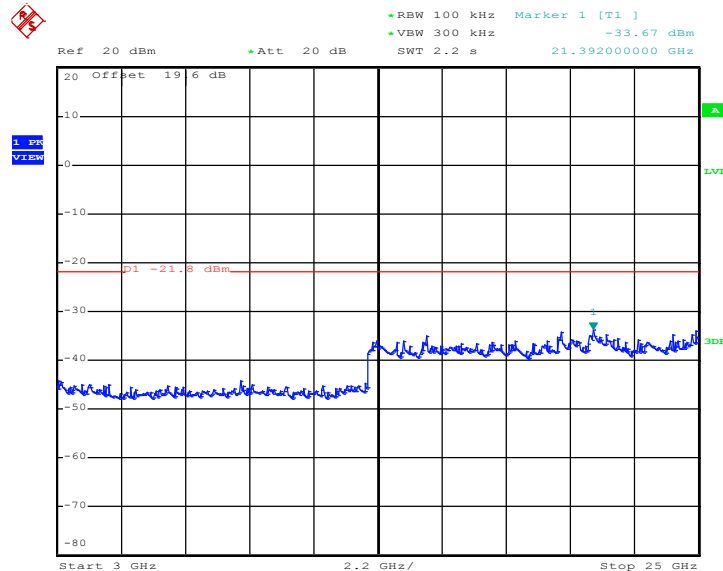


Date: 6.APR.2011 14:55:23




Test Mode :	Mode 5	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	51~54%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

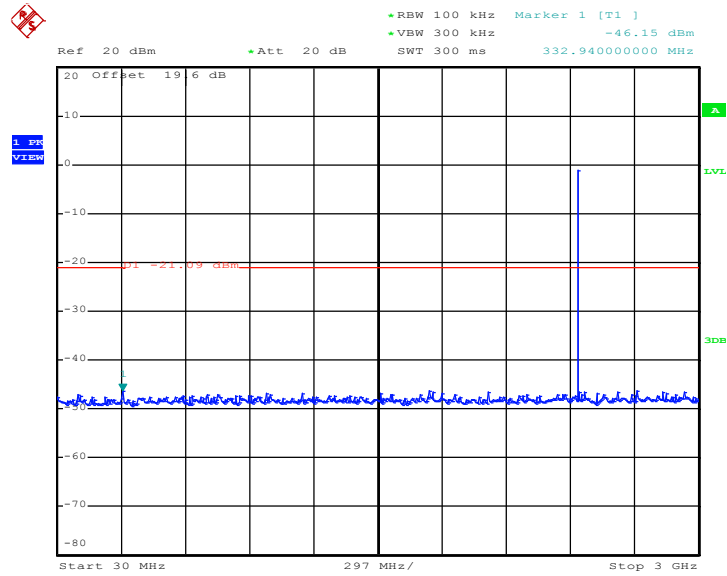

Date: 6.APR.2011 14:56:15

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

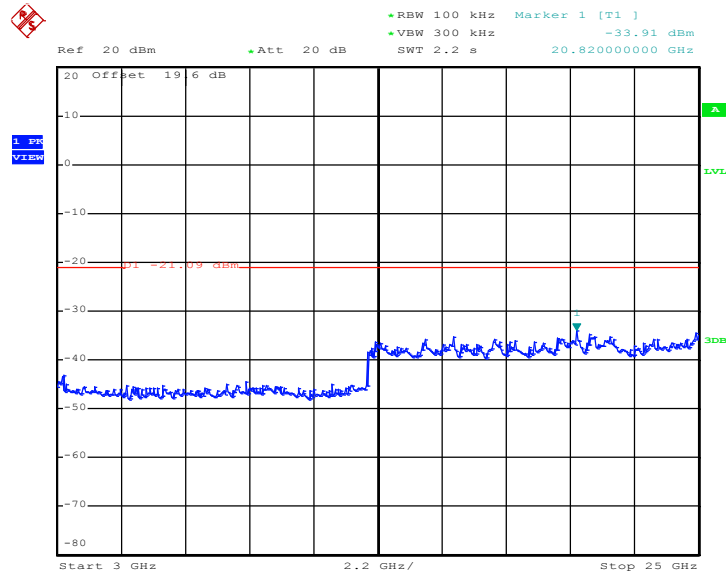


Date: 6.APR.2011 14:56:27




Test Mode :	Mode 6	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	51~54%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

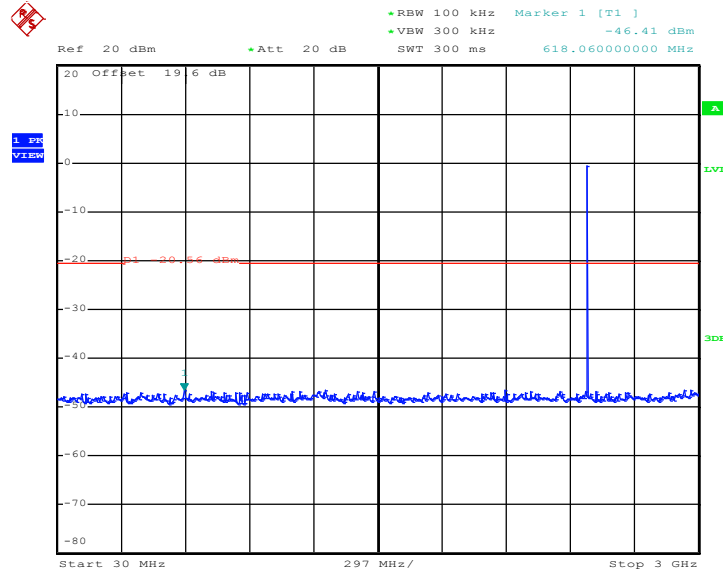

Date: 6.APR.2011 14:57:19

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

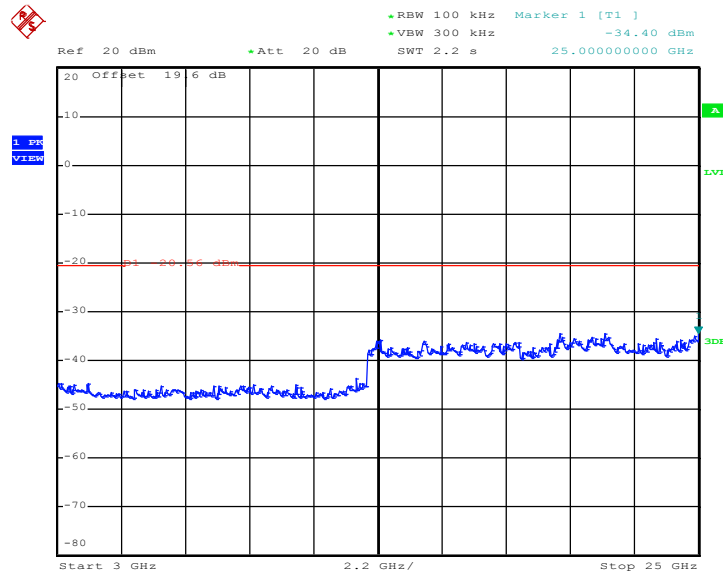

Date: 6.APR.2011 14:57:31

### 3.8 AC Conducted Emission Measurement

#### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.8.4 Test Setup



3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC1 Idle + Bluetooth Link + WLAN Link + GPS Rx + WiMAX Idle + Battery 2 + Earphone + USB Cable 2 (Charging from Adapter 2)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

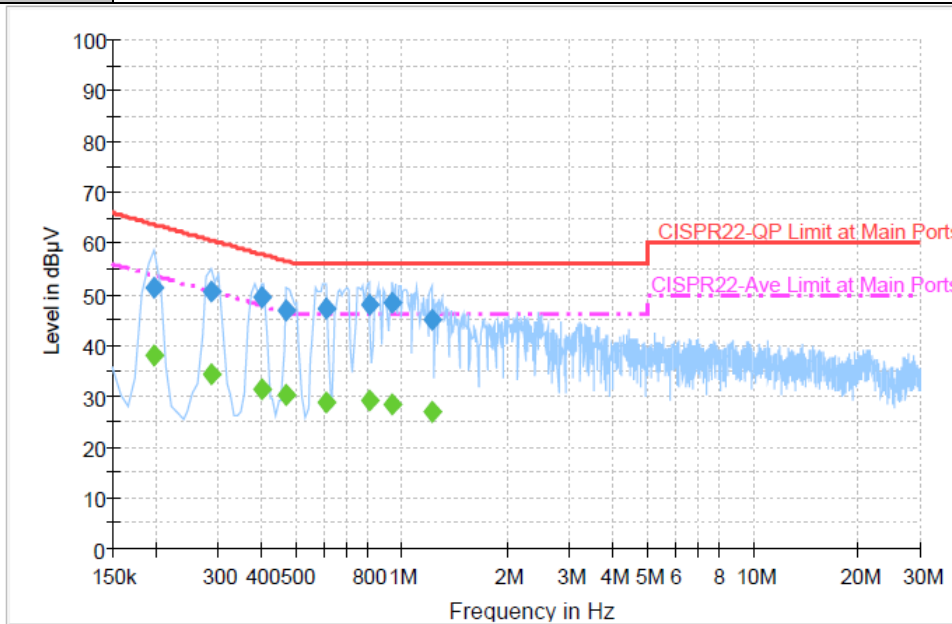

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	51.2	Off	L1	19.4	12.5	63.7
0.286000	50.5	Off	L1	19.4	10.1	60.6
0.398000	49.6	Off	L1	19.4	8.3	57.9
0.470000	46.9	Off	L1	19.4	9.6	56.5
0.606000	47.2	Off	L1	19.4	8.8	56.0
0.806000	48.0	Off	L1	19.4	8.0	56.0
0.942000	48.2	Off	L1	19.4	7.8	56.0
1.214000	45.1	Off	L1	19.4	10.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	37.9	Off	L1	19.4	15.8	53.7
0.286000	34.3	Off	L1	19.4	16.3	50.6
0.398000	31.3	Off	L1	19.4	16.6	47.9
0.470000	30.4	Off	L1	19.4	16.1	46.5
0.606000	28.8	Off	L1	19.4	17.2	46.0
0.806000	29.3	Off	L1	19.4	16.7	46.0
0.942000	28.5	Off	L1	19.4	17.5	46.0
1.214000	26.8	Off	L1	19.4	19.2	46.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC1 Idle + Bluetooth Link + WLAN Link + GPS Rx + WiMAX Idle + Battery 2 + Earphone + USB Cable 2 (Charging from Adapter 2)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

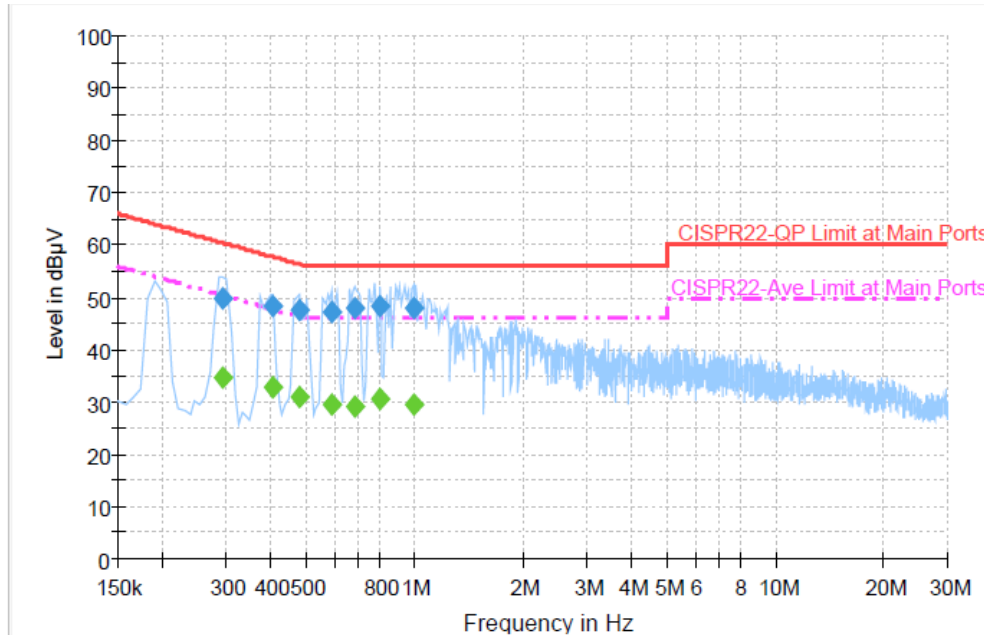

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.294000	49.7	Off	N	19.4	10.7	60.4
0.406000	48.3	Off	N	19.5	9.4	57.7
0.478000	47.5	Off	N	19.4	8.9	56.4
0.590000	47.3	Off	N	19.4	8.7	56.0
0.686000	47.8	Off	N	19.5	8.2	56.0
0.798000	48.3	Off	N	19.4	7.7	56.0
0.990000	48.1	Off	N	19.5	7.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.294000	34.8	Off	N	19.4	15.6	50.4
0.406000	32.9	Off	N	19.5	14.8	47.7
0.478000	31.0	Off	N	19.4	15.4	46.4
0.590000	29.7	Off	N	19.4	16.3	46.0
0.686000	29.0	Off	N	19.5	17.0	46.0
0.798000	30.7	Off	N	19.4	15.3	46.0
0.990000	29.4	Off	N	19.5	16.6	46.0

### 3.9 Radiated Emission Measurement

#### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.9.2 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.9.3 Test Procedures

1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
 Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m




### 3.9.4 Test Setup


For radiated emissions below 30MHz

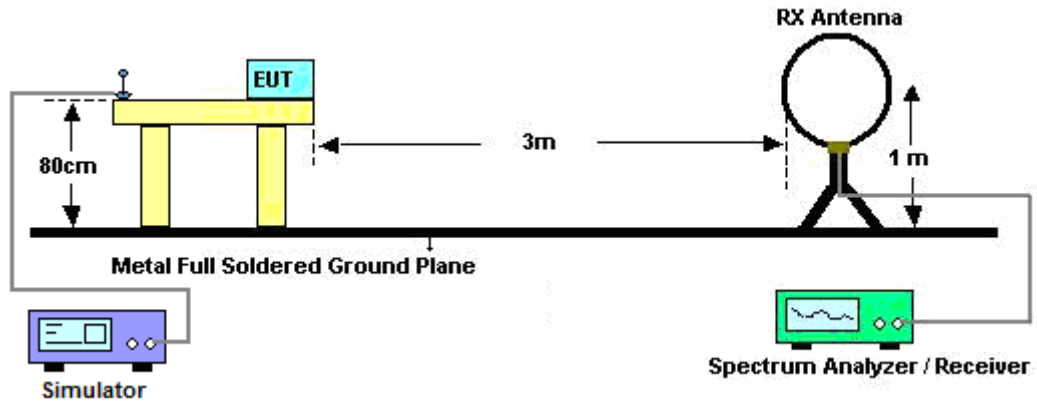

For radiated emissions from 30MHz to 1GHz

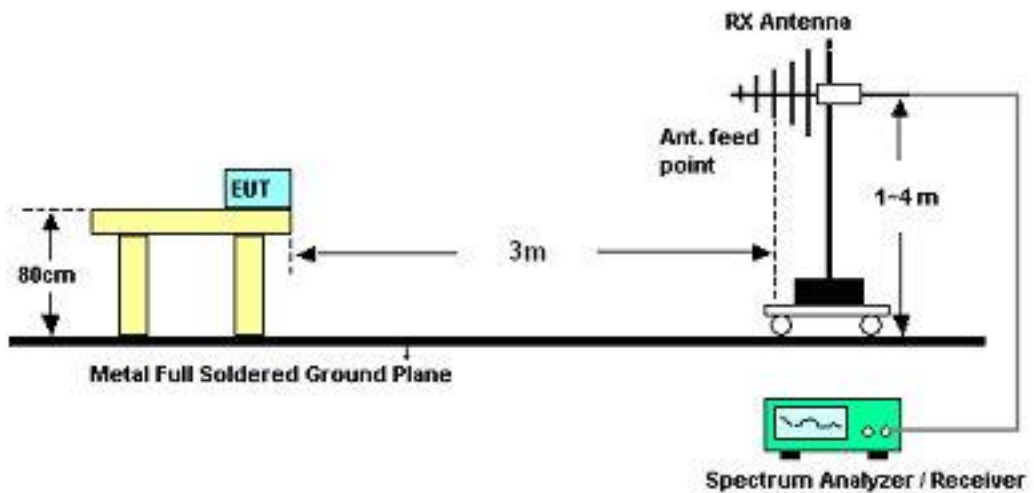

For radiated emissions above 1GHz

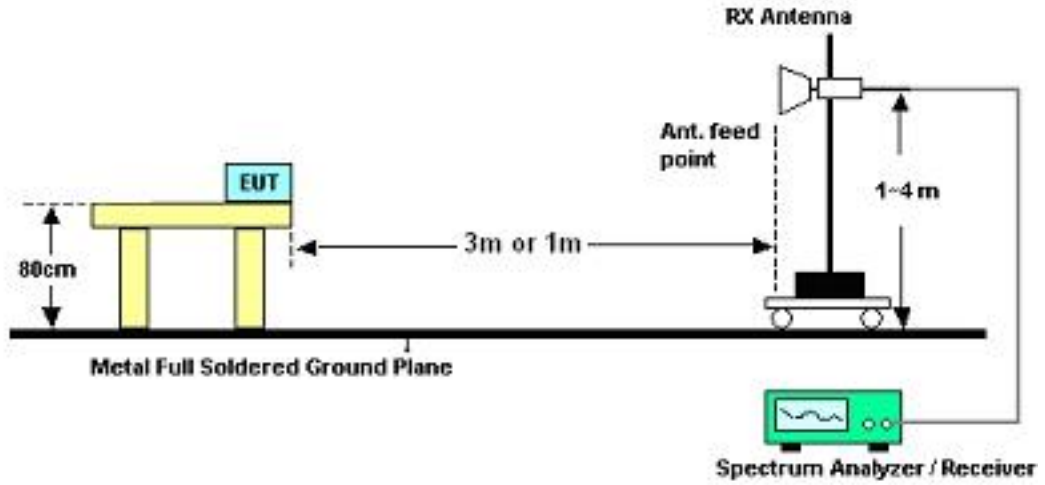

### 3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kay Wu	Temperature :	21~22°C	
		Relative Humidity :	47~48%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
50.79	27.58	-12.42	40	50.35	8.08	0.86	31.71	100	97	Peak
92.64	20.93	-22.57	43.5	41.92	9.56	1.16	31.71	-	-	Peak
224.13	21.95	-24.05	46	40.89	10.95	1.75	31.64	-	-	Peak
351.8	19.7	-26.3	46	34.35	14.67	2.24	31.56	-	-	Peak
582.8	22.46	-23.54	46	32.66	18.94	2.9	32.04	-	-	Peak
766.9	23.79	-22.21	46	32.19	20.31	3.35	32.06	-	-	Peak
2340.97	45.81	-28.19	74	43.04	31.84	5.34	34.41	100	323	Peak
2340.97	32.94	-21.06	54	30.17	31.84	5.34	34.41	100	323	Average
2402	89.58	-	-	86.66	31.91	5.4	34.39	100	323	Peak
2402	73.83	-	-	70.91	31.91	5.4	34.39	100	323	Average
2494	45.85	-28.15	74	42.7	32	5.52	34.37	100	323	Peak
2494	32.61	-21.39	54	29.46	32	5.52	34.37	100	323	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	47~48%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
58.08	35.2	-4.8	40	59.15	6.79	0.94	31.68	102	218	Peak
92.64	24.67	-18.83	43.5	45.66	9.56	1.16	31.71	-	-	Peak
177.69	25.8	-17.7	43.5	46.43	9.5	1.56	31.69	-	-	Peak
346.9	19.94	-26.06	46	34.74	14.55	2.22	31.57	-	-	Peak
726.3	24.09	-21.91	46	33.09	19.75	3.31	32.06	-	-	Peak
924.4	26.35	-19.65	46	32.21	21.74	3.77	31.37	-	-	Peak
2340.97	46.4	-27.6	74	43.69	31.81	5.31	34.41	103	237	Peak
2340.97	32.94	-21.06	54	30.23	31.81	5.31	34.41	103	234	Average
2402	87.89	-	-	84.97	31.91	5.4	34.39	103	237	Peak
2402	70.93	-	-	68.01	31.91	5.4	34.39	103	237	Average
2500	46.22	-27.78	74	43.07	32	5.52	34.37	103	237	Peak
2500	32.6	-21.4	54	29.45	32	5.52	34.37	103	237	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	47~48%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.09	27.37	-12.63	40	49.46	8.78	0.84	31.71	101	214	Peak
92.64	21.31	-22.19	43.5	42.3	9.56	1.16	31.71	-	-	Peak
152.58	18.59	-24.91	43.5	38.24	10.58	1.46	31.69	-	-	Peak
2310	46.61	-27.39	74	43.9	31.81	5.31	34.41	102	327	Peak
2310	32.84	-21.16	54	30.13	31.81	5.31	34.41	102	327	Average
2441	87.69	-	-	84.66	31.95	5.46	34.38	102	327	Peak
2441	73.85	-	-	70.82	31.95	5.46	34.38	102	327	Average
2484	45.83	-28.17	74	42.7	31.98	5.52	34.37	102	327	Peak
2484	32.55	-21.45	54	29.42	31.98	5.52	34.37	102	327	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	47~48%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
57.54	36.3	-3.7	40	60.11	6.95	0.92	31.68	100	189	Peak
90.48	24.78	-18.72	43.5	46.29	9.08	1.14	31.73	-	-	Peak
176.34	25.21	-18.29	43.5	45.8	9.53	1.56	31.68	-	-	Peak
2342	45.93	-28.07	74	43.16	31.84	5.34	34.41	100	236	Peak
2342	32.92	-21.08	54	30.15	31.84	5.34	34.41	100	236	Average
2441	87.67	-	-	84.64	31.95	5.46	34.38	100	236	Peak
2441	71.25	-	-	68.22	31.95	5.46	34.38	100	236	Average
2484	45.62	-28.38	74	42.49	31.98	5.52	34.37	100	236	Peak
2484	32.56	-21.44	54	29.43	31.98	5.52	34.37	100	236	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	47~48%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.28	28.52	-11.48	40	50.26	9.12	0.84	31.7	100	158	Peak
91.29	20.29	-23.21	43.5	41.62	9.24	1.15	31.72	-	-	Peak
228.18	20.15	-25.85	46	38.79	11.2	1.77	31.61	-	-	Peak
777.4	23.6	-22.4	46	31.81	20.46	3.36	32.03	-	-	Peak
834.8	24.77	-21.23	46	32.14	21.07	3.49	31.93	-	-	Peak
894.3	25.19	-20.81	46	31.51	21.58	3.73	31.63	-	-	Peak
2358	46.82	-27.18	74	43.99	31.86	5.37	34.4	100	334	Peak
2358	32.95	-21.05	54	30.12	31.86	5.37	34.4	100	334	Average
2480	89.99	-	-	86.86	31.98	5.52	34.37	100	334	Peak
2480	73.71	-	-	70.58	31.98	5.52	34.37	100	334	Average
2483.5	53.99	-20.01	74	50.86	31.98	5.52	34.37	100	334	Peak
2483.5	42.65	-11.35	54	39.52	31.98	5.52	34.37	100	334	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	47~48%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
56.73	36.24	-3.76	40	60.05	6.95	0.92	31.68	101	215	Peak
91.29	23.34	-20.16	43.5	44.67	9.24	1.15	31.72	-	-	Peak
175.53	23.96	-19.54	43.5	44.53	9.55	1.56	31.68	-	-	Peak
735.4	23.5	-22.5	46	32.38	19.87	3.33	32.08	-	-	Peak
805.4	24.17	-21.83	46	31.94	20.81	3.38	31.96	-	-	Peak
875.4	25.35	-20.65	46	32.03	21.42	3.65	31.75	-	-	Peak
2310	46.54	-27.46	74	43.83	31.81	5.31	34.41	106	342	Peak
2310	32.82	-21.18	54	30.11	31.81	5.31	34.41	106	342	Average
2480	87.05	-	-	83.92	31.98	5.52	34.37	106	342	Peak
2480	73.39	-	-	70.26	31.98	5.52	34.37	106	342	Average
2483.5	54.02	-19.98	74	50.89	31.98	5.52	34.37	106	342	Peak
2483.5	42.38	-11.62	54	39.25	31.98	5.52	34.37	106	342	Average





## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jun. 08, 2009	Jun. 07, 2011	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 11, 2010	Jun. 10, 2011	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 30, 2010	Jul. 29, 2011	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 18, 2010	Oct. 17, 2011	Conduction (CO05-HY)
WiMAX Base Station (System Simulator)	Agilent	E6651A	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 25, 2010	Oct. 24, 2011	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	Apr. 28, 2010	Apr. 27, 2011	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Oct. 31, 2010	Oct. 31, 2011	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz~18GHz	Aug. 02, 2010	Aug. 01, 2011	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AH-0801	95119	8GHz~18GHz	Oct. 20, 2010	Oct. 19, 2011	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz- 26.5GHz	Apr. 14, 2011	Apr. 13, 2012	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 14, 2011	Apr. 13, 2012	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH06-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 12, 2009	May 11, 2011	Radiation (03CH06-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				