

## FCC Test Report

**Report No.:** RF160218E08

**FCC ID:** NOIKB-E60Q62

**Test Model:** E60Q62

**Received Date:** Feb. 18, 2016

**Test Date:** Feb. 26 to Mar. 18, 2016

**Issued Date:** May 11, 2016

**Applicant:** NETRONIX, INC.

**Address:** No. 945, Boai St., Jubei City, Hsin-Chu,302,Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results .....</b>	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail .....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards .....	13
<b>4 Test Types and Results .....</b>	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement .....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	14
4.1.2 Test Instruments .....	15
4.1.3 Test Procedures .....	17
4.1.4 Deviation from Test Standard .....	17
4.1.5 Test Set Up .....	18
4.1.6 EUT Operating Conditions .....	19
4.1.7 Test Results .....	20
4.2 Conducted Emission Measurement .....	30
4.2.1 Limits of Conducted Emission Measurement .....	30
4.2.2 Test Instruments .....	30
4.2.3 Test Procedures .....	30
4.2.4 Deviation from Test Standard .....	31
4.2.5 Test Setup .....	31
4.2.6 EUT Operating Conditions .....	31
4.2.7 Test Results .....	32
4.3 6dB Bandwidth Measurement .....	34
4.3.1 Limits of 6dB Bandwidth Measurement .....	34
4.3.2 Test Setup .....	34
4.3.3 Test Instruments .....	34
4.3.4 Test Procedure .....	34
4.3.5 Deviation from Test Standard .....	34
4.3.6 EUT Operating Conditions .....	34
4.3.7 Test Result .....	35
4.4 Conducted Output Power Measurement .....	37
4.4.1 Limits of Conducted Output Power Measurement .....	37
4.4.2 Test Setup .....	37
4.4.3 Test Instruments .....	37
4.4.4 Test Procedures .....	37
4.4.5 Deviation from Test Standard .....	37
4.4.6 EUT Operating Conditions .....	37
4.4.7 Test Results .....	38
4.5 Power Spectral Density Measurement .....	40
4.5.1 Limits of Power Spectral Density Measurement .....	40
4.5.2 Test Setup .....	40
4.5.3 Test Instruments .....	40
4.5.4 Test Procedure .....	40
4.5.5 Deviation from Test Standard .....	40
4.5.6 EUT Operating Condition .....	40



4.5.7 Test Results .....	41
4.6 Conducted Out of Band Emission Measurement .....	43
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	43
4.6.2 Test Setup.....	43
4.6.3 Test Instruments .....	43
4.6.4 Test Procedure .....	43
4.6.5 Deviation from Test Standard .....	43
4.6.6 EUT Operating Condition .....	43
4.6.7 Test Results .....	44
<b>5 Pictures of Test Arrangements.....</b>	<b>48</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>49</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF160218E08	Original release.	May 11, 2016




**1 Certificate of Conformity**

**Product:** 6.8"EBOOK READER DEVICE  
**Brand:** NETRONIX  
**Test Model:** E60Q62  
**Sample Status:** ENGINEERING SAMPLE  
**Applicant:** NETRONIX, INC.  
**Test Date:** Feb. 26 to Mar. 18, 2016  
**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** May 11, 2016  
Claire Kuan / Specialist

**Approved by :**  , **Date:** May 11, 2016  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -19.85dB at 4.43359MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz & 4874.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is soldering terminal not a standard connector.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.72 dB
	6GHz ~ 18GHz	4.00 dB
	18GHz ~ 40GHz	4.11 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	6.8" EBOOK READER DEVICE
Brand	NETRONIX
Test Model	E60Q62
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	3.7Vdc from battery or 5Vdc from USB interface
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 72.2Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	11
Output Power	802.11b: 31.189mW 802.11g: 135.519mW 802.11n (HT20): 135.519mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Touth Pen x 1 (Brand: Waltop , Model: BFP-P09)
Data Cable Supplied	USB cable (Shielded, 1m) x 1

Note:

1. The antennas provided to the EUT, please refer to the following table:

Brand	Model	Ant. Gain (dBi)	Frequency range (GHz to GHz)	Antenna Type	Connector Type
Walsin Technology Corporation	RFECA3216060AAT	2	2.4~2.4835	Ceramic antenna	soldering terminal

2. The EUT must be supplied with a rechargeable battery as following table:

Brand	Model No.	Spec.
SPRINGPOWER TECHNOLOGY	SP 285083	DC Output: 3.7V, 1500mAh

3. The EUT has two test samples which are identical to each other in all aspects except for the following table:

Sample	Memory capacity
Sample 1	8G Byte
Sample 2	4G Byte

From the above sample, the worst case was found in **sample 1**. Therefore only the test data of the mode was recorded in this report individually.

4. The EUT incorporates a SISO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

6. The EUT was pre-tested under following test modes:

Pre-test Mode	Power Source
Mode A	USB Adapter
Mode B	Battery

The worst radiated emission was found in **Mode A**. Therefore only the test data of the modes were recorded in this report.

7. When USB port is charging the rechargeable battery, the EUT has WiFi function under charging mode. And the USB port is connected to Host unit, the EUT WiFi function will be disabled.
8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

**NOTE:1.** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane (for below 1GHz) and Y-plane(for above 1GHz).

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
<b>RE≥1G</b>	23deg. C, 64%RH	120Vac, 60Hz	Jyunchun Lin
<b>RE&lt;1G</b>	25deg. C, 72%RH	120Vac, 60Hz	Andy Ho
<b>PLC</b>	25deg. C, 60%RH	120Vac, 60Hz	Timmy Hu
<b>APCM</b>	23deg. C, 61%RH	120Vac, 60Hz	Robert Cheng

### 3.3 Duty Cycle of Test Signal


Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

**802.11b:** Duty cycle =  $12.444/12.519 = 0.994$


**802.11g:** Duty cycle =  $2.062/2.085 = 0.989$

**802.11n (HT20):** Duty cycle =  $1.918/1.946 = 0.986$


**802.11b**

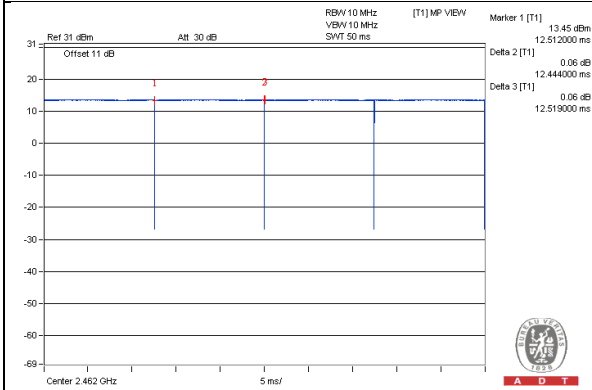

**802.11g**

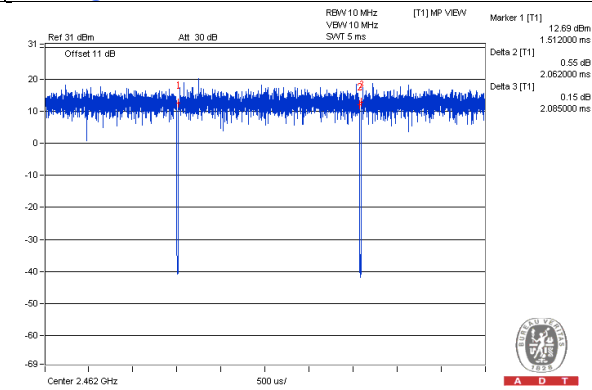

**802.11n (HT20)**

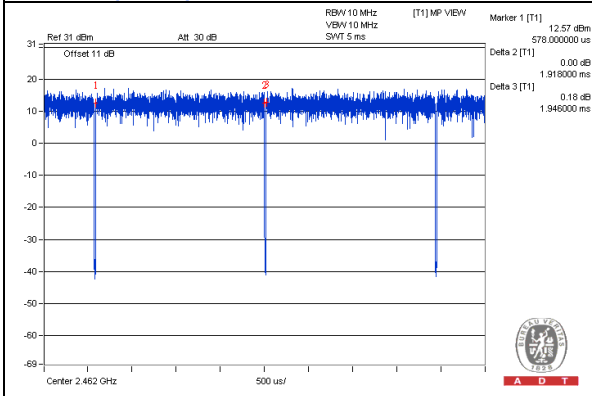

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB ADAPTER	ASUS	AD876320	NA	NA	Provided by Lab
B.	Micro USB card	Sandisk	NA	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Micro USB	1	1	Yes	0	Supplied by client
2.	Console	1	0.1	No	0	Supplied by client (For RF setup)

#### 3.4.1 Configuration of System under Test

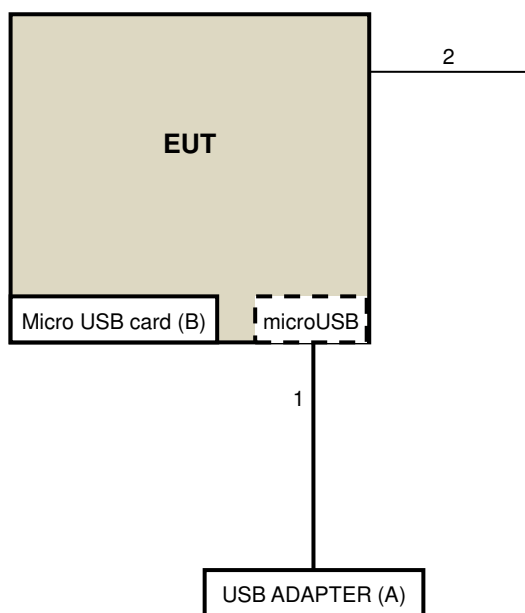

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**KDB 558074 D01 DTS Meas Guidance v03r05**  
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 16, 2015	Dec. 15, 2016
Pre-Amplifier <sup>(*)</sup> EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Jan. 07, 2016	Jan. 06, 2017
RF Cable	8D-FB	CHHCAB-001-1 CHHCAB-001-2	Oct. 04, 2015	Oct. 03, 2016
	RF-141	CHHCAB-004	Oct. 04, 2015	Oct. 03, 2016
Horn_Antenna AISI	AIH.8018	0000220091110	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 27, 2015	Oct. 26, 2016
RF Cable	NA	131206 131213 131215 SNMY23685/4	Jan. 15, 2016	Jan. 14, 2017
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 25, 2015	Nov. 24, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 11, 2015	Dec. 10, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Jan. 18, 2016	Jan. 17, 2017
RF Cable	SUCOFLEX 102	36442/2 36434/2	Dec. 10, 2015	Dec. 09, 2016
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
Power Meter Anritsu	ML2495A	1014008	Apr. 28, 2015	Apr. 27, 2016
Power Sensor Anritsu	MA2411B	0917122	Apr. 28, 2015	Apr. 27, 2016
Spectrum Analyzer R&S	FSP40	100060	May 08, 2015	May 07, 2016



A D T

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. H.
3. The FCC Site Registration No. is 797305.
4. The CANADA Site Registration No. is IC 7450H-3.
5. Tested Date: Mar. 02 to 18, 2016



#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq$  98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

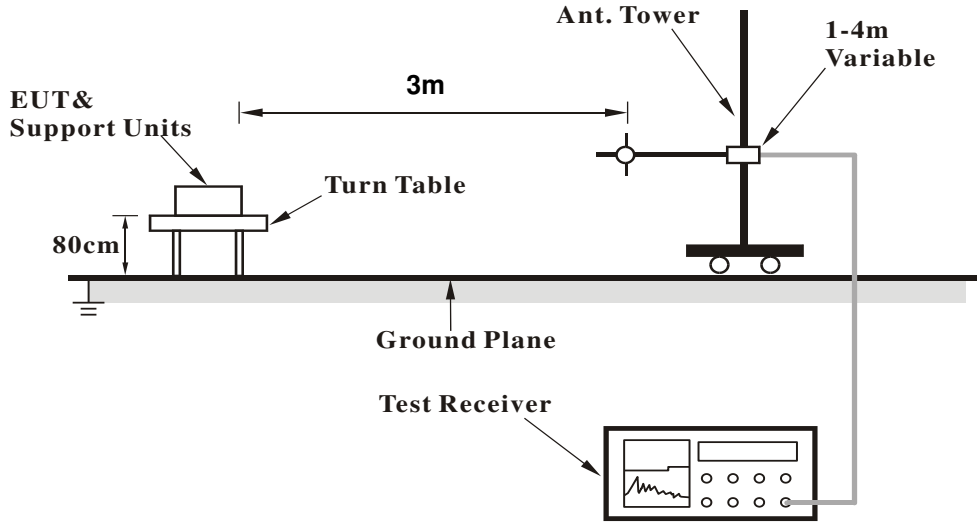

<Frequency Range above 1GHz>

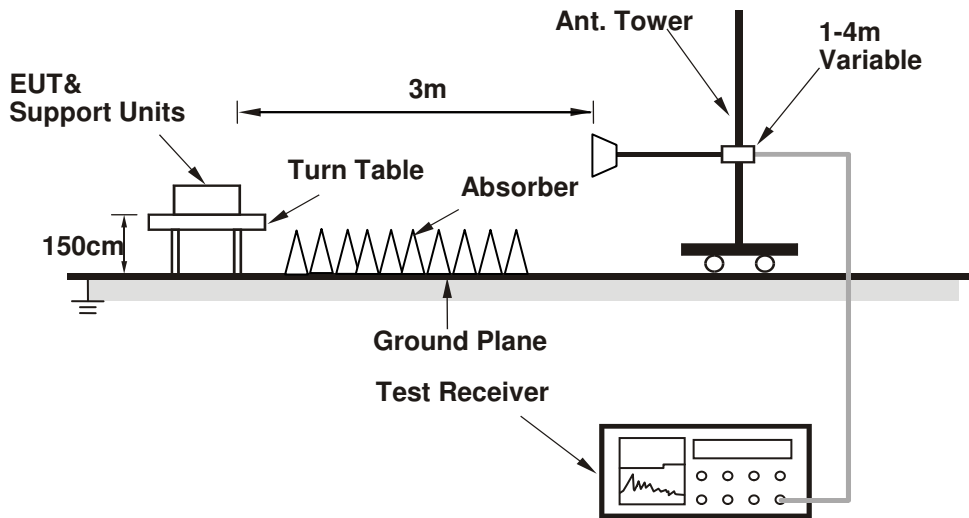

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

1. Placed the EUT on testing table.
2. Controlling software (HyperTerminal paste command) has been activated to set the EUT under transmission/receiving condition continuously.

#### 4.1.7 Test Results

#### Above 1GHz Data :

#### 802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.72 H	10	57.78	-1.88
2	2390.00	44.0 AV	54.0	-10.0	1.72 H	10	45.88	-1.88
3	*2412.00	108.4 PK			1.72 H	10	110.23	-1.83
4	*2412.00	104.0 AV			1.72 H	10	105.83	-1.83
5	4824.00	51.7 PK	74.0	-22.3	1.69 H	354	45.03	6.67
6	4824.00	45.5 AV	54.0	-8.5	1.69 H	354	38.83	6.67

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.79 V	276	59.08	-1.88
2	2390.00	45.8 AV	54.0	-8.2	1.79 V	276	47.68	-1.88
3	*2412.00	108.9 PK			1.79 V	276	110.73	-1.83
4	*2412.00	104.5 AV			1.79 V	276	106.33	-1.83
5	4824.00	57.1 PK	74.0	-16.9	1.66 V	2	50.43	6.67
6	4824.00	53.6 AV	54.0	-0.4	1.66 V	2	46.93	6.67

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.6 PK			1.80 H	26	111.41	-1.81
2	*2437.00	105.4 AV			1.80 H	26	107.21	-1.81
3	4874.00	53.2 PK	74.0	-20.8	1.65 H	354	46.37	6.83
4	4874.00	45.8 AV	54.0	-8.2	1.65 H	354	38.97	6.83
5	7311.00	57.5 PK	74.0	-16.5	1.50 H	201	46.36	11.14
6	7311.00	44.7 AV	54.0	-9.3	1.50 H	201	33.56	11.14

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.1 PK			1.76 V	275	111.91	-1.81
2	*2437.00	105.9 AV			1.76 V	275	107.71	-1.81
3	4874.00	58.7 PK	74.0	-15.3	1.81 V	16	51.87	6.83
<b>4</b>	<b>4874.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.81 V</b>	<b>16</b>	<b>47.07</b>	<b>6.83</b>
5	7311.00	57.0 PK	74.0	-17.0	1.48 V	221	45.86	11.14
6	7311.00	44.0 AV	54.0	-10.0	1.48 V	221	32.86	11.14

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.6 PK			1.75 H	11	112.40	-1.80
2	*2462.00	106.7 AV			1.75 H	11	108.50	-1.80
3	2483.50	58.3 PK	74.0	-15.7	1.75 H	11	60.09	-1.79
4	2483.50	50.0 AV	54.0	-4.0	1.75 H	11	51.79	-1.79
5	4924.00	54.0 PK	74.0	-20.0	1.36 H	360	47.09	6.91
6	4924.00	45.4 AV	54.0	-8.6	1.36 H	360	38.49	6.91
7	7386.00	57.3 PK	74.0	-16.7	1.55 H	187	45.73	11.57
8	7386.00	44.6 AV	54.0	-9.4	1.55 H	187	33.03	11.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.1 PK			1.73 V	270	112.90	-1.80
2	*2462.00	107.2 AV			1.73 V	270	109.00	-1.80
3	2483.50	59.6 PK	74.0	-14.4	1.73 V	270	61.39	-1.79
4	2483.50	51.8 AV	54.0	-2.2	1.73 V	270	53.59	-1.79
5	4924.00	57.6 PK	74.0	-16.4	1.71 V	360	50.69	6.91
6	4924.00	53.8 AV	54.0	-0.2	1.71 V	360	46.89	6.91
7	7386.00	56.8 PK	74.0	-17.2	1.46 V	218	45.23	11.57
8	7386.00	44.0 AV	54.0	-10.0	1.46 V	218	32.43	11.57

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.25 H	163	75.08	-1.88
2	2390.00	51.4 AV	54.0	-2.6	1.25 H	163	53.28	-1.88
3	*2412.00	111.0 PK			1.25 H	163	112.83	-1.83
4	*2412.00	98.1 AV			1.25 H	163	99.93	-1.83
5	4824.00	51.2 PK	74.0	-22.8	1.42 H	219	44.53	6.67
6	4824.00	38.2 AV	54.0	-15.8	1.42 H	219	31.53	6.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.9 PK	74.0	-0.1	1.78 V	276	75.78	-1.88
2	2390.00	52.6 AV	54.0	-1.4	1.78 V	276	54.48	-1.88
3	*2412.00	111.0 PK			1.78 V	276	112.83	-1.83
4	*2412.00	98.7 AV			1.78 V	276	100.53	-1.83
5	4824.00	53.2 PK	74.0	-20.8	1.25 V	360	46.53	6.67
6	4824.00	40.3 AV	54.0	-13.7	1.25 V	360	33.63	6.67

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.2 PK			1.22 H	148	117.01	-1.81
2	*2437.00	103.4 AV			1.22 H	148	105.21	-1.81
3	4874.00	53.9 PK	74.0	-20.1	1.45 H	221	47.07	6.83
4	4874.00	41.7 AV	54.0	-12.3	1.45 H	221	34.87	6.83
5	7311.00	56.7 PK	74.0	-17.3	1.53 H	202	45.56	11.14
6	7311.00	44.1 AV	54.0	-9.9	1.53 H	202	32.96	11.14

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.4 PK			1.73 V	278	117.21	-1.81
2	*2437.00	104.0 AV			1.73 V	278	105.81	-1.81
3	4874.00	57.0 PK	74.0	-17.0	1.25 V	349	50.17	6.83
4	4874.00	45.9 AV	54.0	-8.1	1.25 V	349	39.07	6.83
5	7311.00	56.4 PK	74.0	-17.6	1.44 V	231	45.26	11.14
6	7311.00	43.7 AV	54.0	-10.3	1.44 V	231	32.56	11.14

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.2 PK			1.55 H	168	115.00	-1.80
2	*2462.00	100.4 AV			1.55 H	168	102.20	-1.80
3	2483.50	73.0 PK	74.0	-1.0	1.55 H	168	74.79	-1.79
4	2483.50	53.3 AV	54.0	-0.7	1.55 H	168	55.09	-1.79
5	4924.00	51.9 PK	74.0	-22.1	1.44 H	225	44.99	6.91
6	4924.00	38.8 AV	54.0	-15.2	1.44 H	225	31.89	6.91
7	7386.00	57.2 PK	74.0	-16.8	1.57 H	193	45.63	11.57
8	7386.00	44.8 AV	54.0	-9.2	1.57 H	193	33.23	11.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.8 PK			1.72 V	277	114.60	-1.80
2	*2462.00	100.5 AV			1.72 V	277	102.30	-1.80
3	2483.50	73.7 PK	74.0	-0.3	1.72 V	277	75.49	-1.79
4	2483.50	53.8 AV	54.0	-0.2	1.72 V	277	55.59	-1.79
5	4924.00	53.8 PK	74.0	-20.2	1.20 V	334	46.89	6.91
6	4924.00	40.9 AV	54.0	-13.1	1.20 V	334	33.99	6.91
7	7386.00	57.9 PK	74.0	-16.1	1.39 V	239	46.33	11.57
8	7386.00	44.6 AV	54.0	-9.4	1.39 V	239	33.03	11.57

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	1.60 H	182	74.68	-1.88
2	2390.00	50.6 AV	54.0	-3.4	1.60 H	182	52.48	-1.88
3	*2412.00	109.1 PK			1.60 H	182	110.93	-1.83
4	*2412.00	97.6 AV			1.60 H	182	99.43	-1.83
5	4824.00	51.4 PK	74.0	-22.6	1.44 H	207	44.73	6.67
6	4824.00	38.3 AV	54.0	-15.7	1.44 H	207	31.63	6.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.5 PK	74.0	-0.5	1.78 V	270	75.38	-1.88
2	2390.00	51.1 AV	54.0	-2.9	1.78 V	270	52.98	-1.88
3	*2412.00	109.5 PK			1.78 V	270	111.33	-1.83
4	*2412.00	97.7 AV			1.78 V	270	99.53	-1.83
5	4824.00	55.0 PK	74.0	-19.0	1.17 V	334	48.33	6.67
6	4824.00	41.6 AV	54.0	-12.4	1.17 V	334	34.93	6.67

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.2 PK			1.53 H	159	117.01	-1.81
2	*2437.00	103.9 AV			1.53 H	159	105.71	-1.81
3	4874.00	51.9 PK	74.0	-22.1	1.38 H	210	45.07	6.83
4	4874.00	39.0 AV	54.0	-15.0	1.38 H	210	32.17	6.83
5	7311.00	56.7 PK	74.0	-17.3	1.61 H	193	45.56	11.14
6	7311.00	44.4 AV	54.0	-9.6	1.61 H	193	33.26	11.14

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.6 PK			1.78 V	274	117.41	-1.81
2	*2437.00	104.0 AV			1.78 V	274	105.81	-1.81
3	4874.00	53.8 PK	74.0	-20.2	1.16 V	329	46.97	6.83
4	4874.00	40.9 AV	54.0	-13.1	1.16 V	329	34.07	6.83
5	7311.00	57.3 PK	74.0	-16.7	1.36 V	238	46.16	11.14
6	7311.00	44.1 AV	54.0	-9.9	1.36 V	238	32.96	11.14

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.9 PK			1.75 H	170	112.70	-1.80
2	*2462.00	99.0 AV			1.75 H	170	100.80	-1.80
3	2483.50	72.8 PK	74.0	-1.2	1.75 H	170	74.59	-1.79
4	2483.50	50.7 AV	54.0	-3.3	1.75 H	170	52.49	-1.79
5	4924.00	51.5 PK	74.0	-22.5	1.42 H	210	44.59	6.91
6	4924.00	38.7 AV	54.0	-15.3	1.42 H	210	31.79	6.91
7	7386.00	56.8 PK	74.0	-17.2	1.59 H	182	45.23	11.57
8	7386.00	44.5 AV	54.0	-9.5	1.59 H	182	32.93	11.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.3 PK			1.78 V	273	113.10	-1.80
2	*2462.00	99.1 AV			1.78 V	273	100.90	-1.80
3	2483.50	73.4 PK	74.0	-0.6	1.78 V	273	75.19	-1.79
4	2483.50	51.2 AV	54.0	-2.8	1.78 V	273	52.99	-1.79
5	4924.00	54.5 PK	74.0	-19.5	1.20 V	347	47.59	6.91
6	4924.00	41.3 AV	54.0	-12.7	1.20 V	347	34.39	6.91
7	7386.00	57.8 PK	74.0	-16.2	1.37 V	228	46.23	11.57
8	7386.00	44.7 AV	54.0	-9.3	1.37 V	228	33.13	11.57

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**Below 1GHz Worst-Case Data**

**802.11g**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.56	25.9 QP	40.0	-14.1	2.00 H	323	37.96	-12.03
2	133.91	33.2 QP	43.5	-10.3	2.00 H	69	41.99	-8.78
3	174.29	31.5 QP	43.5	-12.0	2.00 H	243	40.22	-8.70
4	233.87	26.2 QP	46.0	-19.9	1.50 H	51	35.76	-9.61
5	321.10	27.7 QP	46.0	-18.3	1.00 H	257	33.56	-5.87
6	664.77	30.5 QP	46.0	-15.5	1.00 H	125	28.92	1.58

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.74	31.9 QP	40.0	-8.1	1.00 V	112	40.98	-9.07
2	75.25	37.7 QP	40.0	-2.3	1.00 V	103	49.38	-11.69
3	134.35	29.4 QP	43.5	-14.1	1.00 V	8	38.19	-8.77
4	158.19	31.8 QP	43.5	-11.7	1.50 V	114	39.57	-7.76
5	329.97	26.3 QP	46.0	-19.7	1.50 V	360	31.78	-5.51
6	957.00	33.5 QP	46.0	-12.5	1.50 V	352	26.54	7.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 06, 2015	May 05, 2016
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 01, 2015	Aug. 31, 2016
Line-Impedance Stabilization Network (for Peripheral ) R&S	ENV216	100072	June 11, 2015	June 10, 2016
RF Cable	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 23, 2015	Sep. 22, 2016
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2015	Sep. 30, 2016
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

#### Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Mar. 01, 2016

### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

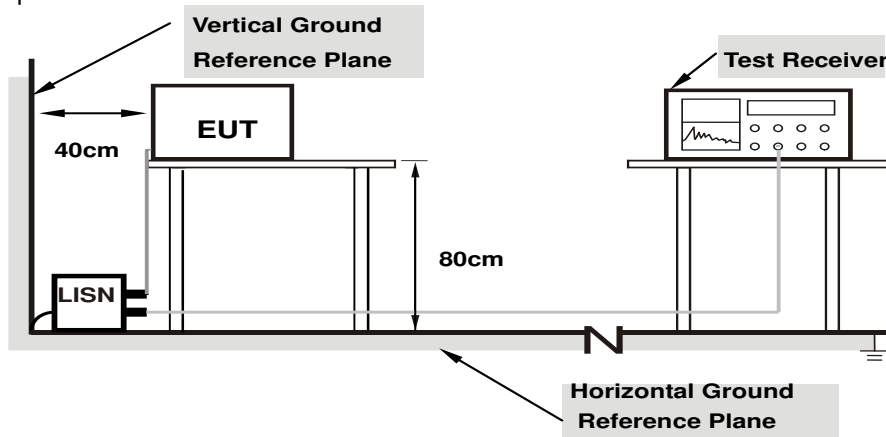

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15781	10.25	34.77	23.49	45.02	33.74	65.58	55.58	-20.55	-21.83
2	0.16562	10.25	34.06	20.89	44.31	31.14	65.18	55.18	-20.87	-24.04
3	0.20469	10.22	31.26	19.70	41.48	29.92	63.42	53.42	-21.94	-23.50
4	0.35313	10.24	26.44	14.24	36.68	24.48	58.89	48.89	-22.21	-24.41
5	0.84922	10.19	21.40	5.07	31.59	15.26	56.00	46.00	-24.41	-30.74
6	3.94141	10.38	24.98	10.93	35.36	21.31	56.00	46.00	-20.64	-24.69

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

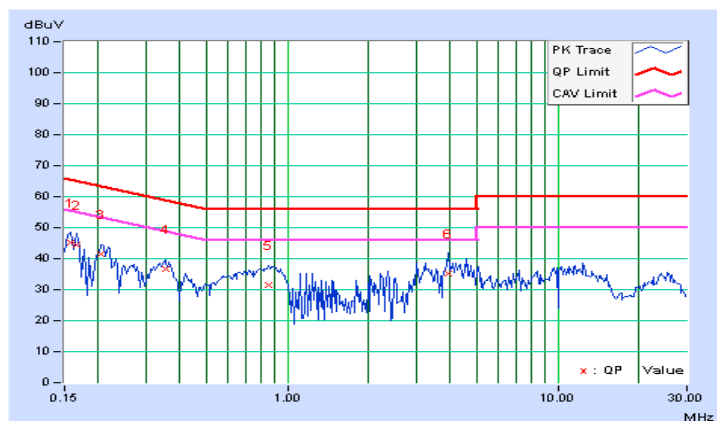




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	10.23	33.53	18.36	43.76	28.59	65.18	55.18	-21.42	-26.59
2	0.27500	10.21	26.23	10.73	36.44	20.94	60.97	50.97	-24.53	-30.03
3	0.34922	10.21	25.45	11.98	35.66	22.19	58.98	48.98	-23.32	-26.79
4	0.82969	10.18	25.27	9.29	35.45	19.47	56.00	46.00	-20.55	-26.53
5	3.80859	10.37	24.13	9.97	34.50	20.34	56.00	46.00	-21.50	-25.66
<b>6</b>	<b>4.43359</b>	<b>10.40</b>	<b>25.75</b>	<b>11.59</b>	<b>36.15</b>	<b>21.99</b>	<b>56.00</b>	<b>46.00</b>	<b>-19.85</b>	<b>-24.01</b>

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

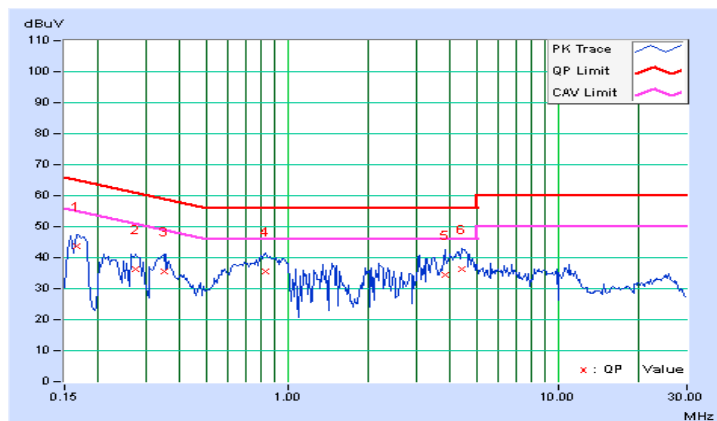


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.7 Test Result

## 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.07	0.5	PASS
6	2437	8.07	0.5	PASS
11	2462	8.09	0.5	PASS

## 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.16	0.5	PASS
6	2437	15.17	0.5	PASS
11	2462	15.17	0.5	PASS

## 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.15	0.5	Pass
6	2437	16.14	0.5	Pass
11	2462	15.18	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b / CH1

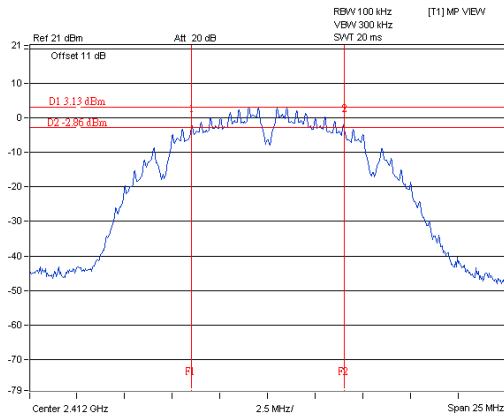

#### 802.11g / CH1

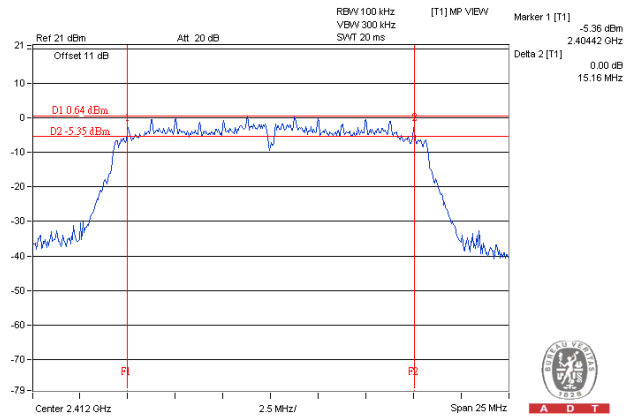

#### 802.11n (HT20) / CH1

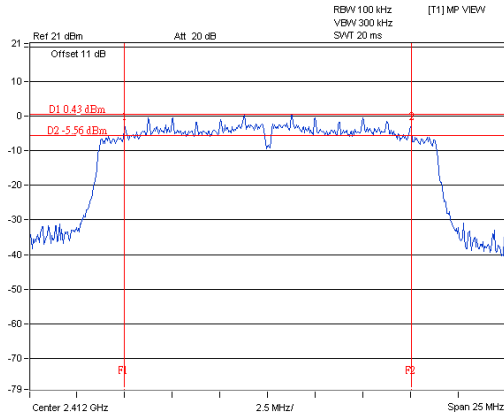


## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

## 4.4.7 Test Results

**FOR PEAK POWER****802.11b**

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	30.269	14.81	30	Pass
6	2437	30.69	14.87	30	Pass
11	2462	31.189	14.94	30	Pass

**802.11g**

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	133.045	21.24	30	Pass
6	2437	130.918	21.17	30	Pass
11	2462	135.519	21.32	30	Pass

**802.11n (HT20)**

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	132.13	21.21	30	Pass
6	2437	134.276	21.28	30	Pass
11	2462	135.519	21.32	30	Pass

**FOR AVERAGE POWER****802.11b**

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	15.205	11.82
6	2437	15.524	11.91
11	2462	15.922	12.02

**802.11g**

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	15.849	12.00
6	2437	15.704	11.96
11	2462	15.885	12.01

**802.11n (HT20)**


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	15.311	11.85
6	2437	15.704	11.96
11	2462	15.776	11.98

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6



## 4.5.7 Test Results

## 802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-11.18	8	Pass
6	2437	-11.78	8	Pass
11	2462	-10.38	8	Pass

## 802.11g


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-14.23	8	Pass
6	2437	-14.24	8	Pass
11	2462	-13.73	8	Pass

## 802.11n (HT20)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-14.50	8	Pass
6	2437	-15.16	8	Pass
11	2462	-14.14	8	Pass

### Spectrum Plot of Worst Value


#### 802.11b / CH11

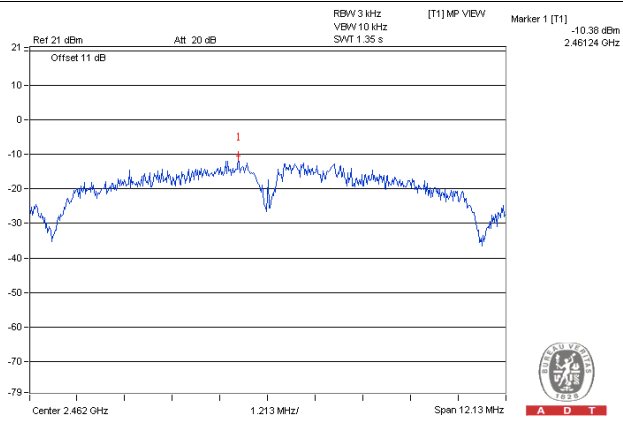

#### 802.11g / CH11

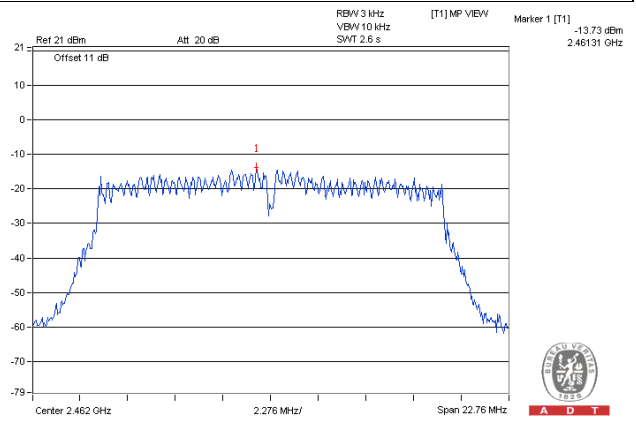

#### 802.11n (HT20) / CH11

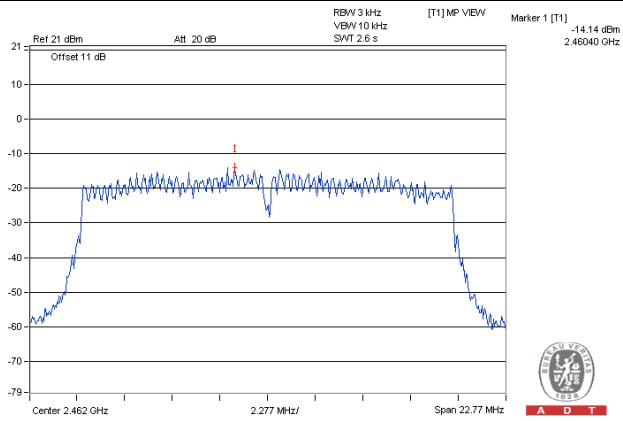


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition



Same as Item 4.3.6

#### 4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

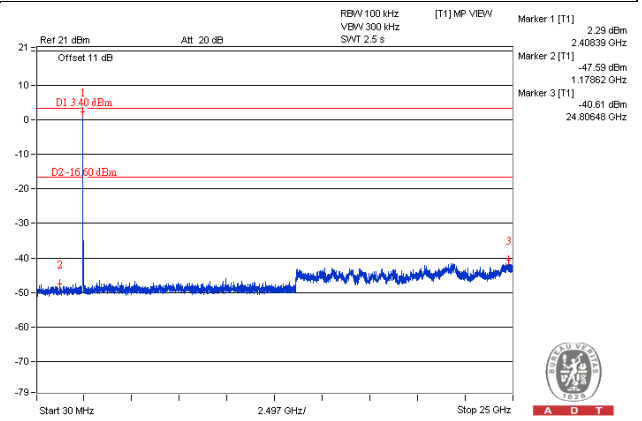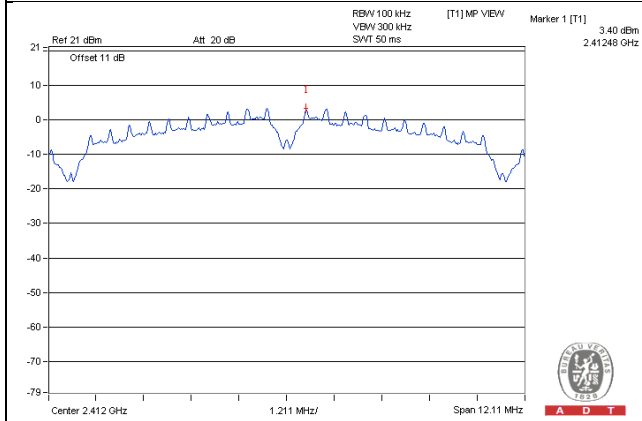


CH 6

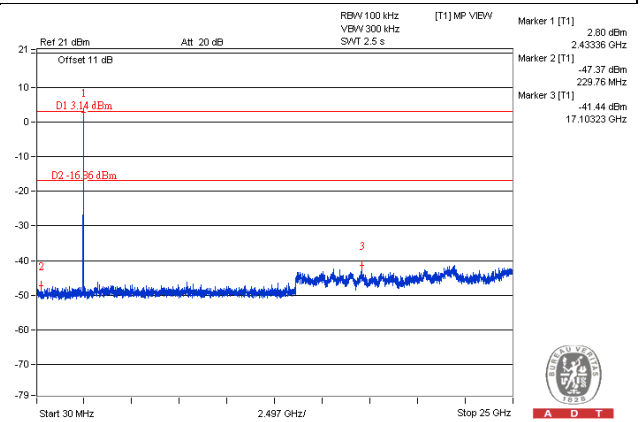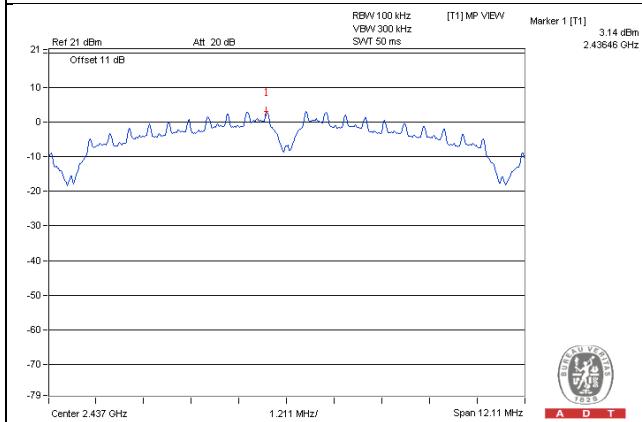


CH 11

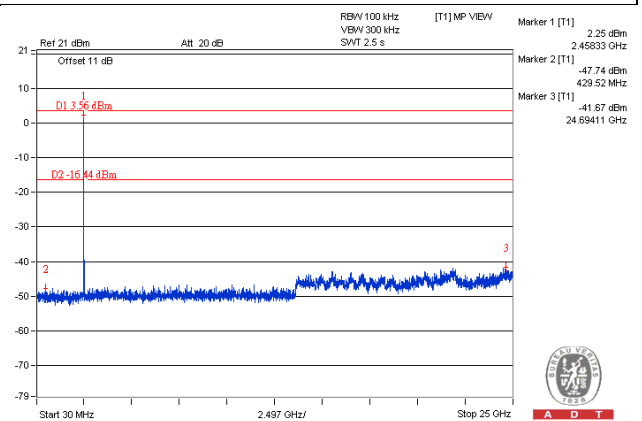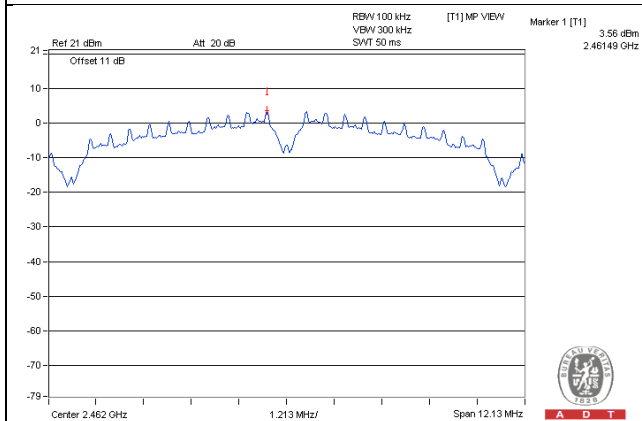

CH 1 Band edge


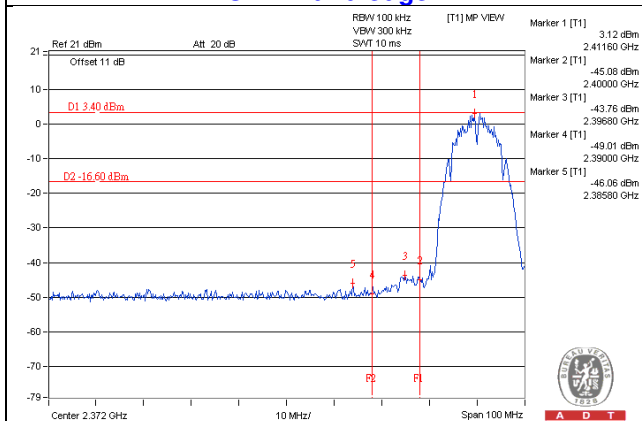


CH 11 Band edge


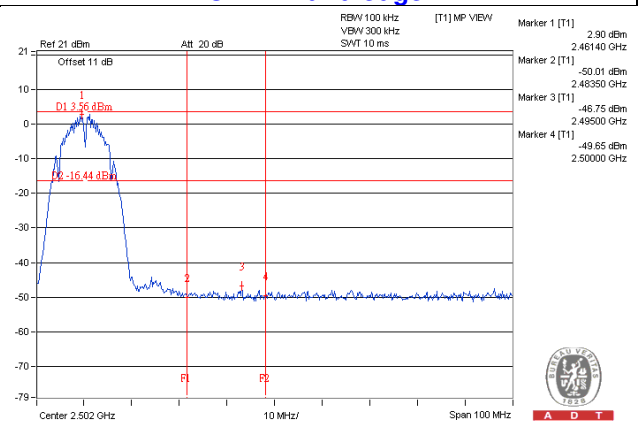


802.11g



CH 1

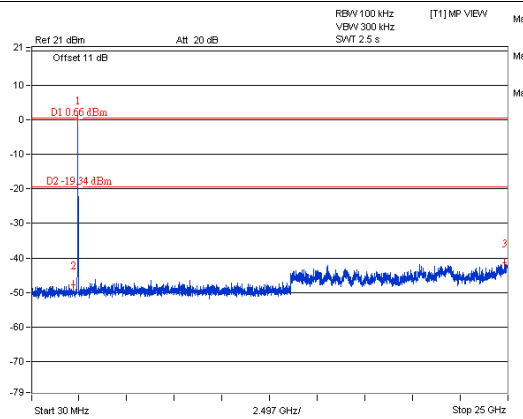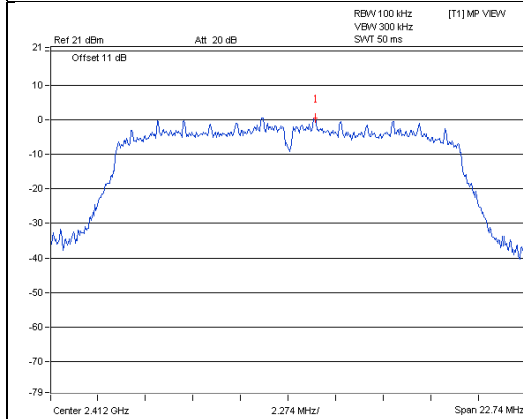


CH 6

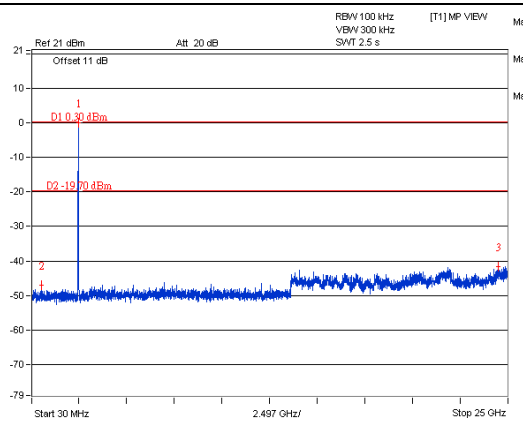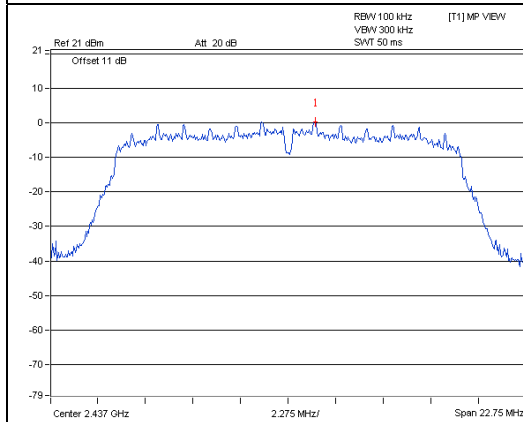


CH 11

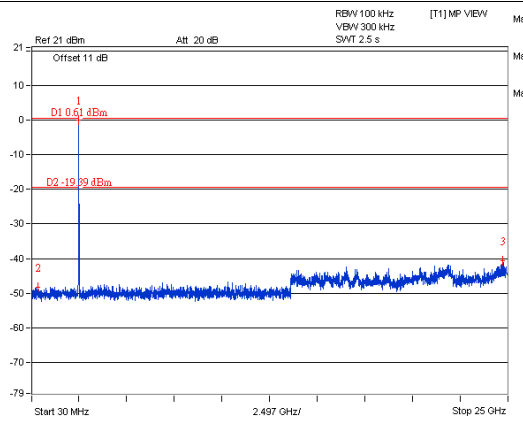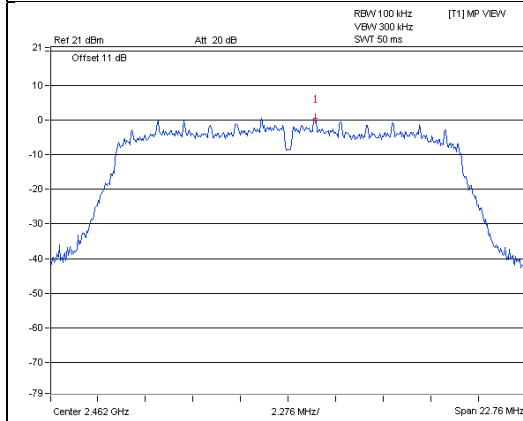

CH 1 Band edge


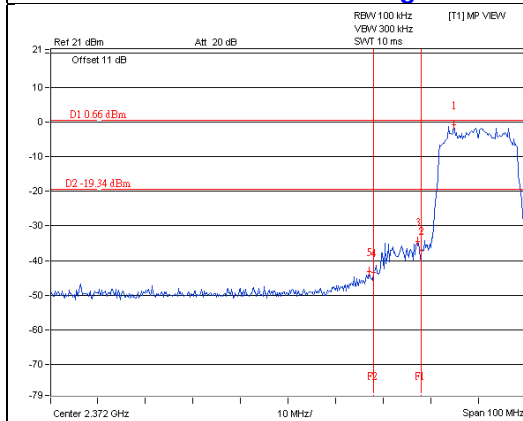


CH 11 Band edge


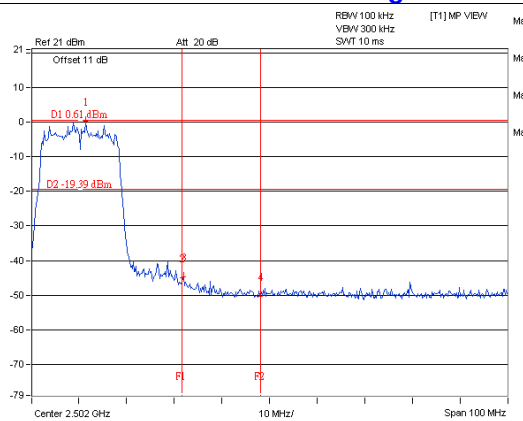


# 802.11n (HT20)



## CH 1

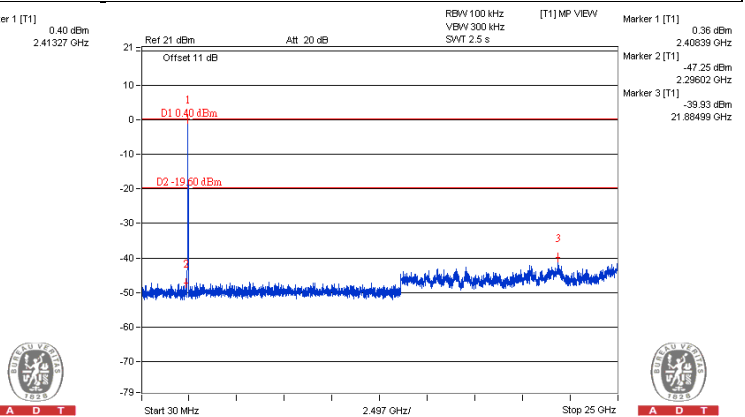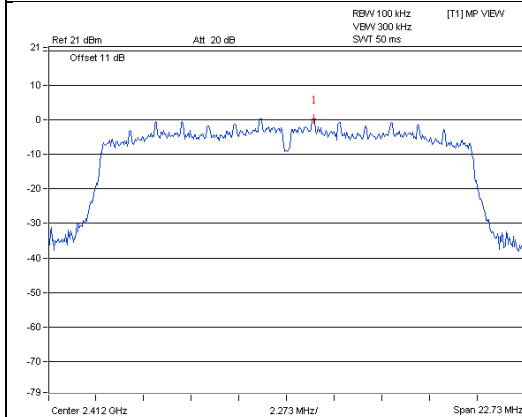


## CH 6

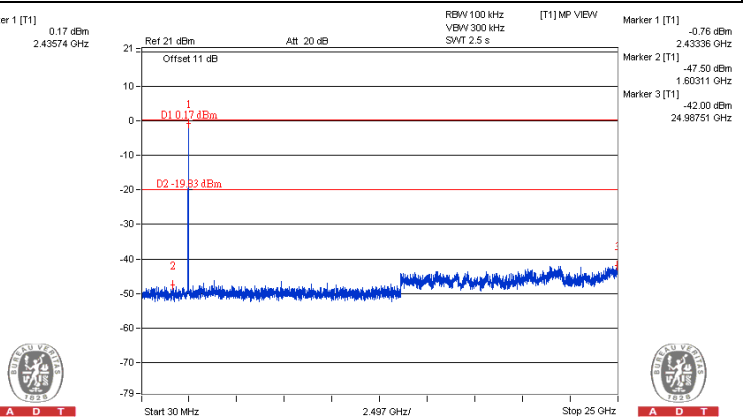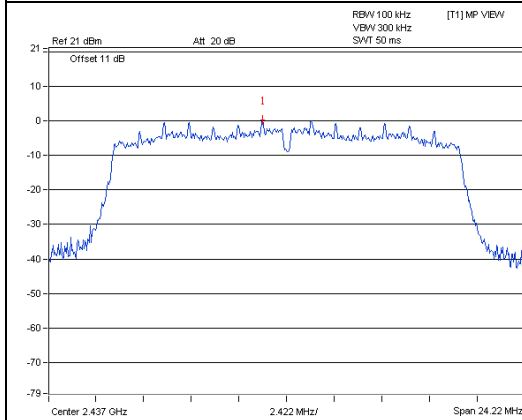


## CH 11

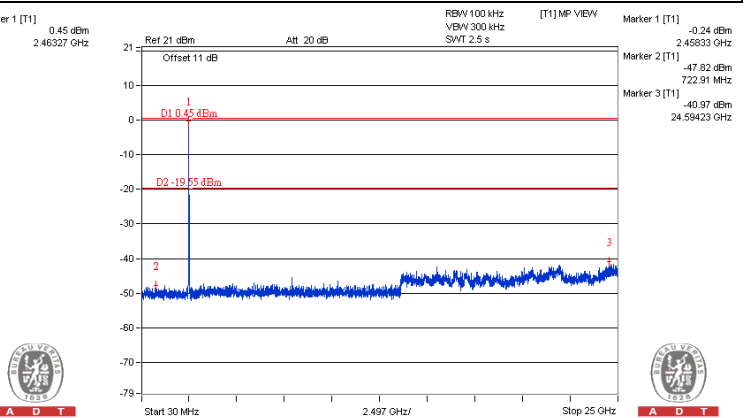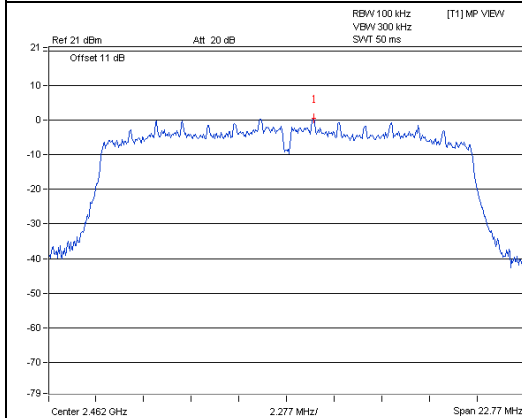

## CH 1 Band edge

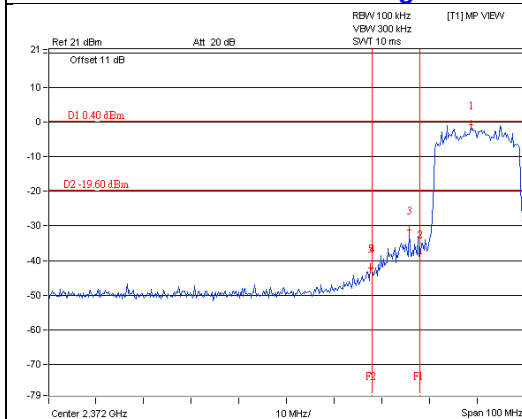

## CH 11 Band edge

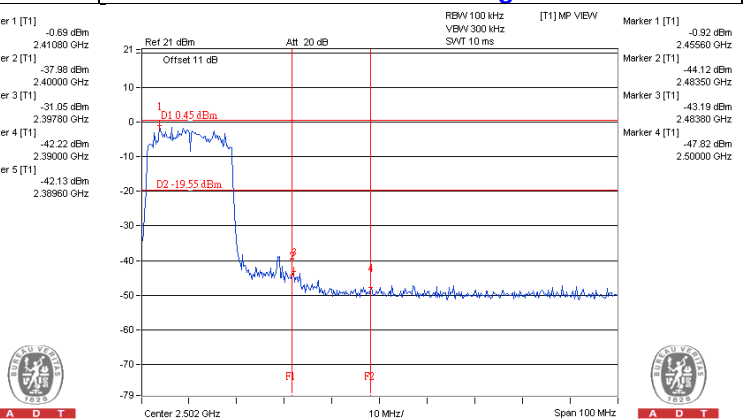



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).





A D T

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---