

## Supplemental “Transmit Simultaneously” Test Report

**Report No.:** RFBEMI-WTW-P22010621-4

**FCC ID:** NOIKBN506

**Test Model:** N506

**Received Date:** 2022/1/18

**Test Date:** 2022/3/26 ~ 2022/3/31

**Issued Date:** 2022/5/13

**Applicant:** NETRONIX, INC.

**Address:** No 945, Boai St, Jubei City, Hsinchu, 30265 Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.1.1 Test Mode Applicability and Tested Channel Detail .....	9
3.2 Description of Support Units .....	11
3.2.1 Configuration of System under Test .....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	15
4.1.3 Test Procedures .....	17
4.1.4 Deviation from Test Standard .....	17
4.1.5 Test Setup .....	18
4.1.6 EUT Operating Conditions .....	19
4.1.7 Test Results (Mode 1) .....	20
4.1.8 Test Results (Mode 2) .....	23
4.2 Conducted Emission Measurement .....	26
4.2.1 Limits of Conducted Emission Measurement .....	26
4.2.2 Test Instruments .....	26
4.2.3 Test Procedures .....	27
4.2.4 Deviation from Test Standard .....	27
4.2.5 Test Setup .....	27
4.2.6 EUT Operating Conditions .....	27
4.2.7 Test Results (Mode 1) .....	28
4.2.8 Test Results (Mode 2) .....	30
4.3 Conducted Out of Band Emission Measurement .....	32
4.3.1 Limits of Conducted Out of Band Emission Measurement .....	32
4.3.2 Test Setup .....	32
4.3.3 Test Instruments .....	32
4.3.4 Test Procedures .....	32
4.3.5 Deviation from Test Standard .....	32
4.3.6 EUT Operating Conditions .....	32
4.3.7 Test Results .....	32
<b>5 Pictures of Test Arrangements .....</b>	<b>34</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>35</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBEMI-WTW-P22010621-4	Original release.	2022/5/13

## 1 Certificate of Conformity

**Product:** Electronic Display Device

**Brand:** Rakuten kobo

**Test Model:** N506

**Sample Status:** Engineering sample

**Applicant:** NETRONIX, INC.

**Test Date:** 2022/3/26 ~ 2022/3/31

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Vivian Huang , **Date:** 2022/5/13  
Vivian Huang / Specialist

**Approved by :** May Chen , **Date:** 2022/5/13  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(8)	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -14.90 dB at 0.15023 MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/8)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -9.6 dB at 15630.00 MHz.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Electronic Display Device
Brand	Rakuten kobo
Test Model	N506
Status of EUT	Engineering sample
Power Supply Rating	3.7Vdc from battery or 5 Vdc from USB interface
Modulation Type	<b>WLAN:</b> CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode <b>BT-EDR:</b> GFSK, $\pi/4$ -DQPSK, 8DPSK <b>BT-LE:</b> GFSK
Modulation Technology	<b>WLAN:</b> DSSS, OFDM <b>BT-EDR:</b> FHSS <b>BT-LE:</b> DTS
Transfer Rate	<b>WLAN:</b> 802.11b: up to 11 Mbps 802.11a/g: up to 54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps <b>BT-EDR:</b> Up to 3 Mbps <b>BT-LE:</b> Up to 2 Mbps
Operating Frequency	<b>2.4GHz:</b> 2.412 ~ 2.462 GHz <b>5GHz:</b> 5.18~5.24GHz, 5.745 ~ 5.825GHz <b>Bluetooth:</b> 2402 ~ 2480 MHz
Number of Channel	<b>2.4GHz:</b> 802.11b, 802.11g, 802.11n (HT20): 11 <b>5GHz:</b> 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2 <b>BT-EDR:</b> 79 <b>BT-LE:</b> 40
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Cable Supplied	Refer to Note

Note:

1. There are WLAN and Bluetooth technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	Bluetooth
2	WLAN 5GHz	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT could be supplied with MicroSD card and following different models could be chosen:

No.	Model	Remark
1	<b>SDSDQAB-016G</b>	<b>1<sup>st</sup> source MicroSD</b>
2	SDSDQAB-032G-1	2 <sup>nd</sup> source MicroSD

Note: From the above models, the worst case were found in **Model: SDSDQAB-016G**. Therefore only the test data of the mode was recorded in this report.

4. The EUT could be supplied with USB cable as following table:

Brand	Material	Model	Signal Line
Yih Fone	PVC	SH-0422	Shielded : Y , 1.0M , Core: N/A
Yih Fone	TPE	SH-0418	

Note: From the above models, the worst model was found in **Model: SH-0418**. Therefore only the test data of the modes were recorded in this report.

5. The EUT was pre-tested under the following modes:

For AC Power Conducted Emission

Test Mode	Description
Mode A	USB Adapter mode, MicroSD Sandisk 16G
Mode B	USB Adapter mode, MicroSD Sandisk 32G
<b>Mode C</b>	<b>Laptop mode, MicroSD Sandisk 16G</b>

Note: From the above modes, the worst case were found in **Mode C**. Therefore only the test data of the mode was recorded in this report.

For Radiated Emission test

Test Mode	Description
<b>Mode D</b>	<b>USB Adapter mode, MicroSD Sandisk 16G</b>
Mode E	Battery mode, MicroSD Sandisk 16G
Mode F	Battery mode, MicroSD Sandisk 32G

Note: From the above modes, the below 1GHz worst case were found in **Mode D**. Therefore only the test data of the mode was recorded in this report.

6. The antenna provided to the EUT, please refer to the following table:

Brand	Model	Antenna Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
INPAQ	ACM3-3216-P1-CC-S	0.6	2.4~2.4835	Chip Ant.	NA	NA
		2	5.15~5.85			

7. The EUT incorporates a SISO function:

<b>2.4GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	1TX	1RX
<b>802.11g</b>	1TX	1RX
<b>802.11n (HT20)</b>	1TX	1RX
<b>5GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11a</b>	1TX	1RX
<b>802.11n (HT20)</b>	1TX	1RX
<b>802.11n (HT40)</b>	1TX	1RX
<b>802.11ac (VHT20)</b>	1TX	1RX
<b>802.11ac (VHT40)</b>	1TX	1RX
<b>802.11ac (VHT80)</b>	1TX	1RX

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

9. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.



### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	PLC	OB	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**RE $<$ 1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission  
**OB**: Conducted Out-Band Emission Measurement

**Note:**

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane (below 1GHz)** & **Z-plane (above 1GHz)**.

#### Radiated Emission Test (Above 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11b	1 to 11	1	DSSS	DBPSK
	+ BT-EDR	0 to 78	78	FHSS	GFSK
2	802.11ac (VHT80)	42, 155	42	OFDM	BPSK
	+ BT-EDR	0 to 78	78	FHSS	GFSK

#### Radiated Emission Test (Below 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11b	1 to 11	1	DSSS	DBPSK
	+ BT-EDR	0 to 78	78	FHSS	GFSK
2	802.11ac (VHT80)	42, 155	42	OFDM	BPSK
	+ BT-EDR	0 to 78	78	FHSS	GFSK

### Power Line Conducted Emission Test:

The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11b + BT-EDR	1 to 11	1	DSSS	DBPSK
		0 to 78	78	FHSS	GFSK
2	802.11ac (VHT80) + BT-EDR	42, 155	42	OFDM	BPSK
		0 to 78	78	FHSS	GFSK

### Conducted Out-Band Emission Measurement:

The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11b + BT-EDR	1 to 11	1	DSSS	DBPSK
		0 to 78	78	FHSS	GFSK
2	802.11ac (VHT80) + BT-EDR	42, 155	42	OFDM	BPSK
		0 to 78	78	FHSS	GFSK

### Test Condition:

Applicable To	Environmental Conditions	Input Power (System)	Tested By
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Spencer Liao
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
PLC	25deg. C, 66%RH	120Vac, 60Hz	Tom Yang
OB	24deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

### 3.2 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	USB Adapter	ASUS	EXA1205UA	N/A	N/A	Provided by Lab
B	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	N/A	Provided by Lab
C	Adapter	Lenovo	ADLX45YLC3D	N/A	N/A	Provided by Lab


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB Cable	1	1	Yes	0	Supplied by applicant
2	DC Cable	1	1.8	No	0	Provided by Lab
3	AC Power Cable	1	1	No	0	Provided by Lab

### 3.2.1 Configuration of System under Test

#### For AC Power Conducted Emission test

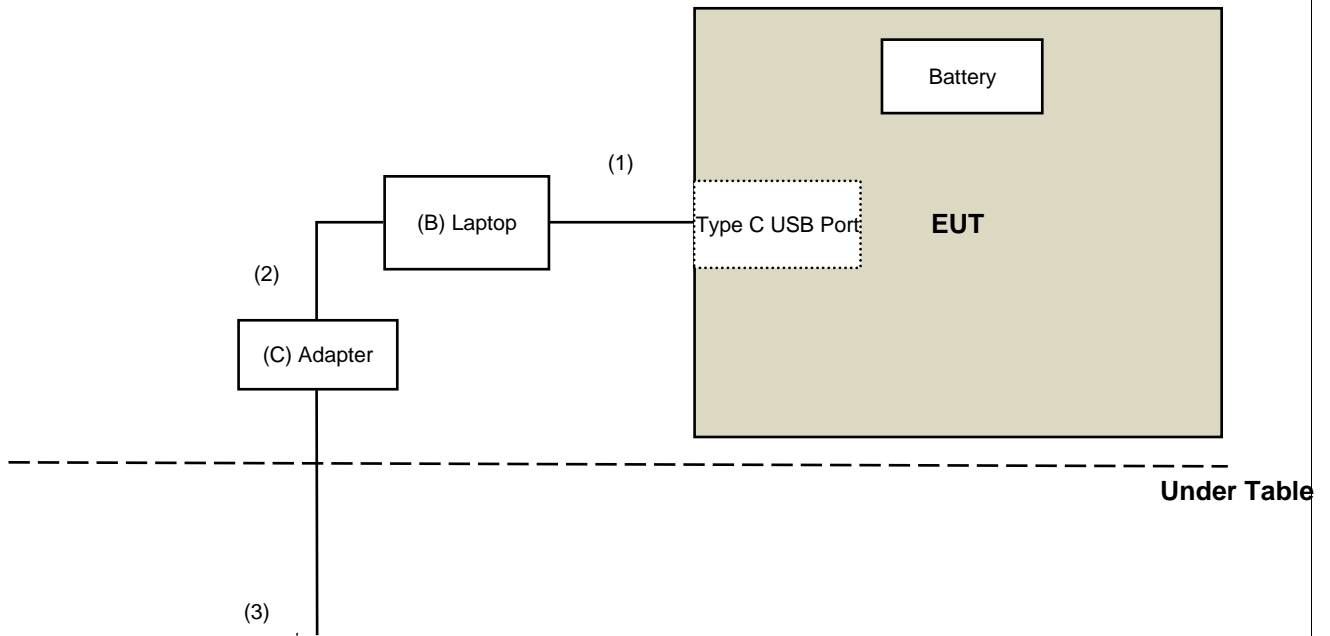

#### For Radiated Emission test

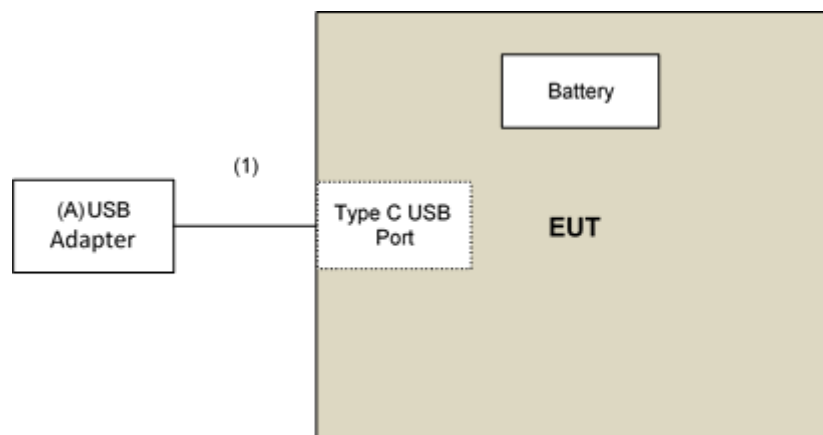

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK: -27 (dBm/MHz) <sup>*1</sup> PK: 10 (dBm/MHz) <sup>*2</sup> PK: 15.6 (dBm/MHz) <sup>*3</sup> PK: 27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dBμV/m) <sup>*1</sup> PK: 105.2 (dBμV/m) <sup>*2</sup> PK: 110.8(dBμV/m) <sup>*3</sup> PK: 122.2 (dBμV/m) <sup>*4</sup>
5725~5850 MHz	15.407(b)(4)(i)	PK: -27 (dBm/MHz) <sup>*1</sup> PK: 10 (dBm/MHz) <sup>*2</sup> PK: 15.6 (dBm/MHz) <sup>*3</sup> PK: 27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dBμV/m) <sup>*1</sup> PK: 105.2 (dBμV/m) <sup>*2</sup> PK: 110.8(dBμV/m) <sup>*3</sup> PK: 122.2 (dBμV/m) <sup>*4</sup>
<sup>*1</sup> beyond 75 MHz or more above of the band edge.		<sup>*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
<sup>*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		<sup>*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

**Note:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

## 4.1.2 Test Instruments

**For Radiated emission test:**

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2021/4/26	2022/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2021/5/3	2022/5/2
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Pre_Amplifier EMCI	EMC001340	980142	2021/5/24	2022/5/23
Loop Antenna TESEQ	HLA 6121	45745	2021/7/21	2022/7/20
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/1/6	2023/1/5
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2022/1/6	2023/1/5
Pre_Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	2021/10/19	2022/10/18
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-361	2021/10/26	2022/10/25
RF Coaxial Cable COMMATE/PEWC	8D	966-3-1	2022/2/26	2023/2/25
RF Coaxial Cable COMMATE/PEWC	8D	966-3-2	2022/2/26	2023/2/25
RF Coaxial Cable COMMATE/PEWC	8D	966-3-3	2022/2/26	2023/2/25
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	2021/9/23	2022/9/22
Horn Antenna Schwarzbeck	BBHA9120-D	9120D-406	2021/11/14	2022/11/13
Pre_Amplifier EMCI	EMC12630SE	980384	2022/1/10	2023/1/9
RF Coaxial Cable EMCI	EMC104-SM-SM-1500	180504	2021/4/26	2022/4/25
RF Coaxial Cable EMCI	EMC104-SM-SM-2000	180601	2021/6/8	2022/6/7
RF Cable EMCI	EMC104-SM-SM-6000	210201	2021/5/13	2022/5/12
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	NA	NA
Spectrum Analyzer Keysight	N9030A	MY54490679	2021/7/9	2022/7/8
Pre_Amplifier EMCI	EMC184045SE	980387	2022/1/10	2023/1/9
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170519	2021/11/14	2022/11/13
RF Cable-Frequency range: 1-40GHz EMCI	EMC102-KM-KM-1200	160924	2022/1/10	2023/1/9
RF cable (40GHz) EMCI	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: 2022/3/31

**For other test items:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	101516	2021/5/31	2022/5/30
10dB Attenuator Woken	MDCS18N-10	MDCS18N-10-01	2021/4/13	2022/4/12
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: 2022/3/26



#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

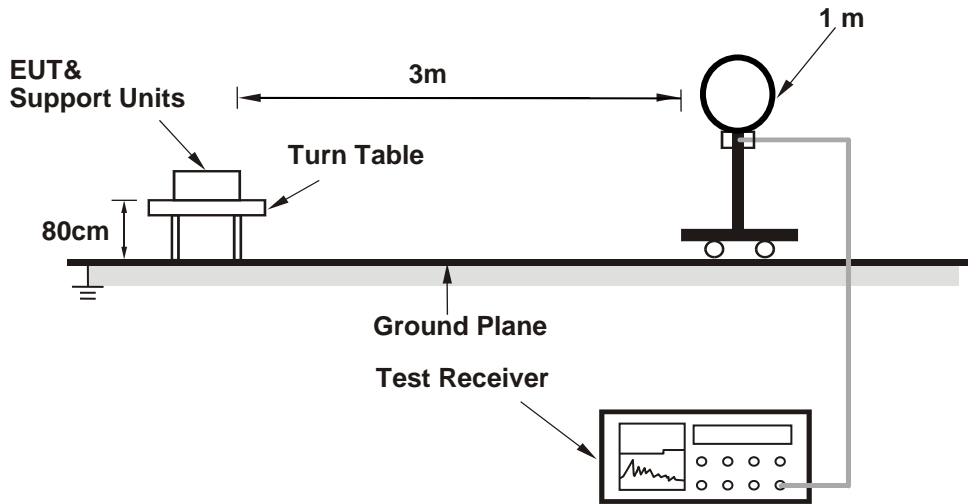

##### For Radiated emission 30MHz to 1GHz

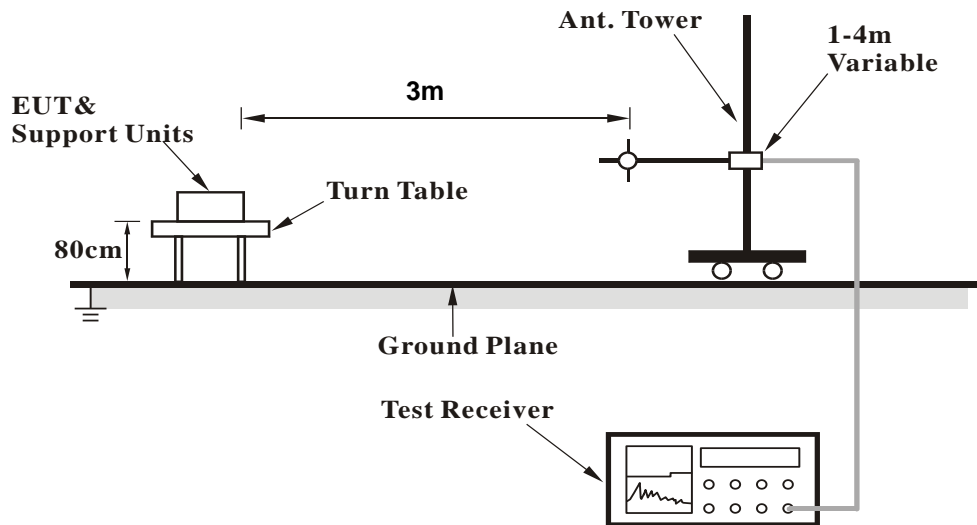

### For Radiated emission above 1GHz

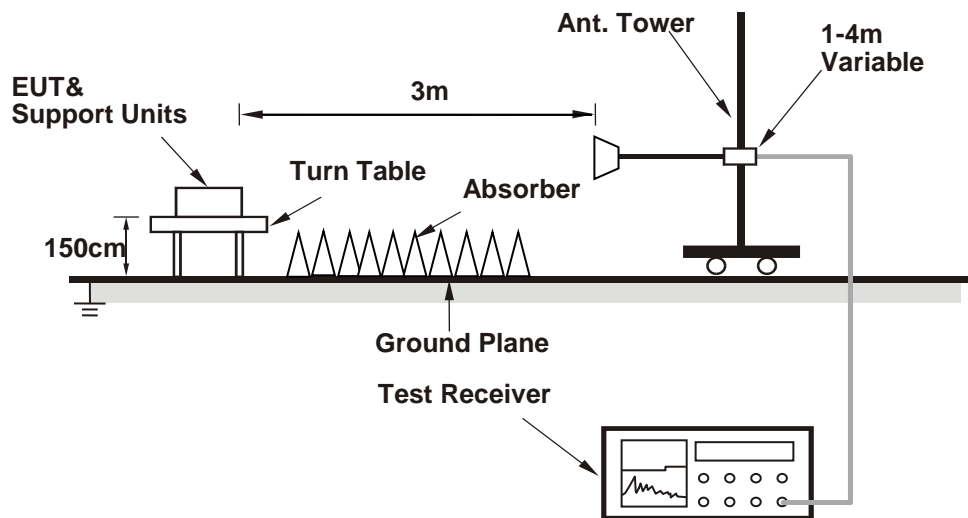

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Controlling software (Run Tera Term Ver 4.77.0.0) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 Test Results (Mode 1)

## Above 1GHz Data:

<b>Frequency Range</b>	1GHz ~ 40GHz	<b>Detector Function</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.0 PK	74.0	-32.0	2.35 H	286	38.3	3.7
2	4824.00	40.7 AV	54.0	-13.3	2.35 H	286	37.0	3.7
3	4960.00	42.4 PK	74.0	-31.6	1.32 H	38	38.7	3.7
4	4960.00	30.8 AV	54.0	-23.2	1.32 H	38	27.1	3.7
5	7320.00	33.7 AV	54.0	-20.3	1.77 H	35	24.0	9.7
6	7440.00	42.6 PK	74.0	-31.4	1.77 H	35	32.4	10.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.1 PK	74.0	-33.9	3.90 V	113	36.4	3.7
2	4824.00	38.6 AV	54.0	-15.4	3.90 V	113	34.9	3.7
3	4960.00	51.1 PK	74.0	-22.9	1.96 V	15	47.4	3.7
4	4960.00	41.3 AV	54.0	-12.7	1.96 V	15	37.6	3.7
5	7440.00	51.0 PK	74.0	-23.0	3.57 V	30	40.8	10.2
6	7440.00	44.2 AV	54.0	-9.8	3.57 V	30	34.0	10.2

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.


### Below 1GHz Data:

Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	106.87	26.2 QP	43.5	-17.3	1.00 H	331	37.6	-11.4
2	128.45	28.9 QP	43.5	-14.6	1.00 H	258	38.2	-9.3
3	146.95	25.1 QP	43.5	-18.4	2.00 H	290	33.0	-7.9
4	198.33	22.8 QP	43.5	-20.7	1.50 H	134	34.0	-11.2
5	301.97	36.2 QP	46.0	-9.8	1.00 H	219	43.8	-7.6
6	594.40	33.5 QP	46.0	-12.5	1.50 H	354	34.1	-0.6

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

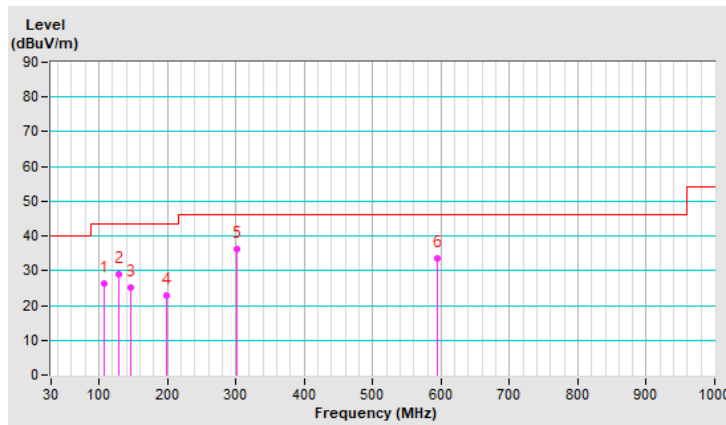


<b>Frequency Range</b>	9kHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.31	25.9 QP	40.0	-14.1	1.50 V	53	34.6	-8.7
2	105.56	28.5 QP	43.5	-15.0	2.00 V	295	40.1	-11.6
3	128.64	28.7 QP	43.5	-14.8	1.50 V	38	38.0	-9.3
4	402.08	29.7 QP	46.0	-16.3	3.00 V	260	35.0	-5.3
5	644.84	31.4 QP	46.0	-14.6	2.00 V	354	31.3	0.1
6	990.50	36.9 QP	54.0	-17.1	1.50 V	308	31.6	5.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

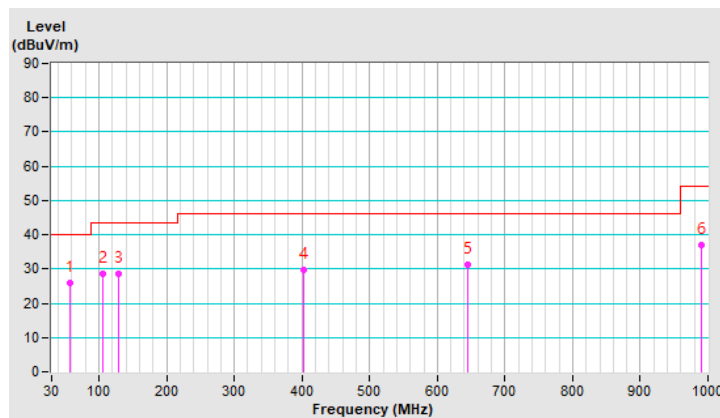

## 4.1.8 Test Results (Mode 2)

## Above 1GHz Data:

<b>Frequency Range</b>	1GHz ~ 40GHz	<b>Detector Function</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	42.1 PK	74.0	-31.9	1.27 H	31	38.4	3.7
2	4960.00	30.7 AV	54.0	-23.3	1.27 H	31	27.0	3.7
3	7440.00	42.8 PK	74.0	-31.2	1.79 H	38	32.6	10.2
4	7440.00	34.1 AV	54.0	-19.9	1.79 H	38	23.9	10.2
5	#10420.00	55.1 PK	68.2	-13.1	1.03 H	188	41.4	13.7
6	15630.00	55.8 PK	74.0	-18.2	1.49 H	230	41.9	13.9
7	<b>15630.00</b>	<b>44.4 AV</b>	<b>54.0</b>	<b>-9.6</b>	<b>1.49 H</b>	<b>230</b>	<b>30.5</b>	<b>13.9</b>
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	51.0 PK	74.0	-23.0	2.01 V	7	47.3	3.7
2	4960.00	41.2 AV	54.0	-12.8	2.01 V	7	37.5	3.7
3	7440.00	50.7 PK	74.0	-23.3	3.61 V	25	40.5	10.2
4	7440.00	43.9 AV	54.0	-10.1	3.61 V	25	33.7	10.2
5	#10420.00	50.3 PK	68.2	-17.9	1.12 V	188	36.6	13.7
6	15630.00	50.4 PK	74.0	-23.6	1.66 V	222	36.5	13.9
7	15630.00	39.9 AV	54.0	-14.1	1.66 V	222	26.0	13.9

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


### Below 1GHz Data:

Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	106.94	26.5 QP	43.5	-17.0	1.00 H	359	37.9	-11.4
2	128.24	28.6 QP	43.5	-14.9	1.00 H	236	37.9	-9.3
3	147.27	25.4 QP	43.5	-18.1	3.00 H	312	33.4	-8.0
4	198.12	22.5 QP	43.5	-21.0	1.00 H	130	33.7	-11.2
5	302.19	35.9 QP	46.0	-10.1	1.00 H	219	43.5	-7.6
6	594.18	33.1 QP	46.0	-12.9	1.00 H	341	33.7	-0.6

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

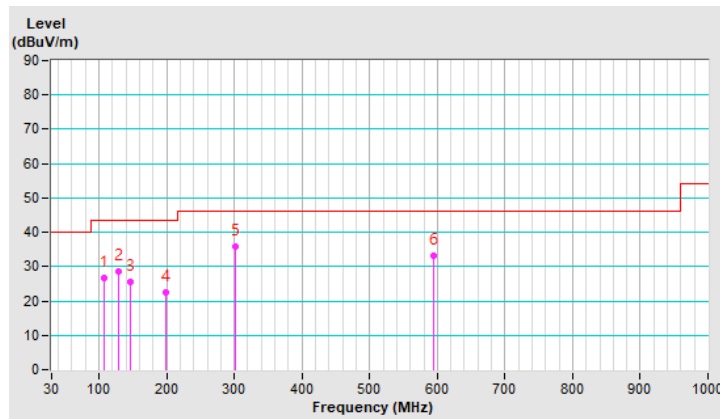




Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.99	25.4 QP	40.0	-14.6	2.00 V	359	34.1	-8.7
2	105.74	28.7 QP	43.5	-14.8	3.00 V	351	40.3	-11.6
3	128.26	28.3 QP	43.5	-15.2	2.00 V	349	37.6	-9.3
4	301.87	29.4 QP	46.0	-16.6	3.00 V	278	37.0	-7.6
5	644.49	30.5 QP	46.0	-15.5	3.00 V	2	30.4	0.1
6	990.13	36.3 QP	54.0	-17.7	1.00 V	315	31.0	5.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

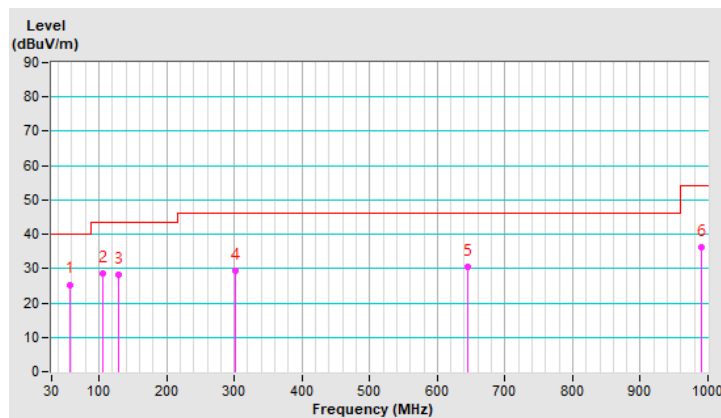

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	2021/10/13	2022/10/12
LISN R&S	ESH3-Z5	848773/004	2021/10/29	2022/10/28
50 ohms Terminator	50	3	2021/10/27	2022/10/26
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2021/9/25	2022/9/24
Fixed attenuator STI	STI02-2200-10	005	2021/8/27	2022/8/26
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: 2022/3/31

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

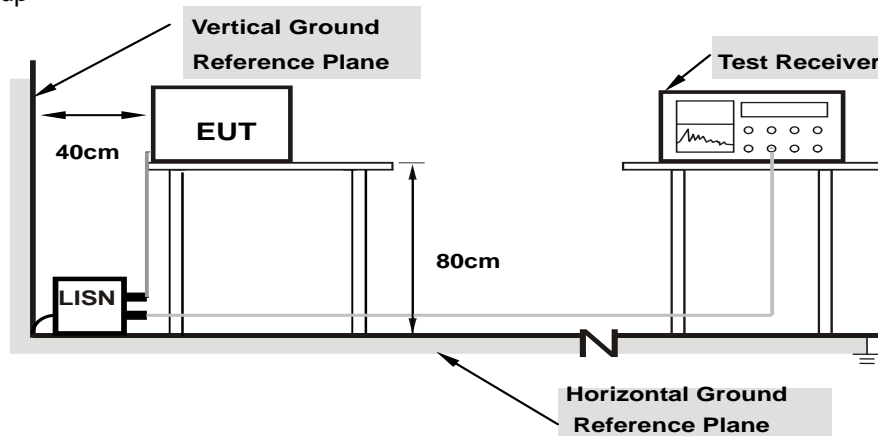

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
------------------------	----------------	---	--------------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15014	10.05	37.91	20.53	47.96	30.58	65.99	55.99	-18.03	-25.41
2	0.23613	10.05	27.62	13.33	37.67	23.38	62.23	52.23	-24.56	-28.85
3	0.57725	10.08	25.26	18.13	35.34	28.21	56.00	46.00	-20.66	-17.79
4	2.14043	10.17	18.15	12.63	28.32	22.80	56.00	46.00	-27.68	-23.20
5	5.43092	10.34	11.67	5.76	22.01	16.10	60.00	50.00	-37.99	-33.90
6	11.96043	10.73	24.52	18.23	35.25	28.96	60.00	50.00	-24.75	-21.04

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

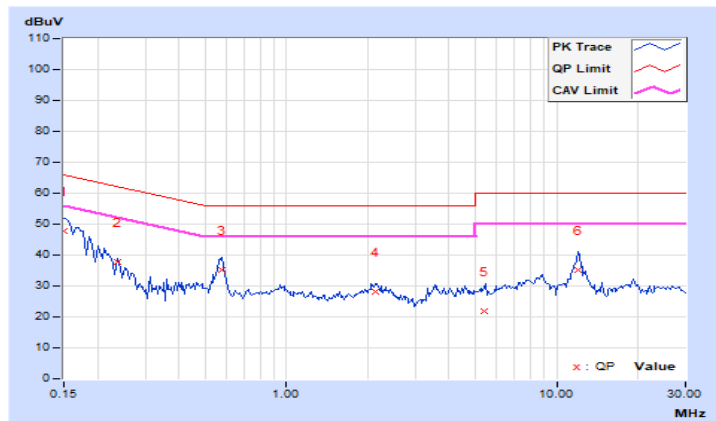


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
------------------------	----------------	---	--------------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15023	10.02	41.07	23.91	51.09	33.93	65.99	55.99	-14.90	-22.06
2	0.21993	10.03	27.03	12.49	37.06	22.52	62.82	52.82	-25.76	-30.30
3	0.58013	10.05	23.41	16.01	33.46	26.06	56.00	46.00	-22.54	-19.94
4	2.26124	10.14	19.88	12.63	30.02	22.77	56.00	46.00	-25.98	-23.23
5	3.98915	10.21	21.13	13.77	31.34	23.98	56.00	46.00	-24.66	-22.02
6	12.13672	10.59	23.36	17.33	33.95	27.92	60.00	50.00	-26.05	-22.08

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

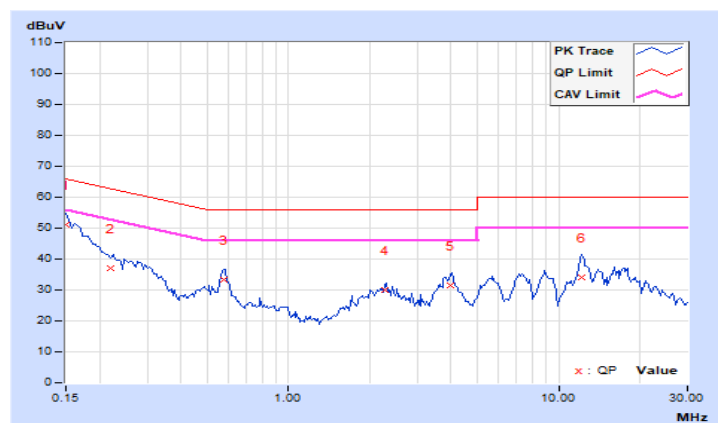


4.2.8 Test Results (Mode 2)

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
------------------------	----------------	---	--------------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15137	10.05	39.03	21.92	49.08	31.97	65.92	55.92	-16.84	-23.95
2	0.28862	10.06	20.94	6.56	31.00	16.62	60.56	50.56	-29.56	-33.94
3	2.21037	10.17	18.76	11.25	28.93	21.42	56.00	46.00	-27.07	-24.58
4	4.12473	10.27	17.20	10.34	27.47	20.61	56.00	46.00	-28.53	-25.39
5	12.12971	10.74	27.76	21.83	38.50	32.57	60.00	50.00	-21.50	-17.43
6	20.12041	11.22	18.26	14.03	29.48	25.25	60.00	50.00	-30.52	-24.75

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

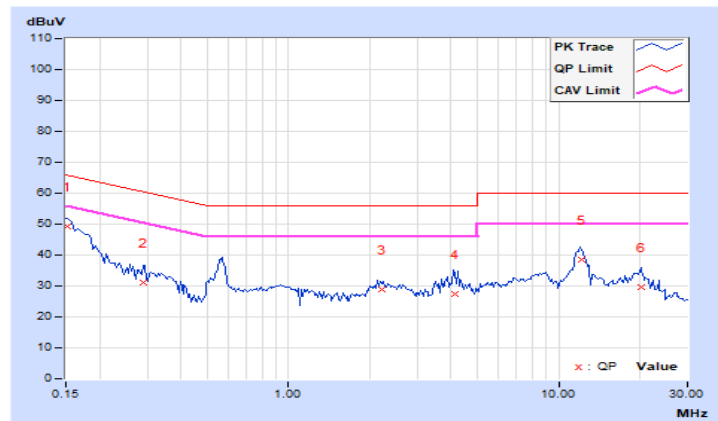


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
------------------------	----------------	---	--------------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.02	39.03	23.24	49.05	33.26	66.00	56.00	-16.95	-22.74
2	0.22531	10.03	23.54	7.46	33.57	17.49	62.62	52.62	-29.05	-35.13
3	0.56817	10.05	25.49	18.16	35.54	28.21	56.00	46.00	-20.46	-17.79
4	2.16315	10.14	18.88	10.16	29.02	20.30	56.00	46.00	-26.98	-25.70
5	12.12973	10.59	23.71	17.54	34.30	28.13	60.00	50.00	-25.70	-21.87
6	17.86543	10.85	19.32	14.77	30.17	25.62	60.00	50.00	-29.83	-24.38

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

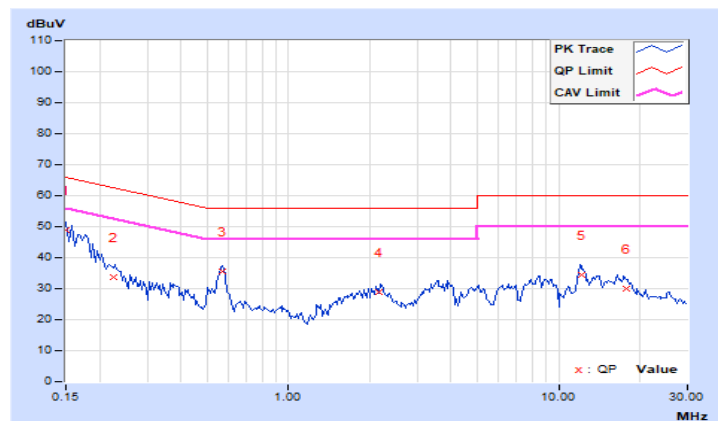


### 4.3 Conducted Out of Band Emission Measurement

#### 4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

#### 4.3.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.



### 2.4GHz\_802.11b CH1 + BT-EDR\_CH78

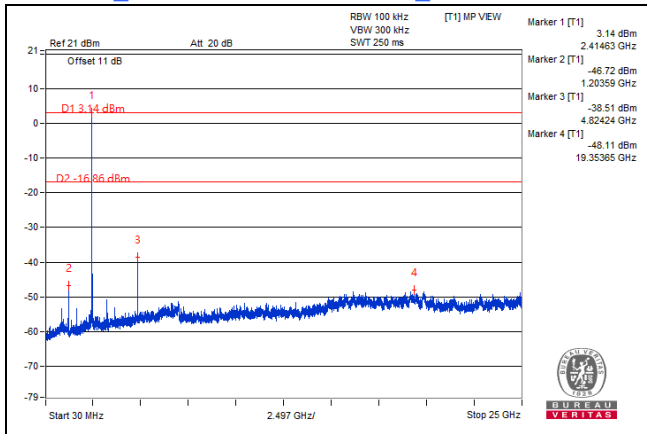

### 5GHz\_802.11ac (VHT80) CH42 + BT-EDR\_CH78

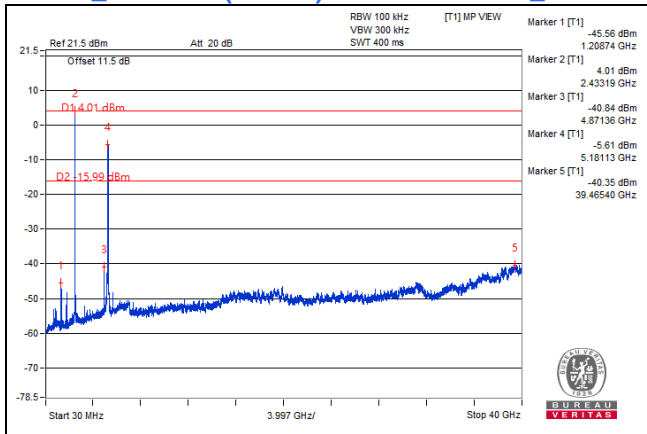

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---