



FCC TEST REPORT

CATEGORY : Portable
PRODUCT NAME : Bluetooth Headset
FCC ID. : NPDUBH-2010
FILING TYPE : Certification
MODEL NAME : UBH-2010, BK-600, BH-1100
TRADE NAME : Partner
APPLICANT : **Partner Tech Corp.**
10F, NO. 233-2, PAO CHIAO ROAD, SHIN TIEN, TAIPEI,
TAIWAN, R.O.C.
MANUFACTURER : **Same as applicant**
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.


Dr. Alan Lane
Vice General Manager
SPORTON International Inc.



1190
ILAC MRA



Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	iii
1. General Description of Equipment under Test.....	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Antenna Description.....	2
1.6. Table for Carrier Frequencies	2
2. Test Configuration of the Equipment under Test.....	3
2.1. Connection Diagram of Test System	3
2.2. The Test Mode Description	3
2.3. Description of Test Supporting Units	3
3. General Information of Test.....	4
3.1. Test Facility	4
3.2. Test Conditions	4
3.3. Standards for Methods of Measurement.....	4
3.4. DoC Statement	4
3.5. Frequency Range Investigated	4
3.6. Test Distance	4
3.7. Test Software.....	5
4. List of Measurements.....	6
4.1. Summary of the Test Results.....	6
5. Test Result	7
5.1. Test of Hopping Channel Bandwidth	7
5.2. Test of Hopping Channel Separation.....	10
5.3. Test of Number of Hopping Frequency.....	13
5.4. Test of Dwell Time of Each Frequency.....	15
5.5. Maximum Peak Output Power	21
5.6. Test of Band Edges Emission.....	22
5.7. Test of AC Power Line Conducted Emission	24
5.8. Test of Spurious Radiated Emission.....	28
5.9. Antenna Requirements	40
6 List of Measuring Equipments Used	41
Appendix A. Photographs of EUT.....	A1 ~ A14



History of this test report

Received Date: May 19, 2005

Original Report Issue Date: Jun. 1, 2005

Report No.: FR551910

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C (Section 15.247)

PRODUCT NAME : Bluetooth Headset

MODEL NAME : UBH-2010, BK-600, BH-1100

APPLICANT : **Partner Tech Corp.**

10F, NO. 233-2, PAO CHIAO ROAD, SHIN TIEN, TAIPEI,
TAIWAN, R.O.C.

MANUFACTURER : **Same as applicant**

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4 - 2003 and all test are performed according to 47 CFR FCC Part 15. Testing was carried out on May 30, 2005 at SPORTON International Inc. LAB.

A handwritten signature in blue ink, appearing to read 'Alan Lane', is written over a horizontal line.

Dr. Alan Lane

Vice General Manager
SPORTON International Inc.



1. General Description of Equipment under Test

1.1. Applicant

Partner Tech Corp.

10F, NO. 233-2, PAO CHIAO ROAD, SHIN TIEN, TAIPEI, TAIWAN, R.O.C.

1.2. Manufacturer

Same as applicant

1.3. Basic Description of Equipment under Test

This product is a headset with wireless Bluetooth solution. The technical data has been listed on section "Features of Equipment under Test". This product is able to be charged via USB port of the computer.

1.4. Features of Equipment under Test

Items	Description
Type of Modulation	: GFSK
Number of Channels	: 79
Frequency Band	: 2400MHz ~ 2483.5MHz
Carrier Frequency	: See section 1.6 for details
Data Rate	: 1Mbps
Channel Bandwidth	: 1MHz
Conducted Peak Power	: 3.30dBm
Antenna Type	: See section 1.5 for details
Testing Duty Cycle	: 46.77%
Power Rating (DC/AC, Voltage)	: 3.3 VDC from chargeable battery
Test Power Source	: 110.00V AC
Temperature Range (Operating)	: -20 ~ 70 °C



1.5. Antenna Description

1 type of antenna is filed in this project.


No.	Antenna Type	Gain (dBi)
1	PIFA	0.72

1.6. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	20	2422 MHz	40	2442 MHz	60	2462 MHz
01	2403 MHz	21	2423 MHz	41	2443 MHz	61	2463 MHz
02	2404 MHz	22	2424 MHz	42	2444 MHz	62	2464 MHz
03	2405 MHz	23	2425 MHz	43	2445 MHz	63	2465 MHz
04	2406 MHz	24	2426 MHz	44	2446 MHz	64	2466 MHz
05	2407 MHz	25	2427 MHz	45	2447 MHz	65	2467 MHz
06	2408 MHz	26	2428 MHz	46	2448 MHz	66	2468 MHz
07	2409 MHz	27	2429 MHz	47	2449 MHz	67	2469 MHz
08	2410 MHz	28	2430 MHz	48	2450 MHz	68	2470 MHz
09	2411 MHz	29	2431 MHz	49	2451 MHz	69	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Test System

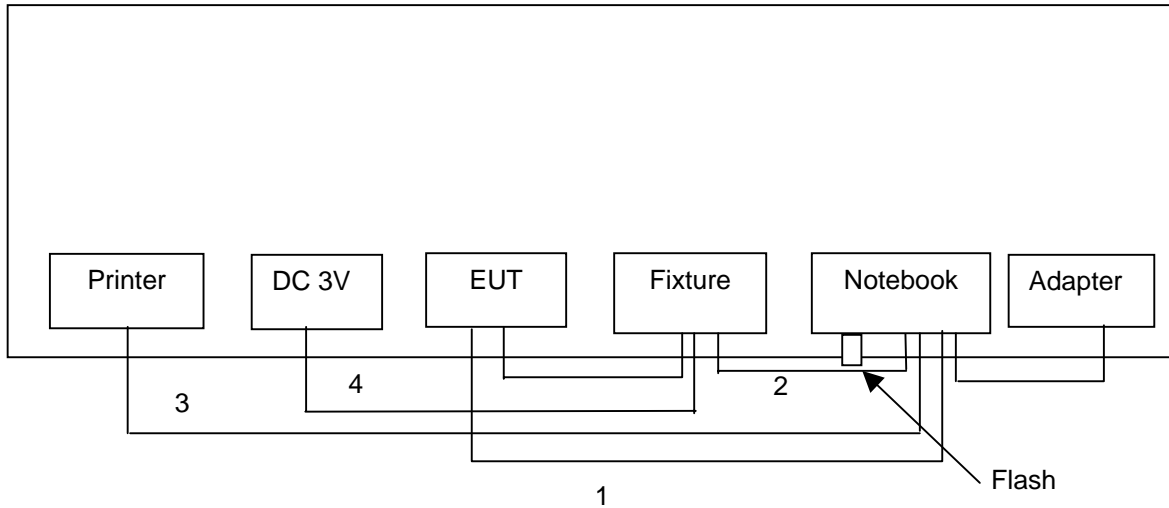

1. USB Cable, 0.4m, non-shielding
2. RS232 Cable, 1.8m, non-shielding
3. LPT cable, 1.35m, non-shielding
4. DC Line Cable, 0.25m, non-shielding

2.2. The Test Mode Description

Spurious emission below 1GHz is independent of channel selection, so only channel 39 with GFSK modulation was tested.

AC conduction emission was performed while the EUT was charged by notebook via USB port.

2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	Serial No.	FCC ID	Data cable (m)
Notebook	DELL	PP01L (D505)	-	DoC	-
Printer	EPSON	LQ-680	-	DoC	1.35



3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055

Test Site No : 03CH03-HY / TH01-HY / CO04-HY

3.2. Test Conditions

Normal Voltage : 3.3VDC
Extreme Temperature : -20 °C and 70 °C

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003
47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.

3.5. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

3.6. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.
The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.



3.7. Test Software

Executed "Bluetest" to keep transmitting signals at fixed frequency.

Software Version : Bluetest
Power Set CH00 / GFSK : 63/ TX Power
Power Set CH39 / GFSK : 63/ TX Power
Power Set CH78 / GFSK : 63/ TX Power

An executive program, EMITEST.EXE under WIN 2000, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

1. Turn on the power of all equipment.
2. The notebook reads the test program from the hard disk drive and runs it.
3. The notebook sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
4. The notebook sends " H " messages to the printer, then the printer prints them on the paper.
5. The notebook sends " H " messages to the modem.
6. The notebook sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
7. Repeat the steps from 3 to 6.



4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2

Paragraph	FCC Rule	Description of Test	Result
5.1	15.247	Hopping Channel Bandwidth	Pass
5.2	15.247	Hopping Channel Separation	Pass
5.3	15.247	Number of Hopping Frequency Used	Pass
5.4	15.247	Dwell Time of Each Frequency	Pass
5.5	15.247	Maximum Peak Output Power	Pass
5.6	15.247	Band Edges Emission	Pass
5.7	15.207	AC Power Line Conducted Emission	Pass
5.8	15.209/15.247	Spurious Radiated Emission	Pass
5.9	15.203/15.247	Antenna Requirement	Pass

5. Test Result

5.1. Test of Hopping Channel Bandwidth


5.1.1. Measuring Instruments

Item 18 of the table on section 6.

5.1.2. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe the hopping frequencies within 2400~2483.5MHz, minimumly 75 hopping frequencies should be available.

5.1.3. Test Setup Layout

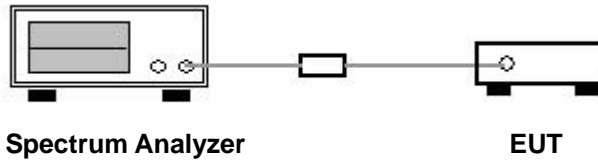

5.1.4. Test Result: See spectrum analyzer plots below

Temperature: 26°C

Relative Humidity: 64%


Duty Cycle of the Equipment During the Test: 46.77%

Test Engineer: Eason Lu

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
GFSK	00	2402 MHz	785.00	25
GFSK	39	2441 MHz	825.00	25
GFSK	78	2480 MHz	830.00	25




Modulation Type: GFSK (Channel 00) :

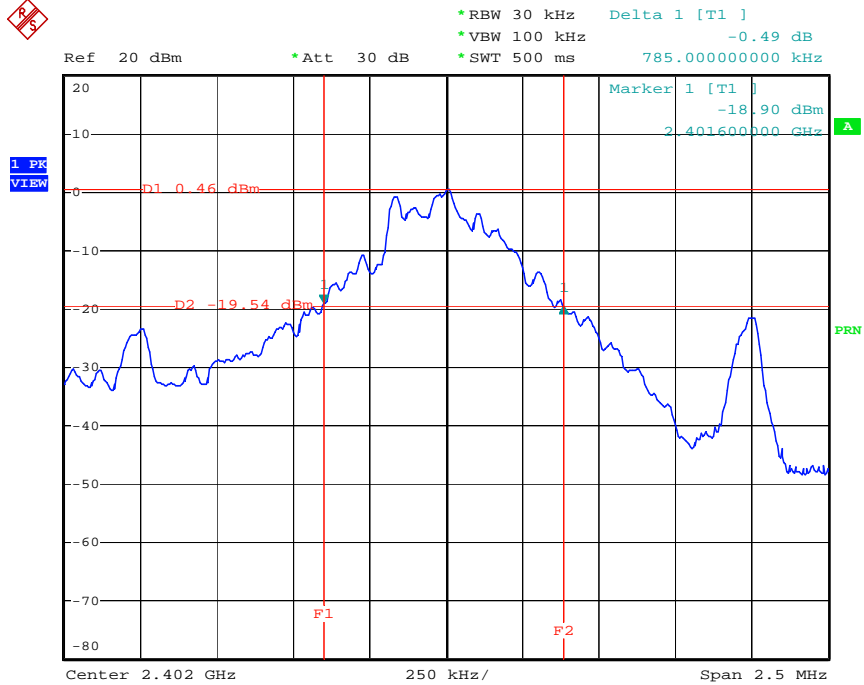

Date: 26.MAY.2005 16:11:46


Modulation Type: GFSK (Channel 39) :

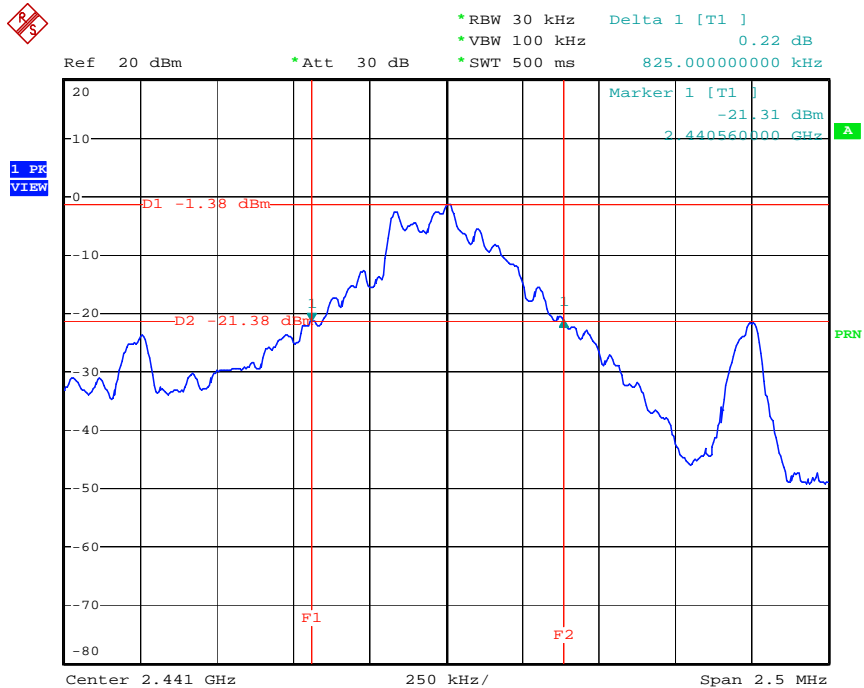

Date: 26.MAY.2005 16:09:16



Modulation Type: GFSK (Channel 78) :

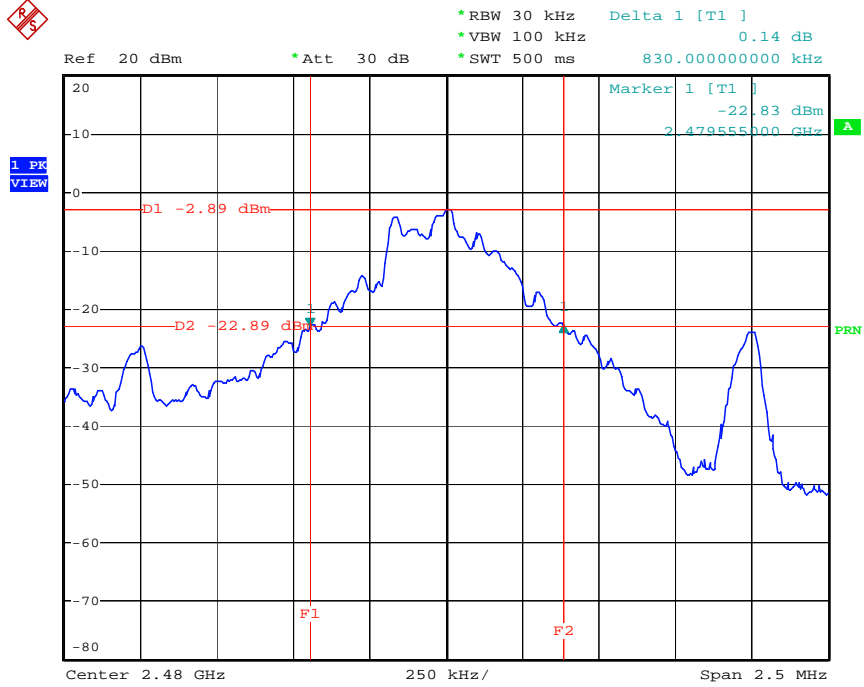

Date: 26.MAY.2005 16:13:15

5.2. Test of Hopping Channel Separation


5.2.1. Measuring Instruments

Item 18 of the table on section 6.

5.2.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.2.3. Test Setup Layout

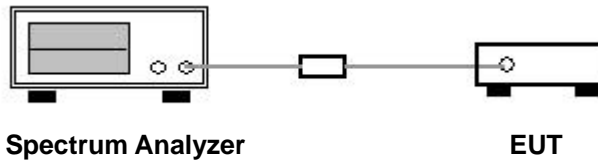


5.2.4. Test Result: See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Eason Lu

Modulation Type	Channel	Frequency	Hopping Channel Separation	Min. Limit
		(MHz)	(kHz)	(kHz)
GFSK	00	2402 MHz	1000	785.00
GFSK	39	2441 MHz	1000	825.00
GFSK	78	2480 MHz	1000	830.00




Modulation Type: GFSK (Channel 00) :

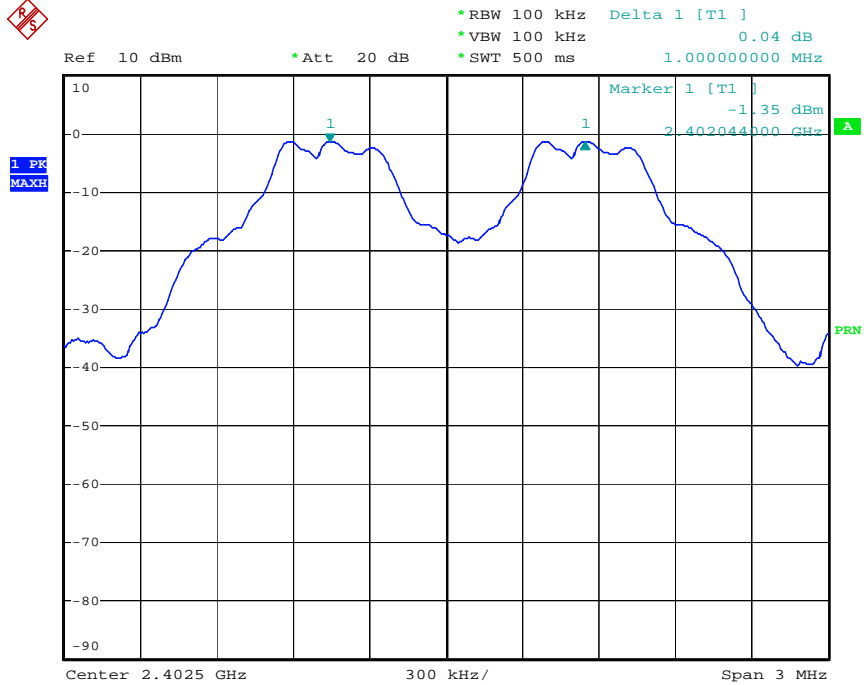

Date: 16.MAR.2005 19:33:20


Modulation Type: GFSK (Channel 39) :

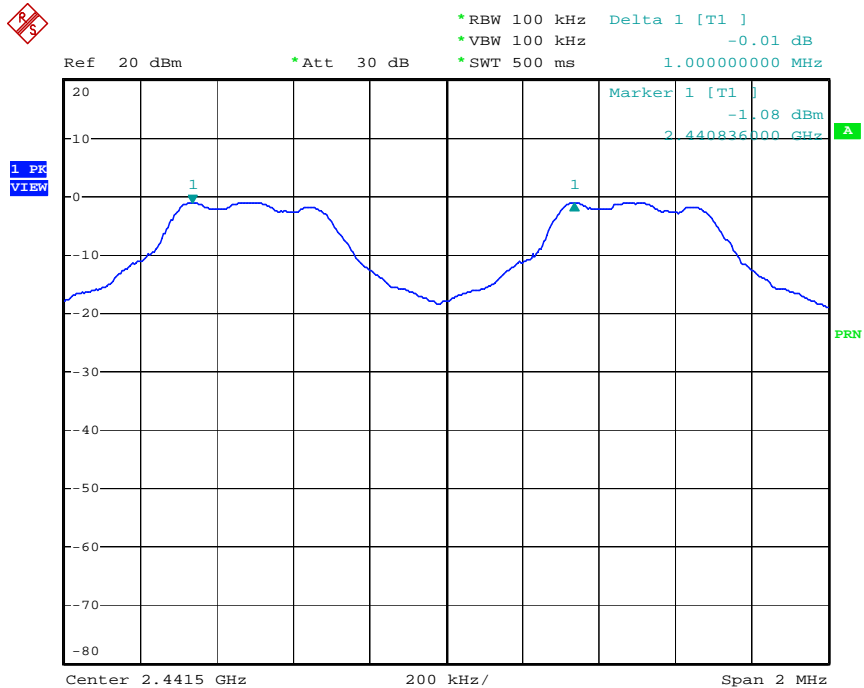

Date: 26.MAY.2005 16:32:34



Modulation Type: GFSK (Channel 78) :

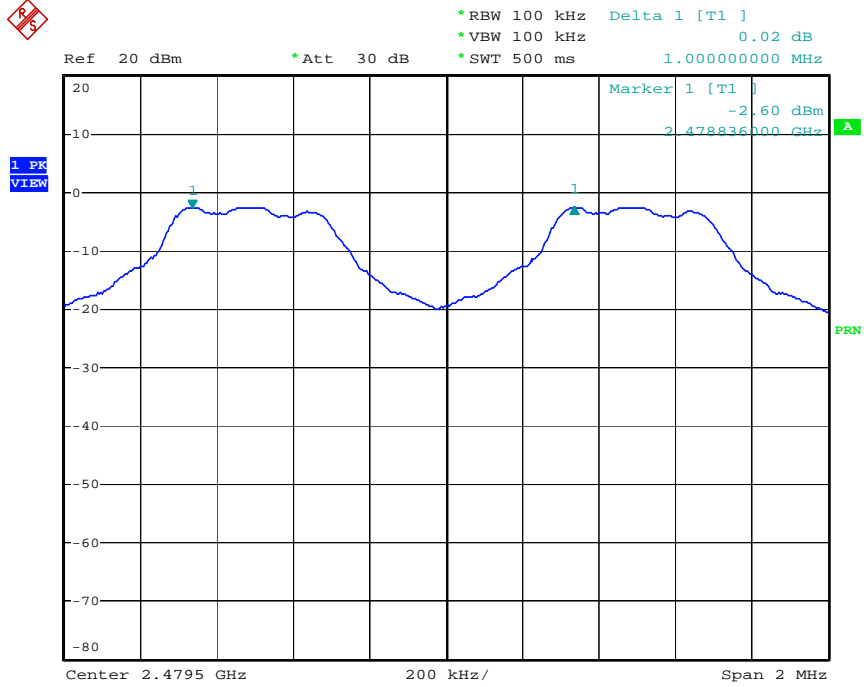

Date: 26.MAY.2005 16:33:25

5.3. Test of Number of Hopping Frequency


5.3.1. Measuring Instruments

Item 18 of the table on section 6.

5.3.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.3.3. Test Setup Layout




5.3.4. Test Result: See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Eason Lu

Modulation Type	Channel	Frequency (MHz)	Number of Hopping Ch. (Channels)	Min. Limit (Channels)
GFSK	00 ~ 78	2402 MHz ~ 2480 MHz	79	75



Modulation Type: GFSK (Channel 00 ~ Channel 78) :

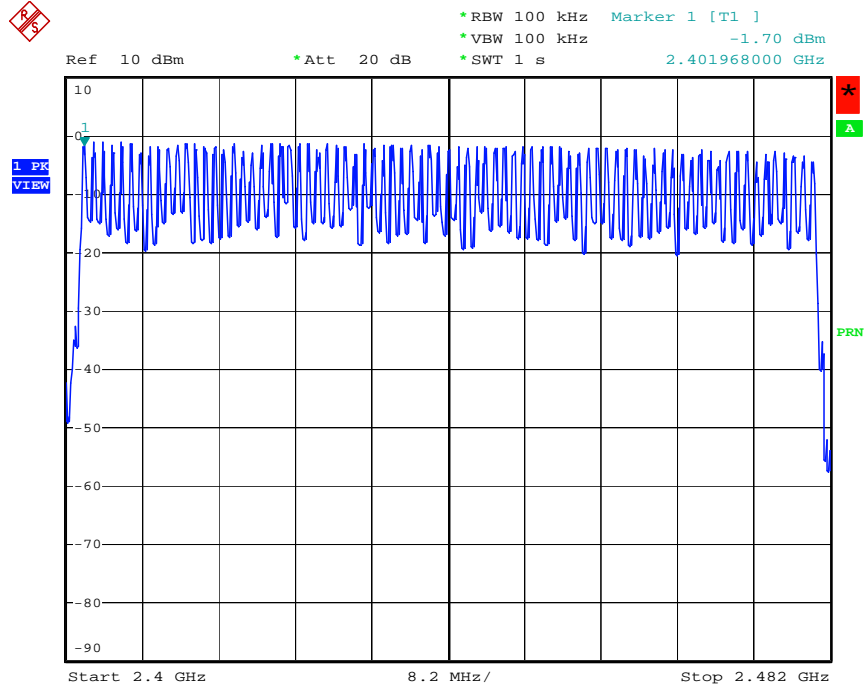

Date: 18.MAR.2005 10:46:37

5.4. Test of Dwell Time of Each Frequency


5.4.1. Measuring Instruments

Item 18 of the table on section 6.

5.4.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. Set the EUT for DH5, DH3 and DH1 packet transmitting.
5. Measure the maximum time duration, t , of one single pulse.
6. DH5 Packet permit maximum 3.37 hops per second in each channel. So, the dwell time is the time duration of the pulse times 106.6 within 31.6 seconds.
7. DH3 Packet permit maximum 5.06 hops per second in each channel. So, the dwell time is the time duration of the pulse times 160 within 31.6 seconds.
8. DH1 Packet permit maximum 10.12 hops per second in each channel. So, the dwell time is the time duration of the pulse times 320 within 31.6 seconds.

5.4.3. Test Setup Layout

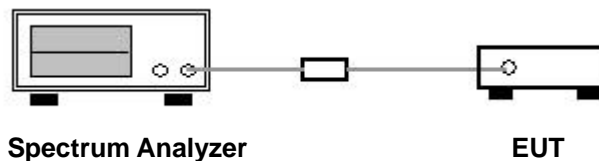


5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Eason Lu

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2402 MHz	3.1100	0.3317	0.4
DH3	2441 MHz	1.8400	0.2944	0.4
DH1	2480 MHz	0.5800	0.1856	0.4




DH5 Modulation Type: GFSK (Channel 00) :

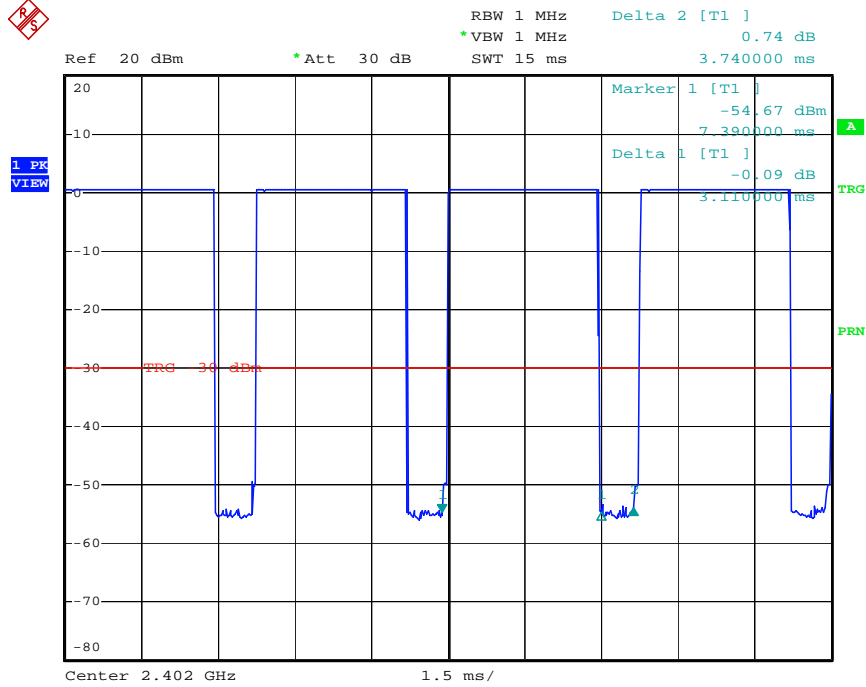

Date: 26.MAY.2005 16:20:31


DH3 Modulation Type: GFSK (Channel 00) :

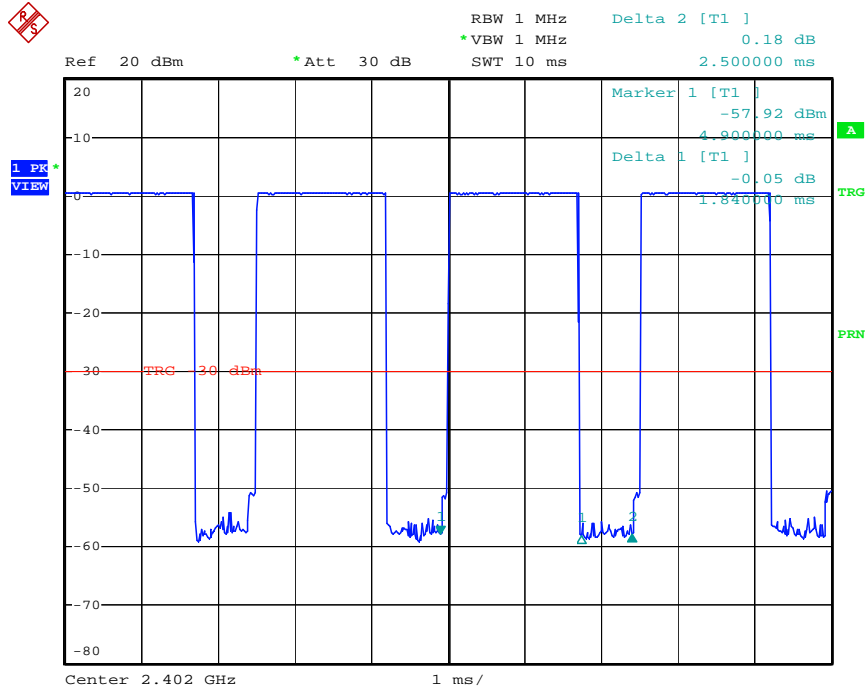

Date: 26.MAY.2005 16:18:38




DH1 Modulation Type: GFSK (Channel 00) :

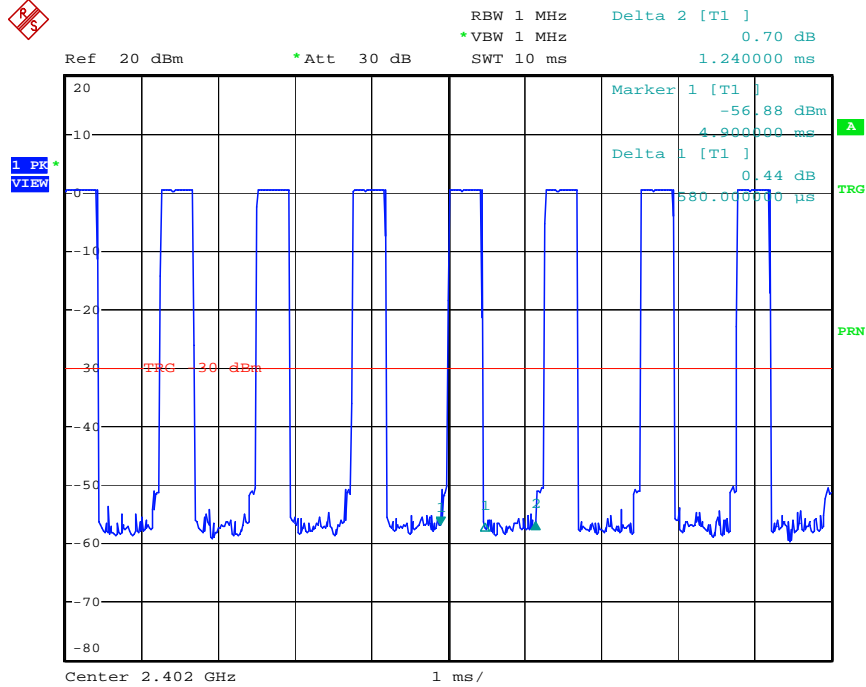

Date: 26.MAY.2005 16:17:42


DH5 Modulation Type: GFSK (Channel 39) :

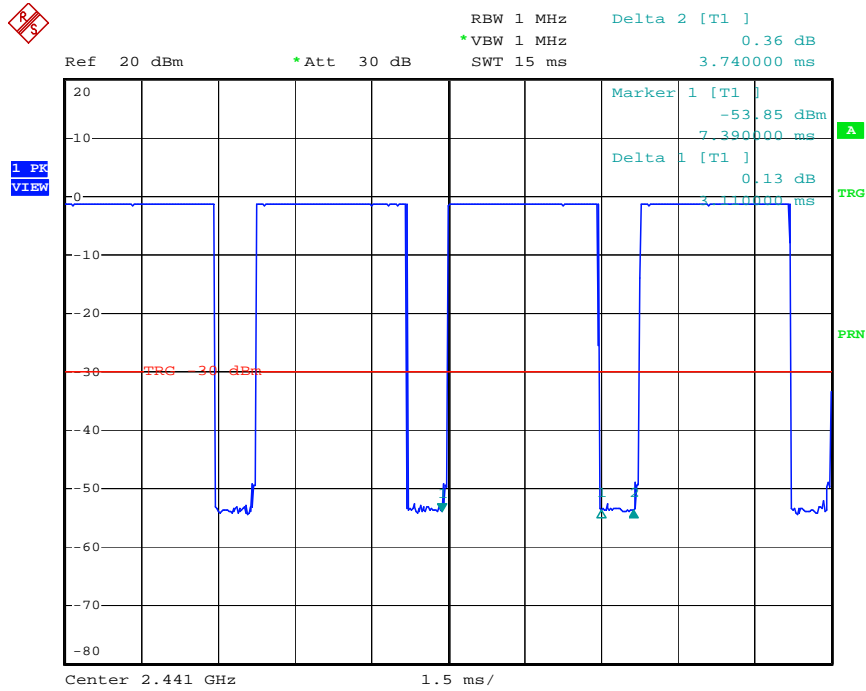

Date: 26.MAY.2005 16:24:25




DH3 Modulation Type: GFSK (Channel 39) :

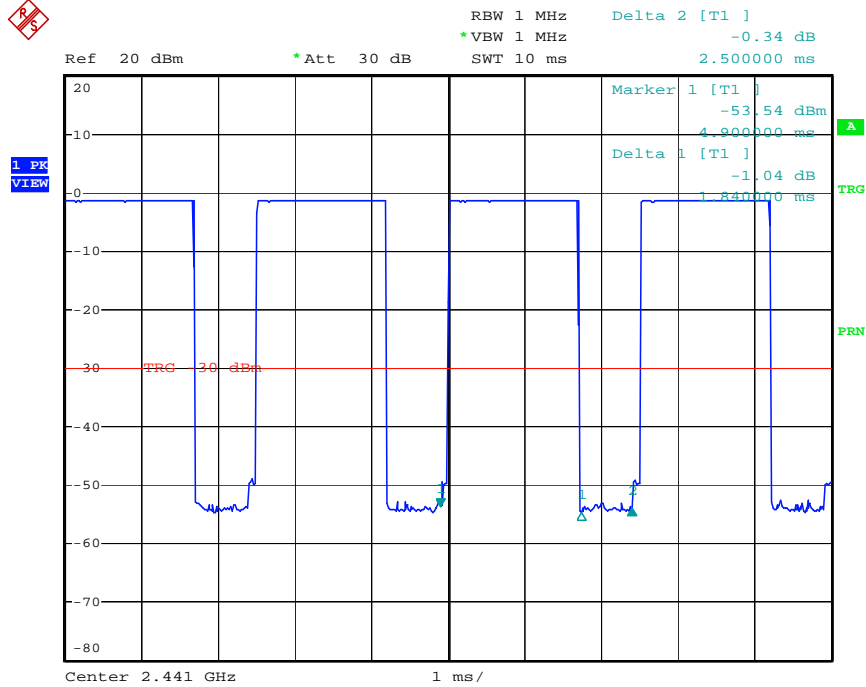

Date: 26.MAY.2005 16:23:25


DH1 Modulation Type: GFSK (Channel 39) :

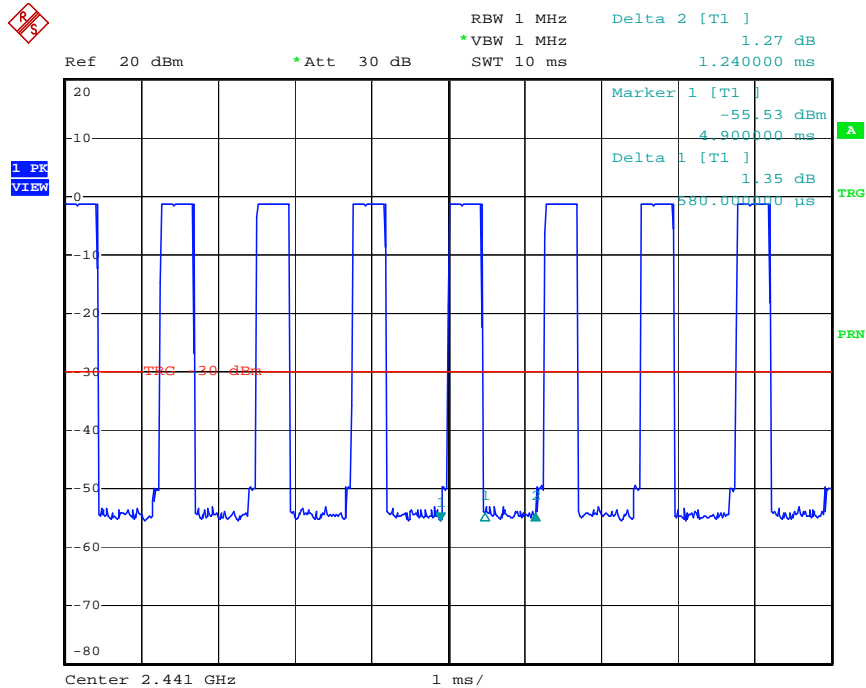

Date: 26.MAY.2005 16:21:54




DH5 Modulation Type: GFSK (Channel 78) :

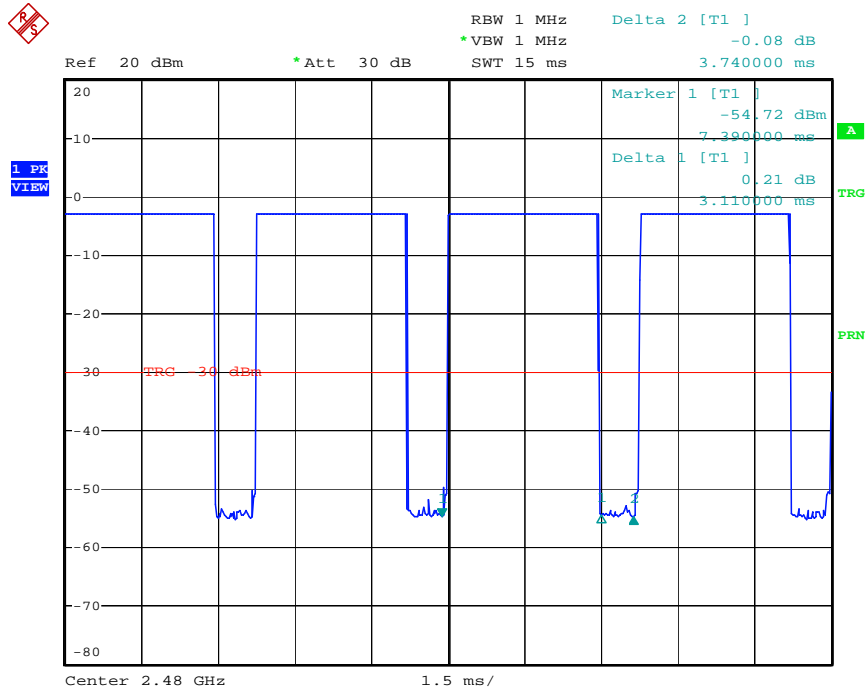

Date: 26.MAY.2005 16:29:06


DH3 Modulation Type: GFSK (Channel 78) :

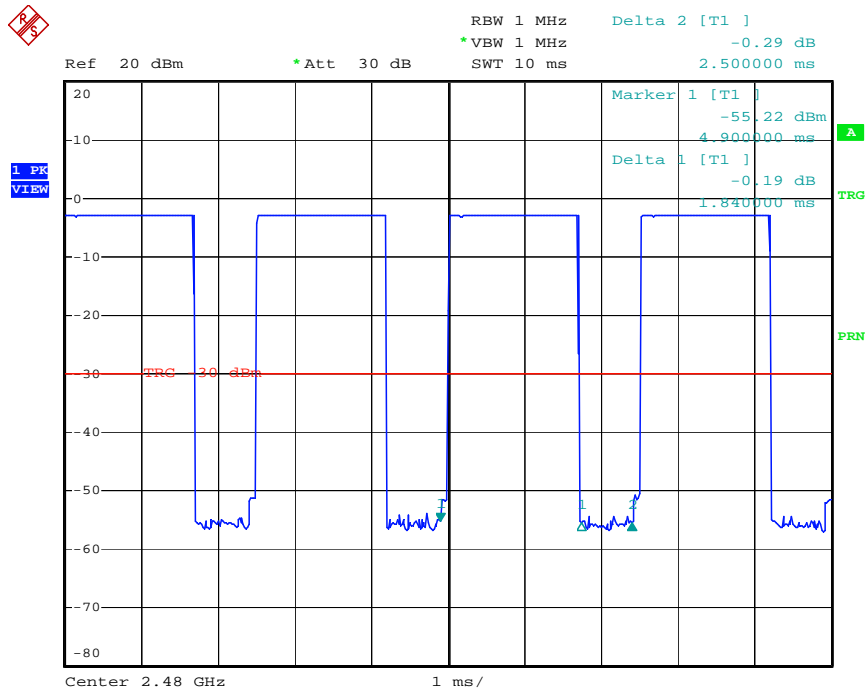

Date: 26.MAY.2005 16:26:52



DH1 Modulation Type: GFSK (Channel 78) :

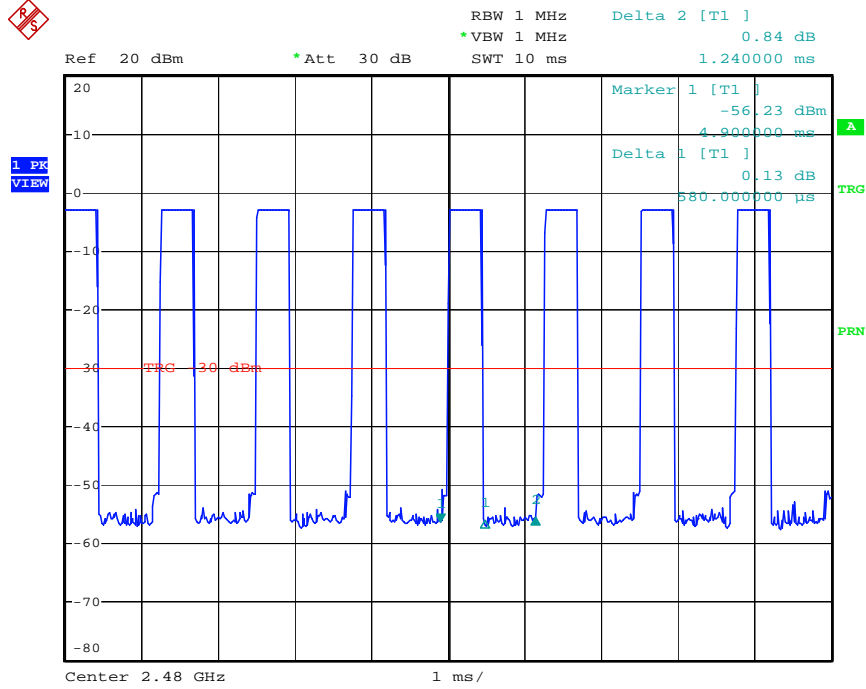

Date: 26.MAY.2005 16:25:55

5.5. Maximum Peak Output Power


5.5.1. Measuring Instruments

Item 19, 21 of the table on section 6.

5.5.2. Test Procedures

1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Repeated point 1 for the middle and highest channel of the EUT.

5.5.3. Test Setup Layout

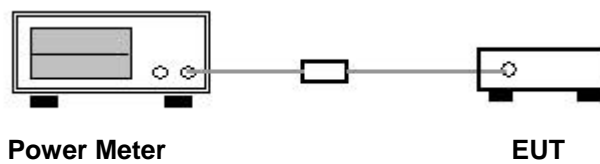

5.5.4. Test Result of Conducted Peak Power

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Eason Lu

Modulation Type	Channel	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
GFSK	00	2402 MHz	3.30	30
GFSK	39	2441 MHz	1.35	30
GFSK	78	2480 MHz	-0.70	30

The max output power : GFSK modulation is 3.30 dBm.



5.6. Test of Band Edges Emission

5.6.1. Measuring Instruments

Item 18 of the table on section 6.

5.6.2. Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

5.6.3. Test Result of Conducted Emission

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Eason Lu

Modulation Type	Test Channel	Freq. (MHz)	Level* (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Trace (PK/AV)
GFSK	00	2390.000	54.69	-19.31	74	PK
GFSK	00	2390.000	43.15	-10.85	54	AV
GFSK	78	2483.500	59.59	-14.41	74	PK
GFSK	78	2483.500	48.44	-5.56	54	AV


Level* : The max field strength in the restricted bands.

5.6.4. Test Result of Conducted Emission

Modulation Type	Test Channel	Freq. (MHz)	Level* (dBm)	Margin (dB)	Limit (dBm)
GFSK	00	2399.600	-46.92	-27.75	-19.17
GFSK	78	2542.800	-50.30	-27.70	-22.60




Modulation Type: GFSK (Channel 00) :

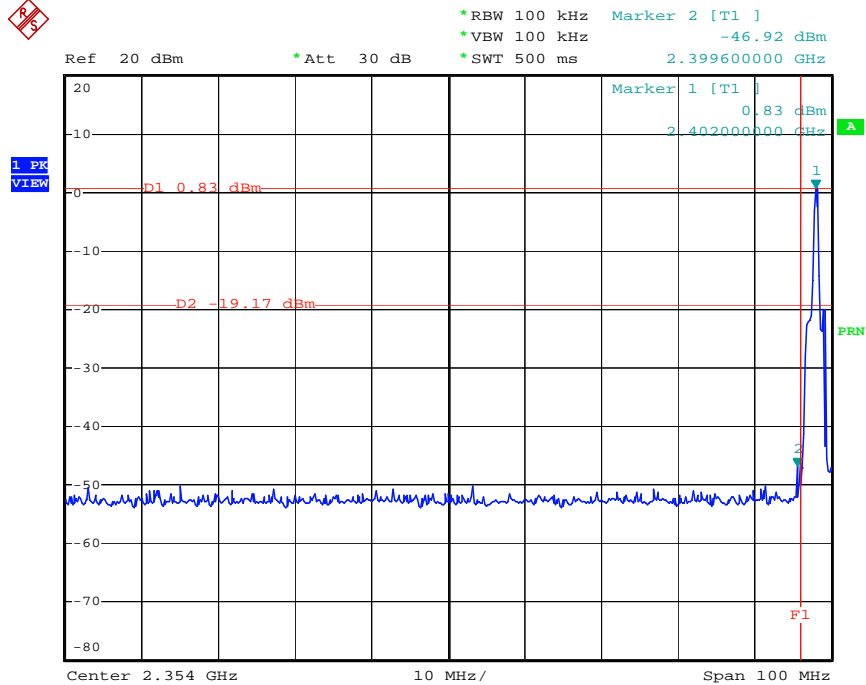

Date: 26.MAY.2005 16:15:53

Modulation Type: GFSK (Channel 78) :

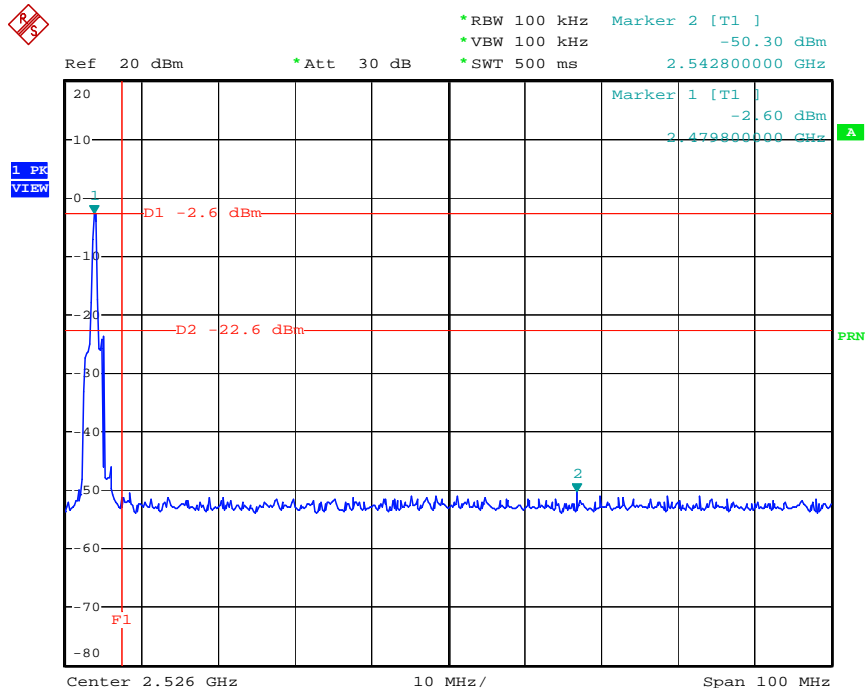

Date: 26.MAY.2005 16:14:50

5.7. Test of AC Power Line Conducted Emission


5.7.1. Measuring Instruments

Please reference item 1~5 in chapter 6 for the instruments used for testing.

5.7.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Bluetooth links with mobile phone, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for Bluetooth normal link.

5.7.3. Test Setup Layout

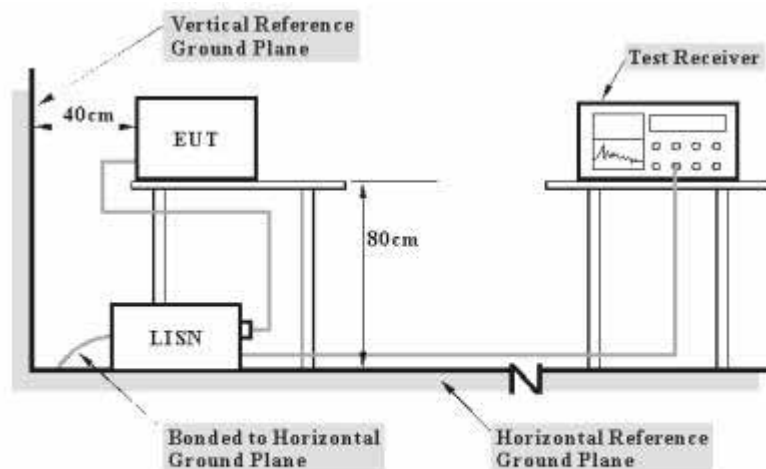


- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.



5.7.4. Test Result of Conducted Emission

- Temperature: 26°C
- Relative Humidity: 64%
- Test Engineer: Sky Wu


Line to Ground

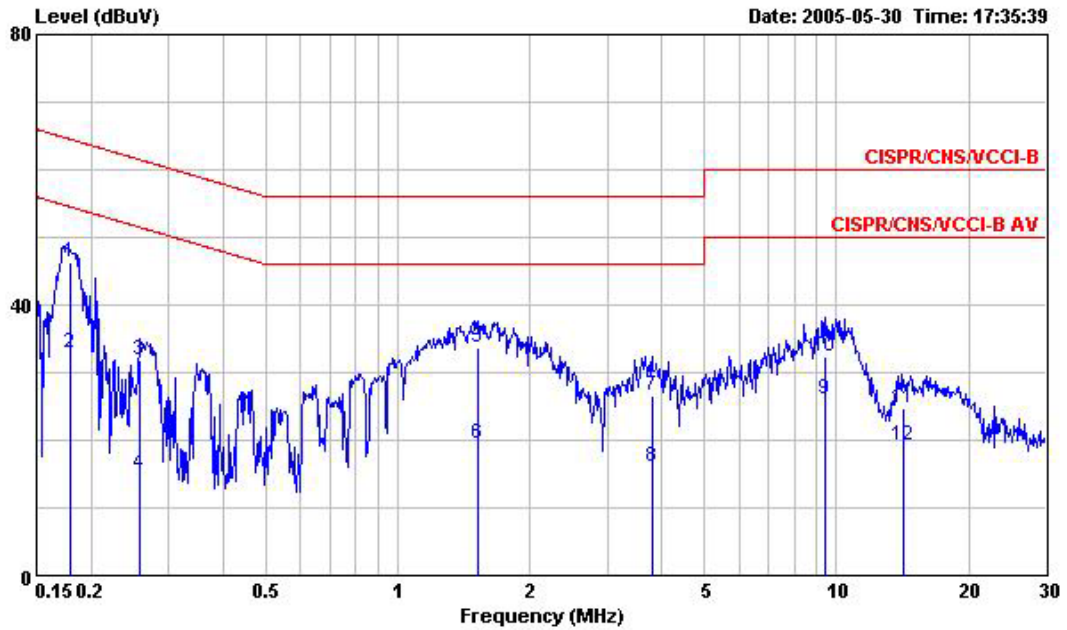

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1798330	46.21	-18.28	64.49	45.82	0.06	0.33	QP
2	0.1798330	32.91	-21.58	54.49	32.52	0.06	0.33	Average
3	0.2587910	31.86	-29.61	61.47	31.52	0.06	0.28	QP
4	0.2587910	14.97	-36.50	51.47	14.63	0.06	0.28	Average
5	1.521	33.64	-22.36	56.00	33.14	0.11	0.39	QP
6	1.521	19.43	-26.57	46.00	18.93	0.11	0.39	Average
7	3.799	26.64	-29.36	56.00	26.15	0.20	0.29	QP
8	3.799	16.09	-29.91	46.00	15.60	0.20	0.29	Average
9	9.451	26.16	-23.84	50.00	25.47	0.21	0.48	Average
10	9.451	32.44	-27.56	60.00	31.75	0.21	0.48	QP
11	14.141	24.77	-35.23	60.00	23.41	0.21	1.15	QP
12	14.141	19.25	-40.75	60.00	17.89	0.21	1.15	Average



Neutral to Ground

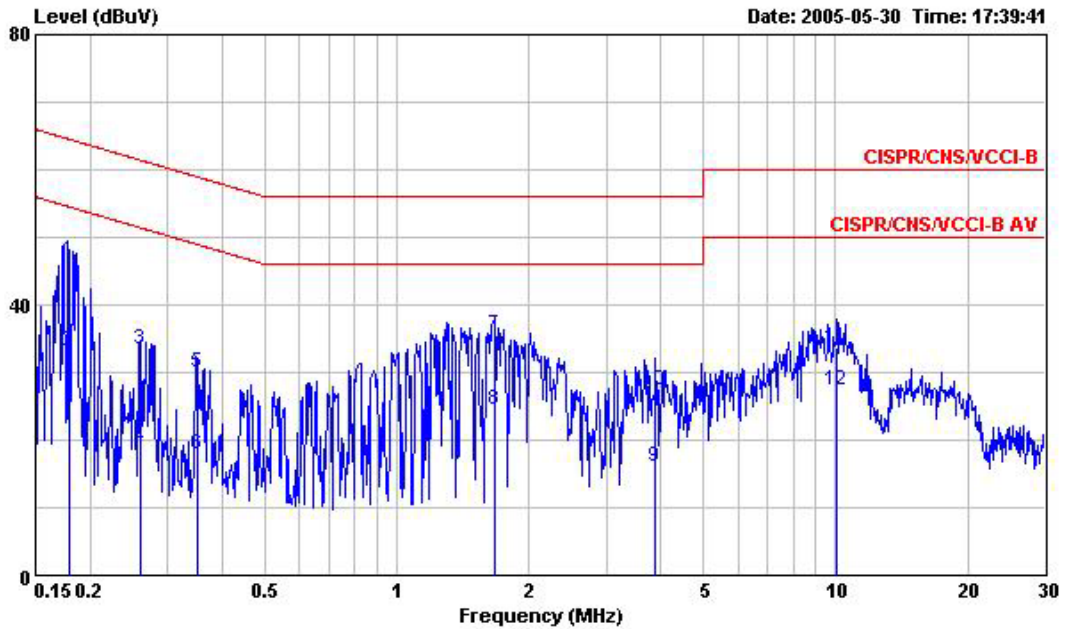

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1798190	46.54	-17.95	64.49	46.10	0.11	0.33	QP
2	0.1798190	33.11	-21.38	54.49	32.67	0.11	0.33	Average
3	0.2615350	33.43	-27.95	61.38	33.04	0.11	0.28	QP
4	0.2615350	19.01	-32.37	51.38	18.62	0.11	0.28	Average
5	0.3495810	29.99	-28.98	58.97	29.58	0.11	0.30	QP
6	0.3495810	17.79	-31.18	48.97	17.38	0.11	0.30	Average
7	1.669	35.56	-20.44	56.00	35.00	0.23	0.33	QP
8	1.669	24.57	-21.43	46.00	24.01	0.23	0.33	Average
9	3.881	16.14	-29.86	46.00	15.61	0.23	0.30	Average
10	3.881	27.42	-28.58	56.00	26.89	0.23	0.30	QP
11	10.071	33.74	-26.26	60.00	32.84	0.33	0.57	QP
12	10.071	27.46	-22.54	50.00	26.56	0.33	0.57	Average

5.7.5. Photographs of Conducted Emission Test Configuration

FRONT VIEW



REAR VIEW



5.8. Test of Spurious Radiated Emission


5.8.1. Measuring Instruments

Please reference item 6~17 in chapter 6 for the instruments used for testing.

5.8.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.8.3. Test Setup Layout

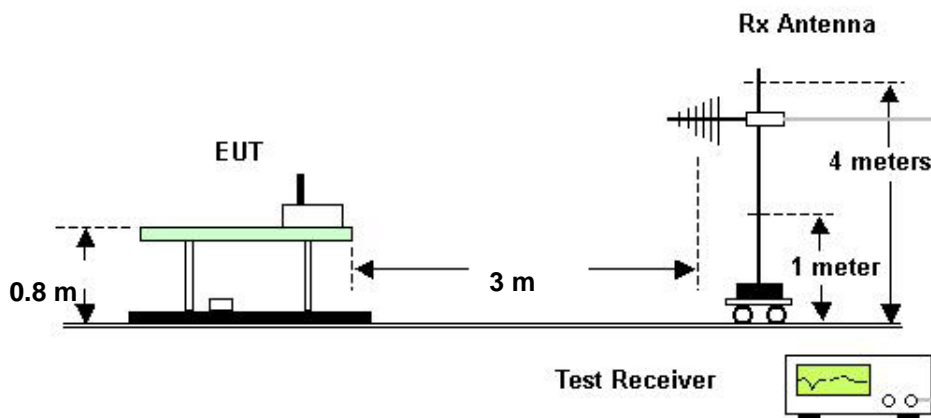





5.8.4. Test Results for CH 39 / 2441 MHz (for emission below 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Ted Chiou

(A) Polarization: Horizontal

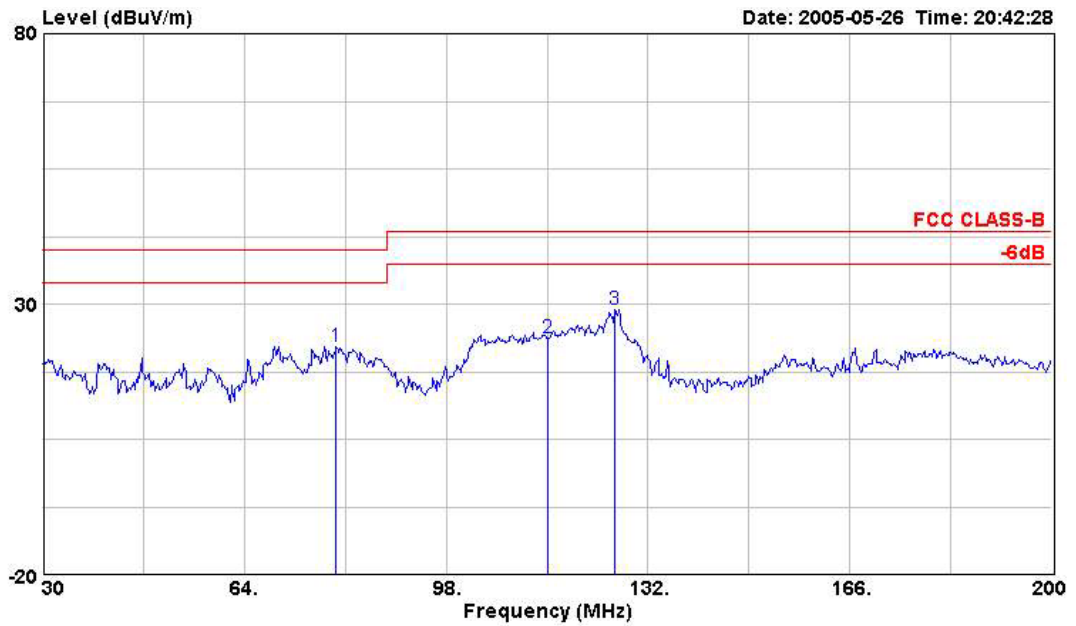


	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	79.470	22.18	-17.82	41.73	40.00	-19.55	0.87	29.94	Peak
2	115.000	23.69	-19.81	41.76	43.50	-18.07	1.06	30.29	Peak
3	126.390	29.02	-14.48	46.21	43.50	-17.19	1.12	30.54	Peak

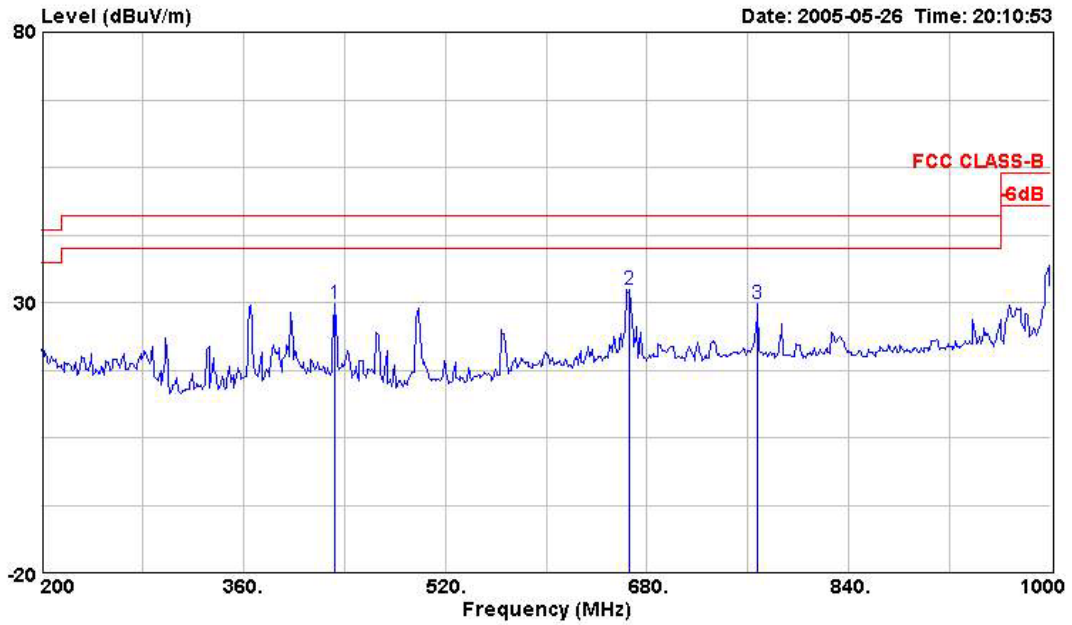


	Freq	Level	Over	Read	Limit	Line	Factor	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	dB	
1	432.000	29.69	-16.31	41.77	46.00	-12.08	2.04	30.66	Peak	
2	666.400	32.46	-13.54	39.89	46.00	-7.43	2.52	30.54	Peak	
3	768.000	29.73	-16.27	35.95	46.00	-6.22	2.79	30.53	Peak	



(B) Polarization: Vertical

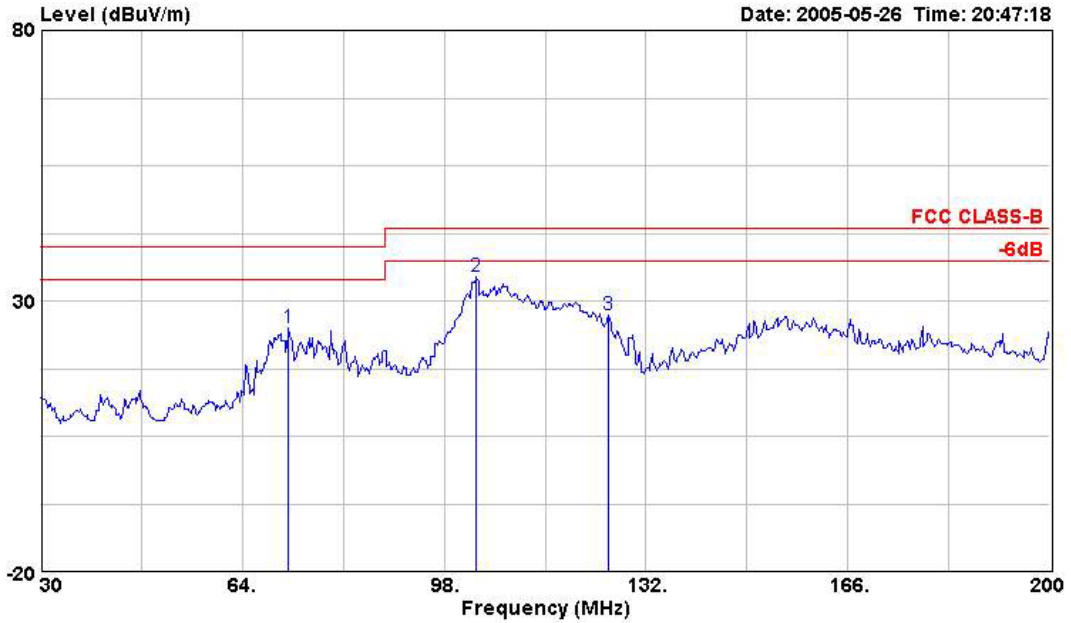

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	71.820	24.97	-15.03	44.69	40.00	-19.72	0.85	30.32 Peak
2	103.270	34.42	-9.08	54.53	43.50	-20.11	0.97	30.54 Peak
3	125.710	27.34	-16.16	44.51	43.50	-17.17	1.11	30.50 Peak

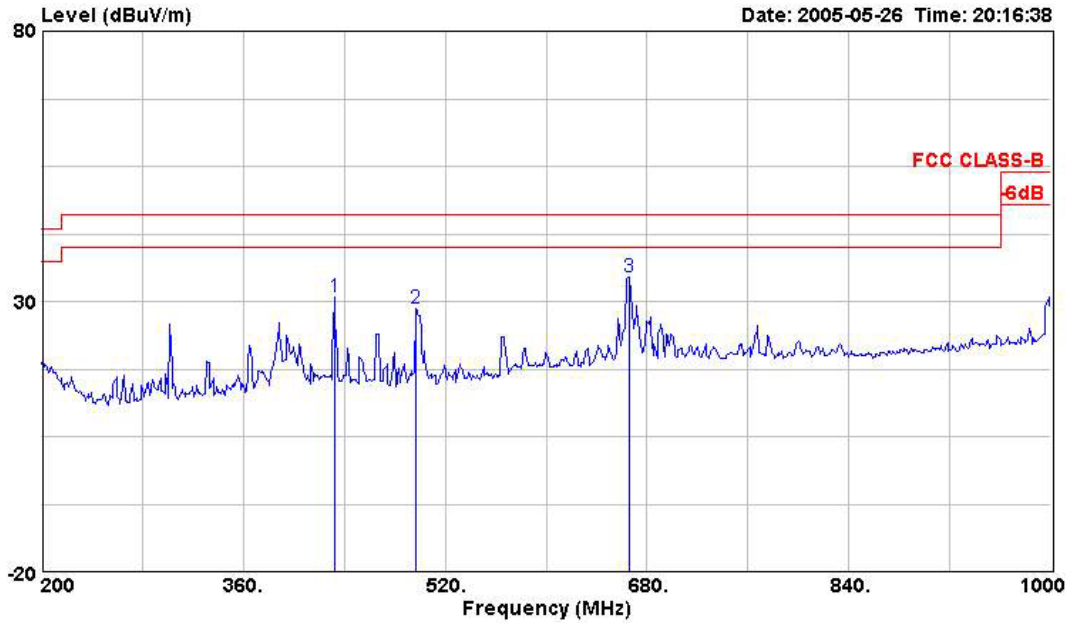

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	dBuV/m	Factor	Loss	Factor	Remark
			dB	dBuV		dB	dB	dB	
1	432.000	30.67	-15.33	42.75	46.00	-12.08	2.04	30.66	Peak
2	496.800	28.69	-17.31	41.27	46.00	-12.58	2.17	30.78	Peak
3	666.400	34.54	-11.46	41.97	46.00	-7.43	2.52	30.54	Peak

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.8.5. Test Results for CH 00 / 2402 MHz (for emission above 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Ted Chiou


(A) Polarization: Horizontal

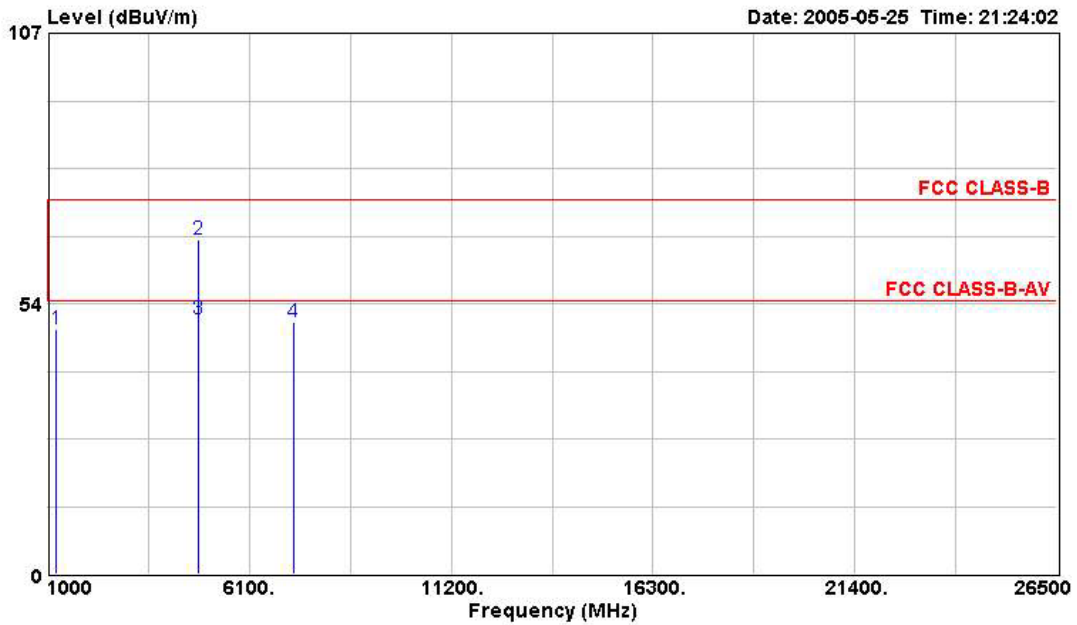

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	1198.000	48.43	-25.57	62.49	74.00	-14.06	1.32	40.09	Peak
2	4808.000	66.15	-7.85	72.01	74.00	-5.87	2.84	41.80	PEAK
3	4808.000	50.36	-3.64	56.23	54.00	-5.87	2.84	41.80	Average
4	7204.000	49.85	-24.15	52.57	74.00	-2.72	3.61	42.23	PEAK



(B) Polarization: Vertical

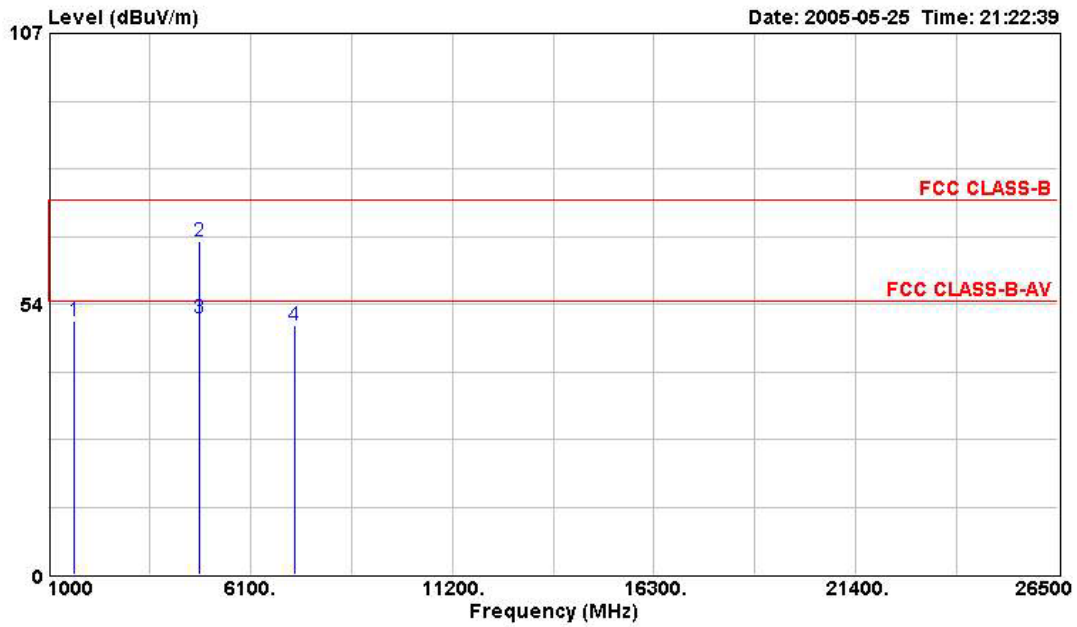

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	1662.000	50.08	-23.92	62.88	74.00	-12.80	1.54	40.38	Peak
2	4808.000	65.98	-8.02	71.85	74.00	-5.87	2.84	41.80	PEAK
3	4808.000	50.61	-3.39	56.48	54.00	-5.87	2.84	41.80	Average
4	7204.000	49.29	-24.71	52.01	74.00	-2.72	3.61	42.23	PEAK

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.8.6. Test Results for CH 39 / 2441 MHz (for emission above 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Ted Chiou


(A) Polarization: Horizontal

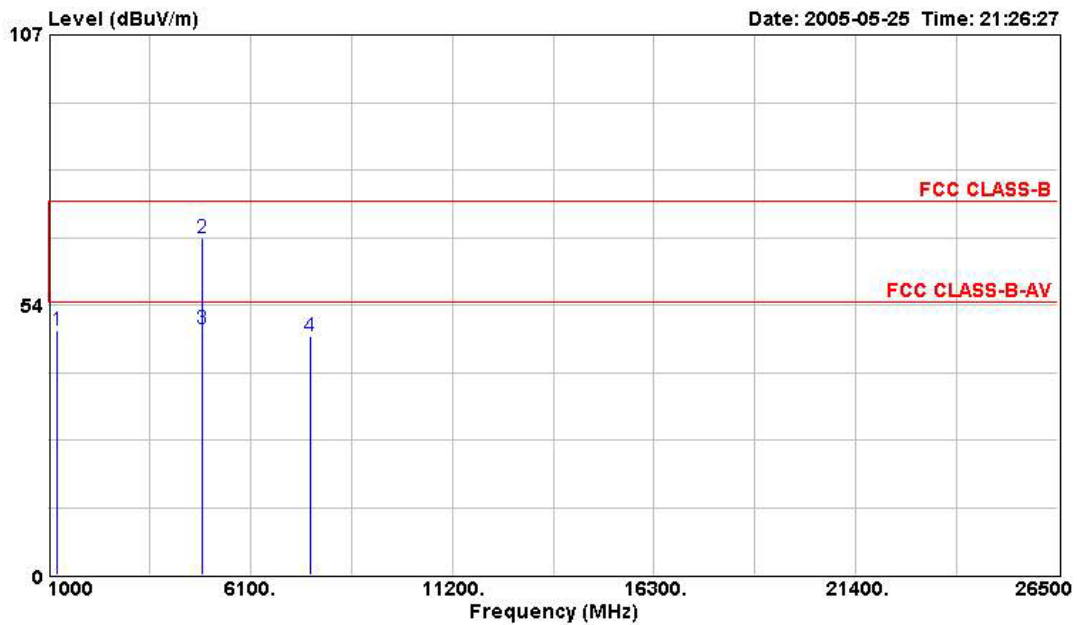

	Freq	Level	Over	Read	Limit		Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Factor	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	dB	
1	1220.000	48.36	-25.64	62.37	74.00	-14.01	1.33	40.10	Peak
2	4884.000	66.88	-7.12	72.60	74.00	-5.72	2.87	41.80	PEAK
3	4884.000	48.78	-5.22	54.50	54.00	-5.72	2.87	41.80	Average
4	7600.000	47.43	-26.57	48.80	74.00	-1.36	3.74	41.81	PEAK



(B) Polarization: Vertical

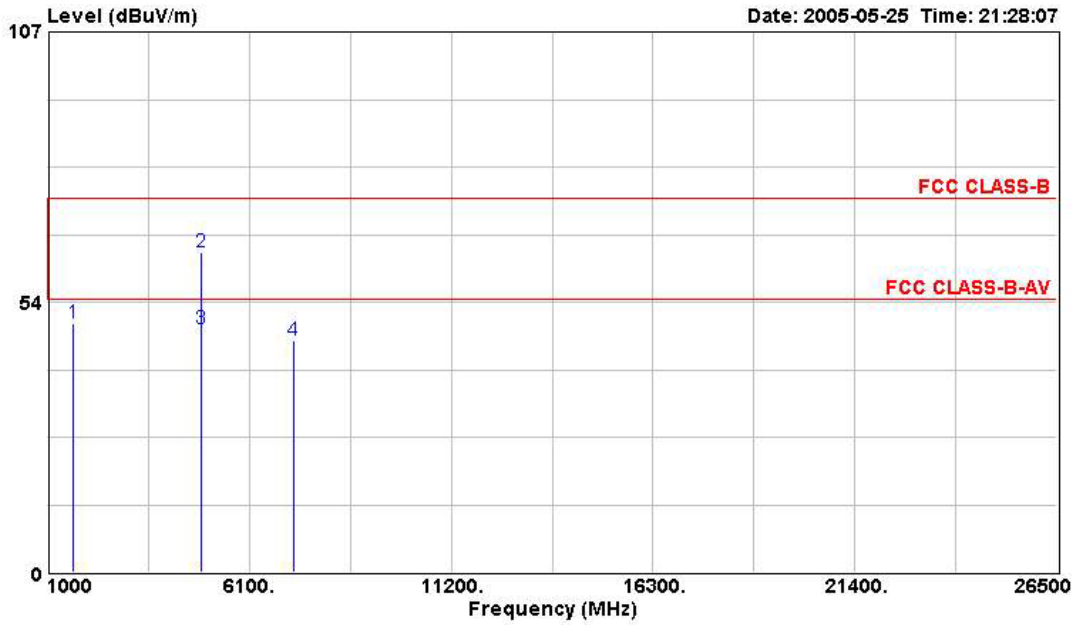

	Freq	Level	Over	Read	Limit	Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	
1	1662.000	49.26	-24.74	62.06	74.00	-12.80	1.54	40.38 Peak
2	4884.000	63.36	-10.64	69.08	74.00	-5.72	2.87	41.80 PEAK
3	4884.000	48.19	-5.81	53.91	54.00	-5.72	2.87	41.80 Average
4	7216.000	45.94	-28.06	48.60	74.00	-2.66	3.61	42.20 PEAK

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.8.7. Test Results for CH 78 / 2480 MHz (for emission above 1GHz)

- Modulation Type: GFSK
- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 46.77%
- Test Engineer: Ted Chiou


(A) Polarization: Horizontal

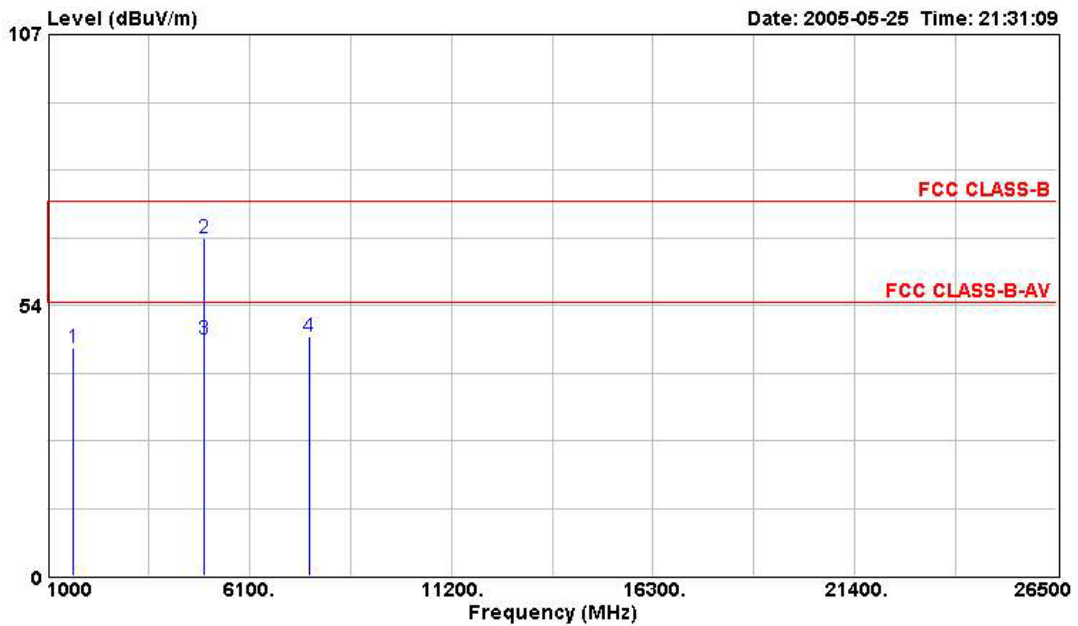

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	1660.000	44.97	-29.03	57.77	74.00	-12.80	1.54	40.38 Peak
2	4964.000	66.75	-7.25	72.30	74.00	-5.55	2.91	41.80 PEAK
3	4964.000	46.83	-7.17	52.38	54.00	-5.55	2.91	41.80 Average
4	7608.000	47.24	-26.76	48.58	74.00	-1.33	3.76	41.81 PEAK



(B) Polarization: Vertical

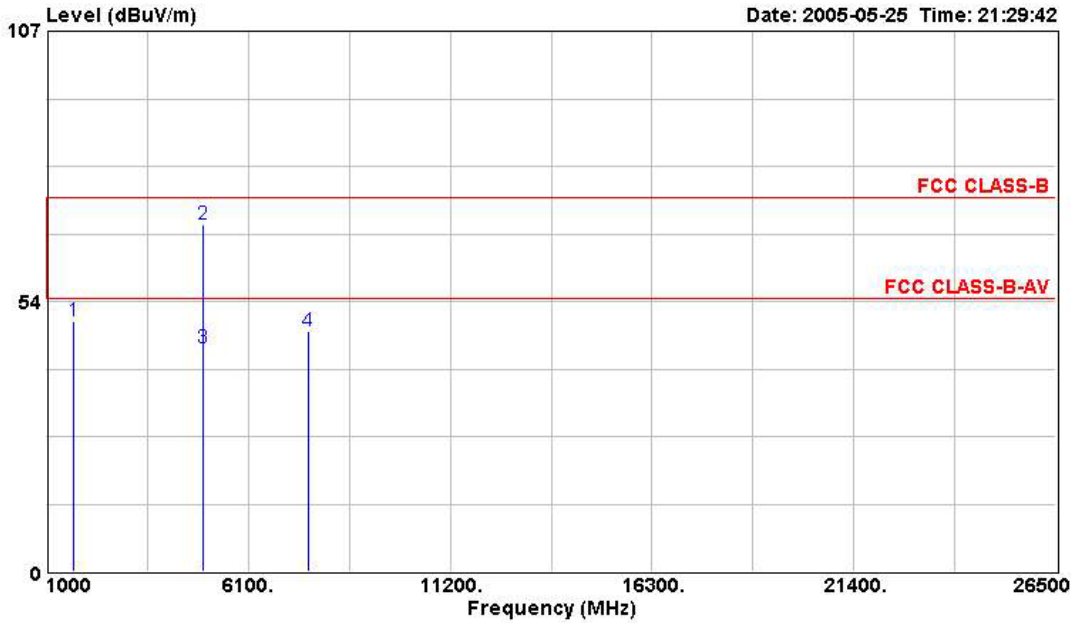

	Freq	Level	Over	Read	Limit	Cable	Preamp	
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Remark
			dB	dBuV	dBuV/m	dB	dB	
1	1668.000	49.48	-24.52	62.28	74.00	-12.80	1.54	40.38 Peak
2	4960.000	68.85	-5.15	74.40	74.00	-5.55	2.91	41.80 PEAK
3	4960.000	44.35	-9.65	49.90	54.00	-5.55	2.91	41.80 Average
4	7620.000	47.63	-26.37	48.93	74.00	-1.30	3.76	41.77 PEAK

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.8.8. Photographs of Radiated Emission Test Configuration

FRONT VIEW



REAR VIEW

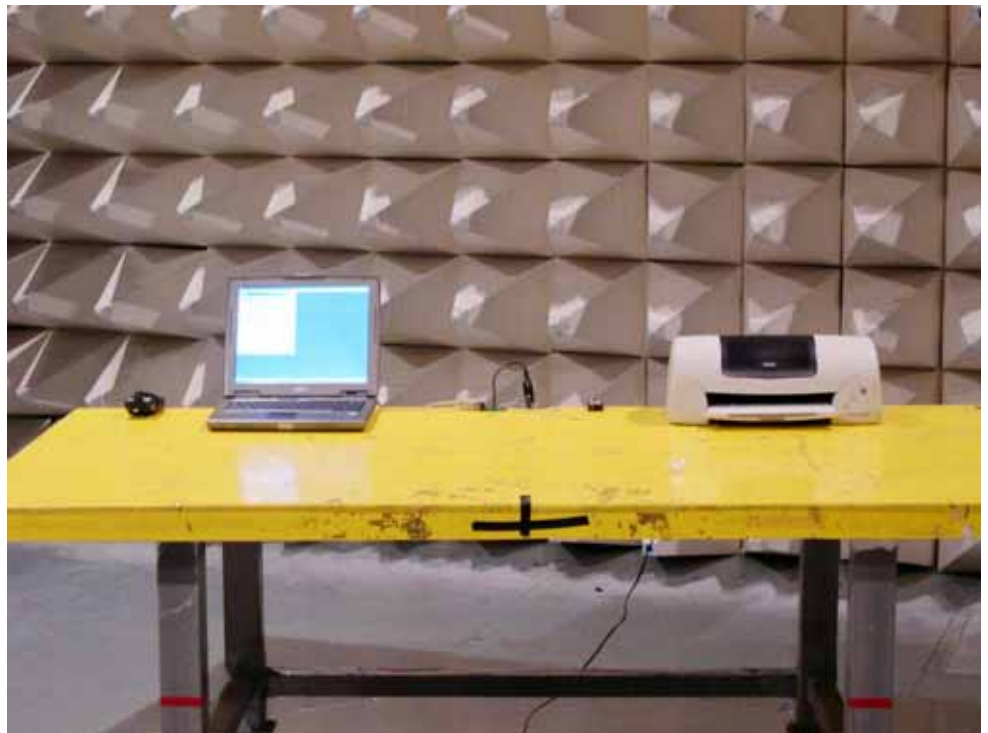



5.9. Antenna Requirements

5.9.1. Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.9.2. Antenna Connected Construction

There is no antenna connector for PIFA antenna.



6 List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 19, 2005	Conduction (CO04-HY)
2	LISN	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 15, 2005	Conduction (CO04-HY)
3	LISN (Support Unit)	PIC	NNB-2/16Z	2001/008	9kHz – 30MHz	May 06, 2005	Conduction (CO04-HY)
4	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
5	RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 23, 2004	Conduction (CO04-HY)
6	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
7	Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
8	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 10, 2004	Radiation (03CH03-HY)
9	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
10	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
11	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 02, 2004	Radiation (03CH03-HY)
12	Horn Antenna	COMPOWER	AH-118	10092	1GHz – 18GHz	Feb. 18, 2005	Radiation (03CH03-HY)
13	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
14	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
15	Horn Antenna	Schwarzbeck	BBHA9170	154	18GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
16	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 04, 2004	Radiation (03CH03-HY)

Calibration Interval of instruments listed above is one year.



Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
18	Spectrum Analyzer	R&S	FSP30	100023	9kHz – 30GHz	Aug. 02, 2004	Conducted (TH01-HY)
19	Power Meter	R&S	NRVS	100444	DC – 40GHz	Jun. 15, 2004	Conducted (TH01-HY)
20	Power Sensor	R&S	NRV-Z55	100049	DC – 40GHz	Jun. 15, 2004	Conducted (TH01-HY)
21	Power Sensor	R&S	NRV-Z32	100057	30MHz – 6GHz	Jun. 15, 2004	Conducted (TH01-HY)
22	AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 – 300V	Jun. 16, 2004	Conducted (TH01-HY)
23	DC Power Source	G.W.	GPC-6030D	C671845	DC 1V – 60V	Dec.. 28, 2004	Conducted (TH01-HY)
24	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2004	Conducted (TH01-HY)
25	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz – 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
26	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz – 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
27	Data Generator	Tektronix	J310345	J310345	400Mbps	Dec. 21, 2004	Conducted (TH01-HY)
28	OscilloScope	Tektronix	TDS1012	C038520	100MHz-1Gs/s	Jan. 02, 2005	Conducted (TH01-HY)

Calibration Interval of instruments listed above is one year.