




Nemko Test Report: 6L0177RUS1

Applicant: Allflex-Boulder
2820 Wilderness Place, Suite A
Boulder, CO 80301
USA

**Equipment Under Test:
(E.U.T.)** RS250

In Accordance With: **FCC Part 15, Subpart C, Paragraph 15.209**
General Limits For Low Power Transmitters

Tested By: Nemko USA Inc.
802 N. Kealy
Lewisville, TX 75057
USA

Authorized By: 
Abe Cox, Key Account Manager

Date: July 14, 2006

EQUIPMENT: RS250

Table Of Contents

Section 1. Summary Of Test Results 3

Section 2 General Equipment Specification 5

Section 3. Powerline Conducted Emissions 7

Section 4. Radiated Emissions..... 10

Section 5. Occupied Bandwidth 13

Section 6. Test Equipment List..... 15

ANNEX A TEST DIAGRAMS 16

EQUIPMENT: RS250

Section 1. Summary Of Test Results

Manufacturer: Allflex

Model No.: RS250

Serial No.: 206233998

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart C for low power devices. All tests were conducted using measurement procedure ANSI C63.4-2003. Radiated Emissions were made on an open area test site.

- | | | | |
|-------------------------------------|----------------------------|-------------------------------------|---------------------|
| <input checked="" type="checkbox"/> | New Submission | <input checked="" type="checkbox"/> | Production Unit |
| <input type="checkbox"/> | Class II Permissive Change | <input type="checkbox"/> | Pre-Production Unit |

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP LAB CODE: 100426-0

Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: RS250

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207	Complies
Radiated Emissions	15.209	Complies
Occupied Bandwidth	Not Specified	NA

EQUIPMENT: RS250

Section 2. General Equipment Specification

Frequency Range: 134.2 Fixed
Operating Frequency(ies) of Sample: 134.2 kHz
20 dB Bandwidth 3.84 kHz



Integral Antenna	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
-------------------------	---	---------------------------------------

EQUIPMENT: RS250

Description of DUT

Hand held RFID reader

System Diagram

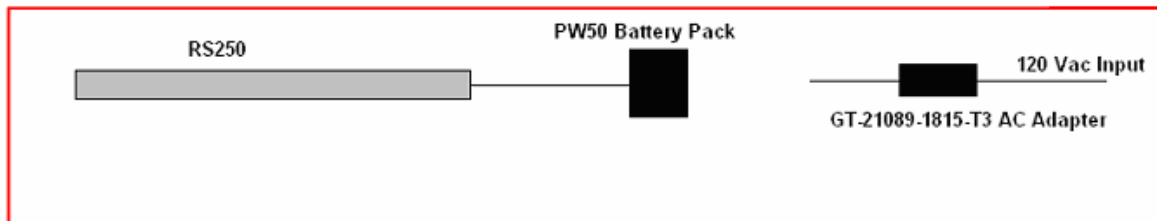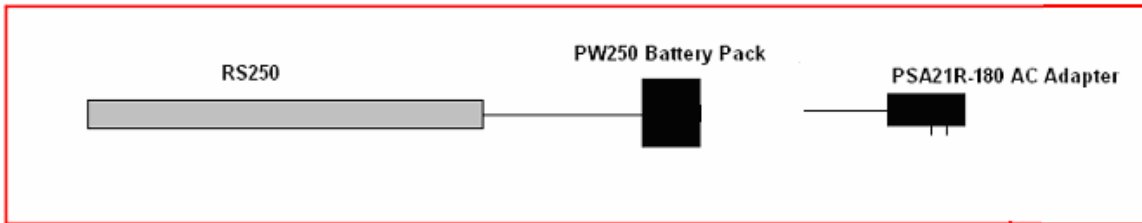

Note: The EUT is battery powered. The AC adapter is for battery charging only.

EQUIPMENT: RS250

Section 3. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207
TESTED BY: Brian Boyea	DATE: 20 June 2006

Test Results: Complies. The worst-case emission level is 62.8 dBμV at 0.150 MHz on the hot side of the line. This is 3.2 dB below the quasi-peak specification limit of 66 dBμV.

Minimum Standard: §15.207 Conducted limits.

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 mH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Conducted Emission (MHz)	Limit (dBmV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Measurement Data: See attached graph(s).

Method of Measurement: (Procedure ANSI C63.4-2003)

Measurements were made using a spectrum analyzer with 10 kHz RBW, Peak Detector. Any emissions that are close to the limit are measured using a test receiver with 9 kHz bandwidth, CISPR Quasi-Peak Detector.

EQUIPMENT: RS250

Test Data – Powerline Conducted Emissions

Conducted Emissions													
Powerline Voltage Measurement													
Complete	<u> X </u>		Job # : <u>6L0177E</u>					Test # : <u>CEPV-01</u>					
Preliminary	<u> </u>		Page <u> 1 </u>					of <u> 1 </u>					
Client Name :	<u>Allflex</u>												
EUT Name :	<u>RF/ID Stick Reader</u>												
EUT Model # :	<u>RS250</u>												
EUT Part # :	<u>930031-001A3</u>												
EUT Serial # :	<u>206233998</u>												
EUT Config. :	<u>Turned On Scanning</u>												
Specification :	<u>EN 55022: 1998</u>						Reference :						
Transducer # :	<u> 969 </u>	Temp. (deg. C) :	<u> 23 </u>					Date : <u>06/20/06</u>					
HP Filter # :	<u> 1555 </u>	Humidity (%) :	<u> 49 </u>					Time : <u>12:30 P.M.</u>					
Cable 1 # :	<u> 1194 </u>	EUT Voltage :	<u>120 Vac</u>					Staff : <u>Brian Boyea</u>					
Cable 2 # :	<u> 1116 </u>	EUT Frequency :	<u> 60 Hz </u>					Location : <u>Lab 3</u>					
Detector 1 # :	<u> 1284 </u>	Peak Bandwidth:	<u>10kHz</u>					Photo ID: <u>6L0177E CEPV-01</u>					
Detector 2 # :	<u> 966 </u>	QP Bandwidth	<u> 9kHz </u>										
Limiter # :	<u> </u>	Avg. Bandwidth	<u> 9kHz </u>										

Meas. Freq. (MHz)	EUT Test Point	Detector Type (P,QP, A)	Limit Type (QP, A)	Meter Reading (dBuV)	Path Loss (dB)	Transducer Factor (dB)	Corrected Reading (dBuV)	Spec.limit (dBuV)		CR/SL Diff. (dB)	Pass Fail Unc.	Comment
								Q.P.	Avg.			
0.199	H	QP	QP	45.6	0	0	45.7	63.65	53.652	-18.0	Pass	
0.199	H	A	A	37.7	0	0	37.8	63.65	53.652	-15.9	Pass	
0.393	H	QP	QP	39.5	0	0	39.5	58	48	-18.5	Pass	
0.393	H	A	A	39.3	0	0	39.3	58	48	-8.7	Pass	
0.583	H	QP	QP	35.0	0	0	35.0	56	46	-21.0	Pass	
0.583	H	A	A	34.4	0	0	34.4	56	46	-11.6	Pass	
0.778	H	QP	QP	33.0	0	0	33.0	56	46	-23.0	Pass	
0.778	H	A	A	32.5	0	0	32.5	56	46	-13.5	Pass	
0.778	N	QP	QP	30.0	0	0	30.0	56	46	-26.0	Pass	
0.778	N	A	A	29.0	0	0	29.0	56	46	-17.0	Pass	
0.393	N	QP	QP	36.2	0	0	36.2	58	48	-21.8	Pass	
0.393	N	A	A	36.5	0	0	36.5	58	48	-11.5	Pass	
0.199	N	QP	QP	46.3	0	0	46.3	63.65	53.652	-17.4	Pass	
0.199	N	A	A	42.0	0	0	42.0	63.65	53.652	-11.7	Pass	
												50 PW
0.204	N	QP	QP	55.0	0	0	55.1	63.45	53.446	-8.3	Pass	
0.204	N	A	A	51.5	0	0	51.6	63.45	53.446	-1.8	Pass	
1.32	N	QP	QP	39.5	0	0	39.5	56	46	-16.5	Pass	
1.32	N	A	A	27.1	0	0	27.1	56	46	-18.9	Pass	
1.32	H	QP	QP	39.7	0	0	39.7	56	46	-16.3	Pass	
1.32	H	A	A	27.4	0	0	27.4	56	46	-18.6	Pass	
0.204	H	QP	QP	55.0	0	0	55.1	63.45	53.446	-8.3	Pass	
0.204	H	A	A	52.0	0	0	52.1	63.45	53.446	-1.3	Unc.	
												250 PW

..\EMCShare\AUTOMATE\DATASHTS\CEPV_Voltage Rev C.xls Document Control #EMC DS EM COND VOLT

EQUIPMENT: RS250

Powerline Conducted Photographs



EQUIPMENT: RS250

Section 4. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.209
TESTED BY: David Light	DATE: 20 June 2006

Minimum Standard: The field strength of emissions from the device shall not exceed the following limits.

Fundamental (MHz)	Field Strength (µV/m)	Field Strength (dBµV)
0.009 - 0.490	2400/F(kHz) @ 300m	—
0.490 - 1.705	24000/F(kHz) @ 30m	—
1.705 - 30	30 @ 30m	—
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

Test Results: Complies.

Measurement Data: (Procedure ANSI C63.4-2003)

Maximizing Emission Levels:

For hand held equipment or equipment that may be mounted in a variety of positions, the E.U.T. was tested on three orthogonal axis to determine orientation of worst-case emission levels. Below 30 MHz an active loop antenna is used at a fixed height of 1 meter. The loop is rotated about it's vertical axis to obtain worst-case results.

Spectrum Searched:

The spectrum was searched from the lowest frequency generated in the E.U.T. up to 1000 MHz, or the 10th harmonic of the fundamental emission.

Near-Field Measurement:

Emissions below 30 MHz are measured in the near-field and an extrapolation factor of 40 dB per decade is used to determine the 10m limit.

Example: Measurement Distance = 10m
 Specification Distance = 300m

10m Limit: Specified limit (at 300m) - $(40 \text{ Log } \frac{10}{300})$

Thus for measurement at 10m the specified limit is increased by 59 dB.

EQUIPMENT: RS250

Test Data - Radiated Emissions

Radiated Emissions Data											
Complete	<u> X </u>		Job # : <u>6L0178</u>				Test # : <u>REHE-01</u>				
Preliminary	<u> </u>		Page <u> 1 </u>				of <u> 1 </u>				
EUT Model # :	<u>RS250</u>										
EUT Part # :	<u>930031-001A3</u>										
EUT Serial # :	<u>206233998</u>										
EUT Config. :	<u>Tx w/ pW250 and PW50 Battery Packs</u>										
Specification :	<u>15.209</u>					Reference :					
Loop Ant. # :	<u>1140</u>	Temp. (deg. C) :	<u>22</u>		Date :	<u>06/20/06</u>					
Bicon Ant.#:	<u> </u>	Humidity (%) :	<u>40</u>		Time :	<u>9:00</u>					
Log Ant.#:	<u> </u>				Staff :	<u>D. Light</u>					
Bilog Ant.#:	<u> </u>				Photo ID:	<u>NA</u>					
Dipole Ant.#:	<u> </u>				Peak Bandwidth:	<u>10 kHz</u>					
Cable#:	<u>2074</u>	Distance:	<u>3 m</u>		Video Bandwidth	<u>10 kHz</u>					
Preamp#:	<u> </u>										
Limiter#:	<u>na</u>										
Atten #:	<u>na</u>										
Detector#:	<u>1659</u>										

Meas. Freq. (kHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	QP readings Comment
134.2	Loop	0	60.6	3.6	1.0	0.0	65.2	105.0	-39.8	Pass	PW250 Carrier
402.6	Loop	0	29.5	-4.2	1.0	0.0	26.3	95.5	-69.2	Pass	
536.8	Loop	0	28.7	-6.1	1.0	0.0	23.6	73.0	-49.4	Pass	
							0.0				PW50
134.2	Loop	0	63.1	3.6	1.0	0.0	67.7	105.0	-37.3	Pass	Carrier
402.6	Loop	0	31.6	-4.2	1.0	0.0	28.4	95.5	-67.1	Pass	
536.8	Loop	0	27	-6.1	1.0	0.0	21.9	73.0	-51.1	Pass	

Searched spectrum 9 kHz to 1.5 MHz (10th Harmonic) - No emissions were detected within 20 dB of specification.

The input power was varied +/- 15% with no effect on output power.

The device was tested with fresh batteries.

The device was tested on three orthogonal axis'.

EQUIPMENT: RS250

Radiated Photographs



PW250



PW50

EQUIPMENT: RS250

Section 5. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: N/A
TESTED BY: David Light	DATE: 20 June 2006

Minimum Standard: Not specified.

Test Results: The 99% power occupied bandwidth is 3.84 kHz.

Measurement Data: See attached graph(s).


Method of Measurement:

A spectrum analyzer was used to measure the 99% power occupied bandwidth of the fundamental emission. This value is used as the bandwidth for the emission designator.

EQUIPMENT: RS250



1 PK
MAXH

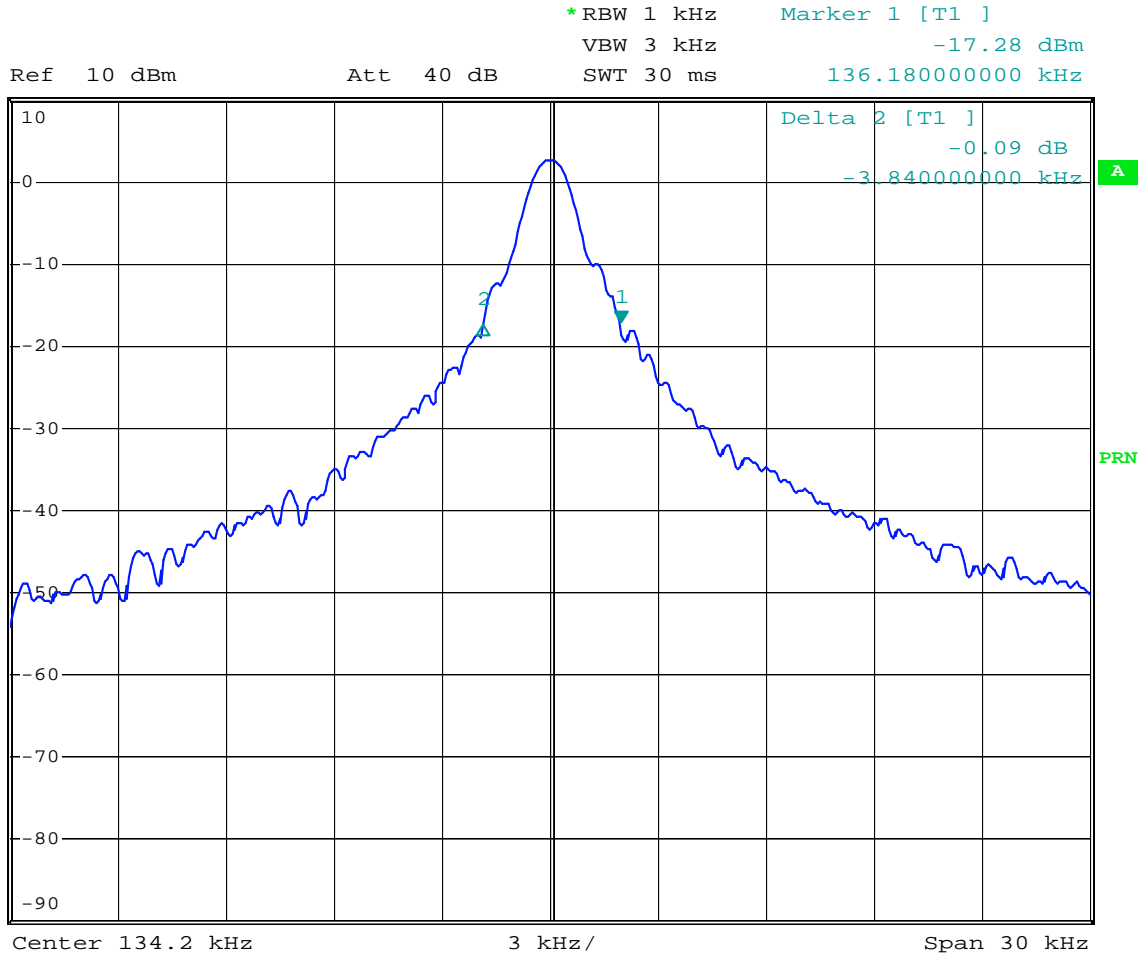

Date: 20.JUN.2006 15:00:54

*EQUIPMENT: RS250***Section 6. Test Equipment List**


Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1659	Spectrum Analyzer	Rhode & Schwarz FSP	973353	01/10/06	01/10/07
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	05/26/06	05/26/08
1140	ACTIVE LOOP ANTENNA	A.H. SYSTEMS SAS-200/562B	213	03/09/06	03/09/08
2074	Cable	Nemko USA, Inc. None	None	08/10/05	08/10/06
969	lisn	Schwarzbeck NNLA 8120	8120281	02/02/06	02/02/07
1555	Filter high pass 5KHz	Solar Electronics 7930-5.0	933125	04/20/06	04/20/07
1194	CABLE, 7m	Nemko USA, Inc. RG214	N/A	03/09/06	03/09/07
1116	CABLE, 1.8m	Nemko USA, Inc. RG223	N/A	04/20/06	04/20/07
1284	Spectrum analyzer display	Hewlett Packard 8566B	1811A00223	02/16/06	02/16/07
966	Receiver	Rohde & Schwartz ESH2	880370/029	02/15/06	02/15/07

EQUIPMENT: RS250


ANNEX A
TEST DIAGRAMS

EQUIPMENT: RS250

Conducted Emissions

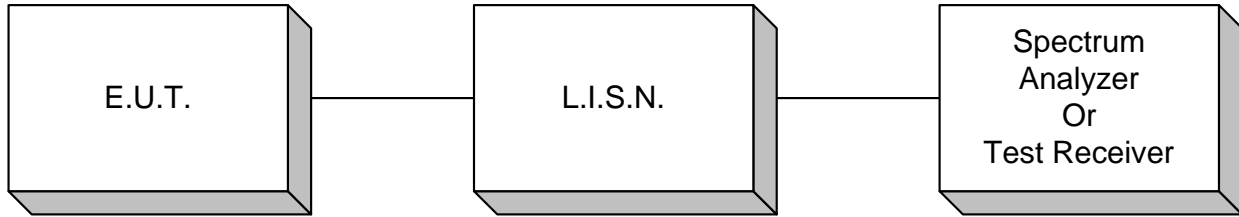

Radiated Prescan

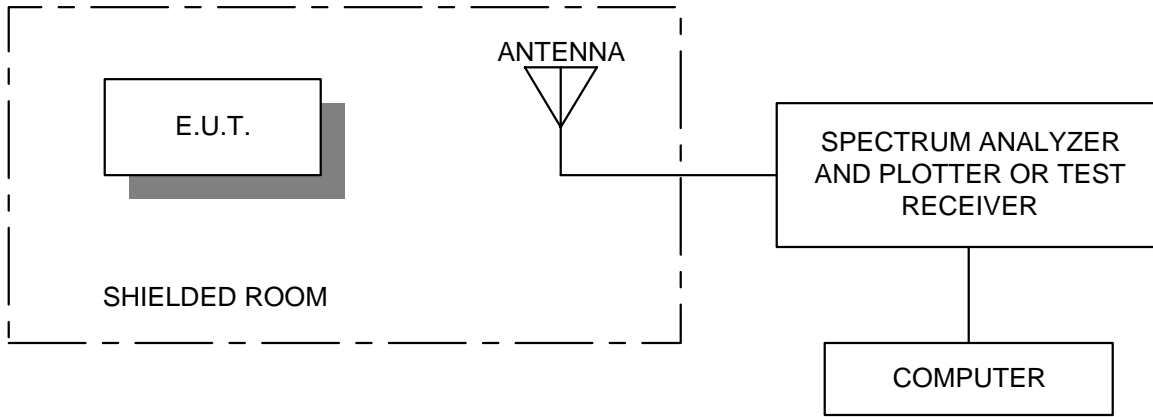

Test Site For Radiated Emissions

