


ENGINEERING TEST REPORT



2400 MHz OEM Frequency Hopping / DTS Module Model No.: MHX2421

FCC ID: NS907P23

Applicant:

**Microhard Systems Inc.
#17, 2135 - 32nd Avenue N.E.
Calgary, Alberta
Canada T2E 6Z3**

In Accordance With

**Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.247
Frequency Hopping Spread Spectrum (FHSS) / Digital Modulation Systems (DTS)
Operating in 2400–2483.5 MHz Band**

UltraTech's File No.: MCRS-013F15C247

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs



Date: August 22, 2007

Report Prepared by: Dan Huynh

Tested by: Mr. Hung Trinh, EMI/RFI Technician

Issued Date: August 22, 2007

Test Dates: July 26-31, August 1, 2, 10 & 22, 2007

*The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



0685



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R

TABLE OF CONTENTS

EXHIBIT 1.	SUBMITTAL CHECK LIST	1
EXHIBIT 2.	INTRODUCTION.....	2
2.1.	SCOPE	2
2.2.	RELATED SUBMITTAL(S)/GRANT(S).....	2
2.3.	NORMATIVE REFERENCES	2
EXHIBIT 3.	PERFORMANCE ASSESSMENT	3
3.1.	CLIENT INFORMATION	3
3.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION.....	3
3.3.	EUT'S TECHNICAL SPECIFICATIONS.....	4
3.4.	ASSOCIATED ANTENNA DESCRIPTIONS	4
3.5.	LIST OF EUT'S PORTS.....	5
3.6.	ANCILLARY EQUIPMENT	5
EXHIBIT 4.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	6
4.1.	CLIMATE TEST CONDITIONS	6
4.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	6
EXHIBIT 5.	SUMMARY OF TEST RESULTS.....	7
5.1.	LOCATION OF TESTS.....	7
5.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	7
5.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	7
EXHIBIT 6.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	8
6.1.	TEST PROCEDURES	8
6.2.	MEASUREMENT UNCERTAINTIES	8
6.3.	MEASUREMENT EQUIPMENT USED	8
6.4.	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER.....	8
6.5.	COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS	9
6.6.	POWER LINE CONDUCTED EMISSIONS [§15.207(a)].....	11
6.7.	PROVISIONS FOR FREQUENCY HOPPING SYSTEMS [§ 15.247(a)(1)].....	14
6.8.	6 dB BANDWIDTH [§ 15.247(a)(2)]	38
6.9.	PEAK CONDUCTED OUTPUT POWER - FHSS [§ 15.247(b)(2)]	51
6.10.	PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)]	53
6.11.	TRANSMITTER BAND-EDGE & SPURIOUS CONDUCTED EMISSIONS [§ 15.247(d)]	55
6.12.	TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205].....	80
6.13.	POWER SPECTRAL DENSITY [§ 15.247(e)]	192
6.14.	RF EXPOSURE REQUIRMENTS [§§ 15.247(i), 1.1310 & 2.1091]	206
EXHIBIT 7.	MEASUREMENT UNCERTAINTY.....	209
7.1.	LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY.....	209
7.2.	RADIATED EMISSION MEASUREMENT UNCERTAINTY	210

EXHIBIT 1. SUBMITTAL CHECK LIST

Annex No.	Exhibit Type	Description of Contents	Quality Check (OK)
--	Test Report	<ul style="list-style-type: none"> ▪ Exhibit 1: Submittal check lists ▪ Exhibit 2: Introduction ▪ Exhibit 3: Performance Assessment ▪ Exhibit 4: EUT Operation and Configuration during Tests ▪ Exhibit 5: Summary of test Results ▪ Exhibit 6: Measurement Data ▪ Exhibit 7: Measurement Uncertainty 	OK
1	Test Setup Photos	<ul style="list-style-type: none"> ▪ AC Conducted Emissions Setup Photos ▪ Radiated Emissions Setup Photos 	OK
2	External EUT Photos	External EUT Photos	OK
3	Internal EUT Photos	Internal EUT Photos	OK
4	Cover Letters	<ul style="list-style-type: none"> ▪ Letter from Ultratech for Certification Request ▪ Letter from the Applicant to appoint Ultratech to act as an agent ▪ Letter from the Applicant to request for Confidentiality Filing ▪ Microhard Systems Inc. Modular Request 	OK
5	Attestation Statements	--	--
6	ID Label/Location Info	<ul style="list-style-type: none"> ▪ ID Label ▪ Location of ID Label 	OK
7	Block Diagrams	Block Diagram	OK
8	Schematic Diagrams	Schematics	OK
9	Parts List/Tune Up Info	Parts List	OK
10	Operational Description	Operation Description	OK
11	RF Exposure Info	MPE Evaluation, see section 6.14 in this Test Report for details.	OK
12	Users Manual	MHX2421, 2400 MHz Spread Spectrum OEM Transceiver Operating Manual	OK

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
 August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. INTRODUCTION

2.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.247
Title:	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15
Purpose of Test:	To gain FCC Equipment Authorization for Frequency Hopping Spread Spectrum (FHSS) / Digital Modulation Systems (DTS) Transceiver Operating in the Frequency Band 2400–2483.5 MHz.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	<input checked="" type="checkbox"/> Commercial, industrial or business environment <input checked="" type="checkbox"/> Residential environment

2.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

2.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2006	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	2006 2006	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1-1	2003	Specification for Radio Disturbance and Immunity measuring apparatus and methods
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
FCC Public Notice DA 00-1407	2000	Part 15 Unlicensed Modular Transmitter Approval
FCC ET Docket No. 99-231	2002	Amendment to FCC Part 15 of the Commission's Rules Regarding to Spread Spectrum Devices
KDB Publication No. 558074	2005	Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

EXHIBIT 3. PERFORMANCE ASSESSMENT

3.1. CLIENT INFORMATION

APPLICANT	
Name:	Microhard Systems Inc.
Address:	#17, 2135 - 32nd Avenue N.E. Calgary, Alberta Canada T2E 6Z3
Contact Person:	Mr. Hany Shenouda Phone #: 403 248-0028 Fax #: 403 248 2762 Email Address: shenouda@microhardcorp.com

MANUFACTURER	
Name:	Microhard Systems Inc.
Address:	#17, 2135 - 32nd Avenue N.E. Calgary, Alberta Canada T2E 6Z3
Contact Person:	Mr. Hany Shenouda Phone #: 403 248-0028 Fax #: 403 248-2762 Email Address: shenouda@microhardcorp.com

3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Microhard Systems Inc.
Product Name:	2400 MHz OEM Frequency Hopping / DTS Module
Model Name or Number:	MHX2421
Serial Number:	Test Sample
Type of Equipment:	Spread Spectrum Transmitter / Digital Transmission System
Input Power Supply Type:	External Regulated DC Sources
Primary User Functions of EUT:	Spread Spectrum OEM Transceiver.

3.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	<ul style="list-style-type: none">▪ Mobile▪ Base Station (fixed use)
Intended Operating Environment:	<ul style="list-style-type: none">▪ Commercial, industrial or business environment▪ Residential environment
Power Supply Requirement:	4 to 5.5VDC
RF Output Power Rating:	0.001 to 1 W
Operating Frequency Range:	2401.6 – 2477.6 MHz
RF Output Impedance:	50 Ohms
Channel Spacing:	400kHz Frequency hopping / DTS mode different Channelization
Duty Cycle:	Continuous
Modulation Type:	FHSS / DTS
Antenna Connector Type:	The MHX2421 Module is tested with MCX and Reverse Polarity SMA

3.4. ASSOCIATED ANTENNA DESCRIPTIONS

There are five antenna types:

1. Rubber Ducky Antenna
2. Transit Antenna
3. Patch Antenna
4. Yagi Antenna
5. Omni Directional Antenna

The highest gain antenna from each of the above antenna types were selected for testing to represents the worst-case. Refer to antennas list exhibit for detailed specifications.

3.5. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	RF IN/OUT Port	1	Reversed SMA or MCX for external antenna	Shielded coaxial cable with unique coupling connectors
2	DC Supply & I/O Port	1	Pin Header	No cable, direct connection

3.6. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Laptop
Brand name:	Toshiba
Model Name or Number:	1605CDS/4.3
FCC Certification	FCC DoC
Serial Number:	1027387CU
Connected to EUT's Port:	Test Jig of the EUT

Ancillary Equipment # 2	
Description:	Test Jig
Brand name:	Microhard Systems Inc.
Connected to EUT's Port:	I/O Port

Ancillary Equipment # 3	
Description:	AC Adaptor
Brand name:	Maxim
Model Name or Number:	MD4812112
Connected to EUT's Port:	Test jig of the EUT

EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power Input Source:	4 to 5.5VDC

4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	<ul style="list-style-type: none"> ▪ Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. ▪ The EUT operates in normal Frequency Hopping mode for occupancy duration, and frequency separation.
Special Test Software & Hardware:	Special software provided by the Applicant is installed to allow the EUT to operate in hopping mode or at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as a non-integral antenna equipment as described with the test results.

Transmitter Test Signals	
Frequency Band(s):	2401.6 – 2477.6
Frequency(ies) Tested: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	FHSS: 2401.6, 2439.6 and 2477.6 MHz DTS: 2402.50, 2439.25 and 2476.00 MHz 2403.50, 2439.50 and 2475.50 MHz 2404.00, 2440.25 and 2476.50 MHz 2405.50, 2439.50 and 2473.50 MHz
RF Power Output: (measured maximum output power at antenna terminals)	1 Watt (conducted) and 36 dBm EIRP maximum
*Normal Test Modulation:	FHSS, Data Rate 5 DTS, Data Rate 8, 9, 10 and 11
Modulating Signal Source:	Internal

*See Operational Description exhibit supplied by the manufacturer for details of the data rates for FHSS/DTS.

EXHIBIT 5. SUMMARY OF TEST RESULTS

5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada Site No.: 2049A-2, Expiry Date: July 4, 2008).

5.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.207(a)	AC Power Line Conducted Emissions	Yes
15.247(a)(1), (f)	Provisions for Frequency Hopping Systems	Yes
15.247(a)(2)	6 dB Bandwidth	Yes
15.247(b)(1)	Peak Conducted Output Power - FHSS	Yes
15.247(b)(3)	Peak Conducted Output Power - DTS	Yes
15.247(d)	Band-Edge and RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
15.247(d), 15.209 & 15.205	Transmitter Spurious Radiated Emissions	Yes
15.247(e)	Power Spectral Density	Yes
15.247(b)(5), (e)(i) 1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure	Yes

The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices. The engineering test report is available upon request.

5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

6.1. TEST PROCEDURES

ANSI C63.4; FCC Public Notice @ DA 00-705 (March 30, 2000) – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems; KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems.

6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

6.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1

6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

6.5. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	Manufacturer's Clarification
15.31	The hopping function must be disabled for tests, which should be performed with the EUT transmitting on the number of frequencies specified in this Section. The measurements made at the upper and lower ends of the band of operation should be made with the EUT tuned to the highest and lowest available channels.	See Operational Description
15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"> ➤ The application (or intended use) of the EUT ➤ The installation requirements of the EUT ➤ The method by which the EUT will be marketed 	The antenna employs unique antenna connectors: MCX and Reverse Polarity SMA
15.204	<p>Provided the information for every antenna proposed for use with the EUT:</p> <ul style="list-style-type: none"> ➤ type (e.g. Yagi, patch, grid, dish, etc...), ➤ manufacturer and model number ➤ gain with reference to an isotropic radiator 	See proposed antenna list.
15.247(a)	Description of how the EUT meets the definition of a frequency hopping spread spectrum, found in Section 2.1. Based on the technical description.	See Operational Description
15.247(a)	Pseudo Frequency Hopping Sequence: Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, in order to demonstrate that the sequence meets the requirements specified in the definition of a frequency hopping spread spectrum system, found in Section 2.1	See Operational Description

FCC Section	FCC Rules	Manufacturer's Clarification
15.247(a)	<u>Equal Hopping Frequency Use:</u> Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g. that each new transmission event begins on the next channel in the hopping sequence after final channel used in the previous transmission events).	See Operational Description
15.247(g)	Describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system	See Operational Description
15.247(h)	Describe how the EUT complies with the requirement that it not have the ability to coordinated with other FHSS is an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters	See Operational Description
Public Notice DA 00-705	<u>System Receiver Input Bandwidth:</u> Describe how the associated receiver(s) complies with the requirement that its input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.	See Operational Description
Public Notice DA 00-705	<u>System Receiver Hopping Capability:</u> Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals	See Operational Description

6.6. POWER LINE CONDUCTED EMISSIONS [§15.207(a)]

6.6.1. Limit

The equipment shall meet the limits of the following table:


Frequency of emission (MHz)	Conducted Limits (dB μ V)		Measuring Bandwidth
	Quasi-peak	Average	
0.15–0.5	66 to 56*	56 to 46*	RBW = 9 kHz
0.5–5	56	46	VBW \geq 9 kHz for QP
5–30	60	50	VBW = 1 Hz for Average

*Decreases linearly with the logarithm of the frequency

6.6.2. Method of Measurements

ANSI C63.4

6.6.3. Test Arrangement

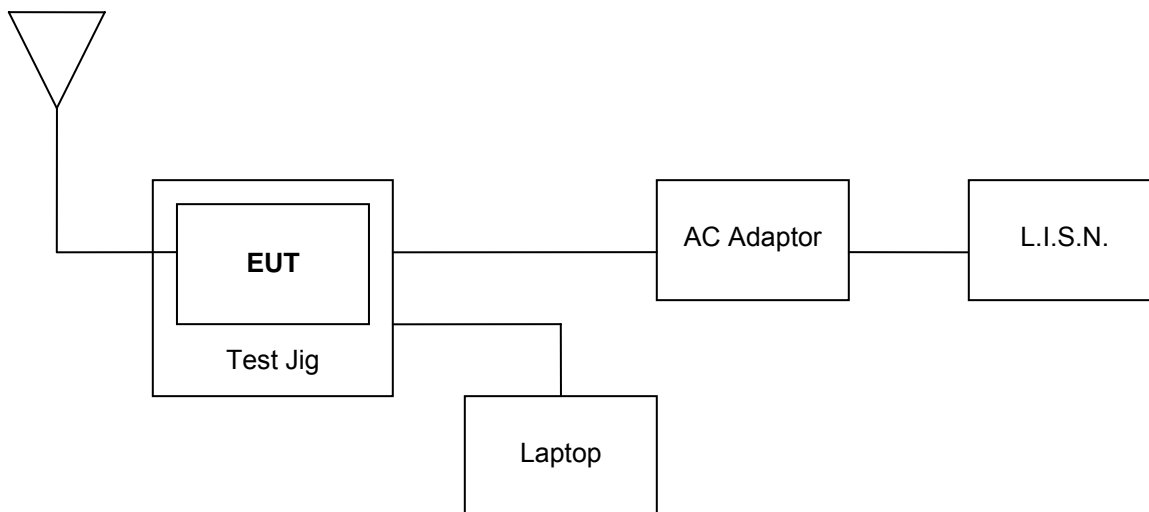

6.6.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Transient Limiter	Hewlett Packard	11947A	310701998	9 kHz – 200 MHz 10 dB attenuation
L.I.S.N.	EMCO	3825/2	89071531	9 kHz – 200 MHz 50 Ohms / 50 μ H
24'(L) x 16'(W) x 8'(H) RF Shielded Chamber	Braden Shielding

6.6.5. Test Data


Plot 6.6.5.1 Power Line Conducted Emissions
 Line Voltage: 120VAC 60Hz
 Line Tested: L1

Transmitter and Receiver Combined mode

HP

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP△L1
1	0.174500	53.1	47.2	13.4	-17.6
2	15.731500	24.3	20.9	17.9	-39.1
3	25.640175	24.8	22.9	21.5	-37.1

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 25.51 MHz
 22.98 dBµV

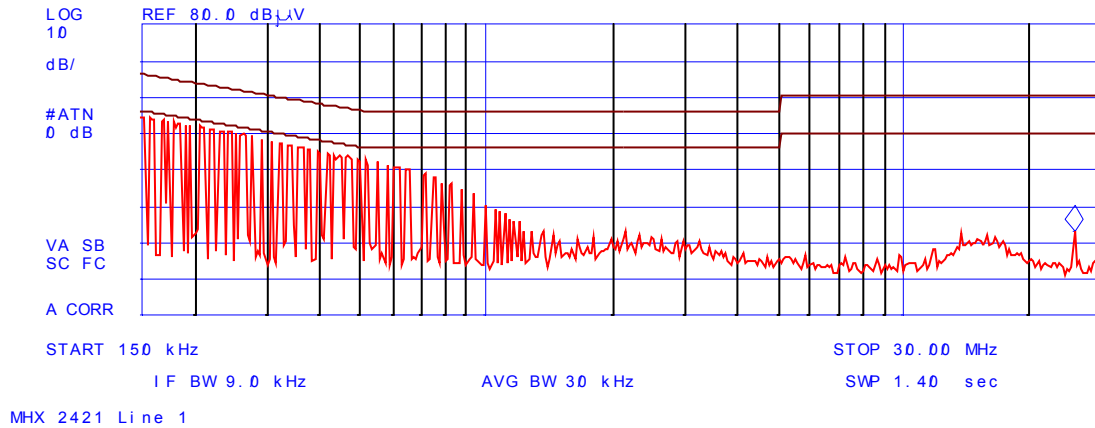


Plot 6.6.5.2 Power Line Conducted Emissions
 Line Voltage: 120VAC 60Hz
 Line Tested: L2

Transmitter and Receiver Combined mode

HP

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP Δ L1
1	0.151175	55.0	49.0	14.7	-16.9
2	16.166100	24.1	20.8	16.2	-39.2
3	25.639000	25.0	23.2	21.8	-36.8

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 25.51 MHz
 23.45 dB μ V

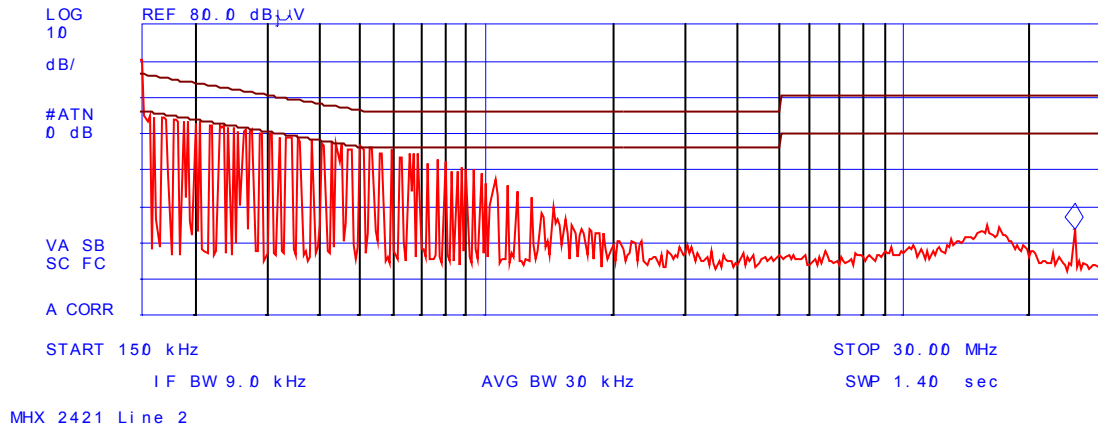

6.7. PROVISIONS FOR FREQUENCY HOPPING SYSTEMS [§ 15.247(a)(1)]

6.7.1. Limit

§ 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

§ 15.247(a)(1)(iii): Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

6.7.2. Method of Measurements

FCC Public Notice DA 00-705

Carrier Frequency Separation:

The hopping function of the EUT is enabled. Use the spectrum analyzer setting as follows:

- Span = wide enough to capture the peaks of two adjacent channels
- RBW = 1% of the span
- VBW \geq RBW
- Sweep = Auto
- Detector = peak
- Trace = max hold

Number of hopping frequency:

The hopping function of the EUT is enabled. Use the spectrum analyzer setting as follows:

- Span = the frequency band of operation
- RBW = 1% of the span
- VBW \geq RBW
- Sweep = Auto
- Detector = peak
- Trace = max hold

Time of Occupancy (Dwell Time):

The hopping function of the EUT is enabled. Use the spectrum analyzer setting as follows:

- Span = 0 Hz centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector = peak
- Trace = max hold


If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g. data rate modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

20 dB Bandwidth:

Use the spectrum analyzer setting as follows:

- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
- RBW = 1% of the 20 dB bandwidth
- VBW \geq RBW
- Sweep = auto
- Detector = peak
- Trace = max hold
- The transmitter shall be transmitting at its maximum data rate.
- Allow the trace to stabilize.
- Use the marker-to-peak function to set the marker to the peak of the emission.
- Use the marker-delta function to measure 20 dB down on both sides of the emission.
- The 20 dB BW is the delta reading in frequency between two markers.

6.7.3. Test Arrangement

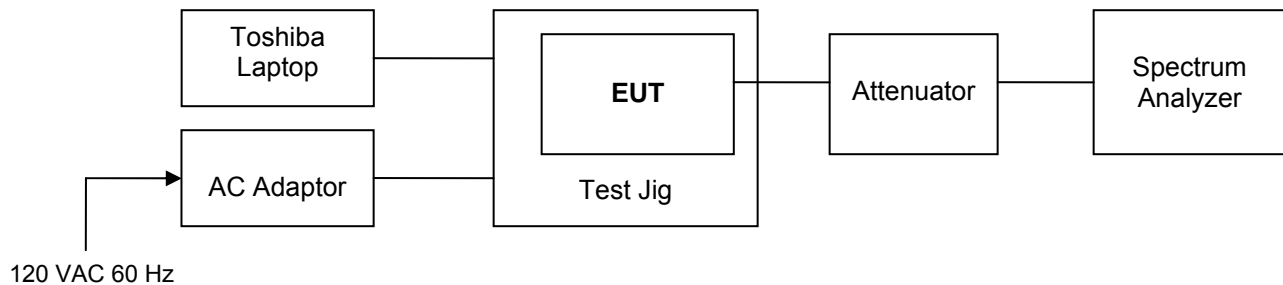

6.7.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9kHz - 40GHz
Attenuator	Narda	4768-10	0702	DC -40GHz

6.7.5. Test Data

Test Description	FCC Specification	Measured Values	Comments
Frequency Hopping Systems Requirements	The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	--	See Note 1
20 dB BW of the hopping channel	--	333.47 kHz	See Note 2
Channel Hopping Frequency Separation	Minimum of 25 kHz or 20dB BW whichever is greater or 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW	399.80 kHz	See Note 2
Number hopping frequencies	Shall use at least 15 channels	76 hopping frequencies	See Note 2 and 3
Average Time of Occupancy	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed	112 ms	See Note 2

Note 1: See operational description exhibit for details.

Note 2: See the following plots for details.

Note 3: Below is the list of pseudorandomly generated frequency in kHz for each rate. This is only a representative sample and the frequencies are generated may be different depend on the pseudorandom seed.


Rate 5 (hopping)

High link rate (channel space 400 kHz)


const unsigned int fcc_pattern3[76] = {

```
2401600, 2402100, 2402600, 2403100, 2403600, 2407200, 2408000, 2409600, 2410400, 2412000,
2413600, 2415200, 2416000, 2417600, 2418400, 2420000, 2420800, 2422400, 2423200, 2424800,
2426400, 2427600, 2428400, 2429600, 2430400, 2431600, 2432000, 2433200, 2434000, 2435200,
2438400, 2439200, 2439600, 2440000, 2440400, 2440800, 2441200, 2442000, 2445200, 2446400,
2450000, 2452400, 2452800, 2454000, 2455200, 2456000, 2456400, 2457600, 2458400, 2459600,
2460000, 2460800, 2462000, 2462400, 2463200, 2463600, 2464400, 2464800, 2465600, 2466000,
2466800, 2468400, 2469200, 2469600, 2470400, 2470800, 2472000, 2472800, 2473200, 2474000,
2474400, 2475600, 2476100, 2476600, 2477100, 2477600
};
```


Plot 6.7.5.1 20 dB Bandwidth
Test Frequency: 2401.6 MHz, Data Rate Setting: 5 (at high data rate)

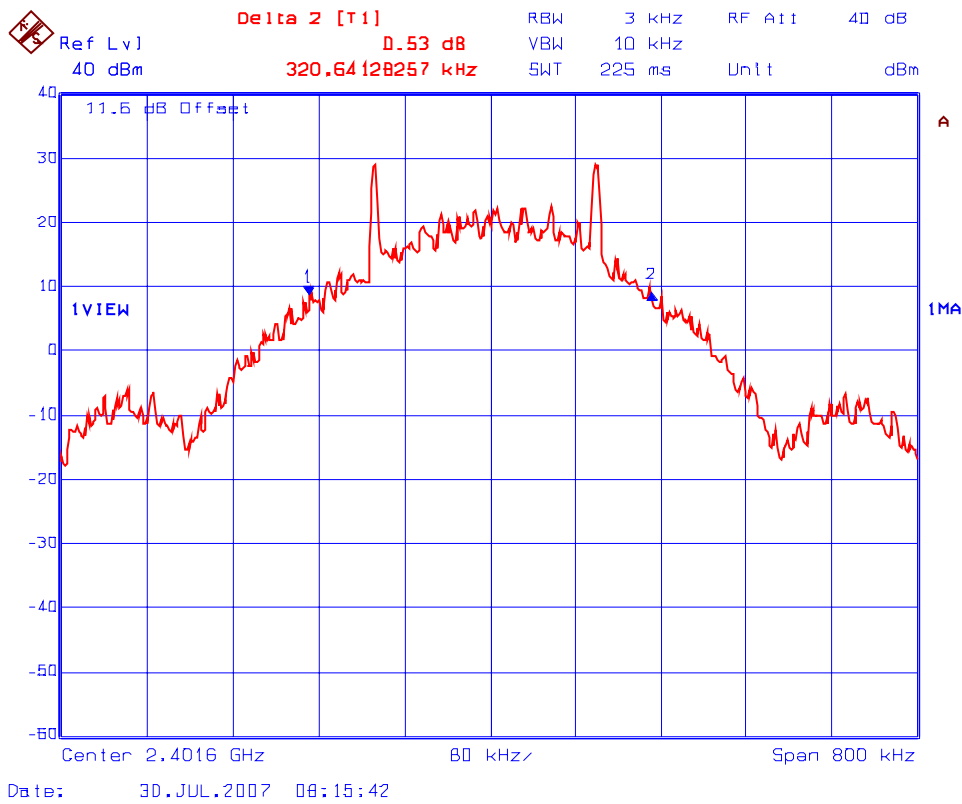


Plot 6.7.5.2 20 dB Bandwidth
Test Frequency: 2439.6 MHz, Data Rate Setting: 5 (at high data rate)

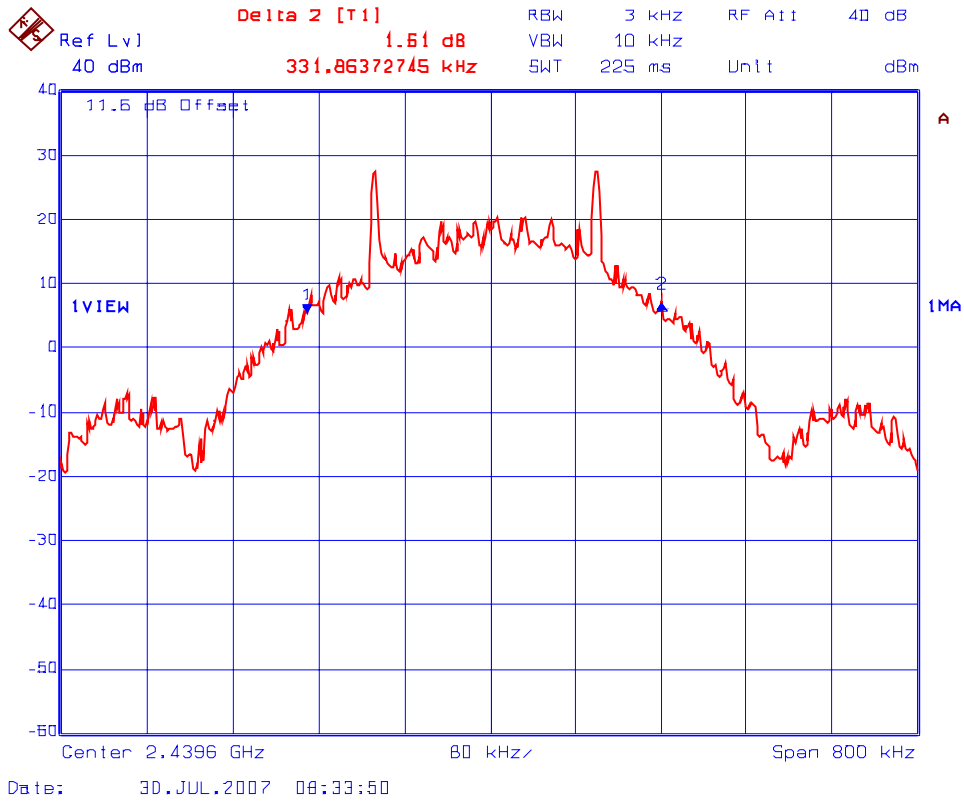


Plot 6.7.5.3 20 dB Bandwidth
Test Frequency: 2477.6 MHz, Data Rate Setting: 5 (at high data rate)

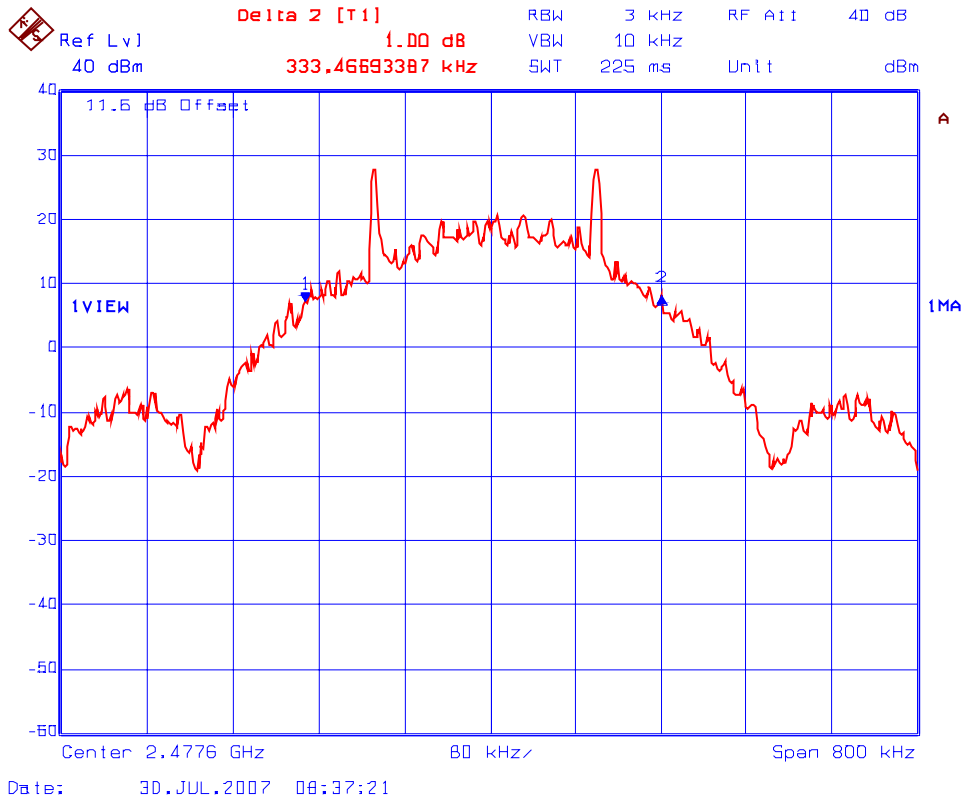


Plot 6.7.5.4 Carrier Frequency Separation at Data Rate 5

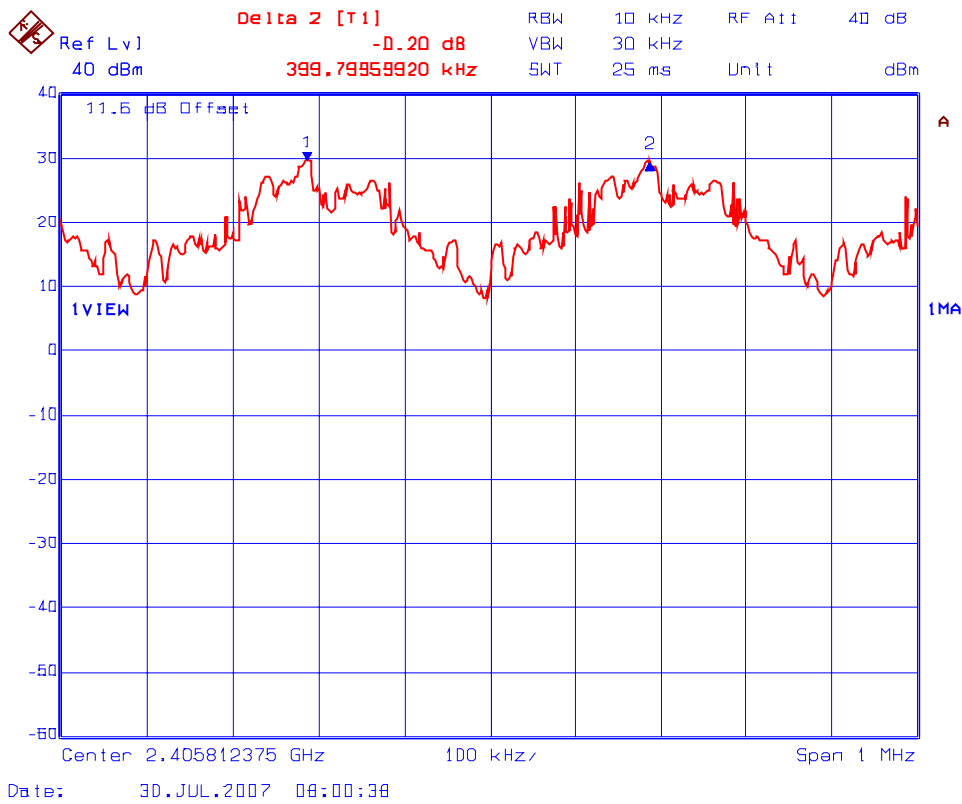


Plot 6.7.5.5 Number of Hopping Frequencies
76 Hopping Channels from 2400-2483.5 MHz

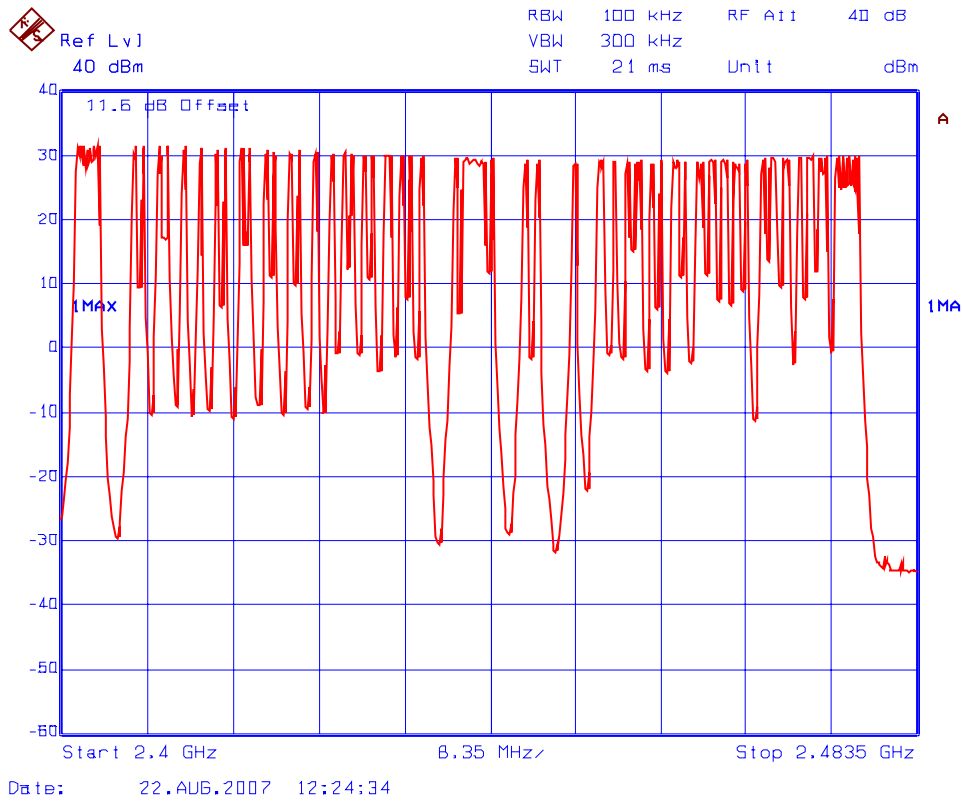


Plot 6.7.5.6 Number of Hopping Frequencies
8 Hopping Channels from 2400 - 2410 MHz

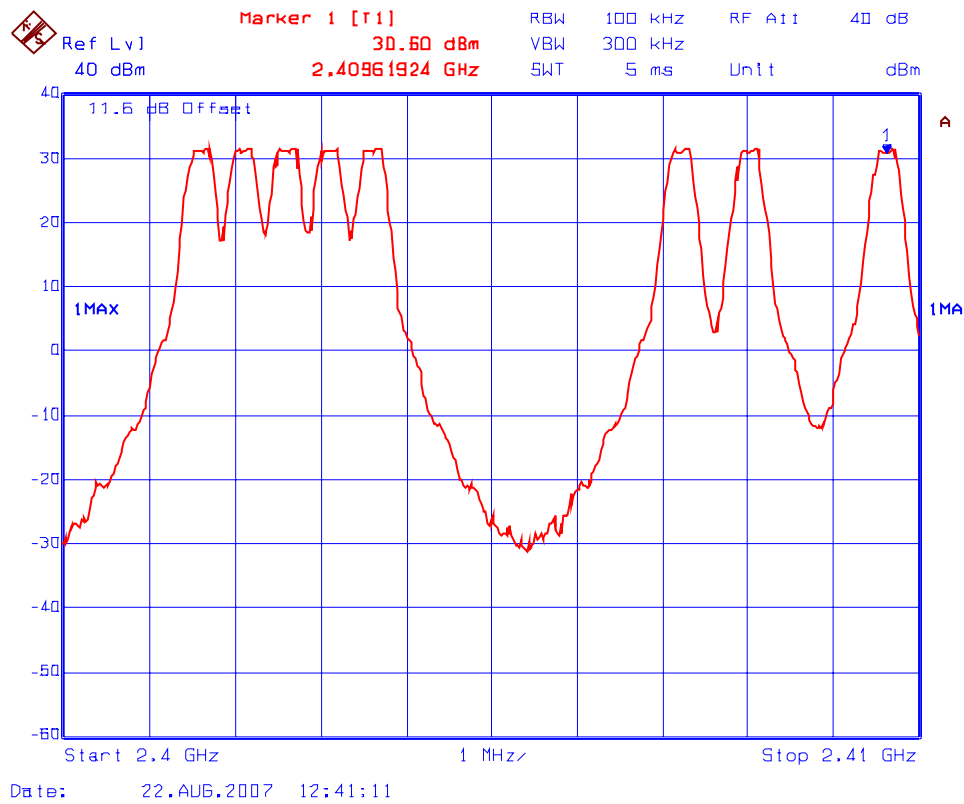


Plot 6.7.5.7 Number of Hopping Frequencies
8 Hopping Channels from 2409.5 - 2420 MHz

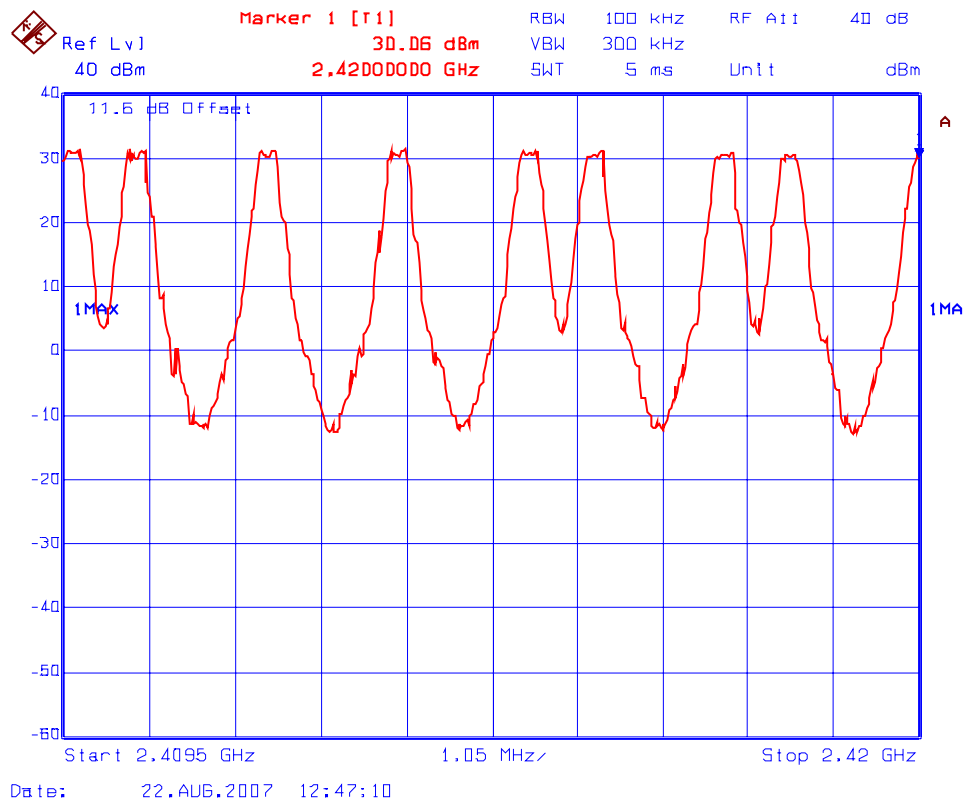


Plot 6.7.5.8 Number of Hopping Frequencies
8 Hopping Channels from 2419.5 - 2430 MHz

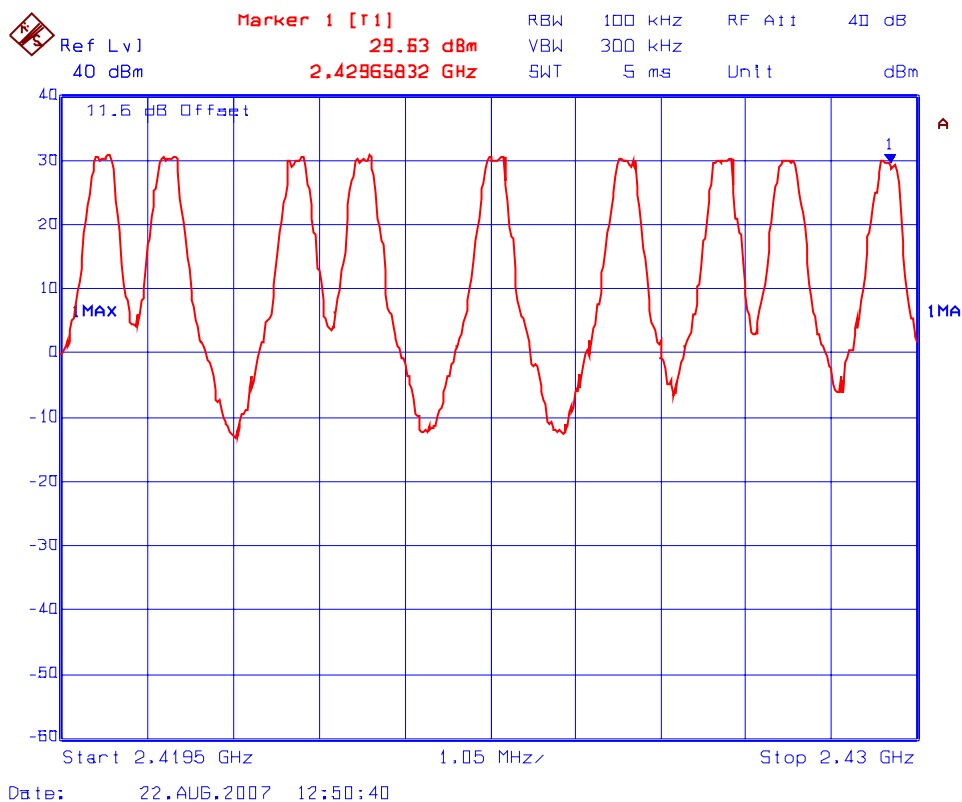


Plot 6.7.5.9 Number of Hopping Frequencies
9 Hopping Channels from 2429.5 - 2440 MHz

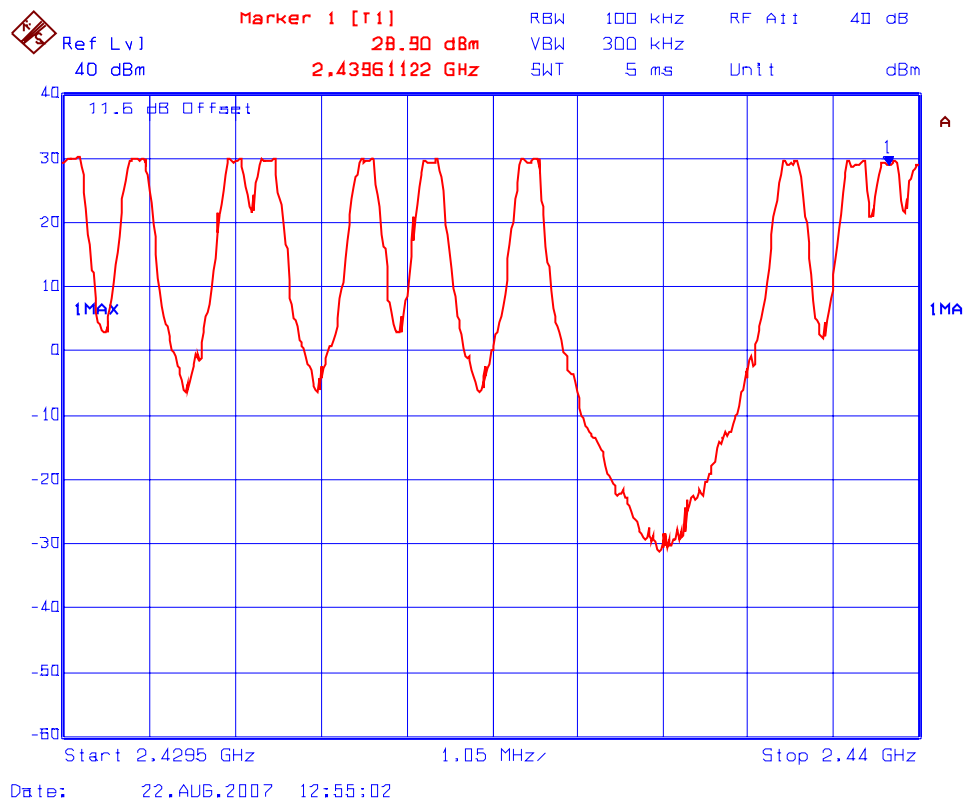


Plot 6.7.5.10 Number of Hopping Frequencies
7 Hopping Channels from 2439.5 - 2450 MHz

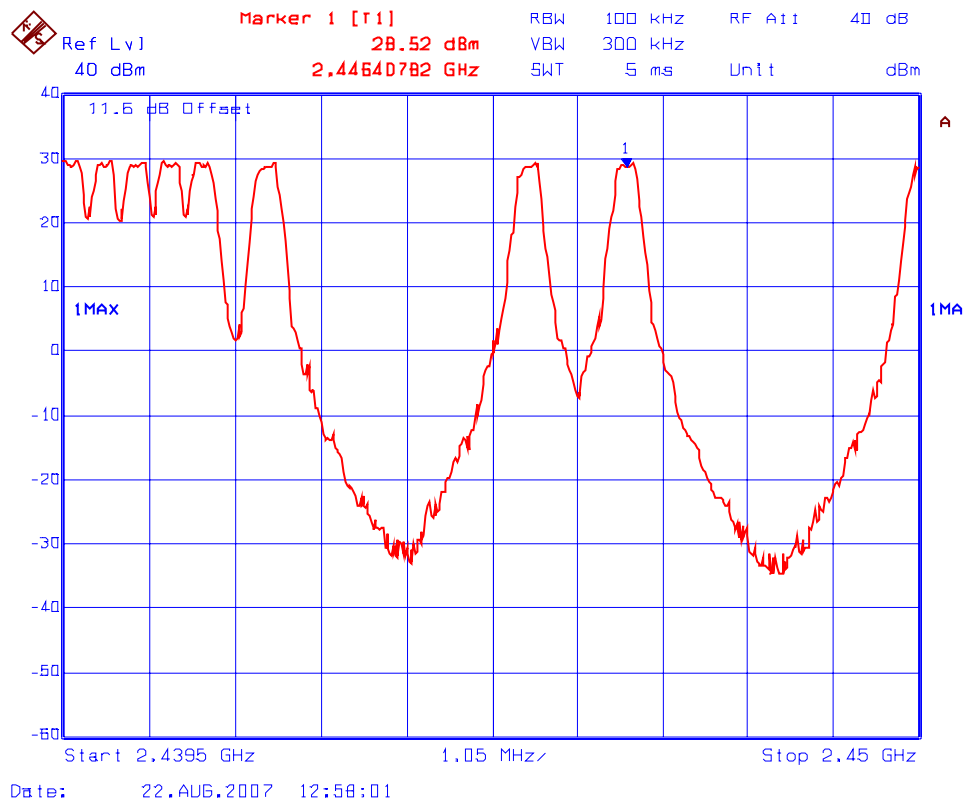


Plot 6.7.5.11 Number of Hopping Frequencies
10 Hopping Channels from 2449.5 - 2460 MHz

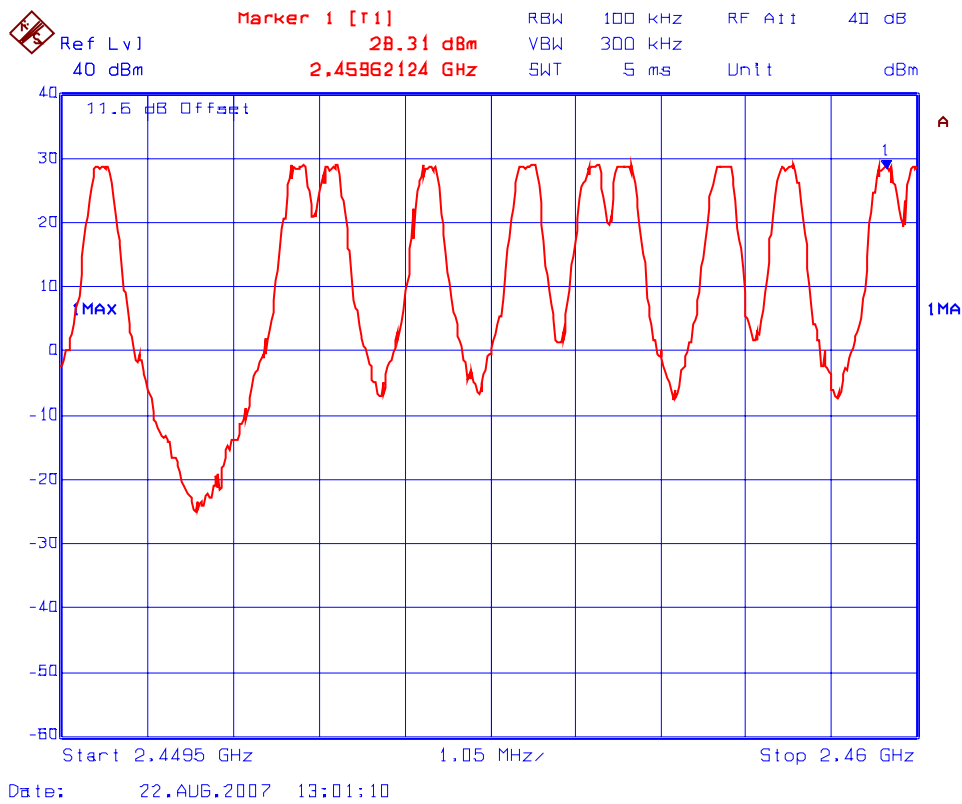


Plot 6.7.5.12 Number of Hopping Frequencies
14 Hopping Channels from 2459.5 - 2470 MHz

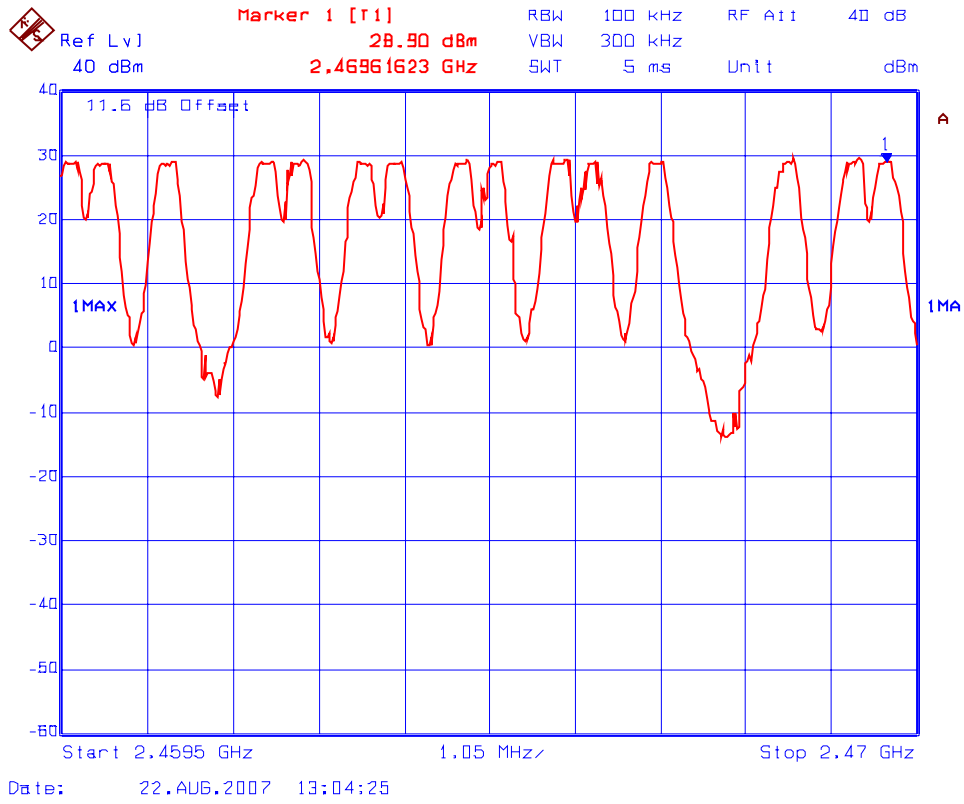


Plot 6.7.5.13 Number of Hopping Frequencies
12 Hopping Channels from 2469.5 - 2480 MHz

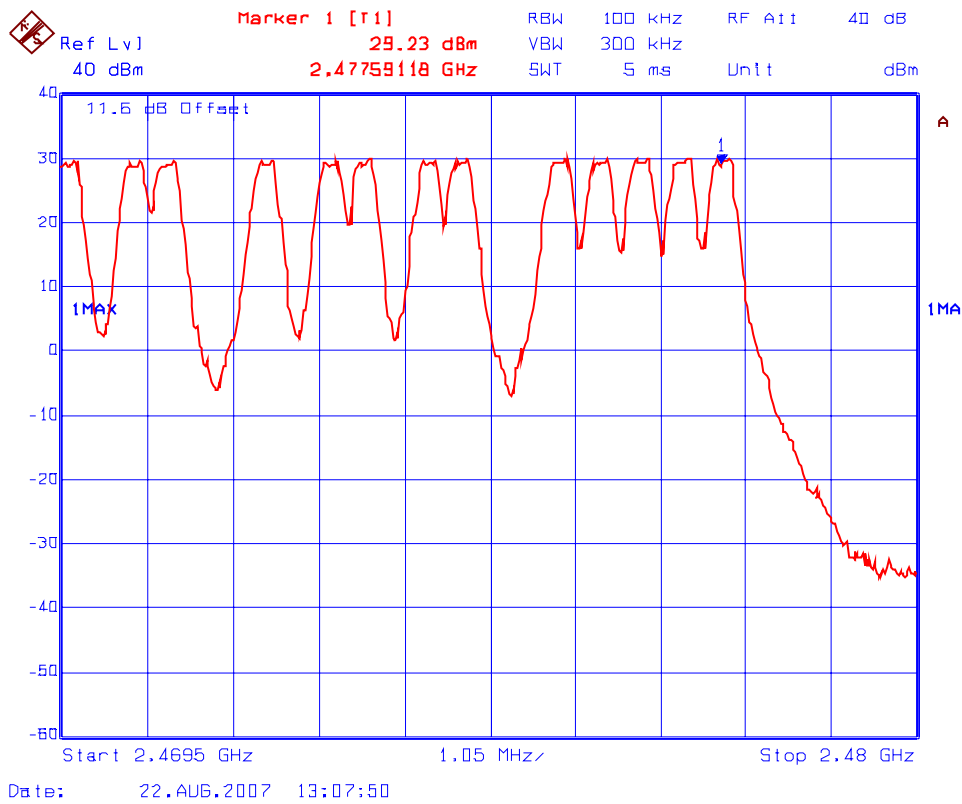

Plot 6.7.5.14 Number of Hopping Frequencies
0 Hopping Channels from 2479.5 – 2483.5MHz

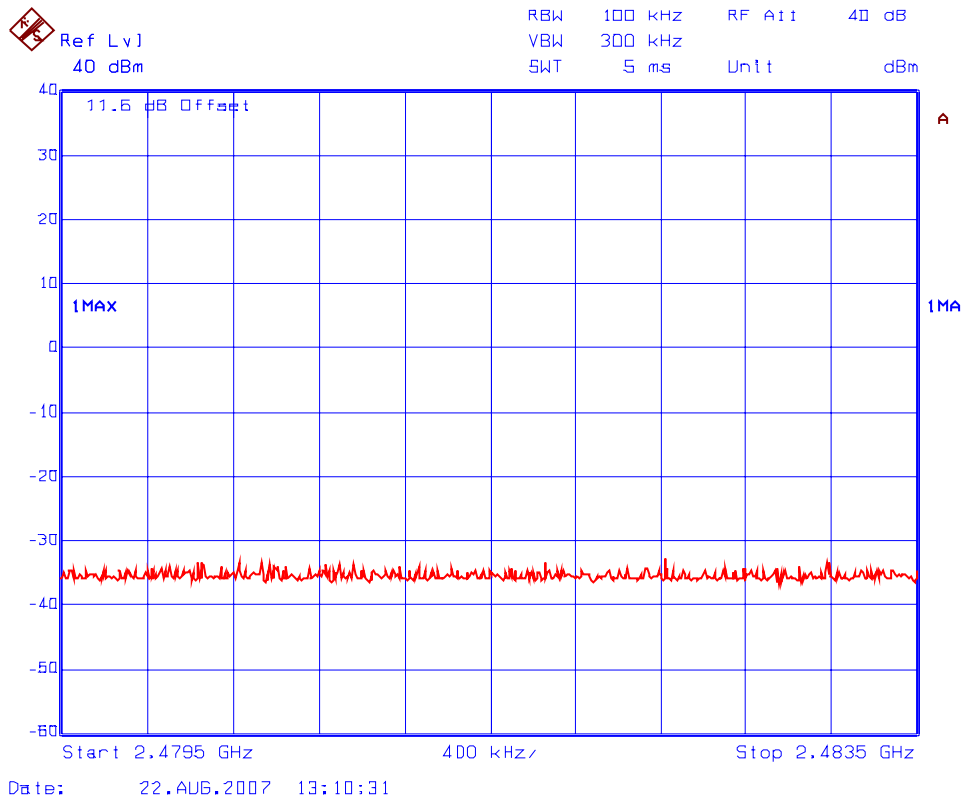


Plot 6.7.5.15 Time of Occupancy
Test Frequency: 2401.6 MHz at Data Rate 5

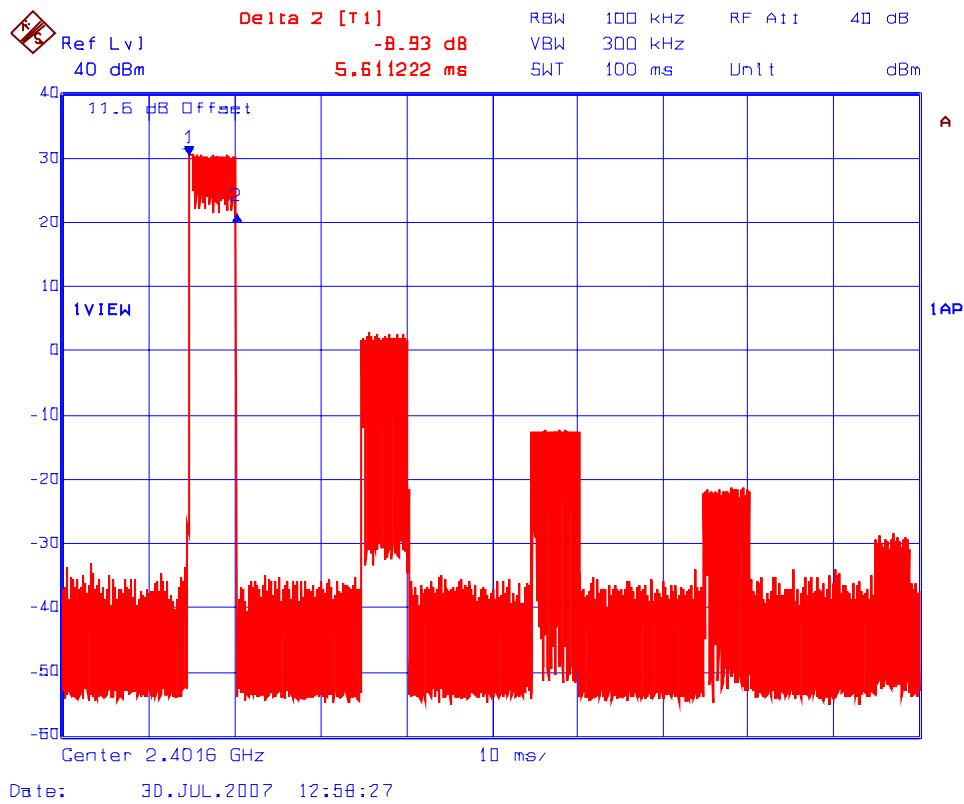


Dwell Time @ 2401.6 MHz = 5.611222 ms

Plot 6.7.5.16 Time of Occupancy
Test Frequency: 2401.6 MHz at Data Rate 5

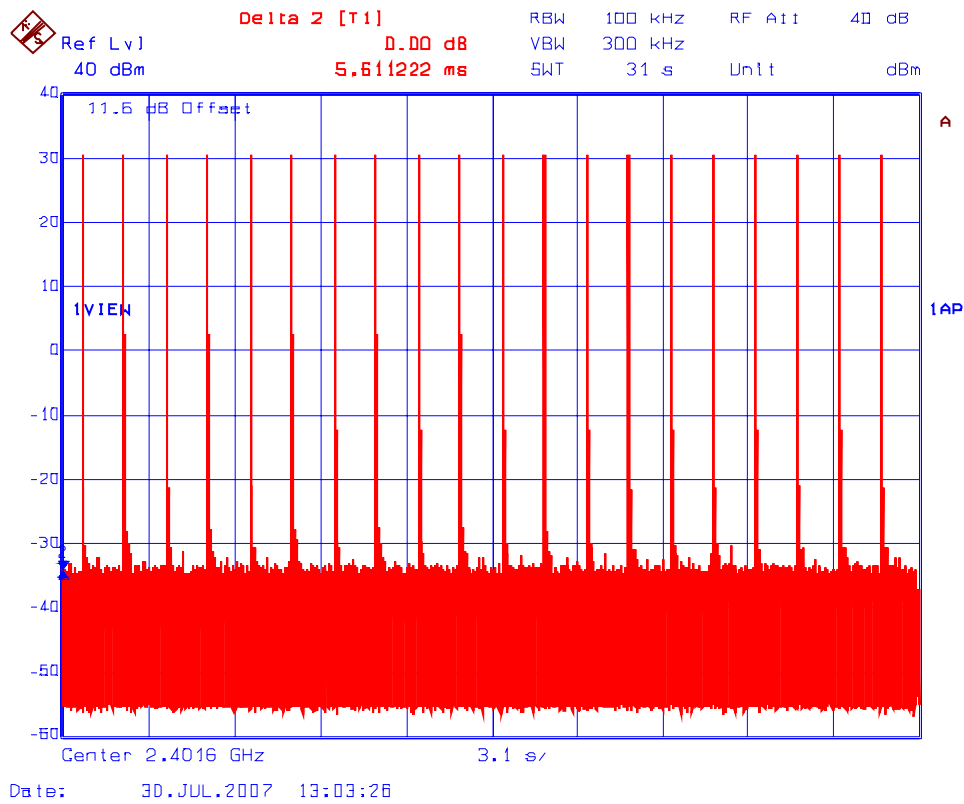


$$\begin{aligned} \text{Average time of occupancy} &= (\text{Dwell Time @ 2401.6 MHz}) \times (\text{number of hops within a period}) \\ &= 5.611222 \text{ ms} \times 20 \\ &= 112 \text{ ms} \end{aligned}$$

Plot 6.7.5.17 Time of Occupancy
Test Frequency: 2439.6 MHz at Data Rate 5

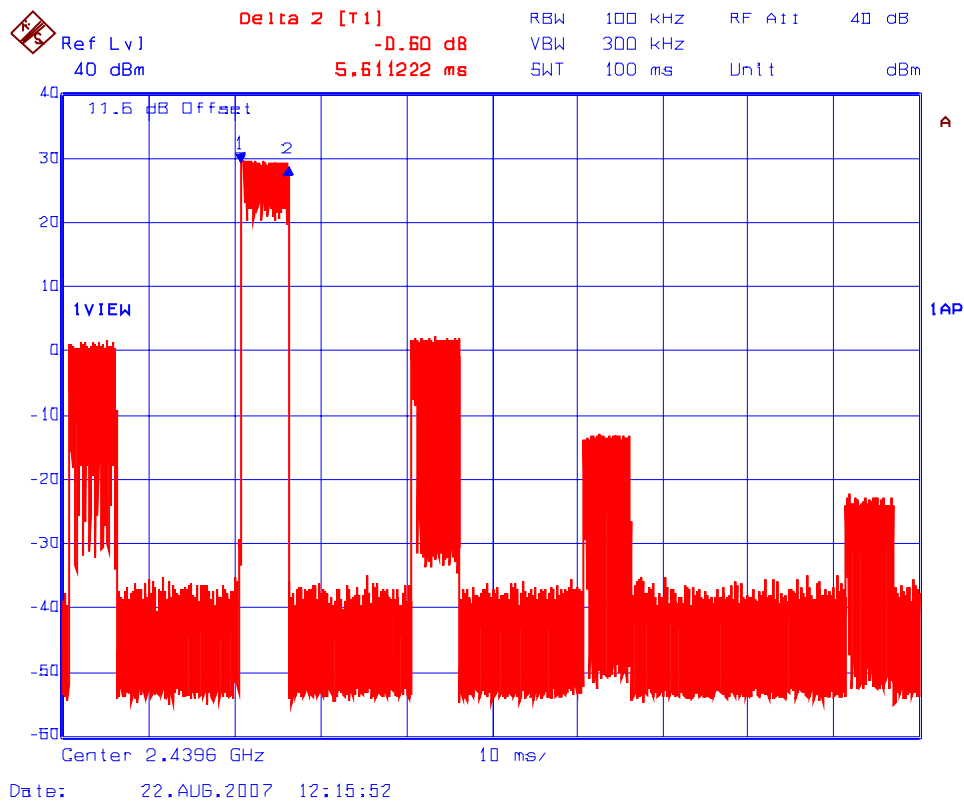


Dwell Time @ 2439.6 MHz = 5.611222 ms

Plot 6.7.5.18 Time of Occupancy
 Test Frequency: 2439.6 MHz at Data Rate 5

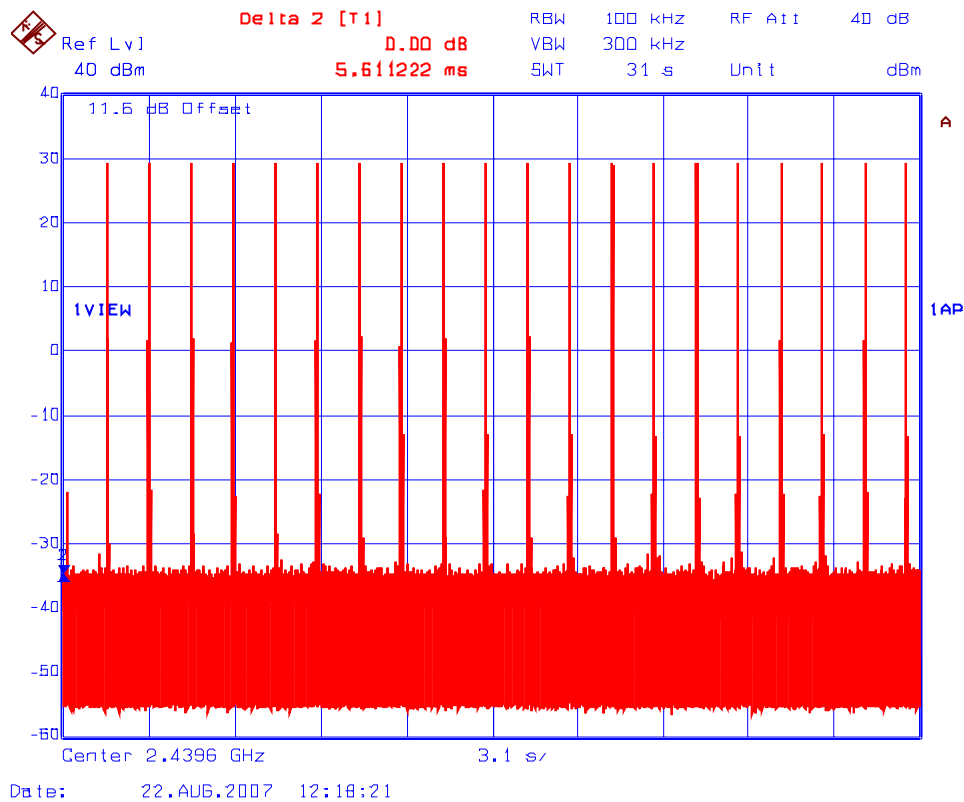


$$\begin{aligned}
 \text{Average time of occupancy} &= (\text{Dwell Time @ 2439.6 MHz}) \times (\text{number of hops within a period}) \\
 &= 5.611222 \text{ ms} \times 20 \\
 &= 112 \text{ ms}
 \end{aligned}$$

Plot 6.7.5.19 Time of Occupancy
Test Frequency: 2477.6 MHz at Data Rate 5

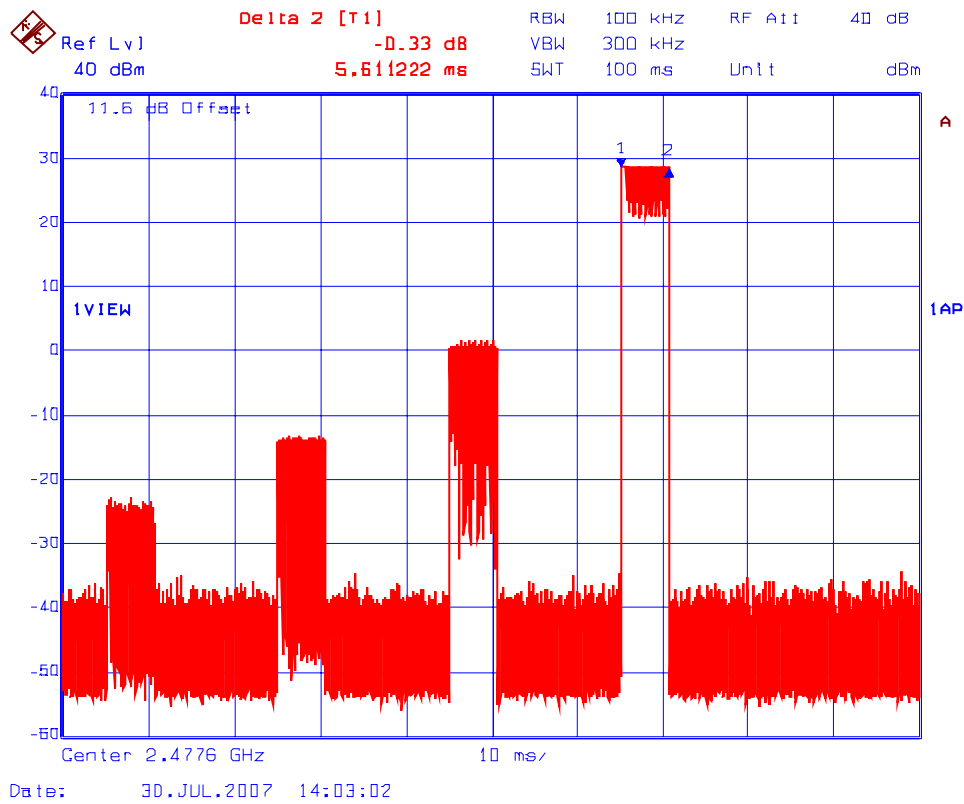

Dwell Time @ 2477.6 MHz = 5.611222 ms

Plot 6.7.5.20 Time of Occupancy
Test Frequency: 2477.6 MHz at Data Rate 5

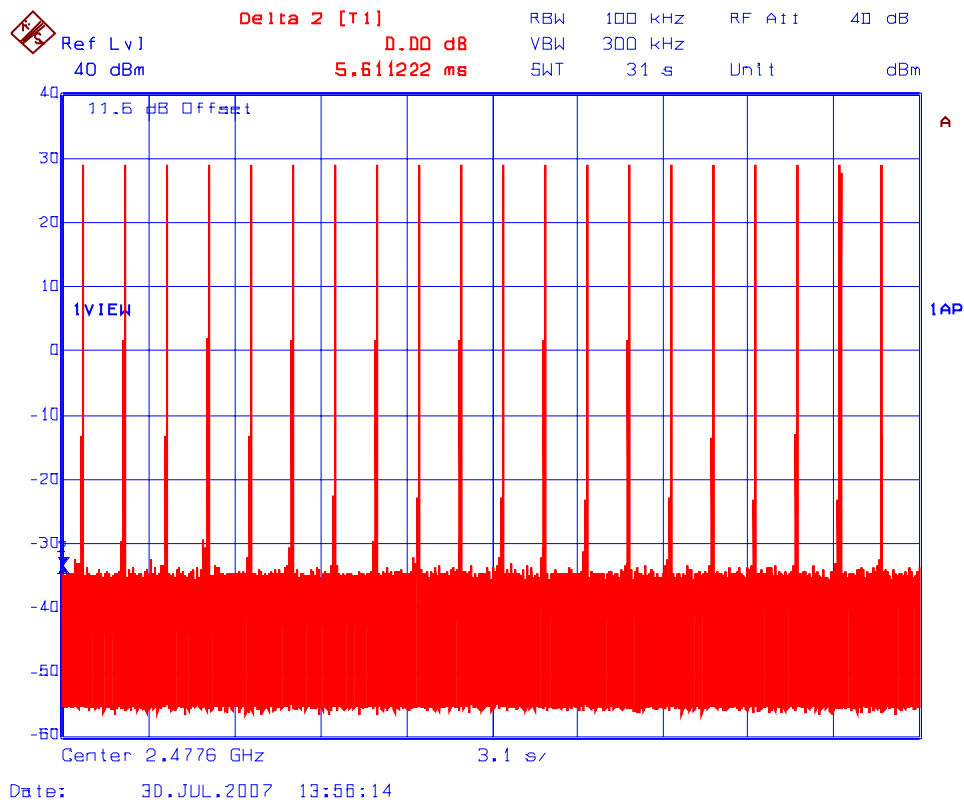

$$\begin{aligned} \text{Average time of occupancy} &= (\text{Dwell Time @ 2477.6 MHz}) \times (\text{number of hops within a period}) \\ &= 5.611222 \text{ ms} \times 20 \\ &= 112 \text{ ms} \end{aligned}$$

6.8. 6 dB BANDWIDTH [§ 15.247(a)(2)]


6.8.1. Limits

For a Digital Modulation System, the minimum 6 dB bandwidth shall be at least 500 KHz.

6.8.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

6.8.3. Test Arrangement

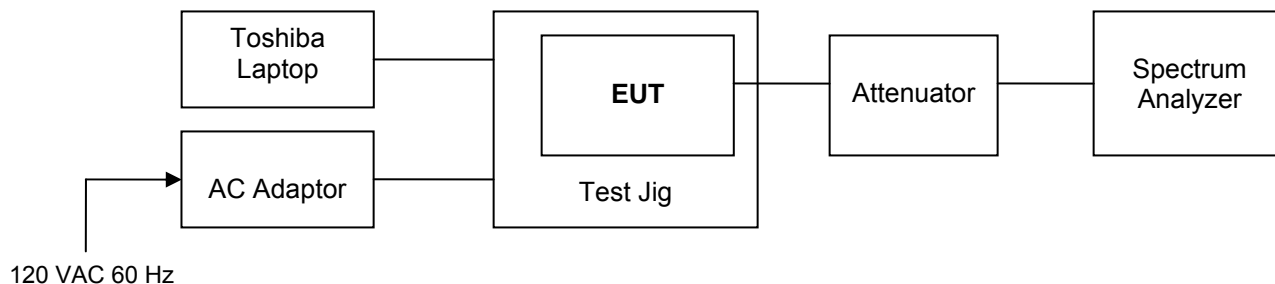

6.8.4. Test Equipment List


Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9 kHz- 40 GHz
Attenuator	Narda	4768-10	0702	DC -40GHz

6.8.5. Test Data


Frequency (MHz)	Modulation/Data Rate	6 dB Bandwidth (MHz)
2402.50	Data Rate 8	1.070
2439.25	Data Rate 8	1.058
2476.00	Data Rate 8	1.058
2403.50	Data Rate 9	1.220
2439.50	Data Rate 9	1.257
2475.50	Data Rate 9	1.281
2404.00	Data Rate 10	1.731
2440.25	Data Rate 10	1.747
2476.50	Data Rate 10	1.699
2405.50	Data Rate 11	2.581
2439.50	Data Rate 11	2.573
2473.50	Data Rate 11	2.557

See the following plots for detailed measurements.


Plot 6.8.5.1 6 dB Bandwidth
Frequency: 2402.50 MHz at Data Rate 8

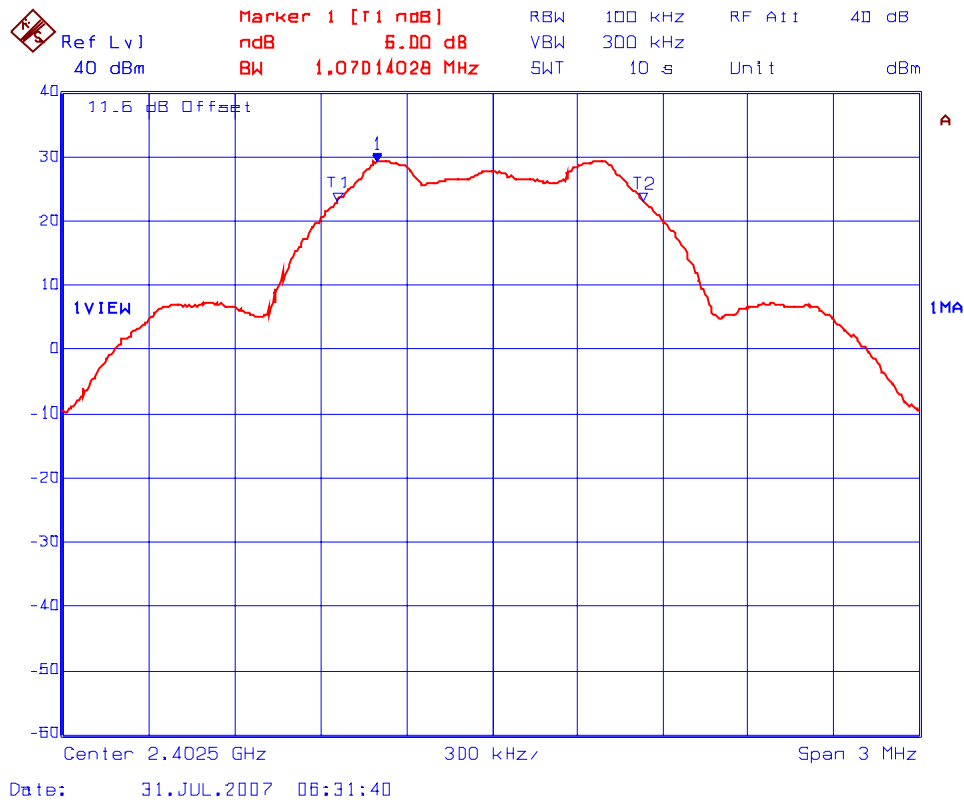


Plot 6.8.5.2 6 dB Bandwidth
 Frequency: 2439.25 MHz at Data Rate 8

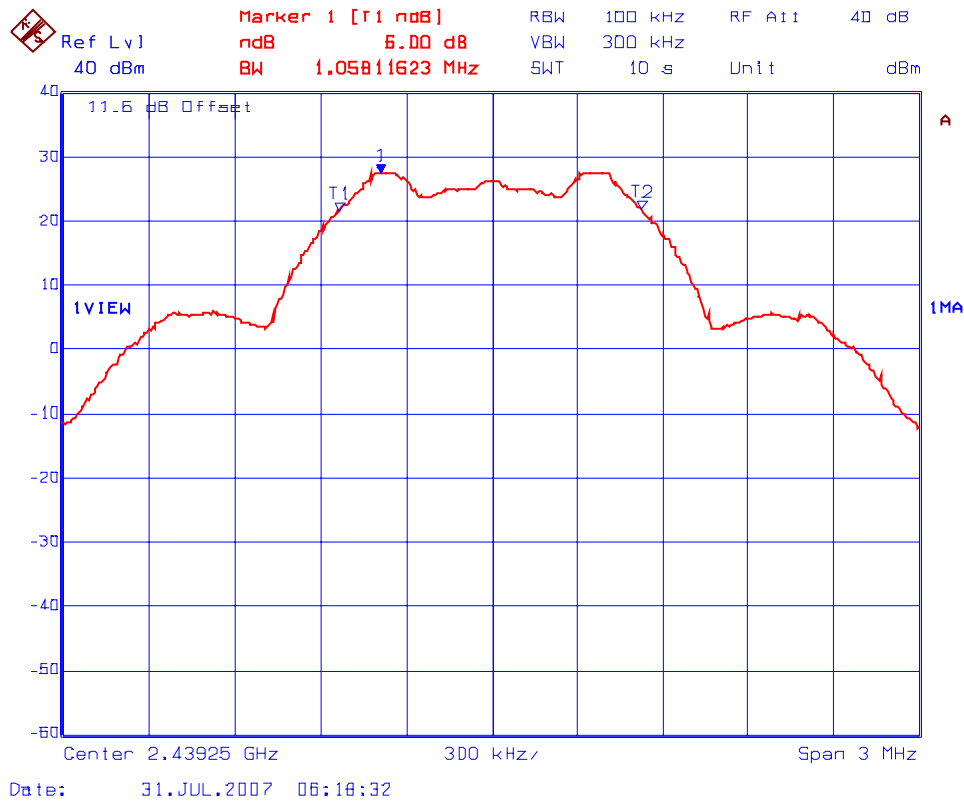


Plot 6.8.5.3 6 dB Bandwidth
Frequency: 2476.00 MHz at Data Rate 8

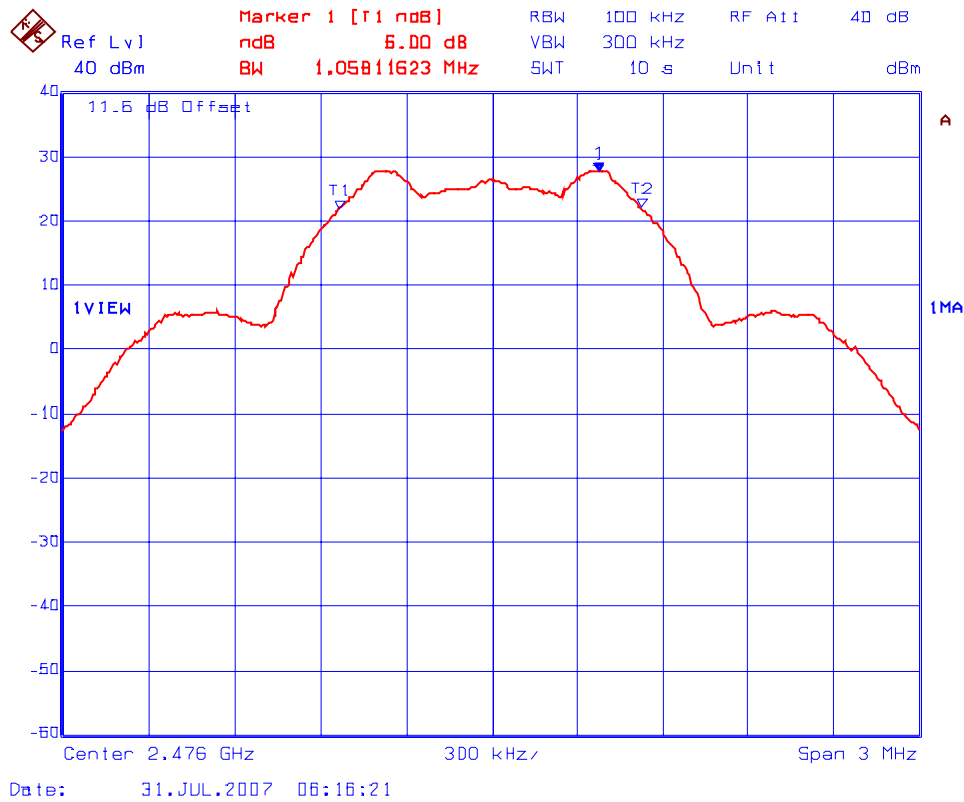


Plot 6.8.5.4 6 dB Bandwidth
Frequency: 2403.50 MHz at Data Rate 9

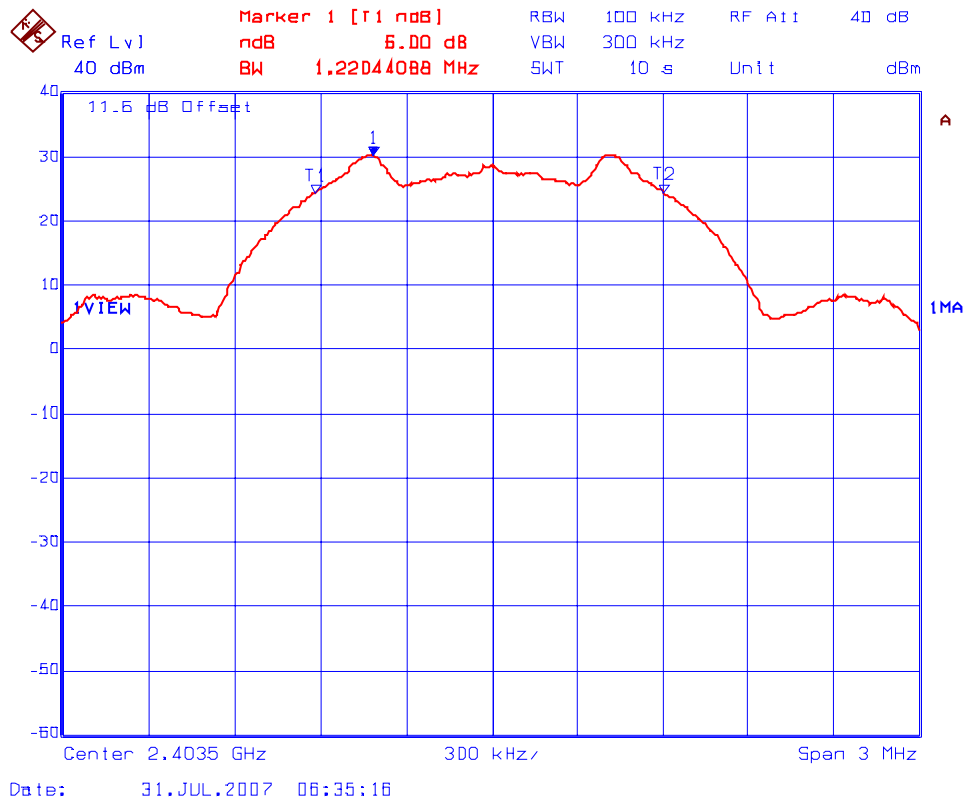


Plot 6.8.5.5 6 dB Bandwidth
 Frequency: 2439.50 MHz at Data Rate 9

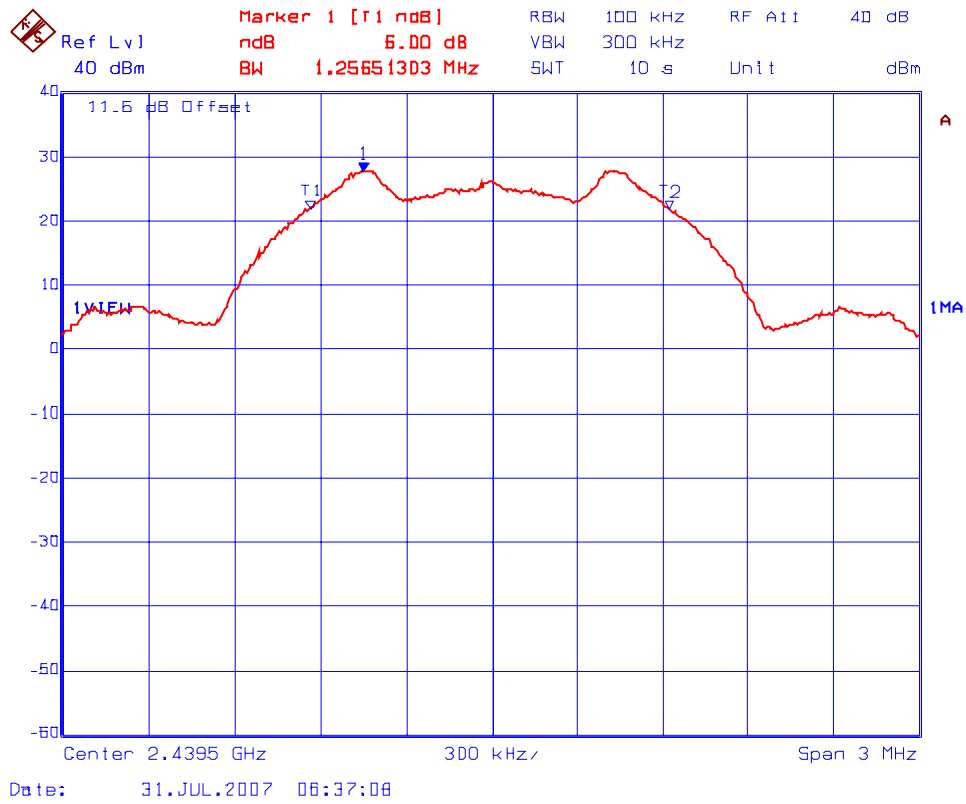


Plot 6.8.5.6 6 dB Bandwidth
Frequency: 2475.50 MHz at Data Rate 9

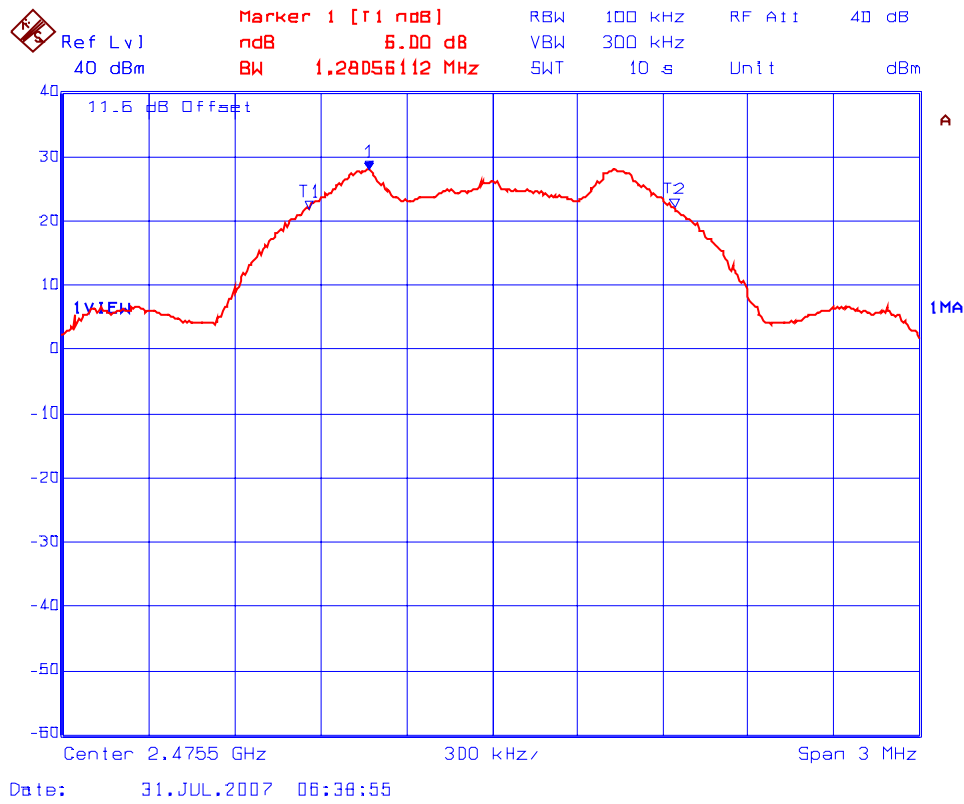


Plot 6.8.5.7 6 dB Bandwidth
Frequency: 2404.00 MHz at Data Rate 10

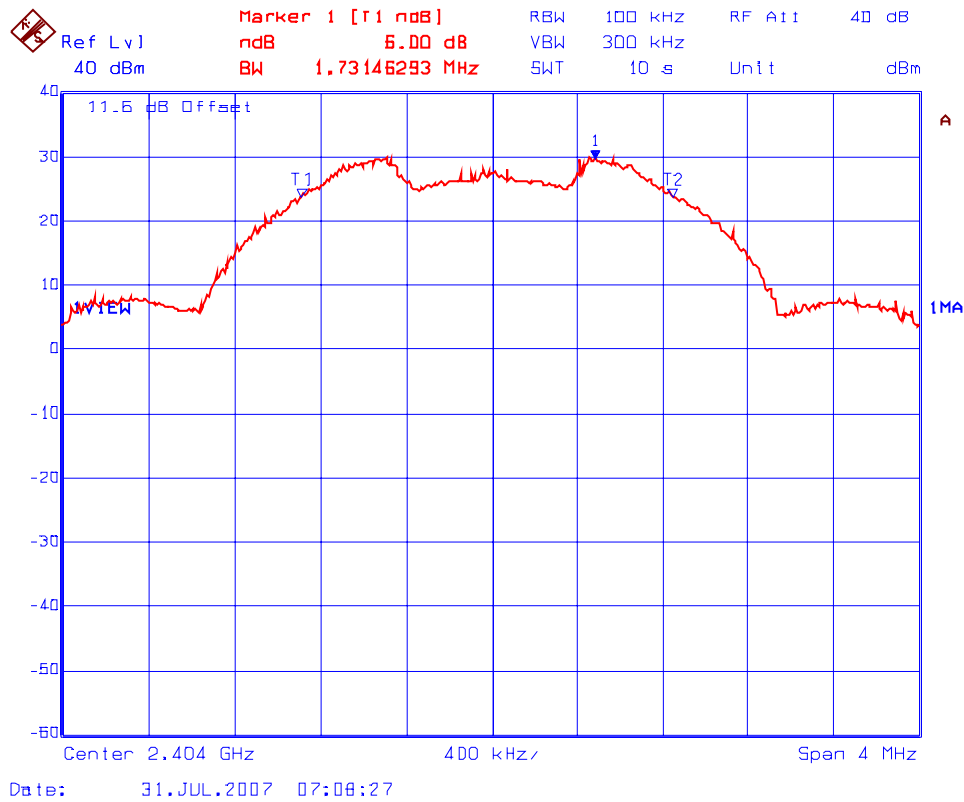


Plot 6.8.5.8 6 dB Bandwidth
Frequency: 2440.25 MHz at Data Rate 10

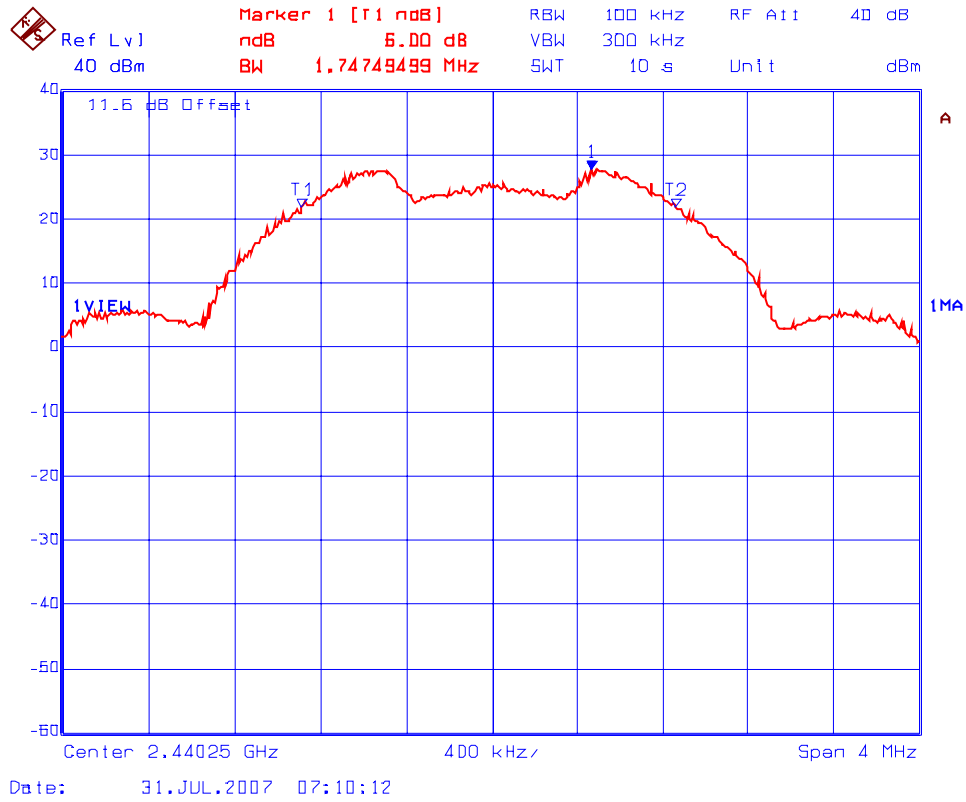

Plot 6.8.5.9 6 dB Bandwidth
 Frequency: 2476.50 MHz at Data Rate 10

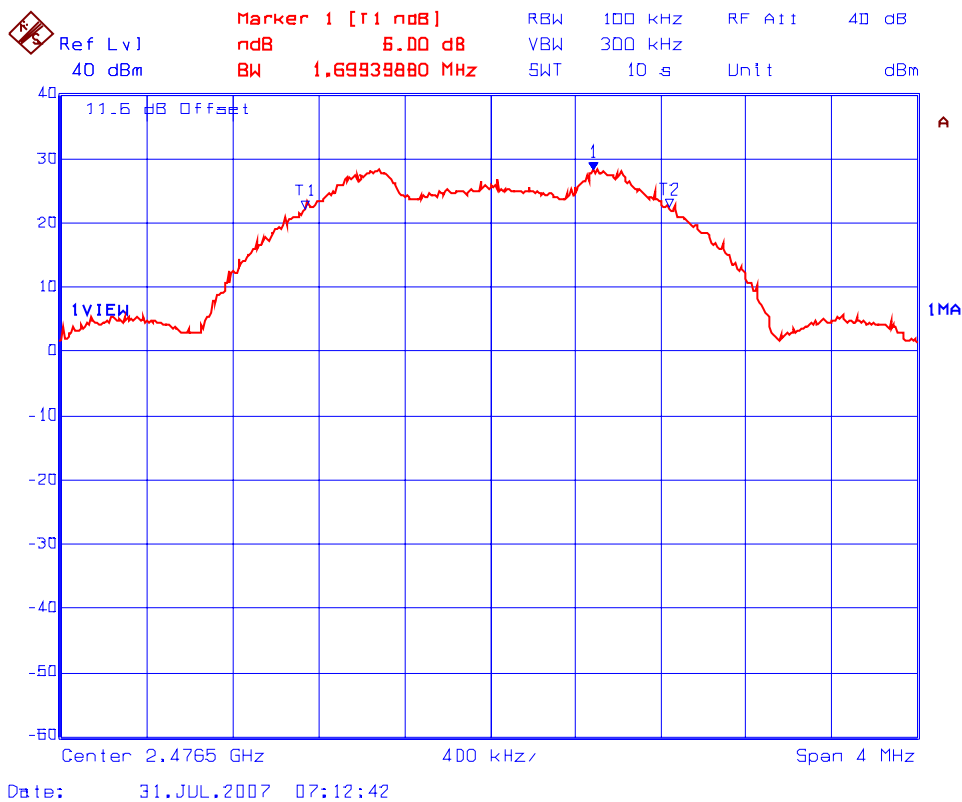

Plot 6.8.5.10 6 dB Bandwidth
Frequency: 2405.50 MHz at Data Rate 11

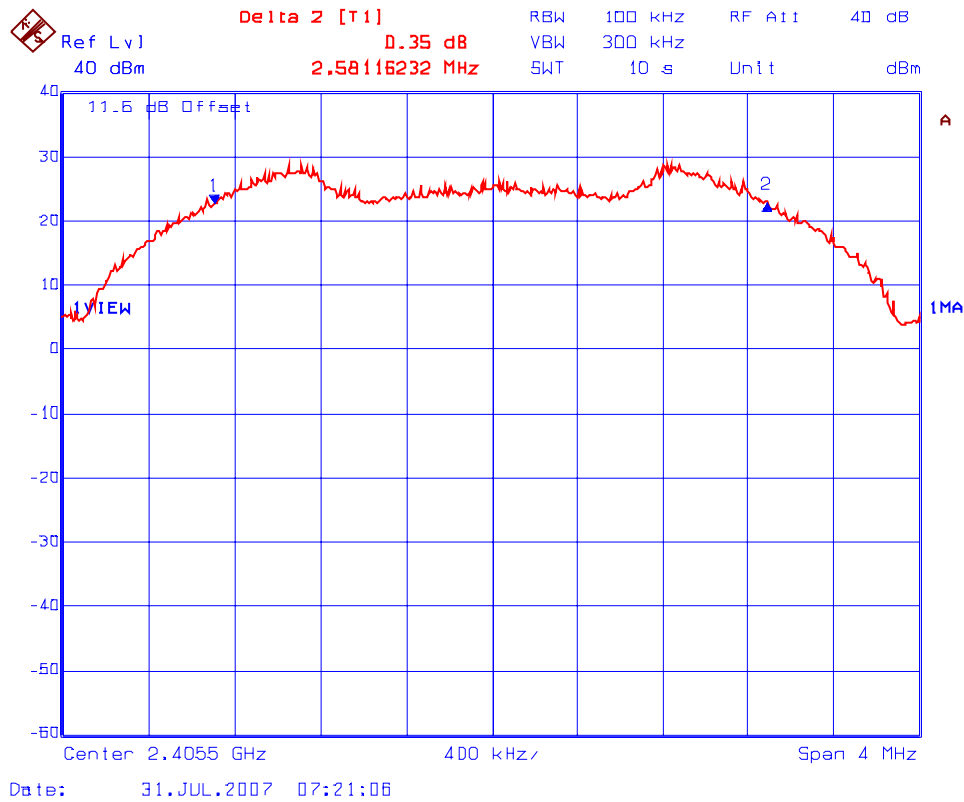


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.8.5.11 6 dB Bandwidth
Frequency: 2439.50 MHz at Data Rate 11

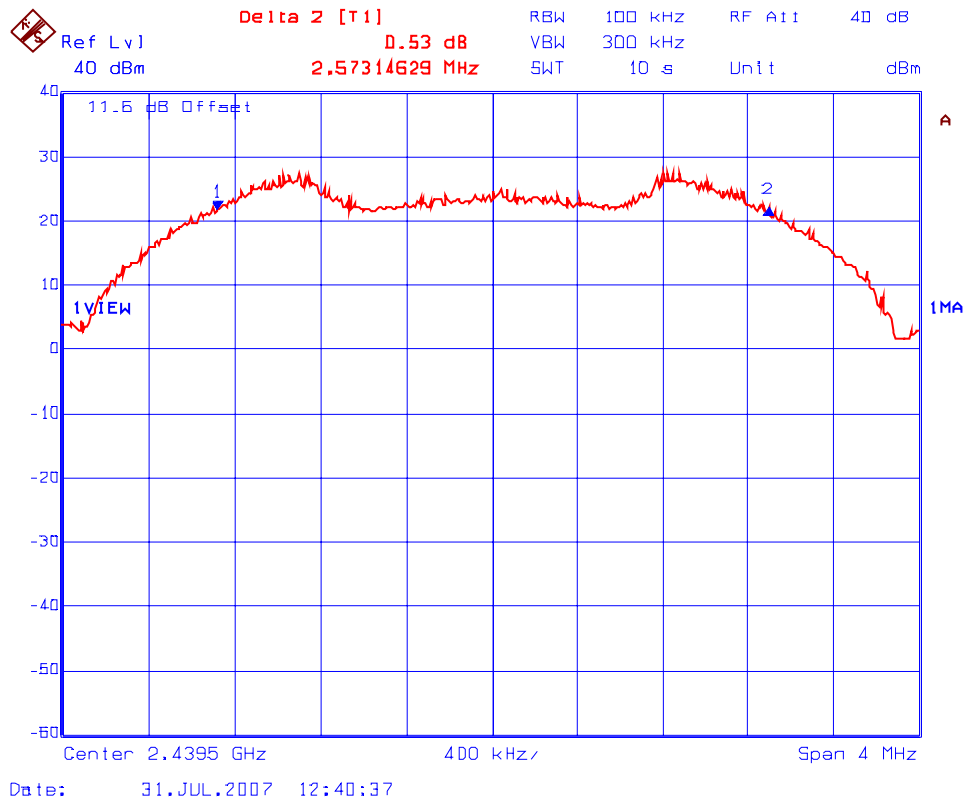

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247

August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.8.5.12 6 dB Bandwidth
Frequency: 2473.50 MHz at Data Rate 11

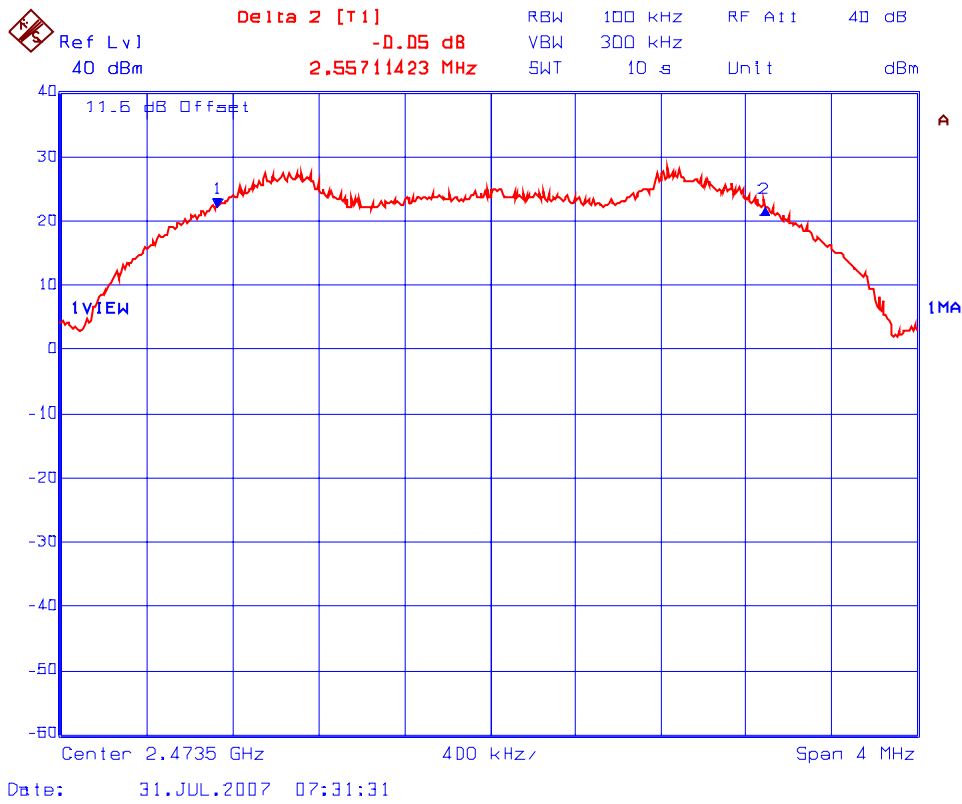

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9. PEAK CONDUCTED OUTPUT POWER - FHSS [§ 15.247(b)(2)]

6.9.1. Limit

§15.247(b)(1): For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


§15.247(b)(4): The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247(b)(4)(i): Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

6.9.2. Method of Measurements

Refer to Exhibit 8, Section 8.3, FCC Public Notice DA 00-705 and ANSI C63.4.

6.9.3. Test Arrangement

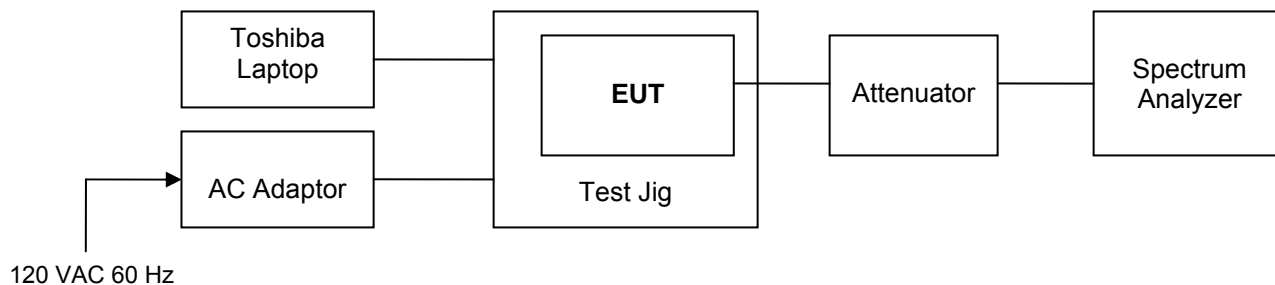

6.9.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9kHz - 40GHz
Attenuator	Narda	4768-10	0702	DC -40GHz

6.9.5. Test Data

Transmitter Channel	Frequency (MHz)	Peak Output Power at Antenna Terminal (dBm)	Calculated EIRP (dBm)	Peak Output Power Limit (dBm)	EIRP Limit (dBm)
Power Setting: 30 dBm (1W)					
Lowest	2401.6	30.09	See Notes below	30.0	36.0
Middle	2439.6	28.76	See Notes below	30.0	36.0
Highest	2477.6	28.64	See Notes below	30.0	36.0
Power Setting: 0 dBm (1 mW)					
Lowest	2401.6	-0.62	See Notes below	30.0	36.0
Middle	2439.6	0.27	See Notes below	30.0	36.0
Highest	2477.6	0.54	See Notes below	30.0	36.0

Notes:

1. The EIRP shall be calculated based on the transmitter antenna gain (G_{dB_i}), cable loss (CL_{dB}) and peak output power at antenna terminal (P_{dBm}). Calculated EIRP = $P_{dBm} + G_{dB_i} - CL_{dB}$
2. EIRP shall not exceed 36 dBm limit (Power Setting = 36 dBm - $G_{dB_i} + CL_{dB}$). See page 2 of the Operating Manual for instruction of power setting.

6.10. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)]

6.10.1. Limits


§ 15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

§15.247(b)(4): The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.10.2. Method of Measurements & Test Arrangement

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

6.10.3. Test Arrangement

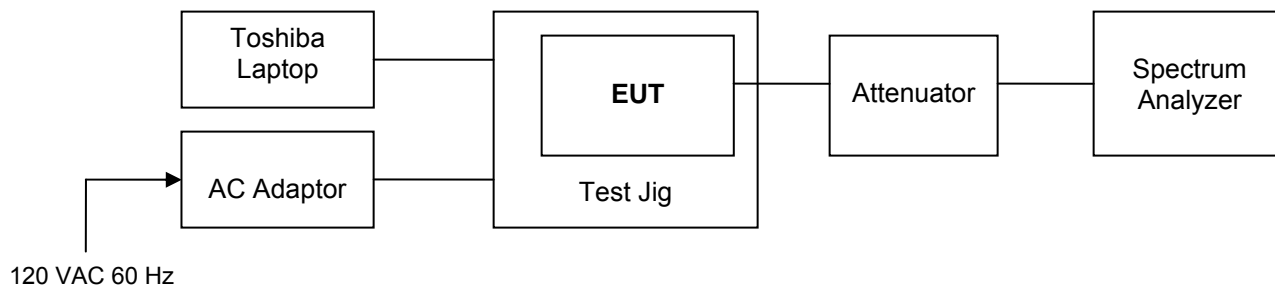

6.10.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9 kHz- 40 GHz
Attenuator	Narda	4768-10	0702	DC -40GHz

6.10.5. Test Data

Remark: Test Method: Option 2, method 1.

Frequency (MHz)	Modulation Data Rate	Peak Conducted Power (dBm)	Peak EIRP (dBm)	Peak Conducted Power Limit (dBm)	EIRP Limit (dBm)
High Power (30 dBm)					
2402.50	Data Rate 8	29.99	See Notes 1 & 2	30	36
2439.25	Data Rate 8	27.91	See Notes 1 & 2	30	36
2476.00	Data Rate 8	28.14	See Notes 1 & 2	30	36
2403.50	Data Rate 9	29.99	See Notes 1 & 2	30	36
2439.50	Data Rate 9	28.05	See Notes 1 & 2	30	36
2475.50	Data Rate 9	28.05	See Notes 1 & 2	30	36
2404.00	Data Rate 10	29.75	See Notes 1 & 2	30	36
2440.25	Data Rate 10	27.76	See Notes 1 & 2	30	36
2476.50	Data Rate 10	27.91	See Notes 1 & 2	30	36
2405.50	Data Rate 11	29.75	See Notes 1 & 2	30	36
2439.50	Data Rate 11	27.76	See Notes 1 & 2	30	36
2473.50	Data Rate 11	27.91	See Notes 1 & 2	30	36
Low Power (0 dBm)					
2402.50	Data Rate 8	0.63	See Notes 1 & 2	30	36
2439.25	Data Rate 8	-0.16	See Notes 1 & 2	30	36
2476.00	Data Rate 8	-0.24	See Notes 1 & 2	30	36
2403.50	Data Rate 9	0.61	See Notes 1 & 2	30	36
2439.50	Data Rate 9	-0.38	See Notes 1 & 2	30	36
2475.50	Data Rate 9	-0.44	See Notes 1 & 2	30	36
2404.00	Data Rate 10	-0.09	See Notes 1 & 2	30	36
2440.25	Data Rate 10	-0.97	See Notes 1 & 2	30	36
2476.50	Data Rate 10	-1.26	See Notes 1 & 2	30	36
2405.50	Data Rate 11	0.56	See Notes 1 & 2	30	36
2439.50	Data Rate 11	-0.63	See Notes 1 & 2	30	36
2473.50	Data Rate 11	0.32	See Notes 1 & 2	30	36

Notes:

1. The EIRP shall be calculated based on the transmitter antenna gain (G_{dBi}), cable loss (CL_{dB}) and peak output power at antenna terminal (P_{dBm}). Calculated EIRP = $P_{dBm} + G_{dBi} - CL_{dB}$
2. EIRP shall not exceed 36 dBm limit (Power Setting = $36\text{ dBm} - G_{dBi} + CL_{dB}$). See page 2 of the Operating Manual for instruction of power setting.

6.11. TRANSMITTER BAND-EDGE & SPURIOUS CONDUCTED EMISSIONS [§ 15.247(d)]


6.11.1. Limit

§ 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

6.11.2. Method of Measurements

- FCC Public Notice DA 00-705
- KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

6.11.3. Test Arrangement

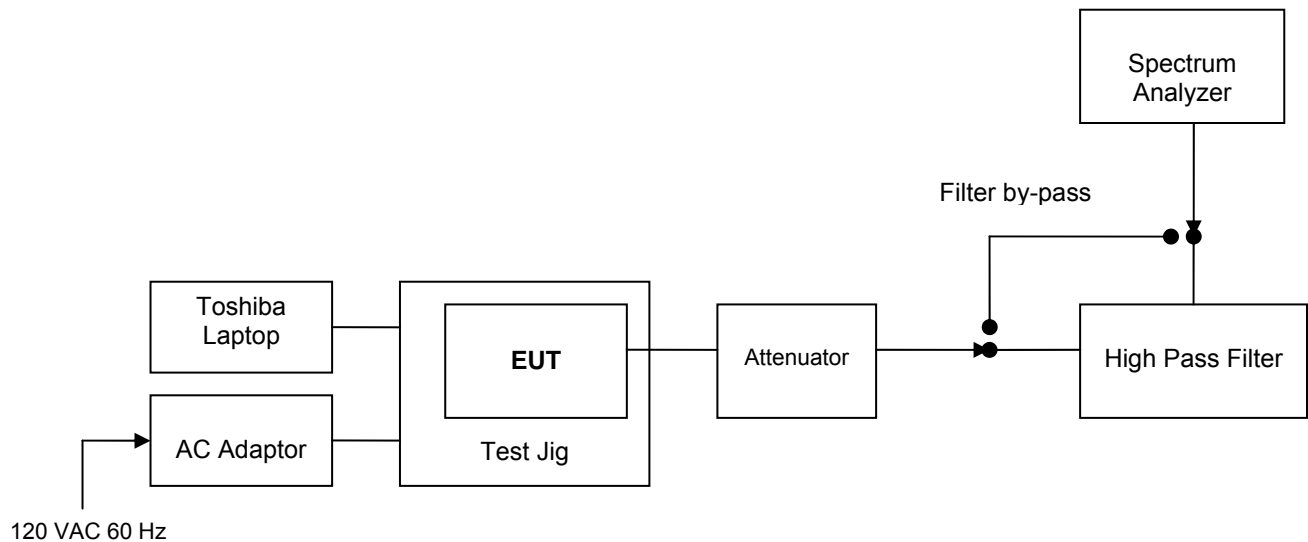

6.11.4. Test Equipment List


Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9kHz - 40GHz
High Pass Filter	K & L	11SH10-4000/T12000	4	1 - 26 GHz
Attenuator	Narda	4768-10	0702	DC -40GHz

6.11.5. Test Data


6.11.5.1. Band-Edge RF Conducted Emissions - FHSS

See the following test data plots for measurement results:

Plot 6.11.5.1.1 Band-Edge RF Conducted Emissions -FHSS
Low End of Frequency Band
Single Frequency Mode

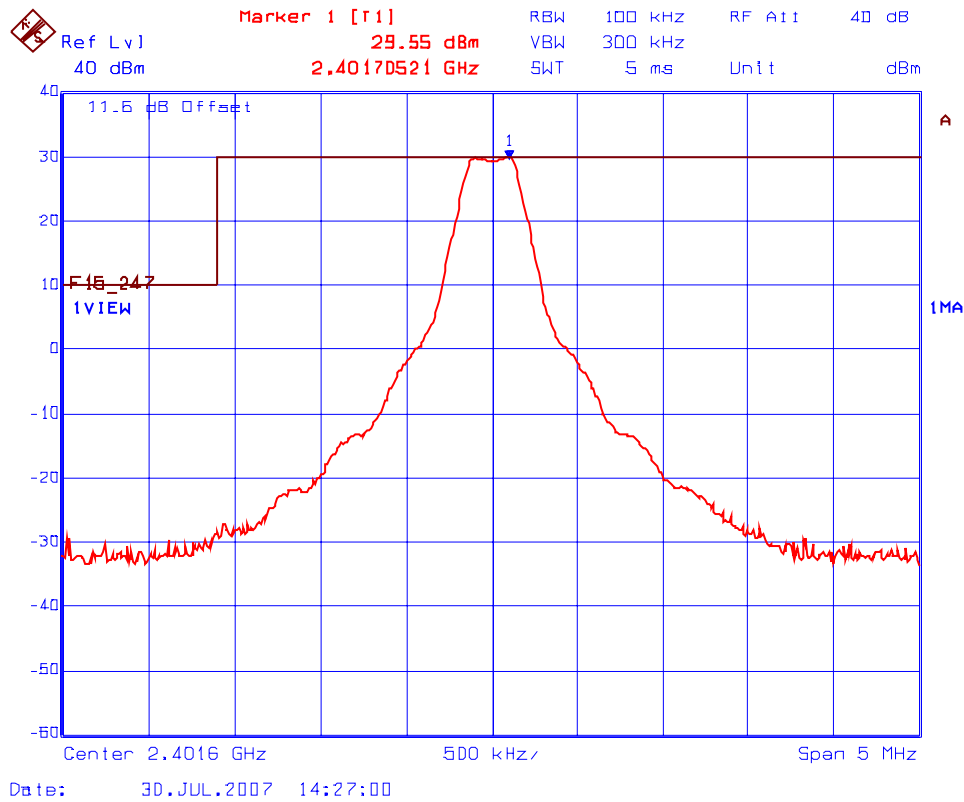

Plot 6.11.5.1.2 Band-Edge RF Conducted Emissions -FHSS
Low End of Frequency Band
Pseudorandom Channel Hopping Mode

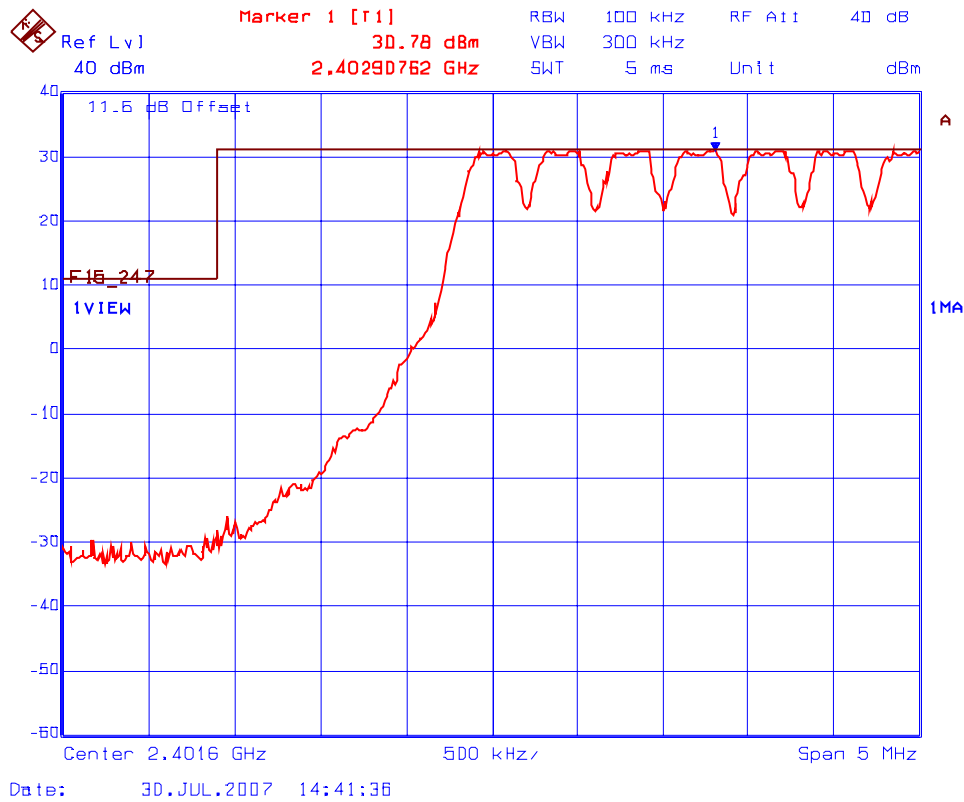


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.11.5.1.3 Band-Edge RF Conducted Emissions -FHSS
High End of Frequency Band
Single Frequency Mode

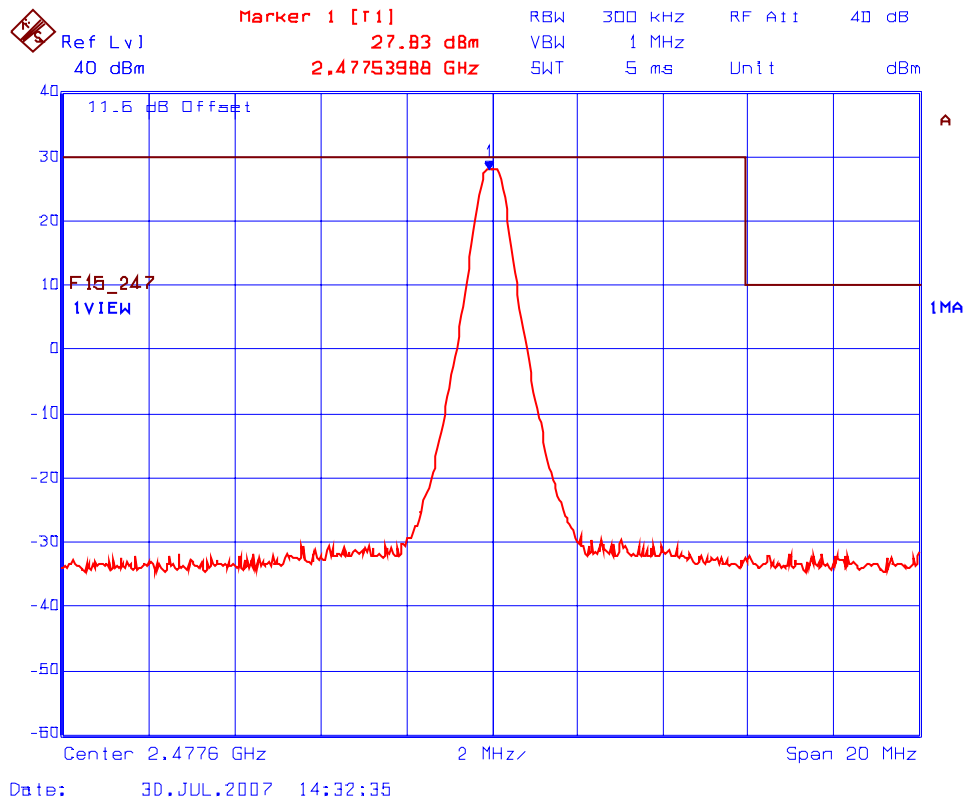


Plot 6.11.5.1.4 Band-Edge RF Conducted Emissions -FHSS
High End of Frequency Band
Pseudorandom Channel Hopping Mode

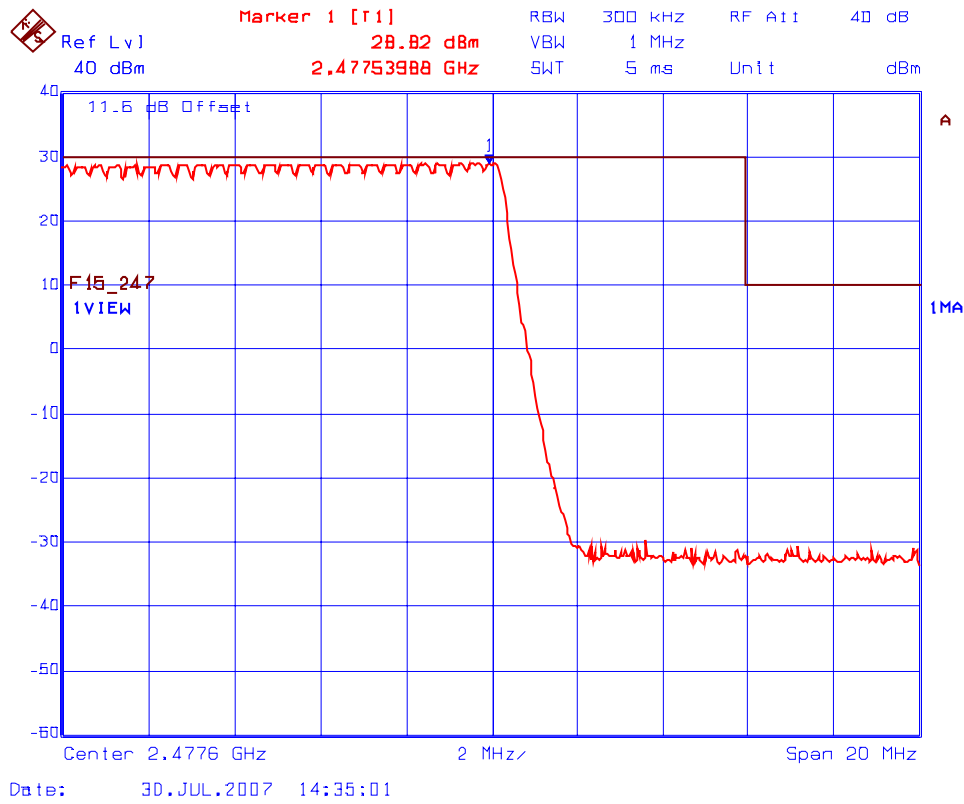


6.11.5.2. Band-Edge RF Conducted Emissions - DTS

See the following test data plots for measurement results:


Plot 6.11.5.2.1 Band-Edge RF Conducted Emissions - DTS
Low End of Frequency Band (2402.50 MHz at Data Rate 8)

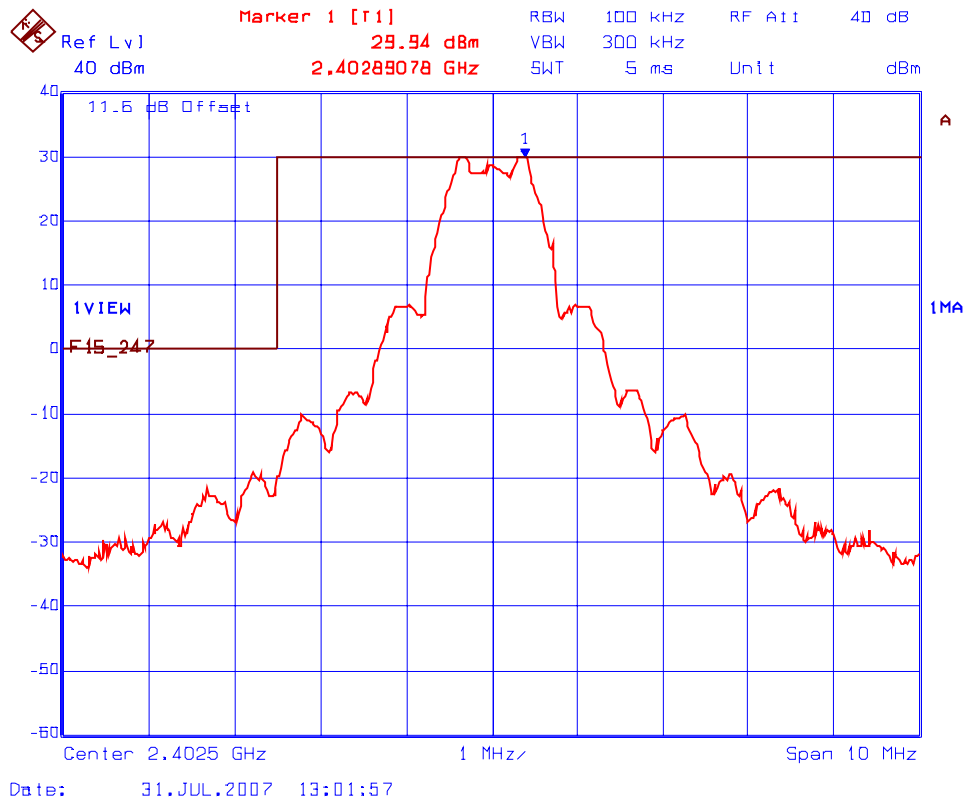


**Plot 6.11.5.2.2 Band-Edge RF Conducted Emissions - DTS
High End of Frequency Band (2476.00 MHz at Data Rate 8)**

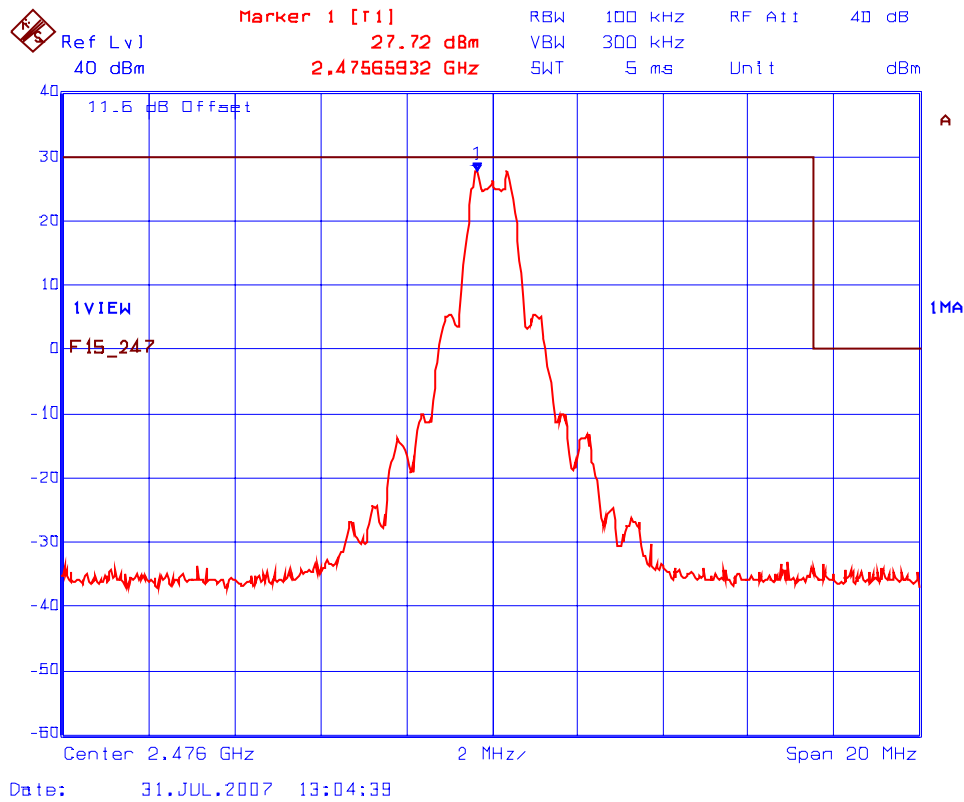


Plot 6.11.5.2.3 Band-Edge RF Conducted Emissions - DTS
Low End of Frequency Band (2403.50 MHz at Data Rate 9)

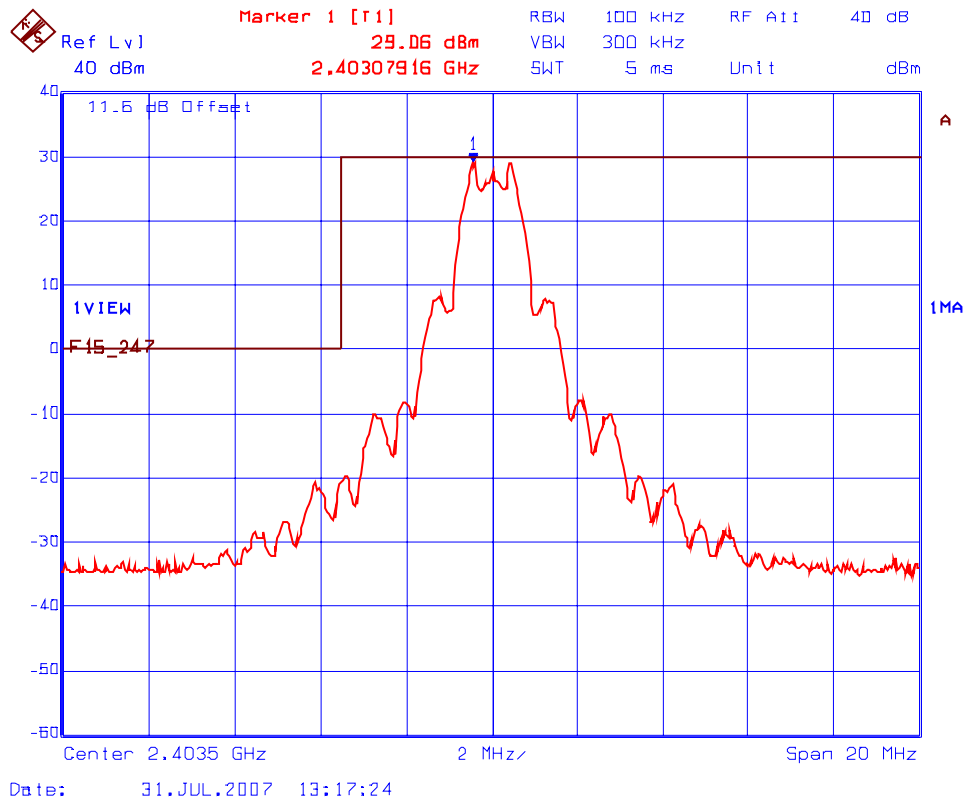


**Plot 6.11.5.2.4 Band-Edge RF Conducted Emissions - DTS
High End of Frequency Band (2475.50 MHz at Data Rate 9)**

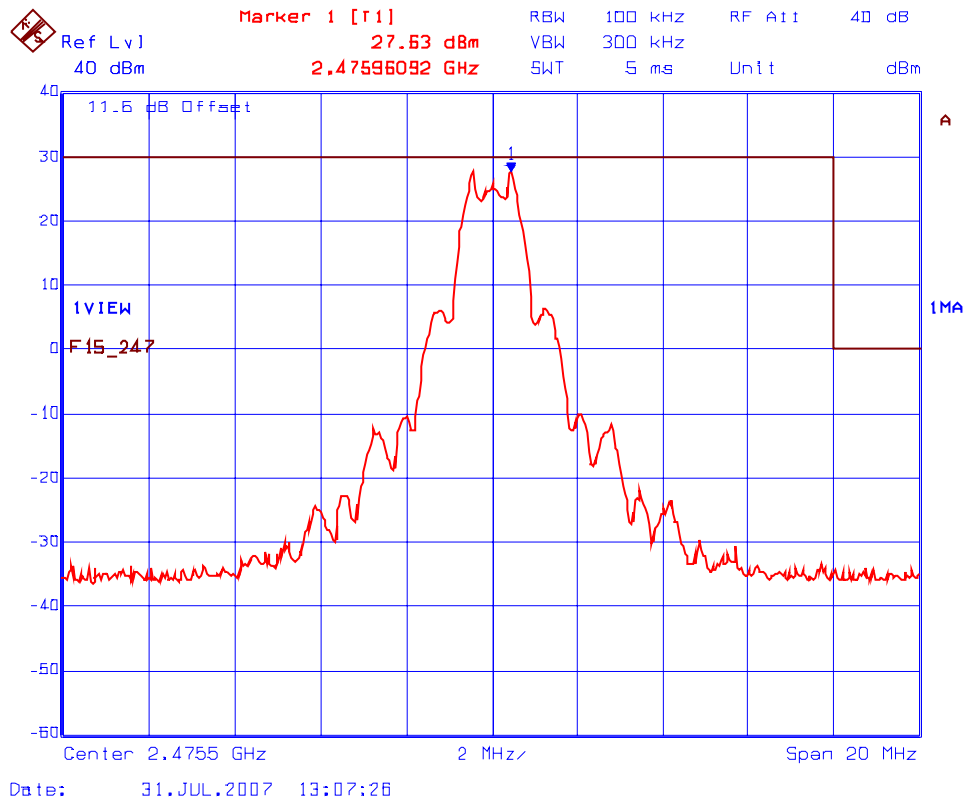


Plot 6.11.5.2.5 Band-Edge RF Conducted Emissions - DTS
Low End of Frequency Band (2404.00 MHz at Data Rate 10)

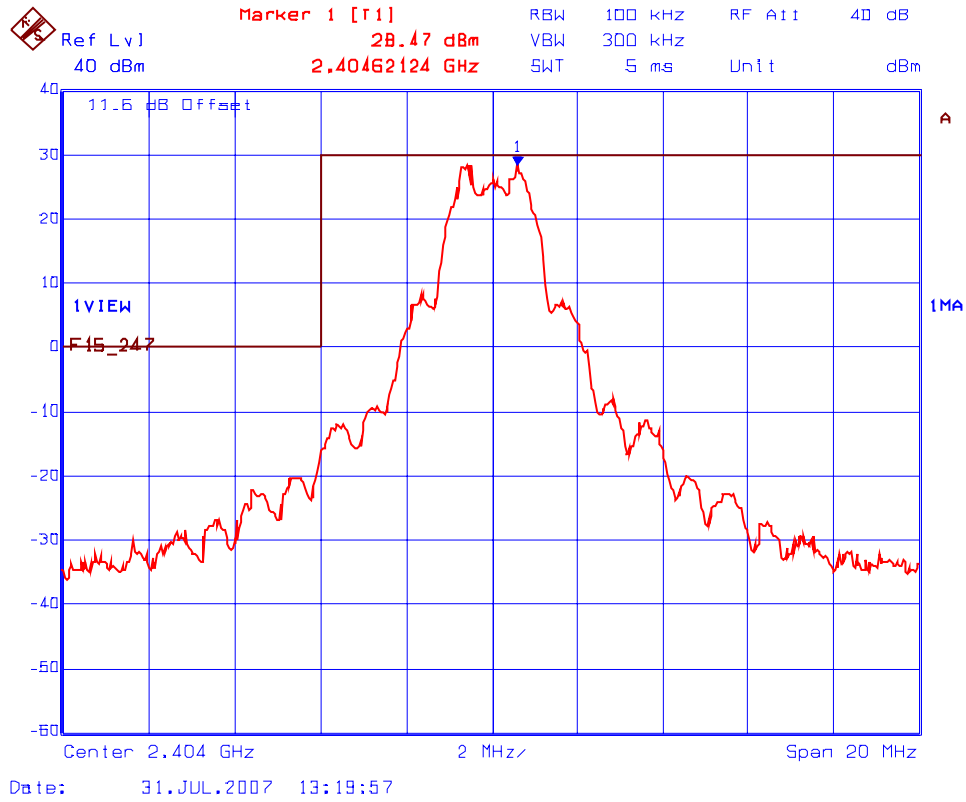


**Plot 6.11.5.2.6 Band-Edge RF Conducted Emissions - DTS
High End of Frequency Band (2476.50 MHz at Data Rate 10)**

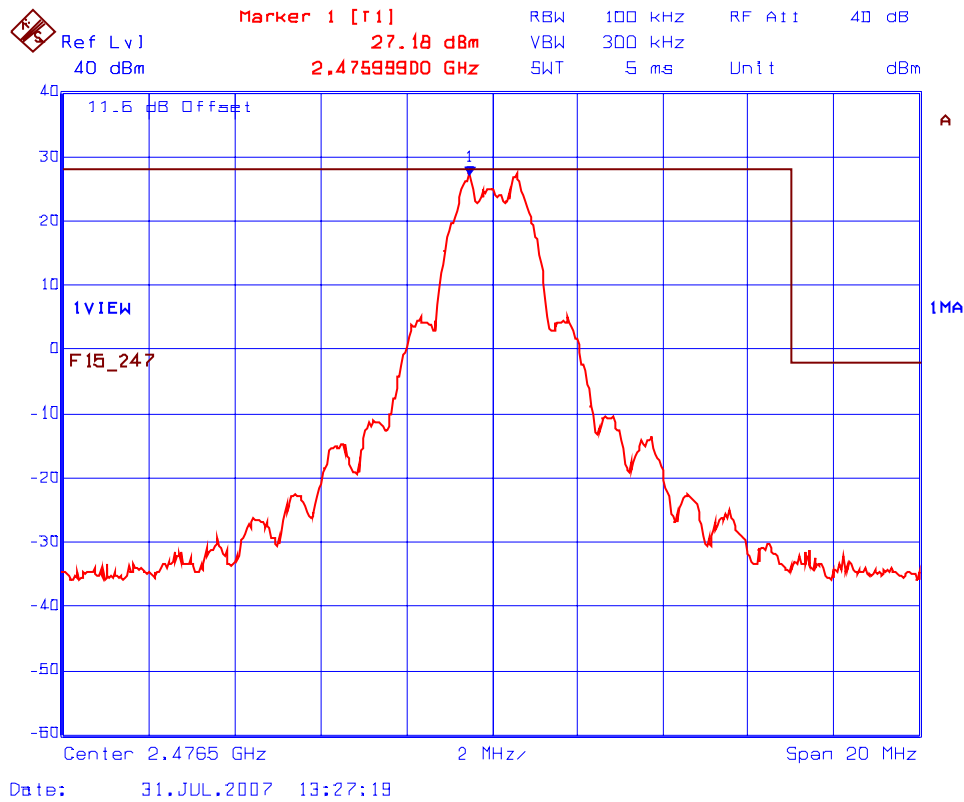

Plot 6.11.5.2.7 Band-Edge RF Conducted Emissions - DTS
Low End of Frequency Band (2405.50 MHz at Data Rate 11)

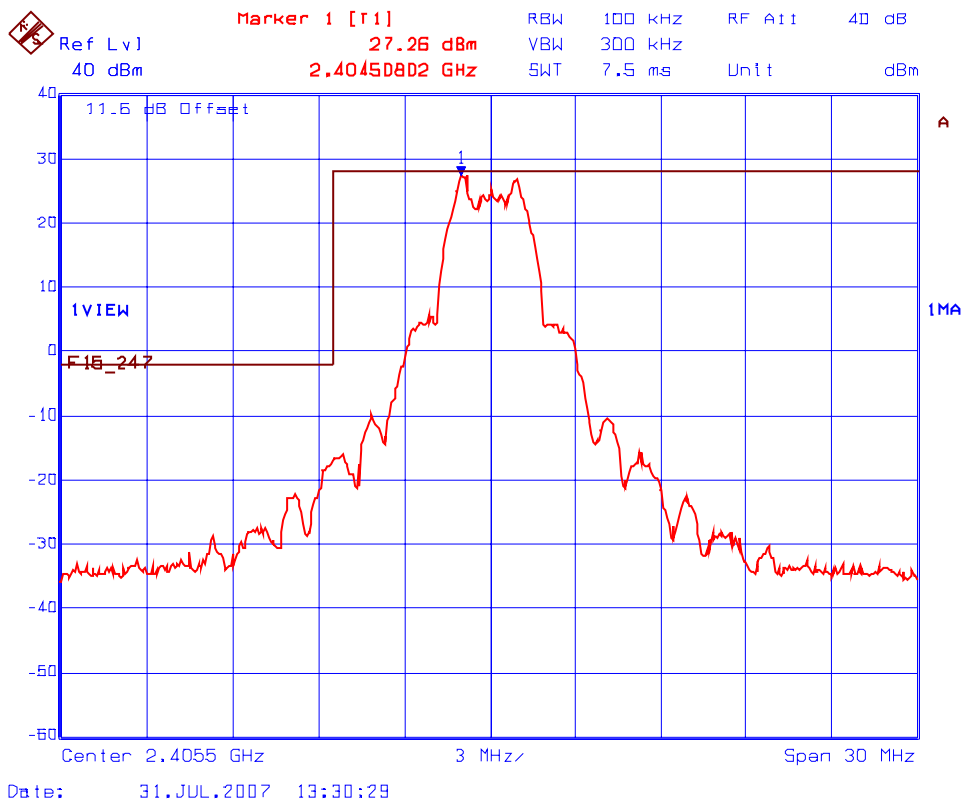


**Plot 6.11.5.2.8 Band-Edge RF Conducted Emissions - DTS
High End of Frequency Band (2473.50 MHz at Data Rate 11)**

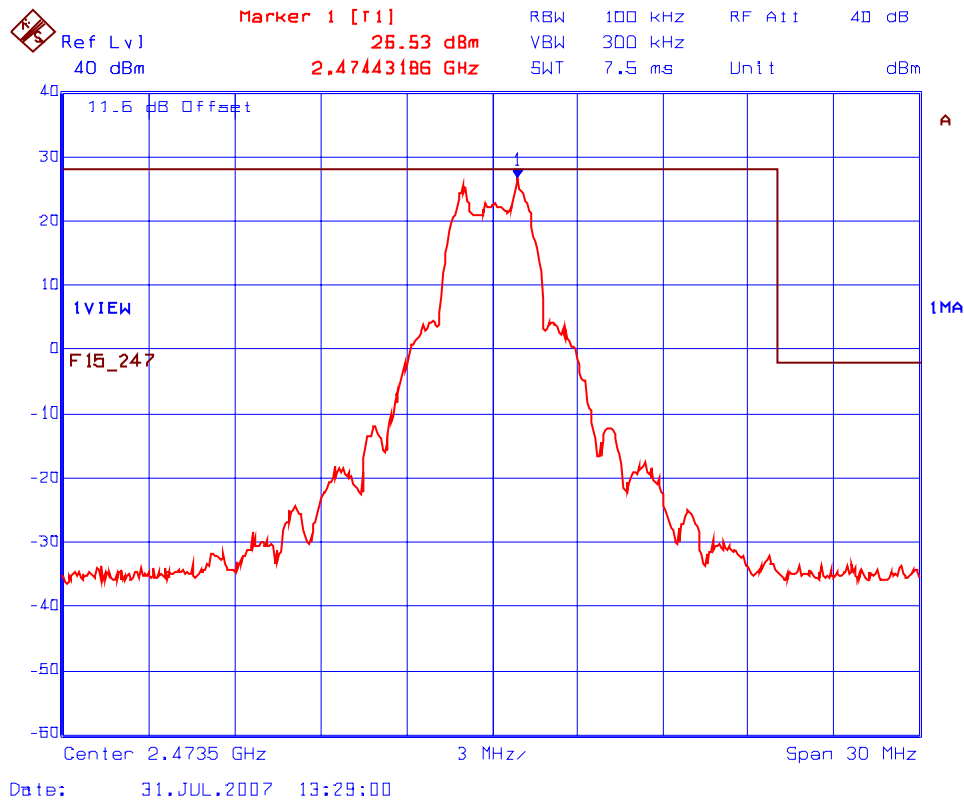


6.11.5.3. Spurious RF Conducted Emissions

The emissions were scanned from 10 MHz to 25 GHz; see the following test data plots for measurement results.


Plot 6.11.5.3.1 Spurious RF Conducted Emissions
Transmitter Frequency: 2401.6 MHz at 1W Output Power

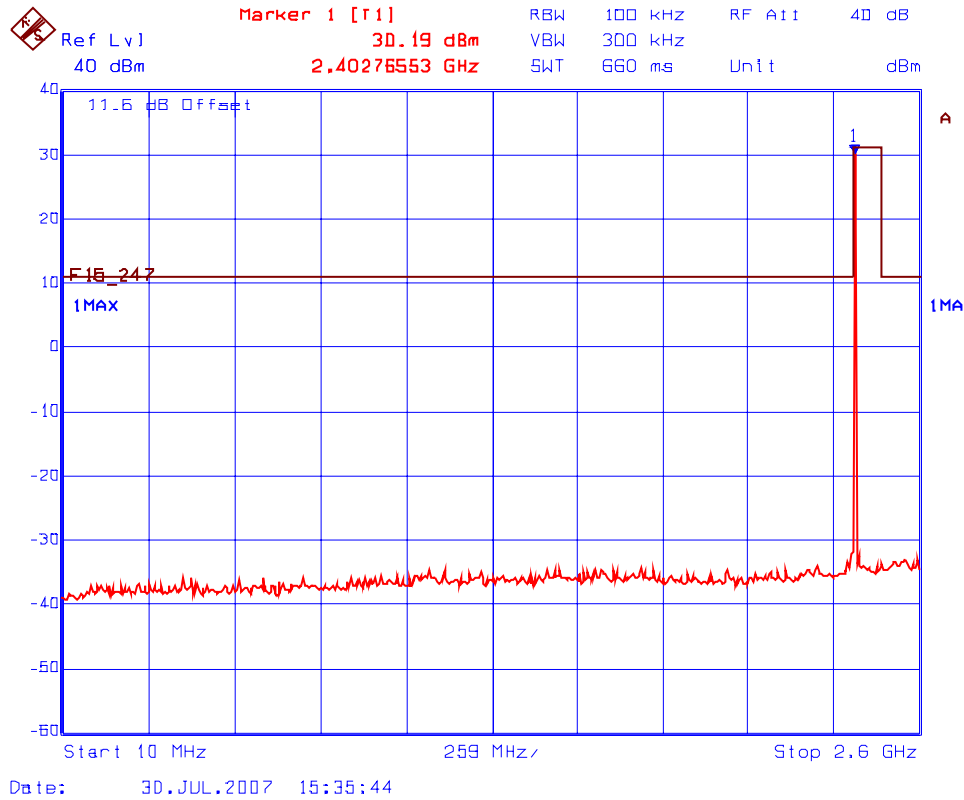


Plot 6.11.5.3.2 Spurious RF Conducted Emissions
Transmitter Frequency: 2401.6 MHz at 1W Output Power

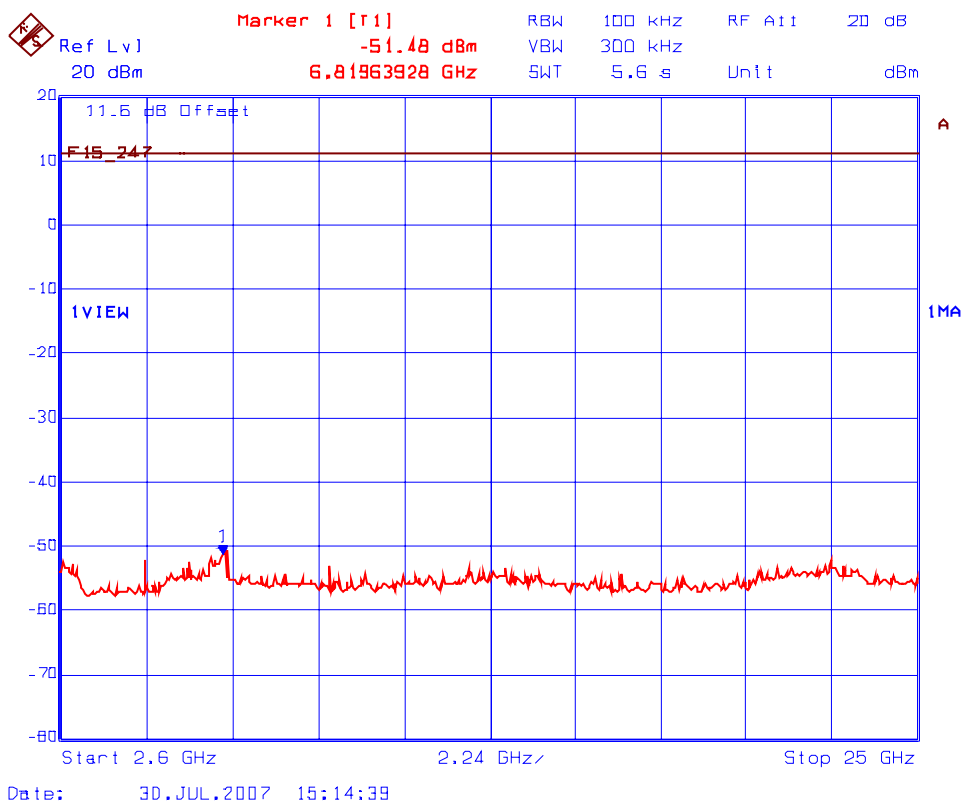


Plot 6.11.5.3.3 Spurious RF Conducted Emissions
Transmitter Frequency: 2401.6 MHz at 1mW Output Power

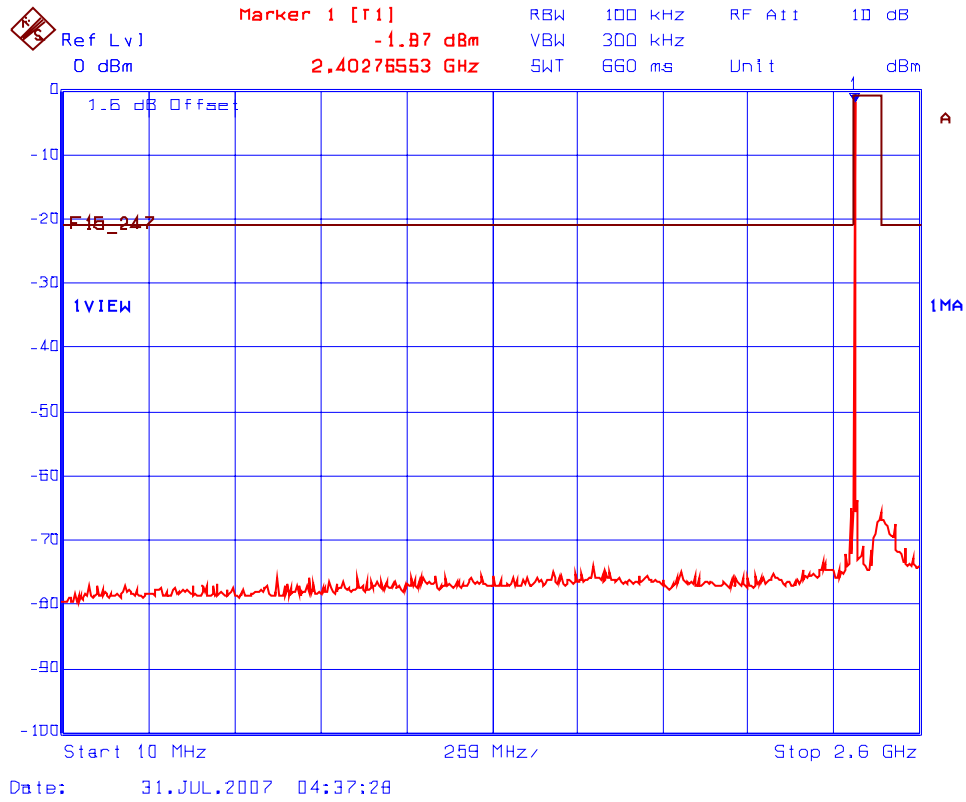


Plot 6.11.5.3.4 Spurious RF Conducted Emissions
 Transmitter Frequency: 2401.6 MHz at 1mW Output Power

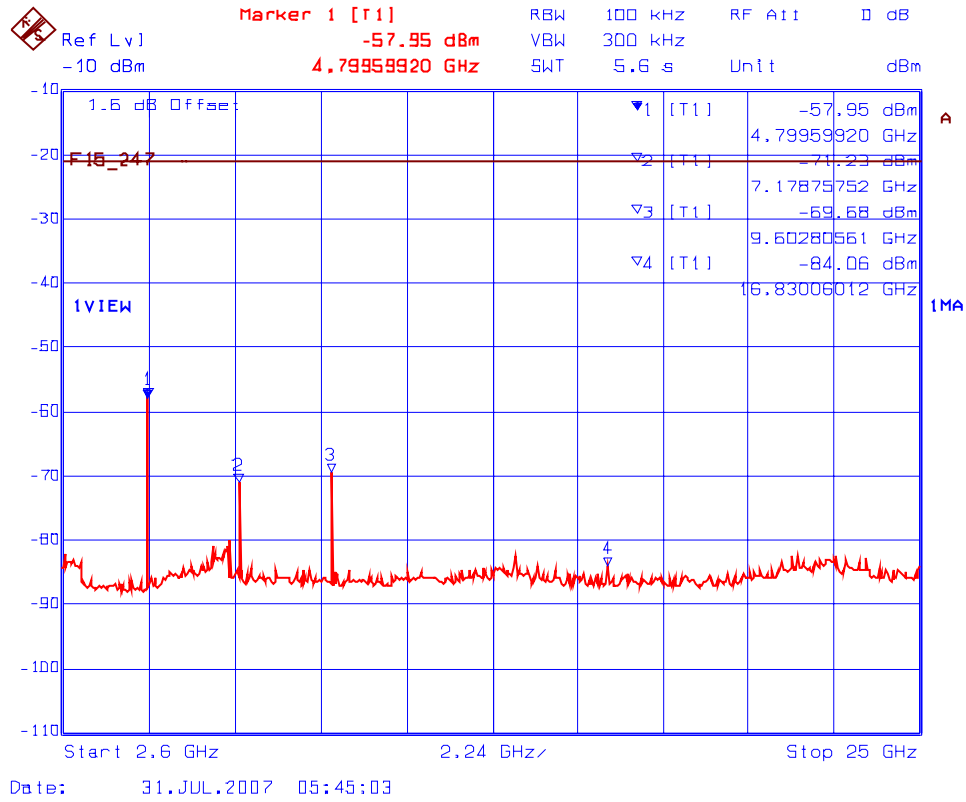


Plot 6.11.5.3.5 Spurious RF Conducted Emissions
Transmitter Frequency: 2439.6 MHz at 1W Output Power

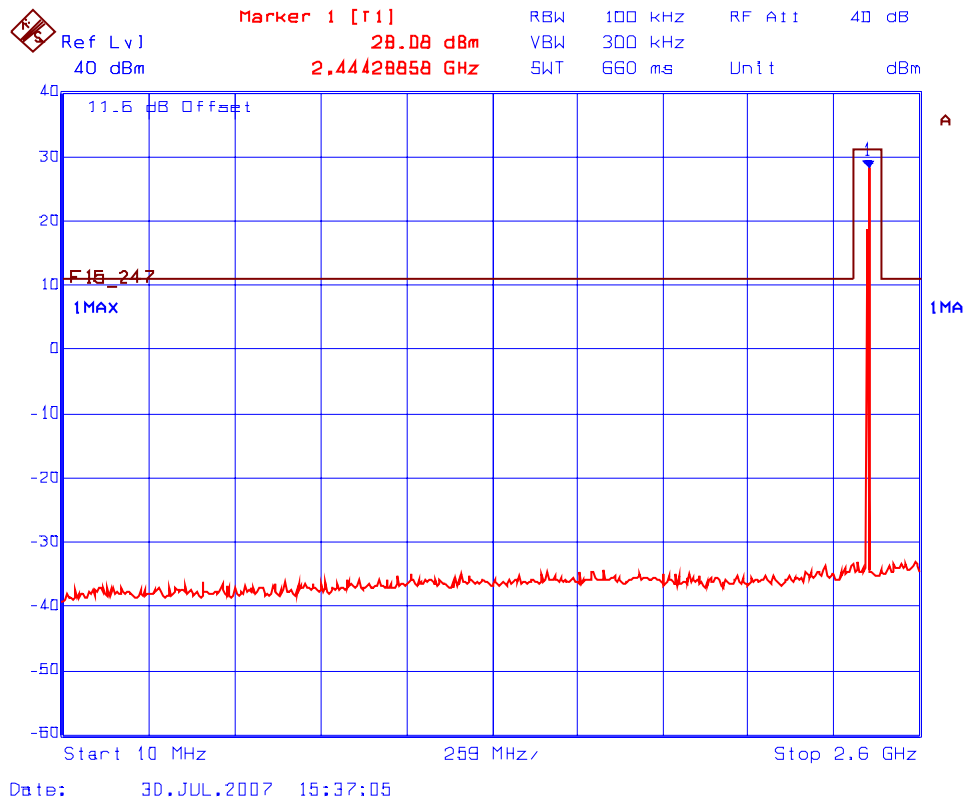


Plot 6.11.5.3.6 Spurious RF Conducted Emissions
Transmitter Frequency: 2439.6 MHz at 1W Output Power

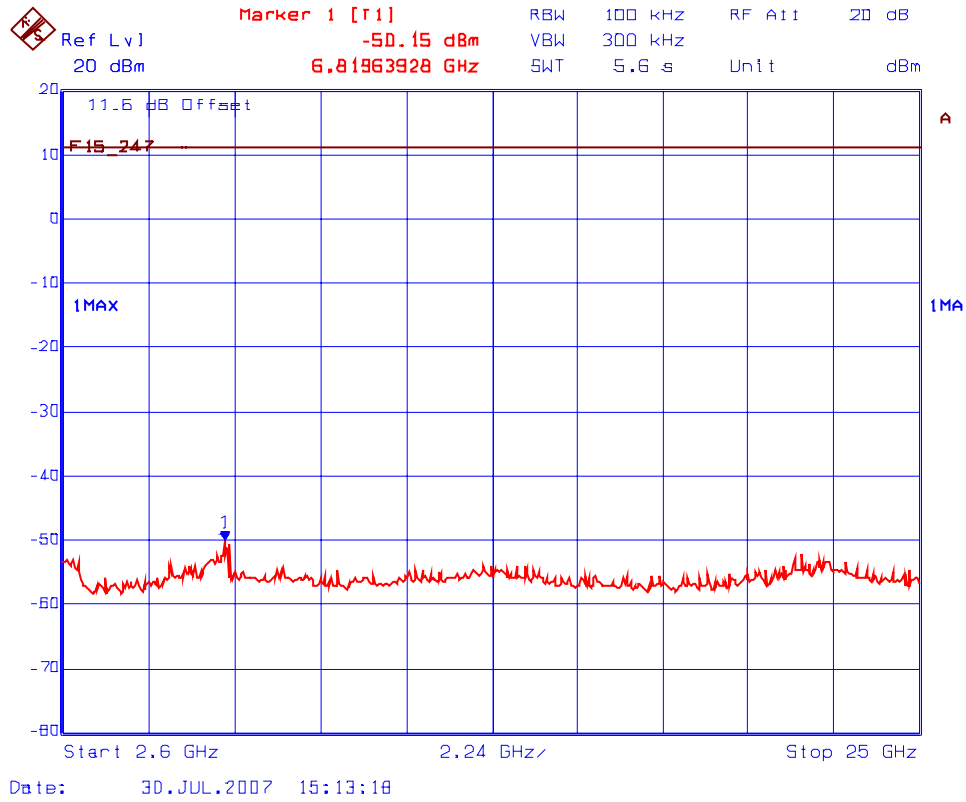


Plot 6.11.5.3.7 Spurious RF Conducted Emissions
Transmitter Frequency: 2439.6 MHz at 1mW Output Power

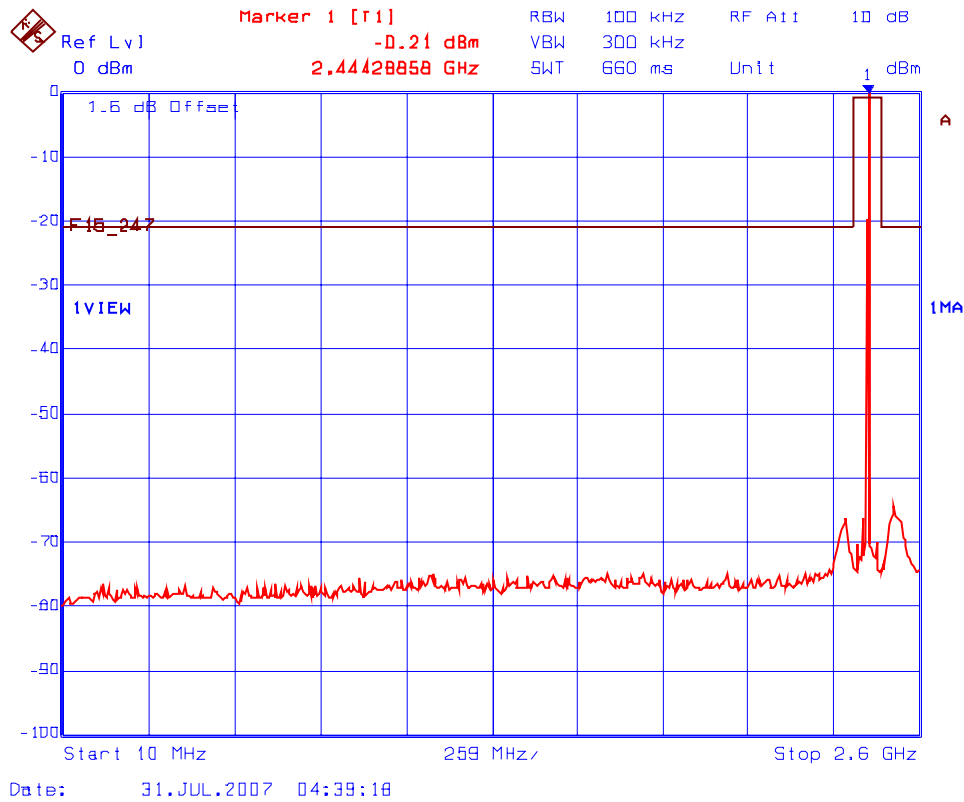


Plot 6.11.5.3.8 Spurious RF Conducted Emissions
 Transmitter Frequency: 2439.6 MHz at 1mW Output Power

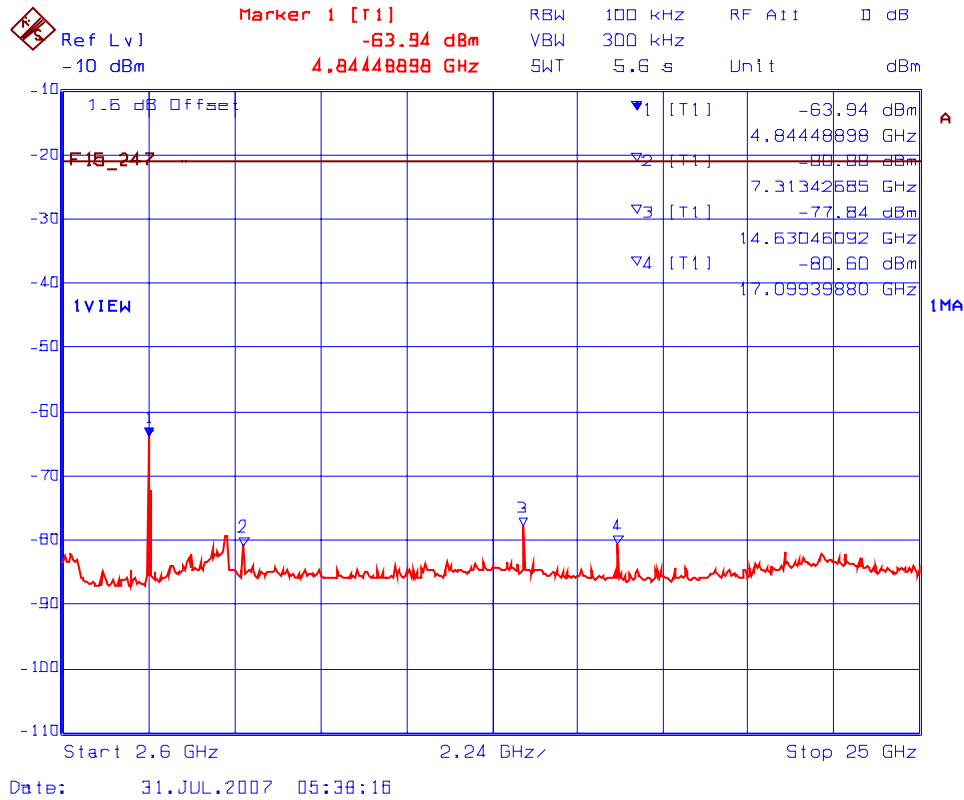


Plot 6.11.5.3.9 Spurious RF Conducted Emissions
Transmitter Frequency: 2477.6 MHz at 1W Output Power

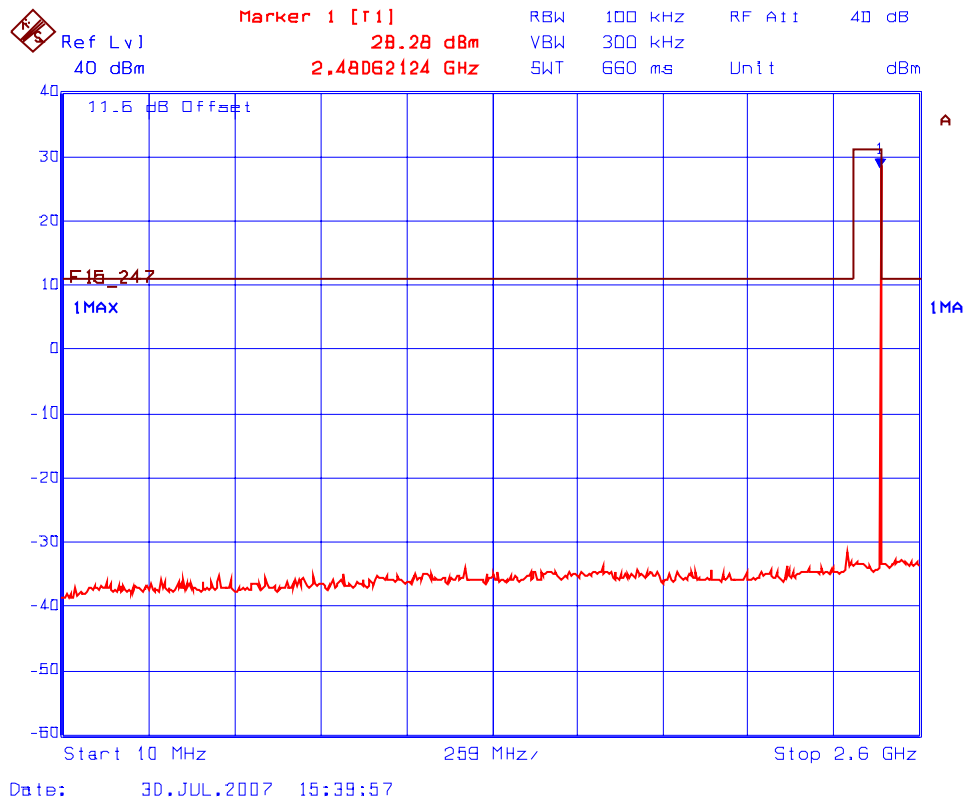


Plot 6.11.5.3.10 Spurious RF Conducted Emissions
Transmitter Frequency: 2477.6 MHz at 1W Output Power

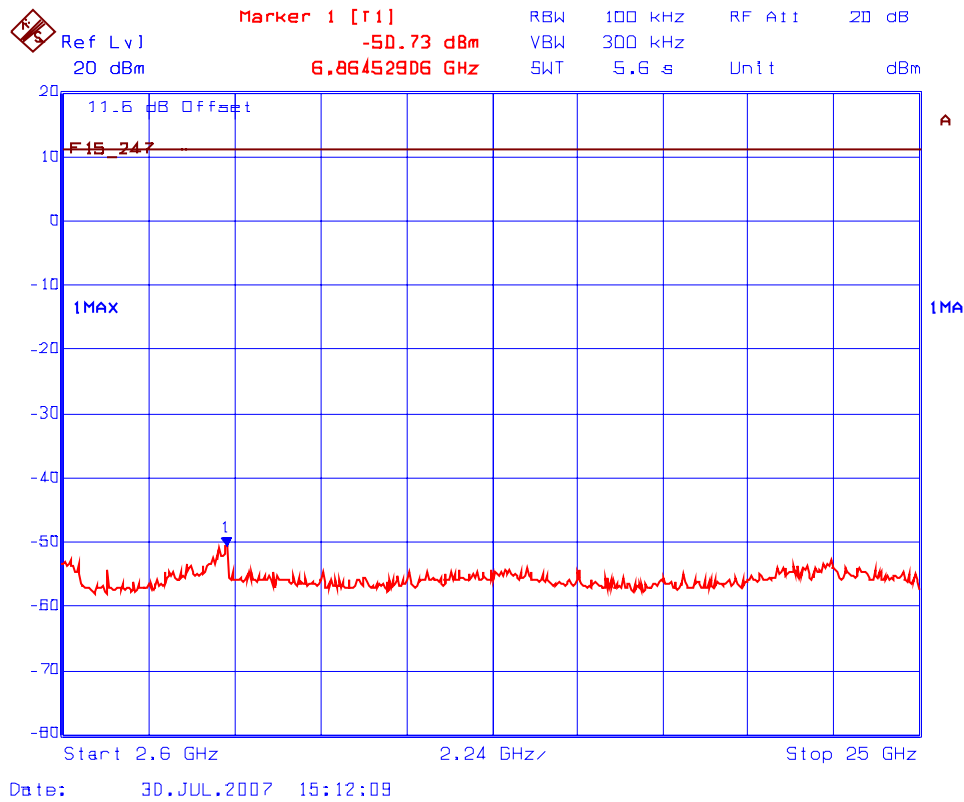

Plot 6.11.5.3.11 Spurious RF Conducted Emissions
Transmitter Frequency: 2477.6 MHz at 1mW Output Power

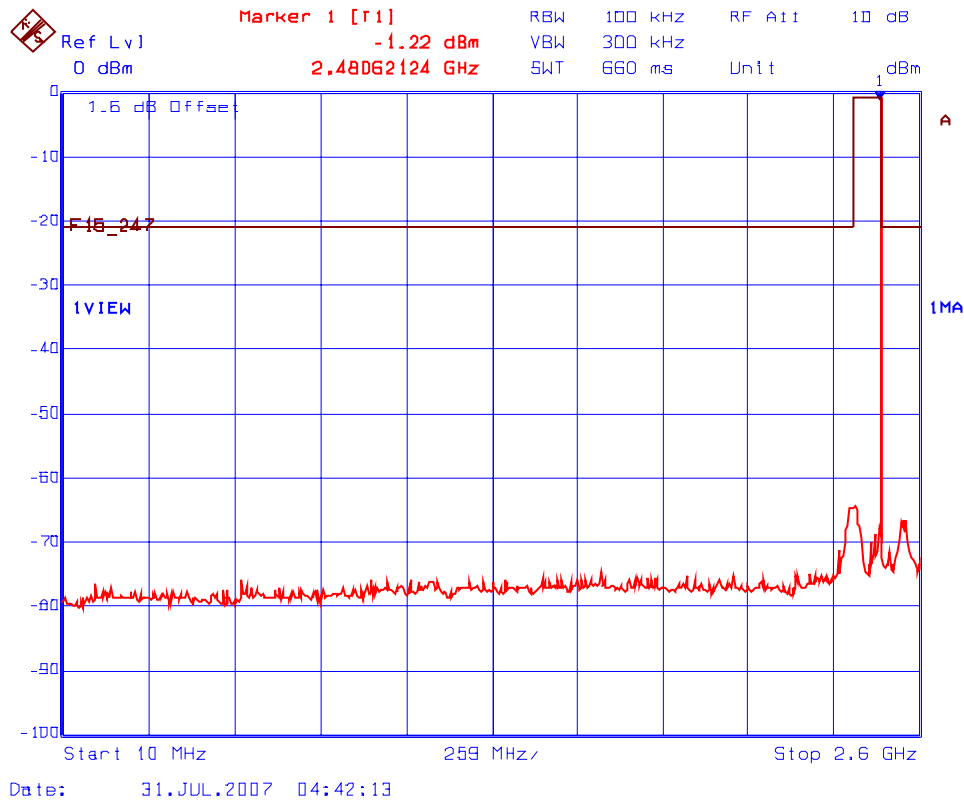

Plot 6.11.5.3.12 Spurious RF Conducted Emissions
 Transmitter Frequency: 2477.6 MHz at 1mW Output Power

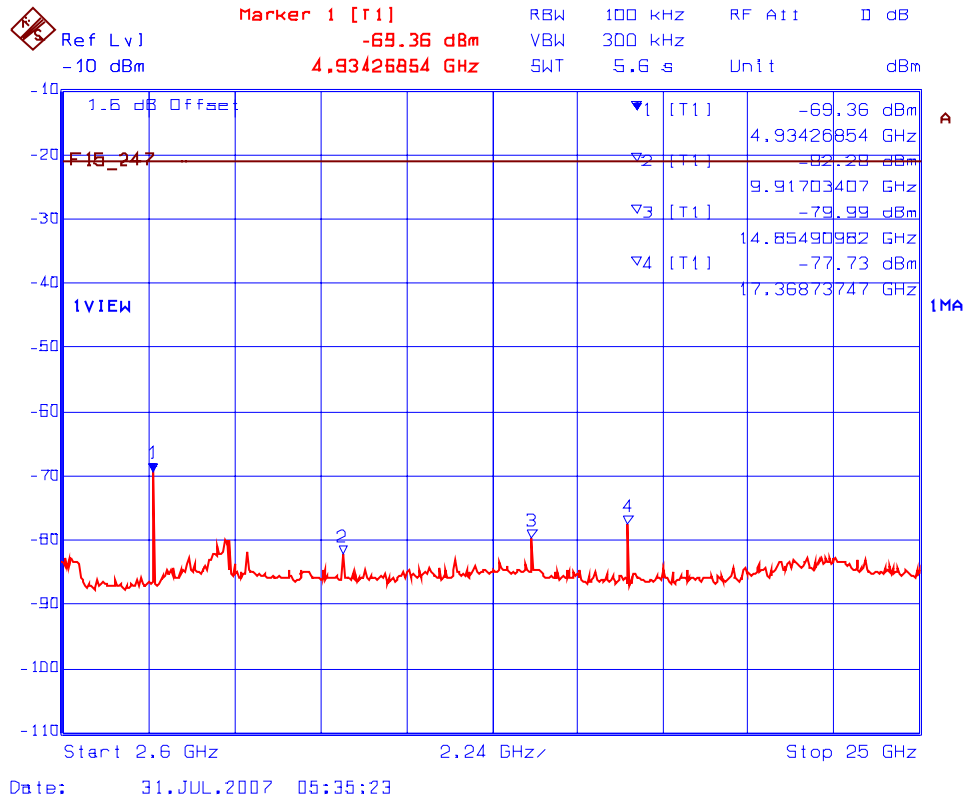

6.12. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205]

6.12.1. Limit

§ 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Section 15.205(a) - Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

² Above 38.6

Section 15.209(a) -- Field Strength Limits within Restricted Frequency Bands --

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


6.12.2. Method of Measurements

ANSI 63.4 for detailed radiated emissions measurement procedures.

The following measurement procedures were also applied:

- Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.
- For measurement below 1 GHz, set RBW = 100 KHz, VBW \geq 100 KHz, SWEEP=AUTO.
- For measurement above 1 GHz, set RBW = 1 MHz, VBW = 1 MHz (Peak) & VBW = 10 Hz (Average), SWEEP=AUTO.
- If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

6.12.3. Test Arrangement

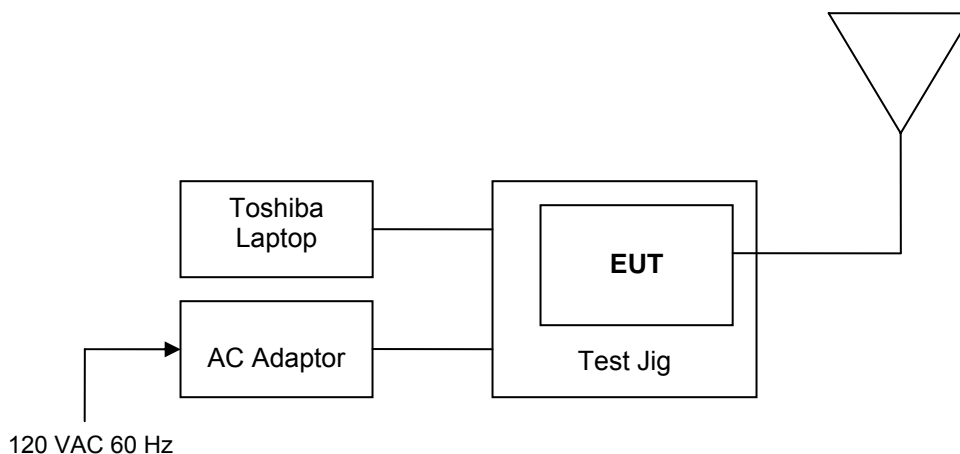

6.12.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9kHz – 40GHz
Microwave Amplifier	Hewlett Packard	8449B	3008A00769	1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-9	1007	18 GHz – 26.5 GHz

6.12.5. Test Data


The following test results are the worst-case measurements.

6.12.5.1. EUT with 2 dBi Rubber Ducky Antenna and 1.01 dB Assembly Cable Loss


Fundamental Frequency:		2401.6 MHz					
Software Power Setting:		255					
Measured Conducted Power:		30.09 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2401.6	131.87	--	V	--	--	--	--
2401.6	132.21	--	H	--	--	--	--
4803.2	52.57	45.76	V	54.0	112.2	-8.2	Pass*
4803.2	50.57	43.72	H	54.0	112.2	-10.3	Pass*
12008.0	59.87	50.44	V	54.0	112.2	-3.6	Pass*
12008.0	58.94	49.53	H	54.0	112.2	-4.5	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							

* Emission within the restricted frequency bands.

Plot 6.12.5.1.1(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

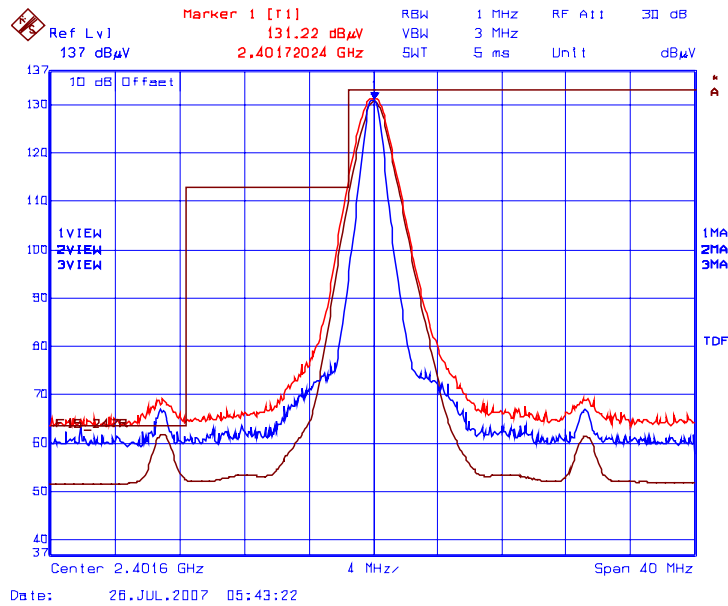


Plot 6.12.5.1.1(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

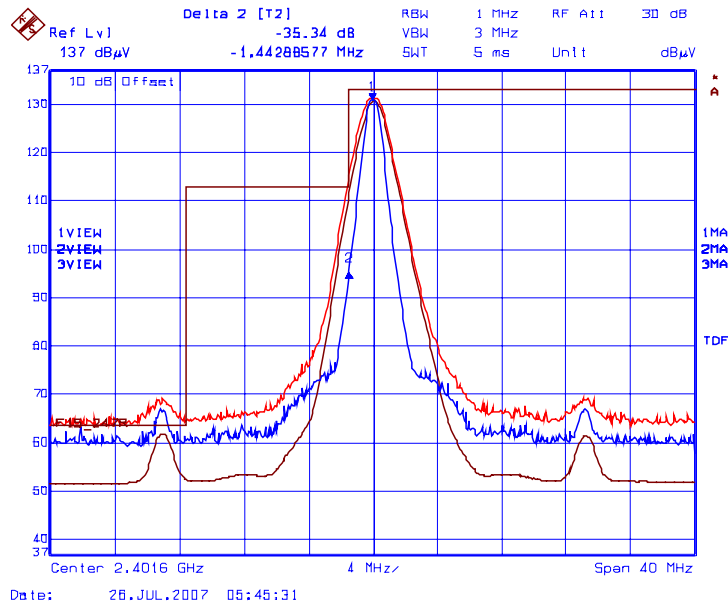


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.34 dB
 Trace 3: RBW= 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 131.22 dBµV/m – 35.34 dB= 95.88 dBµV/m (limit 111.22 dBµV/m)

Plot 6.12.5.1.2(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

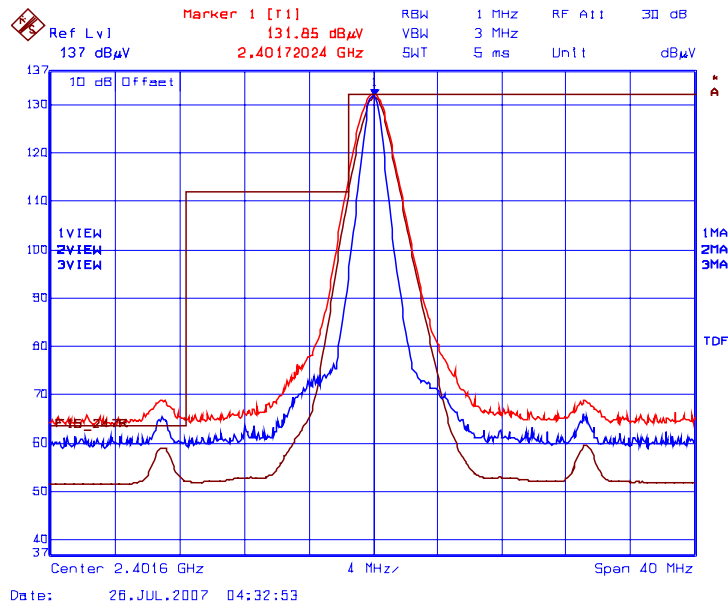


Plot 6.12.5.1.2(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

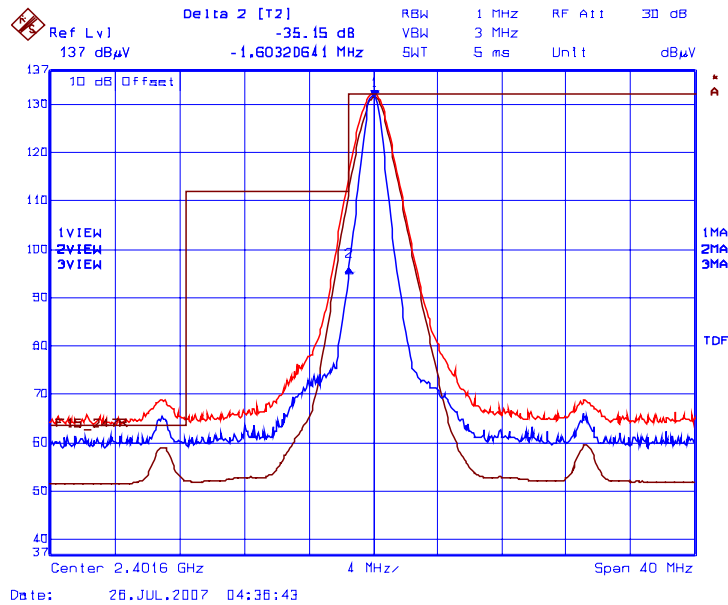


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 33.96 dB
 Trace 3: RBW= 1 MHz, VBW= 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 131.76 dBµV/m – 33.96 dB = 97.8 dBµV/m (limit 111.76 dBµV/m)

Plot 6.12.5.1.3(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

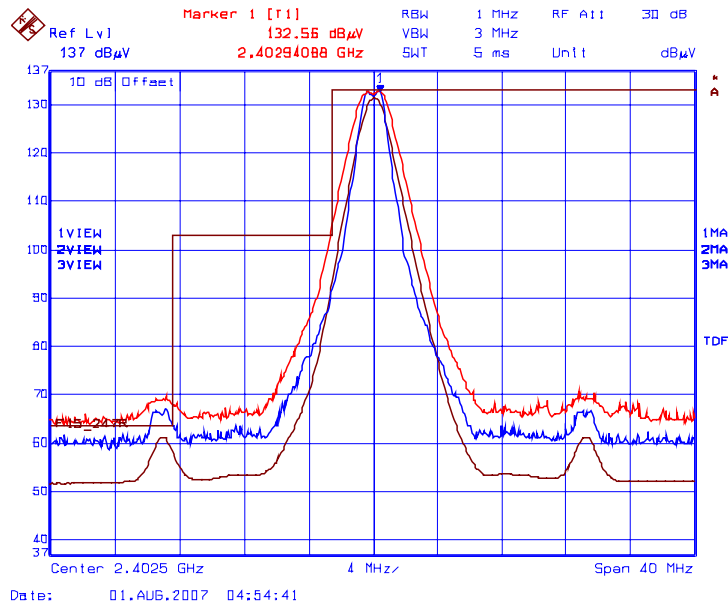


Plot 6.12.5.1.3(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

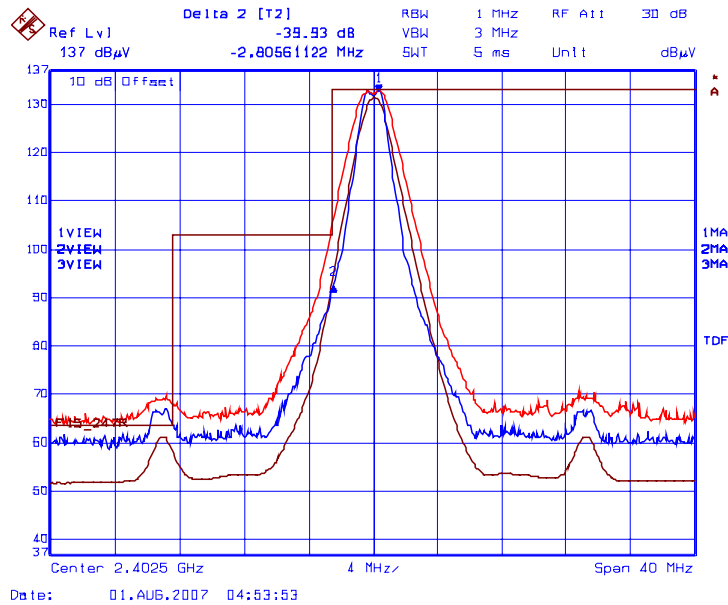


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 39.93 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 132.56 dBμV/m – 39.93 dB = 92.63 dBμV/m (limit 102.56 dBμV/m)

Plot 6.12.5.1.4(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

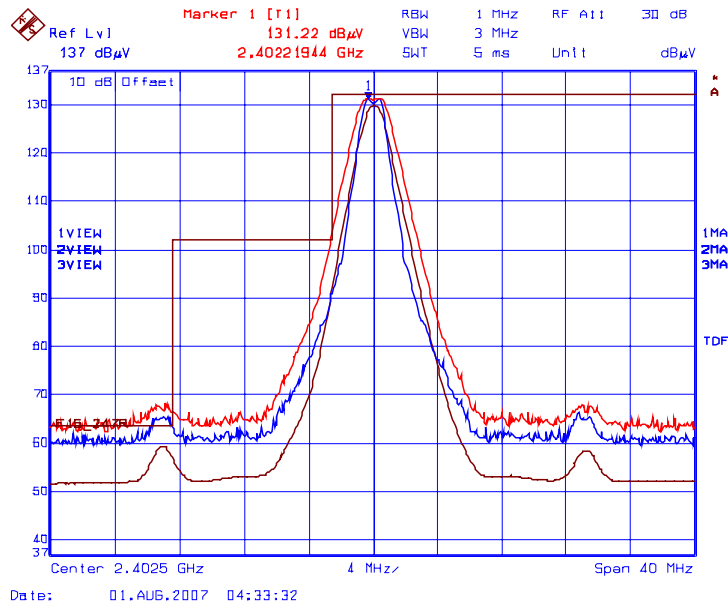


Plot 6.12.5.1.4(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

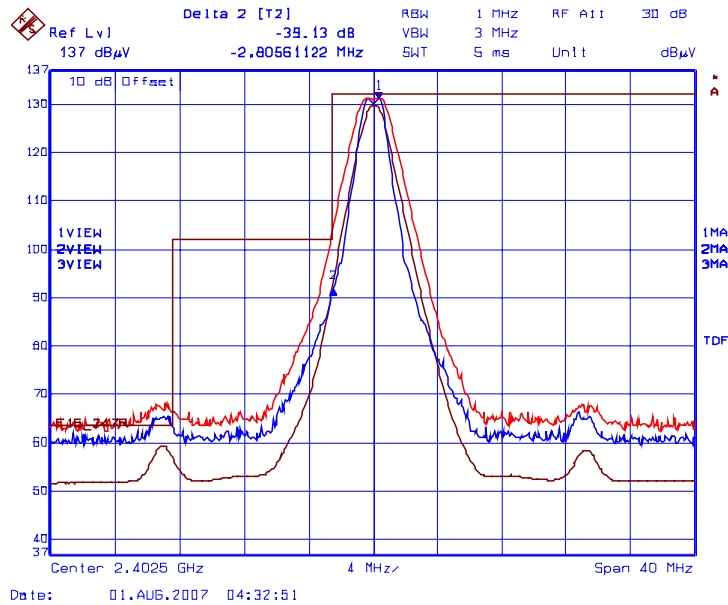


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 39.13 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 131.22 dBµV/m – 39.13 dB= 92.09 dBµV/m (limit 101.22 dBµV/m)

Plot 6.12.5.1.5 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

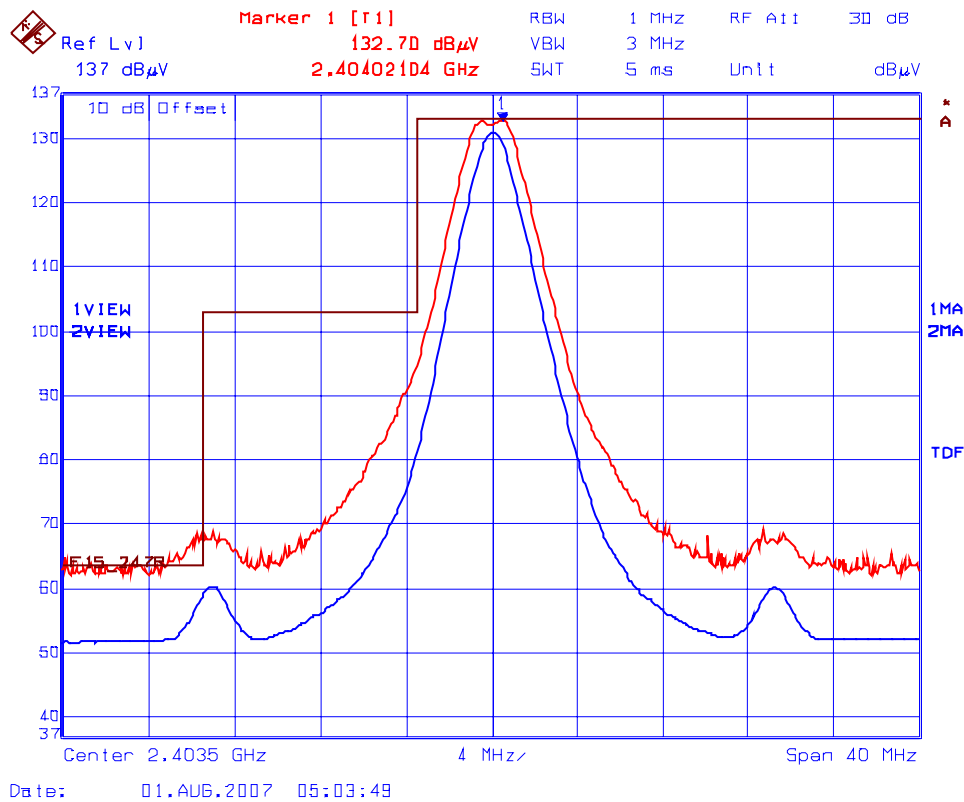


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.6 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

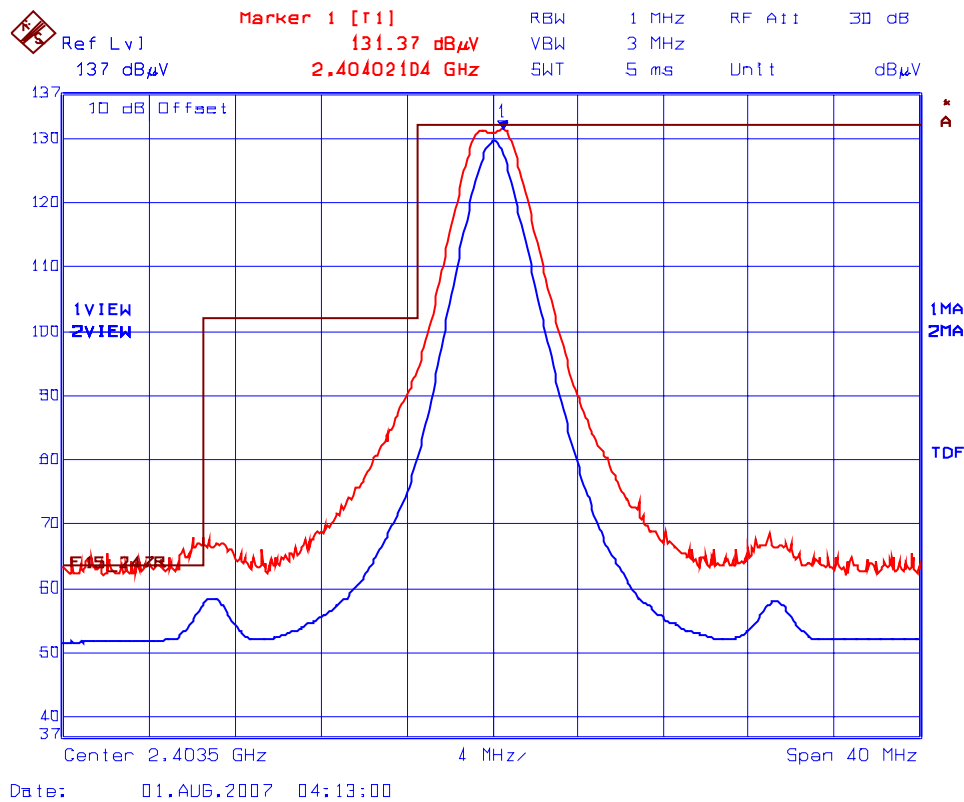


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.7 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Horizontal

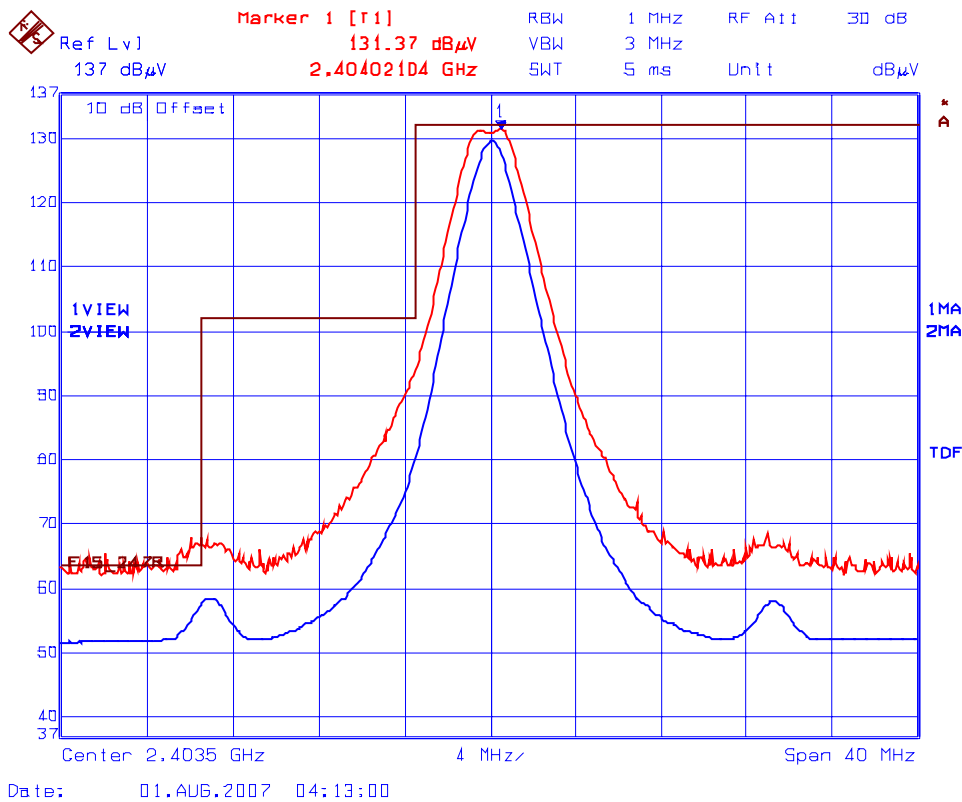


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.8 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Vertical

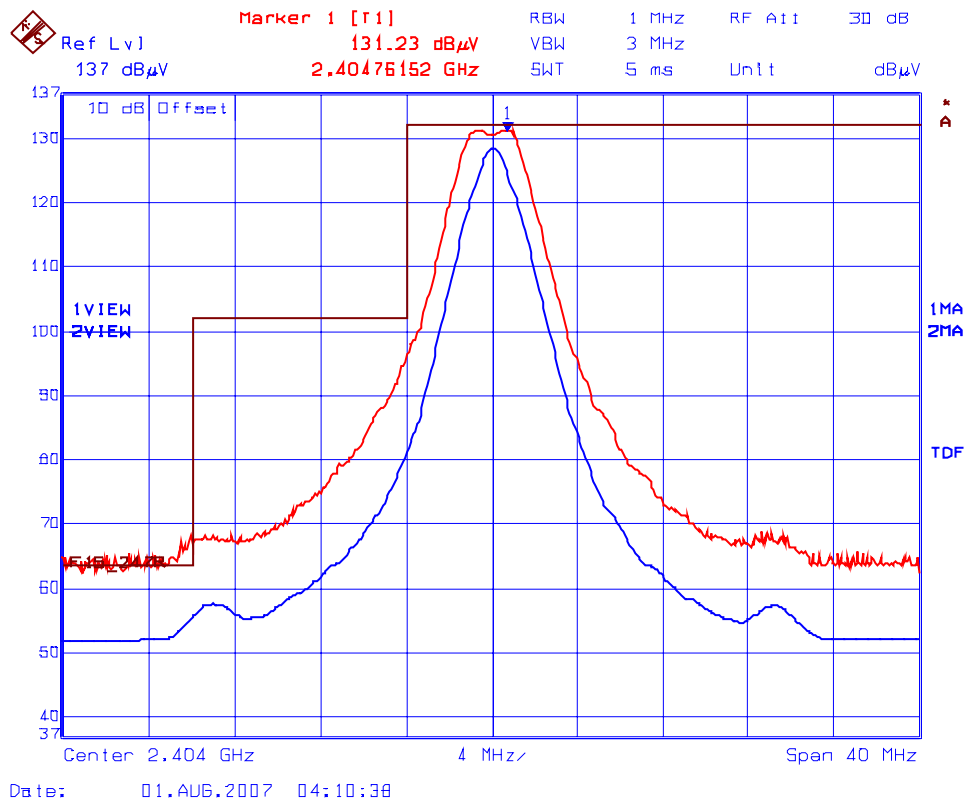


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.9 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Horizontal

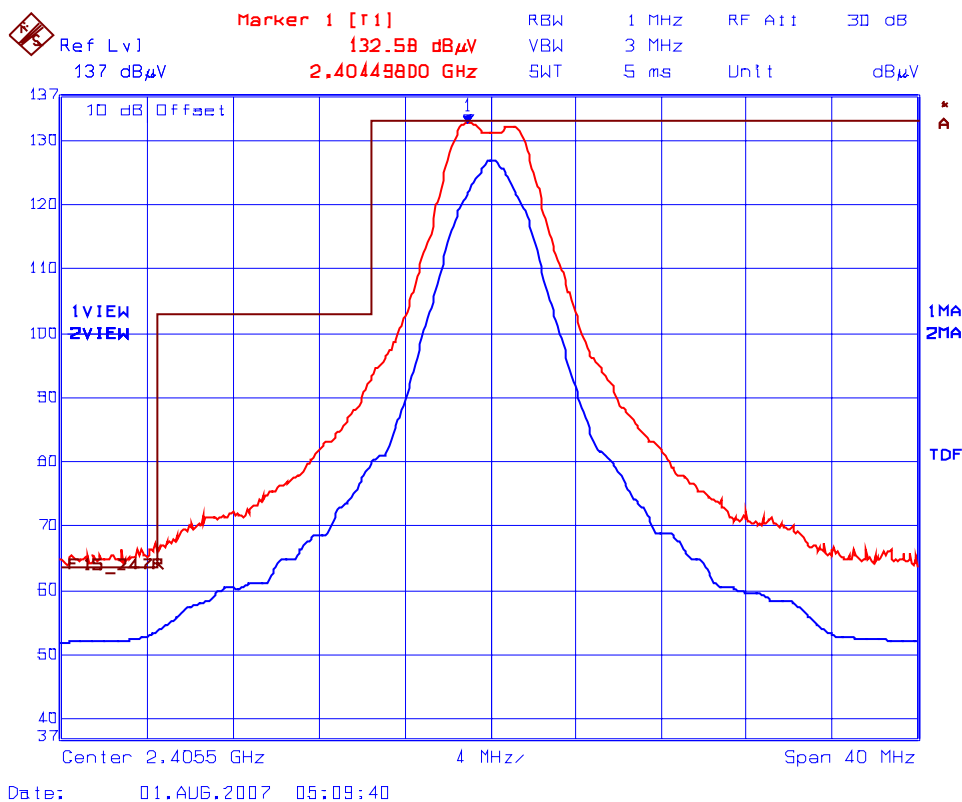

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.10 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Vertical

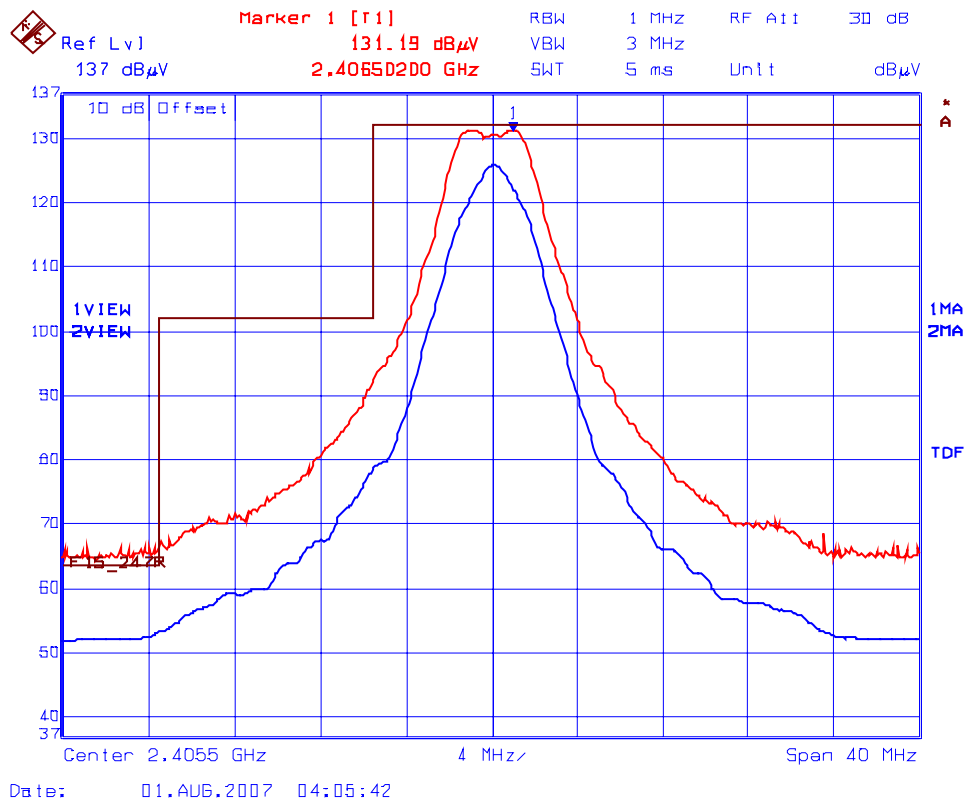

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz


Fundamental Frequency: 2439.6 MHz							
Software Power Setting: 255							
Measured Conducted Power: 28.76 dBm							
Frequency Test Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2439.6	129.45	--	V	--	--	--	--
2439.6	129.71	--	H	--	--	--	--
4879.2	49.84	41.40	V	54.0	109.7	-12.6	Pass*
4879.2	49.29	41.89	H	54.0	109.7	-12.1	Pass*
7318.8	49.90	39.15	V	54.0	109.7	-14.9	Pass*
7318.8	50.89	36.77	H	54.0	109.7	-17.2	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

* Emission within the restricted frequency bands.

Fundamental Frequency: 2477.6 MHz							
Software Power Setting: 255							
Measured Conducted Power: 28.64 dBm							
Frequency Test Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2477.6	128.68	--	V	--	--	--	--
2477.6	129.78	--	H	--	--	--	--
4955.2	51.05	42.87	V	54.0	109.8	-11.1	Pass*
4955.2	50.75	40.02	H	54.0	109.8	-14.0	Pass*
7432.8	51.82	41.83	V	54.0	109.8	-12.2	Pass*
7432.8	51.57	39.23	H	54.0	109.8	-14.8	Pass*
12388.0	56.94	45.12	V	54.0	109.8	-8.9	Pass*
12388.0	57.84	47.18	H	54.0	109.8	-6.8	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							


* Emission within the restricted frequency bands.

Plot 6.12.5.1.11 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

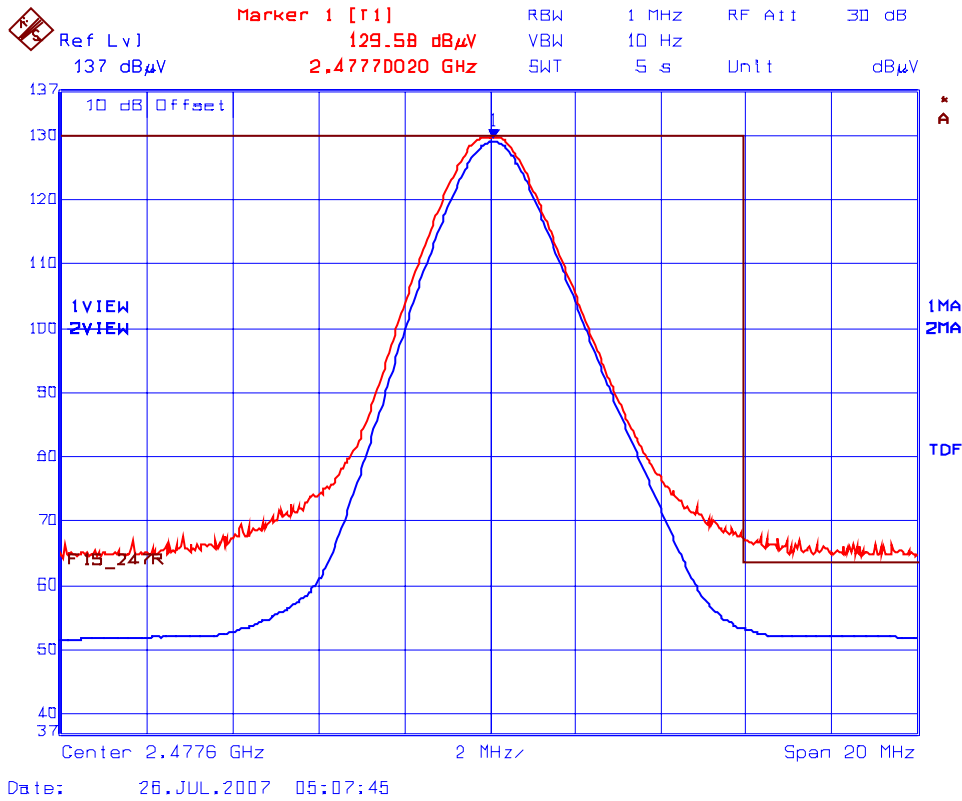


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.12 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

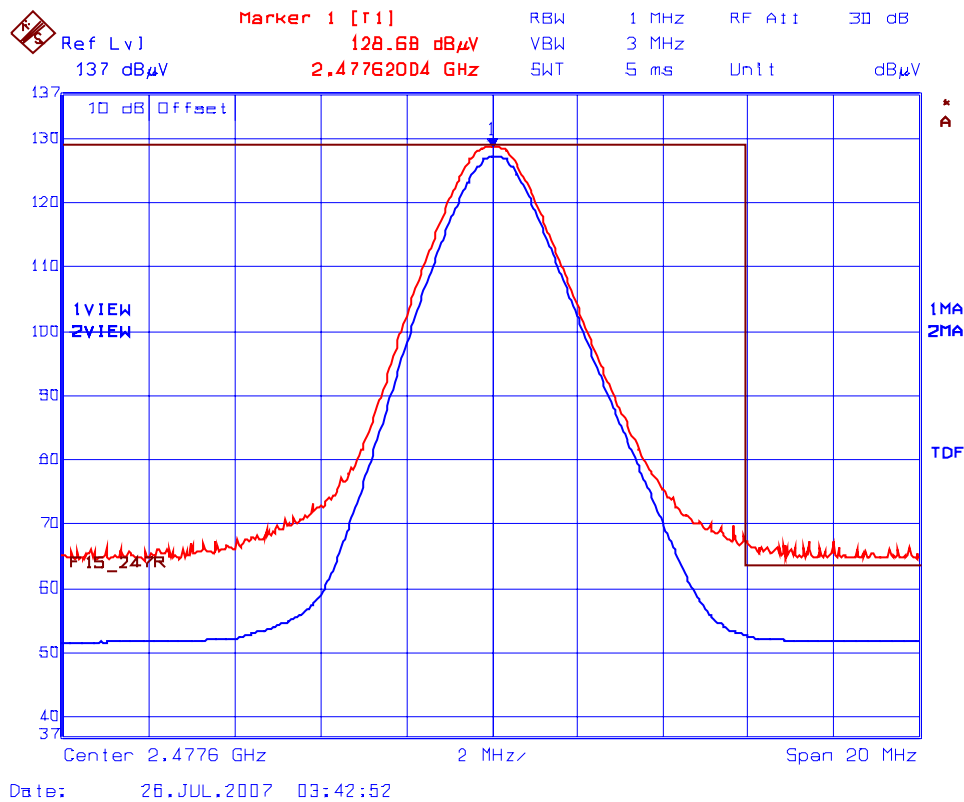


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.13 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

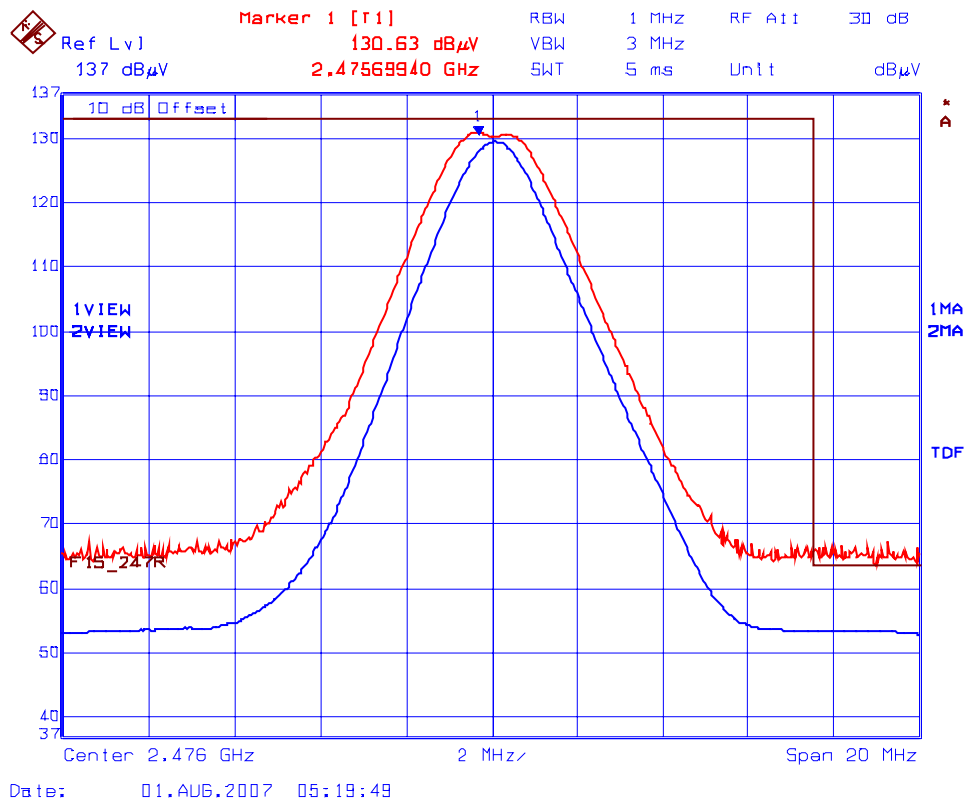

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz


Plot 6.12.5.1.14 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
Rx Antenna Orientation: Vertical

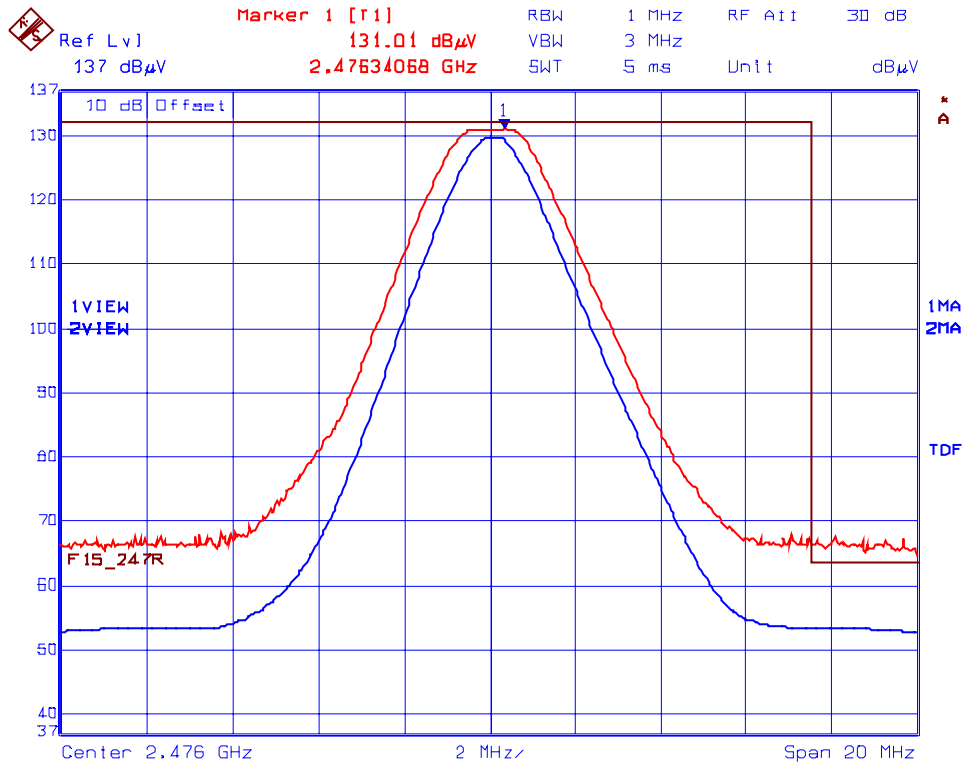

Date: 01.AUG.2007 04:38:15


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.15 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

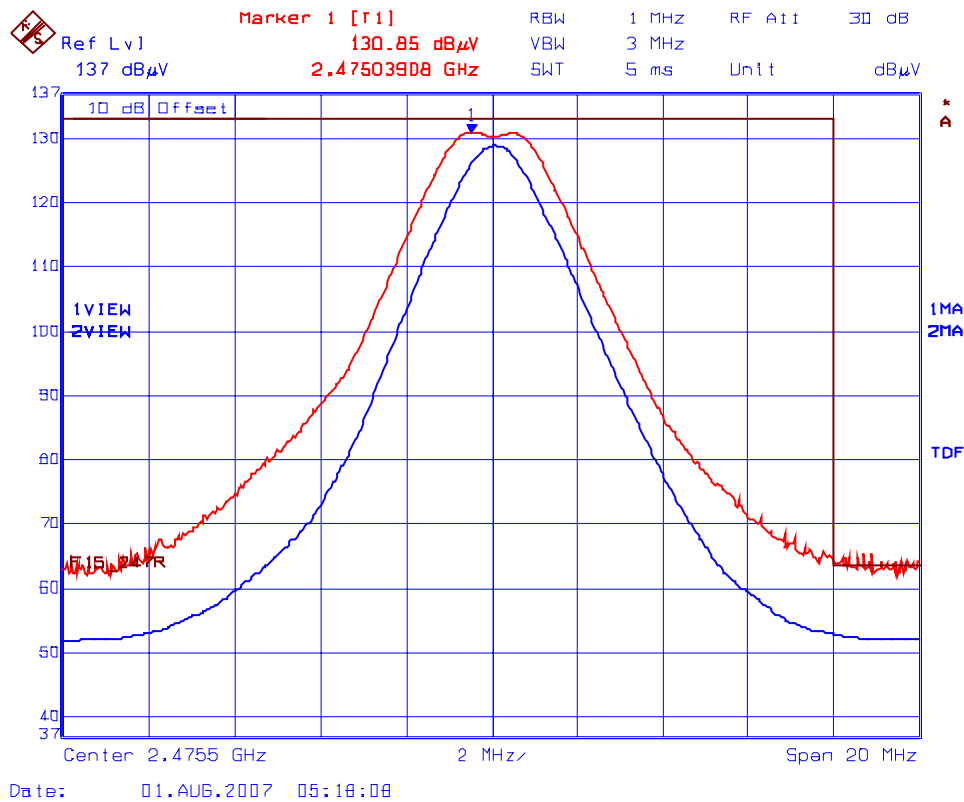


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.16 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

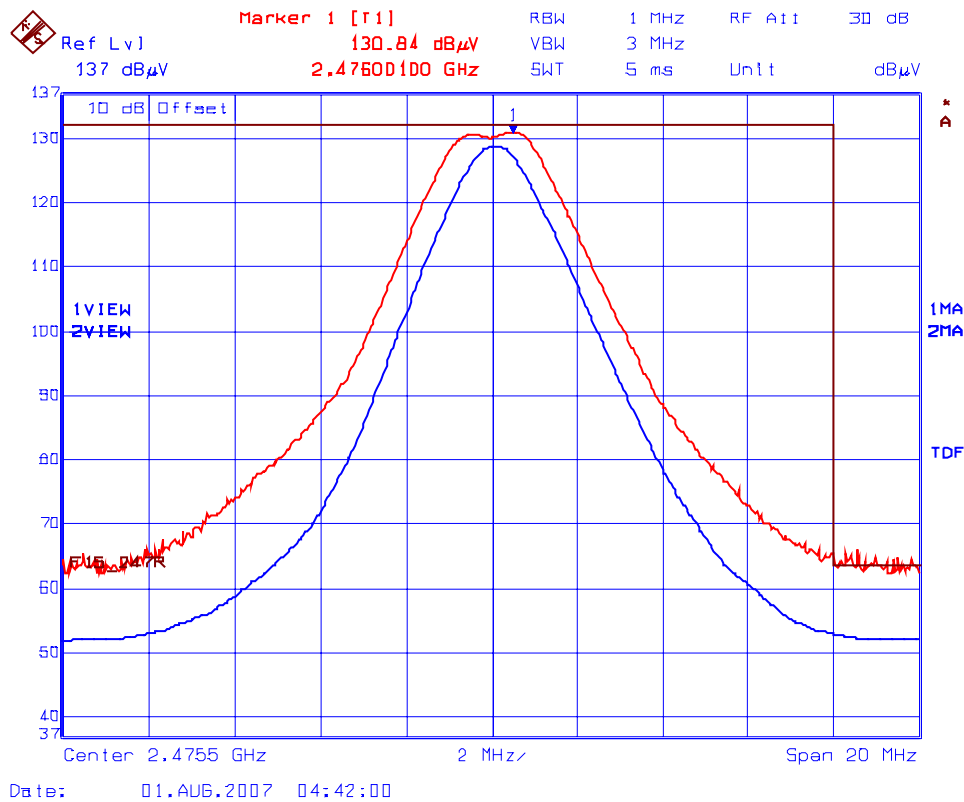


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.17 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

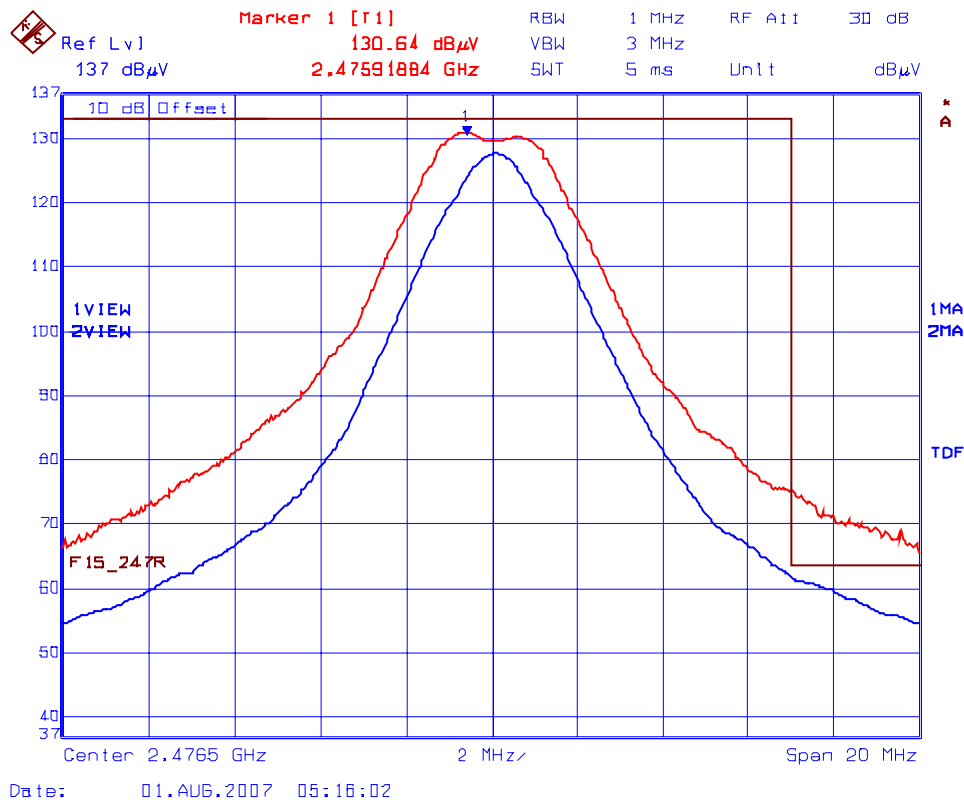


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.18 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Vertical

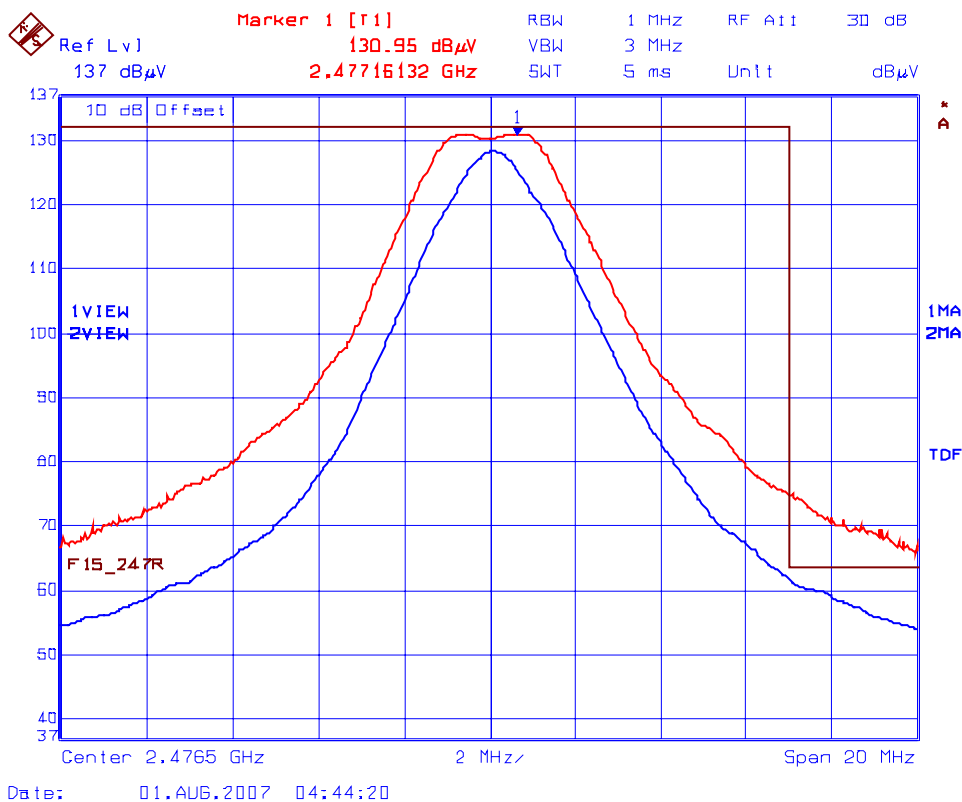


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.19 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Horizontal

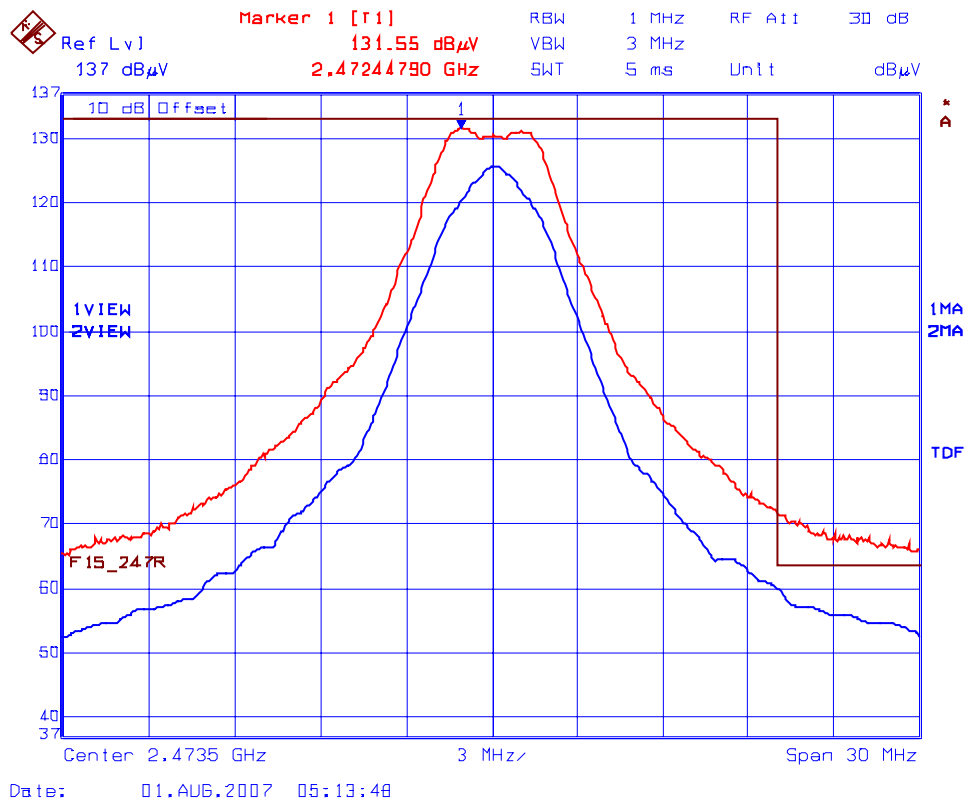

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.1.20 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Vertical

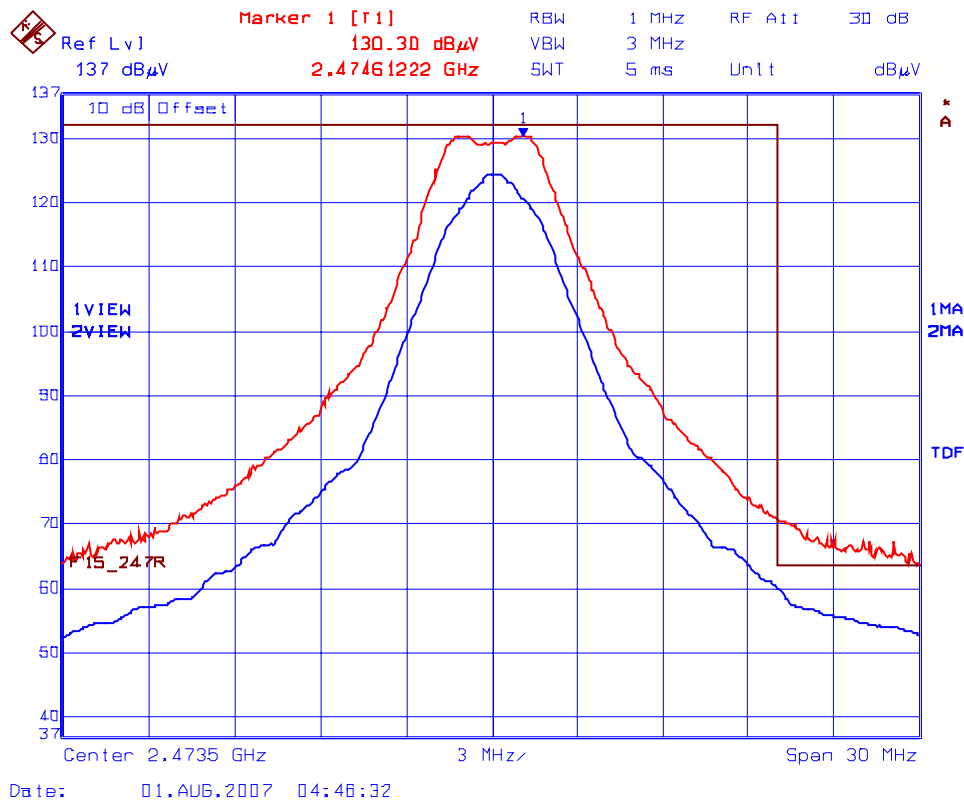


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

6.12.5.2. EUT with 3 dBi Transit Antenna and 1.01 dB Assembly Cable Loss


Fundamental Frequency: 2401.6 MHz							
Software Power Setting: 255							
Measured Conducted Power: 30.09dBm							
Frequency Test Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2401.6	130.03	--	V	--	--	--	--
2401.6	129.11	--	H	--	--	--	--
4803.2	45.21	37.63	V	54.0	110.0	-16.4	Pass*
4803.2	49.85	43.29	H	54.0	110.0	-10.7	Pass*
12008.0	57.46	45.19	V	54.0	110.0	-8.8	Pass*
12008.0	58.56	49.96	H	54.0	110.0	-4.0	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							

* Emission within the restricted frequency bands.

Plot 6.12.5.2.1(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

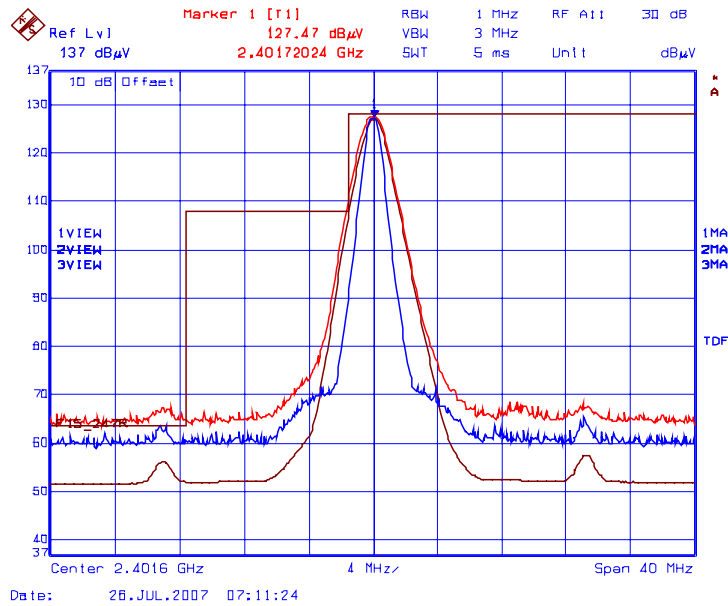


Plot 6.12.5.2.1(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

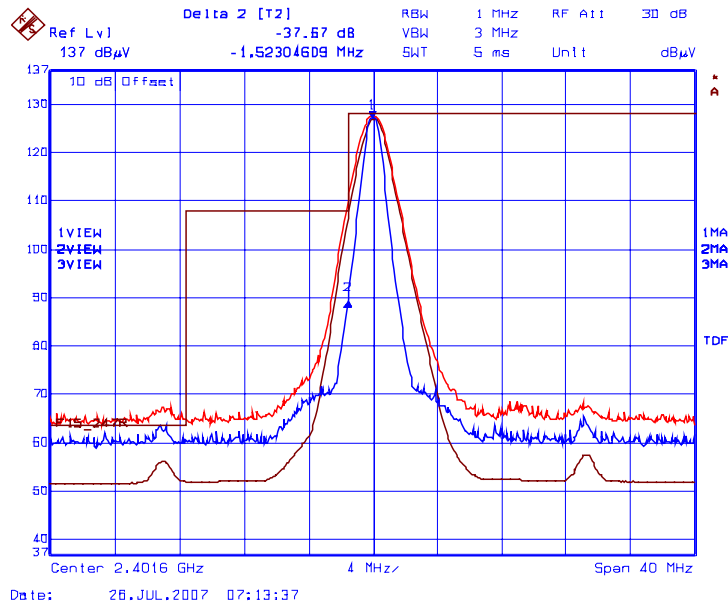


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 37.67 dB
 Trace 3: RBW= 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 127.47 dBµV/m – 37.67 dB= 89.80 dBµV/m (limit 107.47 dBµV/m)

Plot 6.12.5.2.2(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

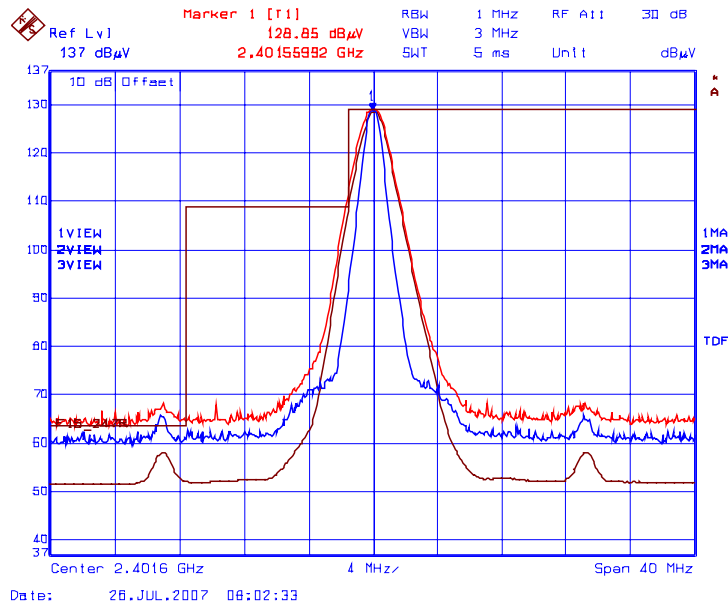


Plot 6.12.5.2.2(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

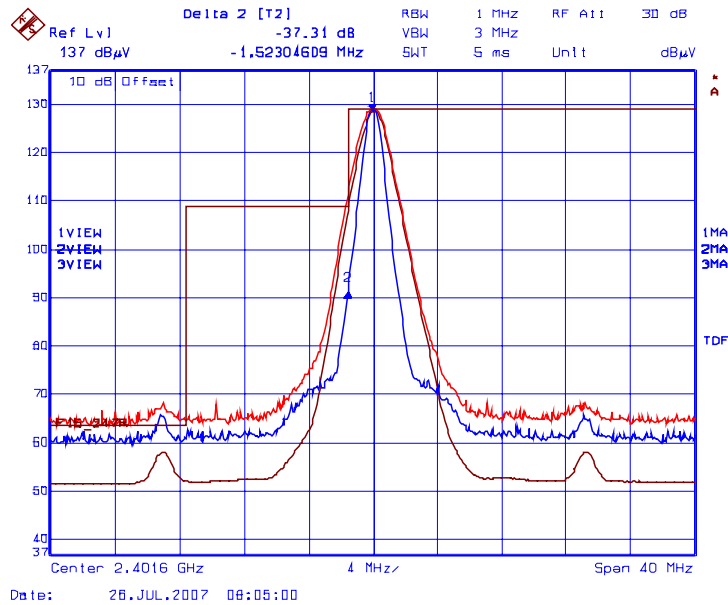


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 37.31 dB
 Trace 3: RBW= 1 MHz, VBW= 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 128.85 dBµV/m – 37.31 dB= 91.54 dBµV/m (limit 108.85 dBµV/m)

Plot 6.12.5.2.3(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

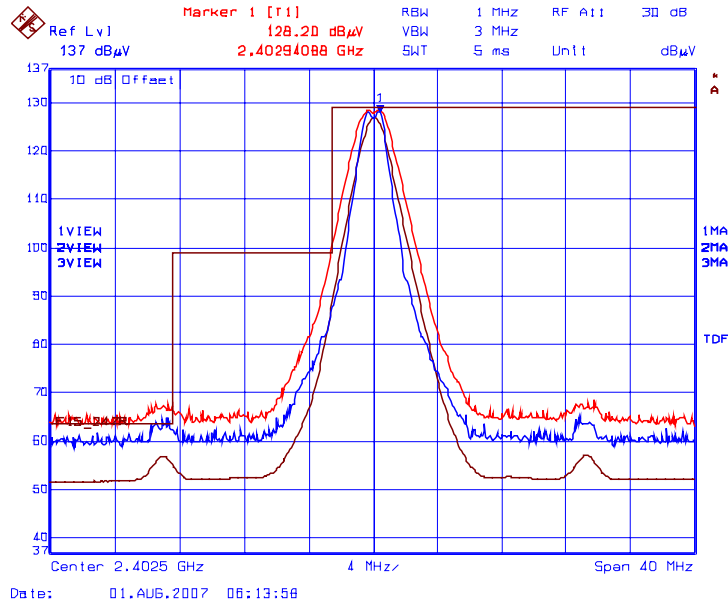


Plot 6.12.5.2.3(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

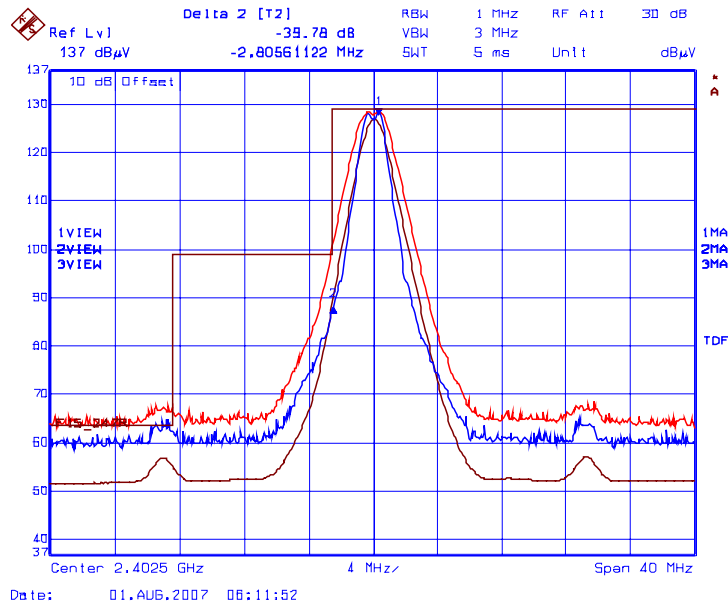


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 39.78 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 128.20 dBµV/m – 39.78dB = 88.42 dBµV/m (limit 98.20 dBµV/m)

Plot 6.12.5.2.4(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

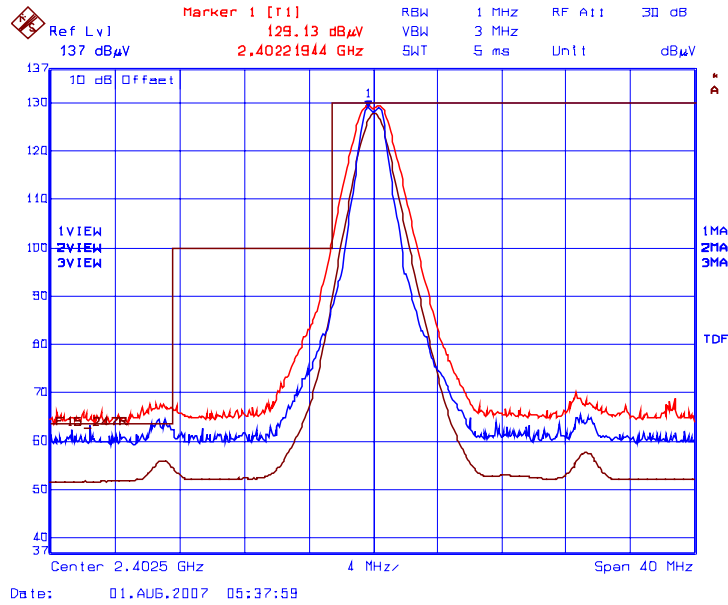


Plot 6.12.5.2.4(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

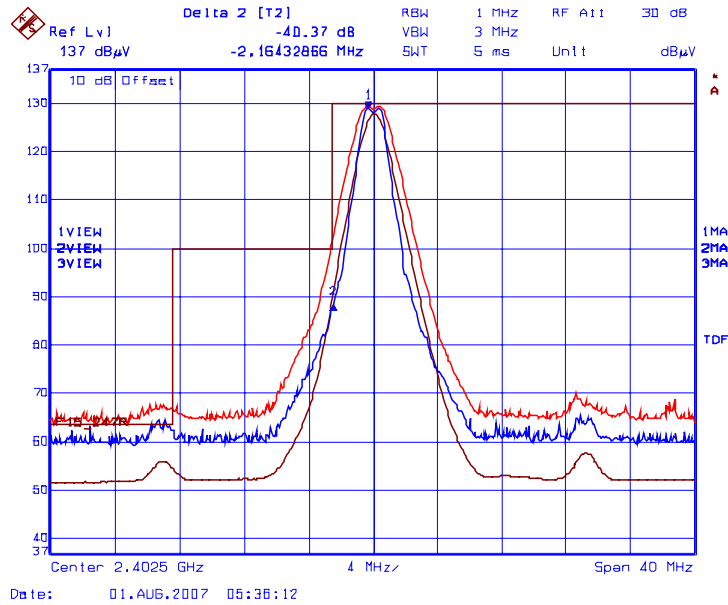


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 40.37 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 129.13 dBμV/m – 40.37 dB = 88.76 dBμV/m (limit 99.13 dBμV/m)

Plot 6.12.5.2.5 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

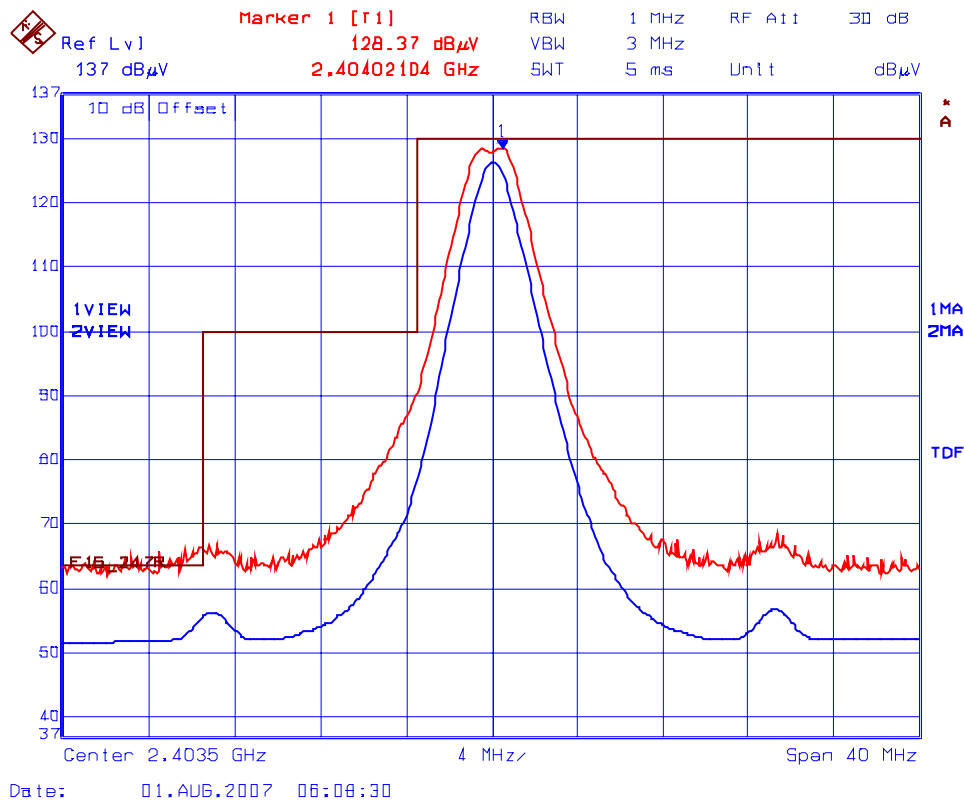


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.6 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

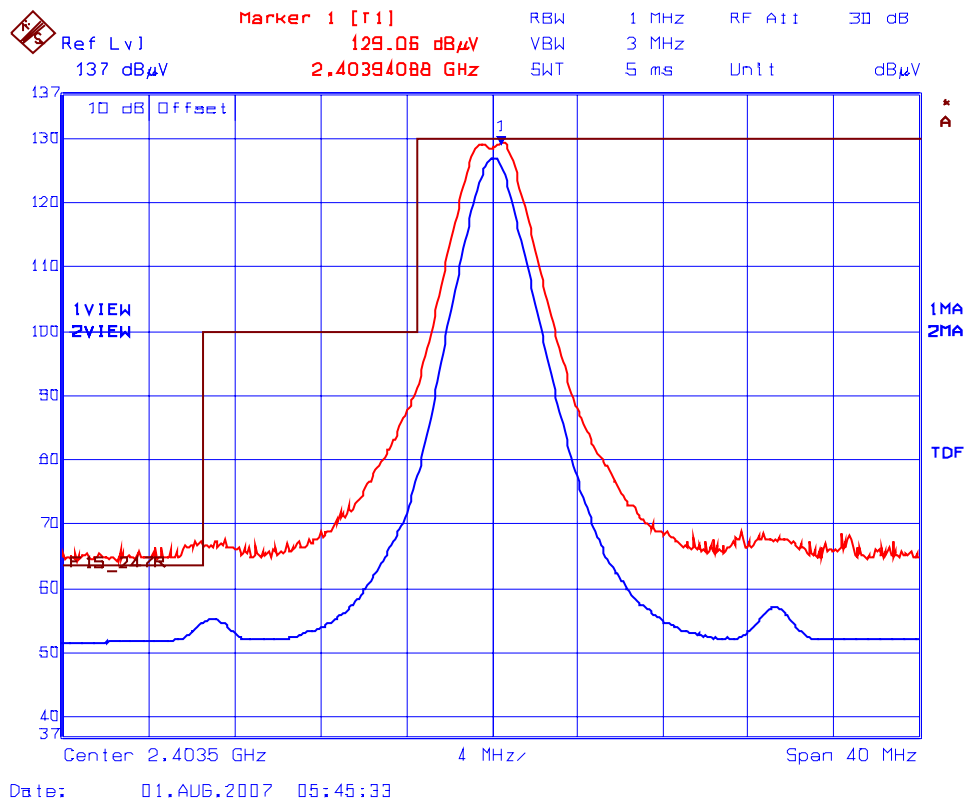


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.7 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

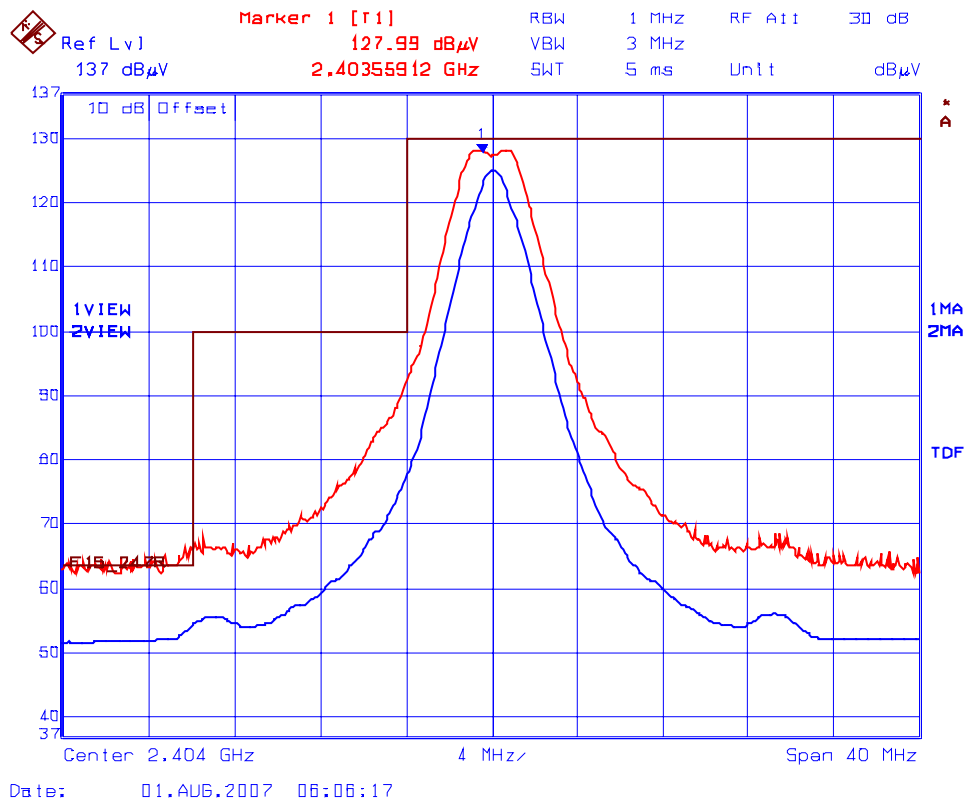


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.8 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Vertical

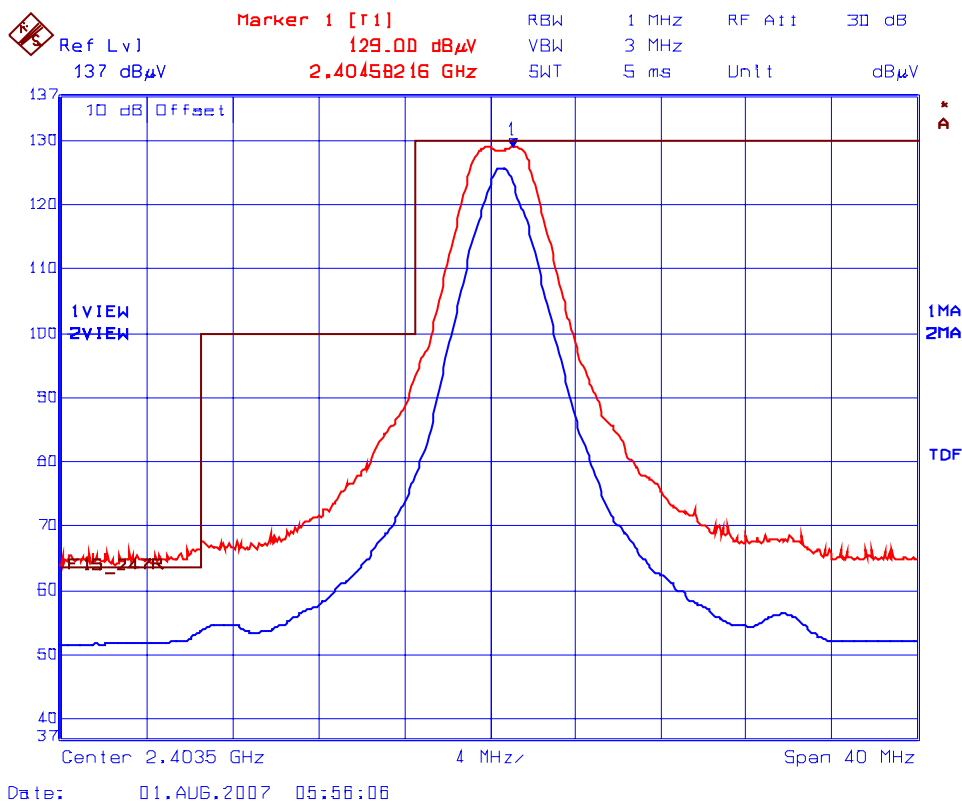


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.9 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Horizontal

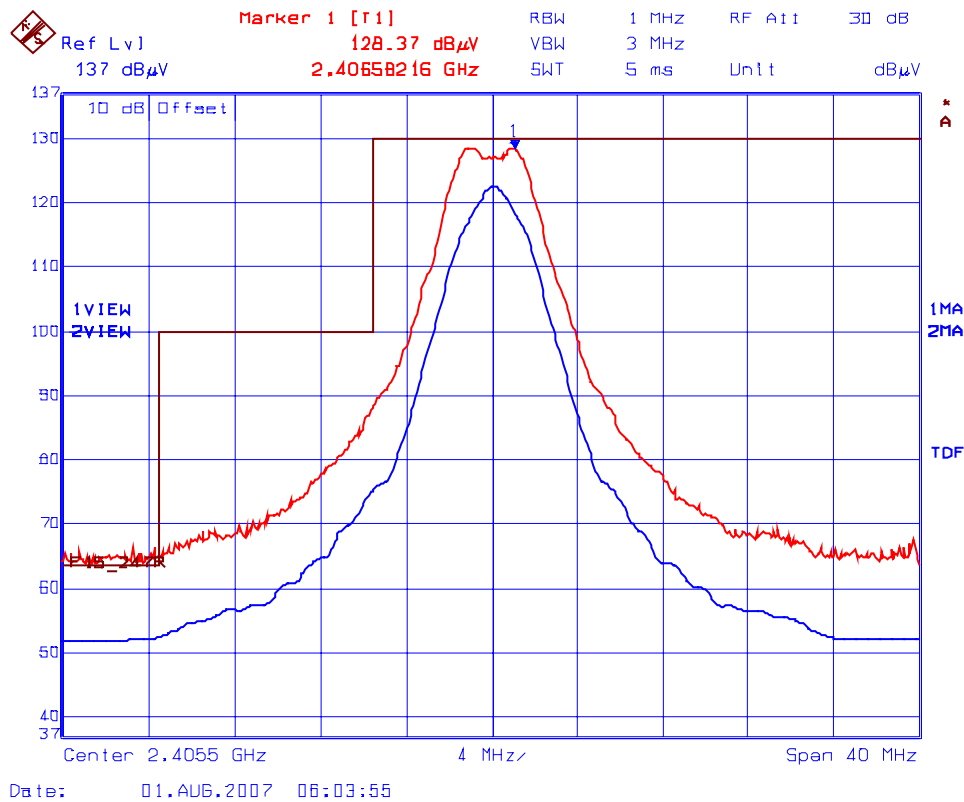

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.10 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Vertical

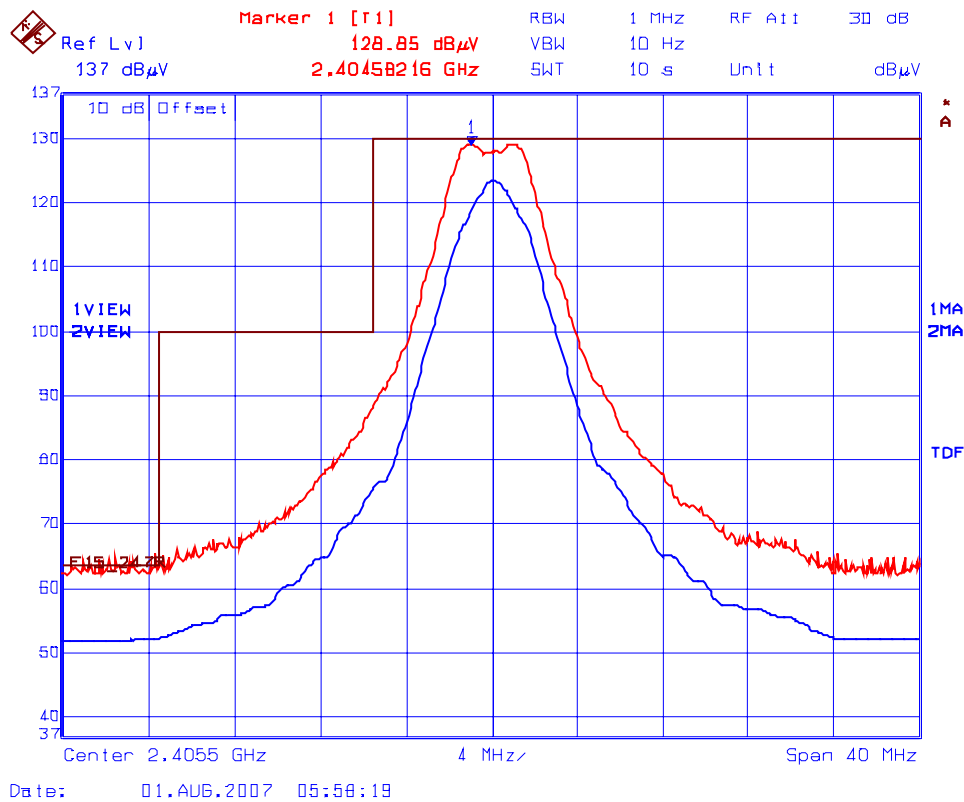

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Fundamental Frequency:		2439.6 MHz					
Software Power Setting:		255					
Measured Conducted Power:		28.76 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2439.6	128.47	--	V	--	--	--	--
2439.6	128.16	--	H	--	--	--	--
4879.2	49.45	42.45	V	54.0	108.5	-11.6	Pass*
4879.2	46.59	39.98	H	54.0	108.5	-14.0	Pass*
7318.8	48.12	36.02	V	54.0	108.5	-18.0	Pass*
7318.8	48.04	36.72	H	54.0	108.5	-17.3	Pass*
12198.0	57.22	45.71	V	54.0	108.5	-8.3	Pass*
12198.0	57.72	45.88	H	54.0	108.5	-8.1	Pass*

All other spurious emissions and harmonics are more than 20 dB below the applicable limit.


* Emission within the restricted frequency bands.

Fundamental Frequency:		2477.6 MHz					
Software Power Setting:		255					
Measured Conducted Power:		28.64 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2477.6	127.66	--	V	--	--	--	--
2477.6	127.99	--	H	--	--	--	--
4955.2	49.78	43.23	V	54.0	108.0	-10.8	Pass*
4955.2	48.89	42.09	H	54.0	108.0	-11.9	Pass*
7432.8	49.06	36.90	V	54.0	108.0	-17.1	Pass*
7432.8	48.45	36.09	H	54.0	108.0	-17.9	Pass*
12388.0	59.71	47.39	V	54.0	108.0	-6.6	Pass*
12388.0	59.47	47.30	H	54.0	108.0	-6.7	Pass*

All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.


* Emission within the restricted frequency bands.

Plot 6.12.5.2.11 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

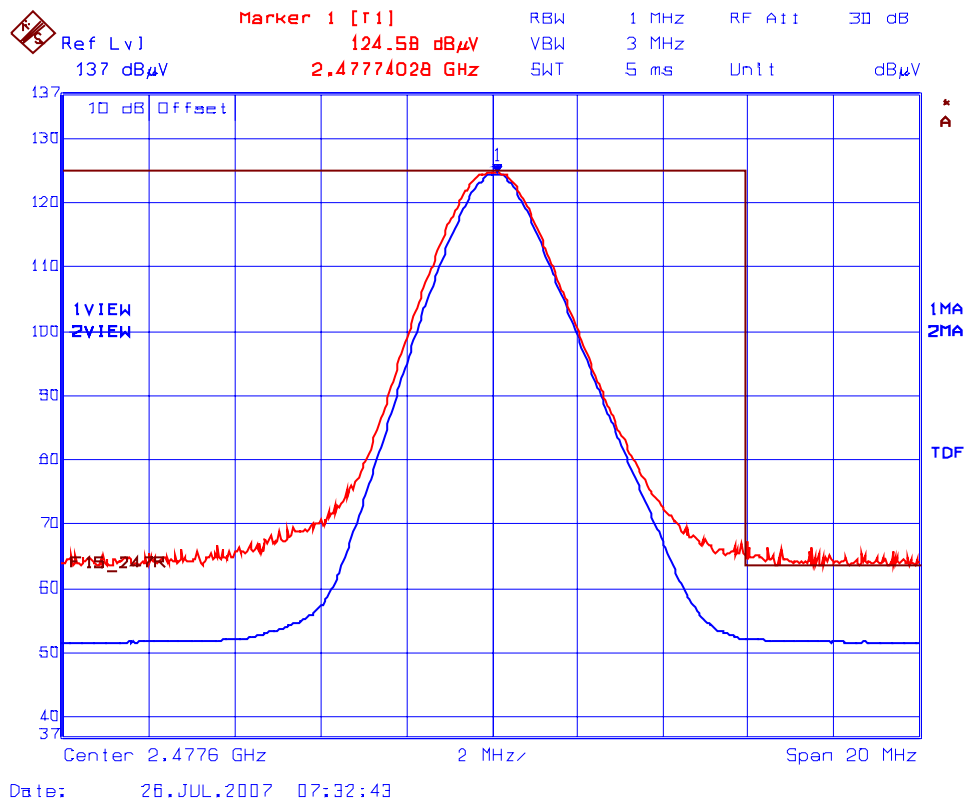


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.12 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

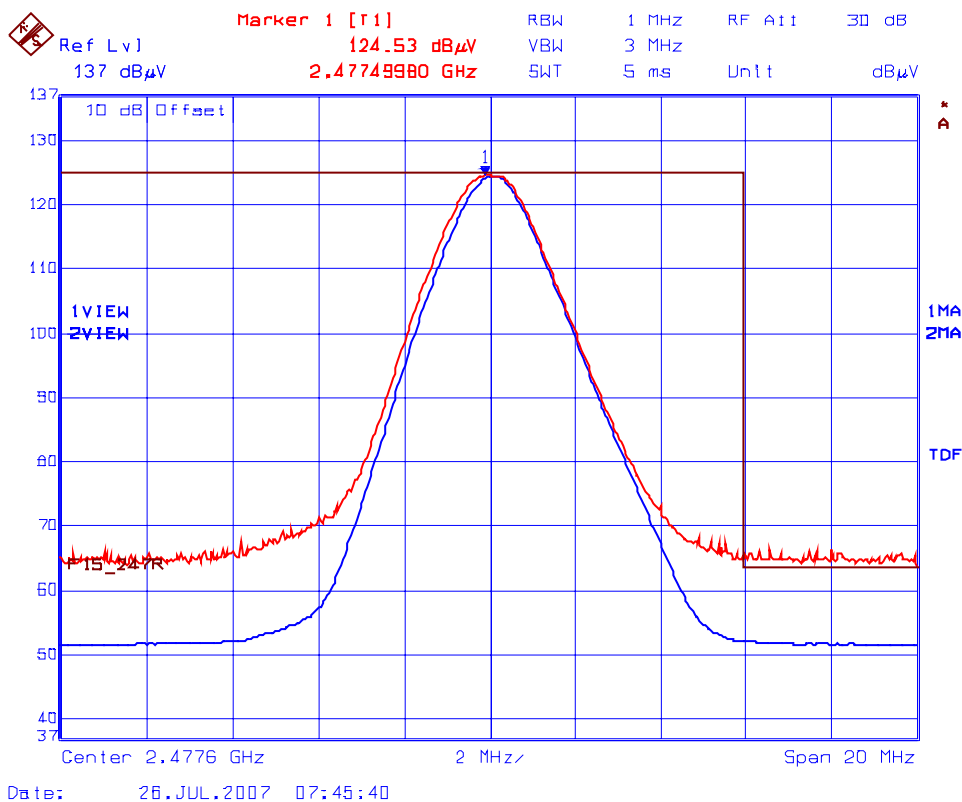


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.13 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

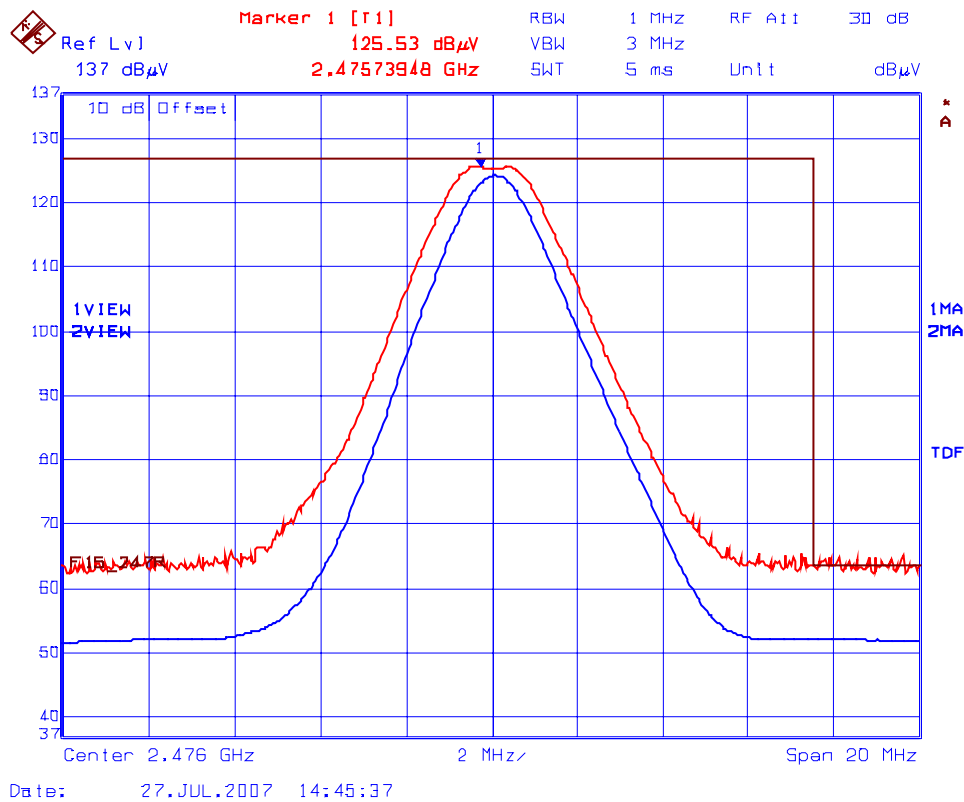


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.14 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
Rx Antenna Orientation: Vertical

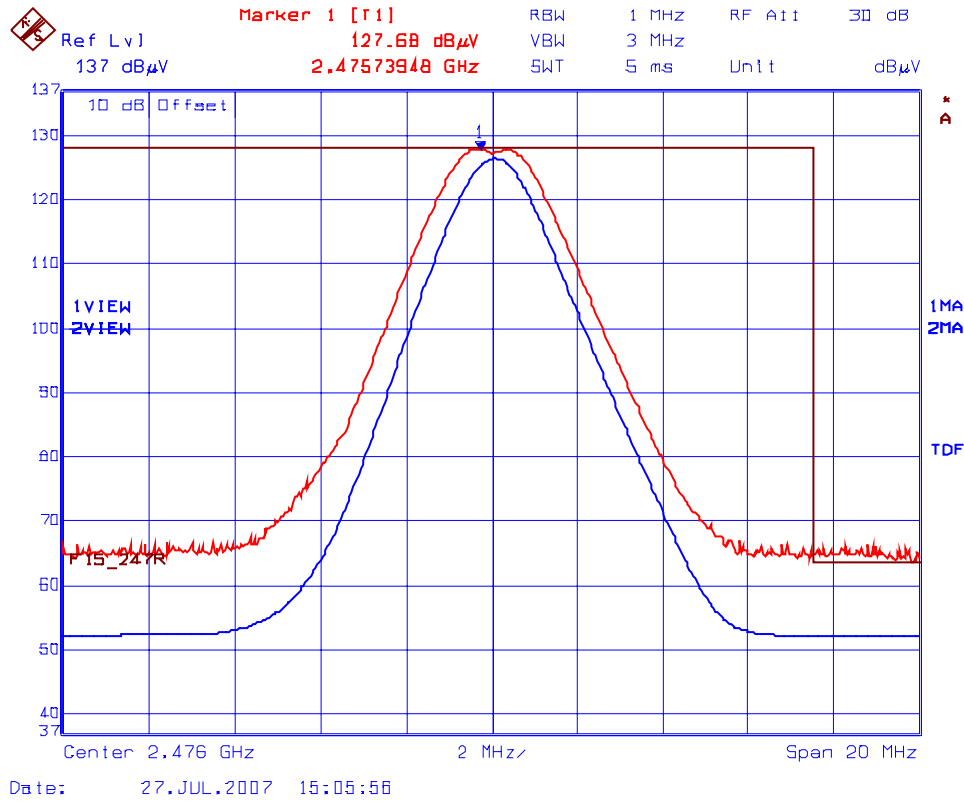


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.15 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

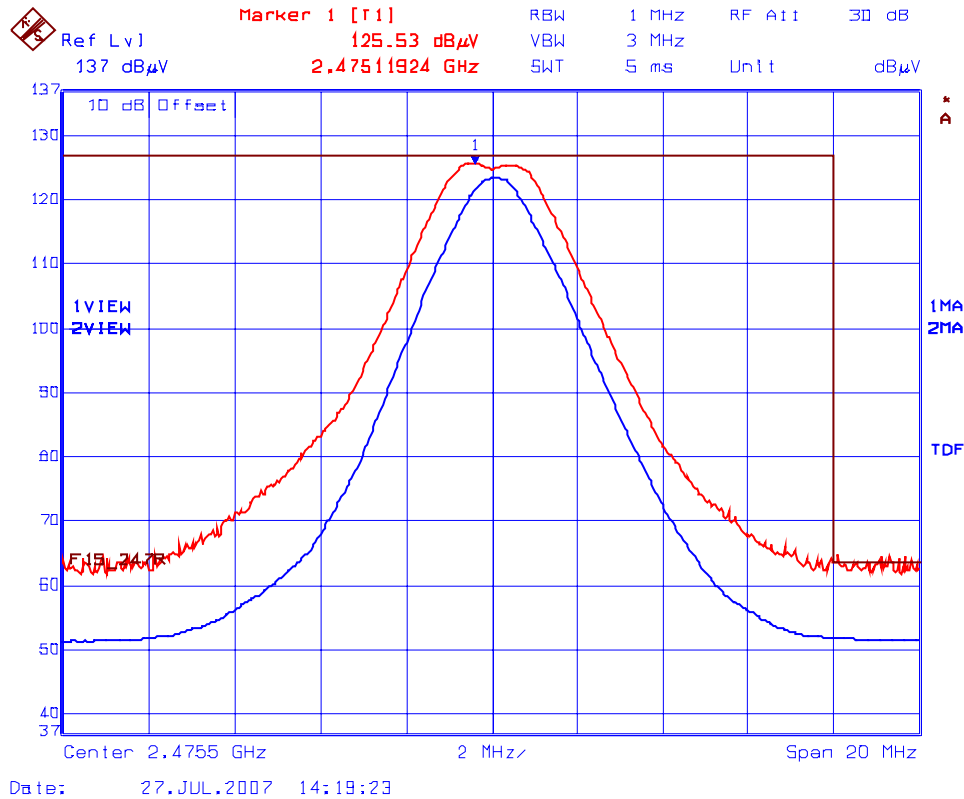


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.16 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
 Rx Antenna Orientation: Vertical

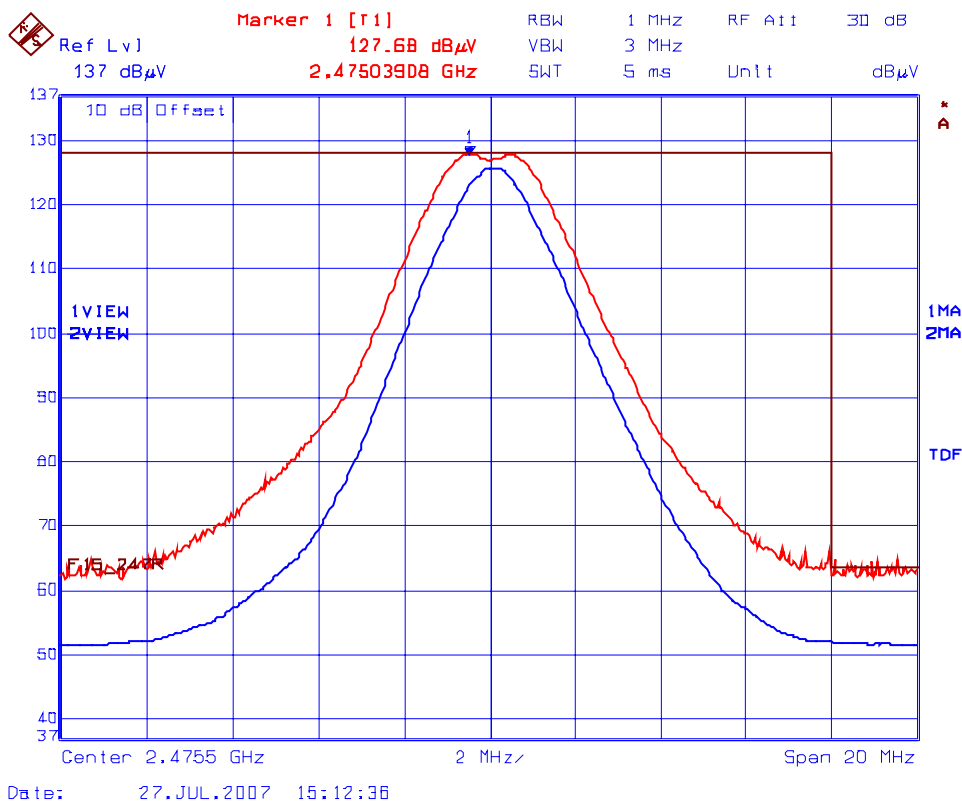


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.17 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

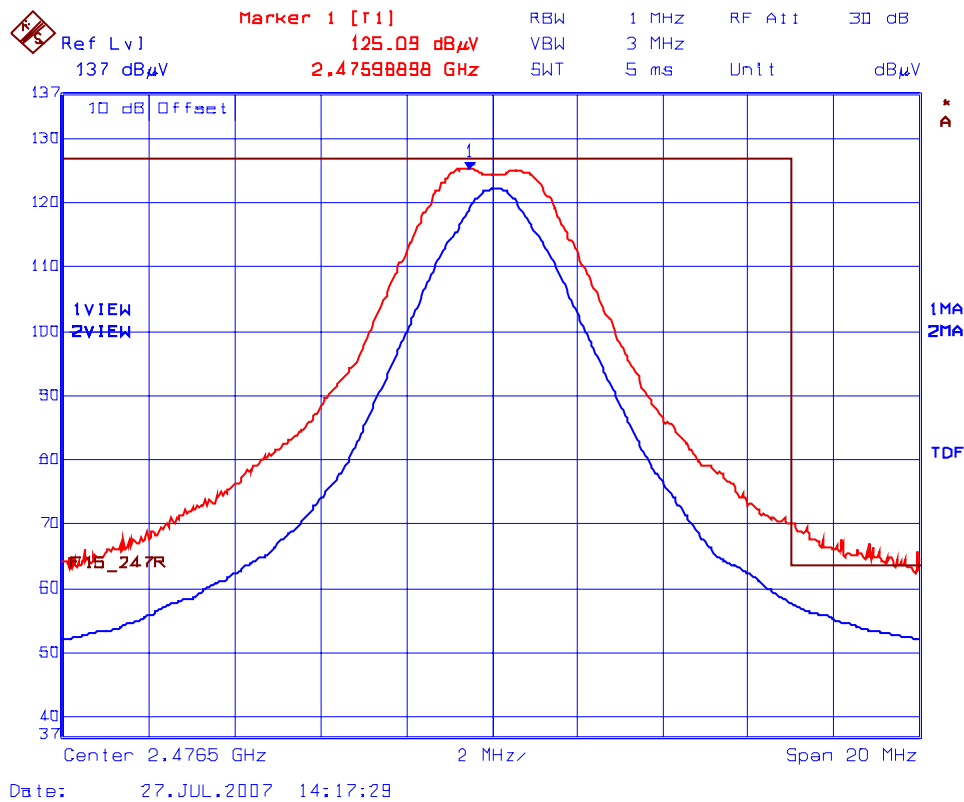


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.18 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Vertical

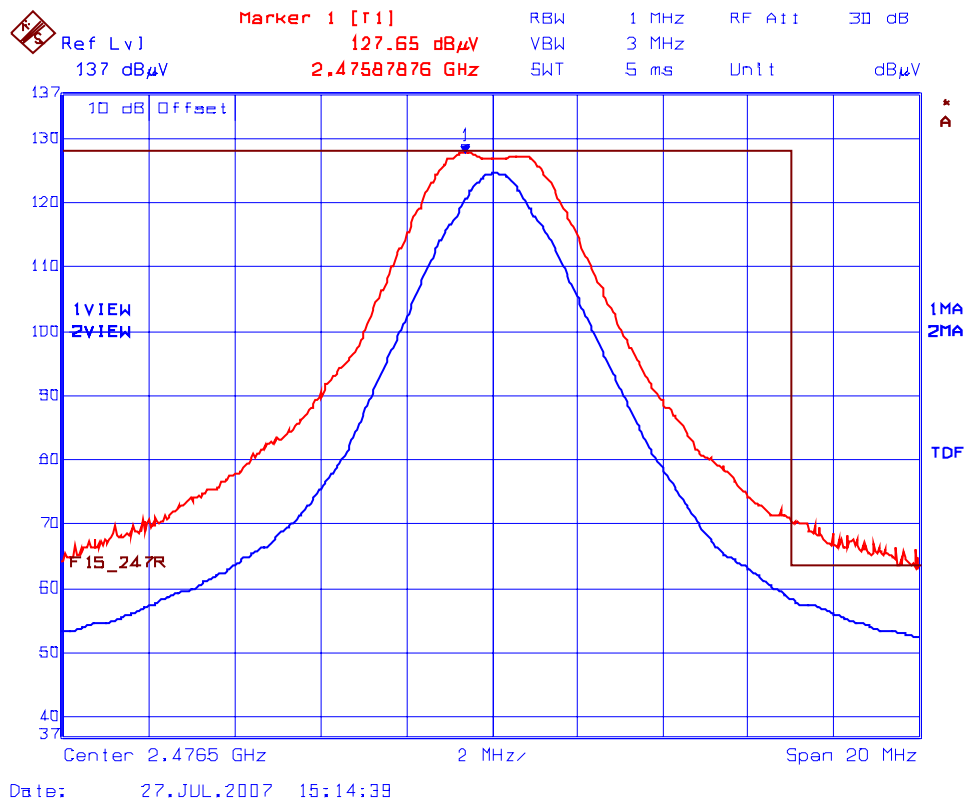


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.19 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Horizontal

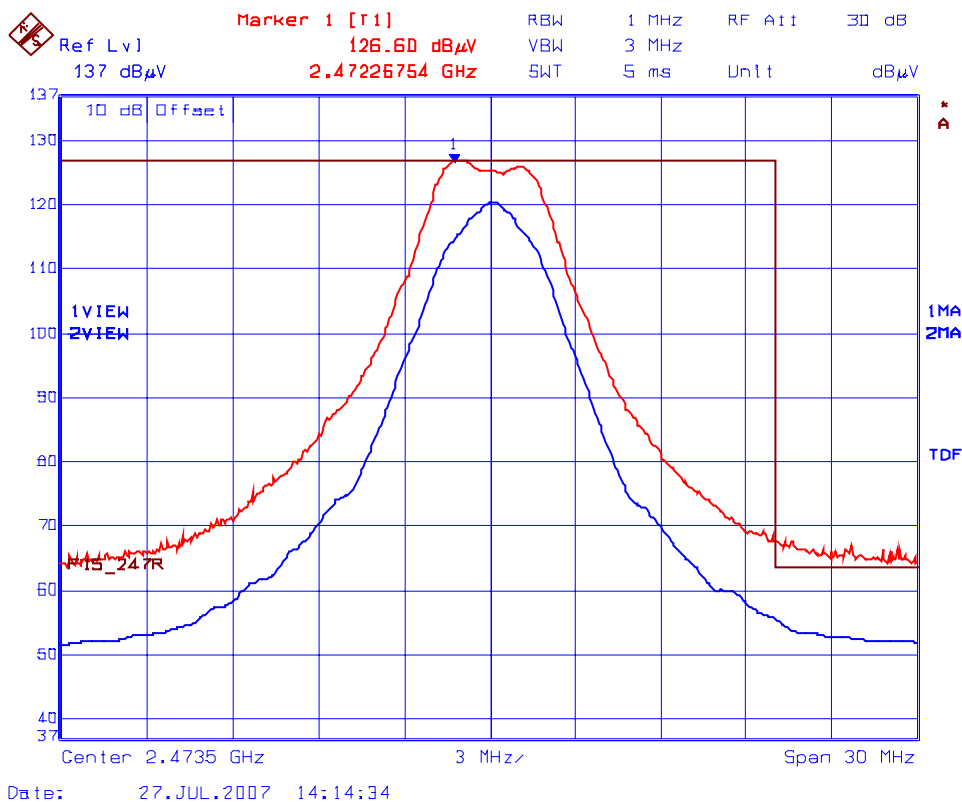

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.2.20 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Vertical

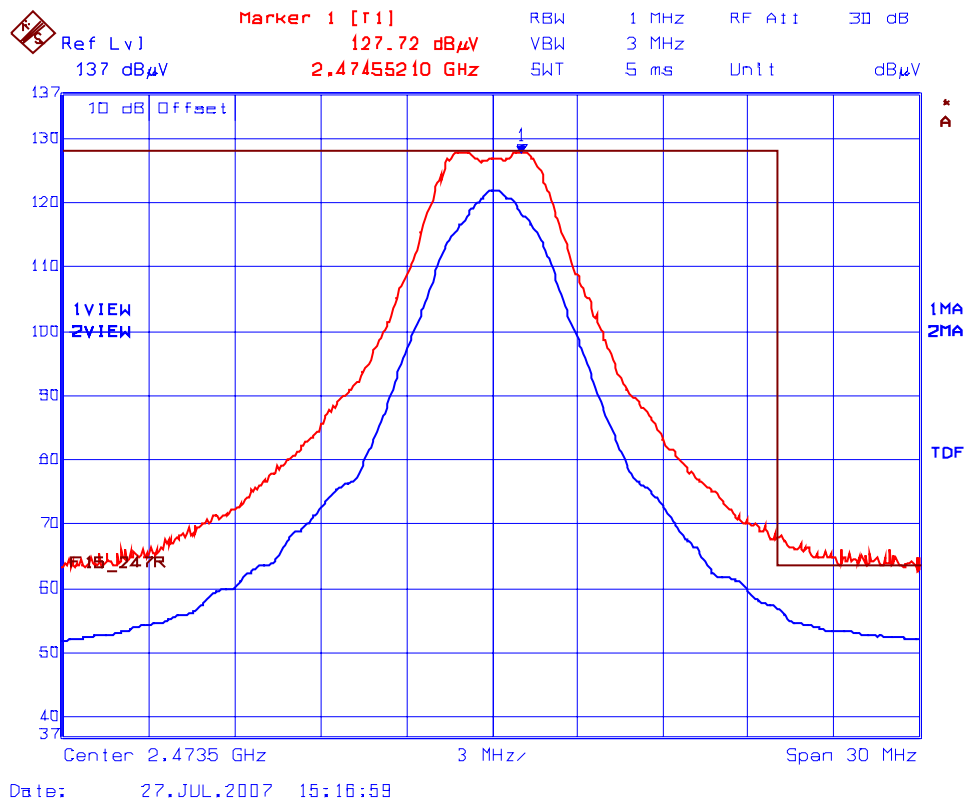


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

6.12.5.3. EUT with 14 dBi Flat Patch Antenna and 2.13 dB Assembly Cable Loss


Fundamental Frequency: 2401.6 MHz							
Software Power Setting: 117							
Measured Conducted Power: 23.58 dBm							
Frequency Test Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dB μ V/m)	RF Avg Level (dB μ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB μ V/m)	Limit 15.247 (dB μ V/m)	Margin (dB)	Pass/Fail
2401.6	131.92	--	V	--	--	--	--
2401.6	132.01	--	H	--	--	--	--
4803.2	49.79	40.74	V	54.0	112.0	-13.3	Pass*
4803.2	51.24	43.10	H	54.0	112.0	-10.9	Pass*
12008.0	55.62	44.93	V	54.0	112.0	-9.1	Pass*
12008.0	57.38	45.60	H	54.0	112.0	-8.4	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							

* Emission within the restricted frequency bands.

Plot 6.12.5.3.1(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

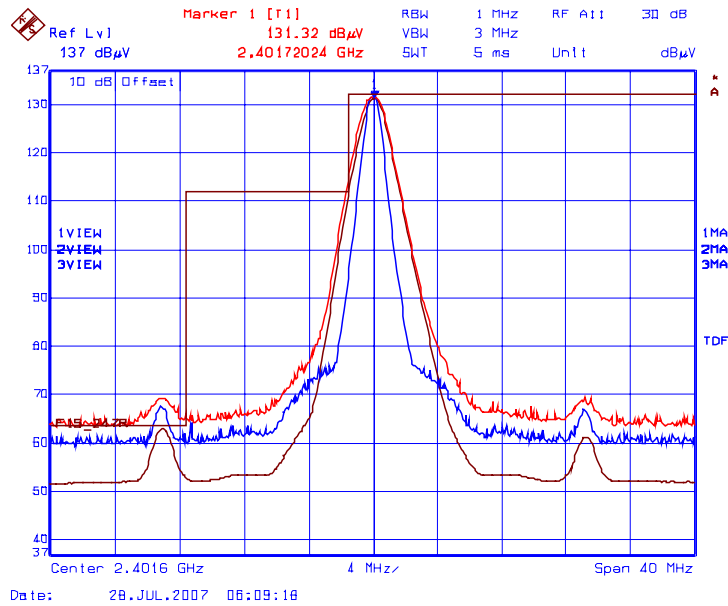


Plot 6.12.5.3.1(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

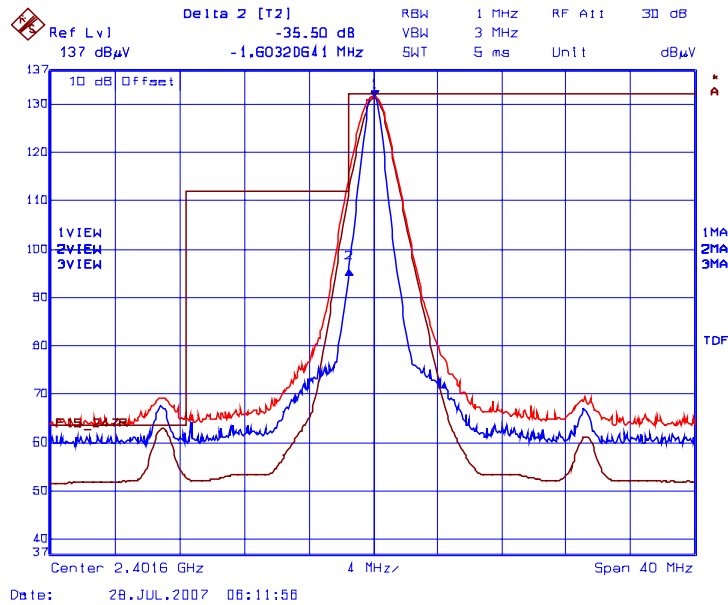


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.58 dB
 Trace 3: RBW= 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 131.32 dBµV/m – 35.58 dB = 95.74 dBµV/m (limit 111.32 dBµV/m)

Plot 6.12.5.3.2(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

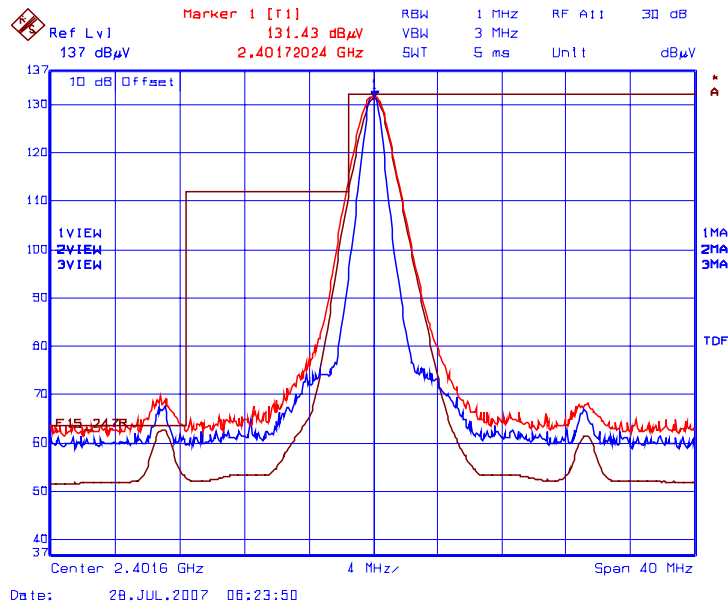


Plot 6.12.5.3.2(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

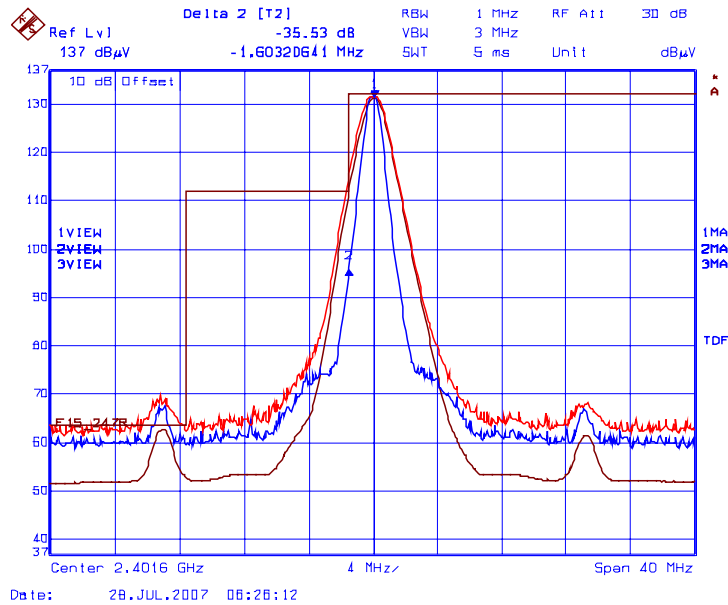


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.53 dB
 Trace 3: RBW= 1 MHz, VBW= 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 131.43 dBμV/m – 35.53 dB = 95.90 dBμV/m (limit 111.43 dBμV/m)

Plot 6.12.5.3.3(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

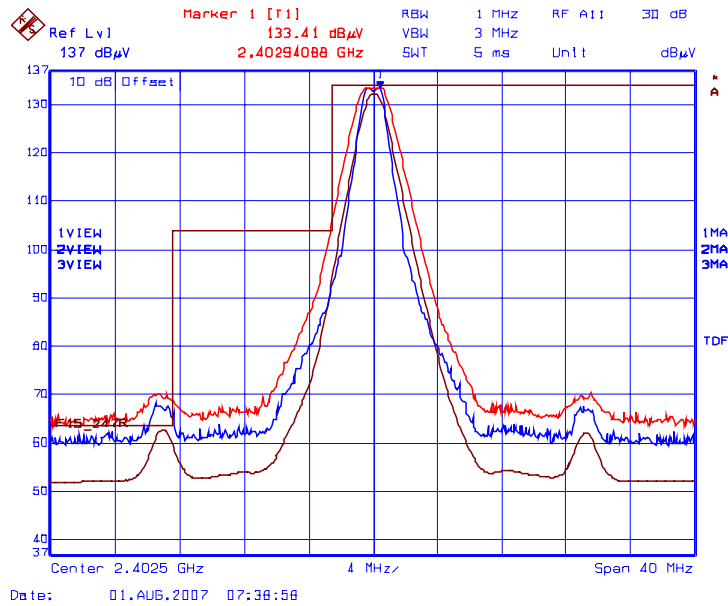


Plot 6.12.5.3.3(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

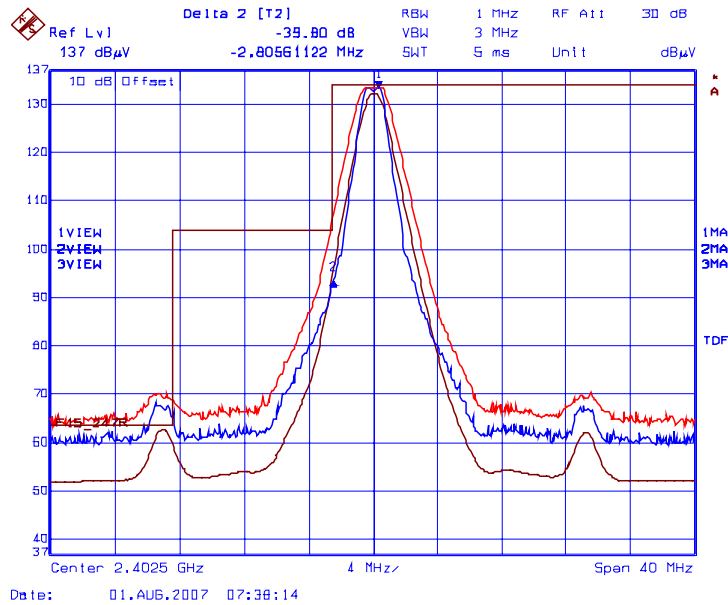


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 39.80 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 133.41 dBµV/m – 39.80 dB = 93.61 dBµV/m (limit 100.41 dBµV/m)

Plot 6.12.5.3.4(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

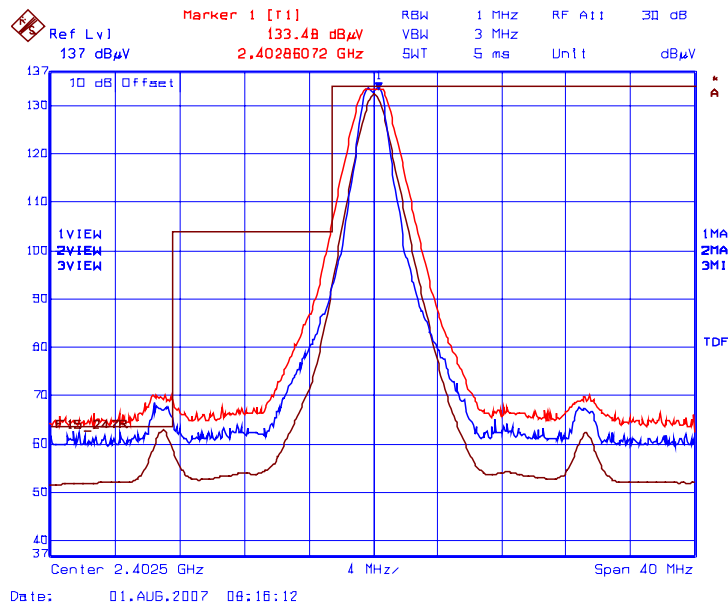


Plot 6.12.5.3.4(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

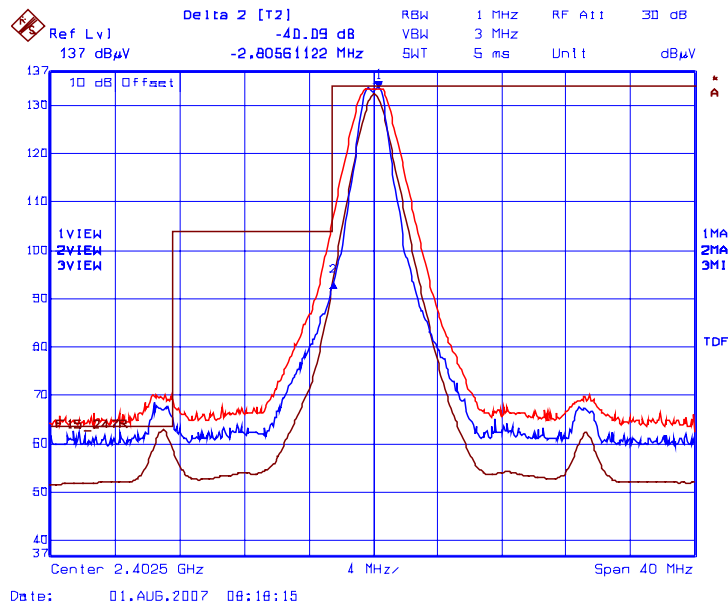


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 40.09 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 133.41 dBµV/m – 40.09 dB = 93.32 dBµV/m (limit 103.09 dBµV/m)

Plot 6.12.5.3.5 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

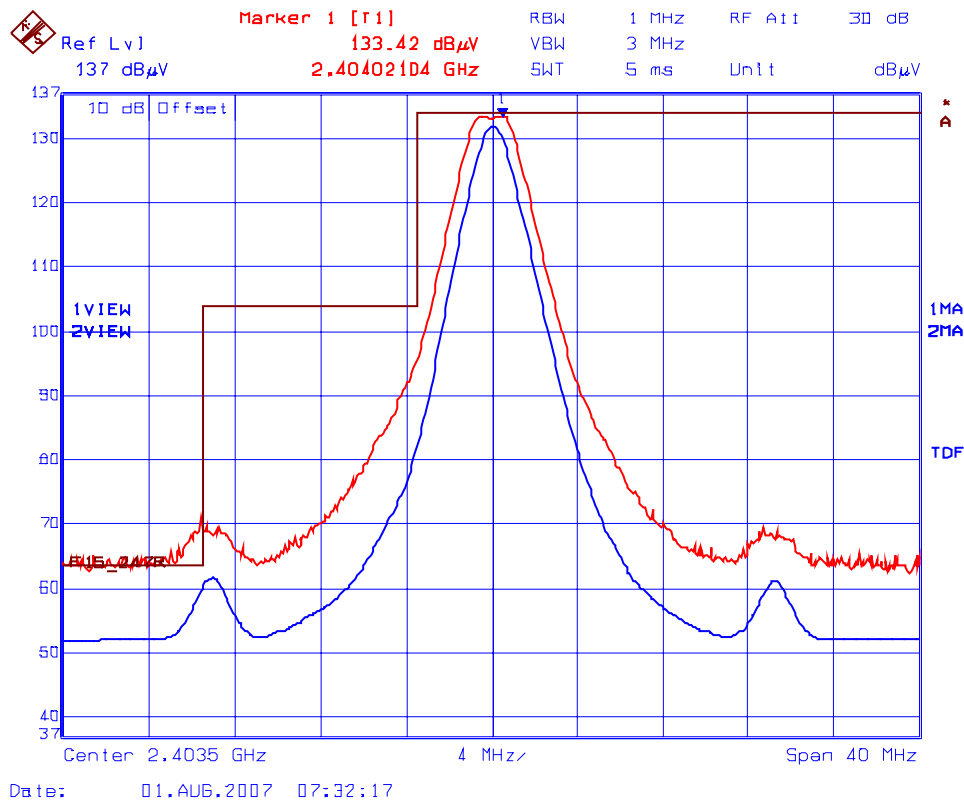

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz


Plot 6.12.5.3.6 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

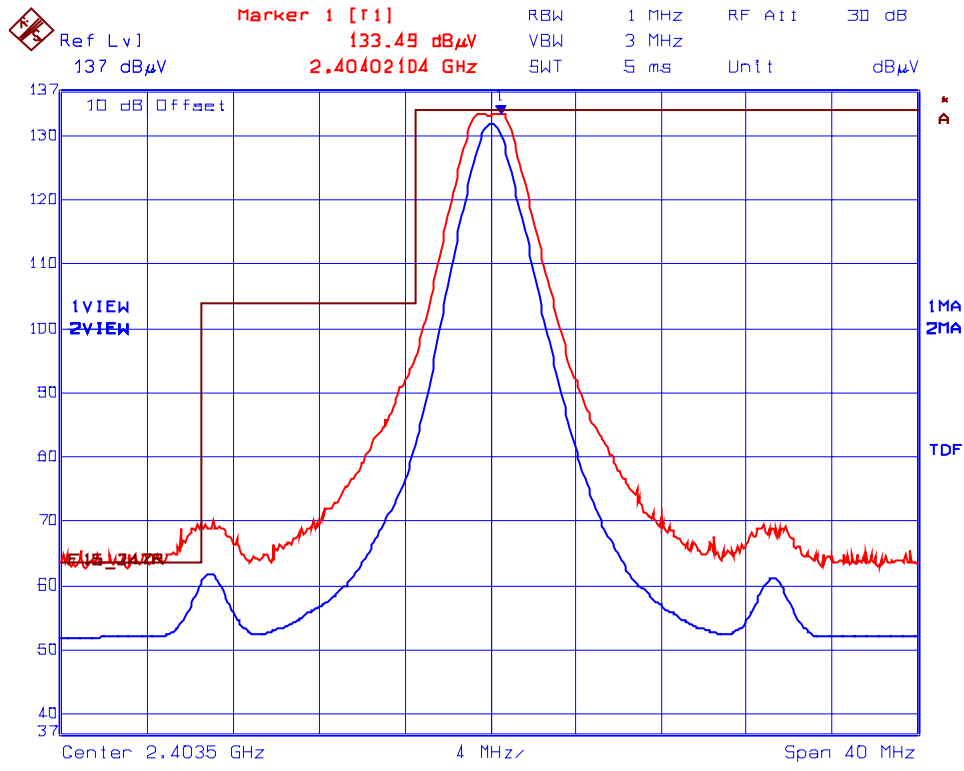

Date: 01.AUG.2007 08:20:47


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.7 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

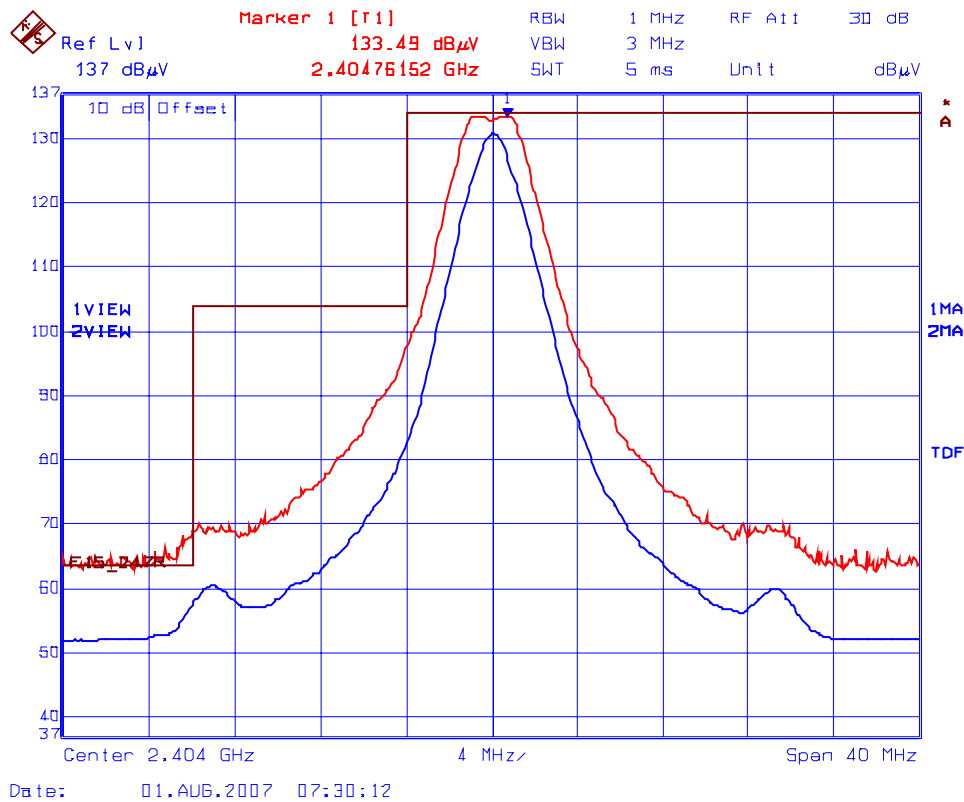


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.8 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Vertical

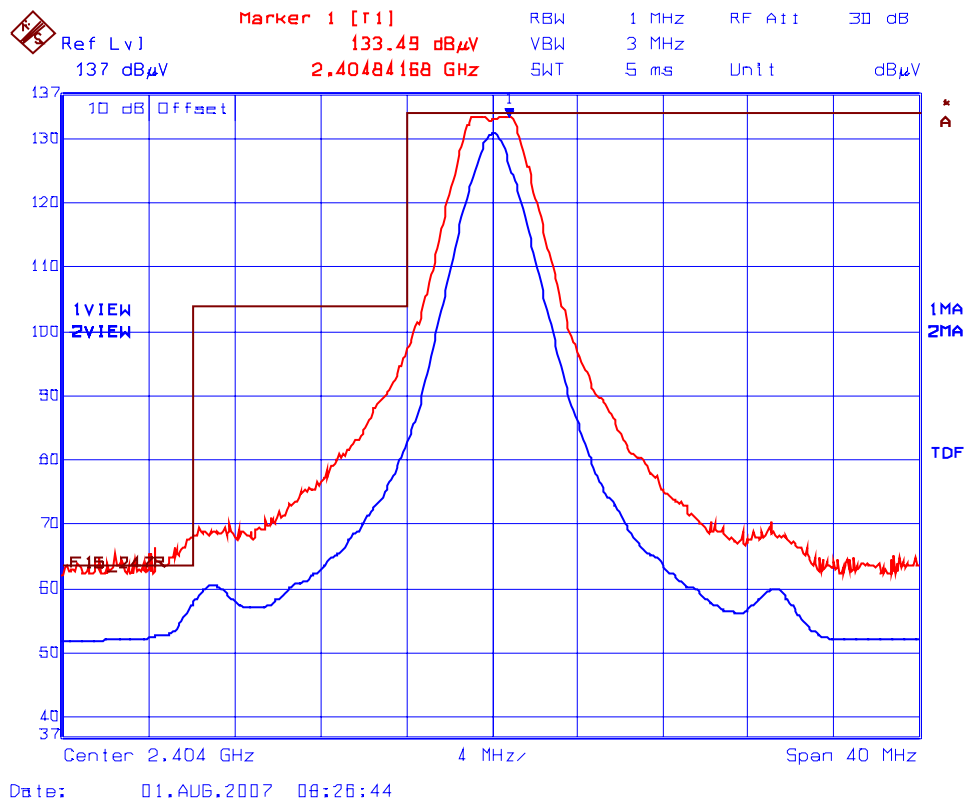


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.9 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Horizontal

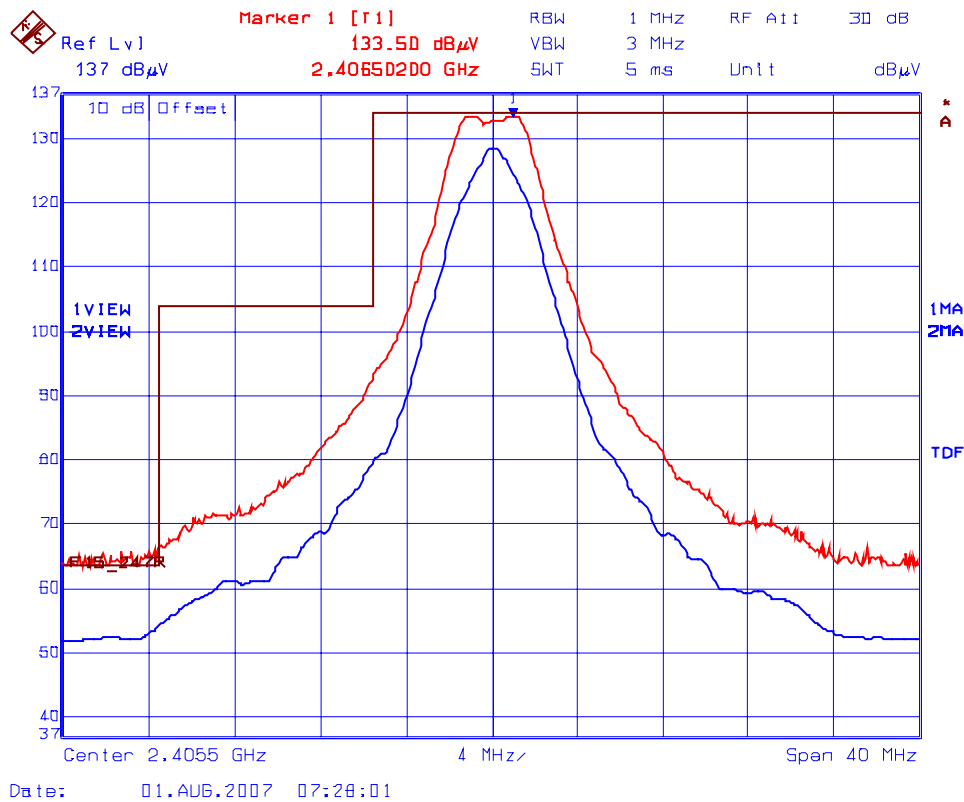

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.10 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Vertical

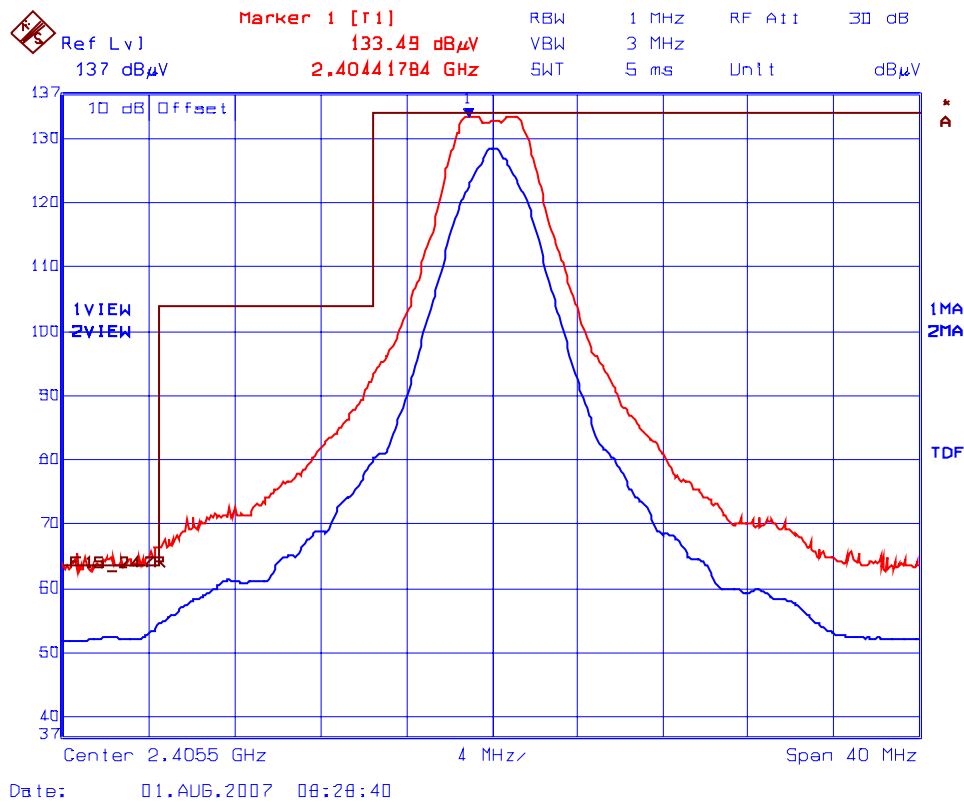

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz


Fundamental Frequency:		2439.6 MHz					
Software Power Setting:		117					
Measured Conducted Power:		24.02 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2439.6	131.25	--	V	--	--	--	--
2439.6	132.71	--	H	--	--	--	--
4879.2	49.72	39.31	V	54.0	112.7	-14.7	Pass*
4879.2	50.27	42.51	H	54.0	112.7	-11.5	Pass*
7318.8	49.34	38.89	V	54.0	112.7	-15.1	Pass*
7318.8	50.74	40.53	H	54.0	112.7	-13.5	Pass*
12198.0	57.73	44.43	V	54.0	112.7	-9.6	Pass*
12198.0	57.40	44.83	H	54.0	112.7	-9.2	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

* Emission within the restricted frequency bands.

Fundamental Frequency:		2477.6 MHz					
Software Power Setting:		117					
Measured Conducted Power:		23.32 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2477.6	132.21	--	V	--	--	--	--
2477.6	132.80	--	H	--	--	--	--
4955.2	48.02	37.90	V	54.0	112.8	-16.1	Pass*
4955.2	47.75	36.03	H	54.0	112.8	-18.0	Pass*
7432.8	50.10	40.80	V	54.0	112.8	-13.2	Pass*
7432.8	51.92	43.62	H	54.0	112.8	-10.4	Pass*
12388.0	56.77	44.22	V	54.0	112.8	-9.8	Pass*
12388.0	55.78	43.90	H	54.0	112.8	-10.1	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							


* Emission within the restricted

Plot 6.12.5.3.11 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

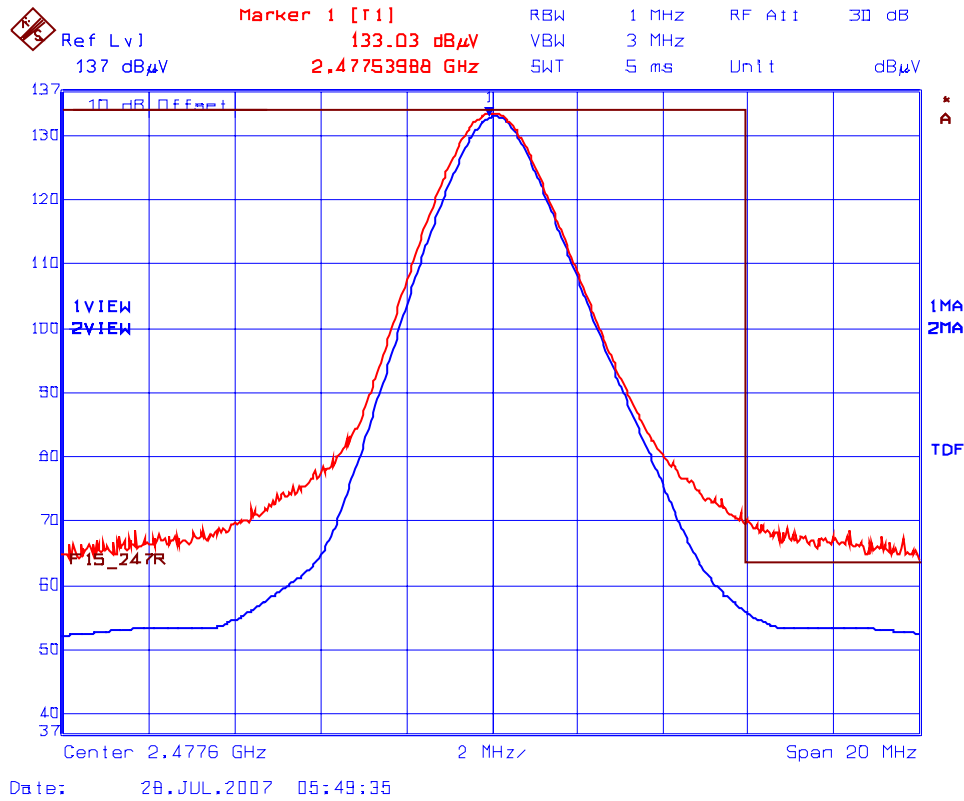


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.12 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

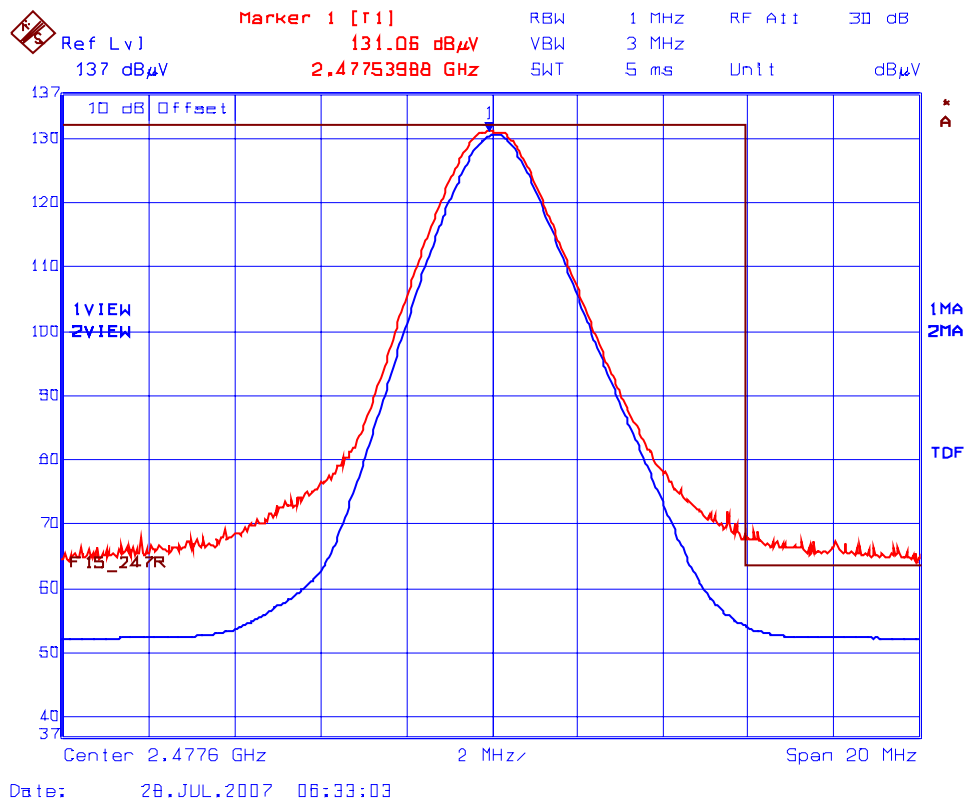


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.13 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
Rx Antenna Orientation: Horizontal

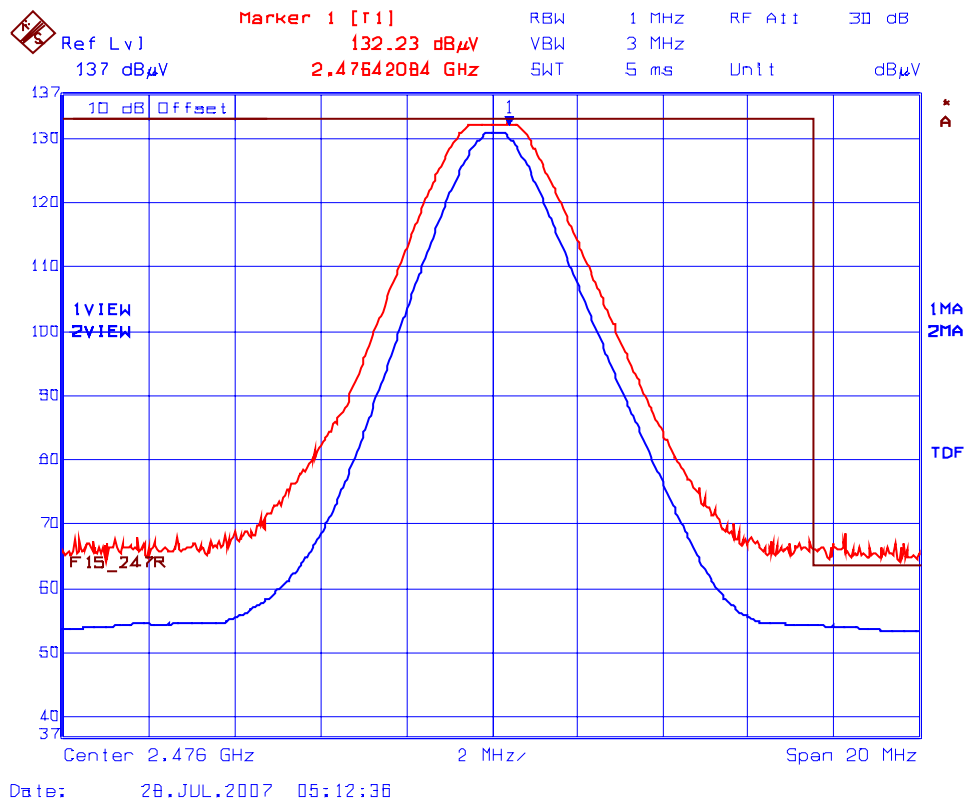


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.14 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
Rx Antenna Orientation: Vertical

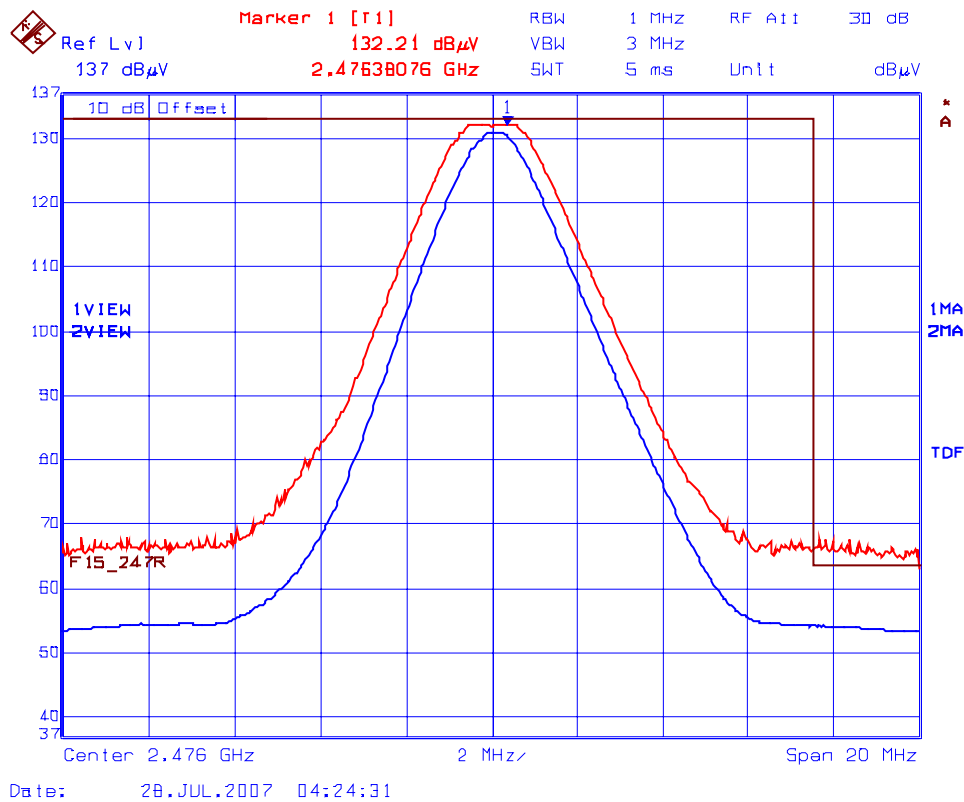


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.15 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
 Rx Antenna Orientation: Horizontal

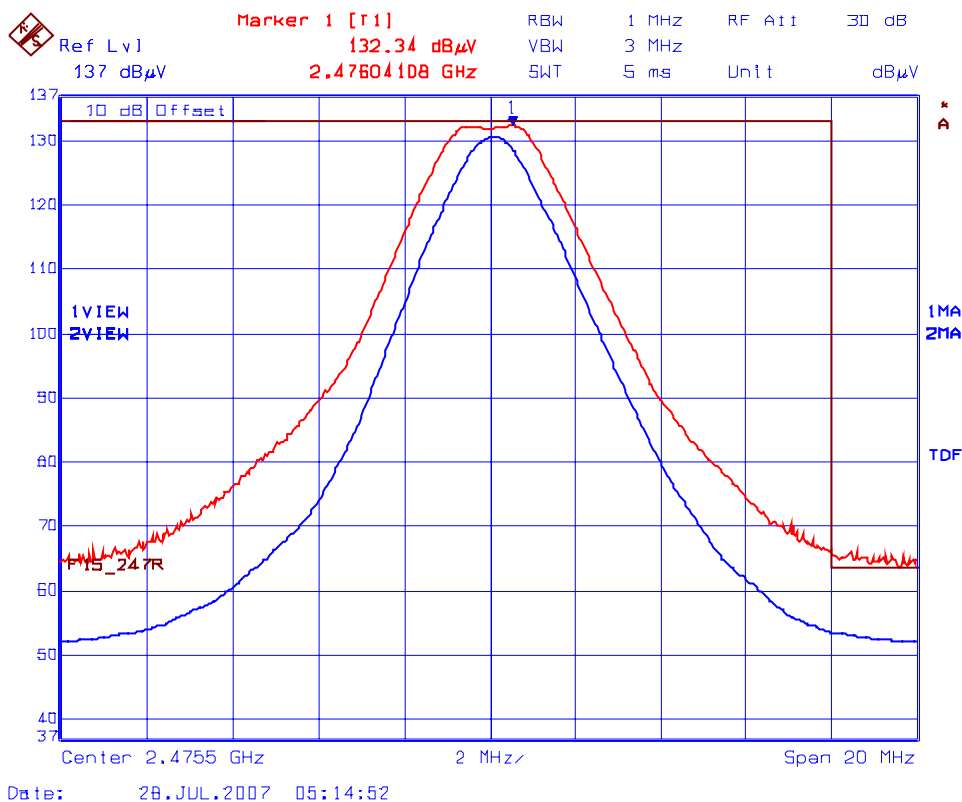


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.16 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

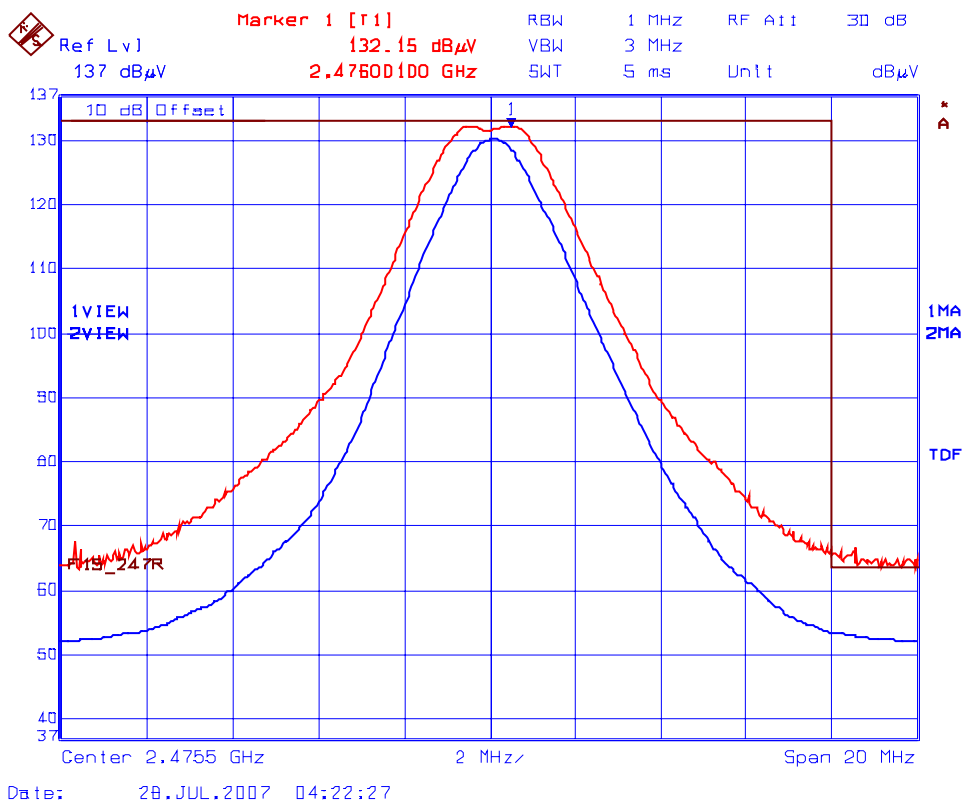


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.17 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

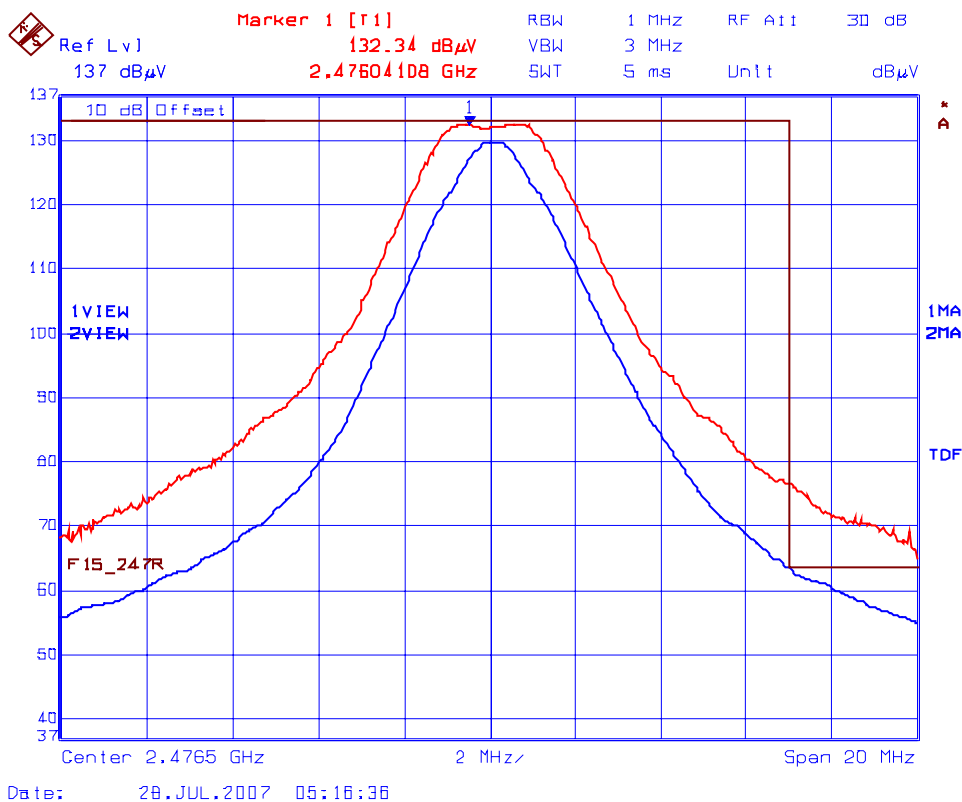


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.18 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Vertical

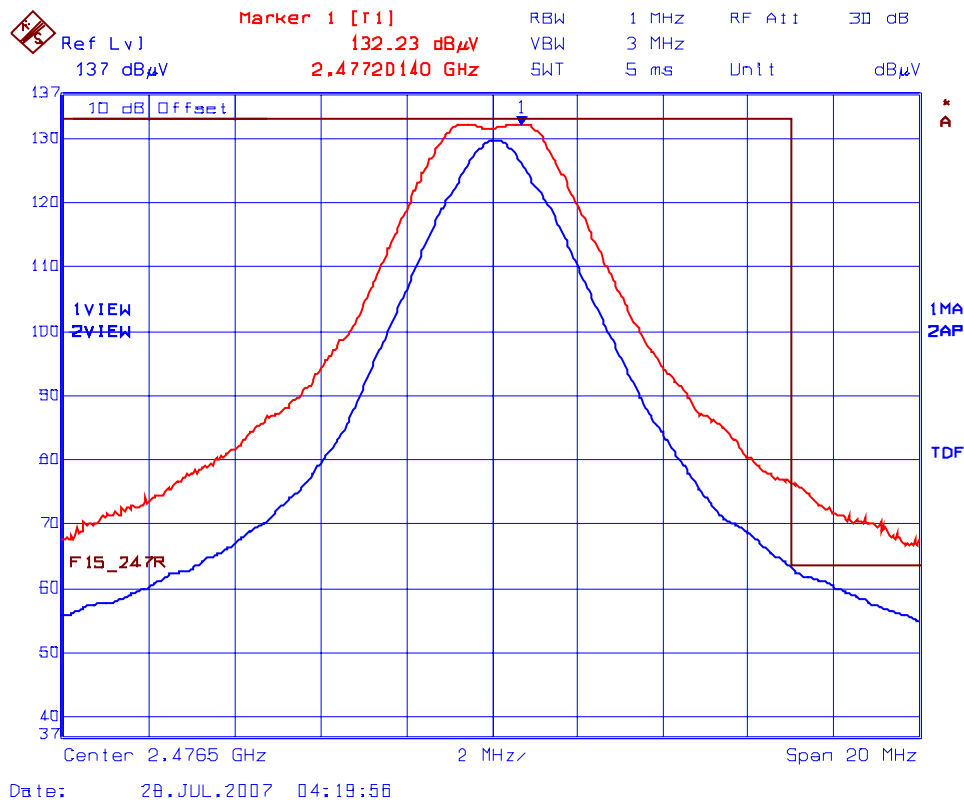


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.19 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Horizontal

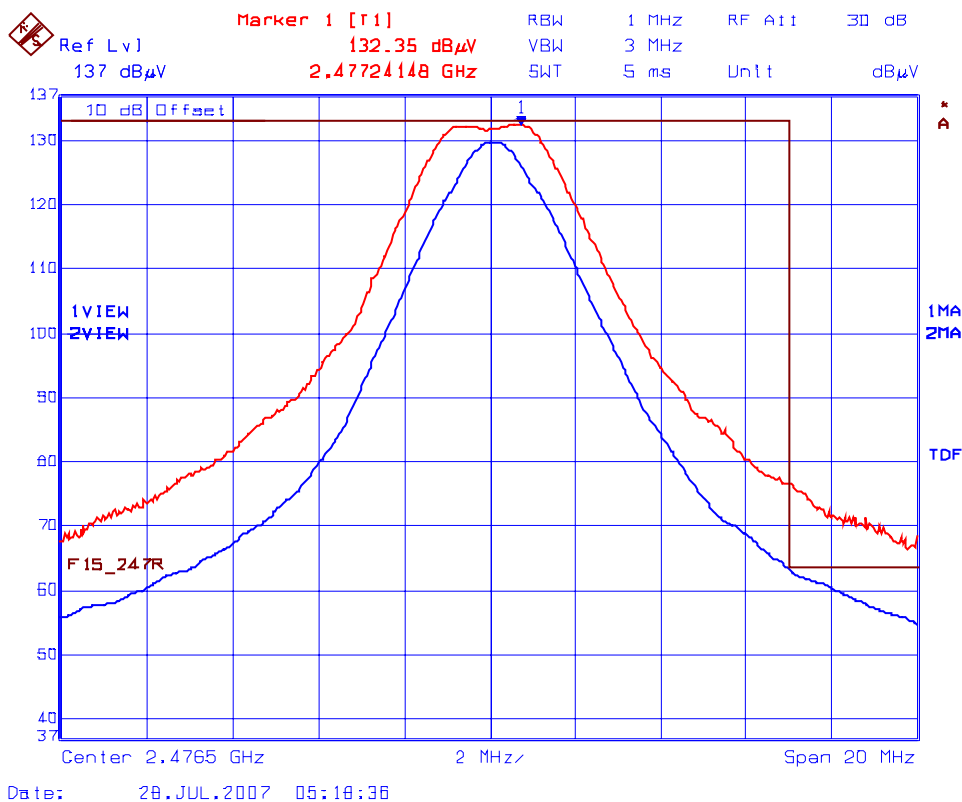

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.3.20 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Vertical

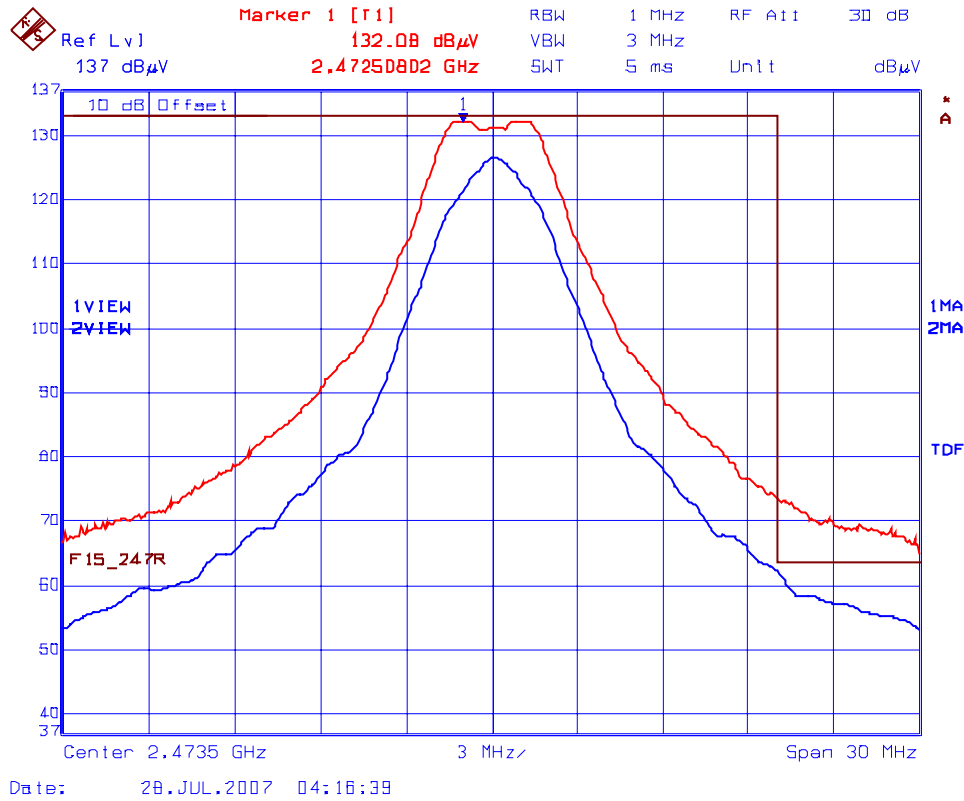


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

6.12.5.4. EUT with 14.5 dBi Yagi Antenna and 2.13 dB Assembly Cable Loss


Fundamental Frequency: 2401.6 MHz							
Software Power Setting: 115							
Measured Conducted Power: 23.22 dBm							
Frequency Test Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2401.6	131.30	--	V	--	--	--	--
2401.6	130.99	--	H	--	--	--	--
4803.2	49.07	41.00	V	54.0	111.3	-13.0	Pass*
4803.2	47.94	38.17	H	54.0	111.3	-15.8	Pass*
12008.0	56.77	46.19	V	54.0	111.3	-7.8	Pass*
12008.0	57.94	47.06	H	54.0	111.3	-6.9	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							

* Emission within the restricted frequency bands.

Plot 6.12.5.4.1(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

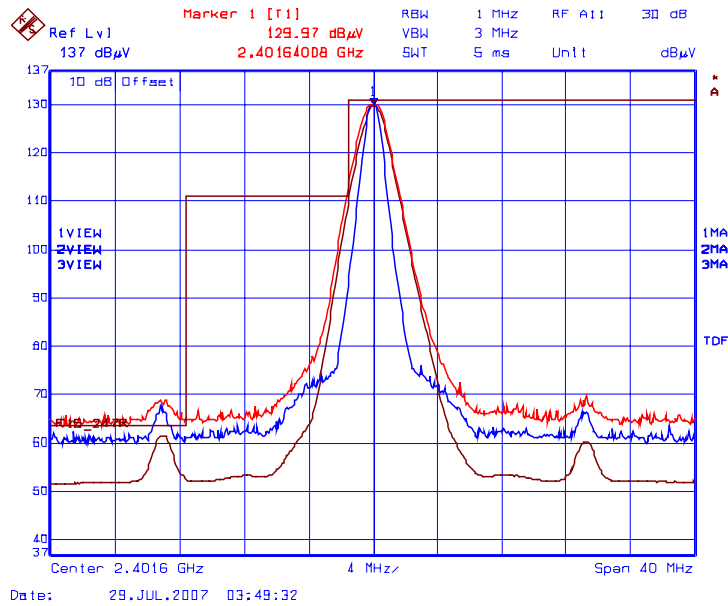


Plot 6.12.5.4.1(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

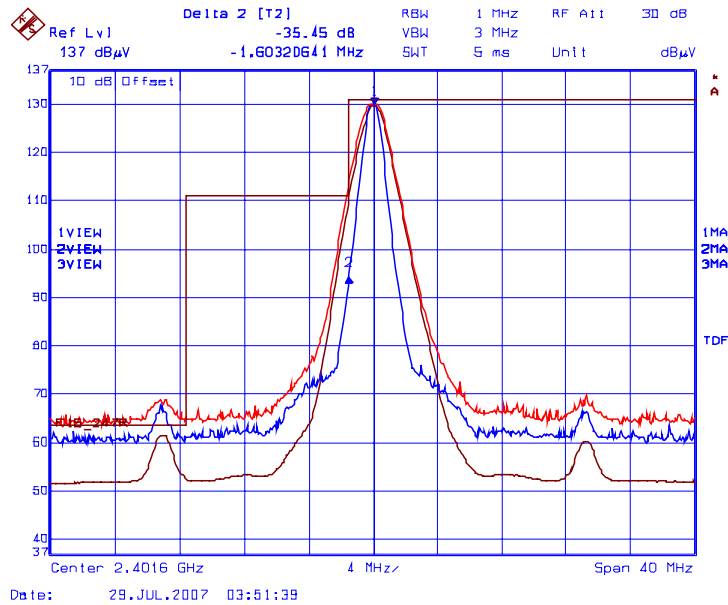


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.45 dB
 Trace 3: RBW= 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 129.97dBuV/m – 35.45dB = 94.52 dBμV/m (limit 109.97 dBμV/m)

Plot 6.12.5.4.2(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

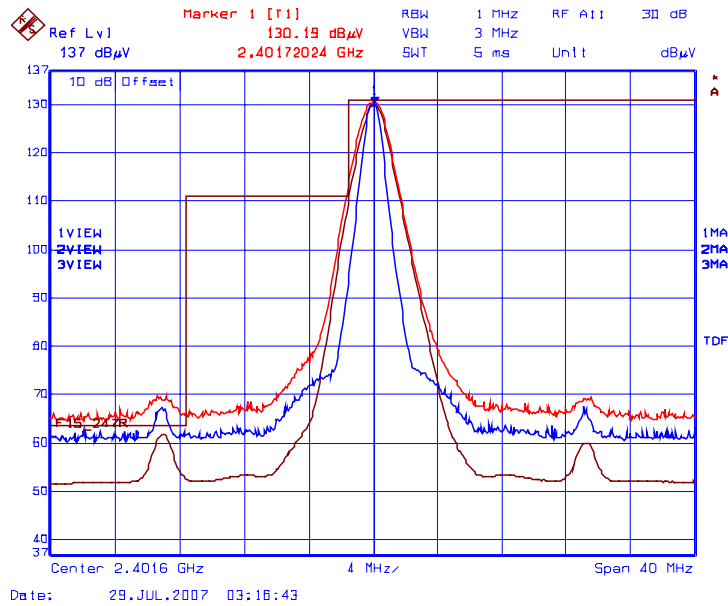


Plot 6.12.5.4.2(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

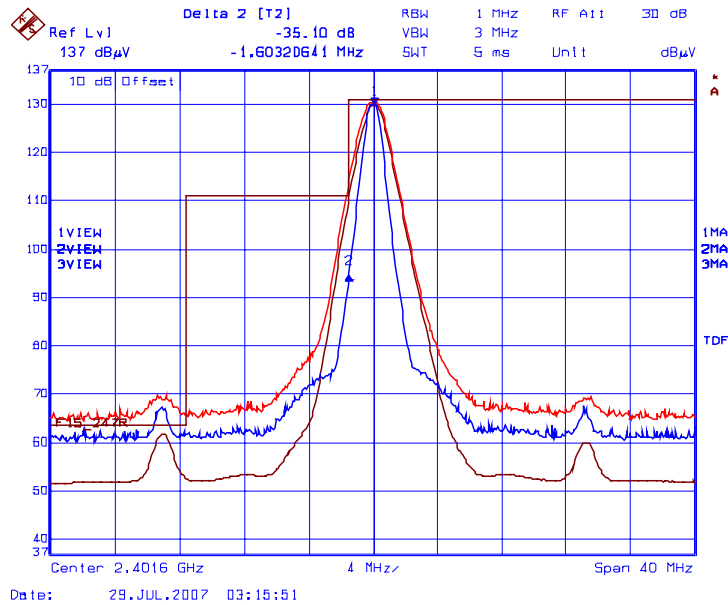


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.10 dB
 Trace 3: RBW= 1 MHz, VBW= 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 130.19 dBµV/m – 35.10dB = 95.09 dBµV/m (limit 110.19 dBµV/m)

Plot 6.12.5.4.3(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

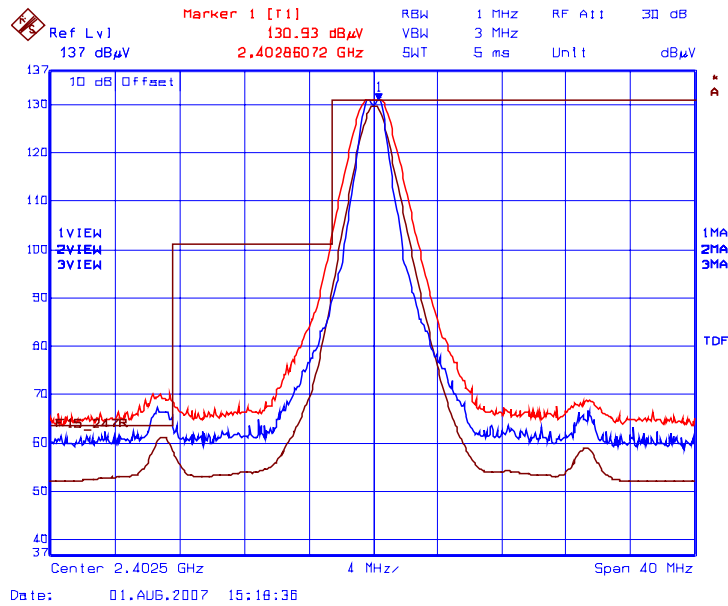


Plot 6.12.5.4.3(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

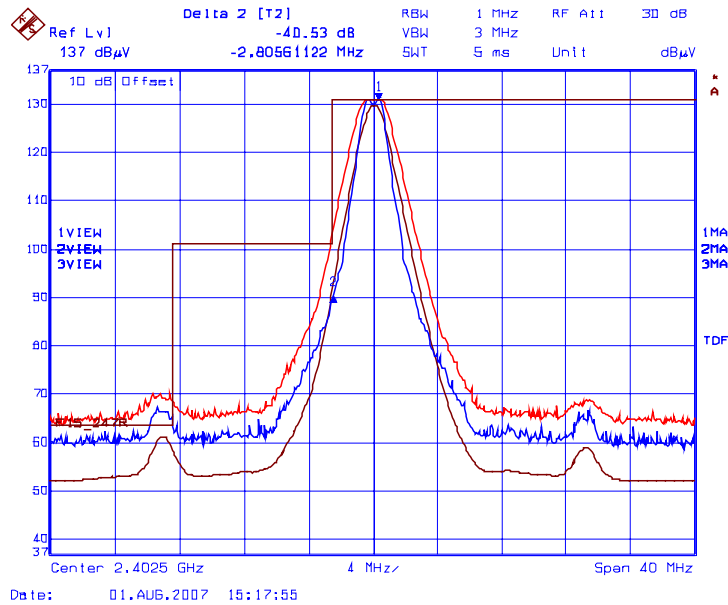


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 40.53 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 133.41 dBµV/m – 40.53 dB = 93.61 dBµV/m (limit 100.41 dBµV/m)

Plot 6.12.5.4.4(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

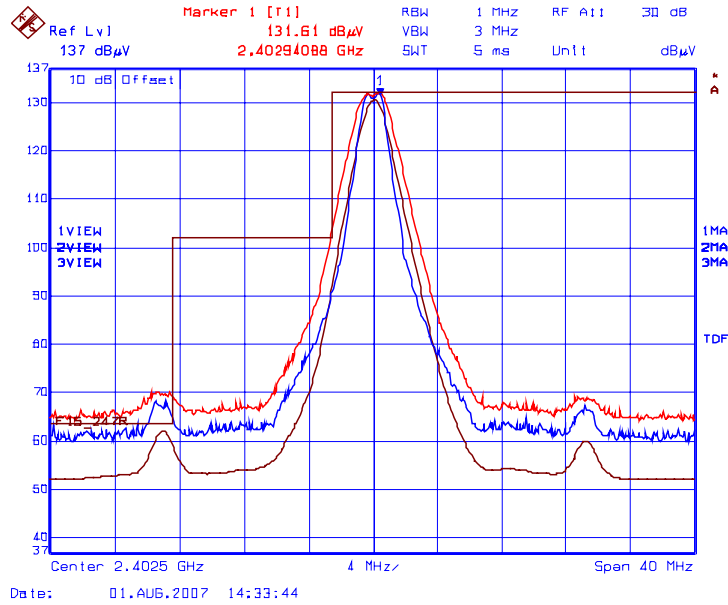


Plot 6.12.5.4.4(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

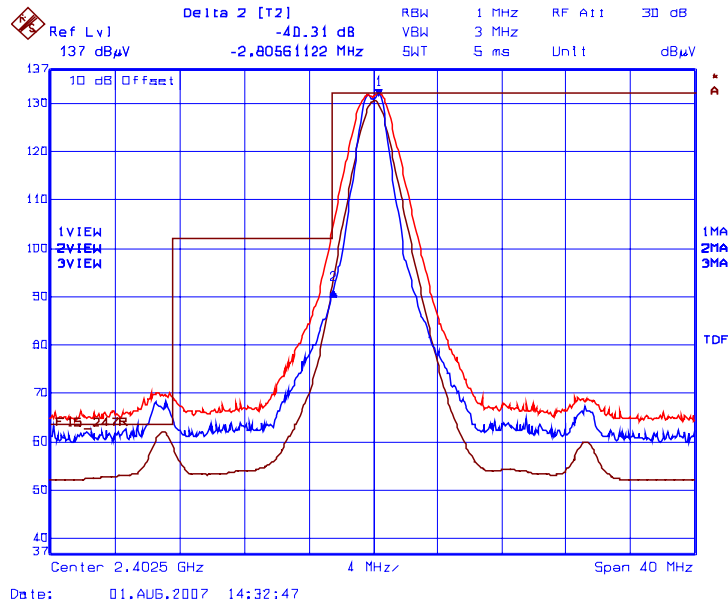


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 40.31 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 131.61 dBµV/m – 40.31dB = 91.30 dBµV/m (limit 101.61 dBµV/m)

Plot 6.12.5.4.5 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

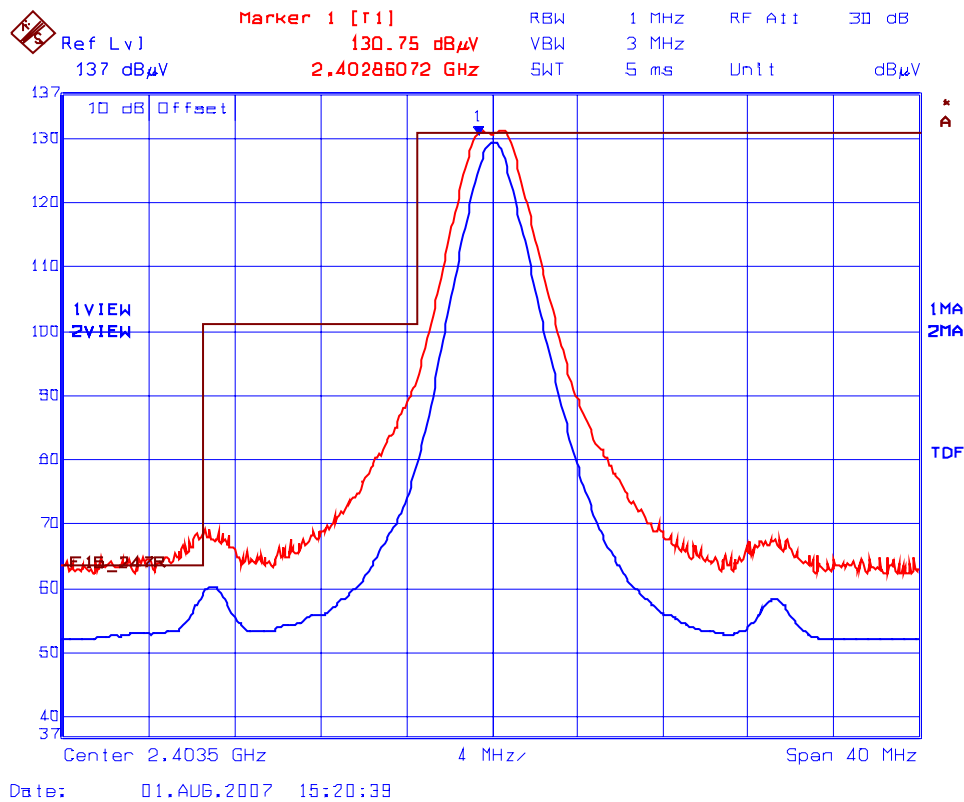


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.6 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

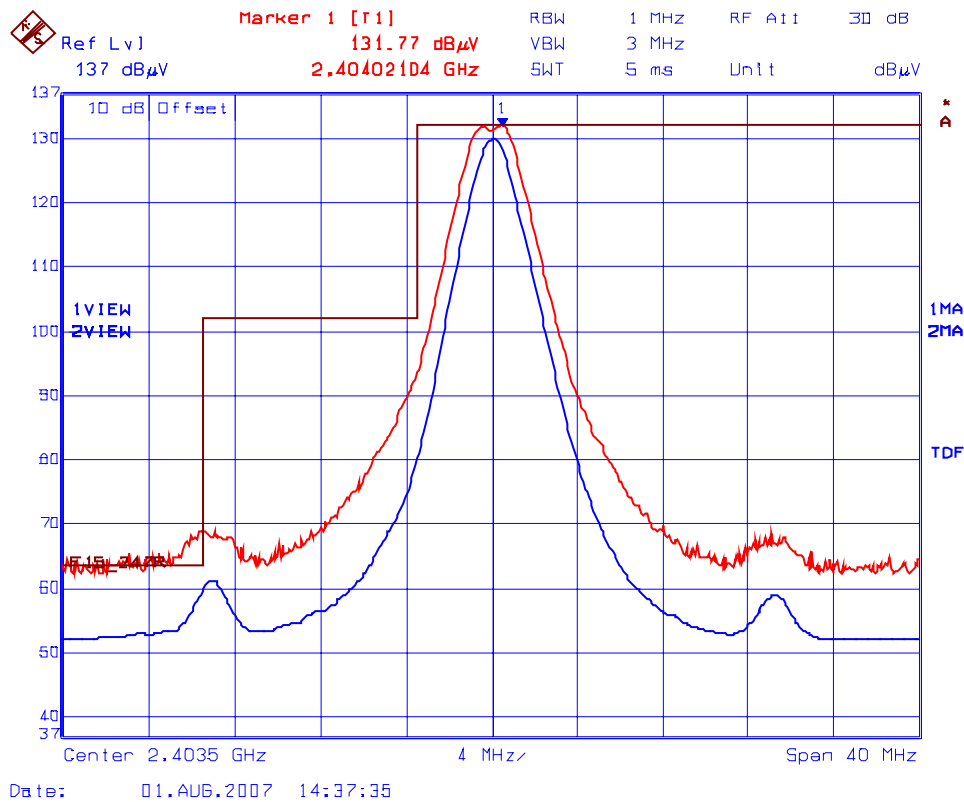


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.7 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

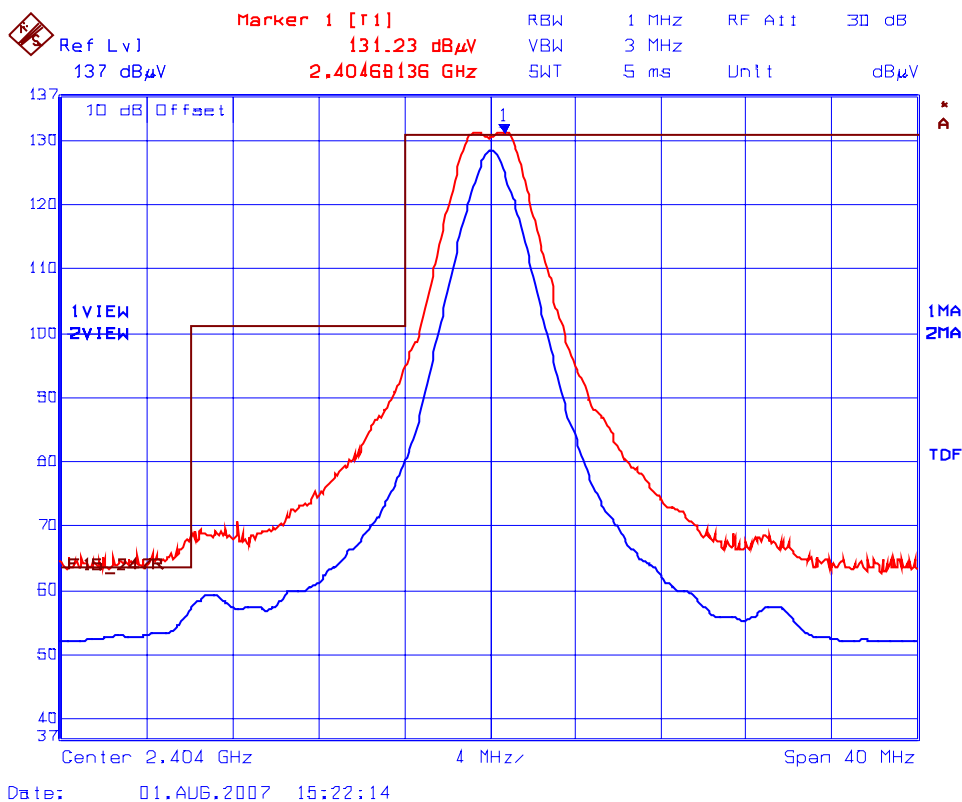


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.8 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Vertical

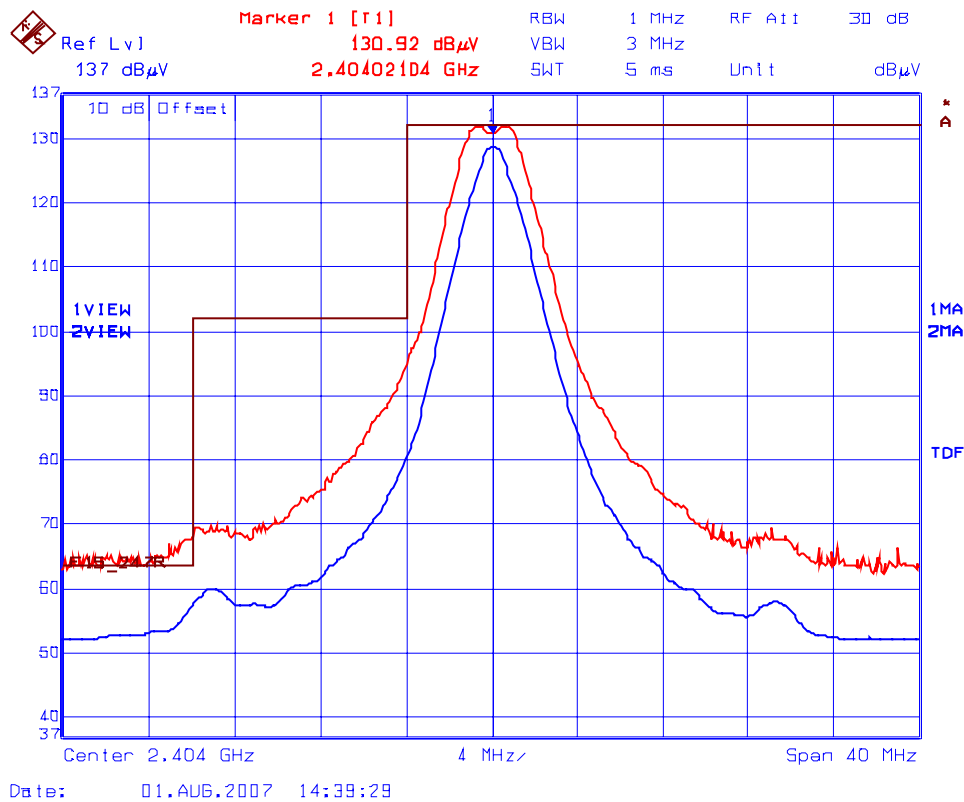


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.9 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Horizontal

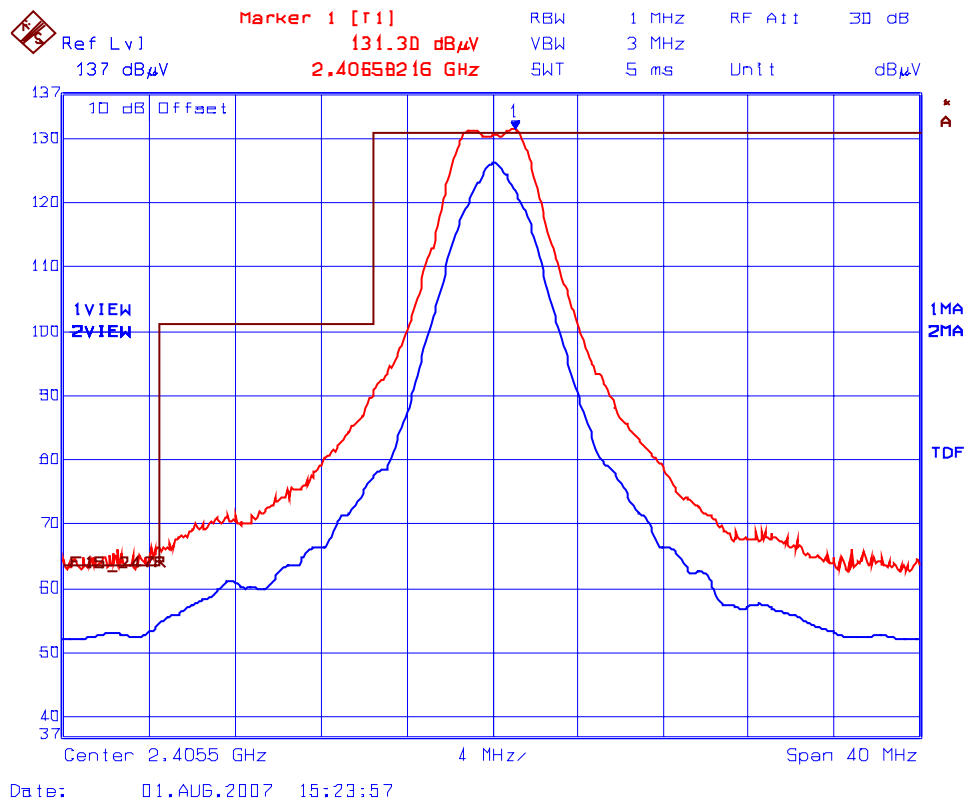

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.10 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Vertical

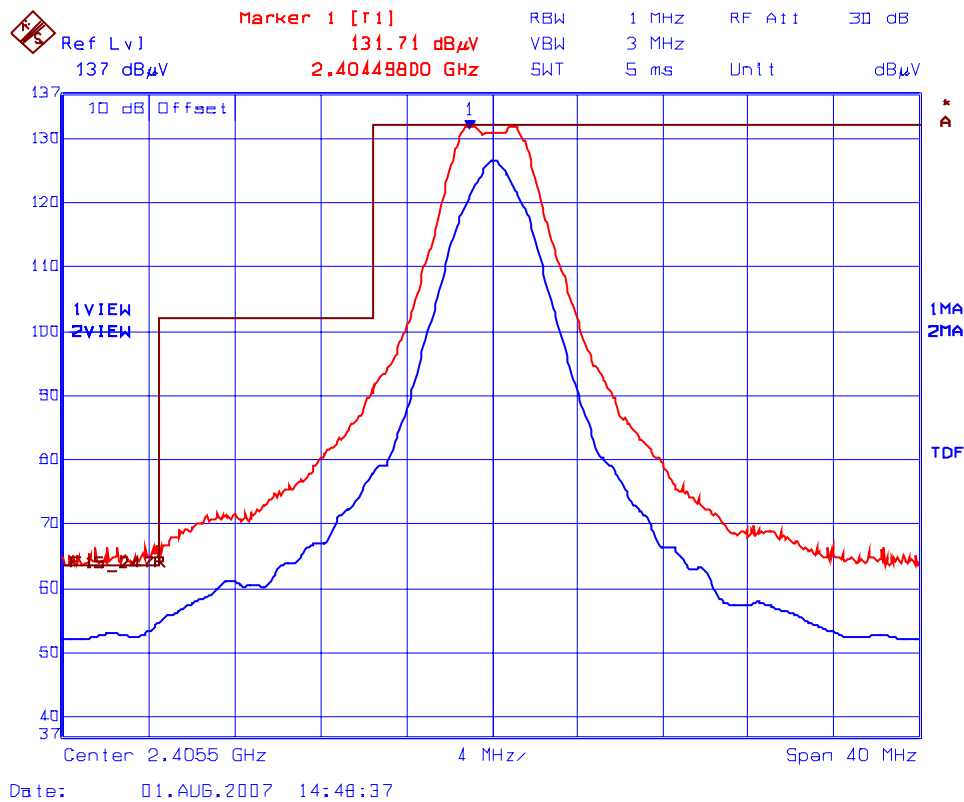

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz


Fundamental Frequency:		2439.6 MHz					
Software Power Setting:		115					
Measured Conducted Power:		23.58 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2439.6	131.54	--	V	--	--	--	--
2439.6	131.04	--	H	--	--	--	--
4879.2	47.34	37.98	V	54.0	111.5	-16.0	Pass*
4879.2	47.07	37.16	H	54.0	111.5	-16.8	Pass*
7318.8	48.36	36.88	V	54.0	111.5	-17.1	Pass*
7318.8	49.21	38.27	H	54.0	111.5	-15.7	Pass*
12198.0	56.89	45.53	V	54.0	111.5	-8.5	Pass*
12198.0	56.84	46.33	H	54.0	111.5	-7.7	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

* Emission within the restricted frequency bands.

Fundamental Frequency:		2477.6 MHz					
Software Power Setting:		115					
Measured Conducted Power:		22.95 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2477.6	131.96	--	V	--	--	--	--
2477.6	131.48	--	H	--	--	--	--
4955.2	47.90	36.48	V	54.0	112.0	-17.5	Pass*
4955.2	46.59	36.07	H	54.0	112.0	-17.9	Pass*
7432.8	49.20	40.17	V	54.0	112.0	-13.8	Pass*
7432.8	50.16	41.25	H	54.0	112.0	-12.8	Pass*
12388.0	55.61	42.95	V	54.0	112.0	-11.1	Pass*
12388.0	57.12	44.40	H	54.0	112.0	-9.6	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							


* Emission within the restricted frequency bands.

Plot 6.12.5.4.11 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

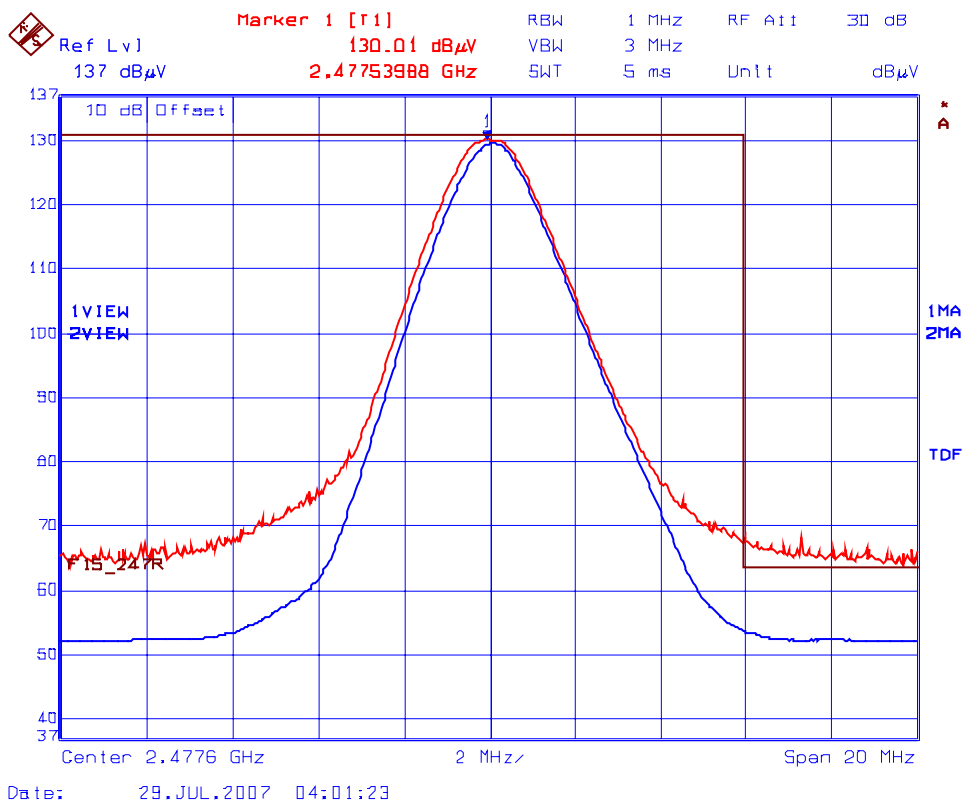


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.12 FHSS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

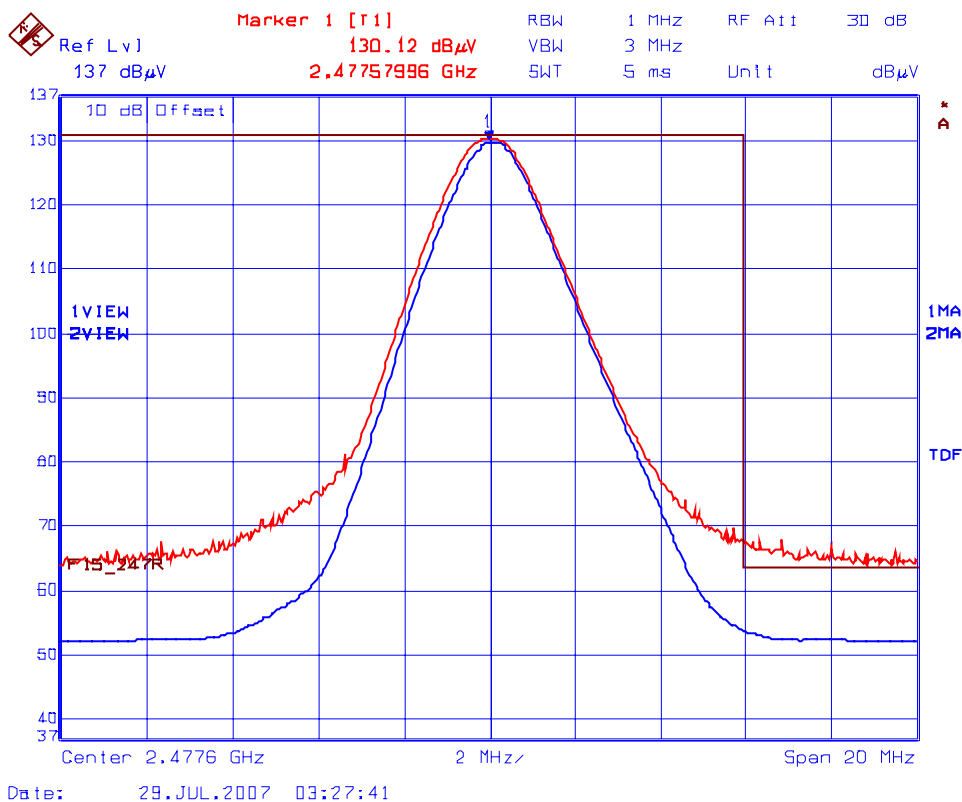


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.13 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

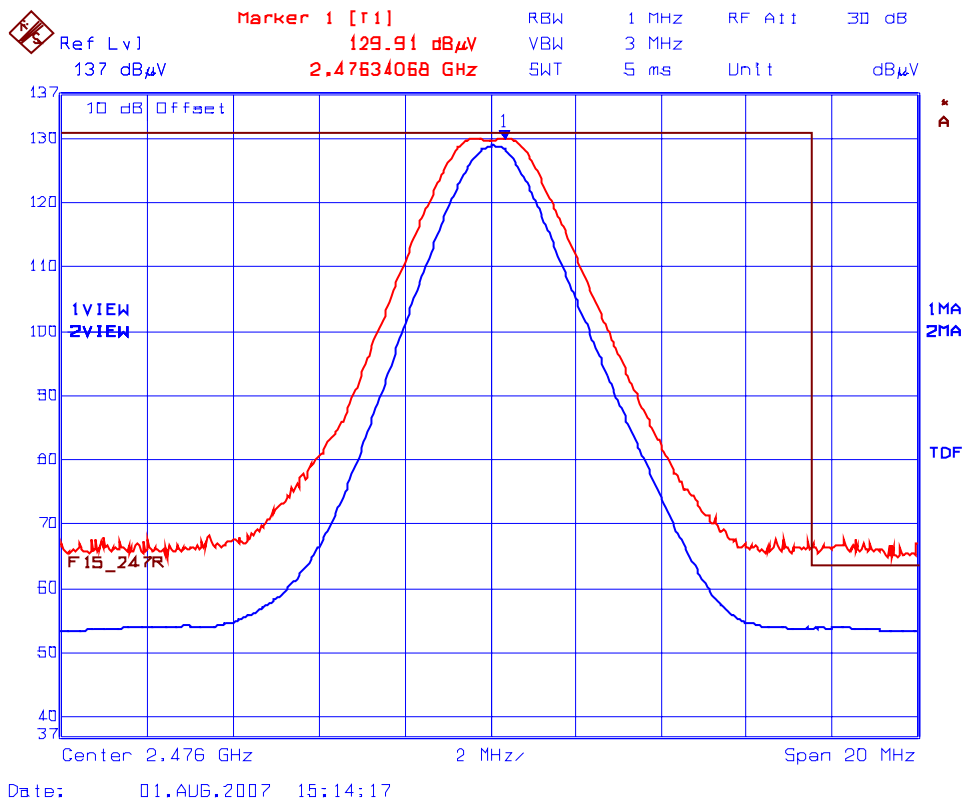


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.14 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
Rx Antenna Orientation: Vertical

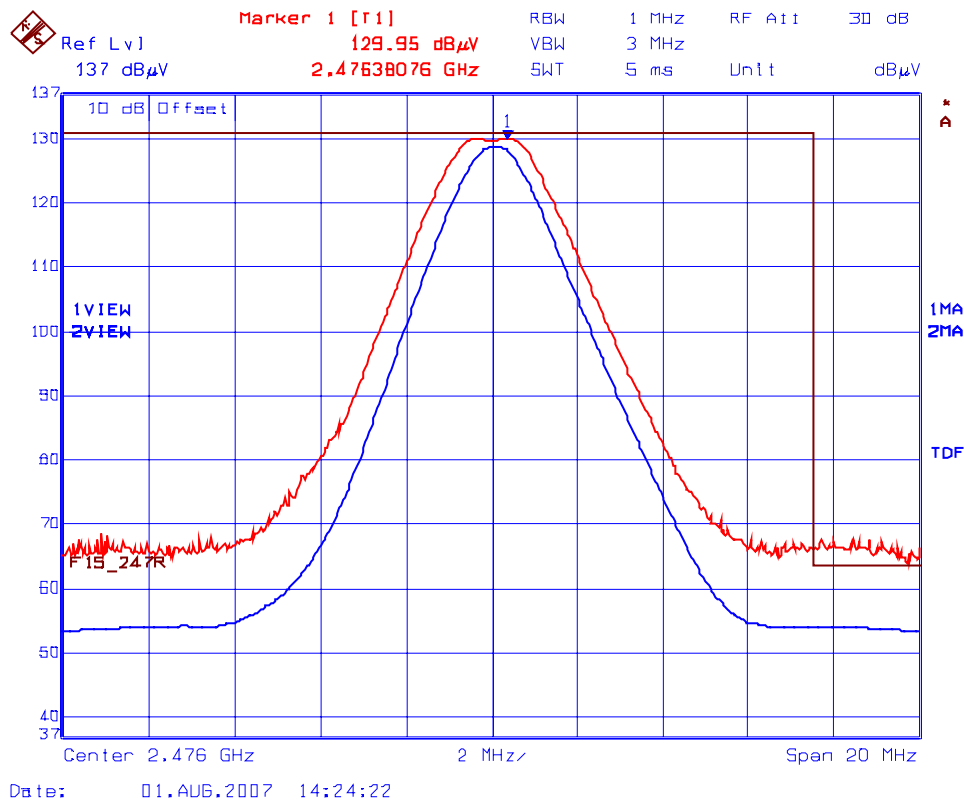


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.15 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

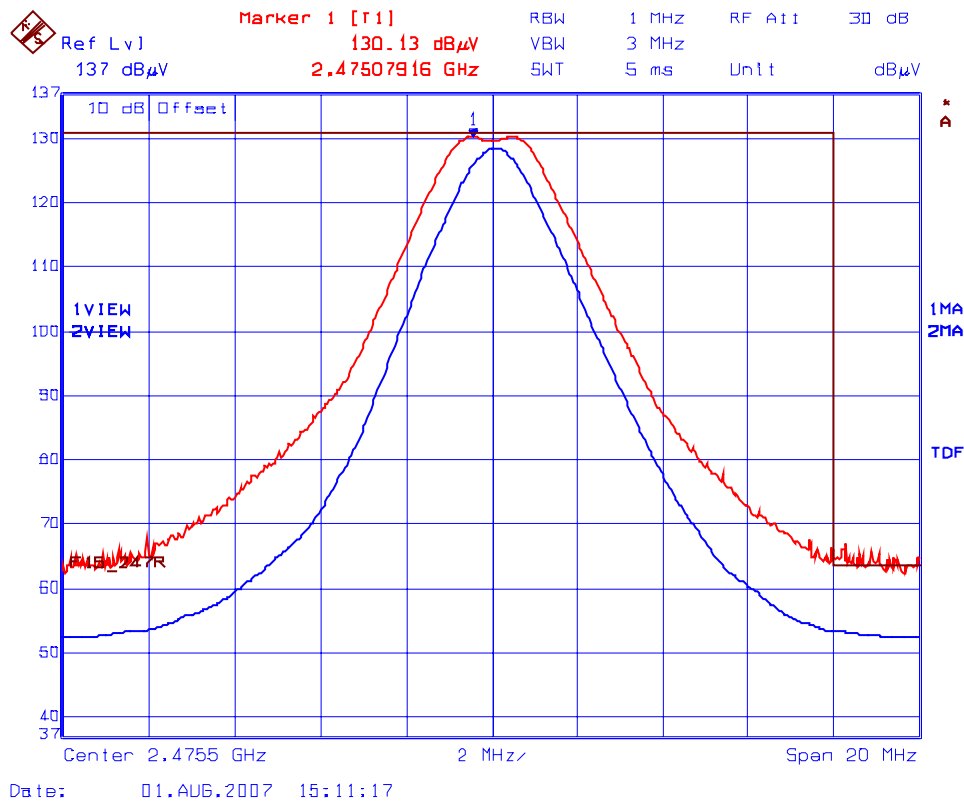


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.16 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

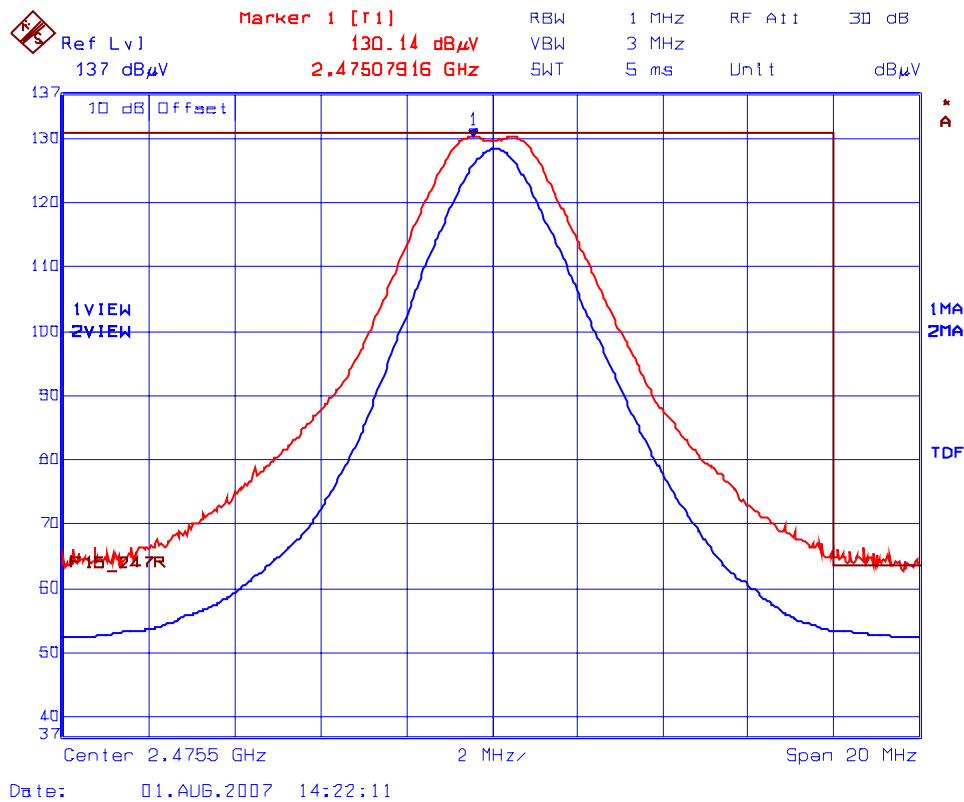


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.17 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Horizontal

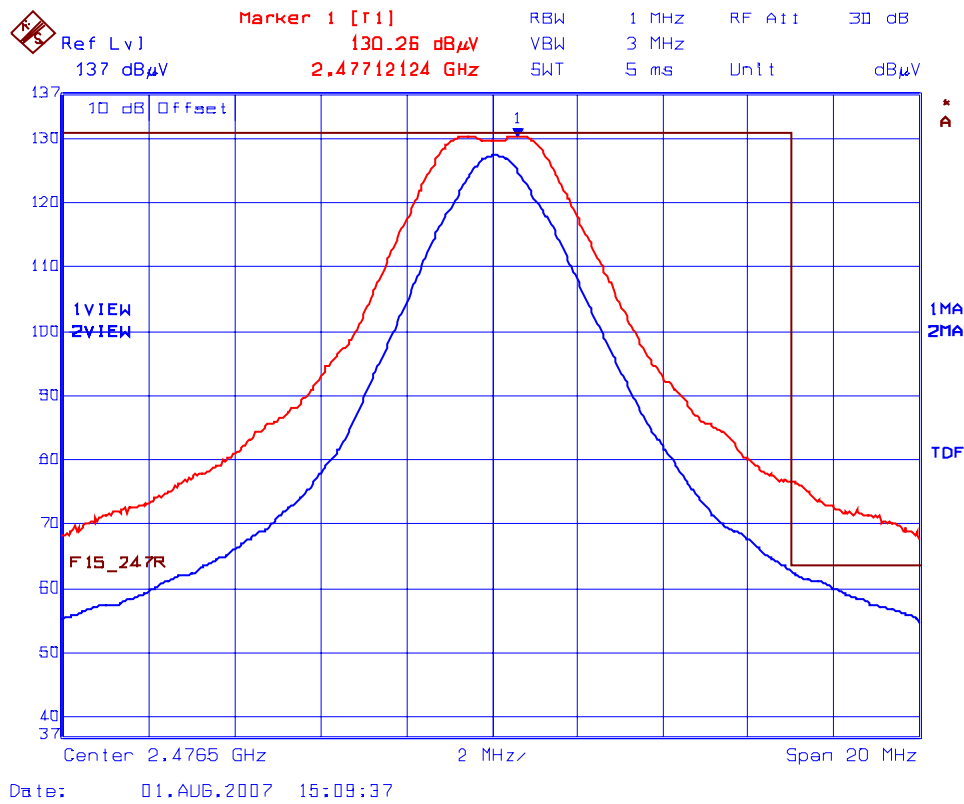


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.18 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Vertical

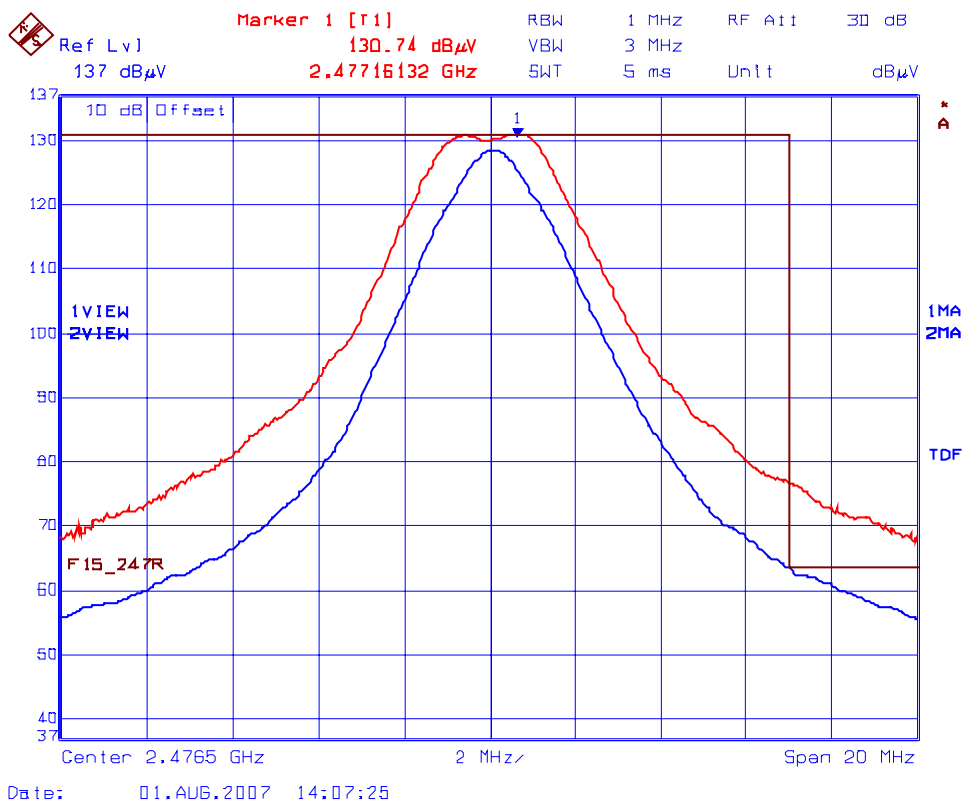


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.19 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Horizontal

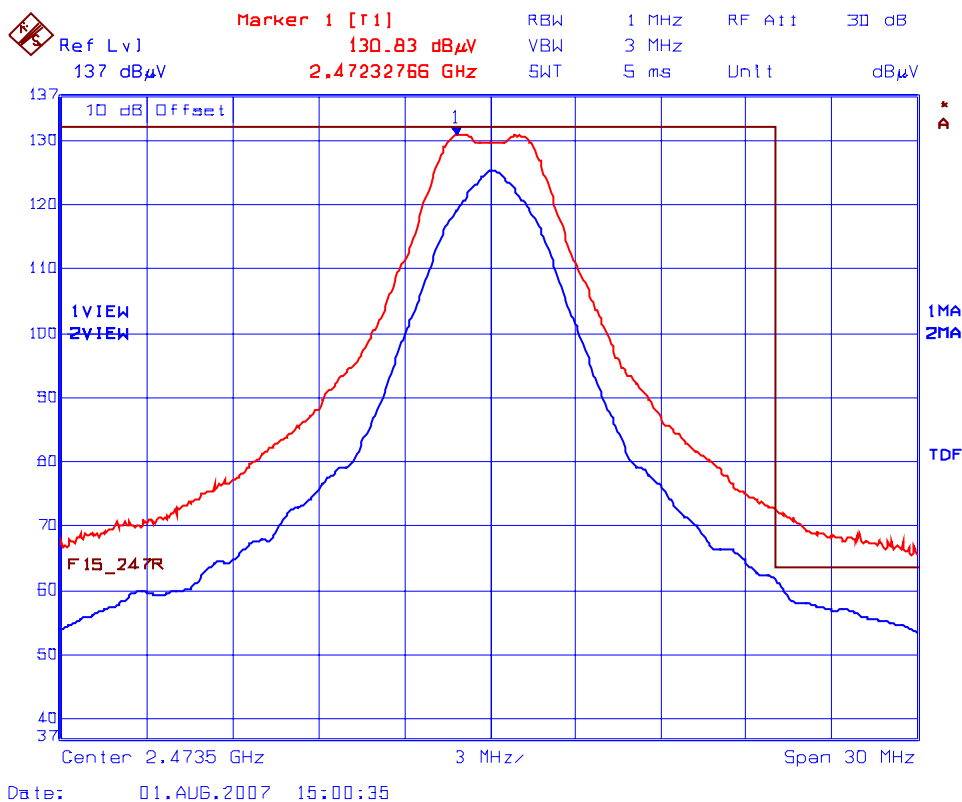

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.4.20 DTS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Vertical

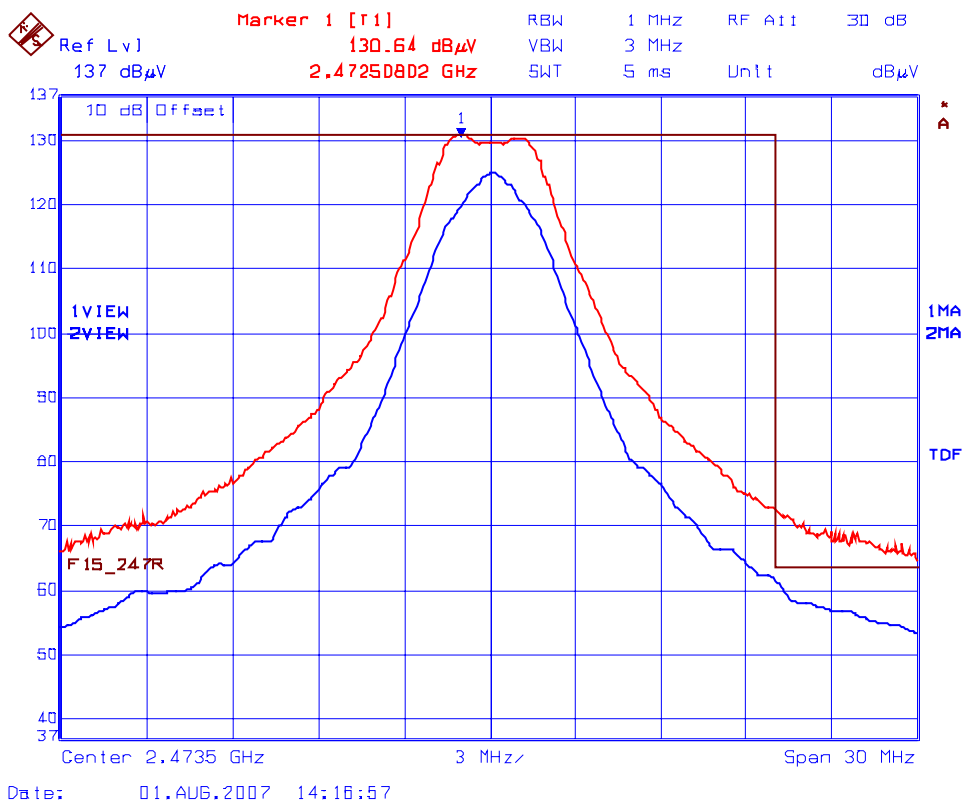


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

6.12.5.5. EUT with 15 dBi Omni Directional Antenna and 2.13 dB Assembly Cable Loss


Fundamental Frequency: 2401.6 MHz							
Software Power Setting: 112							
Measured Conducted Power: 22.69 dBm							
Frequency Test Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2401.6	131.71	--	V	--	--	--	--
2401.6	131.15	--	H	--	--	--	--
4803.2	49.07	40.31	V	54.0	111.7	-13.7	Pass*
4803.2	49.58	41.46	H	54.0	111.7	-12.5	Pass*
12008.0	57.08	45.08	V	54.0	111.7	-8.9	Pass*
12008.0	59.52	50.39	H	54.0	111.7	-3.6	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							

* Emission within the restricted frequency bands.

Plot 6.12.5.5.1(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

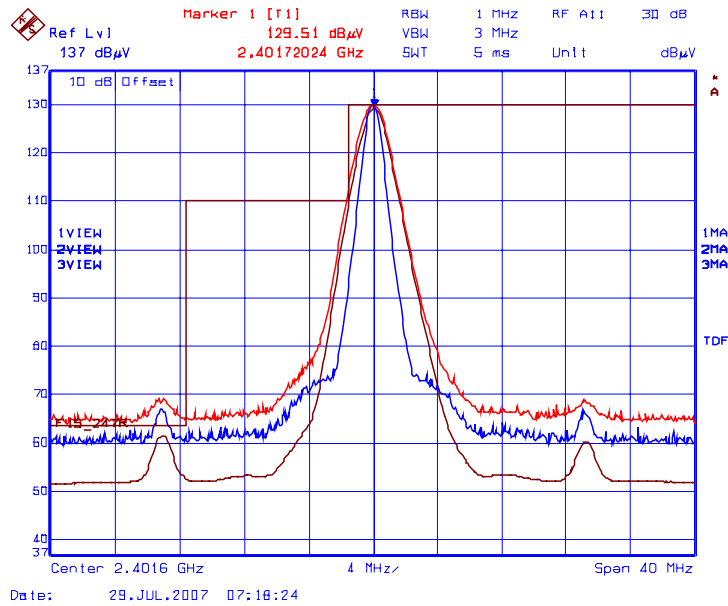


Plot 6.12.5.5.1(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Horizontal

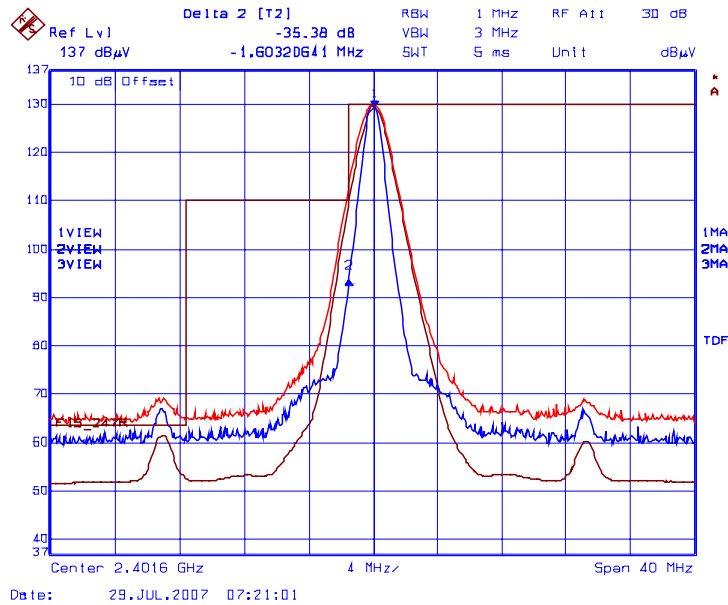


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.38 dB
 Trace 3: RBW= 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 129.51 dBµV/m – 35.38 dB = 94.13 dBµV/m (limit 109.51 dBµV/m)

Plot 6.12.5.5.2(a) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

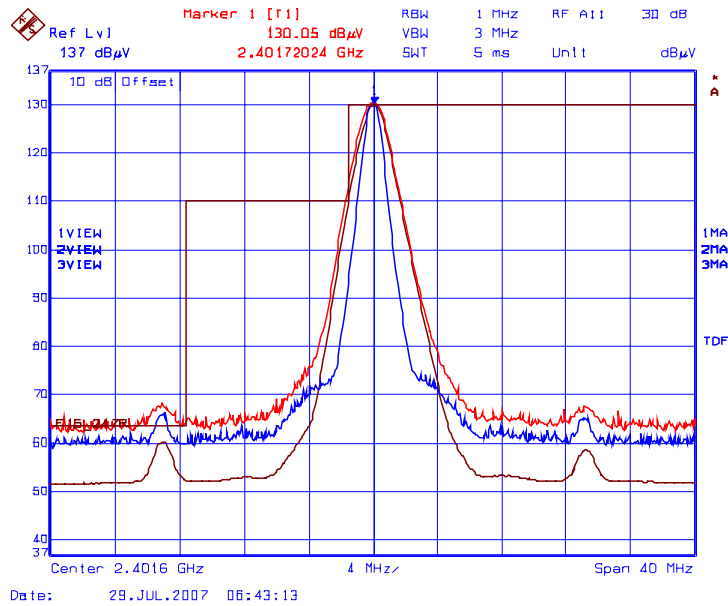


Plot 6.12.5.5.2(b) FHSS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2401.6 MHz at High Power with Data Rate 5)
 Rx Antenna Orientation: Vertical

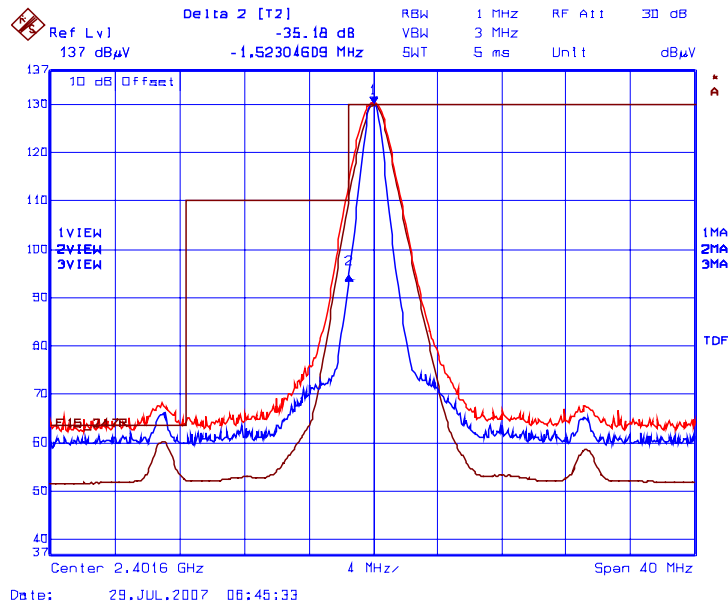


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 35.18 dB
 Trace 3: RBW= 1 MHz, VBW= 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 130.05 dBµV/m – 35.18 dB = 94.87 dBµV/m (limit 110.05 dBµV/m)

Plot 6.12.5.5.3(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

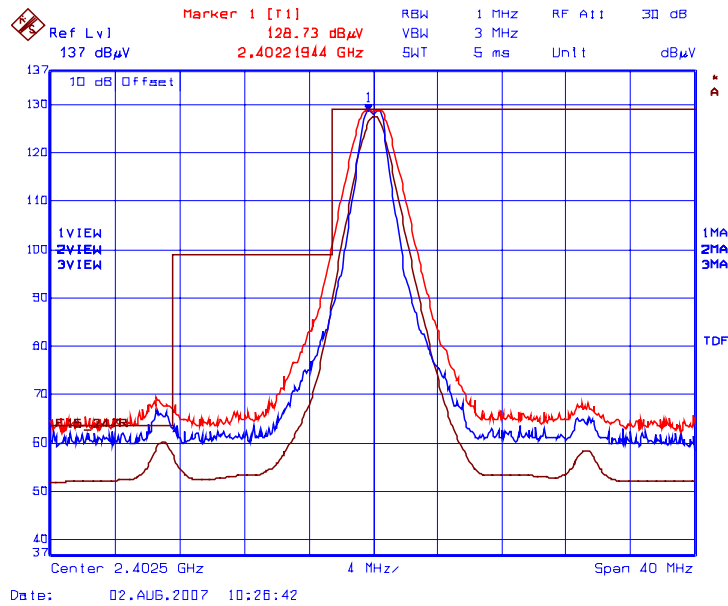


Plot 6.12.5.5.3(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

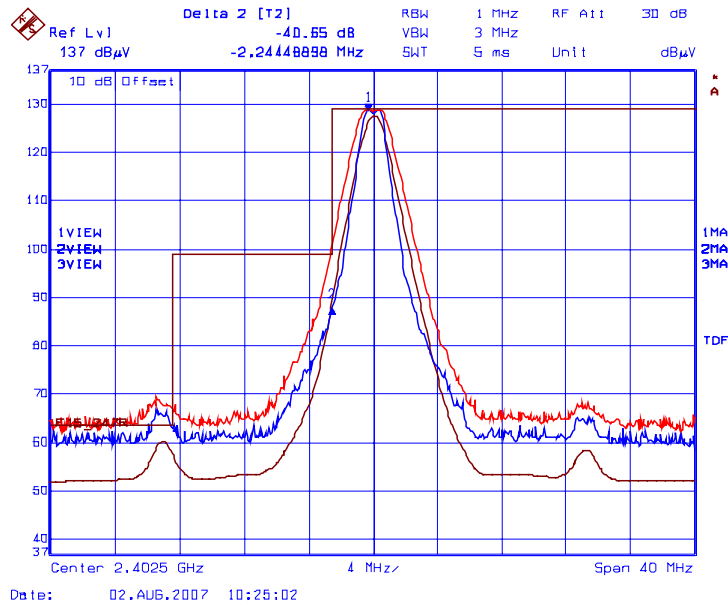


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 40.65 dB
 Trace 3: RBW = 1 MHz, VBW = 10 Hz
 Band-Edge Level at 2400 MHz: Peak = 128.73 dBµV/m – 40.65 dB = 88.08 dBµV/m (limit 98.73 dBµV/m)

Plot 6.12.5.5.4(a) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

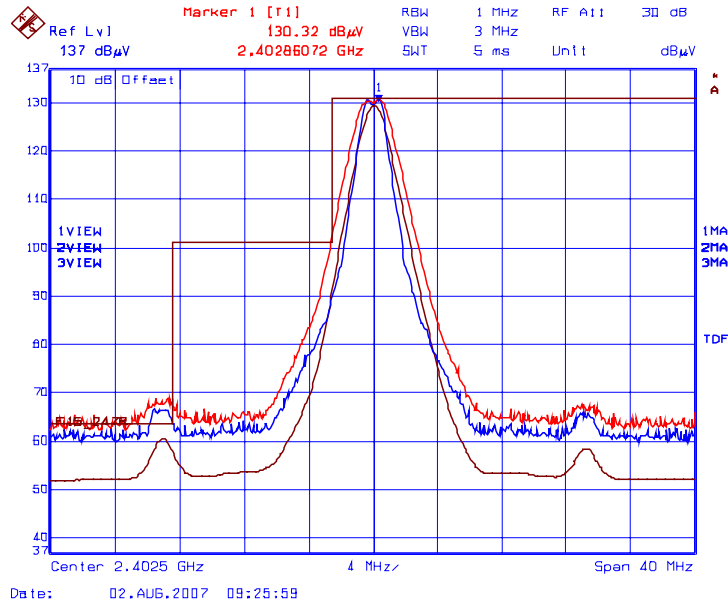

Plot 6.12.5.5.4(b) DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2402.5 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

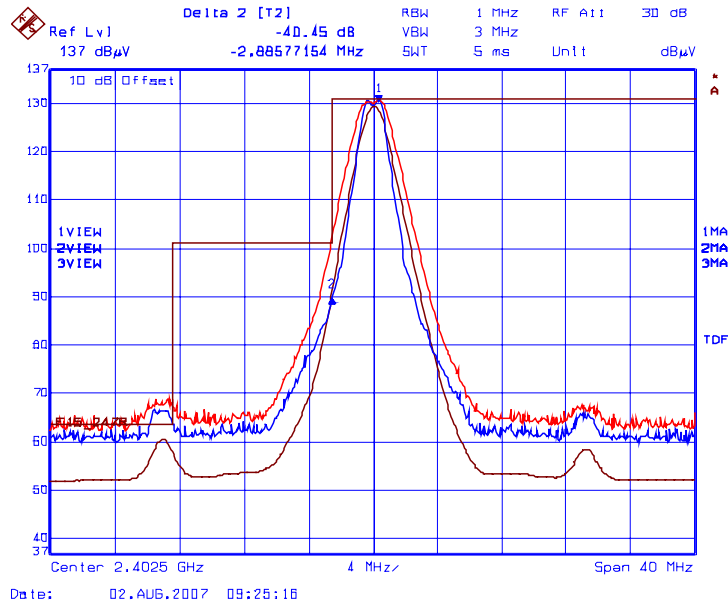


Trace 1: RBW = 1 MHz, VBW = 3 MHz

Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 40.45 dB

Trace 3: RBW = 1 MHz, VBW = 10 Hz


Band-Edge Level at 2400 MHz: Peak = 130.32 dBμV/m – 40.45 dB = 89.87 dBμV/m (limit 100.32 dBμV/m)

Plot 6.12.5.5.5 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Horizontal

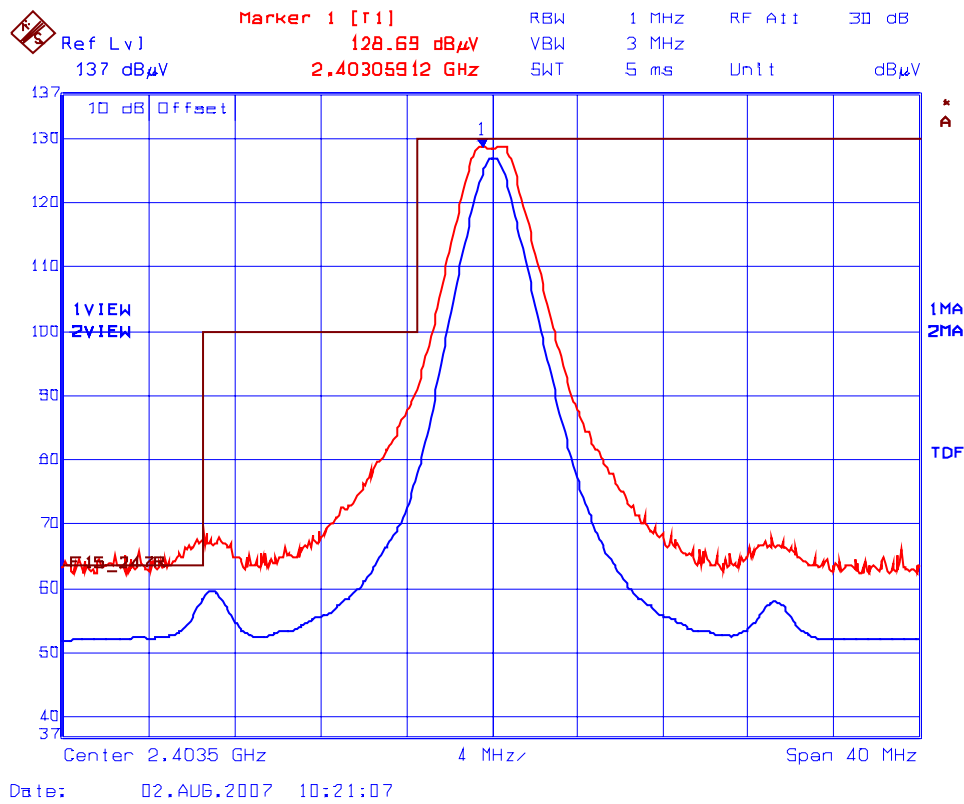


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.5.6 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2403.5 MHz at High Power with Data Rate 9)
Rx Antenna Orientation: Vertical

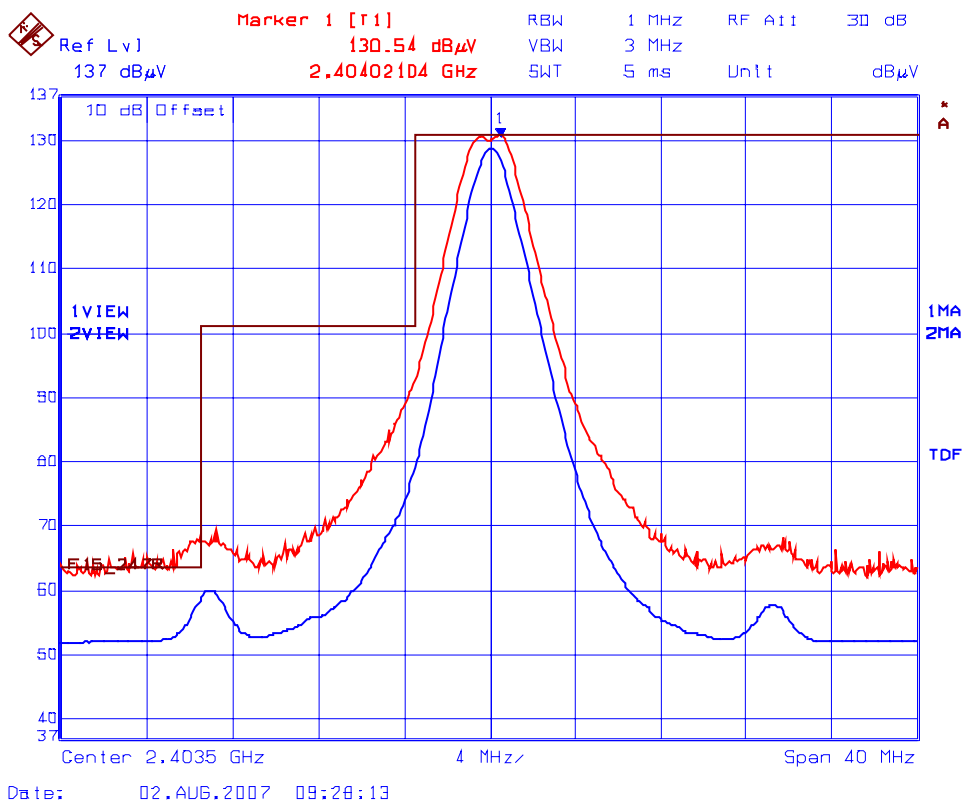


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.5.7 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Horizontal

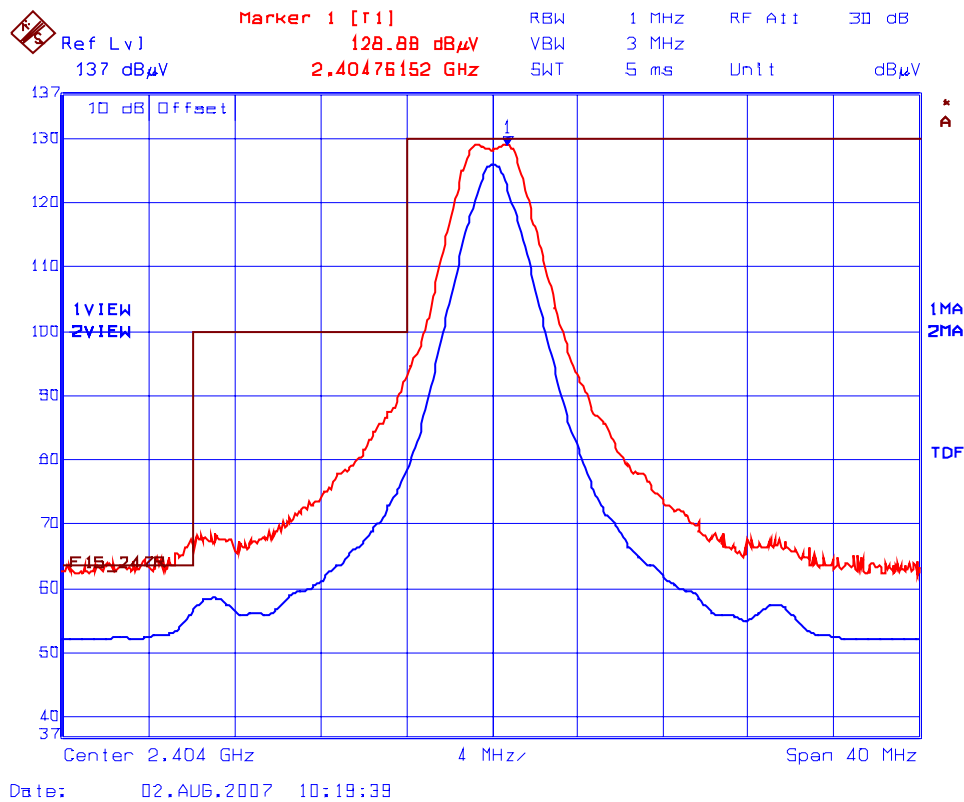


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.5.8 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2404.0 MHz at High Power with Data Rate 10)
Rx Antenna Orientation: Vertical

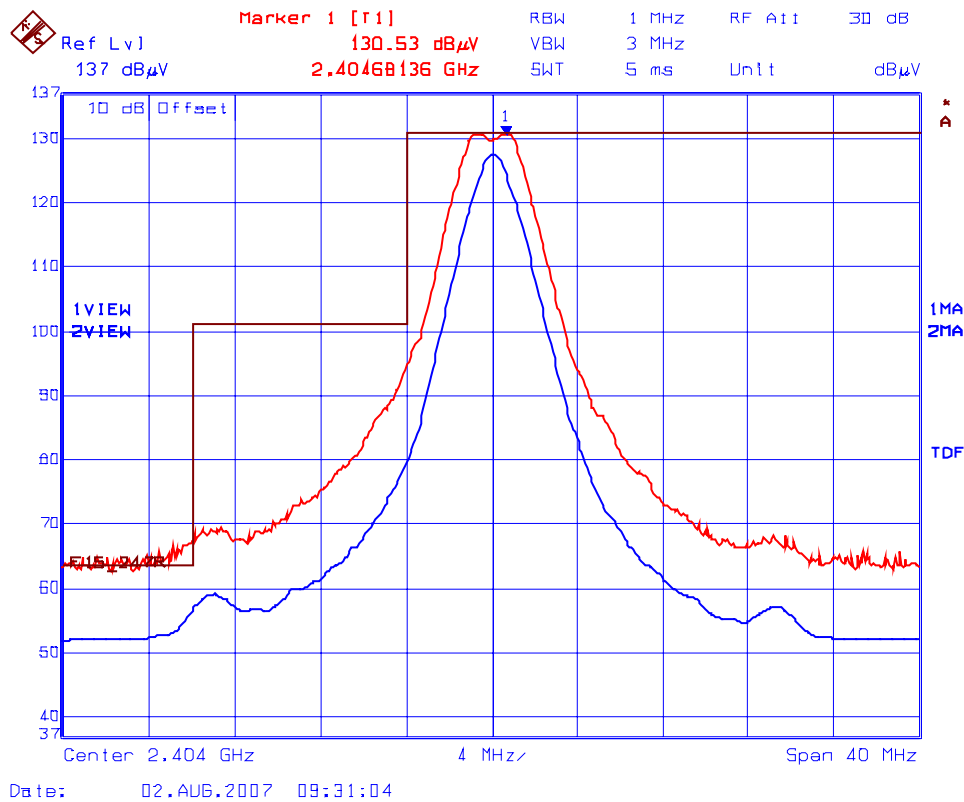


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.5.9 DTS - Band-Edge RF Radiated Emissions @ 1 m
 Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Horizontal

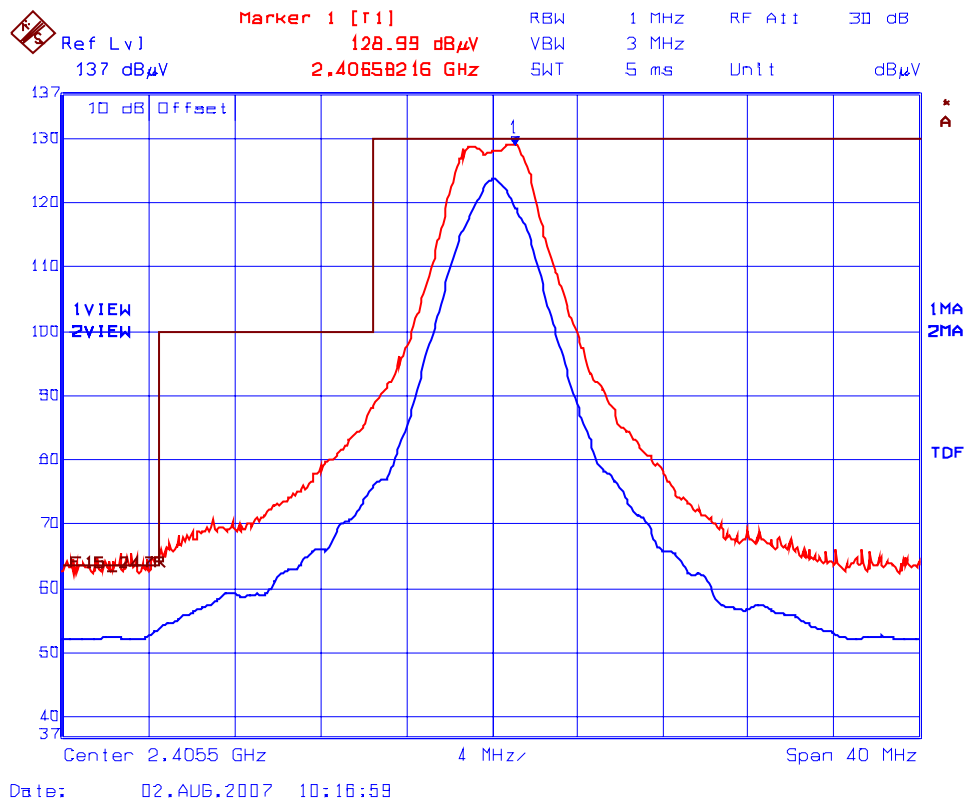

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.10 DTS - Band-Edge RF Radiated Emissions @ 1 m
Low End of Frequency Band (2405.5 MHz at High Power with Data Rate 11)
Rx Antenna Orientation: Vertical

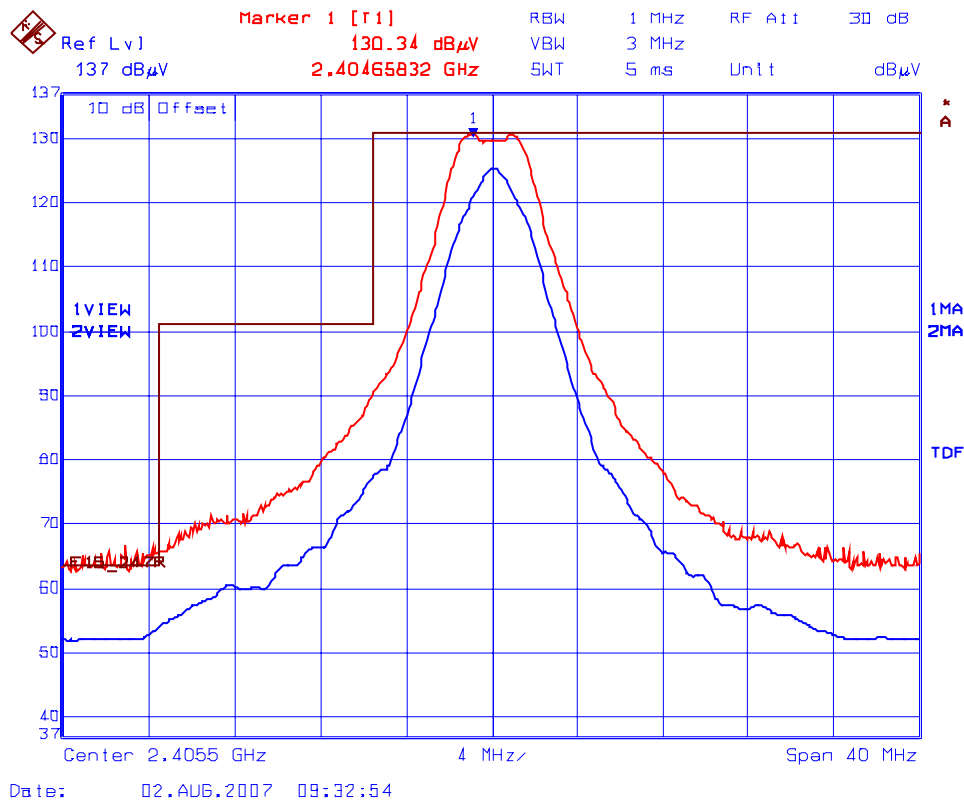

Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz


Fundamental Frequency:		2439.6 MHz					
Software Power Setting:		112					
Measured Conducted Power:		23.08 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2439.6	131.08	--	V	--	--	--	--
2439.6	131.24	--	H	--	--	--	--
4879.2	48.21	40.42	V	54.0	111.2	-13.6	Pass*
4879.2	48.74	38.58	H	54.0	111.2	-15.4	Pass*
7318.8	48.56	35.45	V	54.0	111.2	-18.6	Pass*
7318.8	48.27	35.01	H	54.0	111.2	-19.0	Pass*
12198.0	55.87	44.04	V	54.0	111.2	-10.0	Pass*
12198.0	57.23	47.30	H	54.0	111.2	-6.7	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

* Emission within the restricted frequency bands.

Fundamental Frequency:		2477.6 MHz					
Software Power Setting:		112					
Measured Conducted Power:		22.42 dBm					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
2477.6	130.84	--	V	--	--	--	--
2477.6	131.13	--	H	--	--	--	--
4955.2	49.47	41.88	V	54.0	111.1	-12.1	Pass*
4955.2	48.56	40.02	H	54.0	111.1	-14.0	Pass*
7432.8	48.47	36.85	V	54.0	111.1	-17.2	Pass*
7432.8	48.73	36.47	H	54.0	111.1	-17.5	Pass*
12388.0	56.88	43.58	V	54.0	111.1	-10.4	Pass*
12388.0	56.15	44.41	H	54.0	111.1	-9.6	Pass*
All other spurious emissions and harmonics are more than 20 dB below the applicable limit. See the following test data plots for band-edge emissions.							


* Emission within the restricted frequency bands.

Plot 6.12.5.11 FHSS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
Rx Antenna Orientation: Horizontal

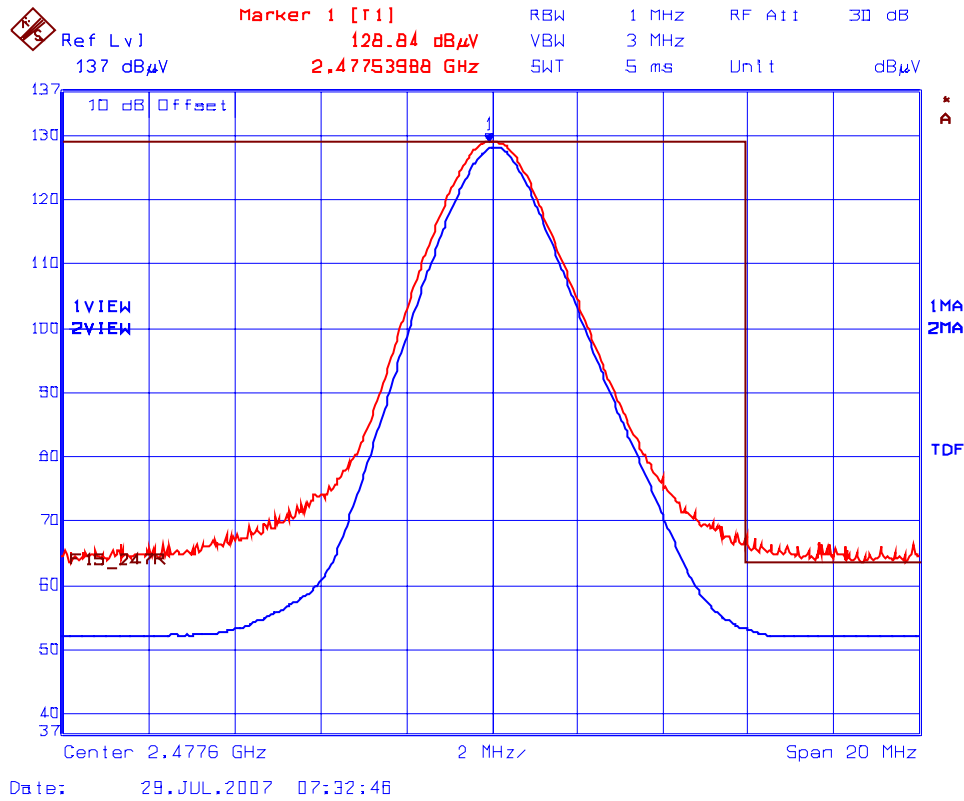


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.5.12 FHSS - Band-Edge RF Radiated Emissions @ 1 m
High End of Frequency Band (2477.6 MHz at High Power with Data Rate 5)
Rx Antenna Orientation: Vertical

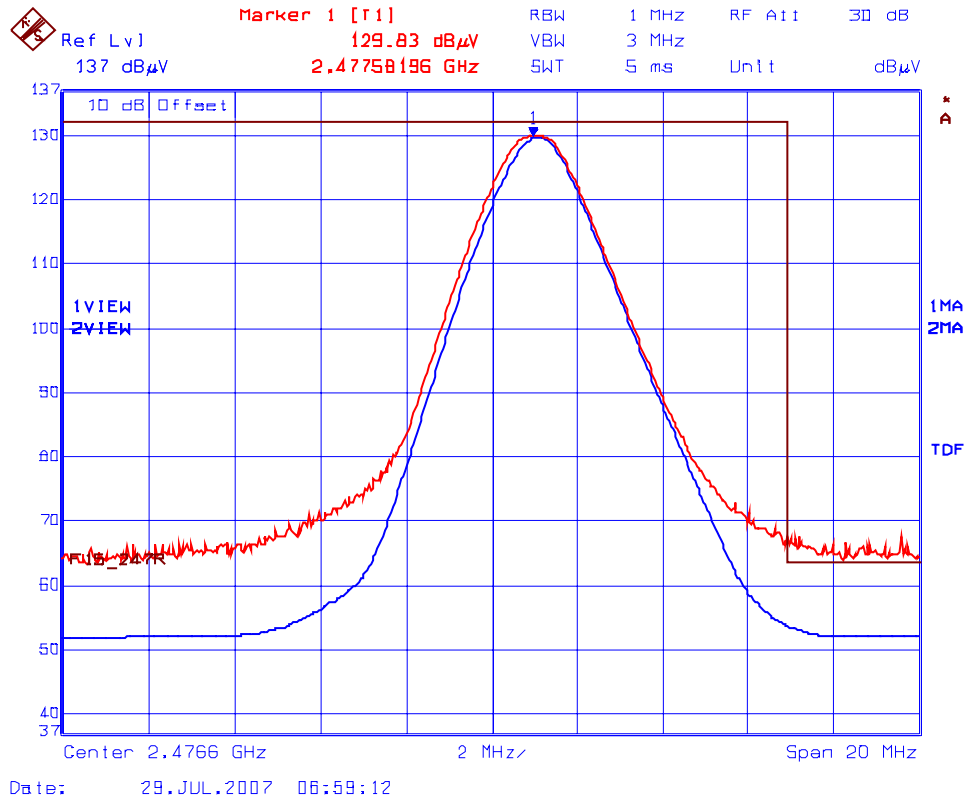


Trace 1: RBW = 1 MHz, VBW = 3 MHz
Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.5.13 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Horizontal

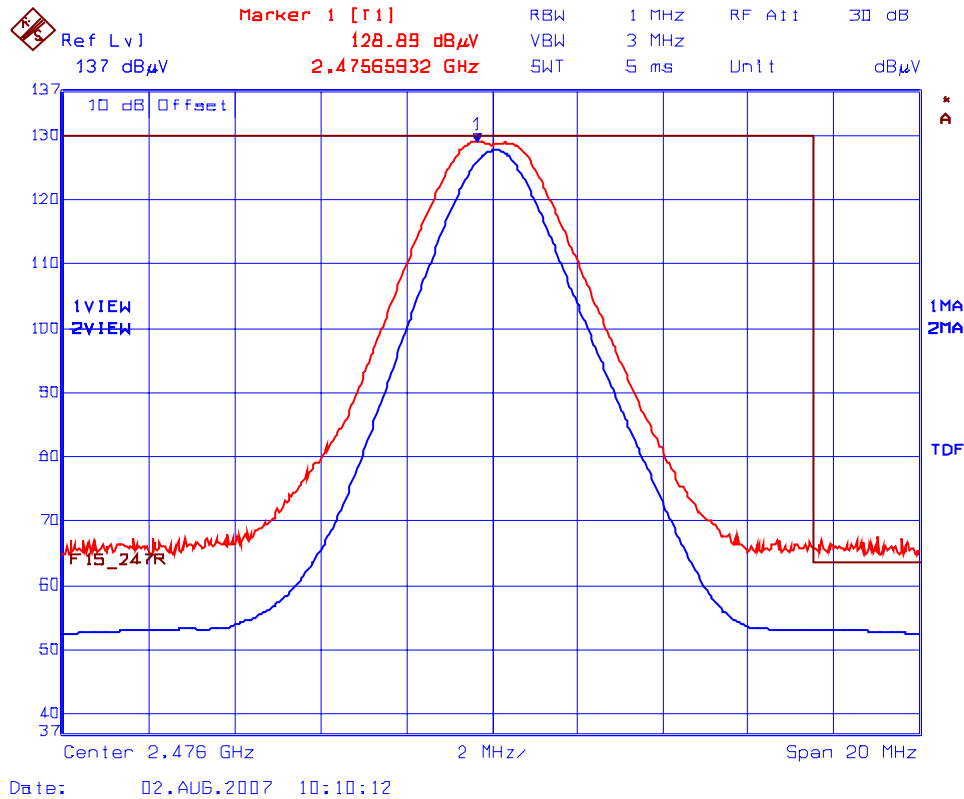


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.14 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.0 MHz at High Power with Data Rate 8)
 Rx Antenna Orientation: Vertical

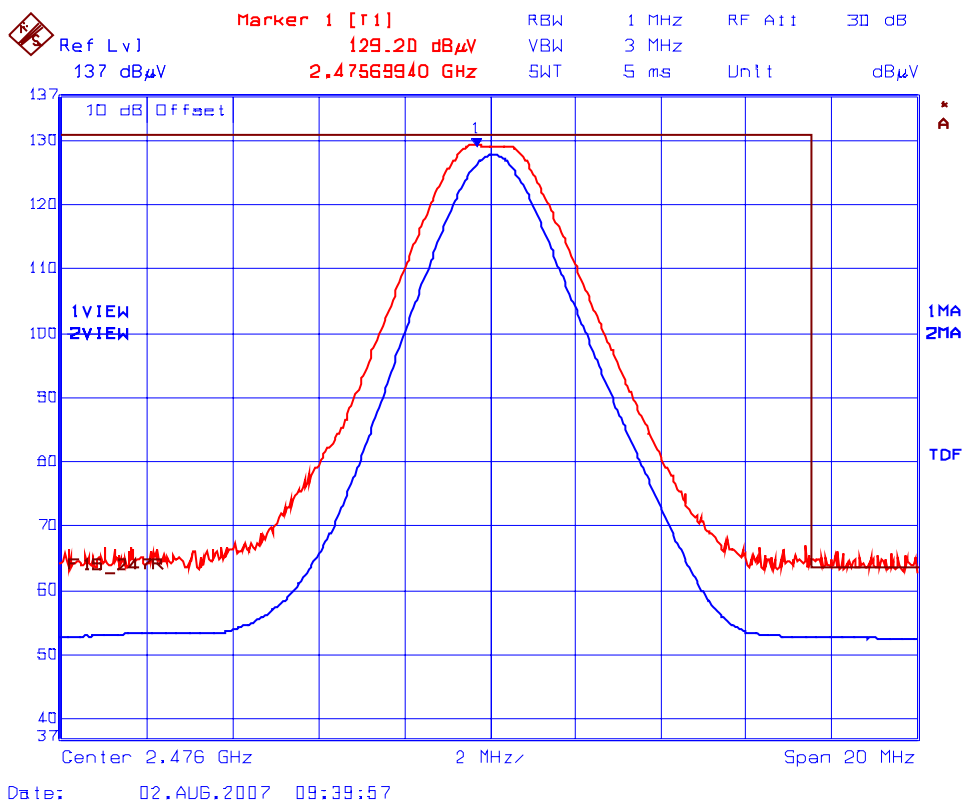


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.15 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
 Rx Antenna Orientation: Horizontal

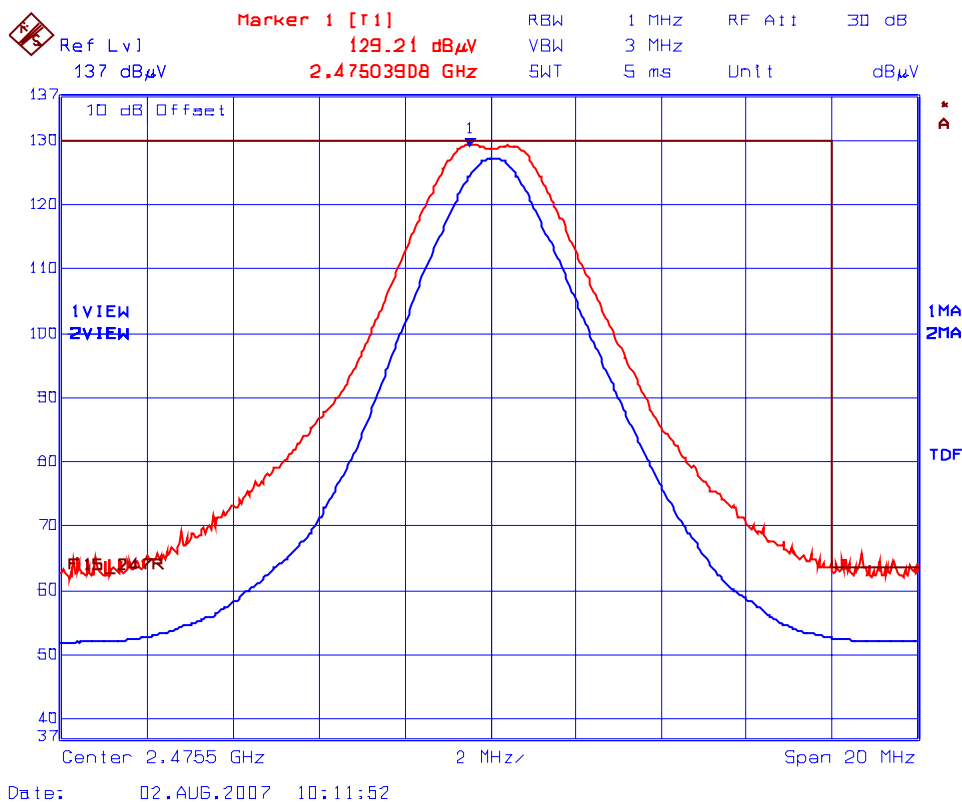


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.16 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2475.5 MHz at High Power with Data Rate 9)
 Rx Antenna Orientation: Vertical

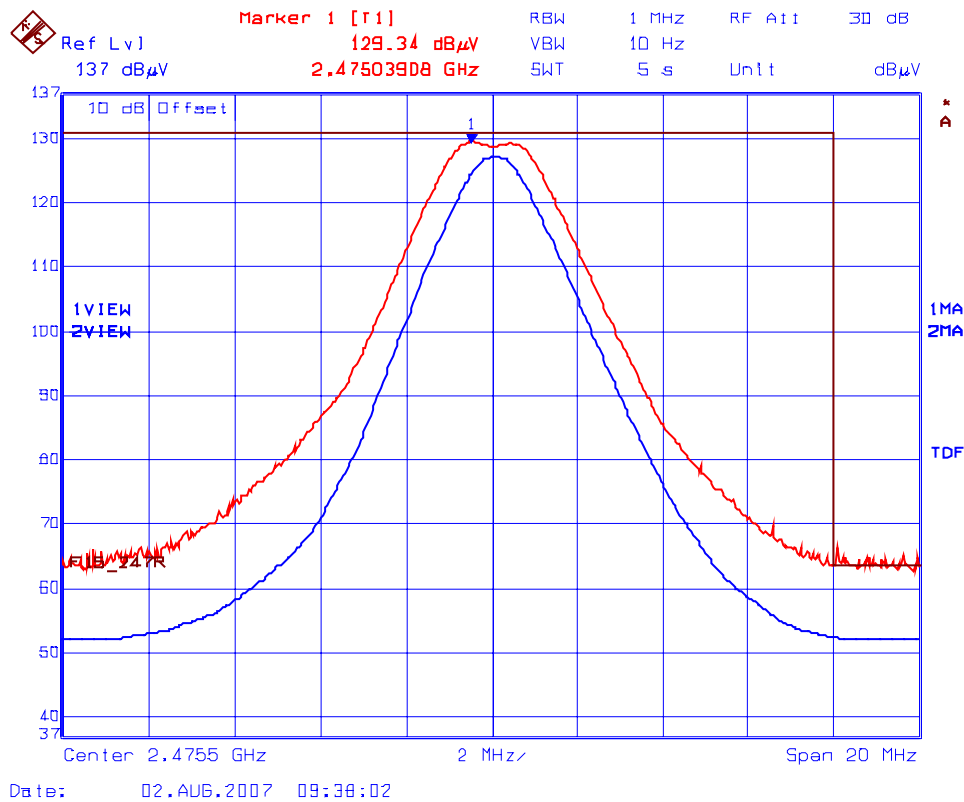


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.17 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Horizontal

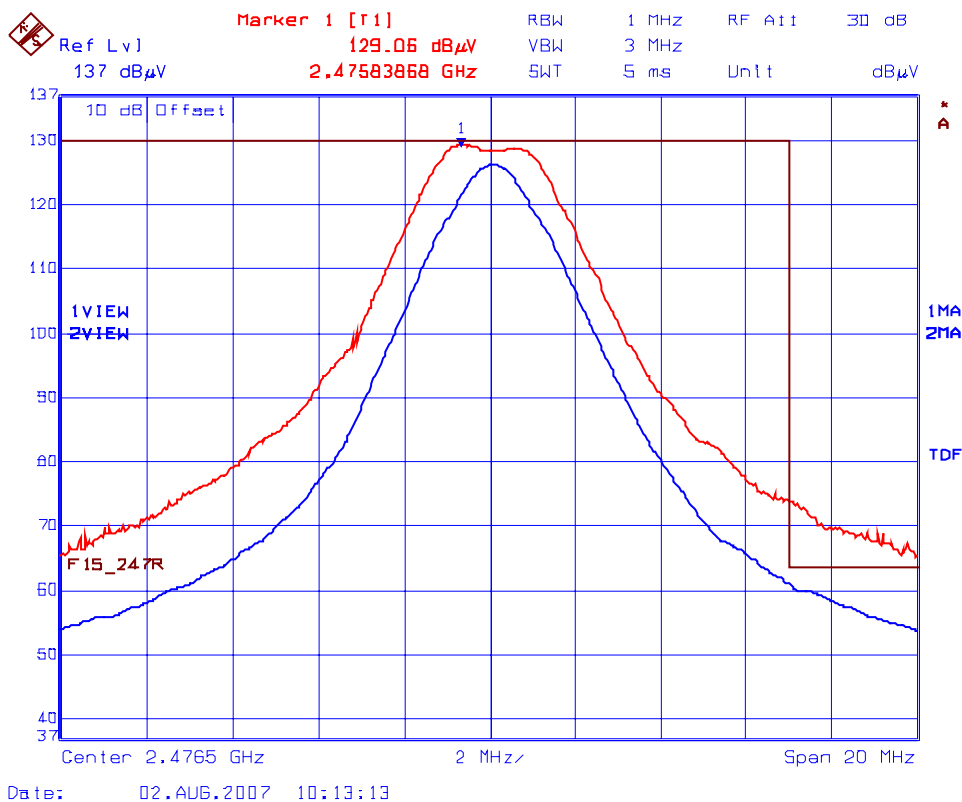


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.18 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2476.5MHz at High Power with Data Rate 10)
 Rx Antenna Orientation: Vertical

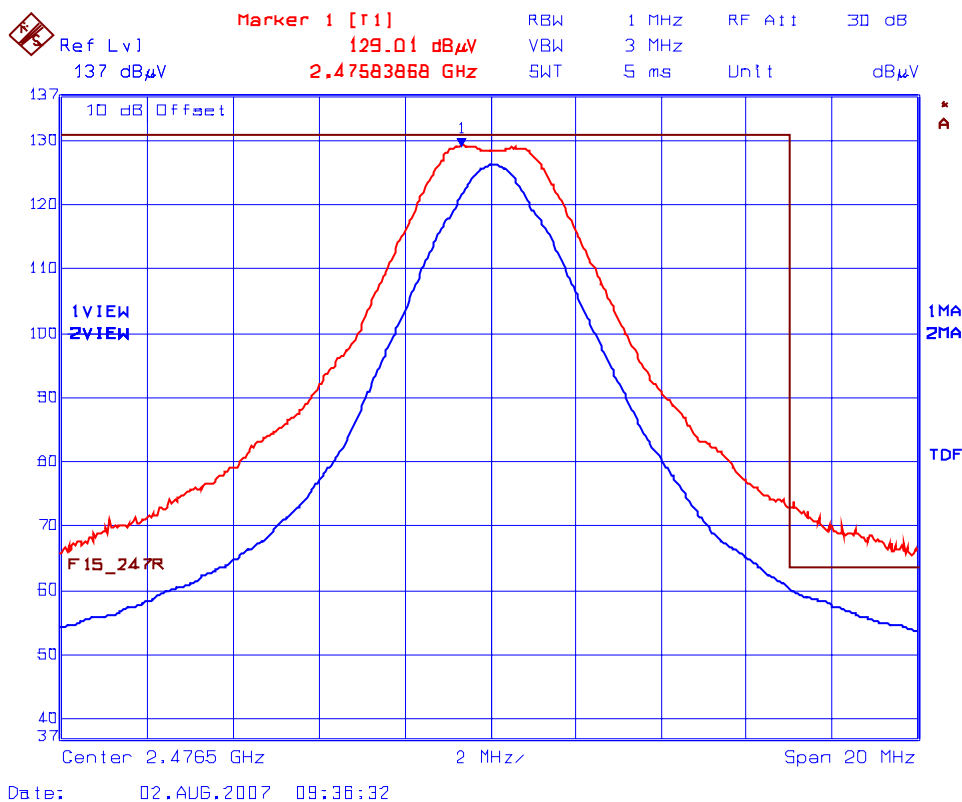


Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.19 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Horizontal

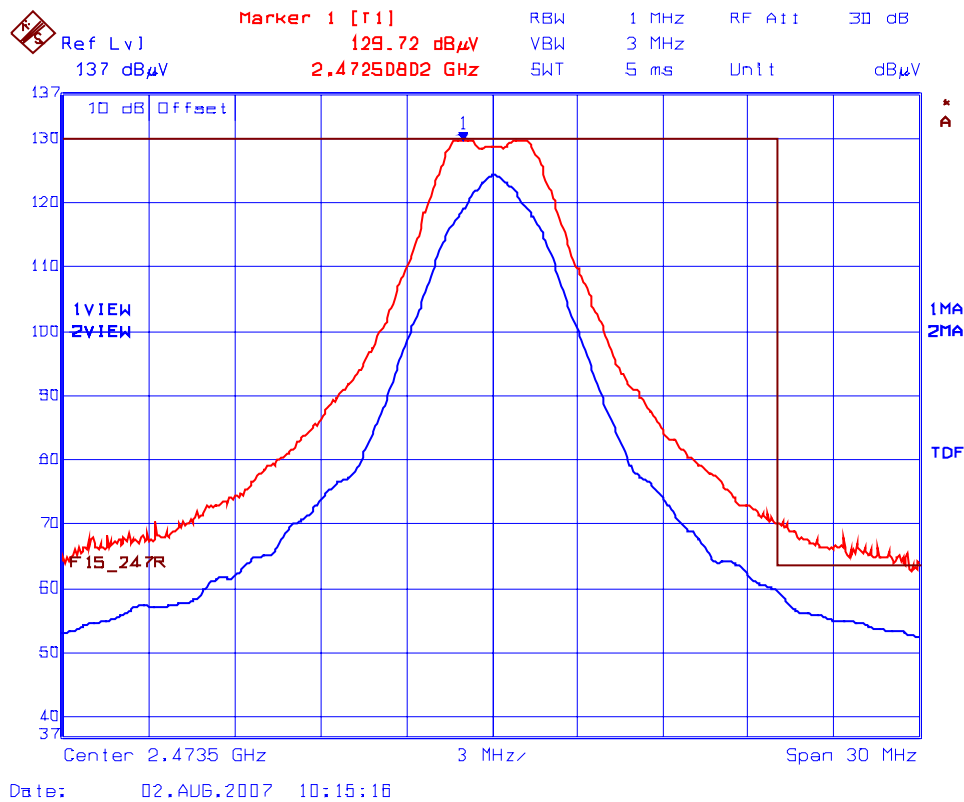

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

Plot 6.12.5.20 DTS - Band-Edge RF Radiated Emissions @ 1 m
 High End of Frequency Band (2473.5 MHz at High Power with Data Rate 11)
 Rx Antenna Orientation: Vertical

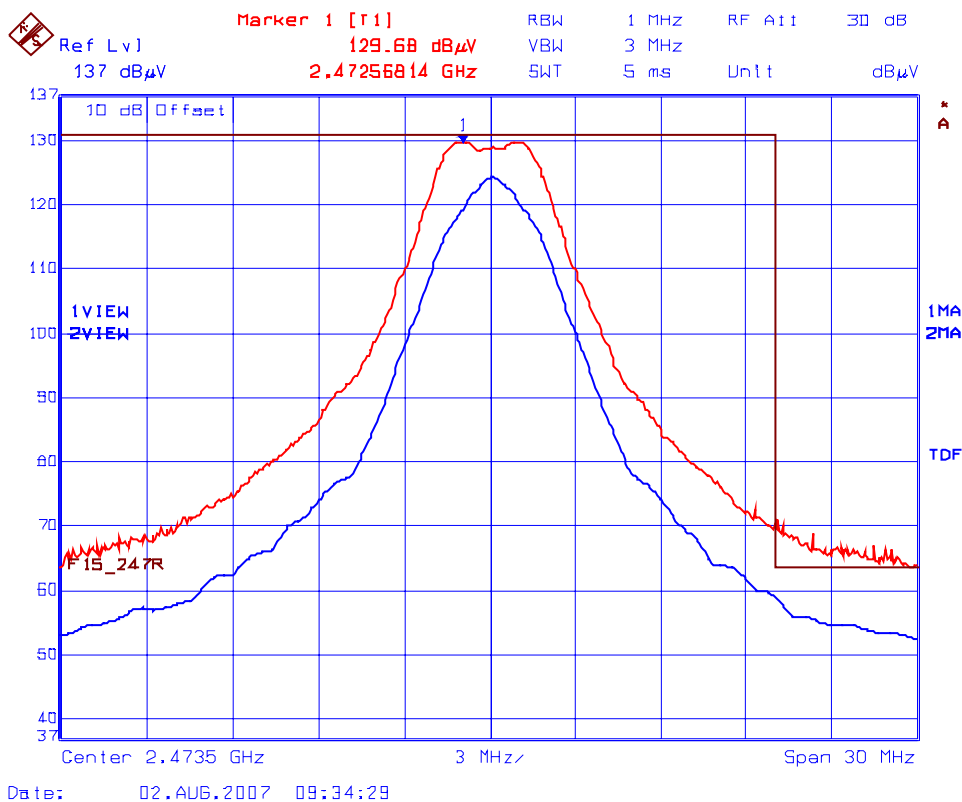

Trace 1: RBW = 1 MHz, VBW = 3 MHz
 Trace 2: RBW = 1 MHz, VBW = 10 Hz

6.13. POWER SPECTRAL DENSITY [§ 15.247(e)]


6.13.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.13.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

6.13.3. Test Arrangement

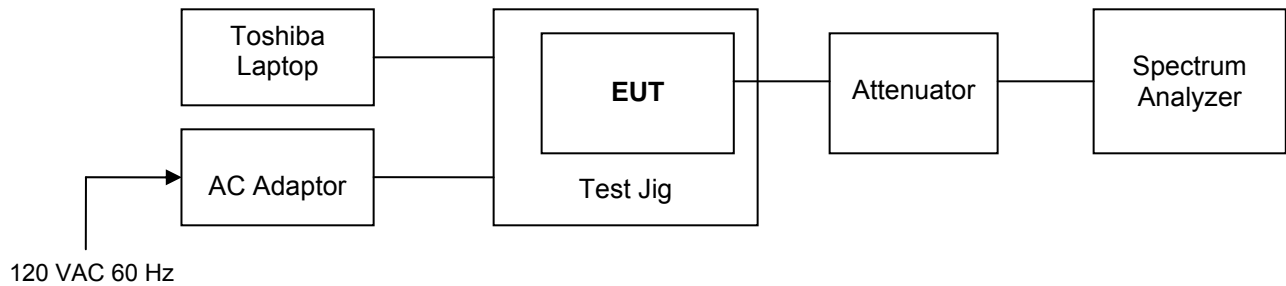

6.13.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rhode & Schwarz	FSEK20/B4/B21	834157/005	9 kHz- 40 GHz
Attenuator	Narda	4768-10	0702	DC -40GHz


6.13.5. Test Data

Remark: Measurement method: Power spectral density (PSD) Option 2.


Frequency (MHz)	Modulation Data Rate	*PSD in 3 kHz BW (dBm)	Limit (dBm)	Margin (dB)
2402.50	Data Rate 8	2.76	8.0	-5.24
2439.25	Data Rate 8	2.41	8.0	-5.59
2476.00	Data Rate 8	1.07	8.0	-6.93
2403.50	Data Rate 9	2.02	8.0	-5.98
2439.60	Data Rate 9	0.72	8.0	-7.28
2475.50	Data Rate 9	-0.55	8.0	-8.55
2404.00	Data Rate 10	1.37	8.0	-6.63
2440.25	Data Rate 10	-1.00	8.0	-9.00
2476.50	Data Rate 10	-1.32	8.0	-9.32
2405.50	Data Rate 11	-1.40	8.0	-9.40
2439.60	Data Rate 11	-2.65	8.0	-10.65
2473.50	Data Rate 11	-2.67	8.0	-10.67

*See the following plots for measurement details.


Plot 6.13.5.1 Power Spectral Density
Frequency: 2402.50 MHz at Data Rate 8

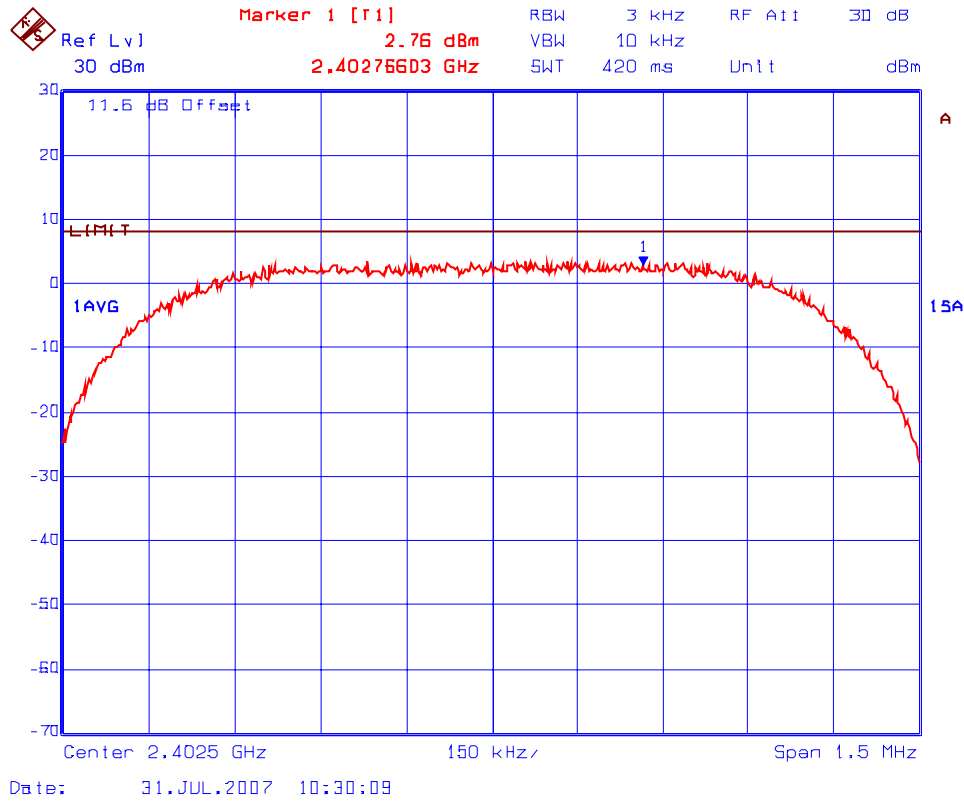


Plot 6.13.5.2 Power Spectral Density
Frequency: 2439.25 MHz at Data Rate 8

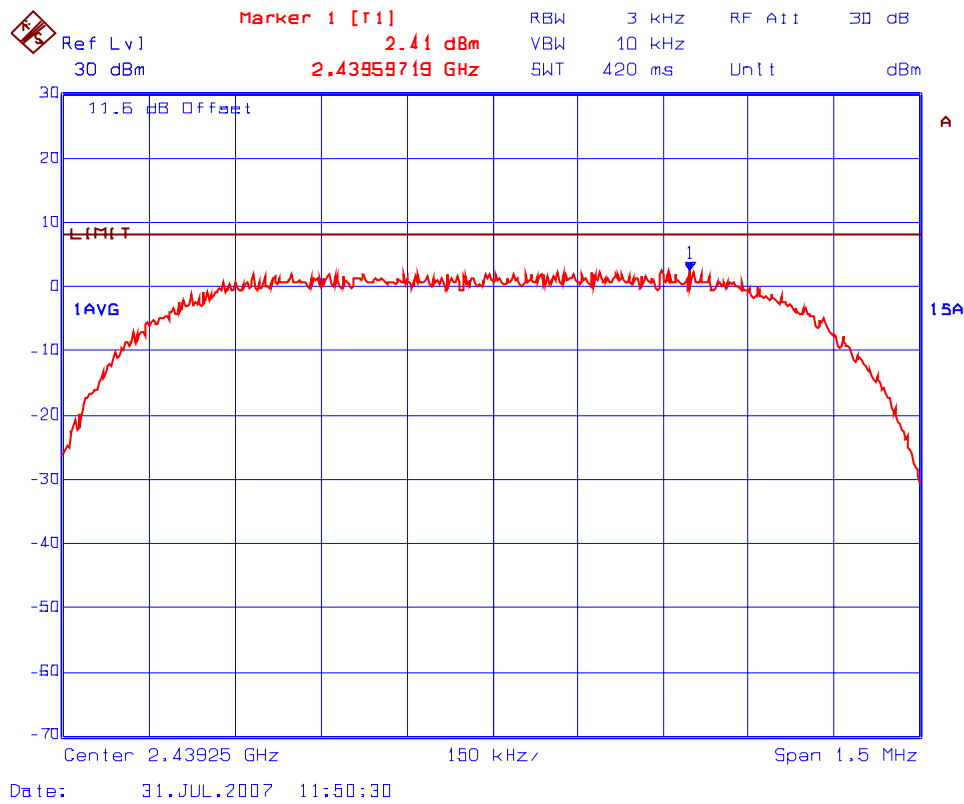


Plot 6.13.5.3 Power Spectral Density
Frequency: 2476.00 MHz at Data Rate 8

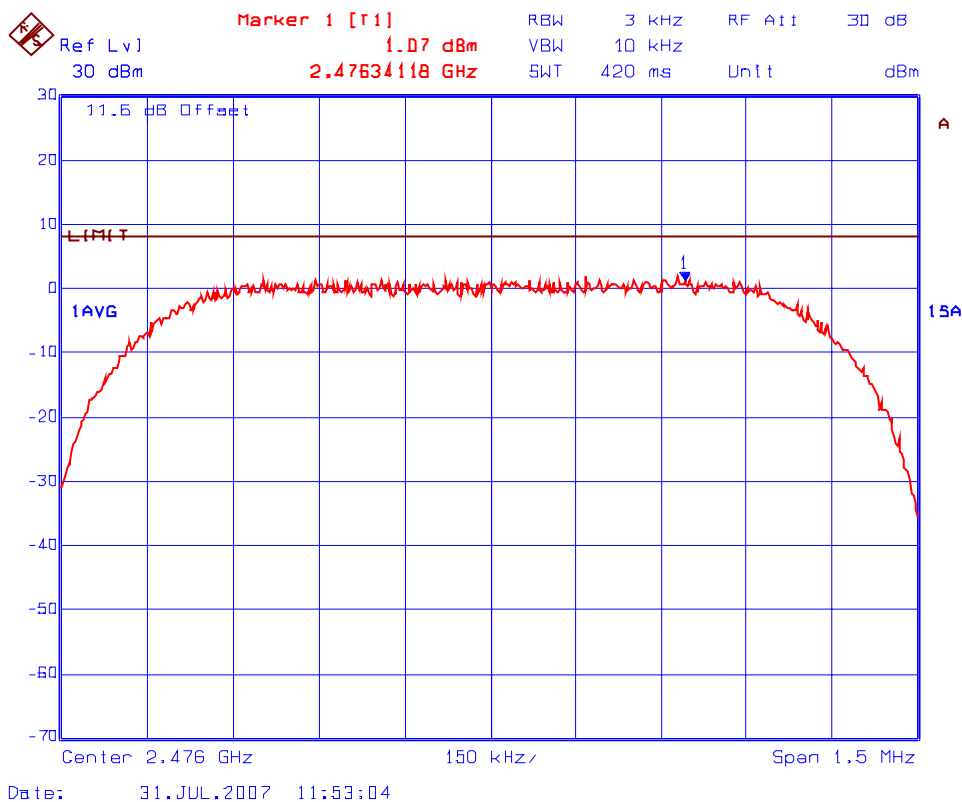

Plot 6.13.5.4 Power Spectral Density
Frequency: 2403.50 MHz at Data Rate 9

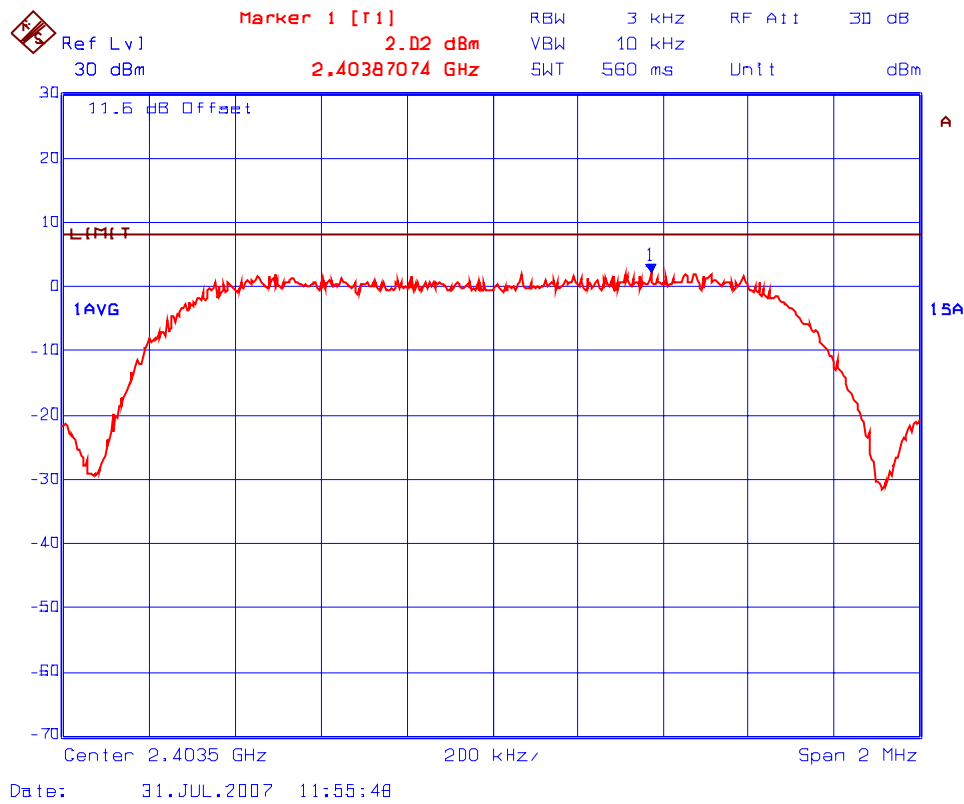

Plot 6.13.5.5 Power Spectral Density
Frequency: 2439.6 MHz at Data Rate 9

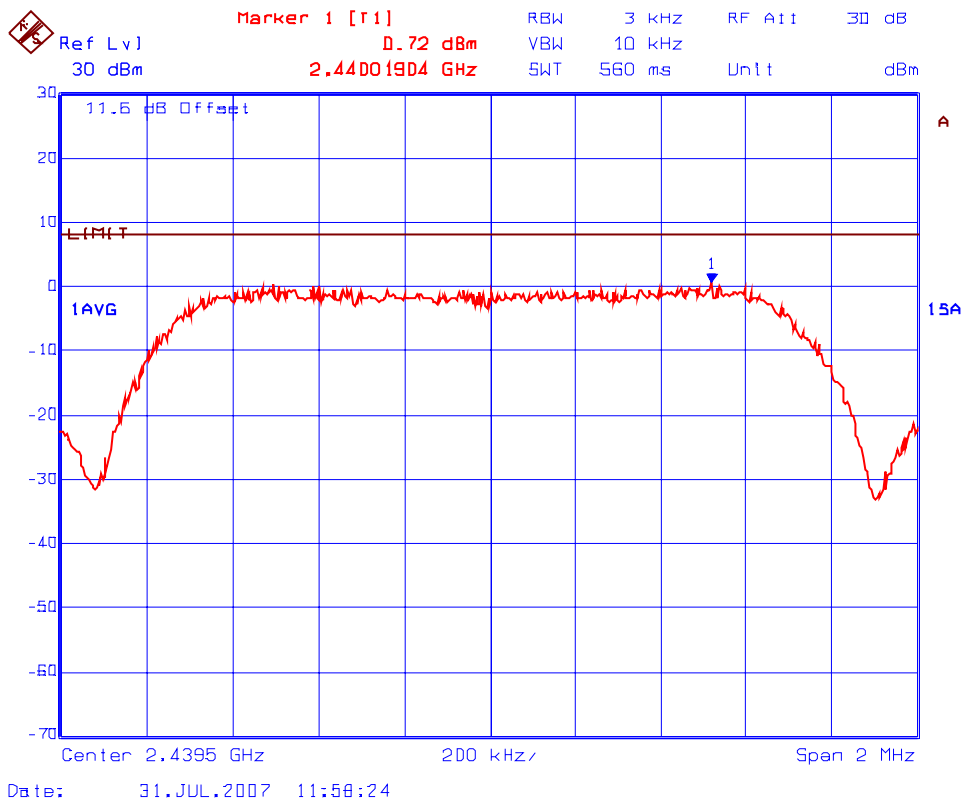


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.13.5.6 Power Spectral Density
Frequency: 2475.50 MHz at Data Rate 9

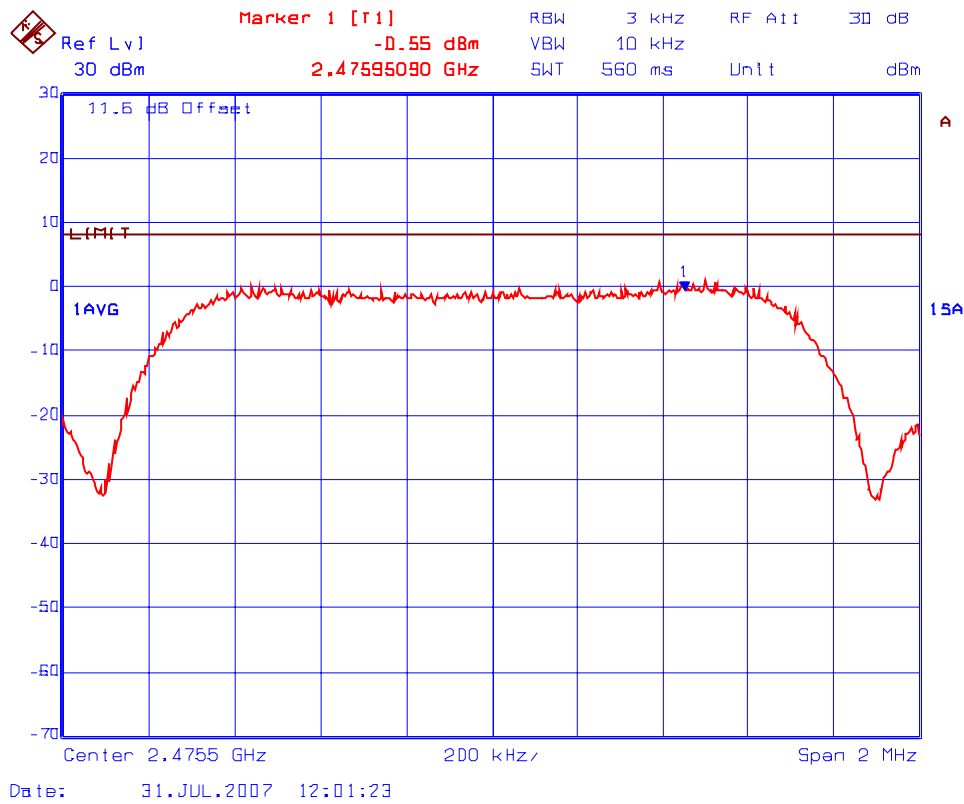


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.13.5.7 Power Spectral Density
Frequency: 2404.00 MHz at Data Rate 10

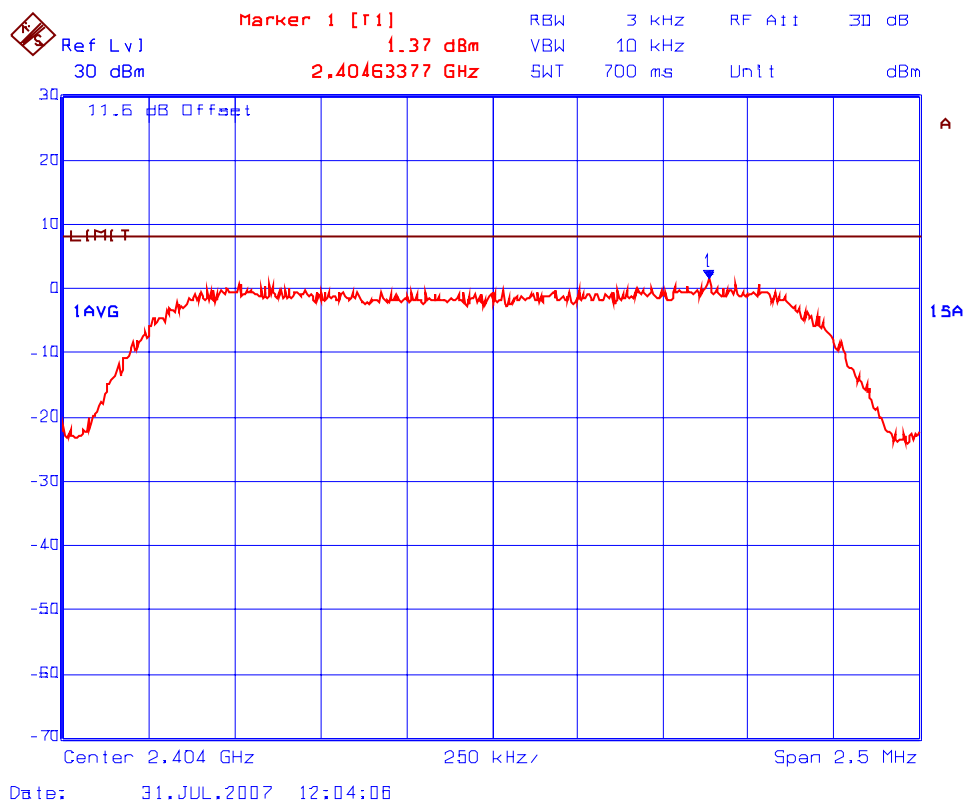


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.13.5.8 Power Spectral Density
Frequency: 2440.25 MHz at Data Rate 10

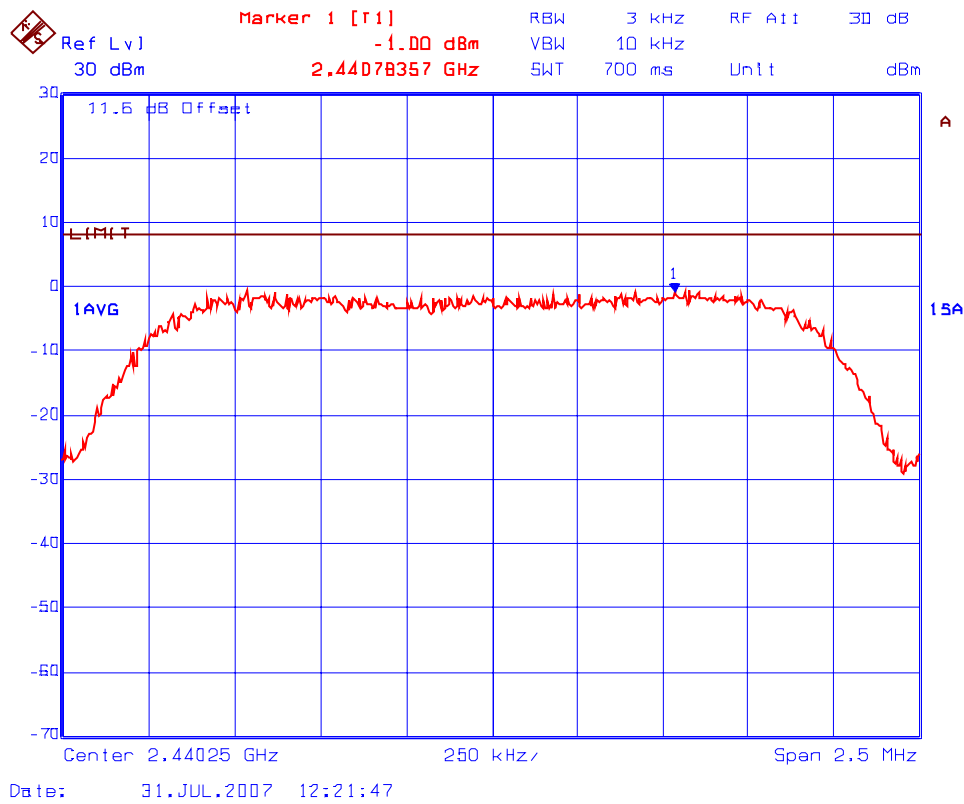


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.13.5.9 Power Spectral Density
Frequency: 2476.50 MHz at Data Rate 10

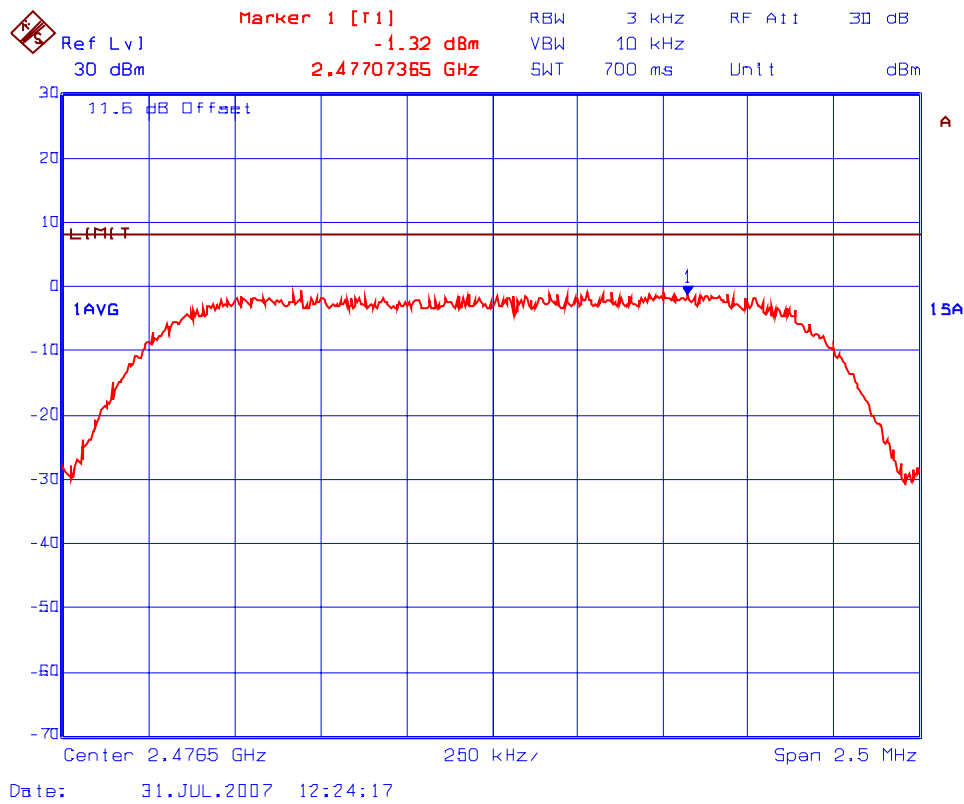


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.13.5.10 Power Spectral Density
Frequency: 2405.50 MHz at Data Rate 11

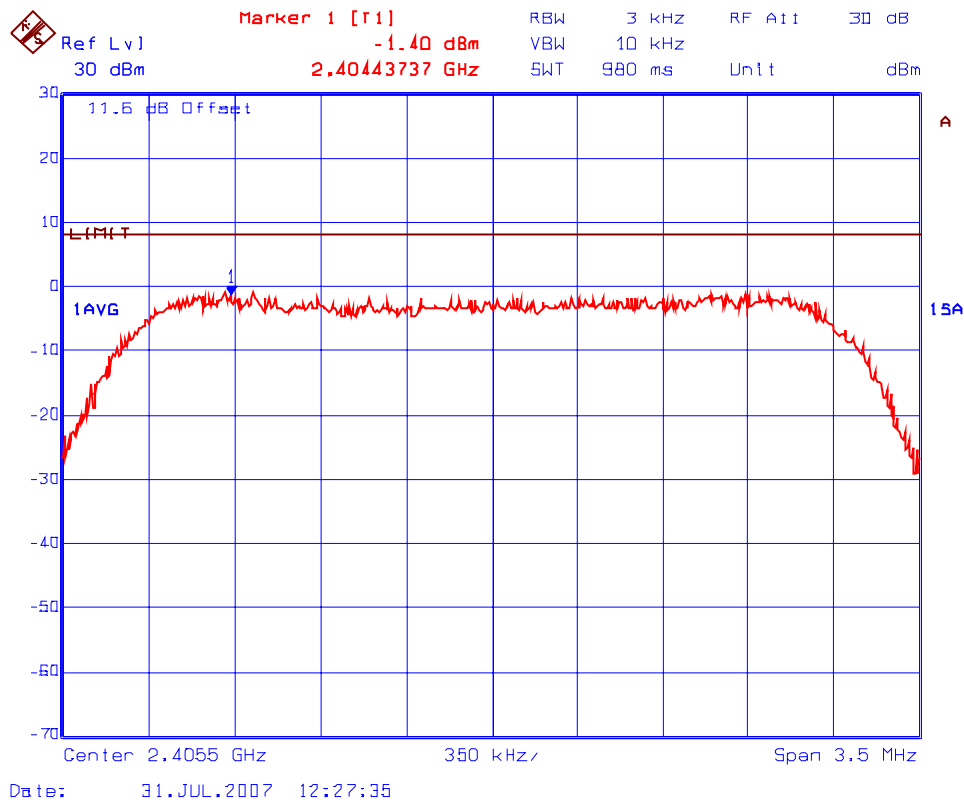

Plot 6.13.5.11 Power Spectral Density
Frequency: 2439.6 MHz at Data Rate 11

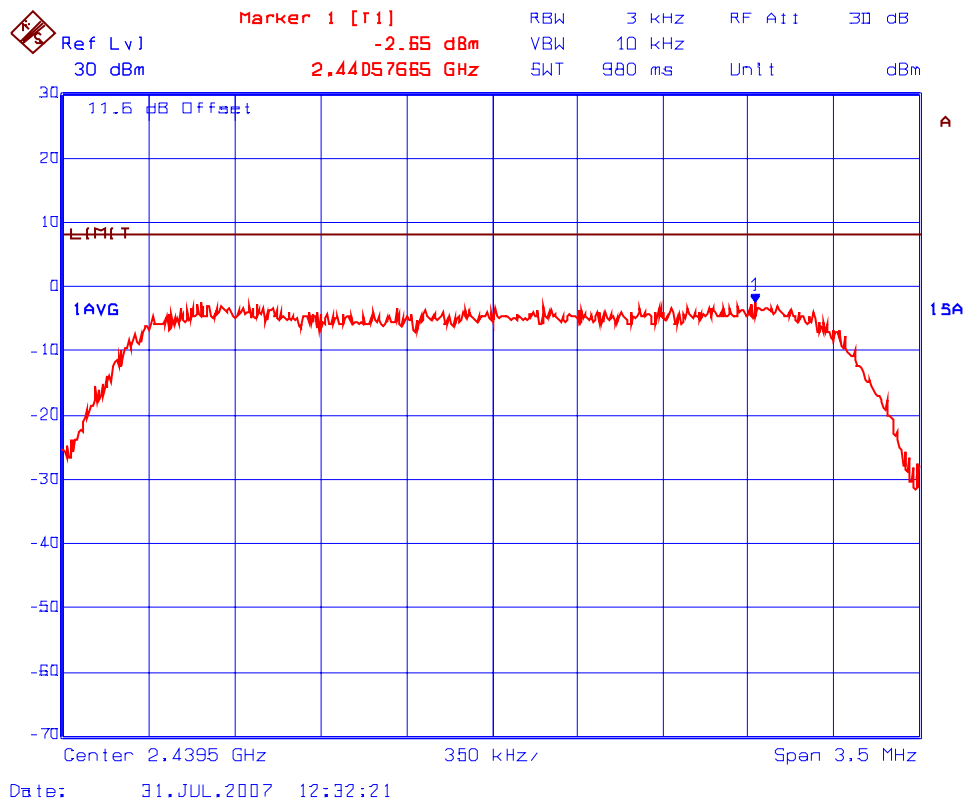


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MCRS-013F15C247
August 22, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 6.13.5.12 Power Spectral Density
Frequency: 2473.50 MHz at Data Rate 11

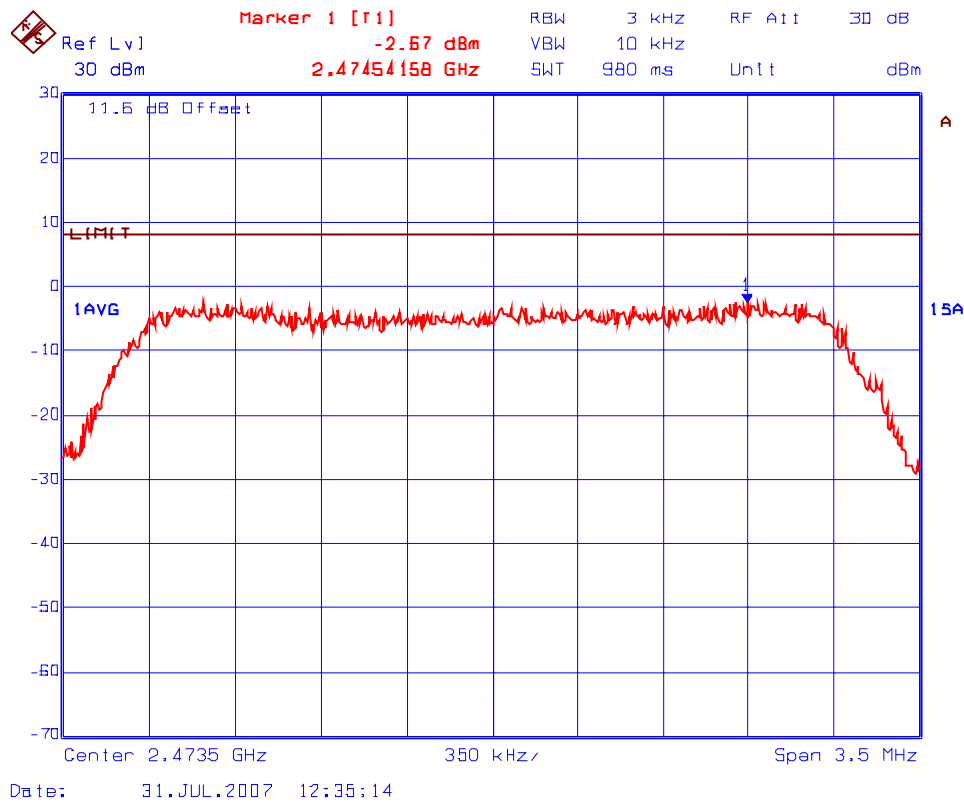

6.14. RF EXPOSURE REQUIRMENTS [§§ 15.247(i), 1.1310 & 2.1091]

6.14.1. Limit

- § 15.247(i): Systems operating under provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines. See § 1.1307(b)(1).
- § 1.1310:- The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

6.14.2. Method of Measurements

Refer to Sections 1.1310, 2.1091 and Public Notice DA 00-705 (March 30, 2000)

Spread spectrum transmitters operating under section 15.247 are categorically from routine environmental evaluation to demonstrating RF exposure compliance with respect to MPE and/or SAR limits. These devices are not exempted from compliance (As indicated in Section 15.247(b)(4), these transmitters are required to operate in a manner that ensures that exposure to public users and nearby persons) does not exceed the Commission’s RF exposure guidelines (see Section 1.1307 and 2.1093). Unless a device operates at substantially low power levels, with a low gain antenna(s), supporting information is generally needed to establish the various potential operating configurations and exposure conditions of a transmitter and its antenna(s) in order to determine compliance with the RF exposure guidelines.

In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:

- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

Calculation Method of RF Safety Distance:

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

$$r = \sqrt{EIRP/4\pi S}$$

For portable transmitters (see Section 2.1093), or devices designed to operate next to a person's body, compliance is determined with respect to the SAR limit (define in the body tissues) for near-field exposure conditions. If the maximum average output power, operating condition configurations and exposure conditions are comparable to those of existing cellular and PCS phones, SAR evaluation may be required in order to determine if such a device complies with SAR limit. When SAR evaluation data is not available, and the additional supporting information cannot assure compliance, the Commission may request that an SAR evaluation be performed, as provided for in Section 1.1307(d)

6.14.3. Test Data

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required: *18 cm	Manufacturer' instruction for separation distance between antenna and persons required: 23 cm.
Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement	Antenna installation and device operating instructions shall be provided to installers to maintain and ensure compliance with RF exposure requirements.
Caution statements and/or warning labels that are necessary in order to comply with the exposure limits	Refer to User's Manual for RF Exposure Information.
Any other RF exposure related issues that may affect MPE compliance	None.

*The minimum separation distance between the antenna and bodies of users are calculated using the following formula:

RF EXPOSURE DISTANCE LIMITS: $r = (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2}$

$S = 1 \text{ mW/cm}^2$

$EIRP = 36.0 \text{ dBm} = 10^{36/10} \text{ mW max. (Worst Case)}$

$r = (EIRP/4\pi S)^{1/2} = (10^{36/10}/4\pi(1))^{1/2} = 18 \text{ cm}$

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	± 1.5	± 1.5
LISN coupling specification	Rectangular	± 1.5	± 1.5
Cable and Input Transient Limiter calibration	Normal (k=2)	± 0.3	± 0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	± 0.2	± 0.3
System repeatability	Std. deviation	± 0.2	± 0.05
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	± 1.25	± 1.30
Expanded uncertainty U	Normal (k=2)	± 2.50	± 2.60

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (\pm dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$