



Hermon Laboratories Ltd.  
P.O. Box 23, Binyamina 3055001, Israel  
Tel. +972 4628 8001  
Fax. +972 4628 8277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC 47 CFR Part 90, RSS-Gen Issue 5:2019 and  
RSS-119 Issue 12:2015

FOR:

**ST Engineering Telematics Wireless Ltd**

**Light Control Unit**

**Model: LCUN35G**

**FCC ID: NTAN35G**

**IC: 4732A-N35G**

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes.....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information .....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT .....	5
6.4	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 90 and RSS-119 requirements .....	7
7.1	Peak output power test .....	7
7.2	Frequency stability test .....	15
7.3	Occupied bandwidth test.....	17
7.4	Emission mask test.....	21
7.5	Radiated spurious emission measurements.....	24
7.6	Transient frequency behaviour test .....	39
8	APPENDIX A Test equipment and ancillaries used for tests .....	44
9	APPENDIX B Test equipment correction factors .....	45
10	APPENDIX C Measurement uncertainties .....	48
11	APPENDIX D Test laboratory description .....	49
12	APPENDIX E Specification references .....	50
13	APPENDIX F Abbreviations and acronyms.....	51



## 1 Applicant information

**Client name:** ST Engineering Telematics Wireless Ltd  
**Address:** 26 Hamelacha street, POB 1911, Holon, 5811801, Israel  
**Telephone:** +972 3557 5700  
**Fax:** +972 3557 5703  
**E-mail:** [Emzari.Roketlishvili@telematics-wireless.com](mailto:Emzari.Roketlishvili@telematics-wireless.com)  
**Contact name:** Mr. Emzari Roketlishvili

## 2 Equipment under test attributes

**Product name:** Light Control Unit  
**Product type:** Transceiver  
**Model(s):** LCUN35G  
**Serial number:** 995834700046  
**Hardware version:** Rev A  
**Software release:** AU2B6  
**Receipt date** 14-May-20

## 3 Manufacturer information

**Manufacturer name:** ST Engineering Telematics Wireless Ltd  
**Address:** 26 Hamelacha street, POB 1911, Holon, 5811801, Israel  
**Telephone:** +972 3557 5700  
**Fax:** +972 3557 5703  
**E-Mail:** [Emzari.Roketlishvili@telematics-wireless.com](mailto:Emzari.Roketlishvili@telematics-wireless.com)  
**Contact name:** Mr. Emzari Roketlishvili

## 4 Test details

**Project ID:** 37956  
**Location:** Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel  
**Test started:** 17-May-20  
**Test completed:** 21-May-20  
**Test specification(s):** FCC 47 CFR Part 90, RSS-Gen Issue 5:2019 and RSS-119 Issue 12:2015



## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC Section 90.205 / RSS-119 Section 5.4, Maximum output power	Pass
FCC Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth	Pass
FCC Section 90.210 / RSS-119 Section 5.8.4, Emission mask	Pass
FCC Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions	Pass
FCC Section 90.213 / RSS-119 Section 5.3, Frequency stability	Pass
FCC Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour	Pass
FCC Section 2.1091 / RSS-102 section 2.5, RF radiation exposure evaluation	Pass, Exhibit in application for certification provided

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Morozov, test engineer, EMC & Radio	17-May-20 – 21-May-20	
<b>Reviewed by:</b>	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	30-Jun-20	
<b>Approved by:</b>	Mr. S. Samokha, technical manager, EMC & Radio	13-Jul-20	



## 6 EUT description


Note: The following data in this clause is provided by the customer and represents his sole responsibility

### 6.1 General information

The LCUN35G is a luminaire control unit, installed on top of the luminaire utilizing a standard (twist and lock) NEMA socket.

The LCUN35G is powered by 110 - 277 Volt AC and RF operating frequency band is 450 to 470MHz. Output RF power of 0.6Watt using internal printed antenna.

### 6.2 Test configuration

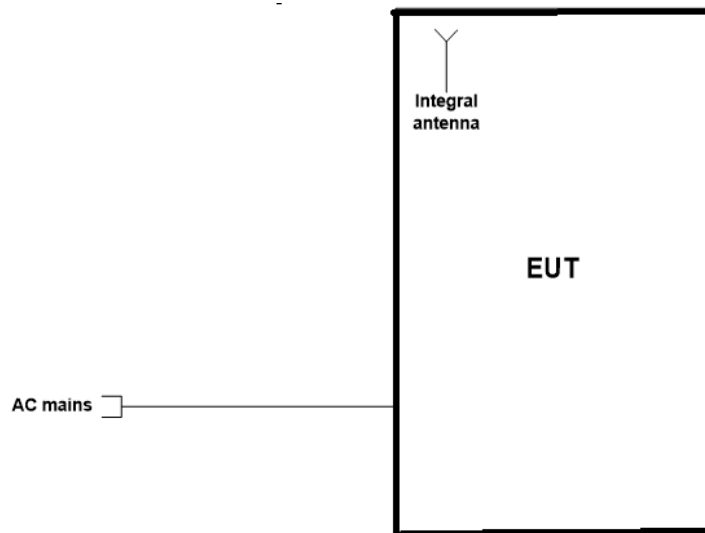

### 6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



### 6.4 Transmitter characteristics

<b>Type of equipment</b>						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
<b>Intended use</b>		<b>Condition of use</b>				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
<b>Assigned frequency ranges</b>		450- 470 MHz				
<b>Maximum rated output power</b>		At transmitter 50 Ω RF output connector		27.61 dBm		
<b>Is transmitter output power variable?</b>		X	No			
			Yes	continuous variable		
				stepped variable with stepsize		
				minimum RF power	dBm	
				maximum RF power	dBm	
<b>Antenna connection</b>						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector	
					without temporary RF connector	
<b>Antenna/s technical characteristics</b>						
Type	Manufacturer		Model number		Gain	
Printed	NA		NA		-2 dBi	
<b>Transmitter aggregate data rate/s</b>			4.8 kbps			
<b>Type of modulation</b>			4GFSK			
<b>Modulating test signal (baseband)</b>			PRBS			
<b>Transmitter power source</b>						
	Battery	<b>Nominal rated voltage</b>		Battery type		
	DC	<b>Nominal rated voltage</b>				
X	AC mains	<b>Nominal rated voltage</b>	110-277 VAC	Frequency	60 Hz	



<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 90 and RSS-119 requirements

### 7.1 Peak output power test

#### 7.1.1 General

This test was performed to measure effective radiated power emanated by transmitter at carrier frequency. Specification test limits are given in Table 7.1.1

Table 7.1.1 Peak output power limits

Assigned frequency band, MHz	ERP		Equivalent field strength limit @ 3m, dB(µV/m)*
	W	dBm	
<b>FCC</b>			
450.0 – 470.0	2	33.00	130.38
<b>RSS-119 Table 2</b>			
450.0 – 470.0	60	47.78	145.16

\* - Equivalent field strength limit was calculated from maximum allowed ERP as follows:  $E = \sqrt{30 \times P \times 1.64} / r$ , where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

#### 7.1.2 Test procedure for field strength measurements

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.


7.1.2.2 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was swept throughout the range, specified in Table 7.1.2 and Table 7.1.3, in both vertical and horizontal polarizations.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and Table 7.1.3 and shown in the associated plots.



<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Figure 7.1.1 Setup for carrier field strength measurements

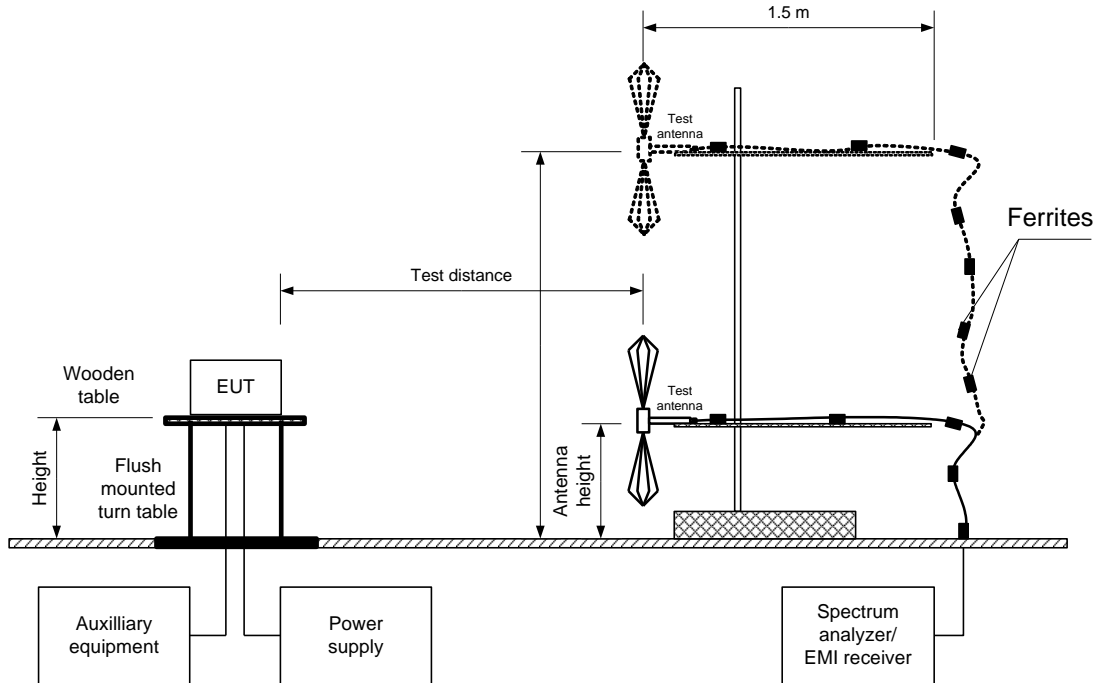





<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Table 7.1.2 Transmitter carrier field strength according to FCC

ASSIGNED FREQUENCY RANGE: 450 - 470 MHz  
 TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 EUT HEIGHT: 0.8 m  
 TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Biconilog  
 EUT POWER: 110 V / 277 V / 60 Hz  
 MODULATION: 4GFSK  
 TRANSMITTER OUTPUT POWER: Maximum  
 SETTINGS:

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees	EUT antenna gain, dBi	ERP, dBm***	Peak output power (conducted), dBm*	ERP Limit, dBm	Margin, dB**	Verdict
450.0031	120.13	Vertical	1.3	5	-2	22.73	26.93	33.00	-10.27	Pass
460.0000	119.92	Vertical	1.3	5	-2	22.52	26.72	33.00	-10.48	Pass
469.9969	120.81	Vertical	1.3	5	-2	23.41	27.61	33.00	-9.59	Pass

\*- Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance:  
*Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\*- Margin = ERP – specification ERP limit.

\*\*\* ERP=Field strength in dB(µV/m) – 97.4 dB



<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Table 7.1.3 Transmitter carrier field strength according to RSS-119 Table 2

ASSIGNED FREQUENCY RANGE: 450 - 470 MHz  
TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
EUT HEIGHT: 0.8 m  
TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m  
DETECTOR USED: Peak  
RESOLUTION BANDWIDTH: 100 kHz  
VIDEO BANDWIDTH: > Resolution bandwidth  
TEST ANTENNA TYPE: Biconilog  
MODULATION: 4GFSK  
EUT POWER: 110 V / 277 V / 60 Hz  
TRANSMITTER OUTPUT POWER: Maximum  
SETTINGS:

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees	EUT antenna gain, dBi	ERP, dBm***	Peak output power (conducted), dBm*	ERP Limit, dBm	Margin, dB**	Verdict
450.0031	120.13	Vertical	1.3	5	-2	22.73	26.93	47.78	-25.05	Pass
460.0000	119.92	Vertical	1.3	5	-2	22.52	26.72	47.78	-25.26	Pass
469.9969	120.81	Vertical	1.3	5	-2	23.41	27.61	47.78	-24.37	Pass

\*- Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\* - Margin = ERP - specification ERP limit.

\*\*\* ERP=Field strength in dB(μV/m) - 97.4 dB

Reference numbers of test equipment used

HL 3903	HL 4355	HL 5288	HL 5405				
---------	---------	---------	---------	--	--	--	--



Full description is given in Appendix A.





HERMON LABORATORIES

<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

**Plot 7.1.1 Transmitter carrier field strength at low frequency in vertical and horizontal antenna polarization**  
EUT POWER: 110V 60Hz

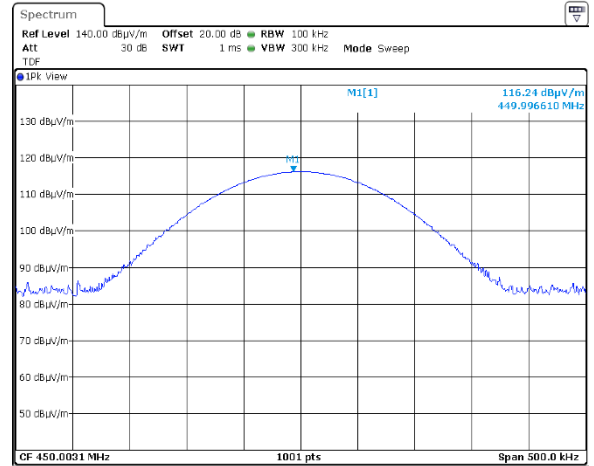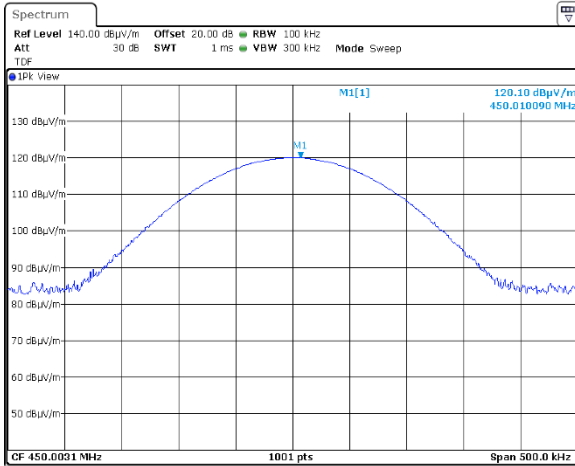

**Plot 7.1.2 Transmitter carrier field strength at mid frequency in vertical and horizontal antenna polarization**  
EUT POWER: 110V 60Hz

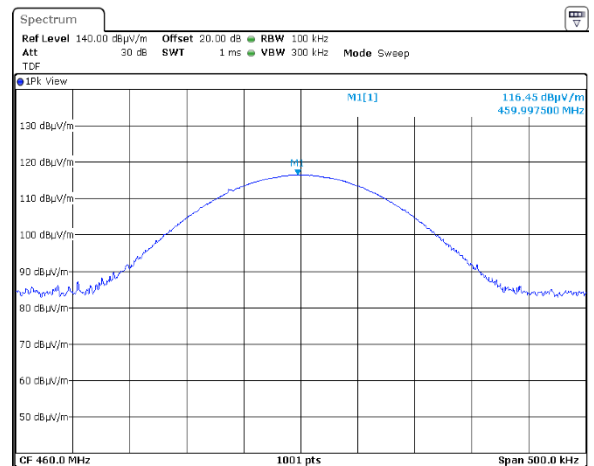
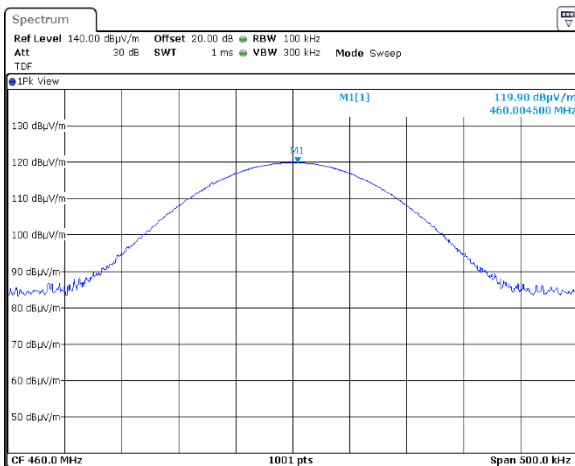




HERMON LABORATORIES

<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			



Plot 7.1.3 Transmitter carrier field strength at high frequency in vertical and horizontal antenna polarization  
EUT POWER: 110V 60Hz

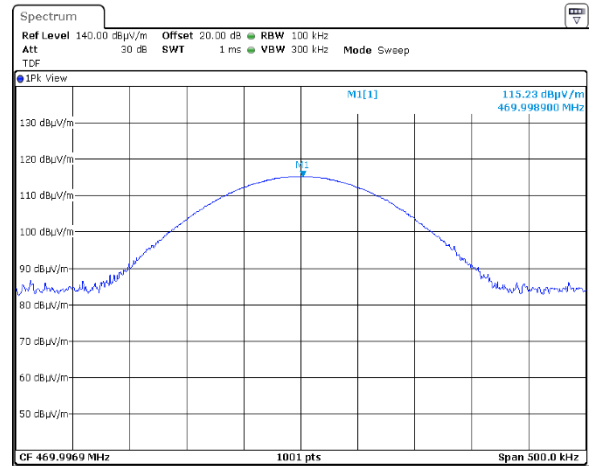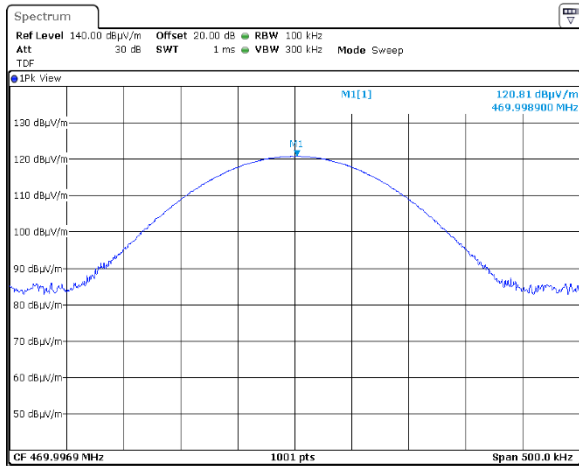





<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

**Plot 7.1.4 Transmitter carrier field strength at low frequency in vertical and horizontal antenna polarization**  
EUT POWER: 277V 60Hz

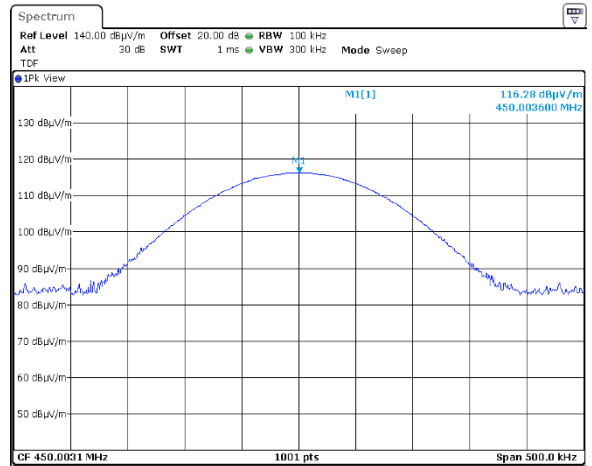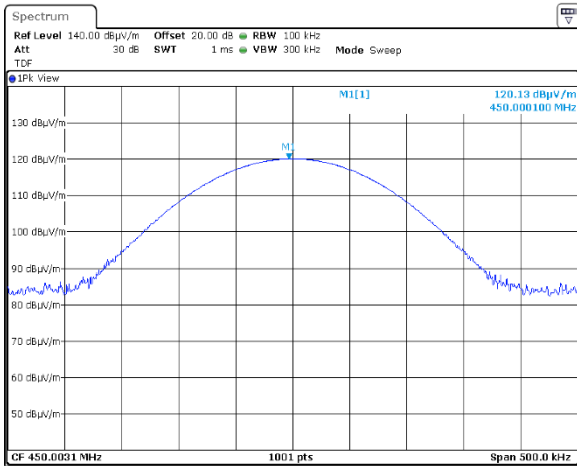

**Plot 7.1.5 Transmitter carrier field strength at mid frequency in vertical and horizontal antenna polarization**  
EUT POWER: 277V 60Hz

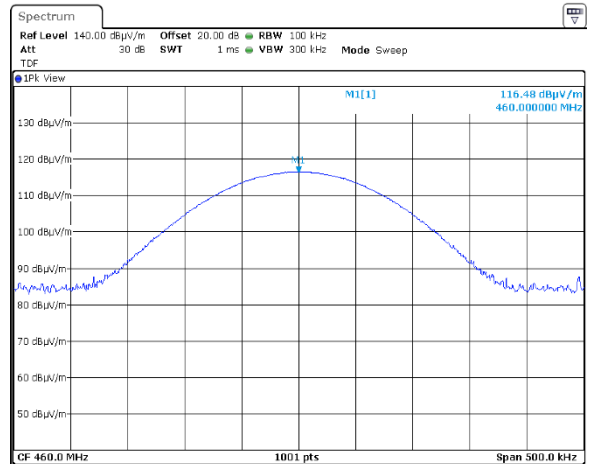
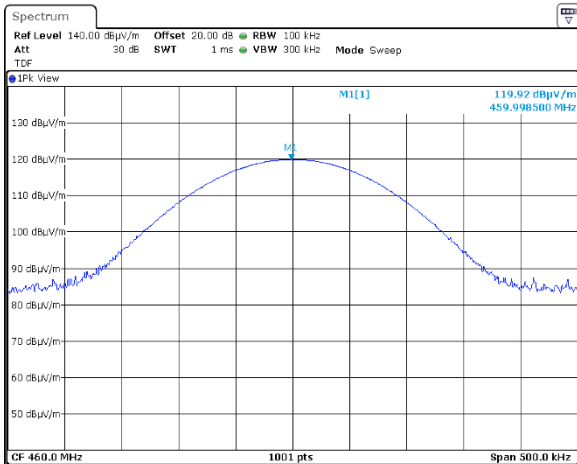




HERMON LABORATORIES

<b>Test specification:</b> Section 90.205 / RSS-119 Section 5.4, Maximum output power			
<b>Test procedure:</b> 47 CFR, Section 2.1046			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 18-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Plot 7.1.6 Transmitter carrier field strength at high frequency in vertical and horizontal antenna polarization  
EUT POWER: 277V 60Hz

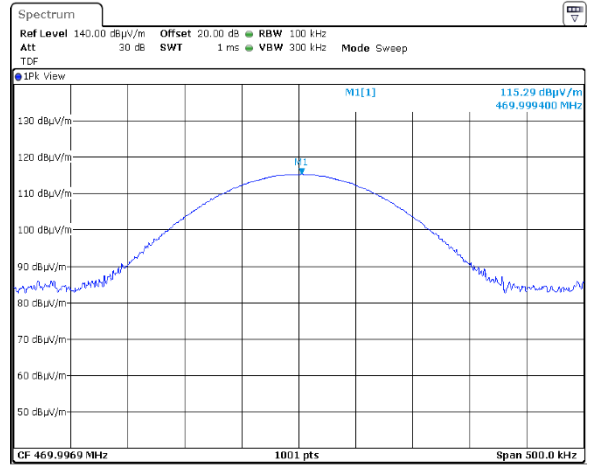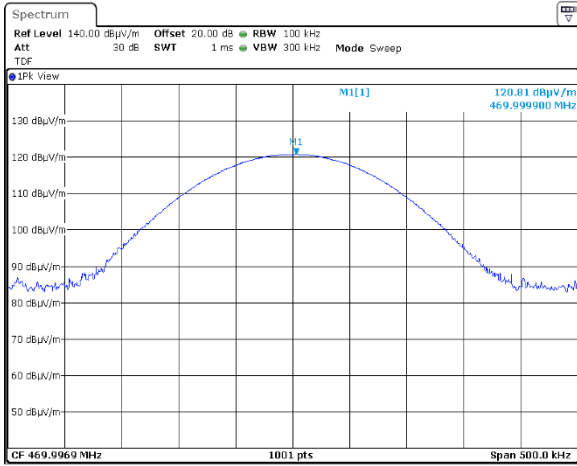



<b>Test specification:</b> Section 90.213 / RSS-119 Section 5.3, Frequency stability			
<b>Test procedure:</b> 47 CFR, Section 2.1055; TIA/EIA-603-E, Section 2.2.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 37 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

## 7.2 Frequency stability test

### 7.2.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.2.1. The test results are provided in Table 7.2.2.


Table 7.2.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement	
	ppm	Hz
450.0031	1	450
460.0000		460
469.9969		470

### 7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.
- 7.2.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.2.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.2.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.2.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.2.2.6 Frequency displacement was calculated and compared with the limit as provided in Table 7.2.2.

Figure 7.2.1 Frequency stability test setup

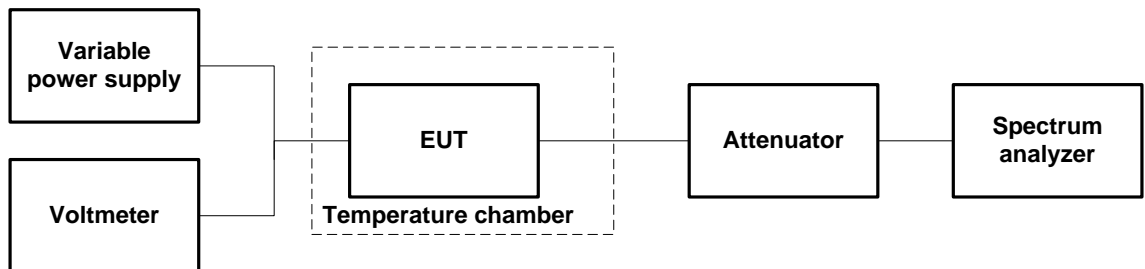



HERMON LABORATORIES

<b>Test specification:</b> Section 90.213 / RSS-119 Section 5.3, Frequency stability			
<b>Test procedure:</b> 47 CFR, Section 2.1055; TIA/EIA-603-E, Section 2.2.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 37 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Table 7.2.2 Frequency stability test results

OPERATING FREQUENCY: 450.0 – 470.0 MHz  
 NOMINAL POWER VOLTAGE: 110V 60Hz  
 TEMPERATURE STABILIZATION PERIOD: 20 min  
 POWER DURING TEMPERATURE TRANSITION: Off  
 SPECTRUM ANALYZER MODE: Counter  
 RESOLUTION BANDWIDTH: 10 Hz  
 VIDEO BANDWIDTH: 30 Hz  
 MODULATION: Unmodulated

T, °C	Voltage, V	Frequency, MHz								Max frequency drift, Hz		Limit, Hz	Margin, Hz	Verdict	
		Start up	1 <sup>st</sup> min	2 <sup>nd</sup> min	3 <sup>rd</sup> min	4 <sup>th</sup> min	5 <sup>th</sup> min	10 <sup>th</sup> min	Positive	Negative					
<b>Low frequency</b>															
-30	nominal	450.003060	450.003060	450.003058	450.003056	450.003055	450.003054	450.003050	0	141	450	-309	Pass		
-20	nominal	450.003001	NA	NA	NA	NA	NA	450.003002	0	190		-260	Pass		
-10	nominal	450.003003	NA	NA	NA	NA	NA	450.003023	0	188		-262	Pass		
0	nominal	450.003120	450.003122	450.003123	450.003124	450.003124	450.003124	450.003126	0	71		-379	Pass		
10	nominal	450.003220	NA	NA	NA	NA	NA	450.003239	48	0		-402	Pass		
20	+15%	450.003194	NA	NA	NA	NA	NA	450.003191	3	0		-447	Pass		
20	nominal	450.003195	NA	NA	NA	NA	NA	450.003191*	4	0		-446	Pass		
20	-15%	450.003194	NA	NA	NA	NA	NA	450.003191	3	0		-447	Pass		
30	nominal	450.003127	450.003126	450.003126	450.003126	450.003126	450.003126	450.003124	0	67		-383	Pass		
40	nominal	450.003073	NA	NA	NA	NA	NA	450.003068	0	123		-327	Pass		
50	nominal	450.003068	NA	NA	NA	NA	NA	450.003069	0	123	-327	Pass			
<b>Mid frequency</b>															
-30	nominal	459.999998	459.999998	459.999998	459.999997	459.999997	459.999997	459.999996	0	147	460	-313	Pass		
-20	nominal	459.999948	NA	NA	NA	NA	NA	459.999949	0	195		-265	Pass		
-10	nominal	459.999968	NA	NA	NA	NA	NA	459.999972	0	175		-285	Pass		
0	nominal	460.000068	460.000069	460.000071	460.000072	460.000072	460.000073	460.000075	0	75		-385	Pass		
10	nominal	460.000190	NA	NA	NA	NA	NA	460.000192	49	0		-411	Pass		
20	+15%	460.000145	NA	NA	NA	NA	NA	460.000143	2	0		-458	Pass		
20	nominal	460.000144	NA	NA	NA	NA	NA	460.000143*	1	0		-459	Pass		
20	-15%	460.000144	NA	NA	NA	NA	NA	460.000143	1	0		-459	Pass		
30	nominal	460.000081	460.000081	460.000080	460.000079	460.000079	460.000078	460.000076	0	67		-393	Pass		
40	nominal	460.000017	NA	NA	NA	NA	NA	460.000017	0	126		-334	Pass		
50	nominal	460.000015	NA	NA	NA	NA	NA	460.000018	0	128	-332	Pass			
<b>High frequency</b>															
-30	nominal	469.996869	469.996870	469.996870	469.996870	469.996870	469.996869	469.996869	0	149	470	-321	Pass		
-20	nominal	469.996814	NA	NA	NA	NA	NA	469.996819	0	204		-266	Pass		
-10	nominal	469.996840	NA	NA	NA	NA	NA	469.996843	0	178		-292	Pass		
0	nominal	469.996898	469.996909	469.996918	469.996923	469.996932	469.996933	469.996943	0	120		-350	Pass		
10	nominal	469.997066	NA	NA	NA	NA	NA	469.997068	50	0		-420	Pass		
20	+15%	469.997020	NA	NA	NA	NA	NA	469.997018	2	0		-468	Pass		
20	nominal	469.997020	NA	NA	NA	NA	NA	469.997018*	2	0		-468	Pass		
20	-15%	469.997020	NA	NA	NA	NA	NA	469.997018	2	0		-468	Pass		
30	nominal	469.996979	469.996975	469.996970	469.996967	469.996964	469.996962	469.996955	0	63		-407	Pass		
40	nominal	469.996889	NA	NA	NA	NA	NA	469.996888	0	130		-340	Pass		
50	nominal	469.996889	NA	NA	NA	NA	NA	469.996888	0	130	-340	Pass			

\* - Reference frequency

Reference numbers of test equipment used

HL 0493	HL 2171	HL 2358	HL 4355	HL 5598	HL 5623		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.





<b>Test specification:</b> Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
<b>Test procedure:</b> 47 CFR, Section 2.1049			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 20-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

### 7.3 Occupied bandwidth test

#### 7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1 and Table 7.3.2.

Table 7.3.1 Occupied bandwidth limits according to FCC requirements

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, kHz
450.0 – 470.0	26	6

Table 7.3.2 Occupied bandwidth limits according to RSS-119 requirements


Assigned frequency, MHz	Modulation envelope reference points, %	Maximum allowed bandwidth, kHz
450.0 – 470.0	99	6

\* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.

#### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was set to transmit the unmodulated carrier and the reference peak power level was measured.
- 7.3.2.3 The EUT was set to transmit the normally modulated carrier.
- 7.3.2.4 The transmitter occupied bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.3.3 and the associated plots.

Figure 7.3.1 Occupied bandwidth test setup

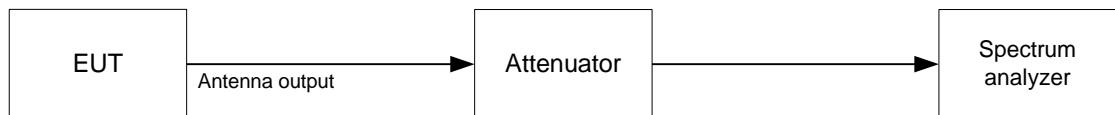



<b>Test specification:</b> Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
<b>Test procedure:</b> 47 CFR, Section 2.1049			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 20-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Table 7.3.3 Occupied bandwidth test results

DETECTOR USED: Peak hold  
RESOLUTION BANDWIDTH: 100 Hz  
VIDEO BANDWIDTH: 1 kHz  
EUT POWER: 110V 60Hz  
MODULATION: 4GFSK  
MODULATING SIGNAL: ID code  
BIT RATE: 4.8 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
MODULATION ENVELOPE REFERENCE POINTS: 99%				
450.0031	3.736	6	-2.264	Pass
460.0000	3.796	6	-2.204	Pass
469.9969	3.836	6	-2.164	Pass
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc				
450.0031	5.035	6	-0.965	Pass
460.0000	5.055	6	-0.945	Pass
469.9969	5.055	6	-0.945	Pass

Reference numbers of test equipment used

HL 3434	HL 4355	HL 5598	HL 5623				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
<b>Test procedure:</b> 47 CFR, Section 2.1049			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 20-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Plot 7.3.1 Occupied bandwidth test result at low frequency

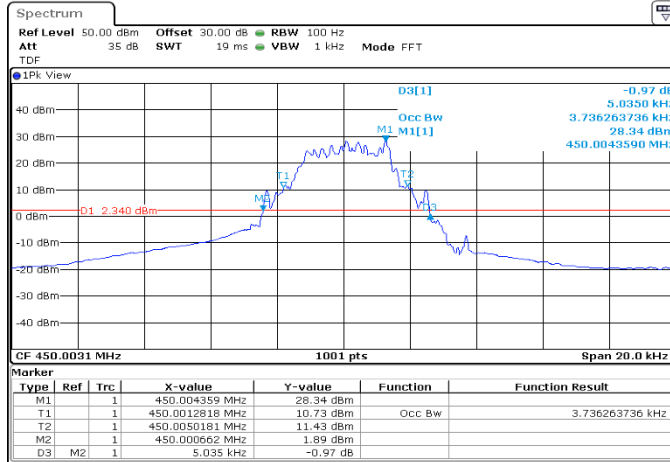

Plot 7.3.2 Occupied bandwidth test result at mid frequency

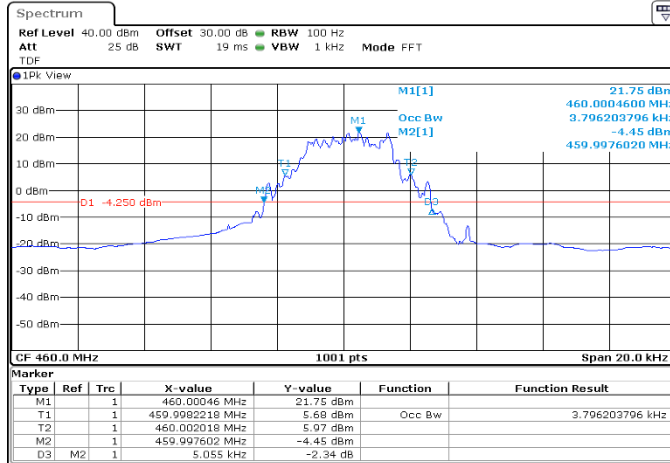




HERMON LABORATORIES

<b>Test specification:</b> Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
<b>Test procedure:</b> 47 CFR, Section 2.1049			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 20-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Plot 7.3.3 Occupied bandwidth test result at high frequency

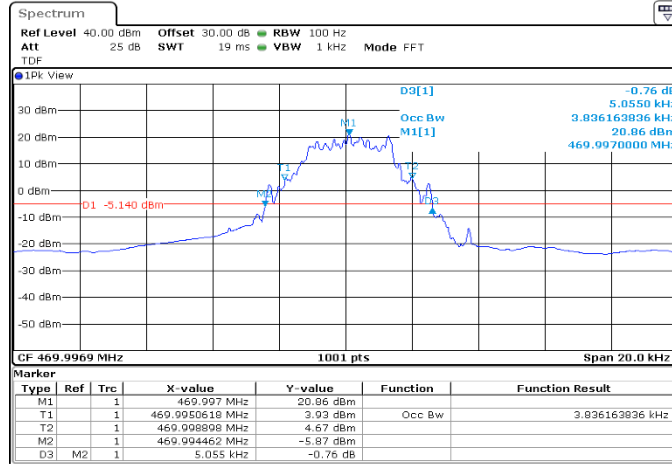



<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Emission mask</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051, 2.1047 and 90.210(e), TIA/EIA-603-E, Section 2.2.13			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 21-May-20			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 34 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

## 7.4 Emission mask test

### 7.4.1 General

This test was performed to measure emission mask at RF antenna connector. Specification test limits are given in Table 7.4.1 .

**Table 7.4.1 Emission mask limits**

Frequency displacement from carrier	Attenuation below carrier, dBc
Emission mask E (Channel bandwidth 6.25 kHz, authorized bandwidth 6.0 kHz) without audio low pass filter)	
0 – 3.0 kHz	0
3.0 – 4.6 kHz	30 + 16.67( $f_d^{**}$ - 3 kHz) or 55+10logP(W) ) or 65 whichever is the lesser
More than 4.6 kHz	55+10logP(W) or 57 whichever is the lesser (RSS-119) 55+10logP(W) or 65 whichever is the lesser (FCC)

\* - linearly increase with frequency

\*\* - displacement frequency

### 7.4.2 Test procedure

**7.4.2.1** The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

**7.4.2.2** The emission mask was measured with spectrum analyzer as provided in the associated plots.

**7.4.2.3** The test results are provided in Table 7.4.2 and the the associated plots.

**Table 7.4.2 Emission mask test results**

Carrier frequency, MHz	Limit	Verdict
450.0310	Emission mask E	Pass
460.0000		
469.9969		

### Reference numbers of test equipment used


HL 3434	HL 4355	HL 5598	HL 5623				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




<b>Test specification:</b> Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
<b>Test procedure:</b> 47 CFR, Sections 2.1051, 2.1047 and 90.210(e), TIA/EIA-603-E, Section 2.2.13			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-May-20			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 34 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Figure 7.4.1 Emission mask test setup

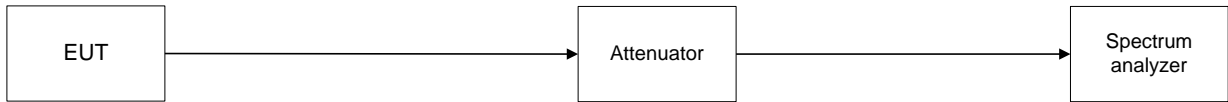

Plot 7.4.1 Emission mask test results at low carrier frequency

OPERATING FREQUENCY RANGE: 450.0 – 470.0 MHz  
 DETECTOR USED: Peak  
 EUT POWER: 110V 60Hz  
 MODULATION: 4GFSK  
 MODULATING SIGNAL: ID code  
 BIT RATE: 4.8 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

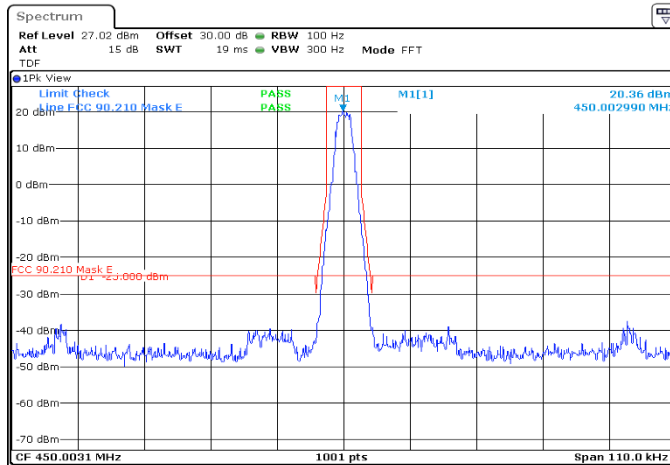




<b>Test specification:</b> Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
<b>Test procedure:</b> 47 CFR, Sections 2.1051, 2.1047 and 90.210(e), TIA/EIA-603-E, Section 2.2.13			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-May-20			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 34 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			


Plot 7.4.2 Emission mask test results at mid carrier frequency

OPERATING FREQUENCY RANGE: 450.0 – 470.0 MHz  
DETECTOR USED: Peak  
EUT POWER: 110V 60Hz  
MODULATION: 4GFSK  
MODULATING SIGNAL: ID code  
BIT RATE: 4.8 kbps  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

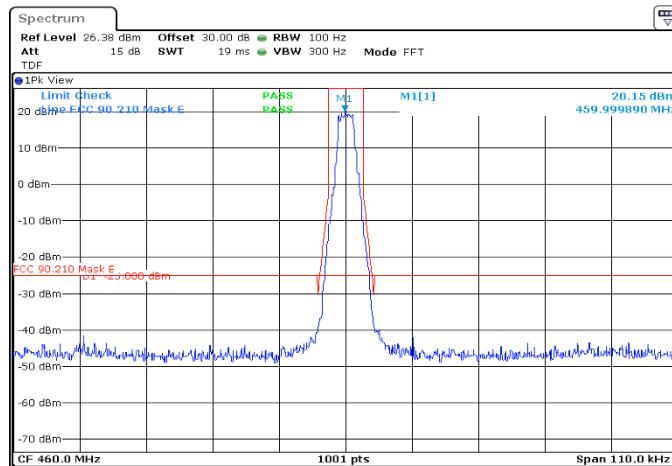

Plot 7.4.3 Emission mask test results at high carrier frequency

OPERATING FREQUENCY RANGE: 450.0 – 470.0 MHz  
DETECTOR USED: Peak  
EUT POWER: 110V 60Hz  
MODULATION: 4GFSK  
MODULATING SIGNAL: ID code  
BIT RATE: 4.8 kbps  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

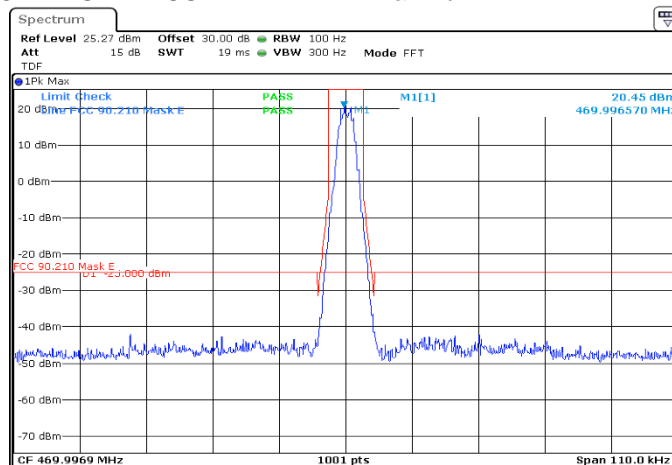



<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

## 7.5 Radiated spurious emission measurements

### 7.5.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m)***
0.009 – 10th harmonic*	55+10logP**	-25	72.4

\* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

\*\* - P is transmitter output power in Watts

\*\*\* - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:  $E = \sqrt{30 \times P \times 1.64} / r$ , where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

### 7.5.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the performance check was conducted.

7.5.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.5.2.3 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

### 7.5.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.5.3.1 The EUT was set up as shown in Figure 7.5.2, energized and the performance check was conducted.

7.5.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

The worst test results (the lowest margins) were recorded in

7.5.3.3 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band

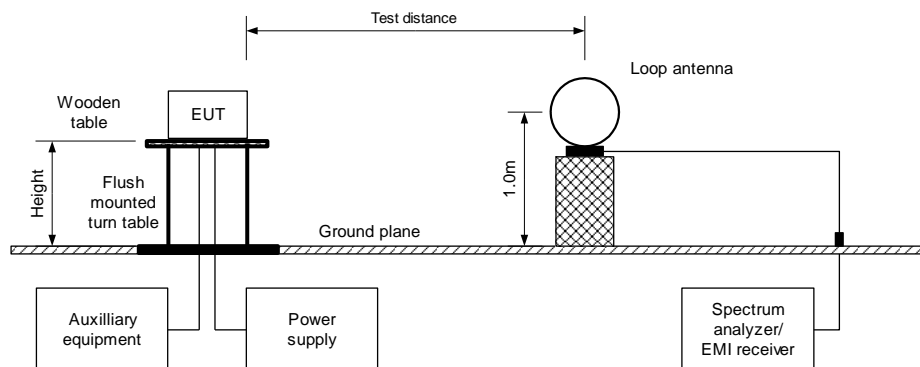






<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Figure 7.5.2 Setup for spurious emission field strength measurements above 30 MHz

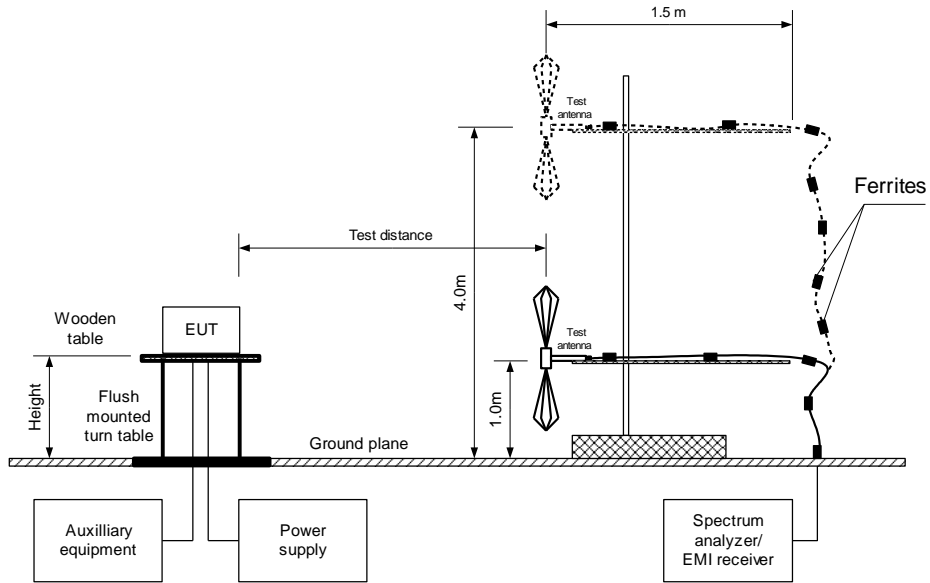



<b>Test specification:</b> Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

**Table 7.5.2 Spurious emission field strength test results**

ASSIGNED FREQUENCY RANGE: 450 – 470 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 5000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)  
 EUT POWER: 110 V / 277 V / 60 Hz  
 MODULATION: 4GFSK  
 BIT RATE: 4.8 kbps  
 TRANSMITTER OUTPUT POWER: Maximum

Frequency, MHz	Field strength, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
<b>Low carrier frequency 450.0031 MHz</b>								
All emissions are more than 20 dB below the limit								Pass
<b>Mid carrier frequency 460.0000 MHz</b>								
All emissions are more than 20 dB below the limit								Pass
<b>High carrier frequency 469.9969 MHz</b>								
All emissions are more than 20 dB below the limit								Pass

\*- Margin = Field strength of spurious – calculated field strength limit.

\*\* - EUT front panel refers to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 3903	HL 4360	HL 4933	HL 5288	HL 5405		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			


**Plot 7.5.1 Radiated emission measurements in 9 kHz - 30 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Low  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 110V 60Hz

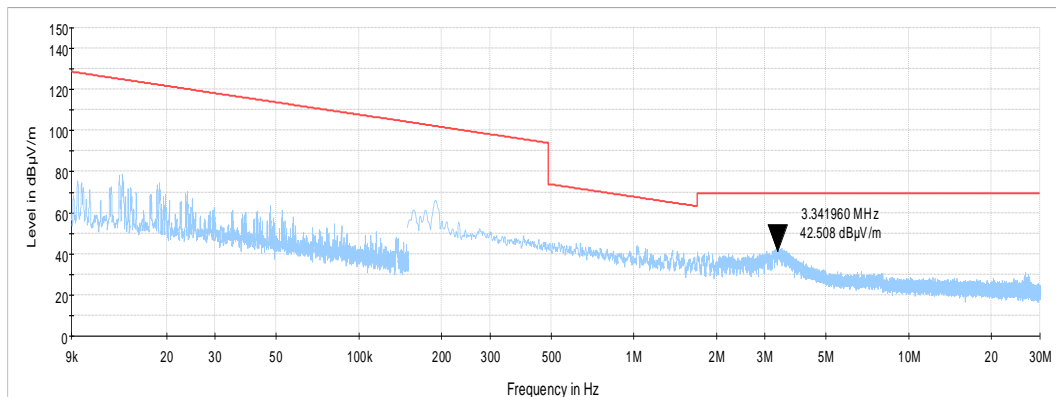

**Plot 7.5.2 Radiated emission measurements in 9 kHz - 30 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 110V 60Hz

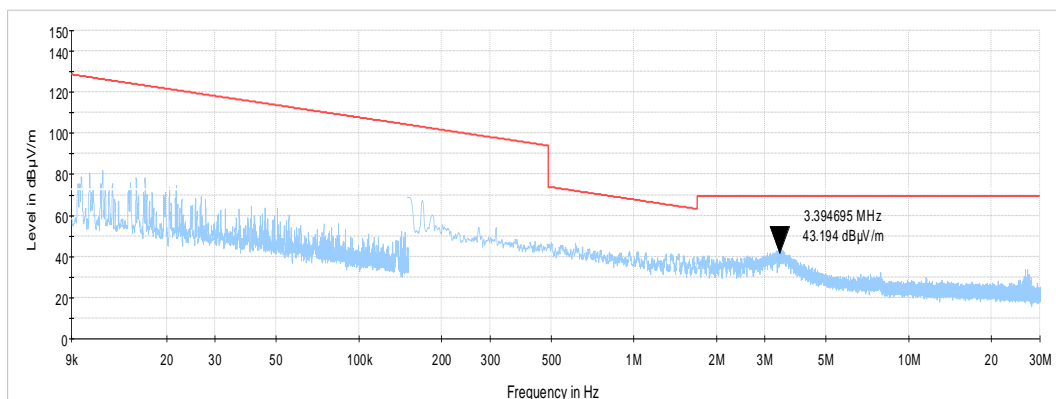




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

**Plot 7.5.3 Radiated emission measurements in 9 kHz - 30 MHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m  
EUT POWER: 110V 60Hz

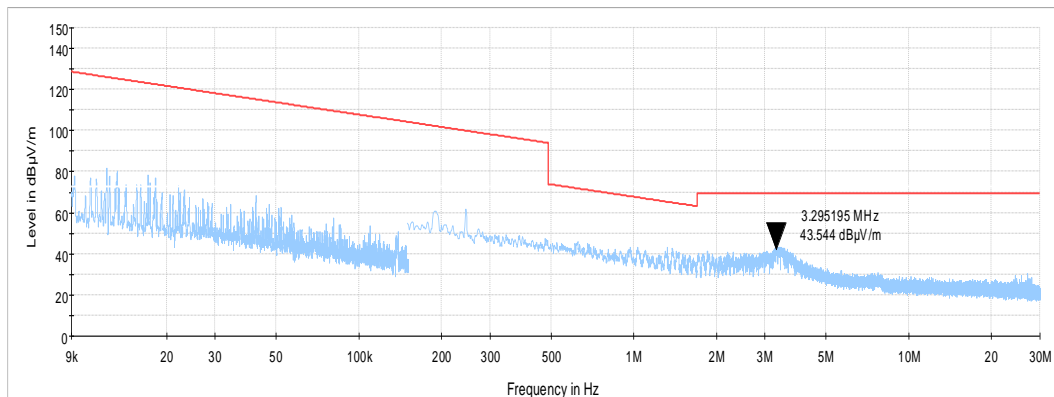




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			


**Plot 7.5.4 Radiated emission measurements in 9 kHz - 30 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Low  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 277V 60Hz

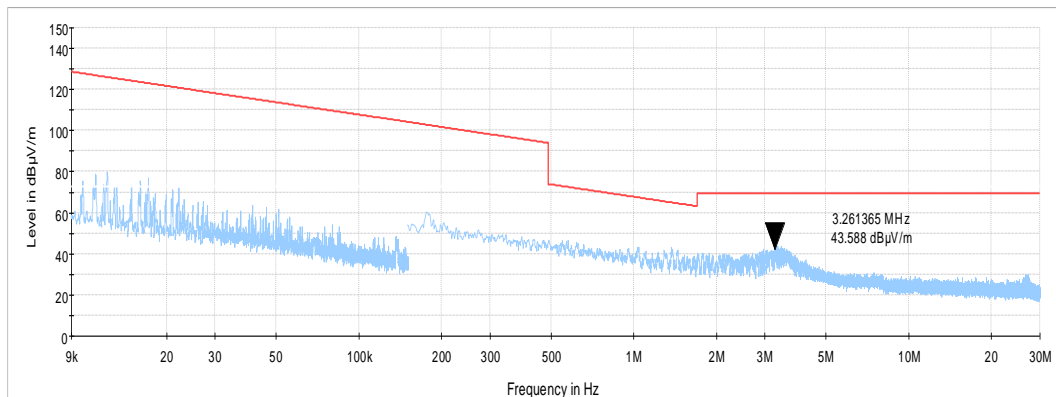

**Plot 7.5.5 Radiated emission measurements in 9 kHz - 30 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 277V 60Hz

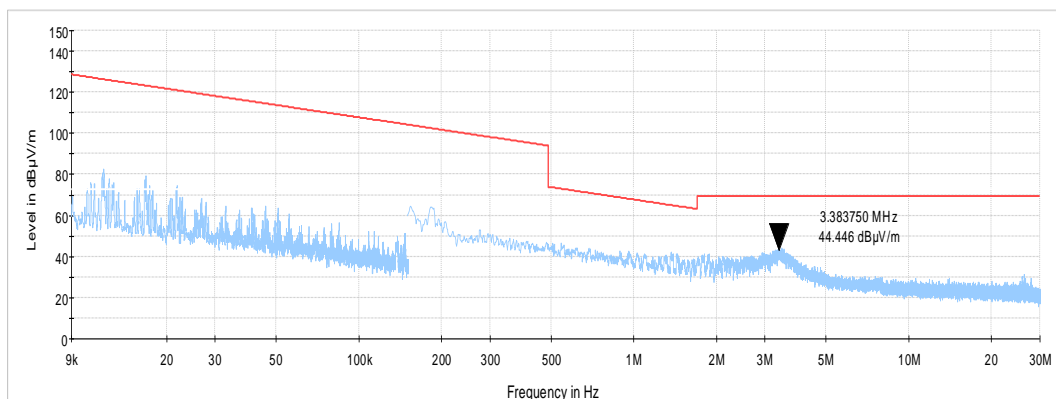




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

**Plot 7.5.6 Radiated emission measurements in 9 kHz - 30 MHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m  
EUT POWER: 277V 60Hz

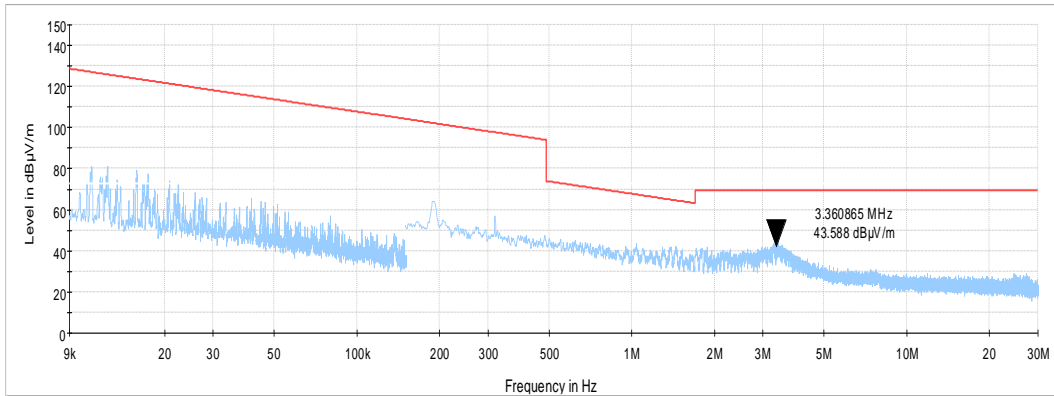




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			


**Plot 7.5.7 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Low  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 110V 60Hz

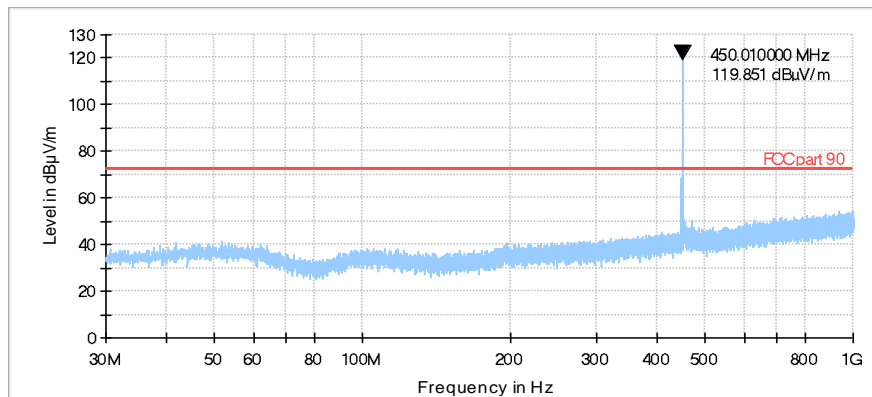

**Plot 7.5.8 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 110V 60Hz

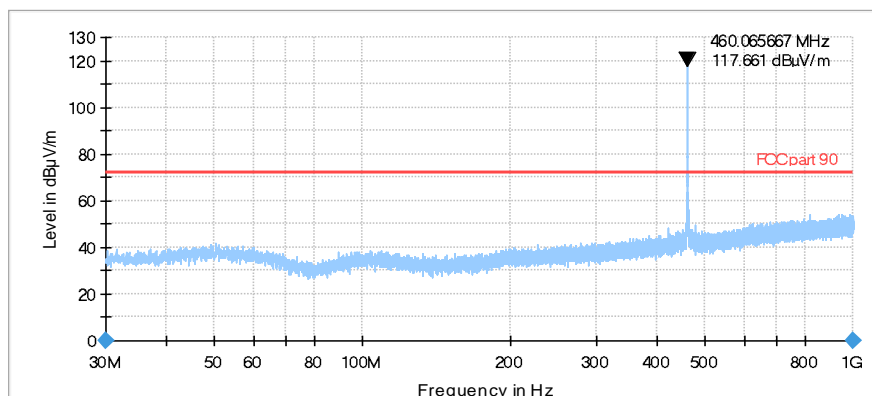




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
Test procedure: 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		<b>Verdict: PASS</b>	
Date(s): 17-May-20			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 110 VAC, 60 Hz
Remarks:			

**Plot 7.5.9 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m
EUT POWER:	110V 60Hz

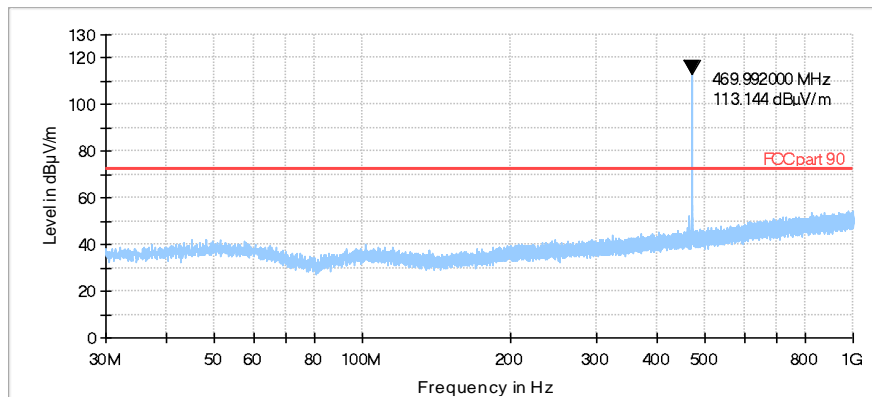






<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-May-20			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			


**Plot 7.5.10 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Low  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 277V 60Hz

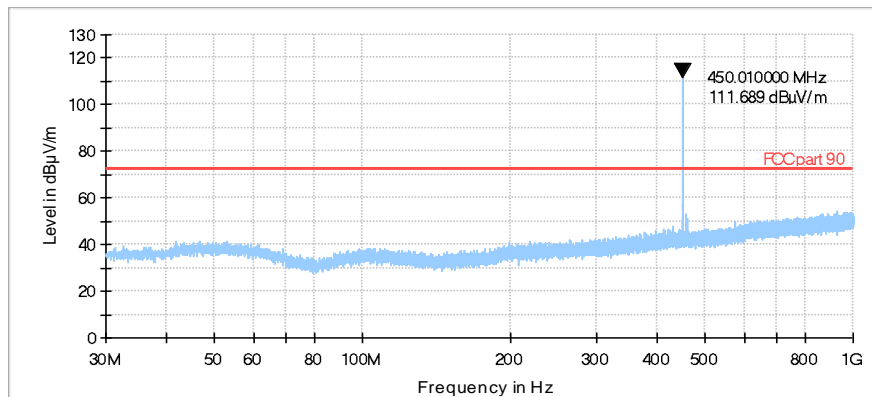

**Plot 7.5.11 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 277V 60Hz

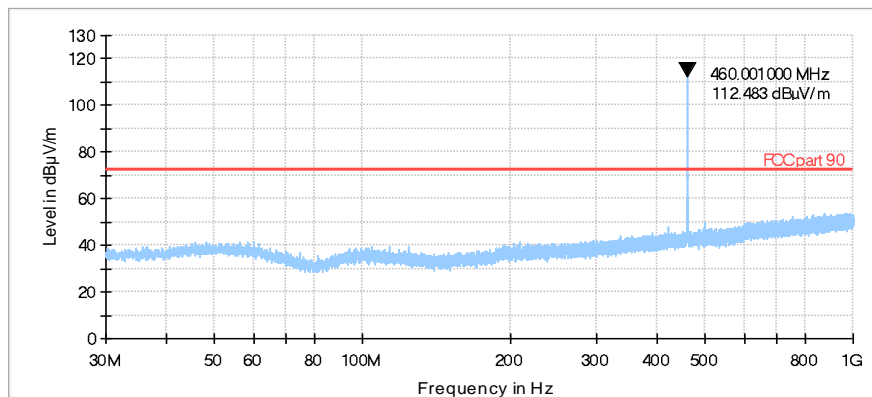




HERMON LABORATORIES

<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
Test procedure: 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-May-20			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 110 VAC, 60 Hz
Remarks:			

**Plot 7.5.12 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m  
EUT POWER: 277V 60Hz

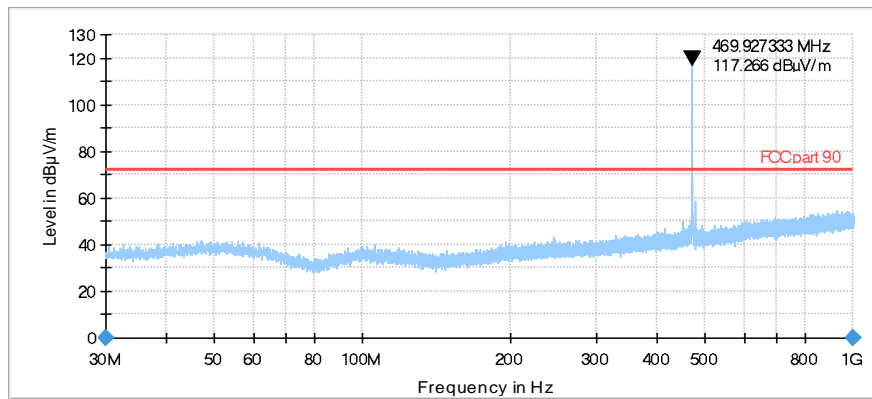




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
Test procedure: 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-May-20			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 110 VAC, 60 Hz
Remarks:			


**Plot 7.5.13 Radiated emission measurements in 1000 – 5000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Low  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 110V 60Hz

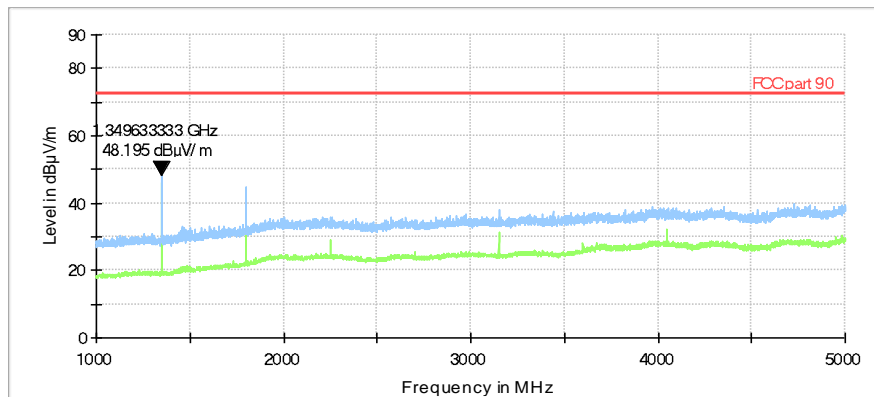

**Plot 7.5.14 Radiated emission measurements in 1000 – 5000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 110V 60Hz

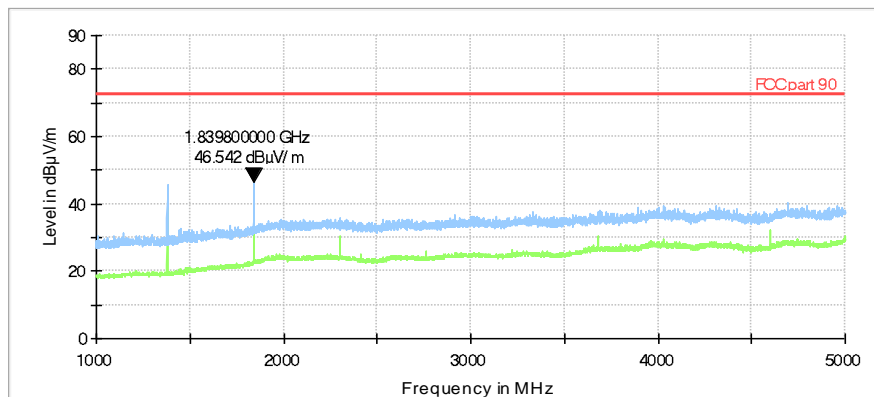




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
Test procedure: 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		<b>Verdict: PASS</b>	
Date(s): 17-May-20			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 110 VAC, 60 Hz
Remarks:			

**Plot 7.5.15 Radiated emission measurements in 1000 – 5000 MHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m  
EUT POWER: 110V 60Hz

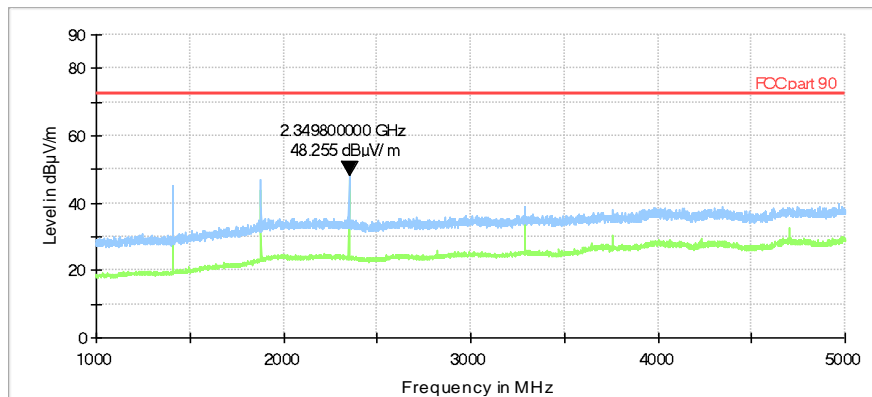




<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
Test procedure: 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-May-20			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 110 VAC, 60 Hz
Remarks:			


**Plot 7.5.16 Radiated emission measurements in 1000 – 5000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Low  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 277V 60Hz

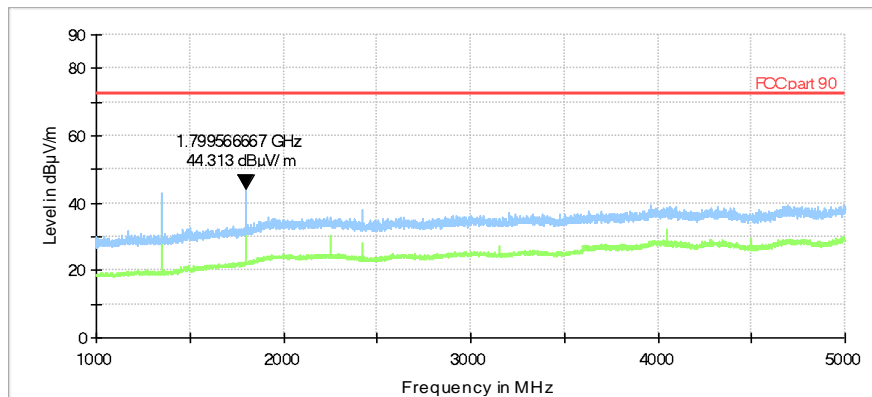

**Plot 7.5.17 Radiated emission measurements in 1000 – 5000 MHz range**

TEST SITE: Semi anechoic chamber  
 CARRIER FREQUENCY: Mid  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 TEST DISTANCE: 3 m  
 EUT POWER: 277V 60Hz

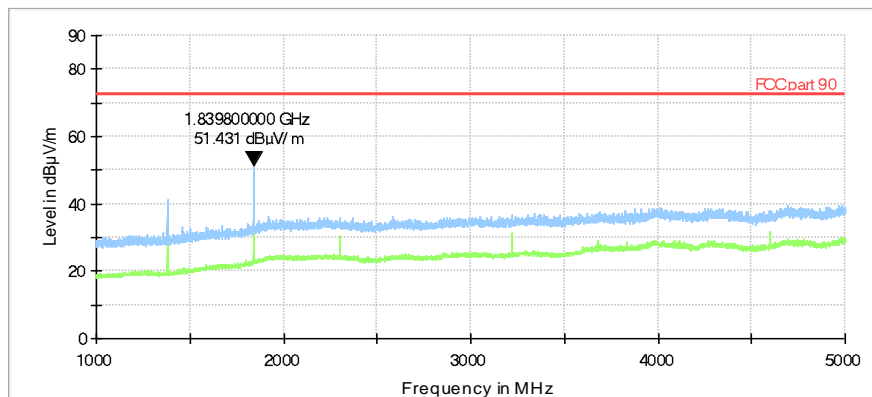




HERMON LABORATORIES

<b>Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions</b>			
Test procedure: 47 CFR, Section 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-May-20			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 110 VAC, 60 Hz
Remarks:			

**Plot 7.5.18 Radiated emission measurements in 1000 – 5000 MHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m  
EUT POWER: 277V 60Hz

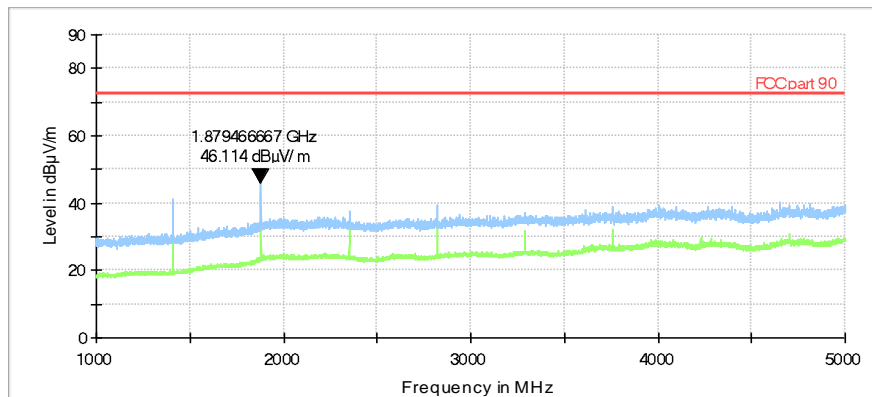



<b>Test specification:</b> Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
<b>Test procedure:</b> TIA/EIA-603-E, Section 2.2.19			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 34 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

## 7.6 Transient frequency behaviour test

### 7.6.1 General

This test was performed to measure carrier frequency drift as function of time during transmitter start up and shut down. Specification test limits are given in Table 7.6.1. The test results are provided in the associated plots.

Table 7.6.1 Transient frequency limits

Channel bandwidth, kHz	Carrier frequency tolerance, kHz	Duration, ms	Time interval*
<b>421.0 – 512.0 MHz band</b>			
6.25	$\pm 6.25$	10.0	$t_1$
	$\pm 3.125$	25.0	$t_2$
	$\pm 6.25$	10.0	$t_3$

\* -  $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed;

$t_1$  is the time period immediately following  $t_{on}$ ;

$t_2$  is the time period immediately following  $t_1$ ;

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ ;

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

### 7.6.2 Test procedure

- 7.6.2.1** The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked. Variable attenuator was adjusted to provide signal level approximately 40 dB below the FM receiver maximum allowed level as measured with RF power meter. The EUT was turned off.
- 7.6.2.2** The signal generator was set to the assigned transmitter frequency modulated with 1 kHz tone at 25 kHz deviation and the output power was adjusted to provide the same as the EUT signal level at the FM receiver input as measured with power meter.
- 7.6.2.3** The storage oscilloscope was set to provide horizontal sweep rate 10 milliseconds per division. Amplitude control of the storage oscilloscope was adjusted to obtain 1 kHz sinusoidal signal vertically centered with  $\pm 4$  divisions amplitude.
- 7.6.2.4** The variable attenuator was adjusted to increase RF level supplied to splitter by 30 dB and the EUT was consequently turned on and off. Transient frequency during power switching was captured and shown in the associated plots.



<b>Test specification:</b> Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
<b>Test procedure:</b> TIA/EIA-603-E, Section 2.2.19			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 34 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Figure 7.6.1 Transient frequency test setup

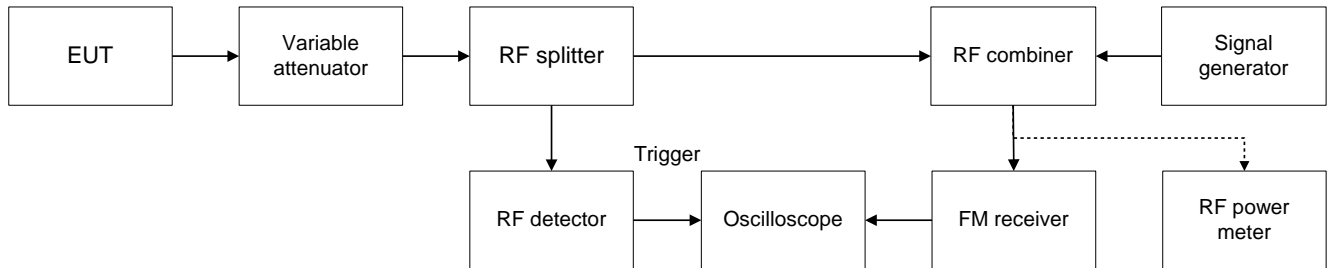


Table 7.6.2 Transient frequency behaviour test results

Carrier frequency, MHz	Time interval	Duration, ms	Frequency tolerance, kHz	Limit, kHz	Margin, kHz	Verdict
<b>Channel bandwidth 6.25 kHz</b>						
450.0031	t <sub>1</sub>	10.0	2.813	± 6.25	-3.438	Pass
	t <sub>2</sub>	25.0	0.625	± 3.125	-2.500	
	t <sub>3</sub>	10.0	0.938	± 6.25	-5.313	
460.0000	t <sub>1</sub>	10.0	2.344	± 6.25	-3.906	Pass
	t <sub>2</sub>	25.0	0.625	± 3.125	-2.500	
	t <sub>3</sub>	10.0	1.250	± 6.25	-5.000	
469.9969	t <sub>1</sub>	10.0	2.813	± 6.25	-3.438	Pass
	t <sub>2</sub>	25.0	0.625	± 3.125	-2.500	
	t <sub>3</sub>	10.0	0.781	± 6.25	-5.469	

**Reference numbers of test equipment used**

HL 5376	HL 0539	HL 5369	HL 4938	HL 5586	HL 2017	HL 5472	HL 5623
HL 2016							

Full description is given in Appendix A.








HERMON LABORATORIES

<b>Test specification:</b> Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
<b>Test procedure:</b> TIA/EIA-603-E, Section 2.2.19			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b> 21-May-20			
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 34 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>			

Plot 7.6.1 Transient frequency during power ON test results at low carrier frequency

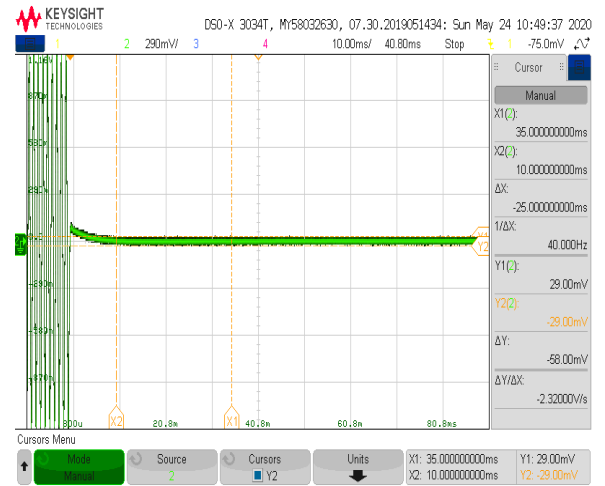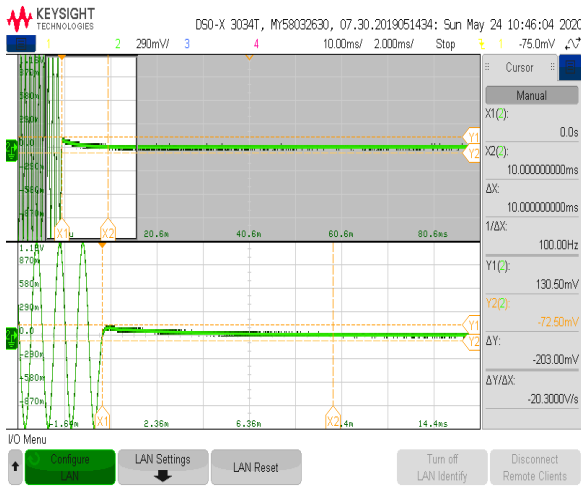

Plot 7.6.2 Transient frequency during power OFF test results at low carrier frequency

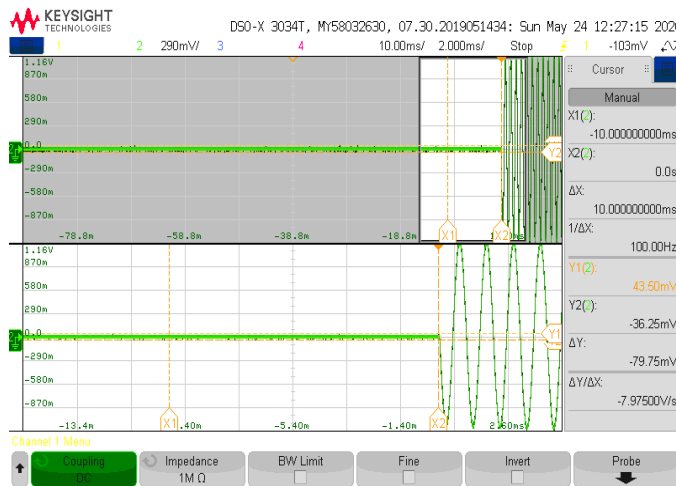





HERMON LABORATORIES

<b>Test specification:</b> Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour	
<b>Test procedure:</b> TIA/EIA-603-E, Section 2.2.19	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 21-May-20	
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 34 %
<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>	

Plot 7.6.3 Transient frequency during power ON test results at mid carrier frequency

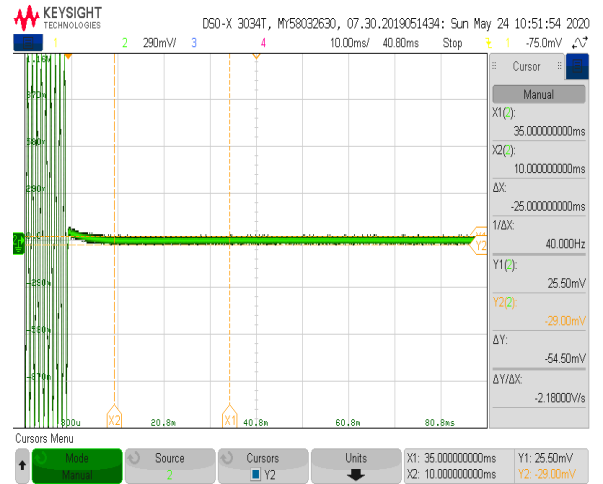

Plot 7.6.4 Transient frequency during power OFF test results at mid carrier frequency

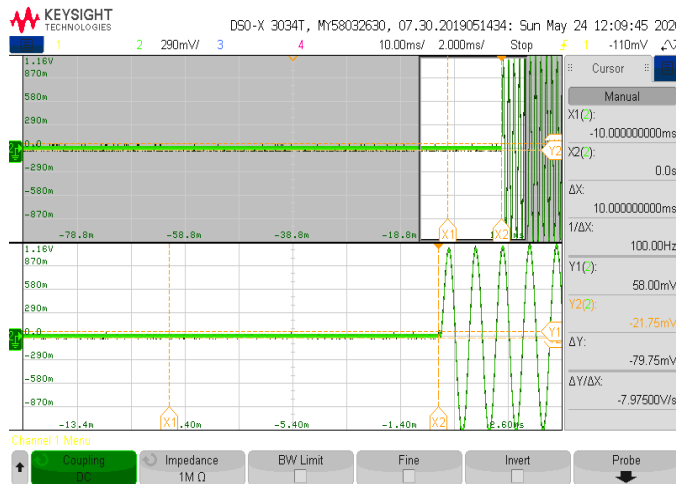





HERMON LABORATORIES

<b>Test specification:</b> Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour	
<b>Test procedure:</b> TIA/EIA-603-E, Section 2.2.19	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 21-May-20	
<b>Temperature:</b> 26 °C	<b>Relative Humidity:</b> 34 %
<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 110 VAC, 60 Hz
<b>Remarks:</b>	

Plot 7.6.5 Transient frequency during power ON test results at high carrier frequency

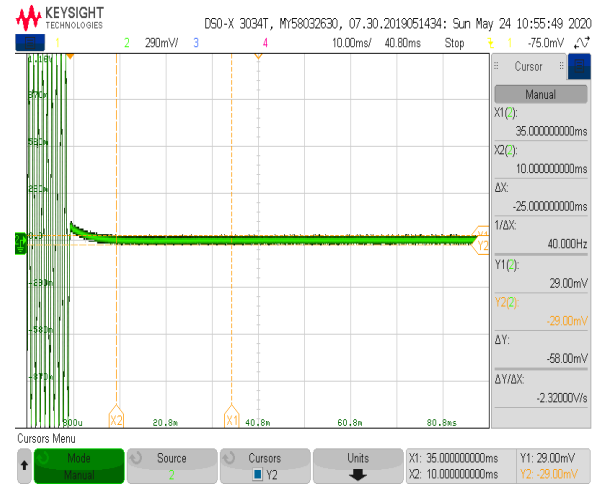

Plot 7.6.6 Transient frequency during power OFF test results at high carrier frequency

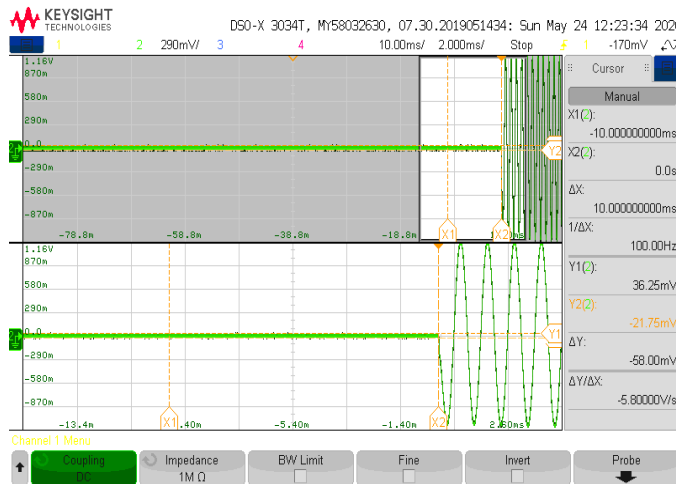

**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-20	24-Feb-21
0493	Temperature Chamber -45...175 deg C	Thermotron	S-1.2 Mini-Max	14016	17-Jun-20	17-Jun-21
0539	Generator Signal, 10 kHz - 1.2 GHz	Marconi Instruments	2023	112121/041	09-Jul-19	09-Jul-20
2016	Attenuator, Manual Step, 0-9/1 dB, 0-8 GHz, 2 W	Midwest Microwave	1072	1315	08-Mar-20	08-Mar-21
2017	Attenuator, Manual Step, 0-60/10 dB, 0-8.0 GHz	Midwest Microwave	1071	2017	08-Mar-20	08-Mar-21
2171	Multimeter	Fluke	177	79960418	21-Jul-19	21-Jul-20
2358	Power Supply, 2 X 0-36VDC / 5A, 5VDC / 5A	Horizon Electronics	DHR3655 D	767469	26-Jun-19	26-Jun-20
3434	Test Cable , DC-18 GHz, 1.5 m, SMA - SMA	Mini-Circuits	CBL-5FT-SMSM+	25683	13-Apr-20	13-Apr-21
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	06-Apr-20	06-Apr-21
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	04-Aug-19	04-Aug-20
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	20-Jan-20	20-Jan-21
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	06-Jan-20	06-Jan-21
4938	Test Cable, 50Ω, 1.8 m, DC to 18 GHz	Mini-Circuits	CBL-6FT-SMNM+	NA	22-Apr-20	22-Apr-21
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5369	Digital storage oscilloscope, 350 MHz	Keysight Technologies	DSOX3034T	MY58032630	01-Jun-20	01-Jun-21
5376	EXA Signal Analyzer, 10 Hz - 32 GHz	Keysight Technologies	N9010B	MY57470404	18-Mar-20	18-Mar-21
5405	RF cable, 18 GHz, N-N, 6 m	Huber-Suhner	SF118/11N(x2)	500023/118	11-Aug-19	11-Aug-20
5472	Power Splitter / Combiner 0.5-1 GHz	Mini Circuits	ZAPD-1	NA	21-Jan-19	21-Jan-21
5586	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/N-type	Mini Circuits	CBL-6FT-SMNM+	NA	22-Oct-19	22-Oct-20
5598	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18000 MHz	Mini Circuits	BW-N10W5+	NA	24-Sep-19	24-Sep-20
5623	Precision Fixed Attenuator, 50 Ohm, 5 W, 20 dB, DC to 18 GHz	Mini Circuits	BW-N20W5+	NA	06-Oct-19	06-Oct-20



### 9 APPENDIX B Test equipment correction factors

**HL 0446: Active Loop Antenna**  
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ A/m.

**HL 4933: Active Horn Antenna**  
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



**HL 5288: Trilog Antenna**  
**Frankonia, model: ALX-8000E, s/n: 00809**  
**30-1000 MHz**

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.

**above 1000 MHz**

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



HL 5405: RF Cable  
Huber-Suhner, model: SF118/11N(x2), s/n: 500023/118

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.1	0.01	±0.07
50	0.23	±0.07
100	0.32	±0.07
200	0.45	±0.08
300	0.55	±0.08
400	0.64	±0.08
500	0.71	±0.08
600	0.78	±0.08
700	0.85	±0.08
800	0.91	±0.08
900	0.97	±0.08
1000	1.02	±0.08
1100	1.07	±0.08
1200	1.12	±0.08
1300	1.16	±0.08
1400	1.21	±0.08
1500	1.25	±0.08
1600	1.30	±0.08
1700	1.34	±0.08
1800	1.38	±0.08
1900	1.42	±0.08
2000	1.47	±0.08
2500	1.64	±0.10
3000	1.81	±0.10
3500	1.97	±0.10
4000	2.11	±0.10
4500	2.25	±0.10
5000	2.38	±0.10
5500	2.48	±0.10
6000	2.59	±0.10
6500	2.72	±0.10
7000	2.84	±0.13
7500	2.97	±0.13
8000	3.08	±0.13
8500	3.21	±0.13
9000	3.31	±0.13
9500	3.42	±0.13
10000	3.52	±0.13



10 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
<b>Transmitter tests</b>	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	±8%
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz ± 13.9 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
<b>Unintentional radiator tests</b>	
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.





HERMON LABORATORIES

## 11 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: [mail@hermonlabs.com](mailto:mail@hermonlabs.com)  
website: [www.hermonlabs.com](http://www.hermonlabs.com)

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



## 12 APPENDIX E

### Specification references

FCC 47CFR part 90: 2019  
FCC 47CFR part 2: 2019  
ANSI/TIA/EIA-603-E:2016  
RSS-119 Issue 12: 2015  
RSS-Gen Issue 5: 2019

Private land mobile radio services  
Frequency allocations and radio treaty matters; general rules and regulations  
Land Mobile FM or PM Communications Equipment Measurement and Performance Standards  
Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz  
General Requirements for Compliance of Radio Apparatus



### 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT