

Hermon Laboratories Ltd.  
Harakevet Industrial Zone, Binyamina 30500,  
Israel  
Tel. +972-4-6288001  
Fax. +972-4-6288277  
E-mail: mail@hermonlabs.com

## TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS) and  
subpart B class B

FOR:

**Telematics Wireless Ltd.**

**Wall mount booster**

**Model: WMB**

**FCC ID:NTAWMB1**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Changes made in EUT .....	5
6.3	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	7
7.1	The 20 dB bandwidth .....	7
7.2	Carrier frequency separation .....	11
7.3	Number of hopping frequencies .....	13
7.4	Average time of occupancy .....	15
7.5	Peak output power .....	18
7.6	Band edge radiated emissions .....	24
7.7	Field strength of spurious emissions .....	28
7.8	Antenna requirements .....	71
8	Emissions tests according to 47CFR part 15 subpart B requirements .....	72
8.1	Radiated emission measurements .....	72
9	APPENDIX A Test equipment and ancillaries used for tests .....	77
10	APPENDIX B Measurement uncertainties .....	78
11	APPENDIX C Test laboratory description .....	79
12	APPENDIX D Specification references .....	79
13	APPENDIX E Test equipment correction factors .....	80
14	APPENDIX F Abbreviations and acronyms .....	88

## 1 Applicant information

**Client name:** Telematics Wireless Ltd.  
**Address:** 26 Hamelaha street, POB 1911, Holon, 58117, Israel  
**Telephone:** +972 3557 5767  
**Fax:** +972 3557 5753  
**E-mail:** slavas@tlmw.com  
**Contact name:** Mr. Slava Snitkovsky

## 2 Equipment under test attributes

**Product name:** Wall mount booster  
**Product type:** Transceiver  
**Model(s):** WMB  
**Serial number:** 6535174  
**Hardware version:** A  
**Software release:** H00100A  
**Receipt date:** 8/11/2010

## 3 Manufacturer information

**Manufacturer name:** Telematics Wireless Ltd.  
**Address:** 26 Hamelaha street, POB 1911, Holon, 58117, Israel  
**Telephone:** +972 3557 5767  
**Fax:** +972 3557 5753  
**E-Mail:** slavas@tlmw.com  
**Contact name:** Mr. Slava Snitkovsky

## 4 Test details




**Project ID:** 21110  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 8/12/2010  
**Test completed:** 9/07/2010  
**Test specification(s):** FCC 47CFR part 15, subpart C, §15.247 (FHSS) and subpart B class B, §15.109

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 15.247(a)1, The 20 dB bandwidth	Pass
Section 15.247(a)1, Frequency separation	Pass
Section 15.247(a)1, Number of hopping frequencies	Pass
Section 15.247(a)1, Average time of occupancy	Pass
Section 15.247(b), Peak output power	Pass
Section 15.247(d), Emissions at band edges	Pass
Section 15.247(d), Radiated spurious emissions	Pass
Section 15.203, Antenna requirements	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.247(i), RF exposure	Pass, the exhibit to the application of certification is provided
<b>Unintentional emissions</b>	
Section 15.107 Class B, Conducted emission at AC power port	Not required
Section 15.109 Class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. S. Samokha, test engineer	September 7, 2010	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	December 27, 2011	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and radio group manager	December 28, 2011	



HERMON LABORATORIES

---

## **6 EUT description**

### **6.1 General information**

The EUT is a booster (repeater), including a water meter. The device is a 2-Way RF communicator, that works in FHSS mode. The EUT consists of the following units: RF transmitter & receiver with integral antenna and microcontroller plus simple digital logic, with control of the operational mode of the units.

### **6.2 Changes made in EUT**

No changes were implemented in the EUT.

### 6.3 Transmitter characteristics

<b>Type of equipment</b>						
	Stand-alone (Equipment with or without its own control provisions)					
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
<b>Intended use</b>		<b>Condition of use</b>				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
<b>Assigned frequency range</b>		902-928 MHz				
<b>Operating frequency range</b>		905.55-924.75 MHz				
<b>RF channel spacing</b>		NA				
<b>Maximum rated output power</b>		At transmitter 50 $\Omega$ RF output connector			NA	
		Effective radiated power (for equipment with no RF connector)			29.3 dBm	
<b>Is transmitter output power variable?</b>		X	No			
			Yes	continuous variable		
				stepped variable with stepsize		dB
				minimum RF power		dBm
				maximum RF power		dBm
<b>Antenna connection</b>						
	unique coupling	standard connector	X	integral	with temporary RF connector	
					X without temporary RF connector	
<b>Antenna/s technical characteristics</b>						
Type	Manufacturer	Model number		Gain		
"internal"	Telematics Wireless	Printed dipole		3 dBi		
<b>Transmitter aggregate data rate/s</b>		60 kbps				
<b>Transmitter aggregate symbol (baud) rate/s</b>		NA				
<b>Type of modulation</b>		FSK				
<b>Modulating test signal (baseband)</b>		PRBS				
<b>Maximum transmitter duty cycle in normal use</b>		0.1%				
<b>Transmitter duty cycle supplied for test (FHSS)</b>		1.23%	<b>Tx ON time</b>	5.21 msec	<b>Period</b>	421.8 msec
<b>Transmitter power source</b>						
X	Battery	<b>Nominal rated voltage</b>	3.6 VDC	<b>Battery type</b>	Lithium	
	DC	<b>Nominal rated voltage</b>	VDC			
	AC mains	<b>Nominal rated voltage</b>	VAC	<b>Frequency</b>		
<b>Common power source for transmitter and receiver</b>						
		X	yes	no		
<b>Spread spectrum technique used</b>		X	Frequency hopping (FHSS)			
			Digital transmission system (DTS)			
			Hybrid			
<b>Spread spectrum parameters for transmitters tested per FCC 15.247 only</b>						
<b>FHSS</b>	<b>Total number of hops</b>		54			
	<b>Bandwidth per hop</b>		230 kHz			
	<b>Max. separation of hops</b>		350 kHz			

<b>Test specification:</b> Section 15.247(a)1, 20 dB bandwidth			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date:</b> 8/15/2010			
<b>Temperature:</b> 24.3 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 47 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 The 20 dB bandwidth

#### 7.1.1 General

This test was performed to measure 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	500	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plots.

Figure 7.1.1 The 20 dB bandwidth test setup





<b>Test specification:</b> Section 15.247(a)1, 20 dB bandwidth	
<b>Test procedure:</b> Public notice DA 00-705	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/15/2010	
<b>Temperature:</b> 24.3 °C	<b>Air Pressure:</b> 1006 hPa
<b>Relative Humidity:</b> 47 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 - 928 MHz  
DETECTOR USED: Peak  
SWEEP TIME: Auto  
RESOLUTION BANDWIDTH: ≥ 1% of the 20 dB bandwidth  
VIDEO BANDWIDTH: ≥ RBW  
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc  
MODULATING SIGNAL: PRBS  
FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, Mbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
<b>Low frequency 905.55 MHz</b>							
905.55	FSK	NA	NA	210.0	250	-40.0	Pass
<b>Mid frequency 915.0 MHz</b>							
915.00	FSK	NA	NA	202.5	250	-47.5	Pass
<b>High frequency 924.75 MHz</b>							
924.75	FSK	NA	NA	212.5	250	-37.5	Pass

Reference numbers of test equipment used


HL 0337	HL 3001						
---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.




<b>Test specification:</b> Section 15.247(a)1, 20 dB bandwidth			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date:</b> 8/15/2010			
<b>Temperature:</b> 24.3 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 47 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

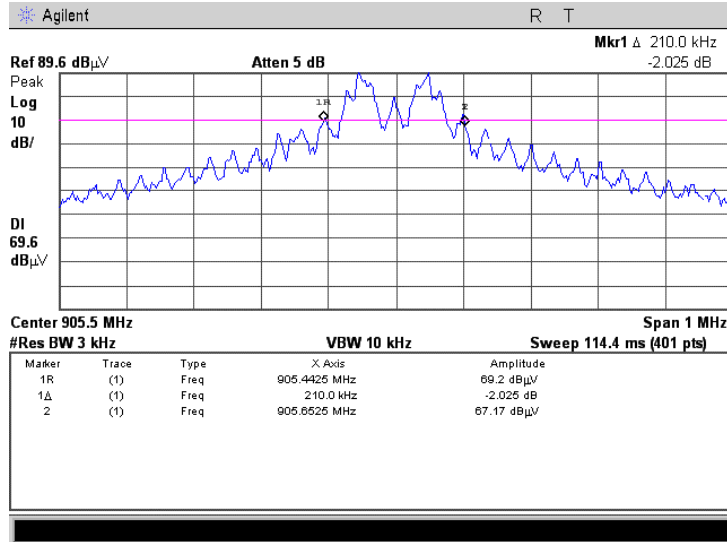


Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

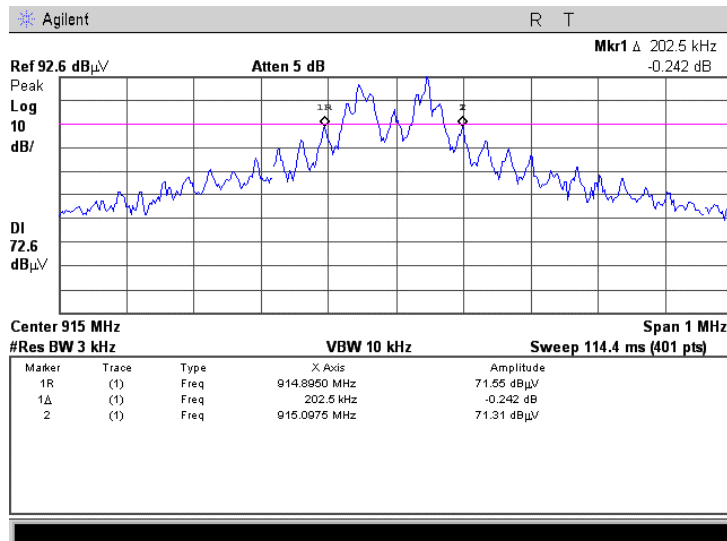

<b>Test specification:</b>	<b>Section 15.247(a)1, 20 dB bandwidth</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/15/2010		
<b>Temperature:</b> 24.3 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 47 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

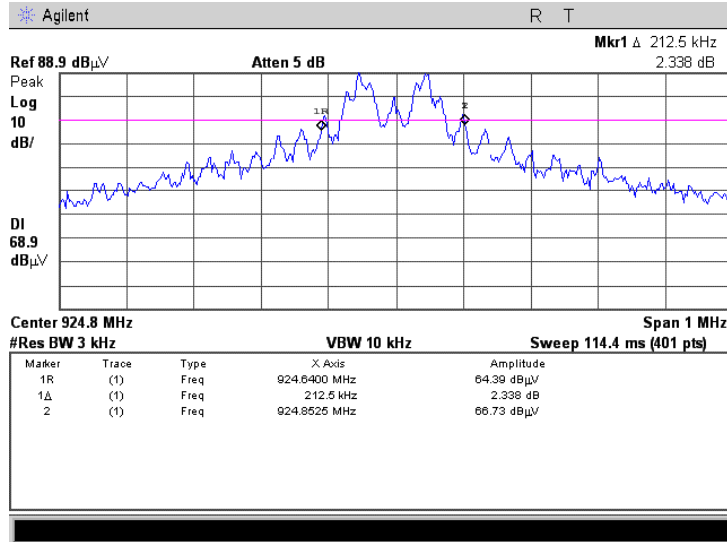

<b>Test specification:</b> Section 15.247(a)1, Frequency separation	
<b>Test procedure:</b> Public notice DA 00-705	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/24/2010	
<b>Temperature:</b> 23.9 °C	<b>Air Pressure:</b> 1005 hPa
<b>Relative Humidity:</b> 36 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

## 7.2 Carrier frequency separation

### 7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

### 7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Carrier frequency separation test setup



<b>Test specification:</b> Section 15.247(a)1, Frequency separation	
<b>Test procedure:</b> Public notice DA 00-705	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/24/2010	
<b>Temperature:</b> 23.9 °C	<b>Air Pressure:</b> 1005 hPa
<b>Relative Humidity:</b> 36 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz  
 MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: ≥ 1% of the span  
 VIDEO BANDWIDTH: ≥ RBW  
 FREQUENCY HOPPING: Enabled  
 20 dB BANDWIDTH: 212.5 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin, kHz*	Verdict
324	212.5	111.5	Pass


\* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 0337	HL 2909						
---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.2.1 Carrier frequency separation

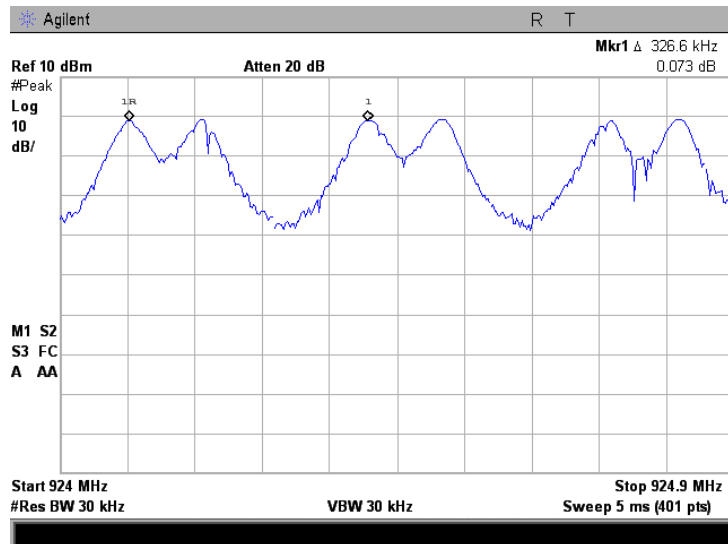

<b>Test specification:</b> Section 15.247(a)1, Number of hopping frequencies	
<b>Test procedure:</b> Public notice DA 00-705	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/15/2010	
<b>Temperature:</b> 24.3 °C	<b>Air Pressure:</b> 1006 hPa
<b>Relative Humidity:</b> 47 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

### 7.3 Number of hopping frequencies

#### 7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

#### 7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.

7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.

7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.

7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Hopping frequencies test setup



<b>Test specification:</b> Section 15.247(a)1, Number of hopping frequencies	
<b>Test procedure:</b> Public notice DA 00-705	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/15/2010	
<b>Temperature:</b> 24.3 °C	<b>Air Pressure:</b> 1006 hPa
<b>Relative Humidity:</b> 47 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz  
 MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: ≥ 1% of the span  
 VIDEO BANDWIDTH: ≥ RBW  
 FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
54	50	4	Pass


\* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 0337	HL 3001					
---------	---------	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Number of hopping frequencies

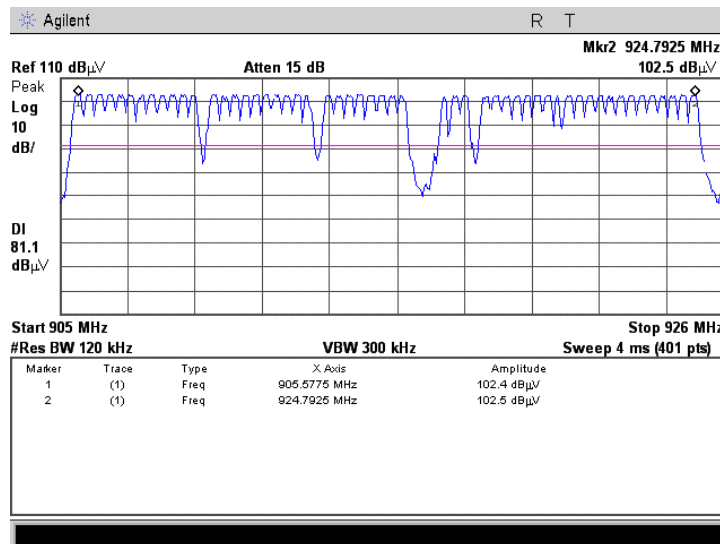

<b>Test specification:</b> Section 15.247(a)1, Average time of occupancy			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date:</b> 8/24/2010			
<b>Temperature:</b> 23.6 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7.4 Average time of occupancy

### 7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

### 7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.


7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.

7.4.2.3 The single transmission duration and period were measured with oscilloscope.

7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.

7.4.2.5 The test results provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(a)1, Average time of occupancy</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date:</b>	8/24/2010		
<b>Temperature:</b> 23.6 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY RANGE: 902.0 – 928.0 MHz  
 MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 NUMBER OF HOPPING FREQUENCIES: 54  
 INVESTIGATED PERIOD: 20 s  
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, ms	Single transmission period, ms	Average time of occupancy*, ms	Limit, ms	Margin, ms**	Verdict
905.55	4.39	400	219.5	400	-180.5	Pass

\* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period × number of hopping channels).

\*\* - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used


HL 0337	HL 2780					
---------	---------	--	--	--	--	--

Full description is given in Appendix A.




<b>Test specification:</b>	<b>Section 15.247(a)1, Average time of occupancy</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/24/2010		
<b>Temperature:</b> 23.6 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.4.1 Single transmission duration

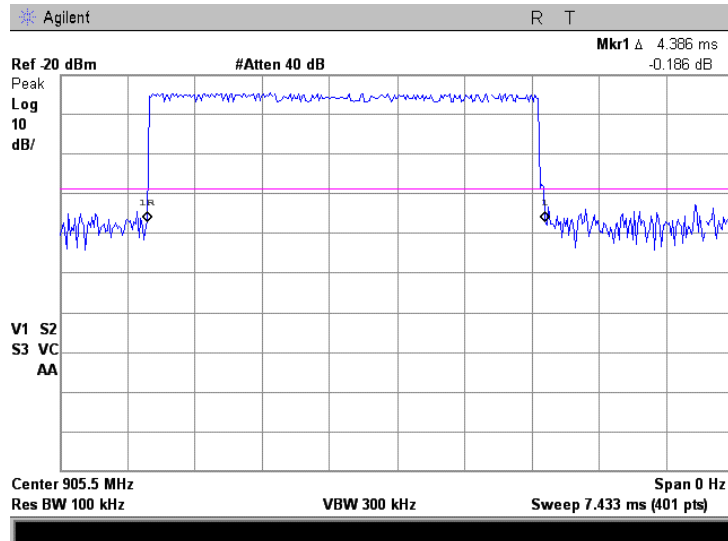

Plot 7.4.2 Single transmission period

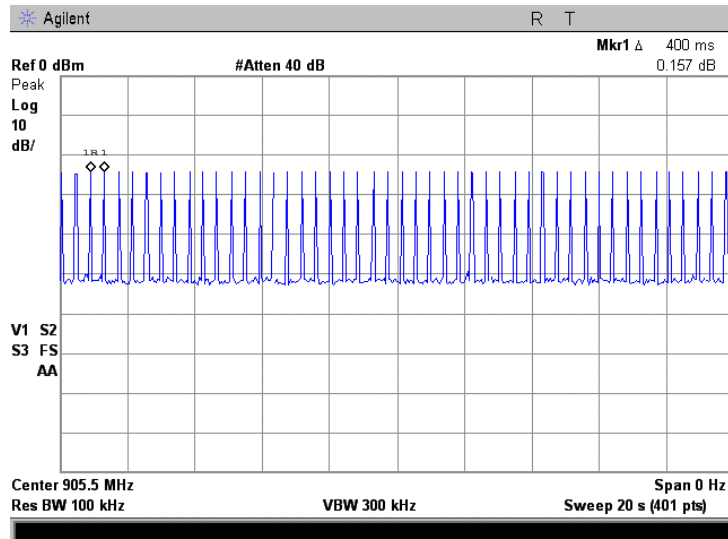

<b>Test specification:</b>		<b>Section 15.247(b), Peak output power</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/12/2010		
<b>Temperature:</b> 23.8 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 46 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7.5 Peak output power

### 7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	1.0	30.0	125.2	
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0 (<75 hopping channels)	122.2 (<75 hopping channels)	6.0*
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

\*- Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

\*\*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

### 7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.

<b>Test specification:</b>	<b>Section 15.247(b), Peak output power</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/12/2010		
<b>Temperature:</b> 23.8 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 46 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Figure 7.5.1 Setup for carrier field strength measurements

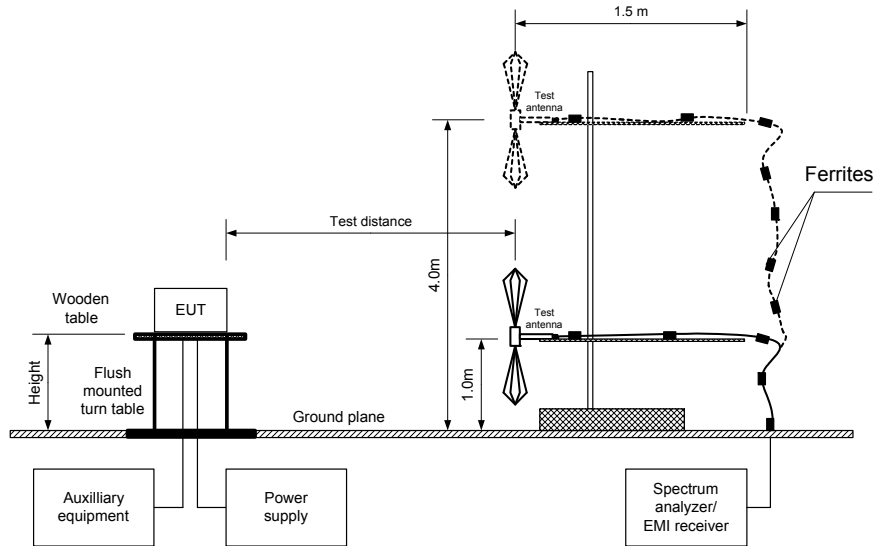

<b>Test specification:</b> Section 15.247(b), Peak output power	
<b>Test procedure:</b> Public notice DA 00-705	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/12/2010	
<b>Temperature:</b> 23.8 °C	<b>Air Pressure:</b> 1008 hPa
<b>Relative Humidity:</b> 46 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz  
TEST DISTANCE: 3 m  
TEST SITE: Semi anechoic chamber  
EUT HEIGHT: 0.8 m  
DETECTOR USED: Peak  
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)  
Double ridged guide (above 1000 MHz)  
MODULATION: FSK  
MODULATING SIGNAL: PRBS  
BIT RATE: 60 kbps  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
DETECTOR USED: Peak  
EUT 20 dB BANDWIDTH: 0.212 MHz  
RESOLUTION BANDWIDTH: 3 MHz  
VIDEO BANDWIDTH: 3 MHz  
FREQUENCY HOPPING: Disabled  
NUMBER OF FREQUENCY HOPPING CHANNELS: 54

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	limit, dBm	Margin, dB***	Verdict
905.55	126.52	Vert	1.0	247	3.0	28.29	30.0	-1.71	Pass
915.00	126.36	Vert	1.0	265	3.0	28.13	30.0	-1.87	Pass
924.75	127.55	Vert	1.0	291	3.0	29.32	30.0	-0.68	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\* - Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.23 dB*

\*\*\* - Margin = Peak output power – specification limit.


**Reference numbers of test equipment used**

HL 0521	HL 0604	HL 2871	HL 3618				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(b), Peak output power</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/12/2010		
<b>Temperature:</b> 23.8 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 46 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.5.1 Field strength of carrier at low frequency and Unom, vertical antenna polarization

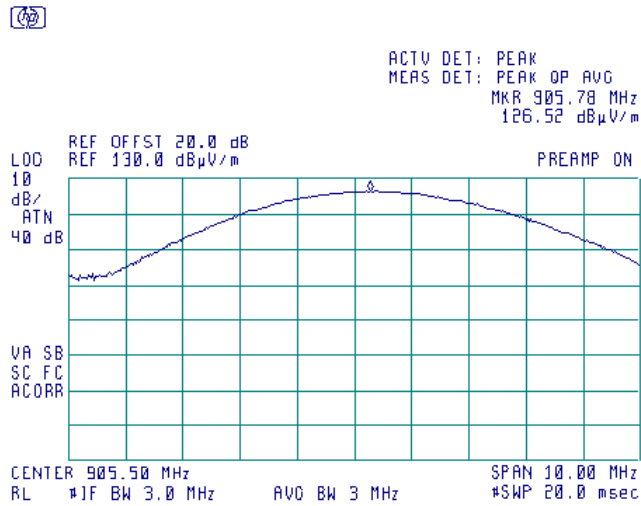


Plot 7.5.2 Peak output power at low frequency and Unom, horizontal antenna polarization

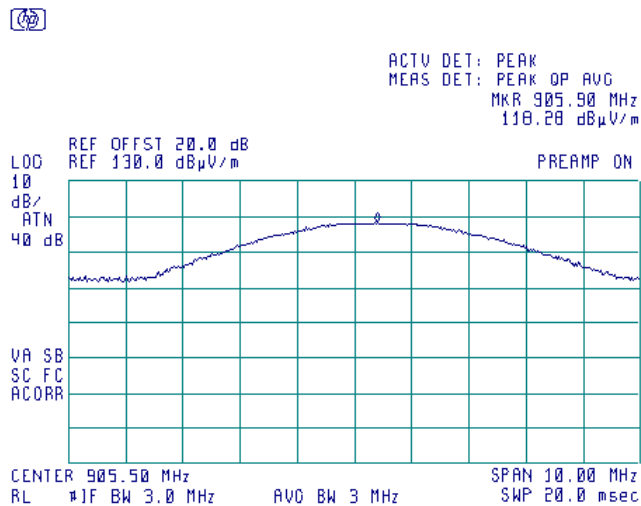


<b>Test specification:</b>	<b>Section 15.247(b), Peak output power</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/12/2010		
<b>Temperature:</b> 23.8 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 46 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.5.3 Field strength of carrier at mid frequency and Unom, vertical antenna polarization

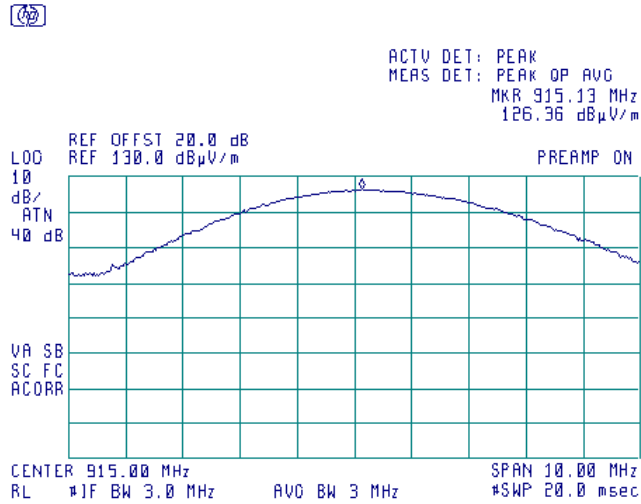


Plot 7.5.4 Field strength of carrier at mid frequency and Unom, horizontal antenna polarization

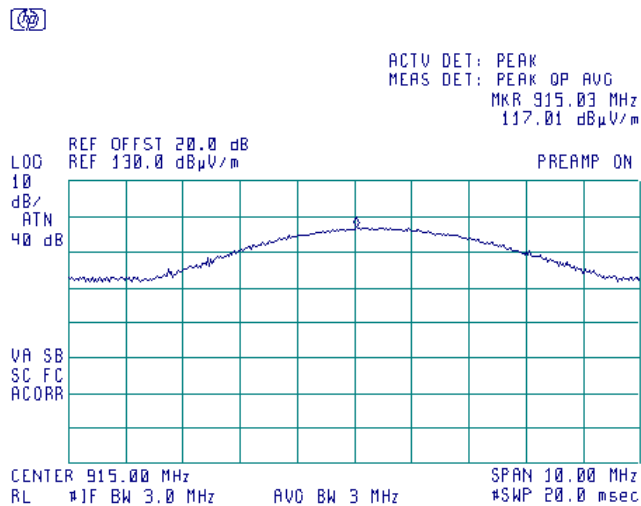


<b>Test specification:</b>	<b>Section 15.247(b), Peak output power</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/12/2010		
<b>Temperature:</b> 23.8 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 46 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.5.5 Field strength of carrier at high frequency and Unom, vertical antenna polarization

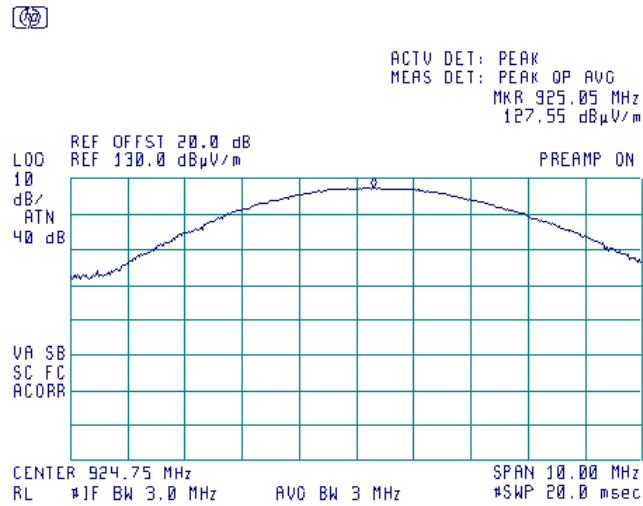

Plot 7.5.6 Peak output power at high frequency and Unom, horizontal antenna polarization

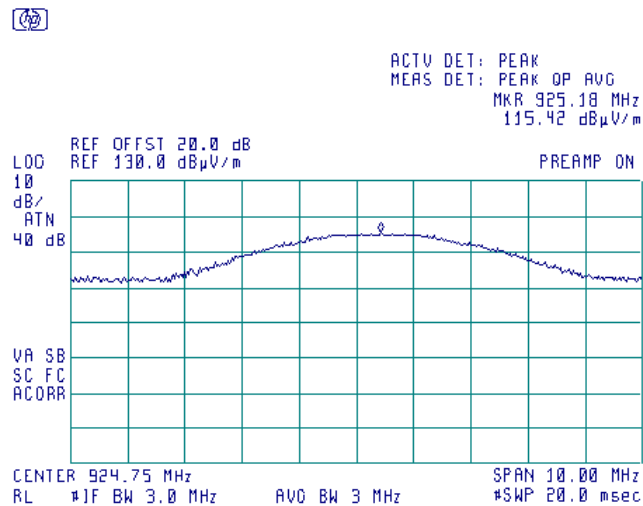

<b>Test specification:</b>	<b>Section 15.247(d), Emissions at band edges</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7.6 Band edge radiated emissions

### 7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB( $\mu$ V/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0
2400.0 – 2483.5			
5725.0 – 5850.0			

\* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

### 7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup







HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), Emissions at band edges</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Table 7.6.2 Band edge emission test results**

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz  
 DETECTOR USED: Peak  
 MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 RESOLUTION BANDWIDTH: ≥ 1% of the span  
 VIDEO BANDWIDTH: ≥ RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
<b>Frequency hopping disabled</b>						
905.190	71.00	93.76	22.76	20.0	2.76	Pass
925.040	67.43	90.83	23.40		3.40	
<b>Frequency hopping enabled</b>						
905.313	74.42	95.91	21.49	20.0	1.49	Pass
925.020	69.70	92.67	22.97		2.97	

\*- Margin = Attenuation below carrier – specification limit.


**Reference numbers of test equipment used**

HL 0337	HL 2909					
---------	---------	--	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b> Section 15.247(d), Emissions at band edges			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.6.1 The highest band edge emission at low carrier frequency with hopping function disabled

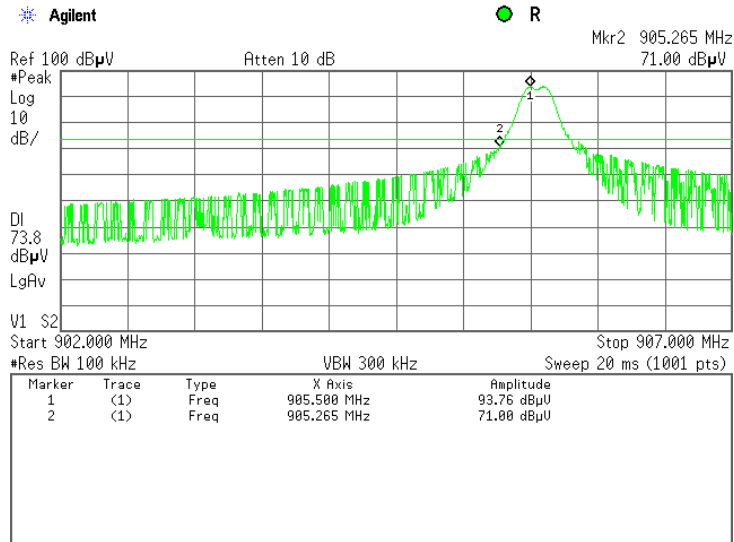


Plot 7.6.2 The highest band edge emission at high carrier frequency with hopping function disabled

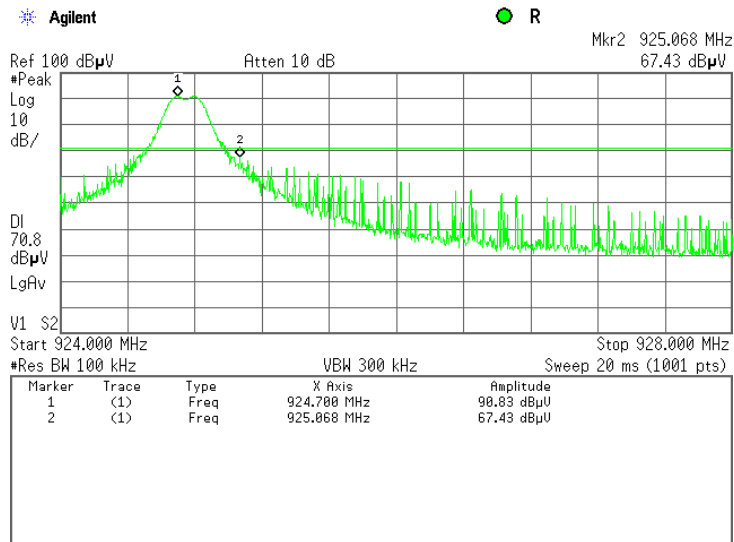


<b>Test specification:</b> Section 15.247(d), Emissions at band edges			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function enabled

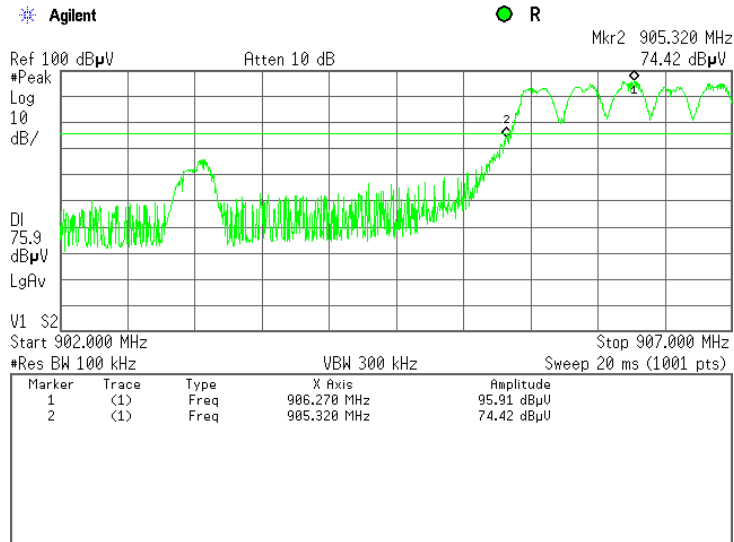

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function enabled

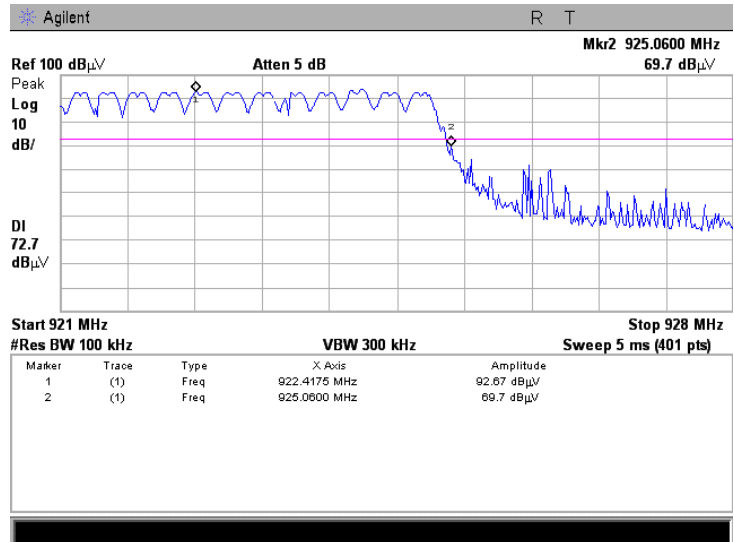

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7.7 Field strength of spurious emissions

### 7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m) <sup>***</sup>			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc <sup>***</sup>
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5 <sup>**</sup>	20.0
0.090 – 0.110	NA	108.5 – 106.8 <sup>**</sup>	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8 <sup>**</sup>	
0.490 – 1.705	NA	73.8 – 63.0 <sup>**</sup>	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0	

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:  

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


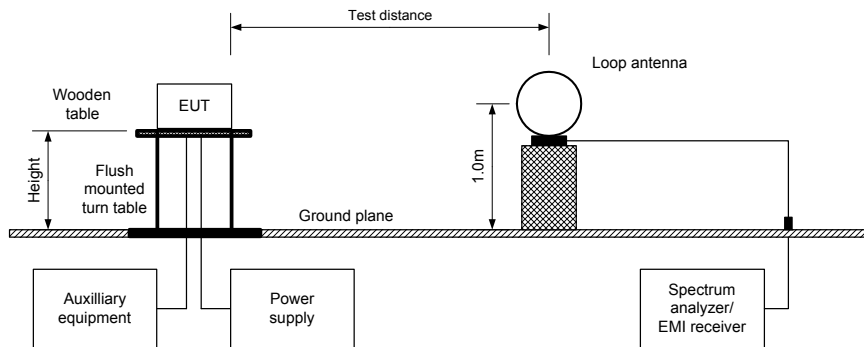


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz

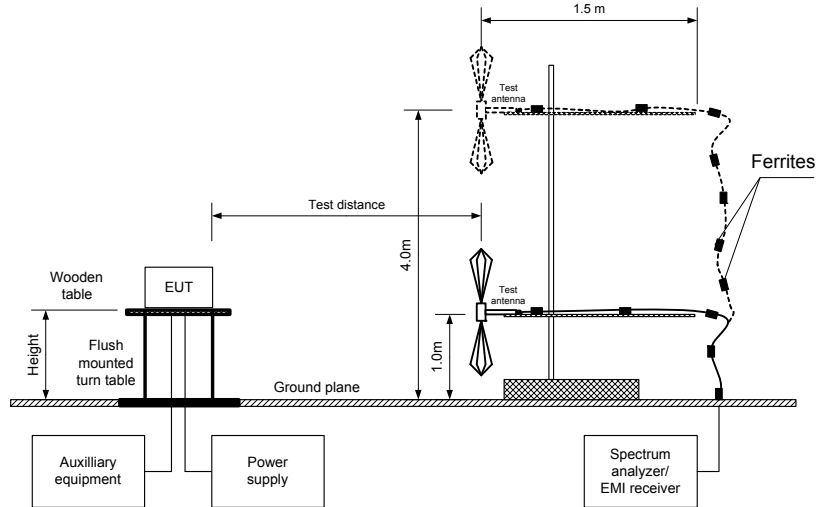

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Table 7.7.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 - 10000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: FHSS  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)  
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency</b>									
1811.010	74.77	Vert	1.2	124	117.37	42.60	20.0	22.60	Pass
<b>Mid carrier frequency</b>									
1829.894	74.60	Vert	1.2	127	115.60	41.00	20.0	21.00	Pass
5490.000	65.29	Vert	1.2	124	115.60	50.31	20.0	30.31	Pass
<b>High carrier frequency</b>									
1849.390	72.22	Vert	1.2	125	113.87	41.65	20.0	21.65	Pass
5548.500	65.04	Vert	1.2	123	113.87	48.83	20.0	28.83	Pass

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin = Attenuation below carrier – specification limit.

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz  
 INVESTIGATED FREQUENCY RANGE: 1000 - 9500 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: FHSS  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1000 kHz  
 TEST ANTENNA TYPE: Double ridged guide  
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna			Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m	Azimuth, degrees*	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
<b>Low carrier frequency</b>											
2716.78	Horizontal	1.4	0	67.36	74.00	-6.64	66.11	40.45	54.0	-13.55	Pass
3622.25	Vertical	1.0	345	66.40	74.00	-7.60	63.04	37.38	54.0	-16.62	
4527.83	Vertical	1.0	330	69.60	74.00	-4.40	67.62	41.96	54.0	-12.04	
5433.53	Horizontal	2.0	30	67.03	74.00	-6.97	64.12	38.46	54.0	-15.54	
7244.58	Horizontal	1.5	60	62.00	74.00	-12.00	59.67	34.01	54.0	-19.99	
<b>Mid carrier frequency</b>											
2745.13	Horizontal	1.4	5	66.78	74.00	-7.22	65	39.34	54.0	-14.66	Pass
3660.50	Vertical	2.1	0	64.92	74.00	-9.08	63.03	37.37	54.0	-16.63	
4575.23	Vertical	1.0	330	68.68	74.00	-5.32	66.34	40.68	54.0	-13.32	
5490.23	Vertical	1.4	20	65.29	74.00	-8.71	62.77	37.11	54.0	-16.89	
7320.13	Vertical	1.8	180	57.17	74.00	-16.83	53.33	27.67	54.0	-26.33	
<b>High carrier frequency</b>											
2774.45	Horizontal	1.4	0	65.83	74.00	-8.17	63.99	38.33	54.0	-15.67	Pass
3699.13	Vertical	1.0	340	65.47	74.00	-8.53	63.88	38.22	54.0	-15.78	
4623.90	Vertical	2.0	20	67.09	74.00	-6.91	65.71	40.05	54.0	-13.95	
5548.68	Vertical	1.5	20	65.84	74.00	-8.16	63.01	37.35	54.0	-16.65	
7398.20	Vertical	1.8	180	58.83	74.00	-15.17	56.5	30.84	54.0	-23.16	

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin = Measured field strength - specification limit.  
 \*\*\*- Margin = Calculated field strength - specification limit,  
 where Calculated field strength = Measured field strength + average factor.

**Table 7.7.4 Average factor calculation**

Transmission pulse		Average factor, dB
Duration, ms	Period, ms	
5.21	421.75	-25.66

\*- Average factor was calculated as follows  
 for pulse train shorter than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$   
 for pulse train longer than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: FHSS  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 FREQUENCY HOPPING: Disabled

Frequency MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB'				
<b>Low carrier frequency</b>								
960.000	55.60	44.0	46.0	-2.00	Vert	1.2	124	Pass
<b>Mid carrier frequency</b>								
960.000	56.30	45.10	46.0	-0.90	Vert	1.2	124	Pass
<b>High carrier frequency</b>								
960.000	49.00	44.60	46.0	-1.40	Vert	1.2	124	Pass

\*- Margin = Measured emission - specification limit.  
 \*\*- EUT front panel refer to 0 degrees position of turntable.



<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>			
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b>	Compliance	<b>Verdict:</b>		PASS	
<b>Date &amp; Time:</b>	8/22/2010				
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery		
<b>Remarks:</b>					

Table 7.7.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Harmonic distribution:

Harmonic #	Low carrier, MHz	Mid carrier, MHz	High carrier, MHz
1	905.55	915.00	924.75
2	1811.10	1830.00	1849.50
3	2716.65	2745.00	2774.25
4	3622.20	3660.00	3699.00
5	4527.75	4575.00	4623.75
6	5433.30	5490.00	5548.50
7	6338.85	6405.00	6473.25
8	7244.40	7320.00	7398.00
9	8149.95	8235.00	8322.75
10	9055.50	9150.00	9247.50

Legend:

Outside restricted band harmonic
Within restricted band harmonic

Reference numbers of test equipment used


HL 0446	HL 0521	HL 0604	HL 1984	HL 2870	HL 2871	HL 2909	HL 3384
HL 3618	HL 3818						

Full description is given in Appendix A.

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.1 Radiated emission measurements at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

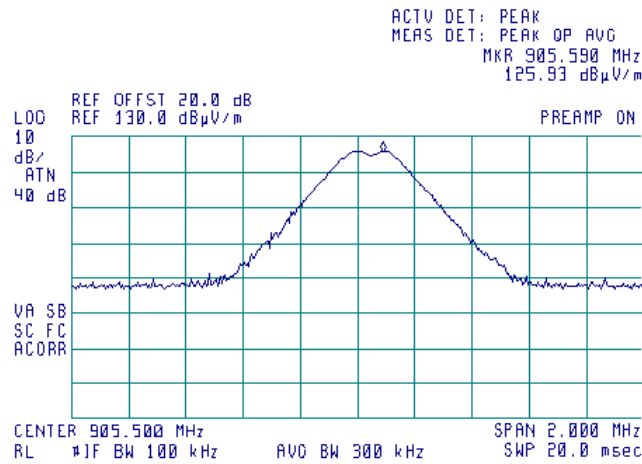

**Plot 7.7.2 Radiated emission measurements at the low carrier frequency**


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

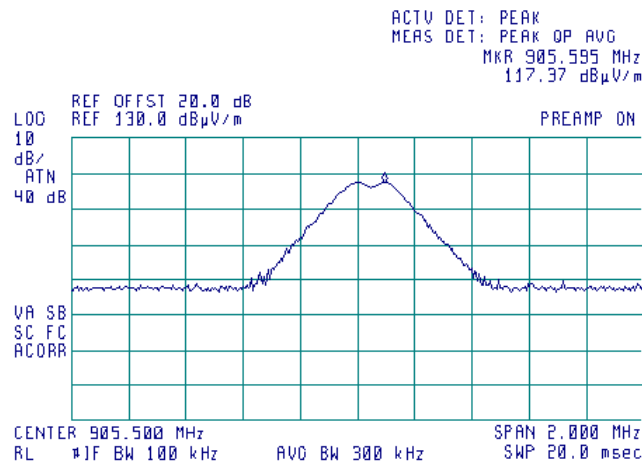

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.3 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

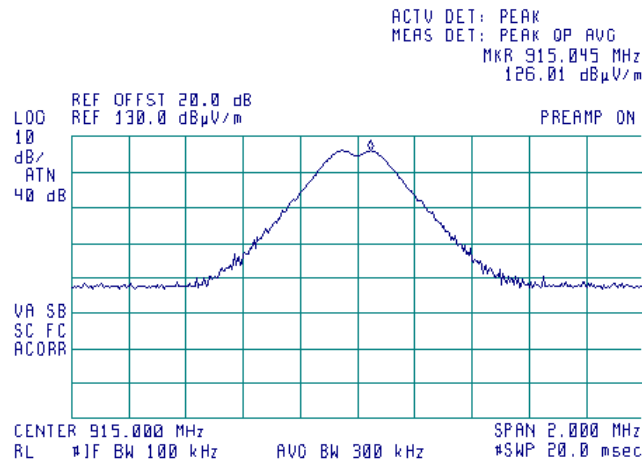

**Plot 7.7.4 Radiated emission measurements at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

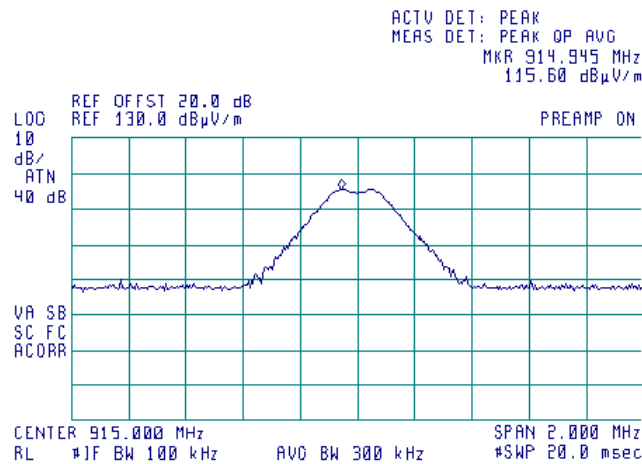

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.5 Radiated emission measurements at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

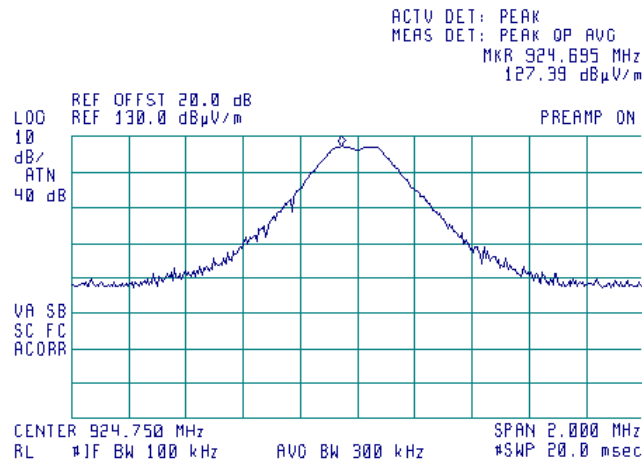

**Plot 7.7.6 Radiated emission measurements at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

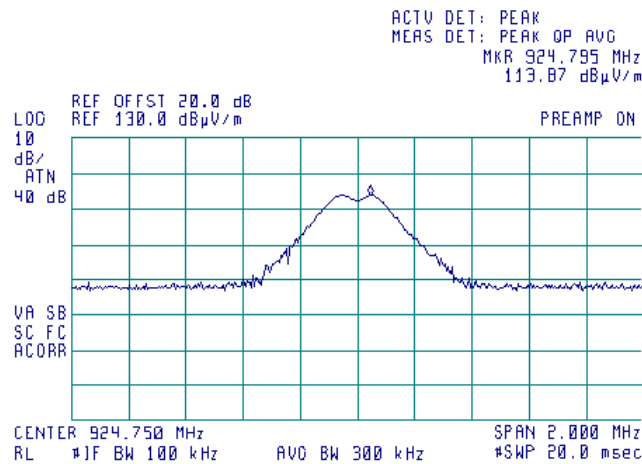

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.7.7 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
OPERATIONAL MODE: FHSS

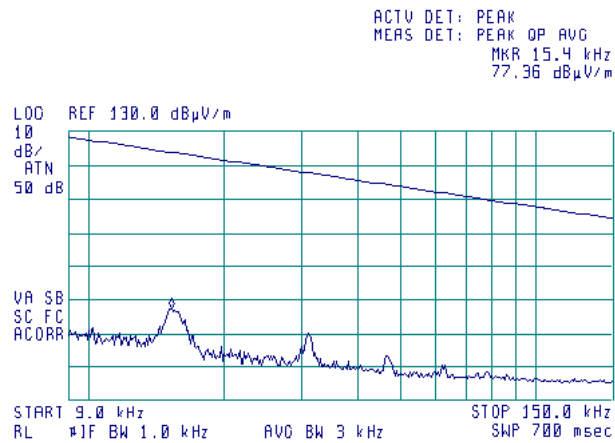

Plot 7.7.8 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
OPERATIONAL MODE: FHSS

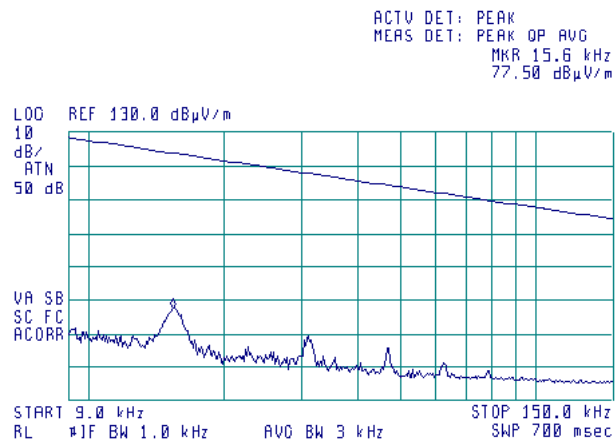

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.7.9 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
OPERATIONAL MODE: FHSS

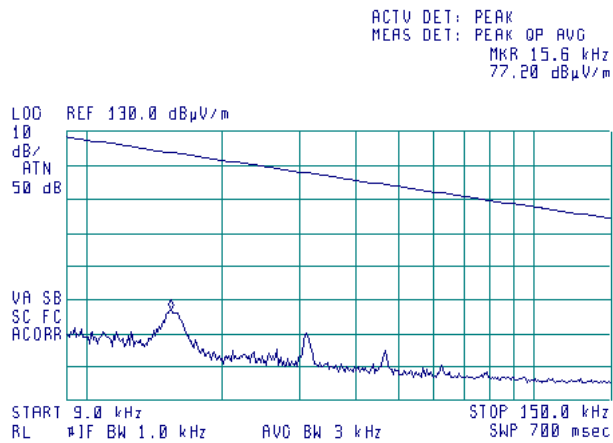

Plot 7.7.10 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
OPERATIONAL MODE: FHSS

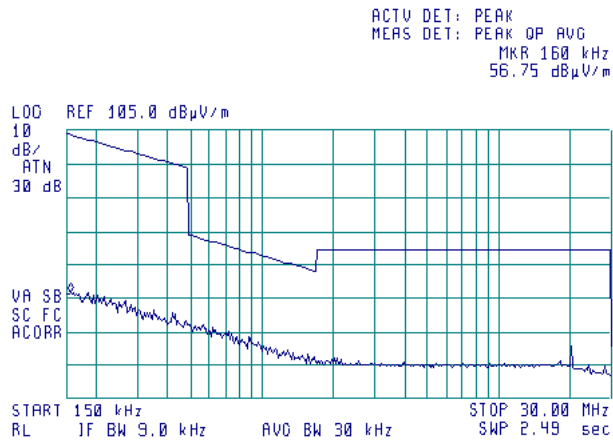

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.7.11 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
OPERATIONAL MODE: FHSS

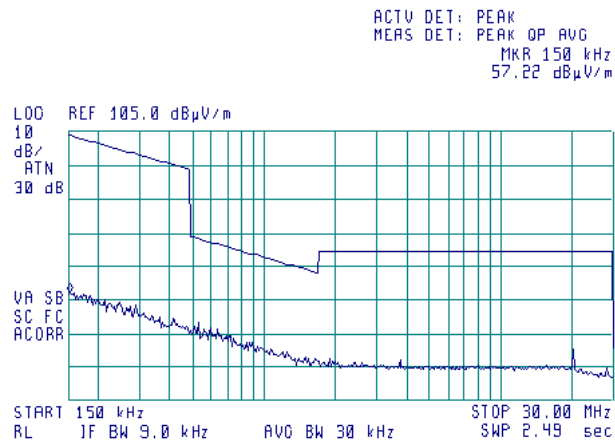

Plot 7.7.12 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
OPERATIONAL MODE: FHSS

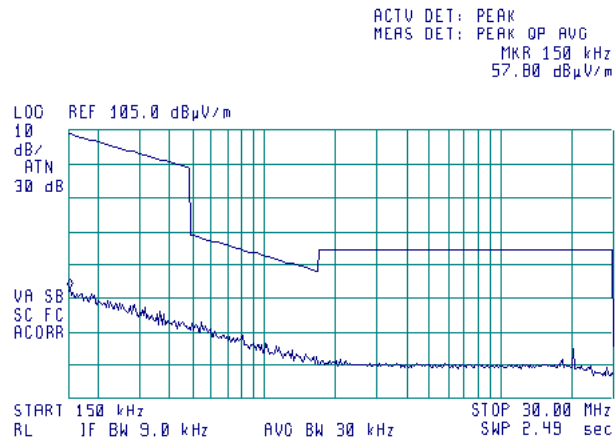

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.13 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
OPERATIONAL MODE: FHSS

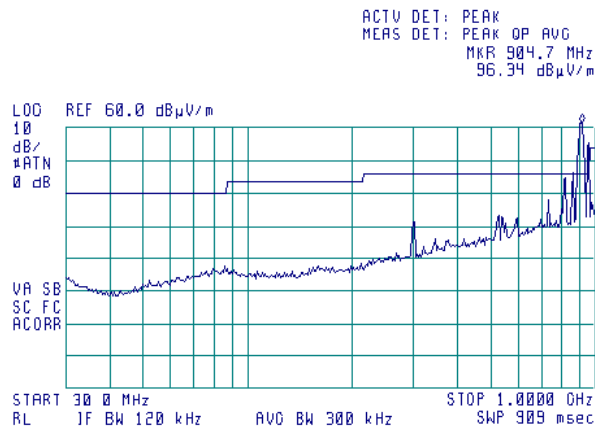

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 905.55 MHz

Plot 7.7.14 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
OPERATIONAL MODE: FHSS

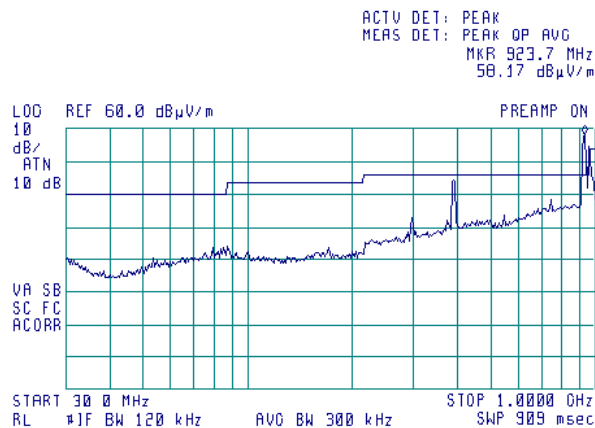


Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 915 MHz



<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.15 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 OPERATIONAL MODE: FHSS

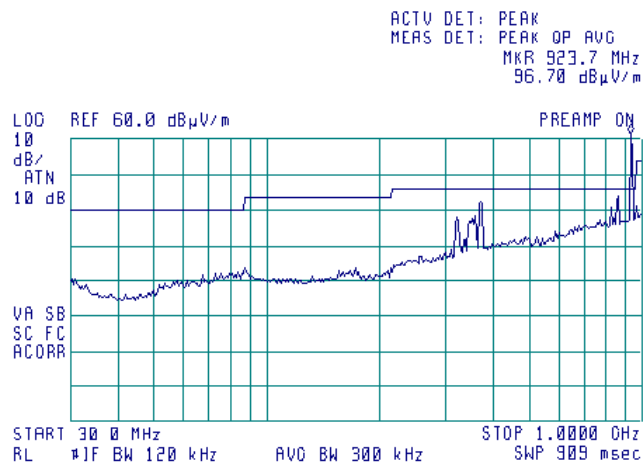

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 924.75 MHz

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.16 Radiated emission measurements from 1000 to 2500 MHz at the low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical and Horizontal

RBW 1 MHz, VBW 3MHz

RBW 1 MHz, VBW 30 kHz

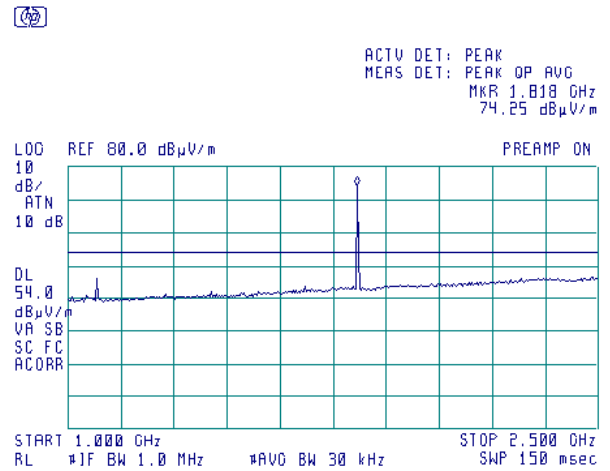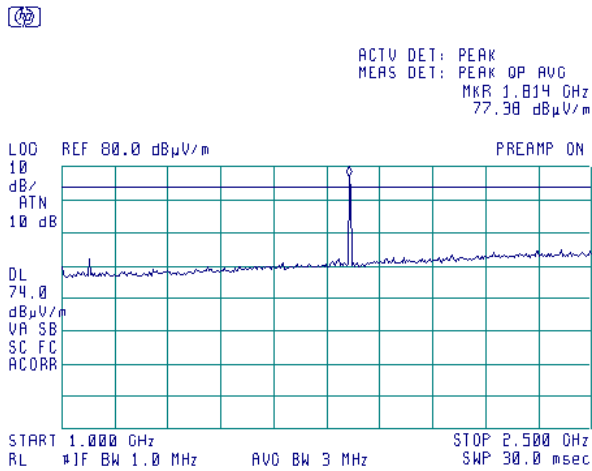


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.17 Radiated emission measurements from 1000 to 2500 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

RBW 1 MHz, VBW 3MHz

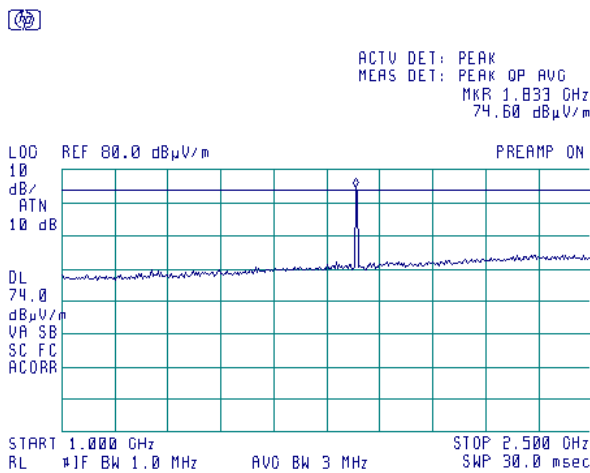


RBW 1 MHz, VBW 30 kHz

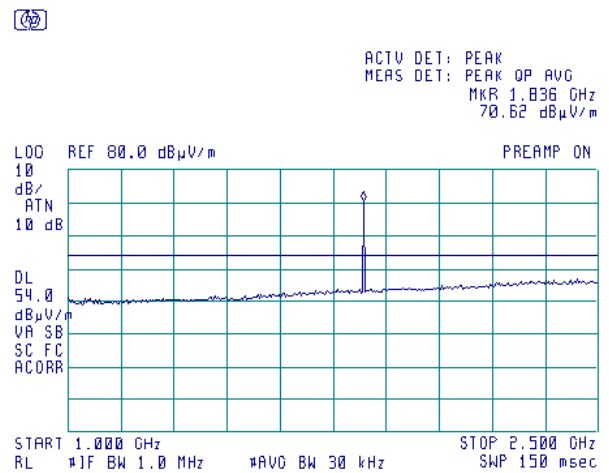


**Plot 7.7.18 Radiated emission measurements from 1000 to 2500 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

RBW 1 MHz, VBW 3MHz

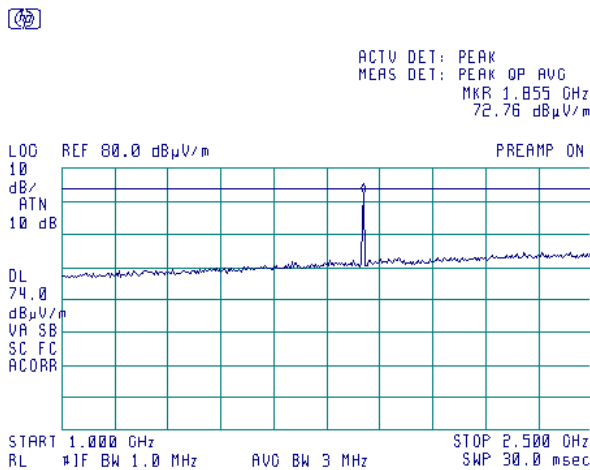

RBW 1 MHz, VBW 30 kHz

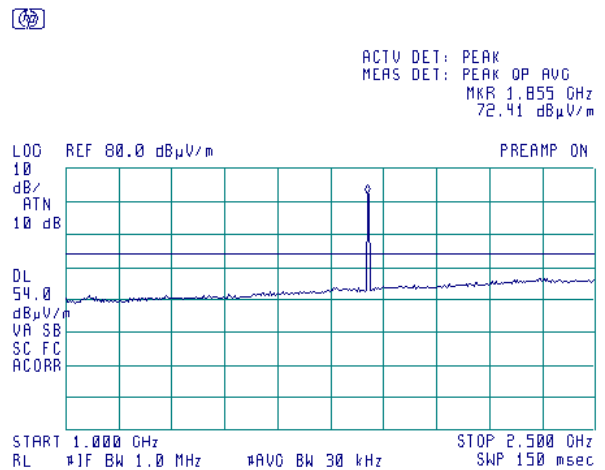


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.19 Radiated emission measurements from 2500 to 6500 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

RBW 1 MHz, VBW 3MHz

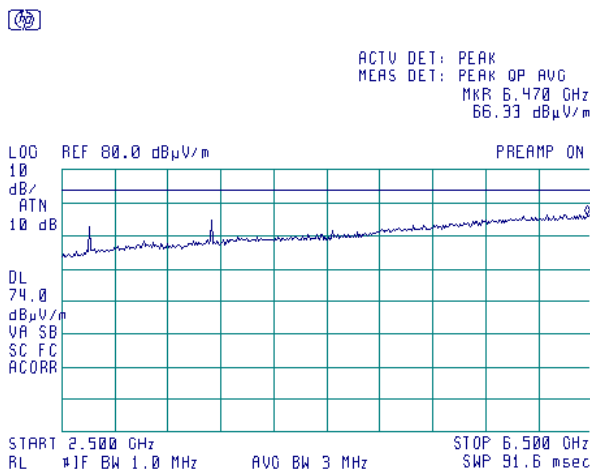


RBW 1 MHz, VBW 30 kHz

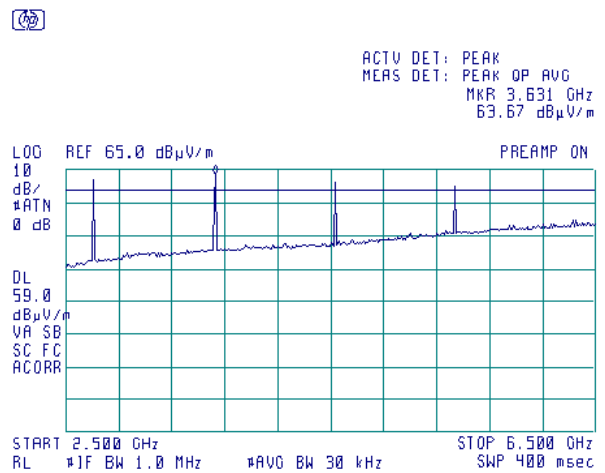


**Plot 7.7.20 Radiated emission measurements from 2500 to 6500 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

RBW 1 MHz, VBW 3MHz

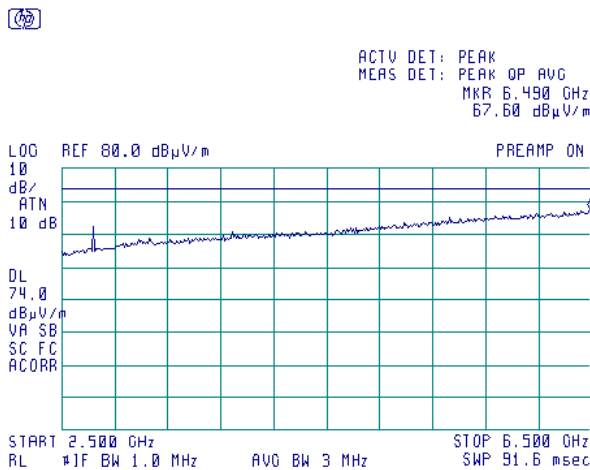

RBW 1 MHz, VBW 30 kHz

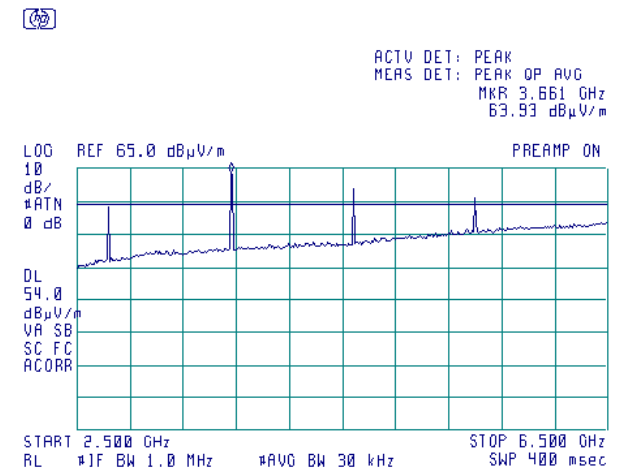

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.21 Radiated emission measurements from 2500 to 6500 MHz at the high carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical and Horizontal

RBW 1 MHz, VBW 3MHz


RBW 1 MHz, VBW 30 kHz

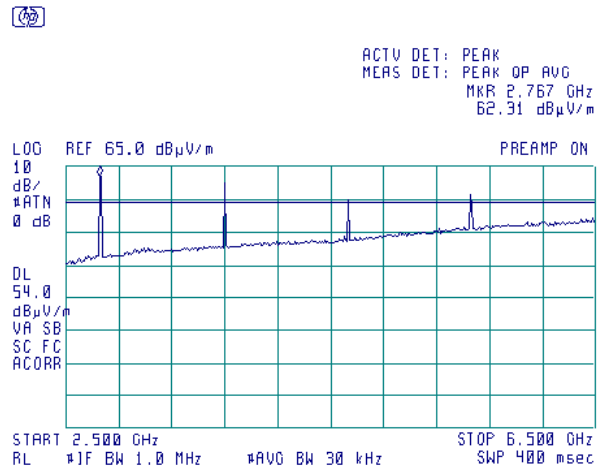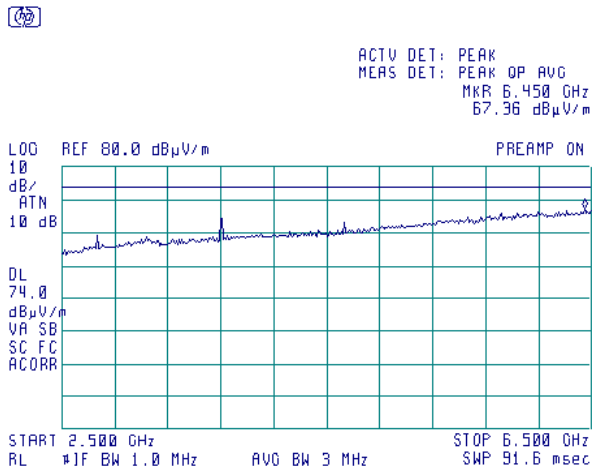

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.22 Radiated emission measurements from 6500 to 9500 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal

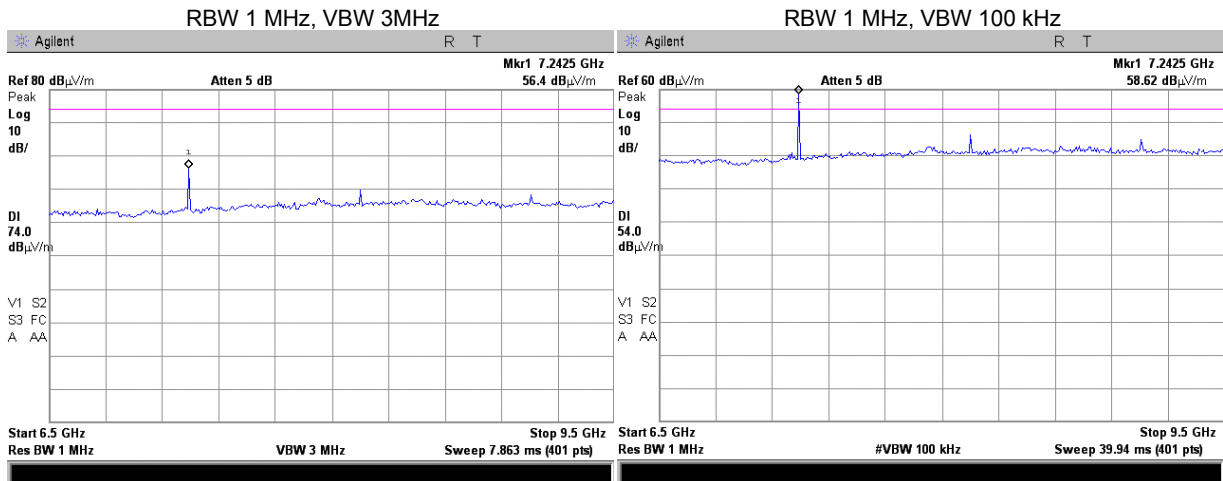

**Plot 7.7.23 Radiated emission measurements from 6500 to 9500 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal


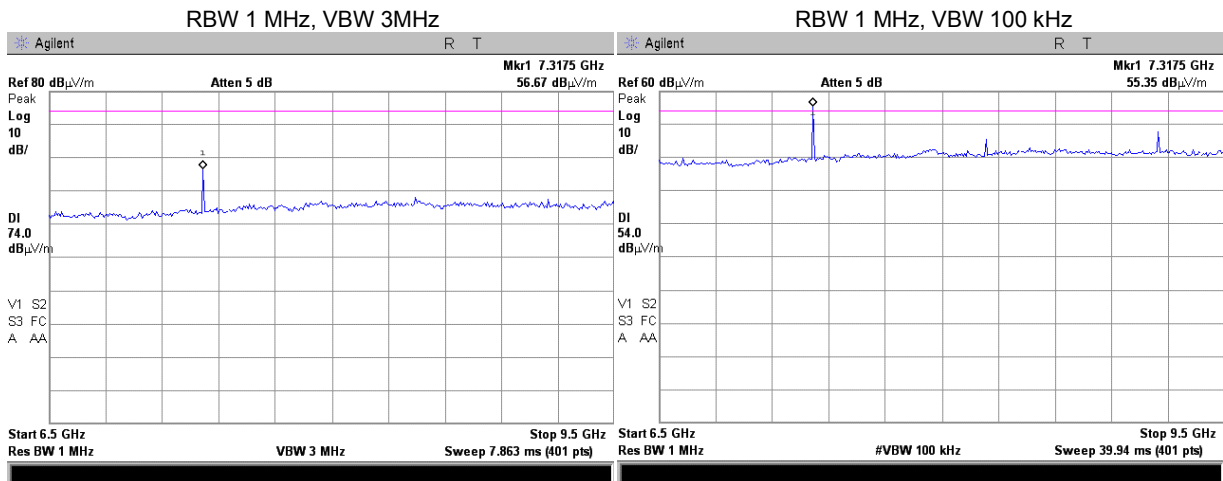


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Plot 7.7.24 Radiated emission measurements from 6500 to 9500 MHz at the high carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:


Semi anechoic chamber  
3 m  
Vertical and Horizontal

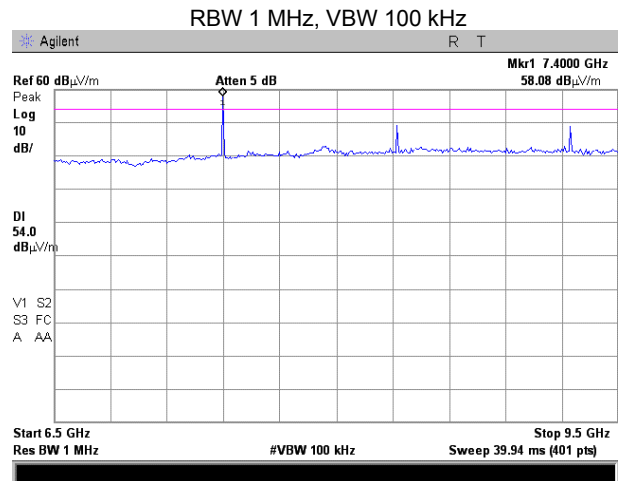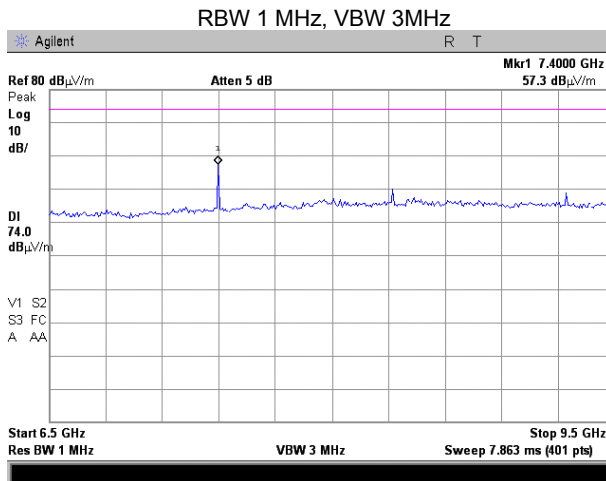

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.25 Radiated emission measurements at the second harmonic of low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

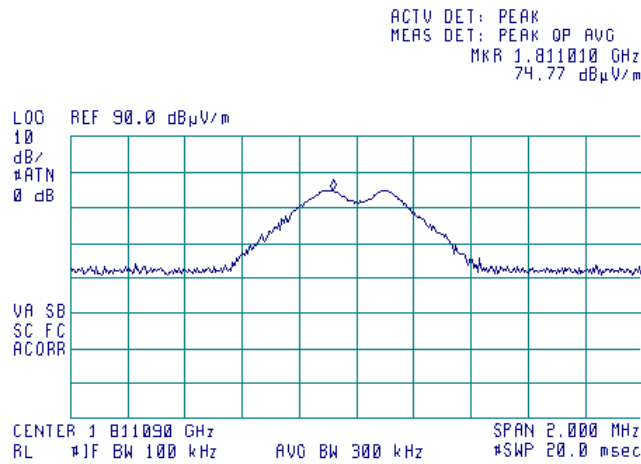

**Plot 7.7.26 Radiated emission measurements at the second harmonic of low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

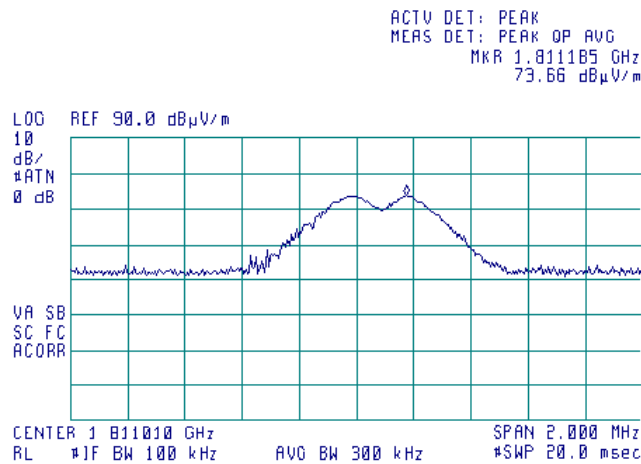




<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.27 Radiated emission measurements at the second harmonic of mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

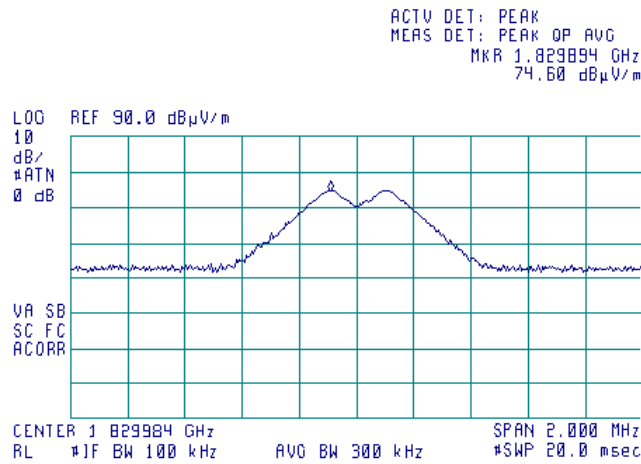

**Plot 7.7.28 Radiated emission measurements at the second harmonic of mid carrier frequency**


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

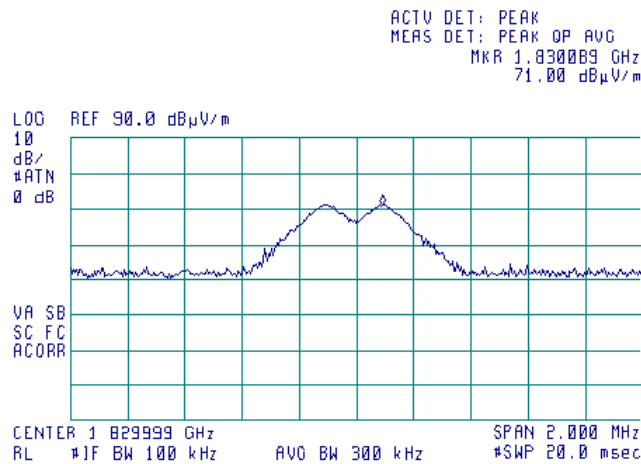

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.29 Radiated emission measurements at the second harmonic of high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

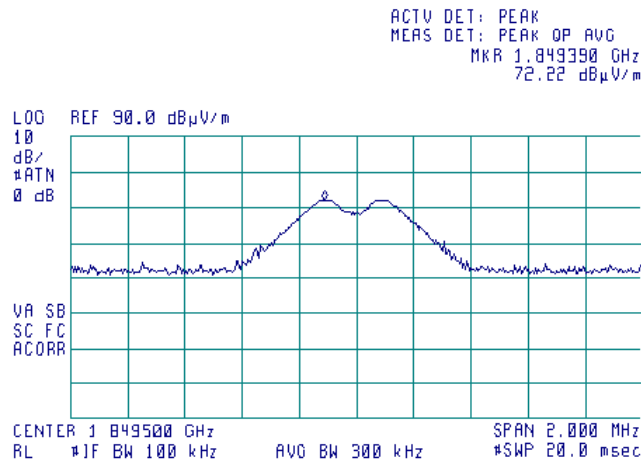

**Plot 7.7.30 Radiated emission measurements at the second harmonic of high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

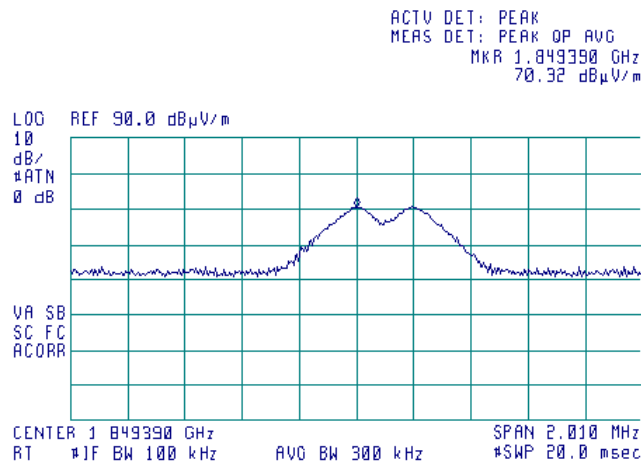


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.7.31 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

RBW 1 MHz, VBW 3MHz

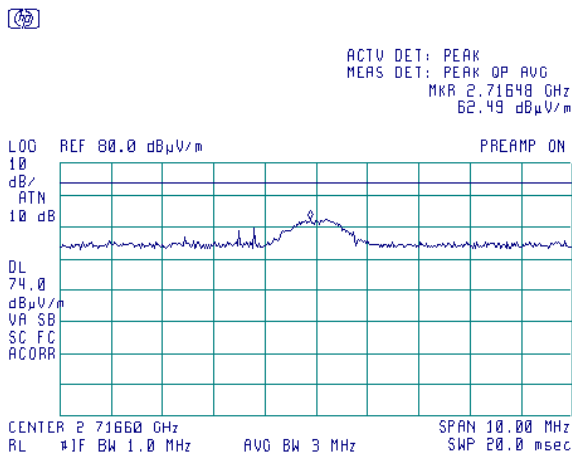


RBW 1 MHz, VBW 30 kHz

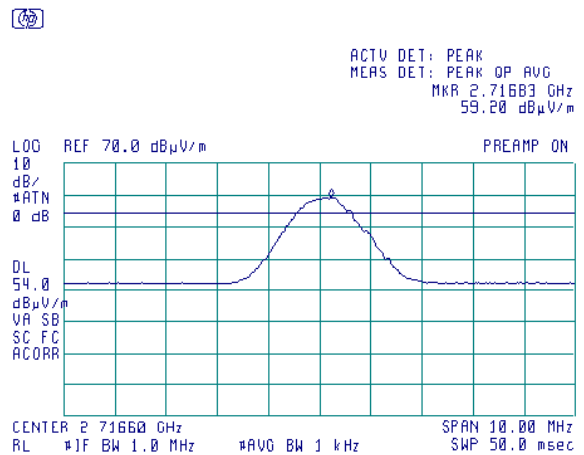


Plot 7.7.32 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

RBW 1 MHz, VBW 3MHz

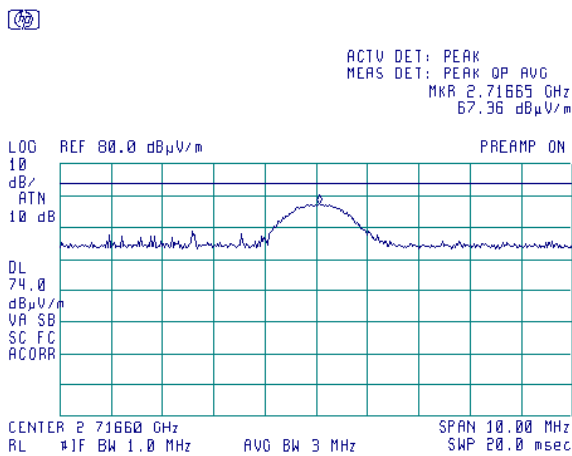

RBW 1 MHz, VBW 1 kHz

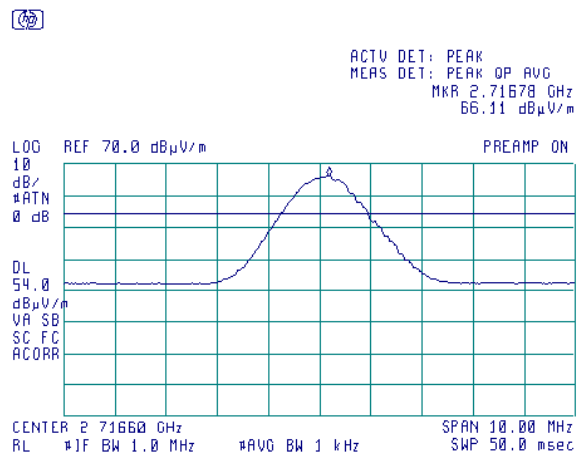


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.33 Radiated emission measurements at the third harmonic of mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

RBW 1 MHz, VBW 3MHz

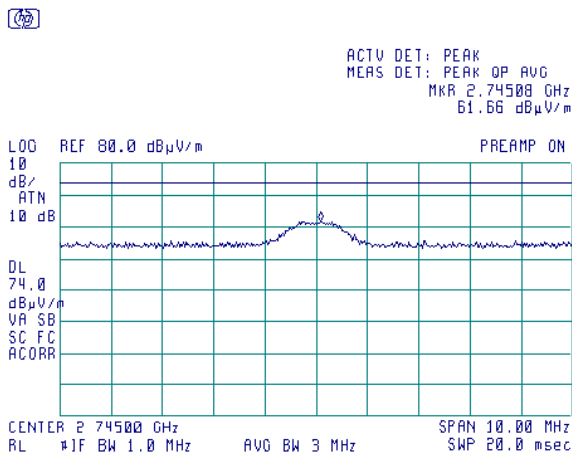


RBW 1 MHz, VBW 30 kHz

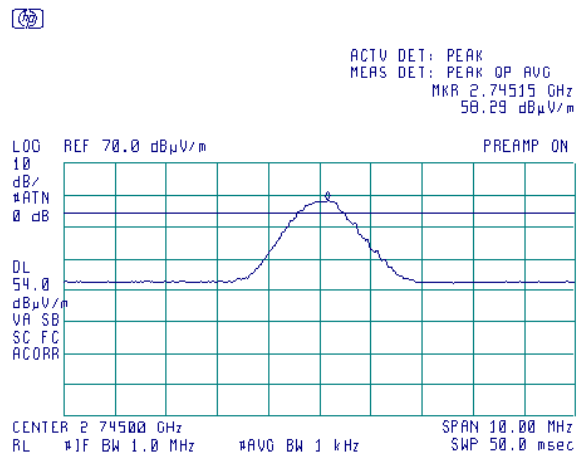


**Plot 7.7.34 Radiated emission measurements at the third harmonic of mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

RBW 1 MHz, VBW 3MHz

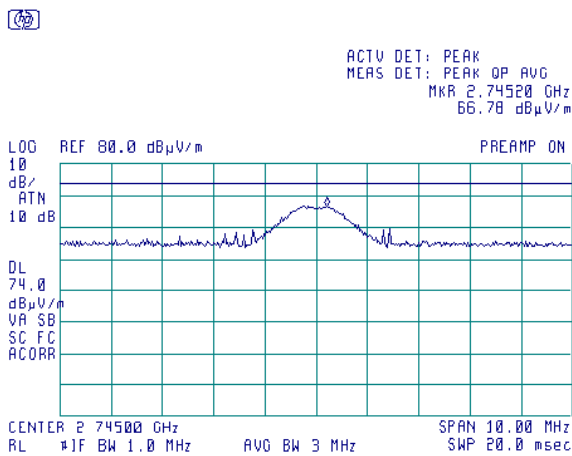

RBW 1 MHz, VBW 30 kHz

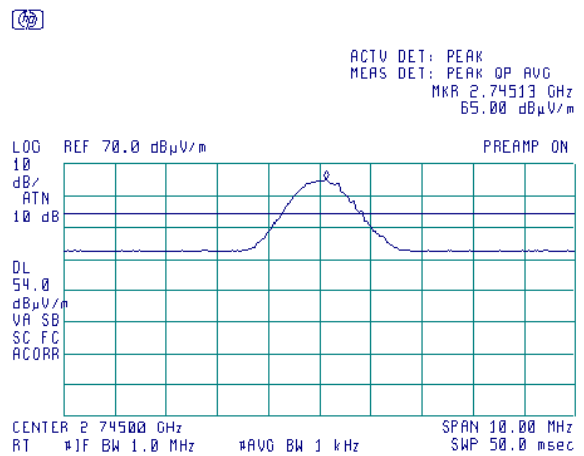


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.7.35 Radiated emission measurements at the third harmonic of high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

RBW 1 MHz, VBW 3MHz

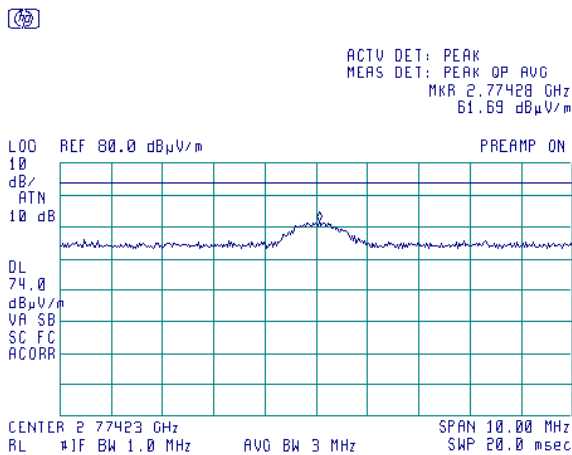


RBW 1 MHz, VBW 30 kHz

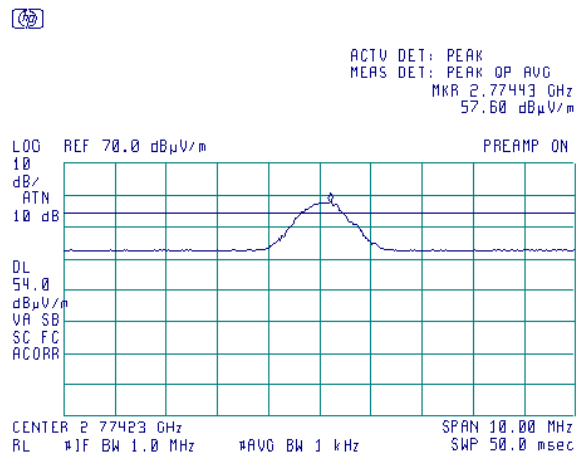


**Plot 7.7.36 Radiated emission measurements at the third harmonic of high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

RBW 1 MHz,VBW 3MHz

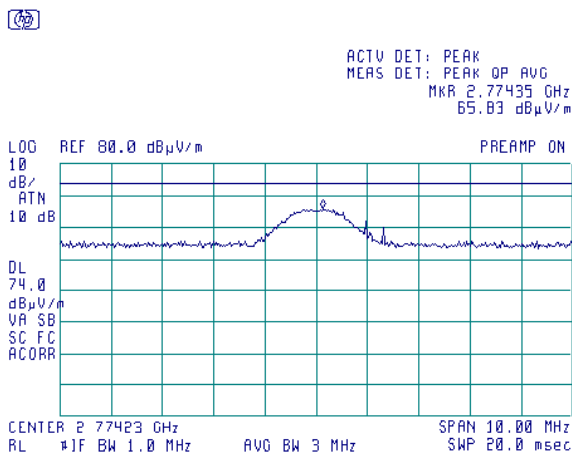

RBW 1 MHz, VBW 30 kHz

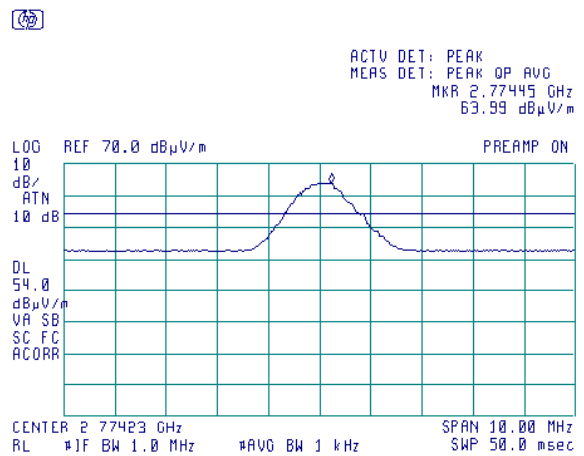

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.37 Radiated emission measurements at the fourth harmonic of low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

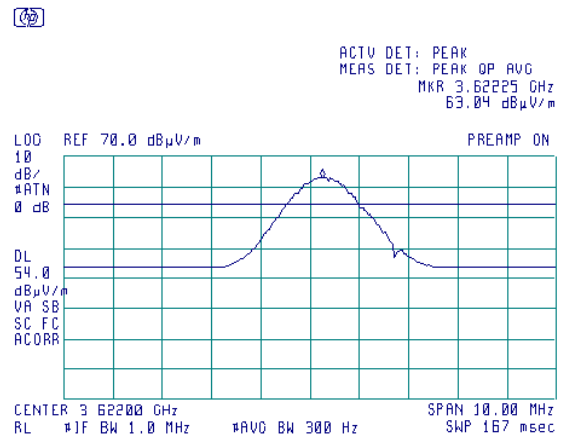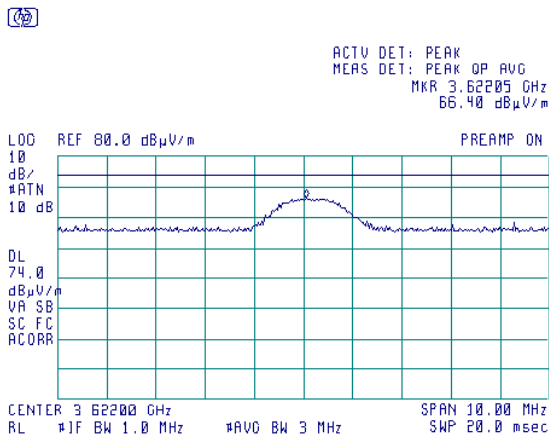



**Plot 7.7.38 Radiated emission measurements at the fourth harmonic of low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

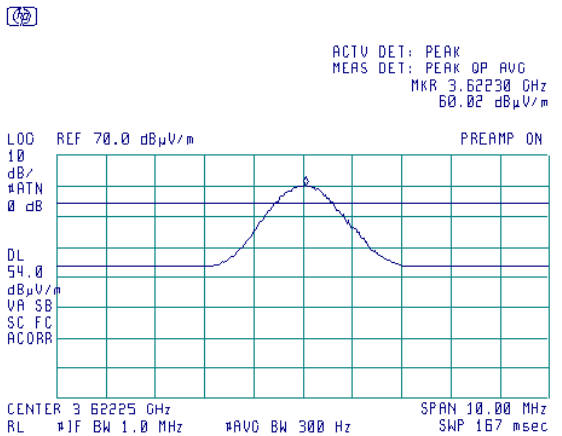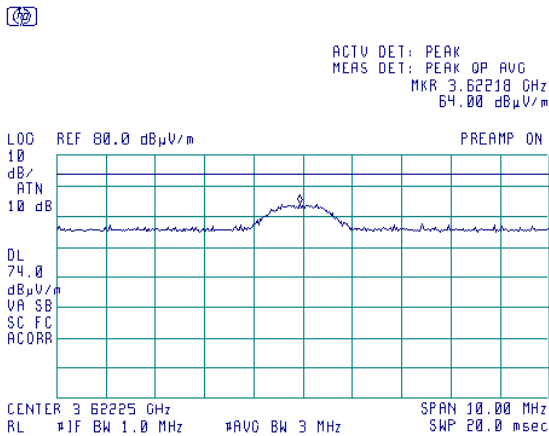

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.39 Radiated emission measurements at the fourth harmonic of mid carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

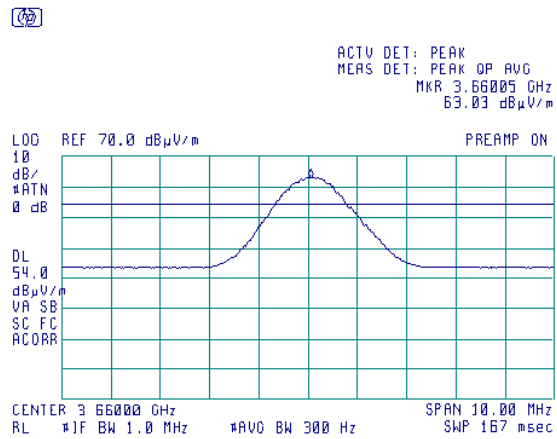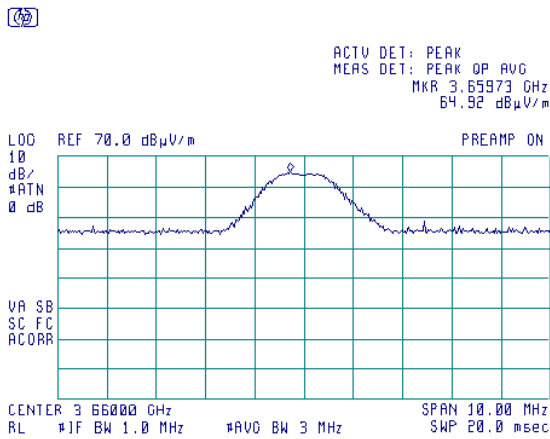



**Plot 7.7.40 Radiated emission measurements at the fourth harmonic of mid carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

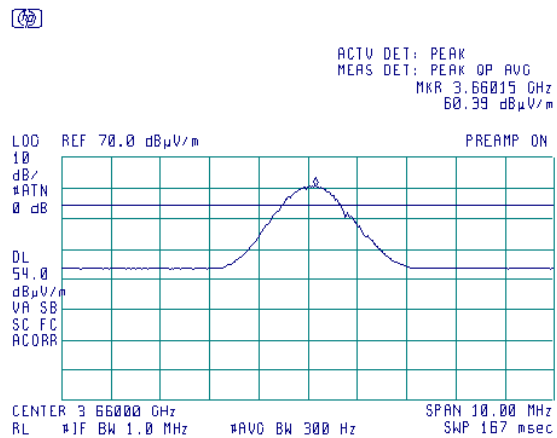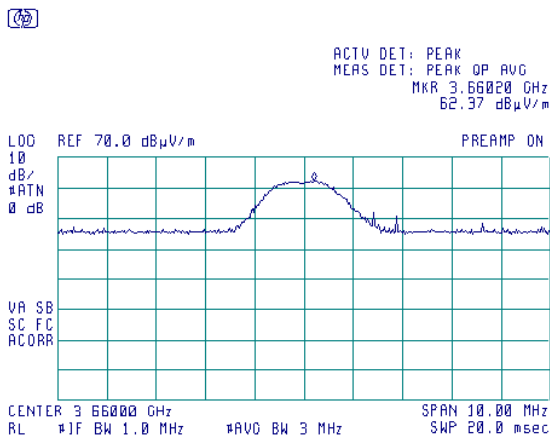


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.41 Radiated emission measurements at the fourth harmonic of high carrier frequency


TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

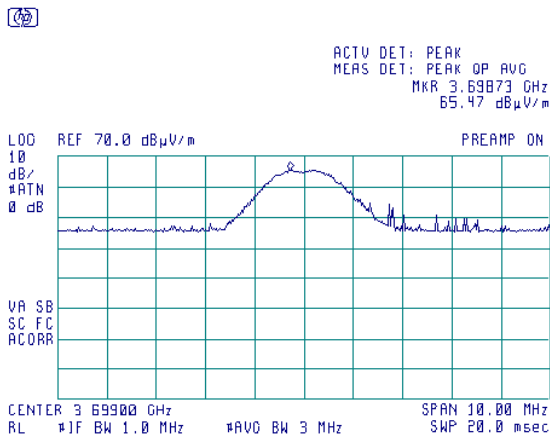

RBW 1MHz, VBW 300Hz

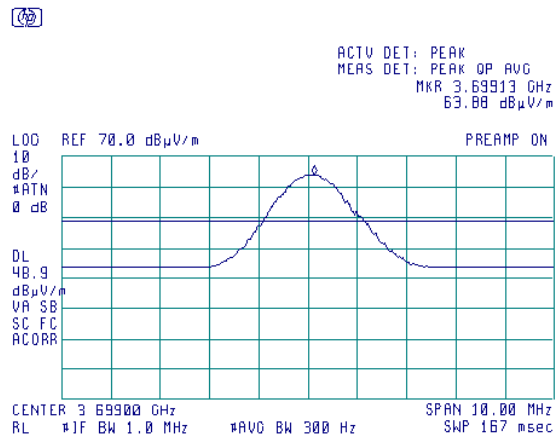


Plot 7.7.42 Radiated emission measurements at the fourth harmonic of high carrier frequency


TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

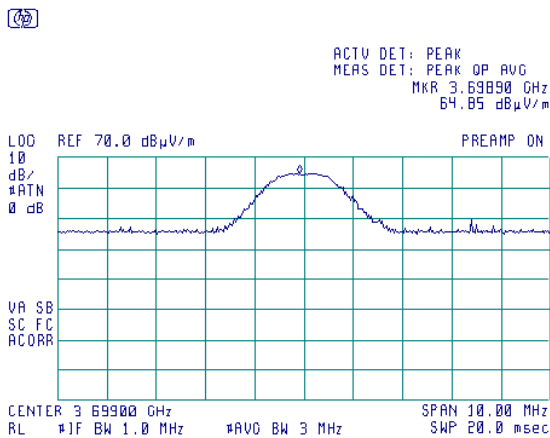

RBW 1MHz, VBW 300Hz

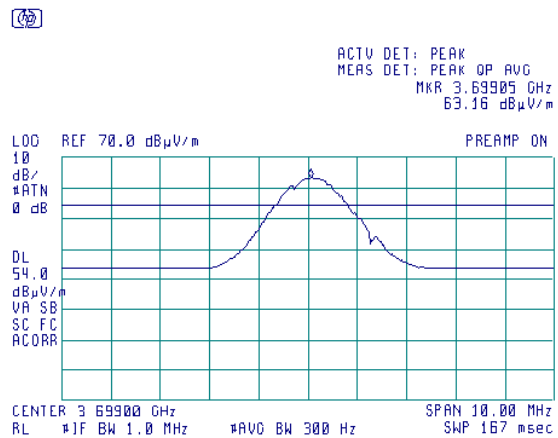



<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.43 Radiated emission measurements at the fifth harmonic of low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

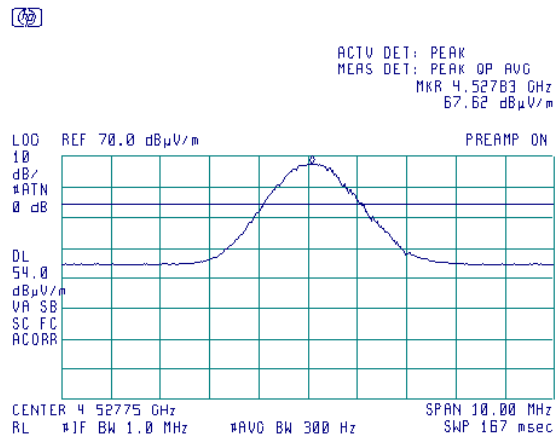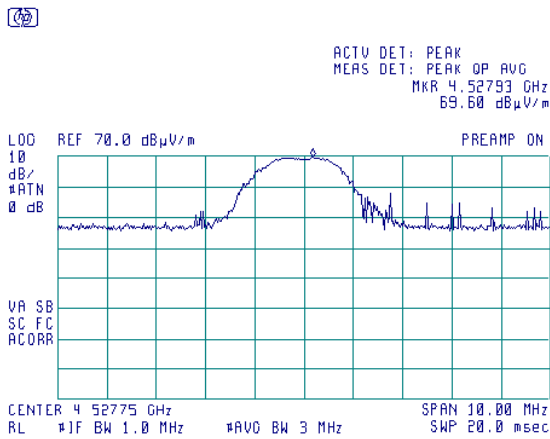



**Plot 7.7.44 Radiated emission measurements at the fifth harmonic of low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

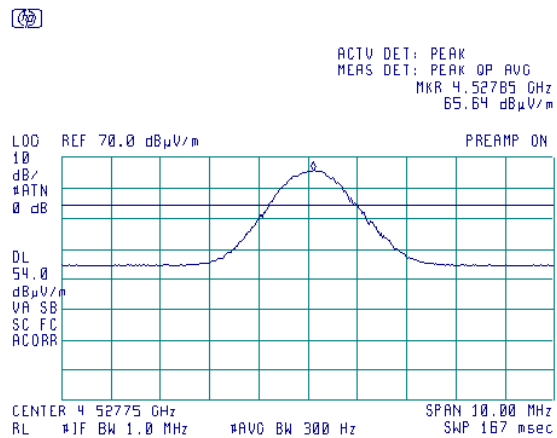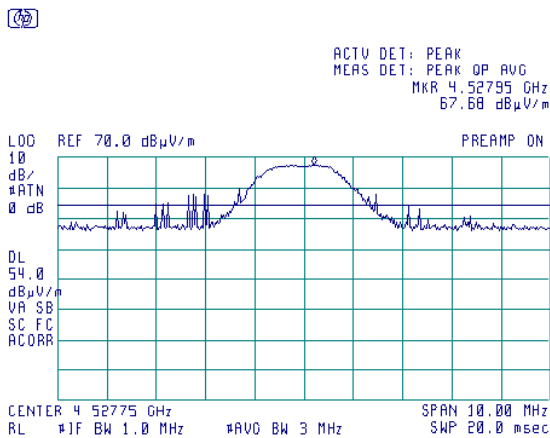

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.45 Radiated emission measurements at the fifth harmonic of mid carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

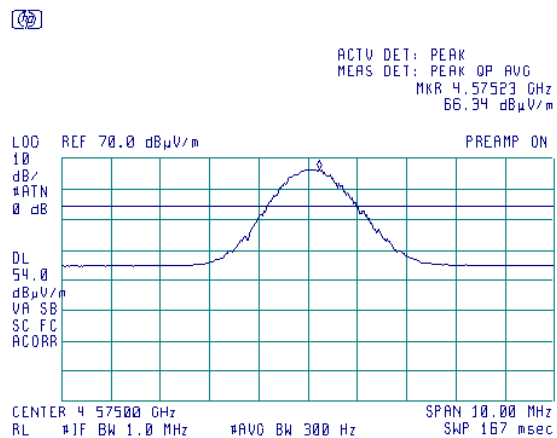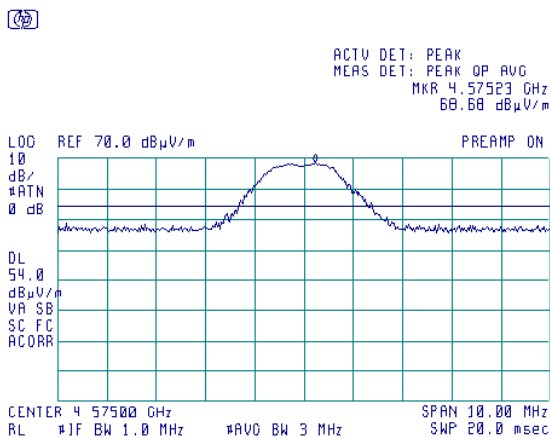



**Plot 7.7.46 Radiated emission measurements at the fifth harmonic of mid carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

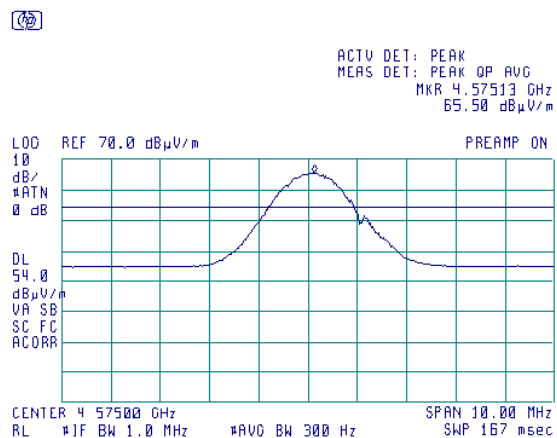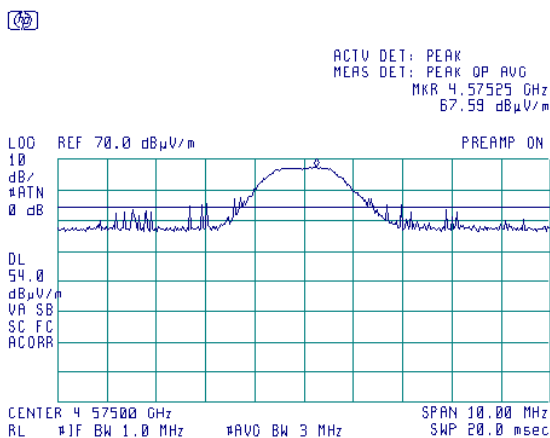

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.47 Radiated emission measurements at the fifth harmonic of high carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

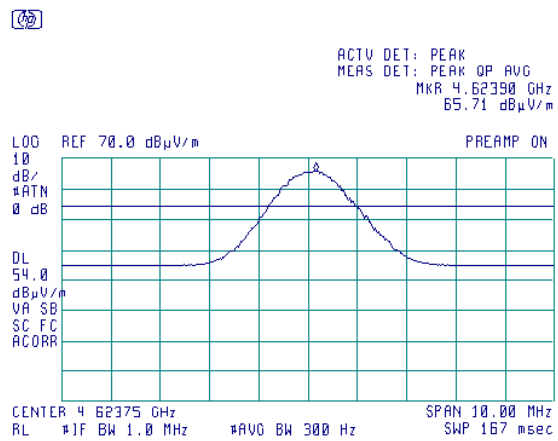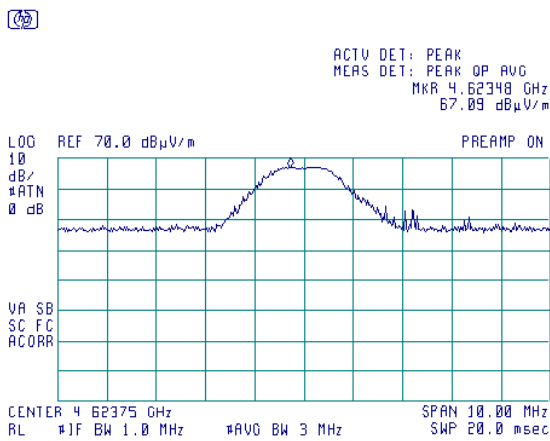



**Plot 7.7.48 Radiated emission measurements at the fifth harmonic of high carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

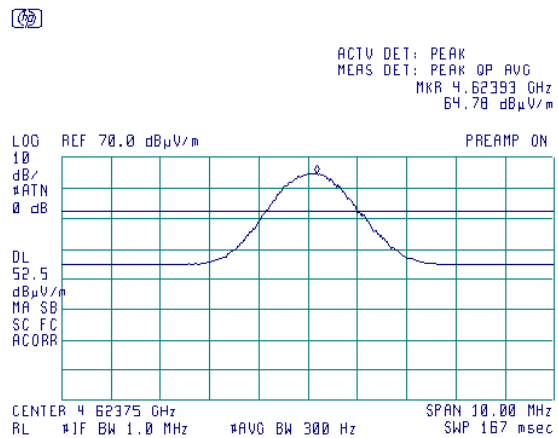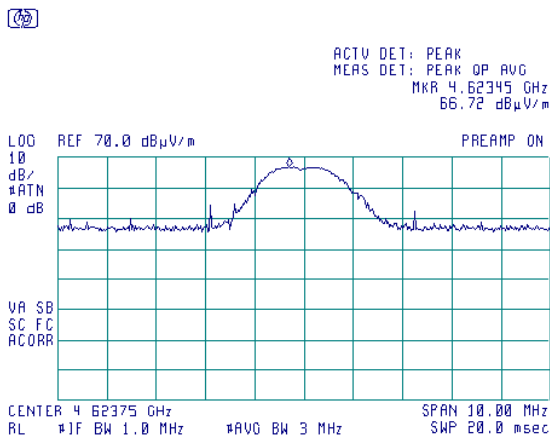

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.49 Radiated emission measurements at the sixth harmonic of low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

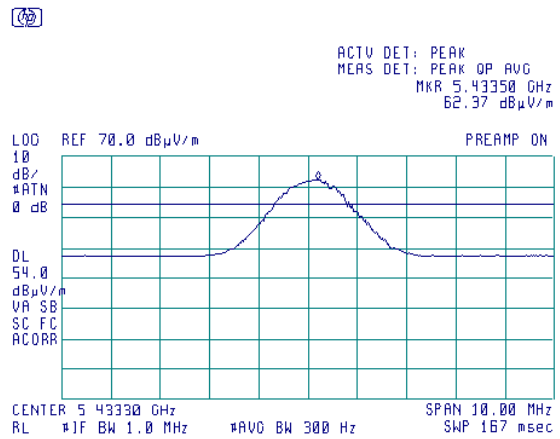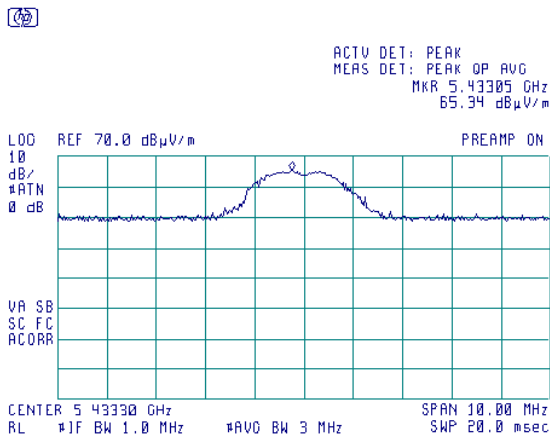



**Plot 7.7.50 Radiated emission measurements at the sixth harmonic of low carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

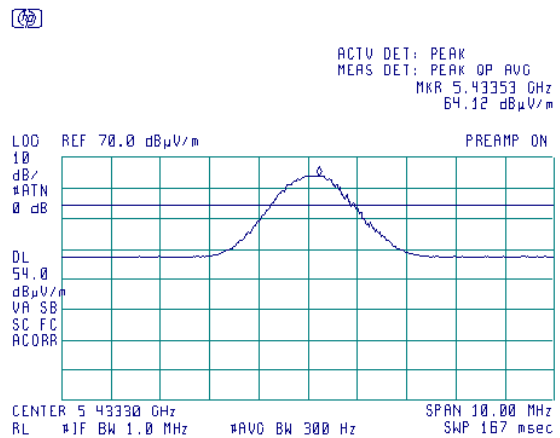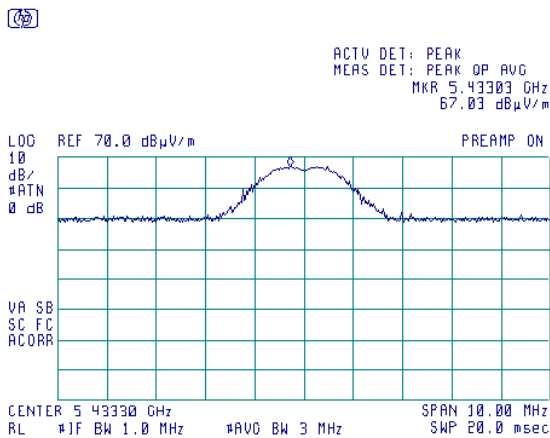



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



Plot 7.7.51 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

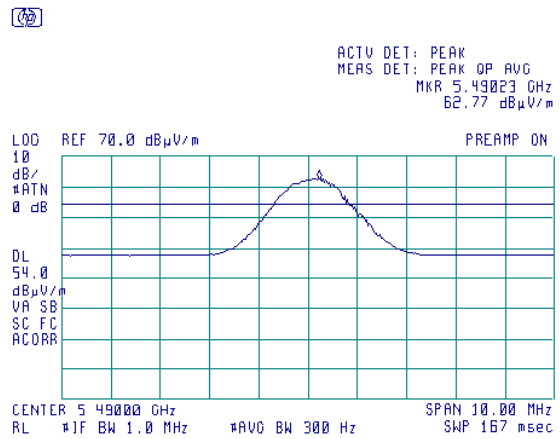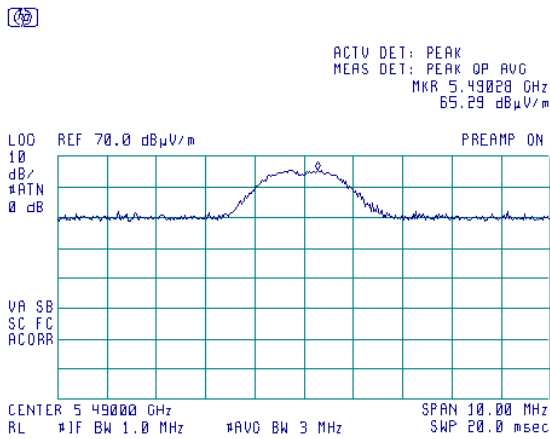



Plot 7.7.52 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

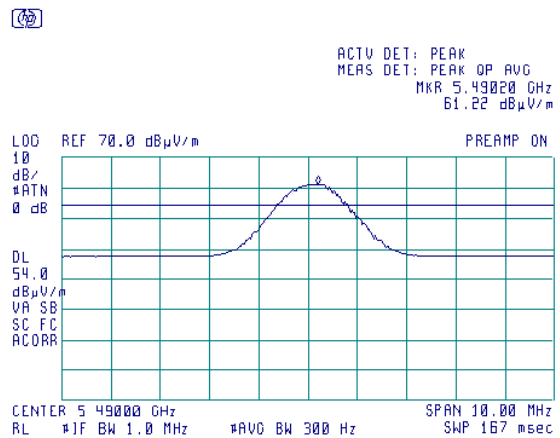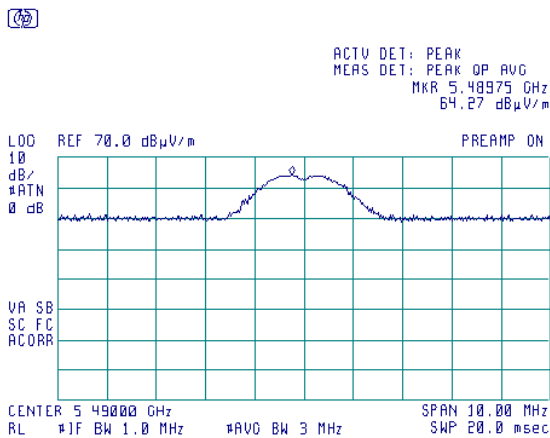



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



Plot 7.7.53 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

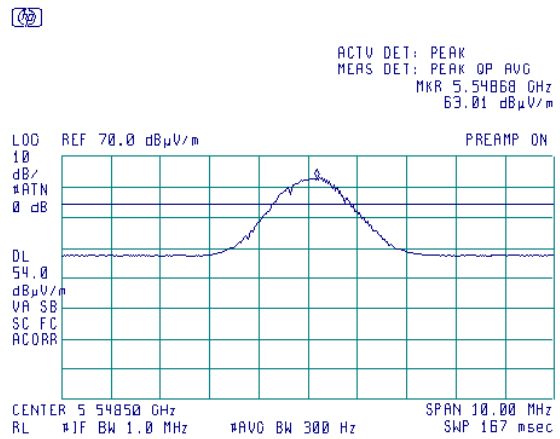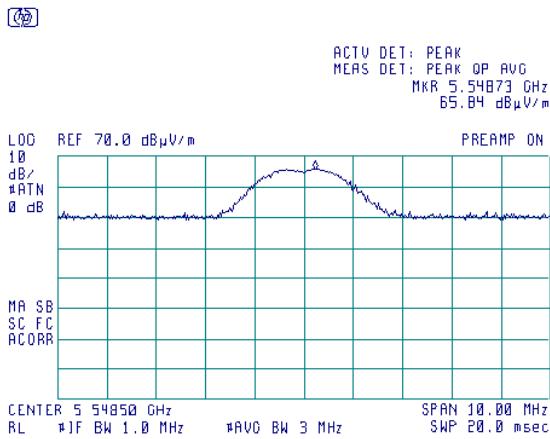



Plot 7.7.54 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

RBW 1MHz,VBW 3MHz

RBW 1MHz, VBW 300Hz

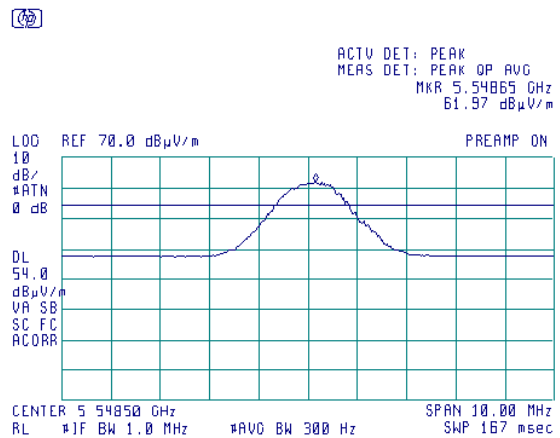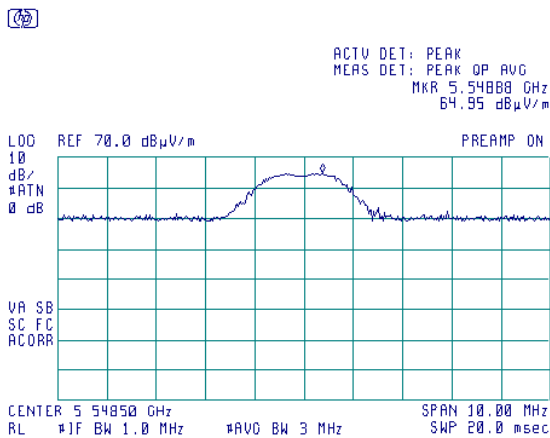



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



Plot 7.7.55 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

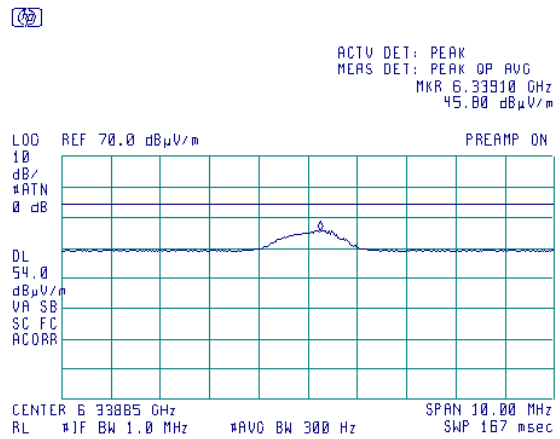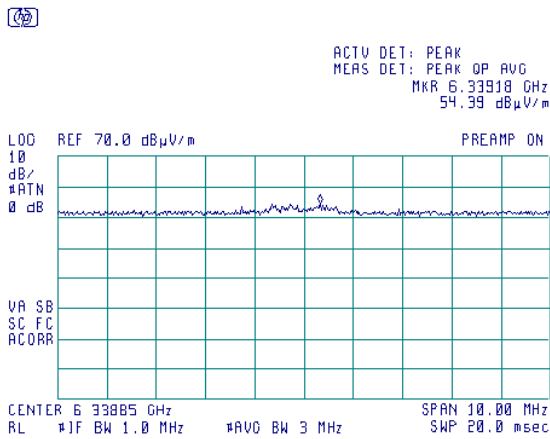



Plot 7.7.56 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

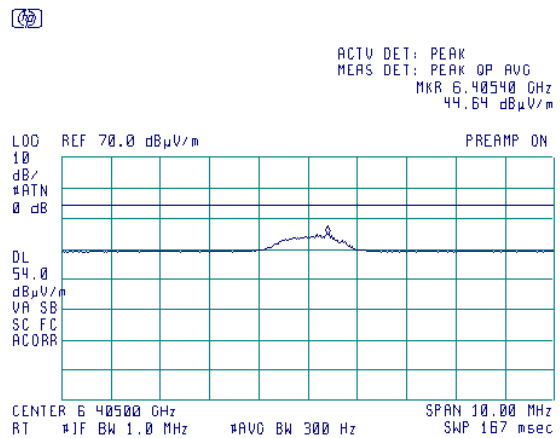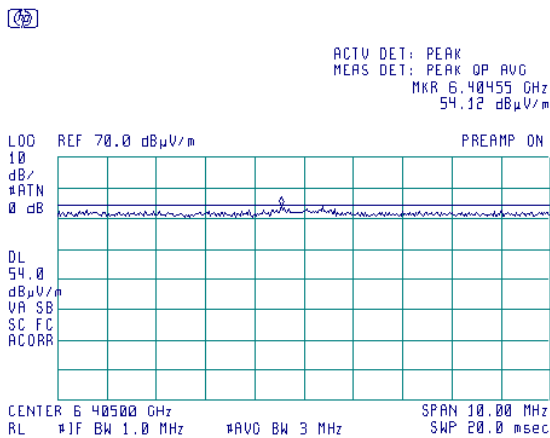



HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



**Plot 7.7.57 Radiated emission measurements at the seventh harmonic of high carrier frequency**

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical

RBW 1MHz, VBW 3MHz

RBW 1MHz, VBW 300Hz

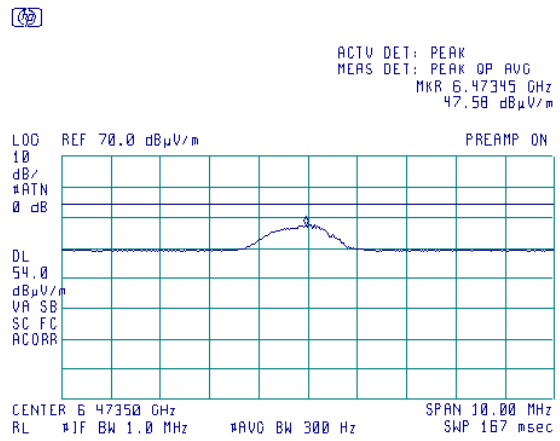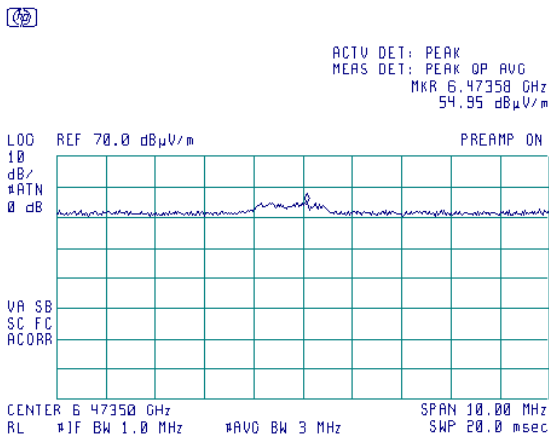







HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.58 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
RBW 1MHz, VBW 3MHz



Semi anechoic chamber  
3 m  
Vertical  
RBW 1MHz, VBW 300Hz

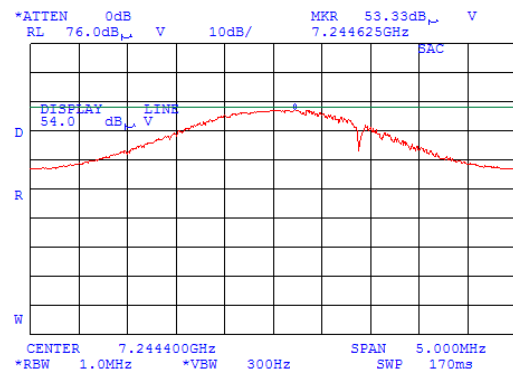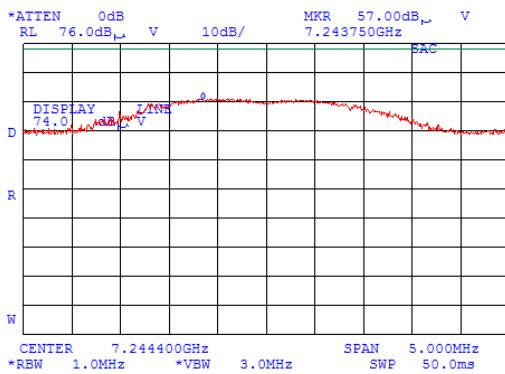

Plot 7.7.59 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
RBW 1MHz, VBW 3MHz

Semi anechoic chamber  
3 m  
Horizontal

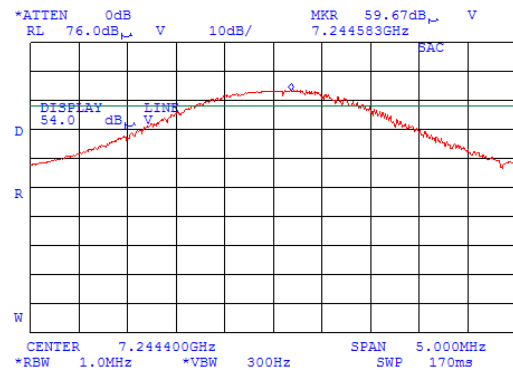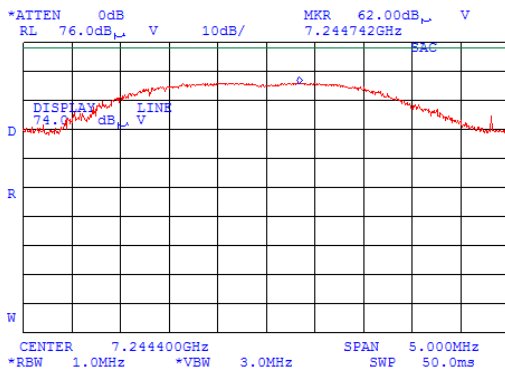





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.60 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:



Semi anechoic chamber  
3 m  
Vertical

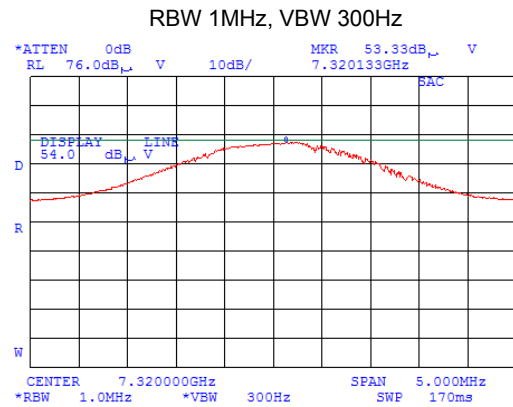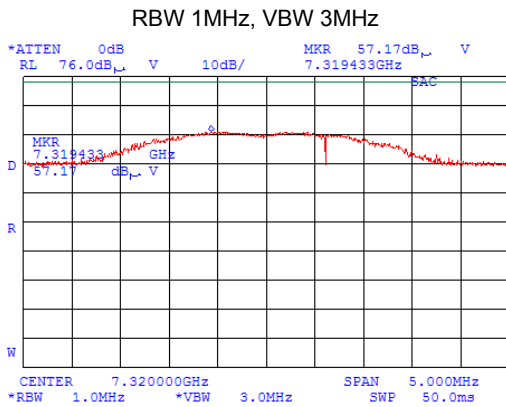

Plot 7.7.61 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

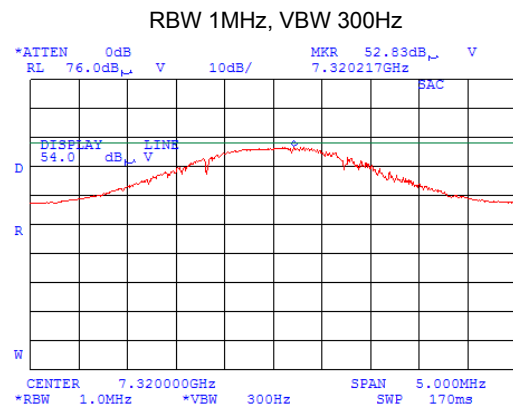
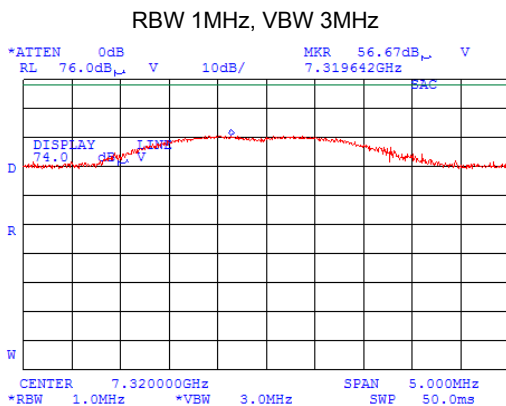


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.62 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:



Semi anechoic chamber  
3 m  
Vertical

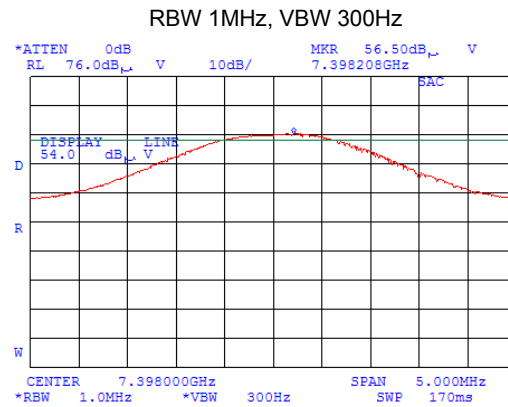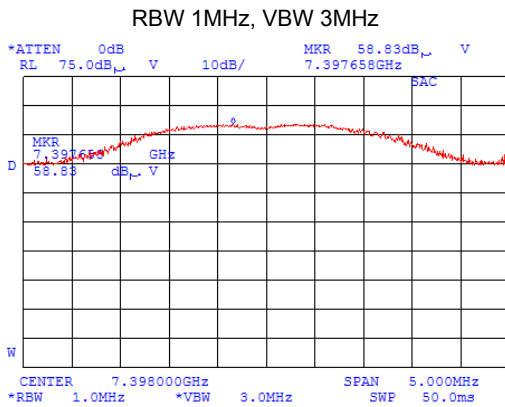

Plot 7.7.63 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

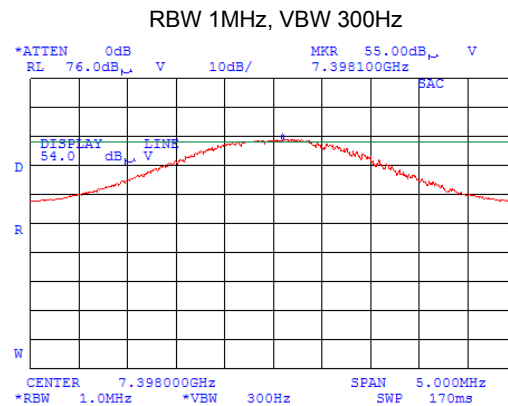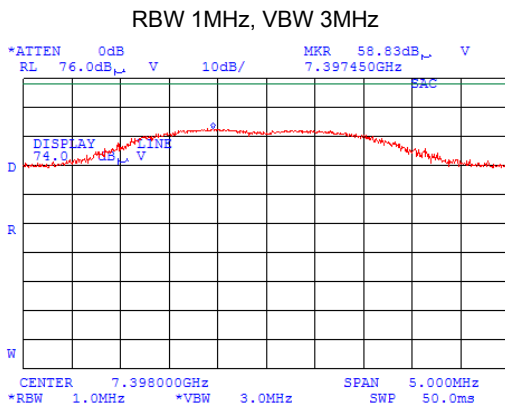





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.64 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:



Semi anechoic chamber  
3 m  
Vertical

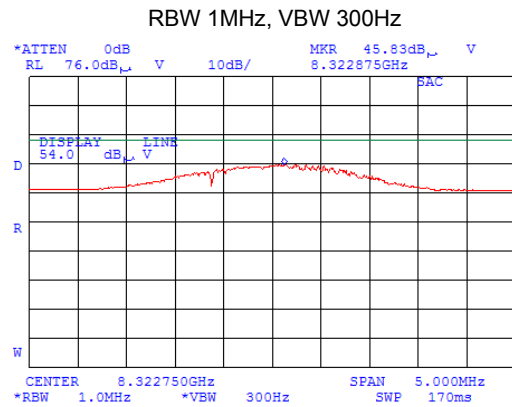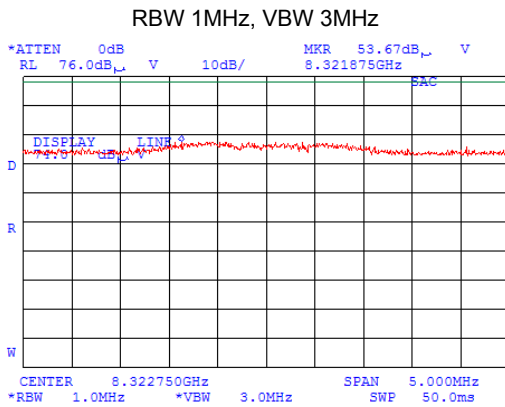

Plot 7.7.65 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Horizontal

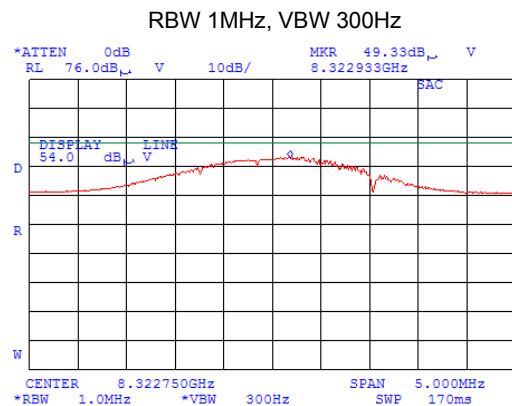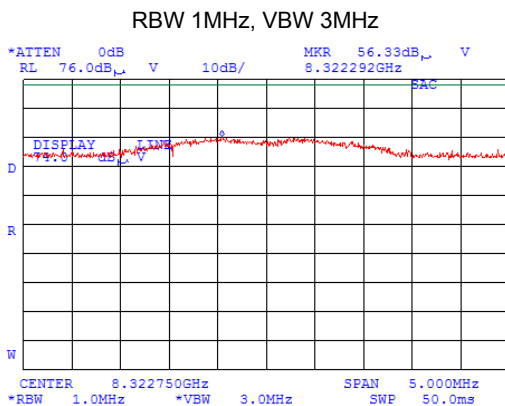


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 8/22/2010			
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Plot 7.7.66 Radiated emission measurements at the tenth harmonic of high carrier frequency**


TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:

Semi anechoic chamber  
3 m  
Vertical&Horizontal

RBW 1MHz, VBW 3MHz

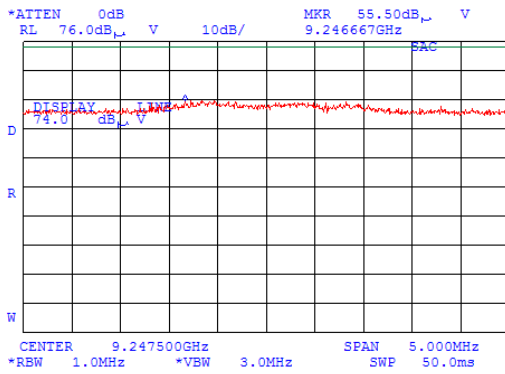

RBW 1MHz, VBW 300Hz

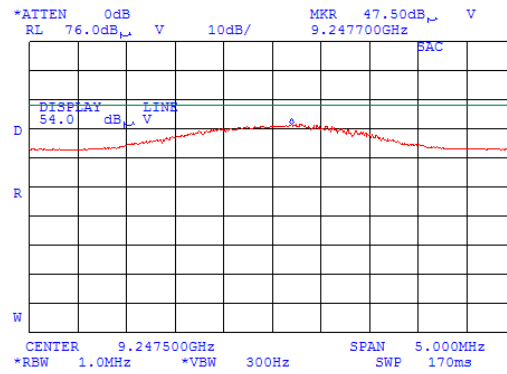





HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	8/22/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.7.67 Transmission pulse duration

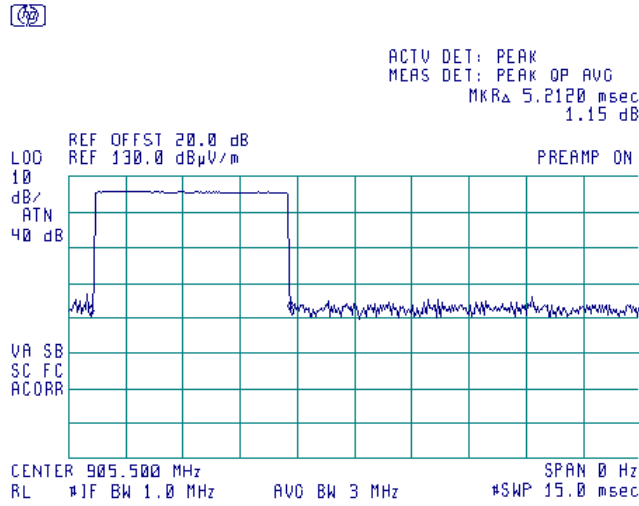

Plot 7.7.68 Transmission pulse period

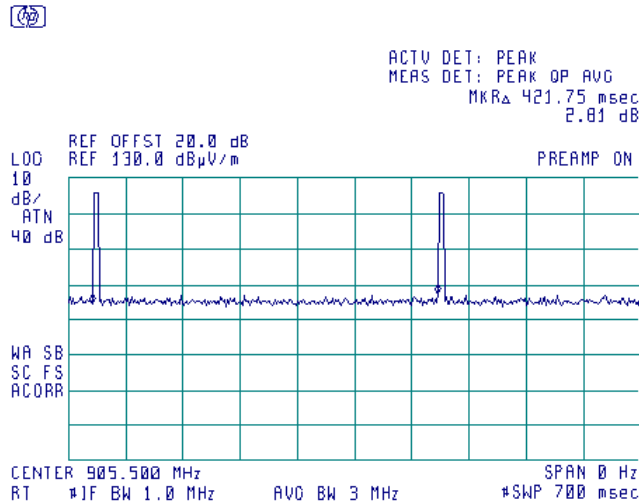

<b>Test specification:</b>	<b>Section 15.203, Antenna requirements</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date:</b>	8/26/2010		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1009 hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


## 7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

**Table 7.8.1 Antenna requirements**

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

**Photograph 7.8.1 Antenna assembly**

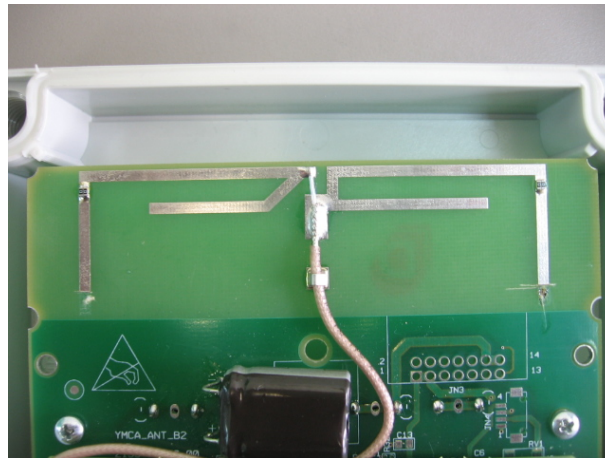

<b>Test specification:</b>		<b>Section 15.109 Class B, Radiated emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 11.6	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date:</b>	8/19/2010		
<b>Temperature:</b> 23.4 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 8 Emissions tests according to 47CFR part 15 subpart B requirements

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* - The limit for a test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$ , where  $S_1$  and  $S_2$  – the standard defined and the test distance respectively in meters.

#### 8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and the associated photograph/s, energized and the EUT performance was checked.


8.1.2.2 The measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.

8.1.2.3 The worst test results with respect to the limits were recorded in Table 8.1.2 and shown in the associated plots.



<b>Test specification:</b> Section 15.109 Class B, Radiated emissions			
<b>Test procedure:</b> ANSI C63.4, Section 11.6			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date:</b> 8/19/2010			
<b>Temperature:</b> 23.4 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top EUT

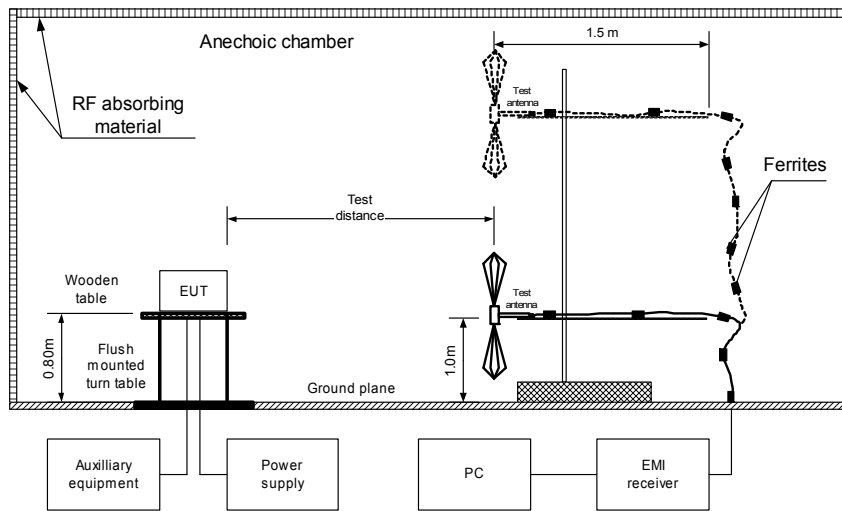

<b>Test specification:</b> Section 15.109 Class B, Radiated emissions	
<b>Test procedure:</b> ANSI C63.4, Section 11.6	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 8/19/2010	
<b>Temperature:</b> 23.4 °C	<b>Air Pressure:</b> 1005 hPa
<b>Relative Humidity:</b> 44 %	
<b>Power Supply:</b> Battery	
<b>Remarks:</b>	

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP  
TEST SITE: ANECHOIC CHAMBER  
TEST DISTANCE: 3 m  
DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission were found								Pass

TEST SITE: ANECHOIC CHAMBER  
TEST DISTANCE: 3 m  
DETECTORS USED: PEAK / AVERAGE  
FREQUENCY RANGE: 1000 MHz – 5000 MHz  
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission were found										Pass

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0521	HL 0604	HL 2871	HL 2909	HL 3384	HL 3616		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

<b>Test specification:</b> Section 15.109 Class B, Radiated emissions			
<b>Test procedure:</b> ANSI C63.4, Section 11.6			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date:</b> 8/19/2010			
<b>Temperature:</b> 23.4 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

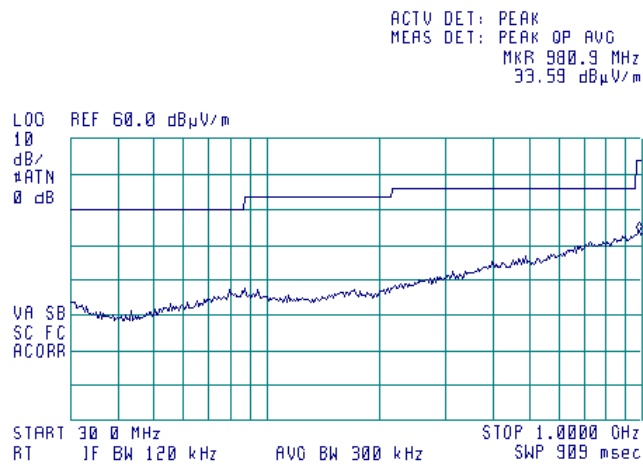

**Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

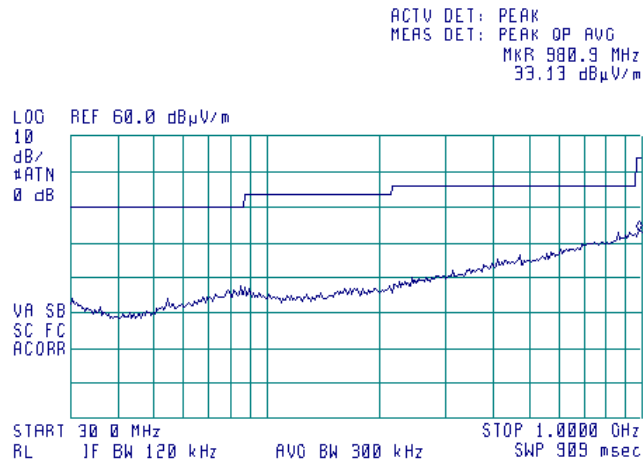

<b>Test specification:</b> Section 15.109 Class B, Radiated emissions			
<b>Test procedure:</b> ANSI C63.4, Section 11.6			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date:</b> 8/19/2010			
<b>Temperature:</b> 23.4 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 8.1.3 Radiated emission measurements in 1000 - 5000 MHz range, vertical antenna polarization

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

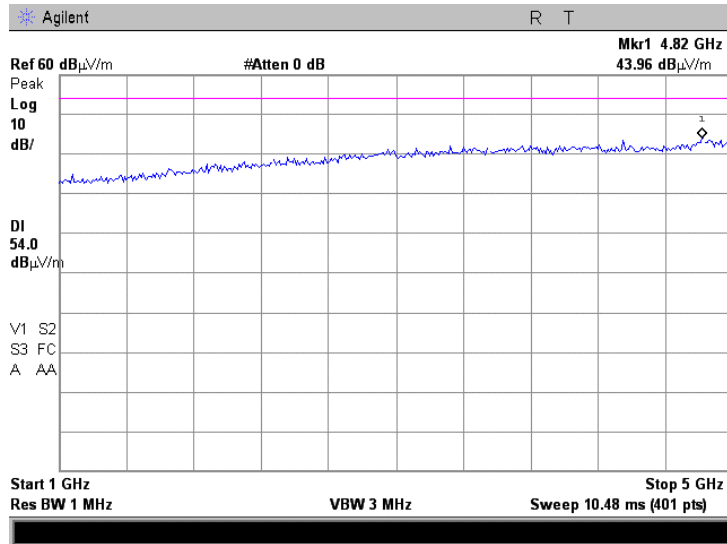

Plot 8.1.4 Radiated emission measurements in 1000 - 5000 MHz range, horizontal antenna polarization

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

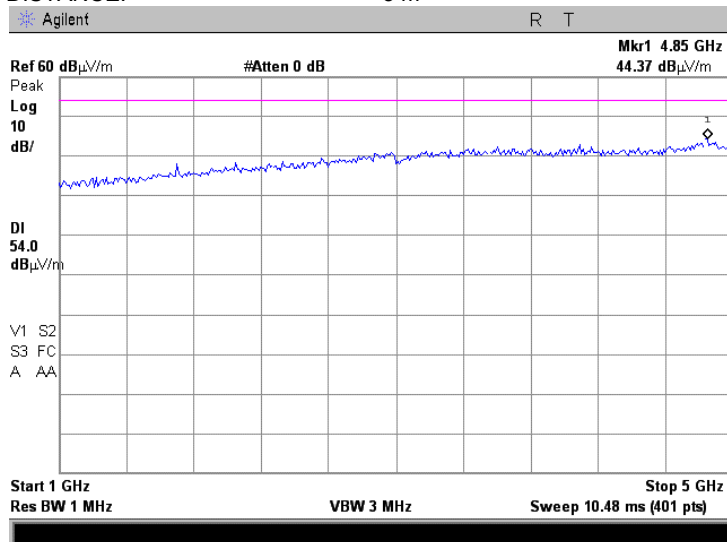

## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.*	Due Cal.*
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	08-Jun-10	08-Jun-11
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-10	29-Jun-11
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	11-Jun-10	11-Jun-11
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	07-Jul-10	07-Jul-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	2870	04-Aug-10	04-Aug-11
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	14-Sep-10	14-Sep-11
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-10	07-May-11
3001	EMC Analyzer, 9 kHz to 3 GHz	Agilent Technologies	E7402A	US394401 80	31-Dec-09	31-Dec-10
3384	Microwave Cable Assembly, 18 GHz, 1.0 m, N type/N type	Suhner Sucoflex	104EA	3384	01-Dec-09	01-Dec-10
3616	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	Rg 214/U	NA	27-May-10	27-May-11
3618	Cable RF, 2.5 m, N type-N type, DC-6.5 GHz	Alpha Wire	RG-214/U	NA	27-May-10	27-May-11
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	25-Sep-09	25-Sep-10

\*Note: the calibration was valid during testing.

## 10 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## 11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 12 APPENDIX D Specification references

FCC 47CFR part 15: 2010	Radio Frequency Devices
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

### 13 APPENDIX E Test equipment correction factors

**Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor  
Double-ridged wave guide horn antenna  
Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Cable loss**  
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,  
HL 2870

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	5750	2.49	12000	3.71
30	0.17	6000	2.53	12250	3.81
100	0.32	6250	2.58	12500	3.84
250	0.49	6500	2.64	12750	3.88
500	0.70	6750	2.69	13000	3.92
750	0.86	7000	2.75	13250	3.96
1000	1.00	7250	2.80	13500	3.98
1250	1.11	7500	2.87	13750	4.01
1500	1.23	7750	2.93	14000	4.03
1750	1.34	8000	2.94	14250	4.09
2000	1.41	8250	3.00	14500	4.08
2250	1.51	8500	3.04	14750	4.10
2500	1.59	8750	3.08	15000	4.15
2750	1.68	9000	3.14	15250	4.22
3000	1.76	9250	3.16	15500	4.31
3250	1.83	9500	3.22	15750	4.42
3500	1.91	9750	3.26	16000	4.48
3750	1.97	10000	3.36	16250	4.54
4000	2.05	10250	3.41	16500	4.56
4250	2.11	10500	3.46	16750	4.57
4500	2.18	10750	3.50	17000	4.59
4750	2.24	11000	3.54	17250	4.66
5000	2.30	11250	3.58	17500	4.70
5250	2.36	11500	3.63	17750	4.76
5500	2.43	11750	3.66	18000	4.72

**Cable loss**  
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,  
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

**Cable loss**  
**Cable coaxial, Microwave Cable Assembly, 104EA, 18 GHz, 1.0 m**  
**Suhner Sucoflex, HL 3384**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	5000	0.64	10200	0.85	15500	1.28
30	0.05	5100	0.65	10300	0.85	15600	1.29
50	0.07	5200	0.65	10400	0.84	15700	1.30
100	0.09	5300	0.66	10500	0.81	15800	1.29
200	0.13	5400	0.67	10600	0.79	15900	1.30
300	0.15	5500	0.67	10700	0.80	16000	1.30
400	0.18	5600	0.67	10800	0.78	16100	1.31
500	0.20	5700	0.67	10900	0.83	16200	1.33
600	0.22	5800	0.68	11000	0.85	16300	1.33
700	0.24	5900	0.67	11100	0.89	16400	1.37
800	0.25	6000	0.67	11200	0.91	16500	1.40
900	0.27	6100	0.67	11300	0.96	16600	1.42
1000	0.29	6200	0.68	11400	0.99	16700	1.42
1100	0.30	6300	0.69	11500	1.05	16800	1.41
1200	0.31	6400	0.68	11600	1.05	16900	1.38
1300	0.33	6500	0.67	11700	1.07	17000	1.35
1400	0.34	6600	0.65	11800	1.09	17100	1.34
1500	0.35	6700	0.67	11900	1.13	17200	1.29
1600	0.35	6800	0.68	12000	1.20	17300	1.35
1700	0.37	6900	0.71	12100	1.19	17400	1.38
1800	0.38	7000	0.70	12200	1.18	17500	1.42
1900	0.40	7100	0.71	12300	1.14	17600	1.41
2000	0.41	7200	0.72	12400	1.13	17700	1.41
2100	0.41	7300	0.76	12500	1.14	17800	1.44
2200	0.43	7400	0.77	12600	1.16	17900	1.47
2300	0.44	7500	0.79	12700	1.20	18000	1.50
2400	0.46	7600	0.77	12800	1.18		
2500	0.46	7700	0.77	12900	1.19		
2600	0.47	7800	0.79	13000	1.17		
2700	0.47	7900	0.83	13100	1.16		
2800	0.48	8000	0.83	13200	1.17		
2900	0.49	8100	0.83	13300	1.18		
3000	0.50	8200	0.81	13400	1.18		
3100	0.51	8300	0.81	13500	1.18		
3200	0.52	8400	0.83	13600	1.19		
3300	0.53	8500	0.84	13700	1.18		
3400	0.53	8600	0.84	13800	1.17		
3500	0.54	8700	0.84	13900	1.19		
3600	0.55	8800	0.83	14000	1.18		
3700	0.56	8900	0.85	14100	1.19		
3800	0.57	9000	0.84	14200	1.20		
3900	0.58	9100	0.87	14300	1.19		
4000	0.58	9200	0.88	14400	1.21		
4100	0.57	9300	0.88	14600	1.24		
4200	0.58	9400	0.87	14700	1.24		
4300	0.58	9500	0.87	14800	1.26		
4400	0.59	9600	0.87	14900	1.27		
4500	0.60	9700	0.89	15000	1.29		
4600	0.61	9800	0.90	15100	1.29		
4700	0.62	9900	0.89	15200	1.30		
4800	0.63	10000	0.87	15300	1.31		
4900	0.64	10100	0.86	15400	1.29		

**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 6.5 m**  
**Suhner Switzerland, HL 3616**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	1750	2.66	3550	4.44	5350	6.08
30	0.25	1800	2.72	3600	4.46	5400	6.12
50	0.32	1850	2.78	3650	4.59	5450	6.17
100	0.48	1900	2.81	3700	4.60	5500	6.25
150	0.60	1950	2.86	3750	4.72	5550	6.31
200	0.71	2000	2.94	3800	4.72	5600	6.35
250	0.81	2050	2.97	3850	4.86	5650	6.41
300	0.91	2100	3.01	3900	4.85	5700	6.50
350	1.00	2150	3.06	3950	4.99	5750	6.52
400	1.07	2200	3.11	4000	4.90	5800	6.57
450	1.14	2250	3.16	4050	5.04	5850	6.61
500	1.23	2300	3.21	4100	5.01	5900	6.71
550	1.30	2350	3.26	4150	5.10	5950	6.70
600	1.37	2400	3.31	4200	5.08	6000	6.75
650	1.44	2450	3.35	4250	5.18	6050	6.74
700	1.50	2500	3.39	4300	5.14	6100	6.84
750	1.58	2550	3.46	4350	5.22	6150	6.87
800	1.64	2600	3.48	4400	5.21	6200	6.93
850	1.69	2650	3.55	4450	5.29	6250	6.96
900	1.77	2700	3.59	4500	5.31	6300	7.02
950	1.79	2750	3.66	4550	5.39	6350	7.04
1000	1.87	2800	3.68	4600	5.41	6400	7.10
1050	1.92	2850	3.75	4650	5.49	6450	7.11
1100	1.98	2900	3.79	4700	5.52	6500	7.19
1150	2.05	2950	3.86	4750	5.60		
1200	2.09	3000	3.89	4800	5.64		
1250	2.15	3050	3.94	4850	5.73		
1300	2.21	3100	3.98	4900	5.70		
1350	2.27	3150	4.03	4950	5.73		
1400	2.33	3200	4.06	5000	5.75		
1450	2.38	3250	4.12	5050	5.83		
1500	2.44	3300	4.14	5100	5.82		
1550	2.48	3350	4.22	5150	5.91		
1600	2.52	3400	4.24	5200	5.92		
1650	2.56	3450	4.31	5250	5.98		
1700	2.62	3500	4.35	5300	6.01		

**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 2.5 m**  
**Alpha Wire, HL 3618**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	2200	1.17	4500	1.90
50	0.12	2300	1.19	4600	1.90
100	0.18	2400	1.24	4700	1.94
200	0.27	2500	1.29	4800	1.97
300	0.34	2600	1.30	4900	2.01
400	0.41	2700	1.33	5000	2.02
500	0.47	2800	1.38	5100	2.04
600	0.52	2900	1.40	5200	2.08
700	0.57	3000	1.42	5300	2.13
800	0.62	3100	1.46	5400	2.14
900	0.66	3200	1.54	5500	2.15
1000	0.70	3300	1.55	5600	2.19
1100	0.75	3400	1.55	5700	2.24
1200	0.80	3500	1.60	5800	2.27
1300	0.84	3600	1.68	5900	2.29
1400	0.87	3700	1.70	6000	2.31
1500	0.90	3800	1.69	6100	2.36
1600	0.94	3900	1.72	6200	2.40
1700	0.98	4000	1.77	6300	2.42
1800	1.01	4100	1.81	6400	2.45
1900	1.05	4200	1.80	6500	2.50
2000	1.11	4300	1.83		
2100	1.15	4400	1.88		

## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT