



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS),
RSS-210 issue 8 Annex 8

FOR:

Telematics Wireless Ltd.

Water meter

Model: 2WM-LG

FCC ID:NTAWMLG

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Test configuration	5
6.4	Changes made in the EUT	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation	19
7.3	Number of hopping frequencies	22
7.4	Average time of occupancy	28
7.5	Peak output power	32
7.6	Band edge radiated emissions	49
7.7	Field strength of spurious emissions	68
7.8	Antenna requirements	103
8	APPENDIX A Test equipment and ancillaries used for tests	104
9	APPENDIX B Measurement uncertainties	105
10	APPENDIX C Test laboratory description	106
11	APPENDIX D Specification references	106
12	APPENDIX E Test equipment correction factors	107
13	APPENDIX F Abbreviations and acronyms	115



HERMON LABORATORIES

1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

2 Equipment under test attributes

Product name: Water meter
Product type: Transceiver
Model(s): 2WM-LG
Serial number: 385796
Hardware version: A
Software release: 01.11
Receipt date: 8/15/2011

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-Mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

4 Test details

Project ID: 22412
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 8/15/2011
Test completed: 9/19/2011
Test specification(s): FCC 47CFR part 15:2010, subpart C §15.247 (FHSS); RSS-210 issue 8 Annex 8



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)1, RSS-210 section A8.1(a), The 20 dB bandwidth	Pass
FCC Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation	Pass
FCC Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies	Pass
FCC Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy	Pass
FCC Section 15.247(b), RSS-210 section A8.4(1), Peak output power	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	Pass
FCC Section 15.203, RSS-Gen section 7.1.2, Antenna requirements	Pass
FCC Section 15.207(a), RSS-Gen section 7.2.4, Conducted emission	Not required
FCC Section 15.247(i), RSS-Gen, section 5.5, RF exposure	Pass, the exhibit to the application of certification is provided

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
 The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	September 19, 2011	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	October 6, 2011	
Approved by:	Mr. M. Nikishin, EMC and radio group leader	October 19, 2011	



6 EUT description


6.1 General information

The EUT, 2WM-LG, is a 2-Way RF unit which is connected to an existing Meter/Register via wires. The RF capabilities enable the transmission of the meter reading and some extra information to a remote collecting unit. In addition specific parameters can be programmed via the RF link. The EUT is powered from two 3.6 VDC lithium internal batteries. The tests were performed with the EUT using new batteries.

6.2 Ports and lines

Port type	Port description	Connected		Connector type	Qty.	Cable type	Cable length
		From	To				
Signal	8 signal ports	EUT	Open circuit	Terminal block	1	unshielded	1 m

6.3 Test configuration

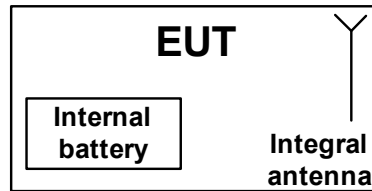

6.4 Changes made in the EUT

No changes were implemented.



6.5 Transmitter characteristics

Type of equipment					
	Stand-alone (Equipment with or without its own control provisions)				
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
	fixed	Always at a distance more than 2 m from all people			
X	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		902 – 928 MHz			
Operating frequency range		902.3-927.8 MHz (FHSS wide channel) 904 – 927.9 MHz (FHSS narrow channel)			
Maximum rated output power		At transmitter 50 Ω RF output connector	NA		
		Peak output power	15.86 dBm (FHSS wide channel) 15.51 dBm (FHSS narrow channel)		
Is transmitter output power variable?		X	No		
			Yes	continuous variable	
			Yes	stepped variable with stepsize	dB
			Yes	minimum RF power	dBm
	Yes	maximum RF power	dBm		
Antenna connection					
	unique coupling	standard connector	X	integral	
			X	with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics					
Type	Manufacturer	Model number	Gain		
Integral	Telematics Wireless Ltd.	Printed inverted F antenna	0.5 dBi		
Transmitter aggregate data rate/s		9.6, 19.2, 38.4, 115.2 kbps			
Transmitter aggregate symbol (baud) rate/s		NA			
Modulating test signal (baseband)		PRBS			
Modulation type		FSK, GFSK			
Maximum transmitter duty cycle in normal use		1%			
Transmitter duty cycle supplied for test (FHSS)		1%			
Transmitter power source					
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	
	DC	Nominal rated voltage	VDC	Lithium	
	AC mains	Nominal rated voltage	VAC	Frequency	
Spread spectrum parameters for transmitters tested per FCC 15.247 only					
FHSS	Total number of hops	86 wide channels, 240 narrow channels			
	Bandwidth per hop	242.5 kHz			
	Max. separation of hops	297.5 kHz			

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	500	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plot.

7.1.2.4 The test was repeated for each data rate and each modulation format. The test results provided in Table 7.1.2, Table 7.1.3, Table 7.1.4 and the associated plots.

Figure 7.1.1 The 20 dB bandwidth test setup



Test specification:	Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
VIDEO BANDWIDTH: ≥ RBW
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
FREQUENCY HOPPING: Disabled
MODULATION: FSK
MODE: FHSS 86 Channels
CHANNEL SEPARATION: 297.5 kHz

Carrier frequency, MHz	Baud Rate, bps	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
902.3	9600	232.5	500	-267.5	Pass
902.3	19200	232.5	500	-267.5	Pass
902.3	38400	237.5	500	-262.5	Pass
914.9	9600	240.0	500	-260.0	Pass
914.9	19200	242.5	500	-257.5	Pass
914.9	38400	236.3	500	-263.7	Pass
927.8	9600	238.8	500	-261.2	Pass
927.8	19200	237.5	500	-262.5	Pass
927.8	38400	242.5	500	-257.5	Pass

Table 7.1.3 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
VIDEO BANDWIDTH: ≥ RBW
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
FREQUENCY HOPPING: Disabled
MODULATION: GFSK
MODE: FHSS 86 Channels
CHANNEL SEPARATION: 297.5 kHz

Carrier frequency, MHz	Baud Rate, bps	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
902.3	115200	240.0	500	-260.0	Pass
914.9	115200	242.5	500	-257.5	Pass
927.8	115200	241.3	500	-258.7	Pass



HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth	
Test procedure: Public notice DA 00-705	
Test mode: Compliance	Verdict: PASS
Date(s): 8/15/2011	
Temperature: 22 °C	Air Pressure: 1008 hPa
Relative Humidity: 47 %	
Power Supply: Battery	
Remarks:	

Table 7.1.4 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
VIDEO BANDWIDTH: ≥ RBW
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
FREQUENCY HOPPING: Disabled
MODULATION: FSK
MODE: FHSS 240 Channels
CHANNEL SIPARATION: 100.9 kHz

Carrier frequency, MHz	Baud Rate, bps	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
904.0	9600	61.3	500	-438.7	Pass
904.0	19200	67.5	500	-432.5	Pass
904.0	38400	98.8	500	-401.2	Pass
927.9	9600	62.5	500	-437.5	Pass
927.9	19200	81.3	500	-418.7	Pass
927.9	38400	98.8	500	-401.2	Pass

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2780	HL 2871	HL 3623				
---------	---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:



FHSS 86 channels
9600 bps

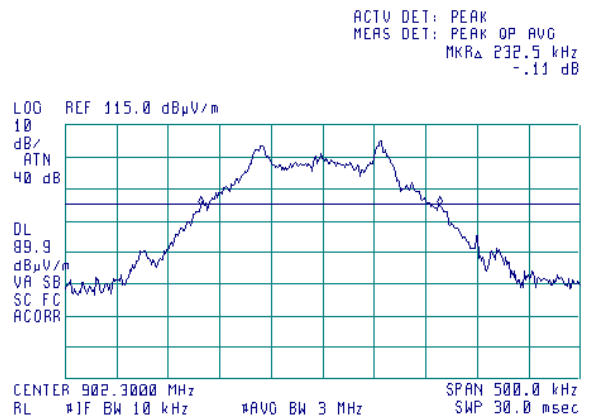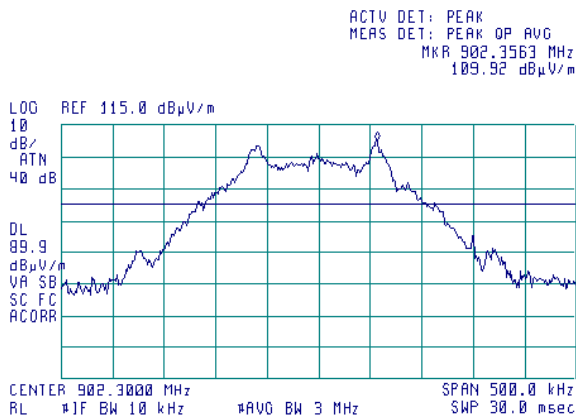

Plot 7.1.2 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:

FHSS 86 channels
19200 bps

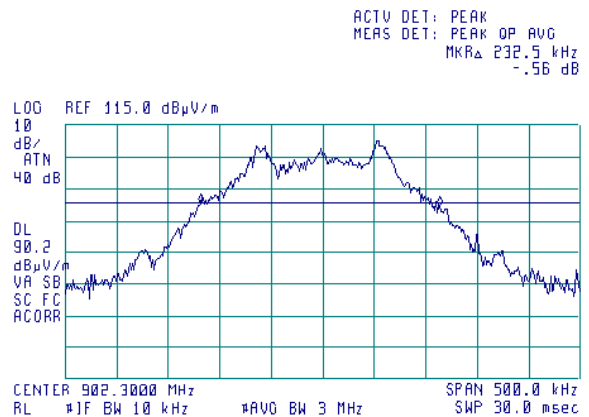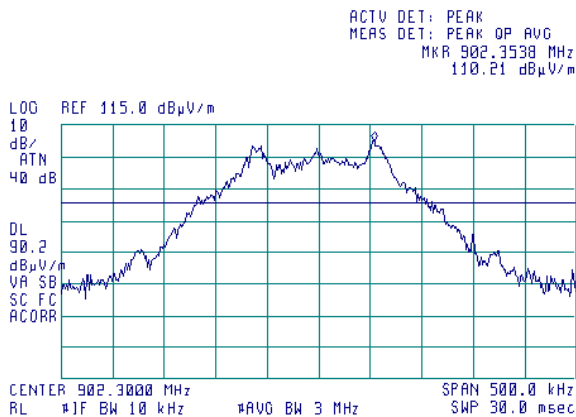





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:



FHSS 86 channels
38400 bps

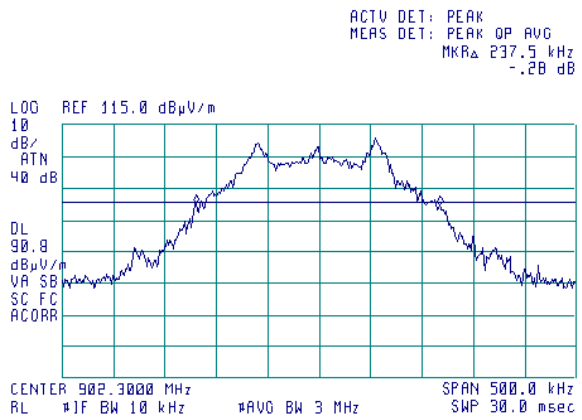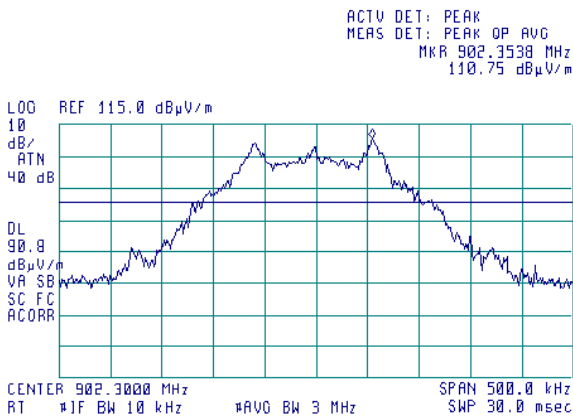

Plot 7.1.4 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:

FHSS 86 channels
115200 bps

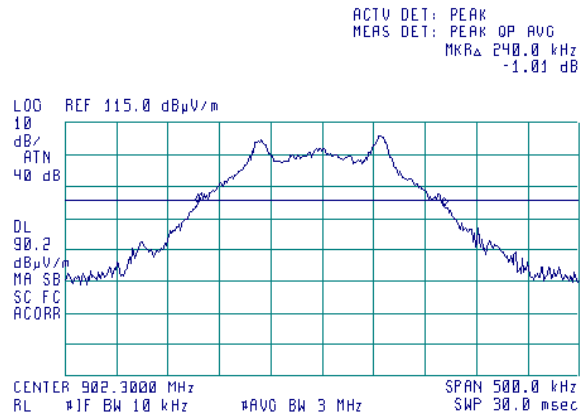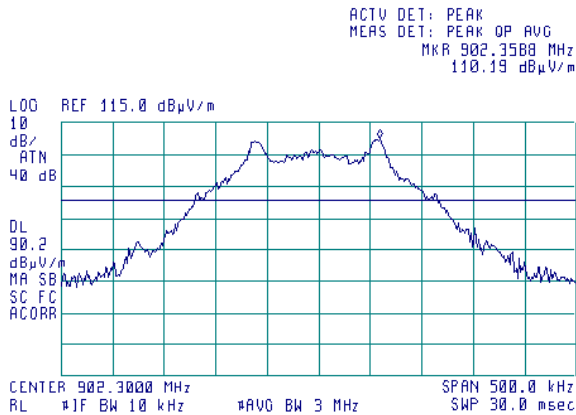





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.5 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:



FHSS 240 channels
9600 bps

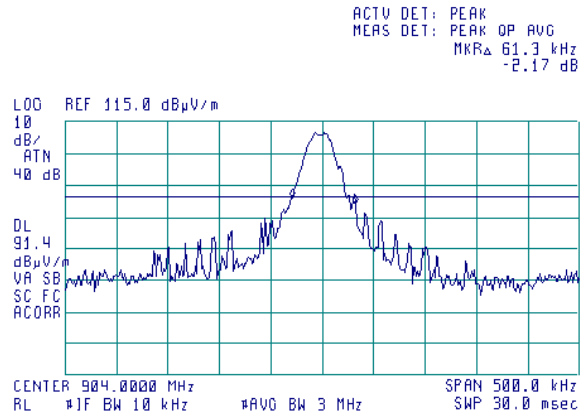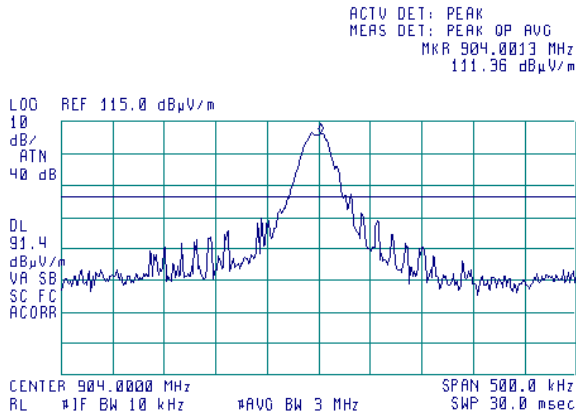

Plot 7.1.6 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:

FHSS 240 channels
19200 bps

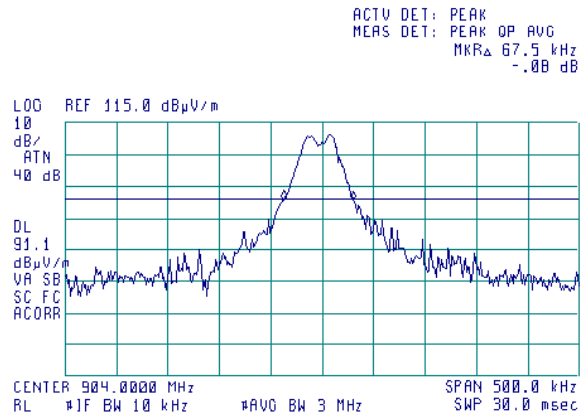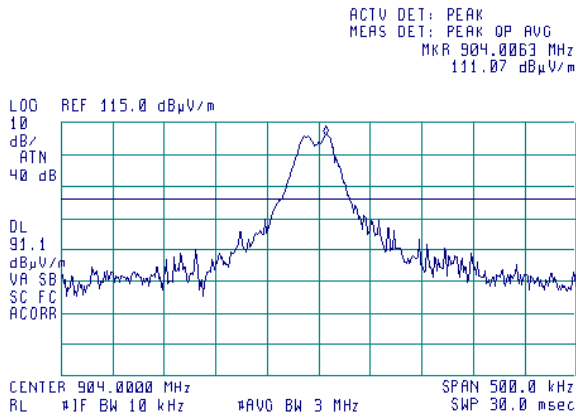





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.7 The 20 dB bandwidth test result at low frequency

CONFIGURATION:
BAUD RATE:



FHSS 240 channels
38400 bps

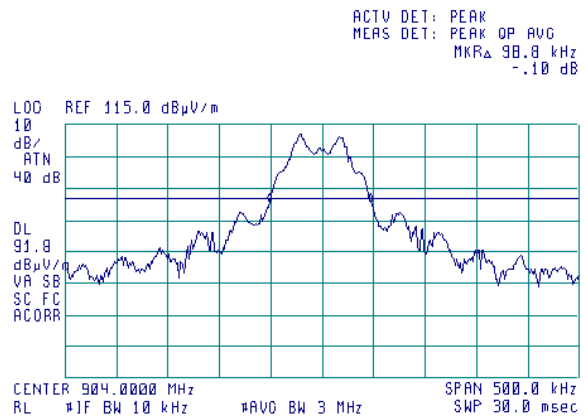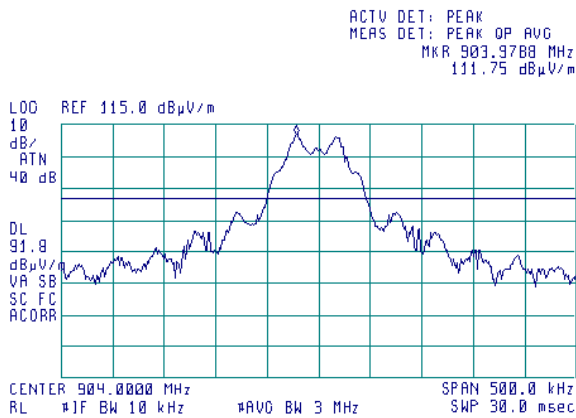

Plot 7.1.8 The 20 dB bandwidth test result at mid frequency

CONFIGURATION:
BAUD RATE:

FHSS 86 channels
9600 bps

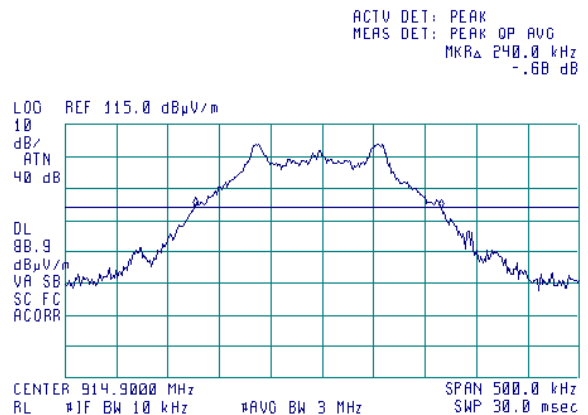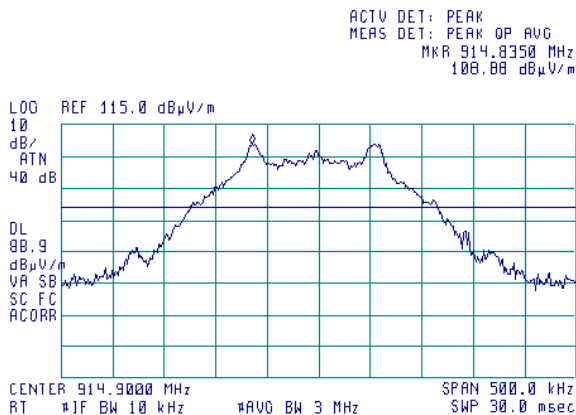





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			



Plot 7.1.9 The 20 dB bandwidth test result at mid frequency

CONFIGURATION:	FHSS 86 channels
BAUD RATE:	19200 bps

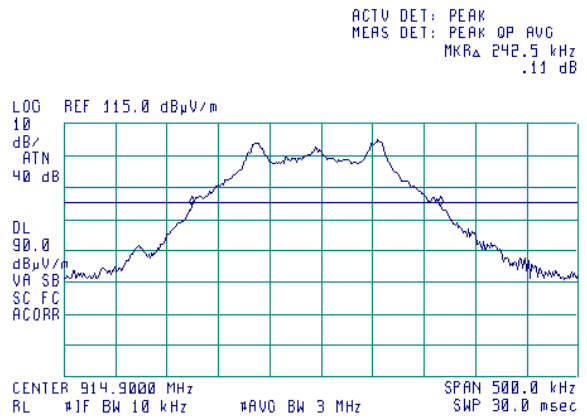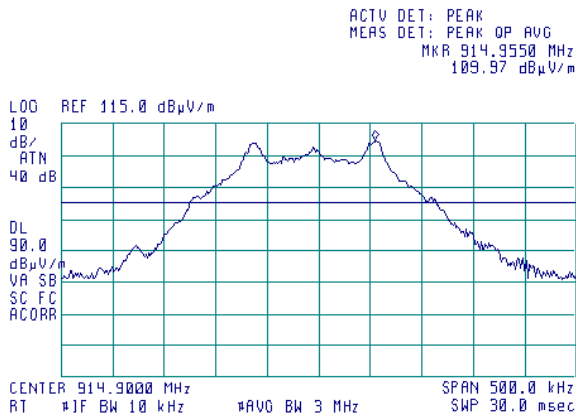

Plot 7.1.10 The 20 dB bandwidth test result at mid frequency

CONFIGURATION:	FHSS 86 channels
BAUD RATE:	38400 bps

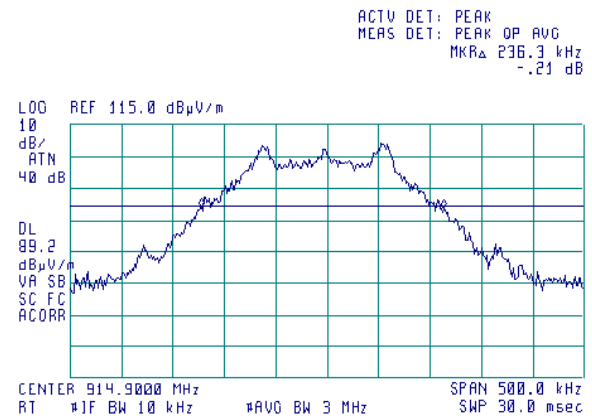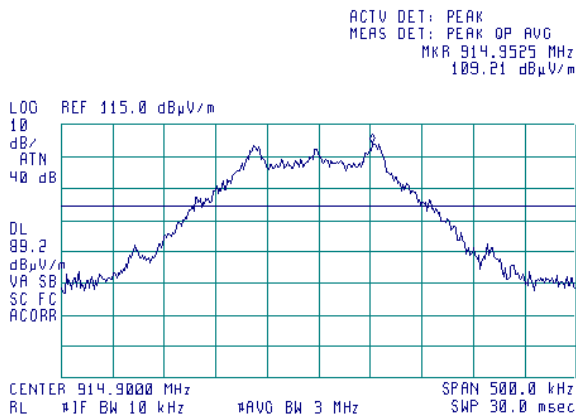





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			



Plot 7.1.11 The 20 dB bandwidth test result at mid frequency

CONFIGURATION:	FHSS 86 channels
BAUD RATE:	115200 bps

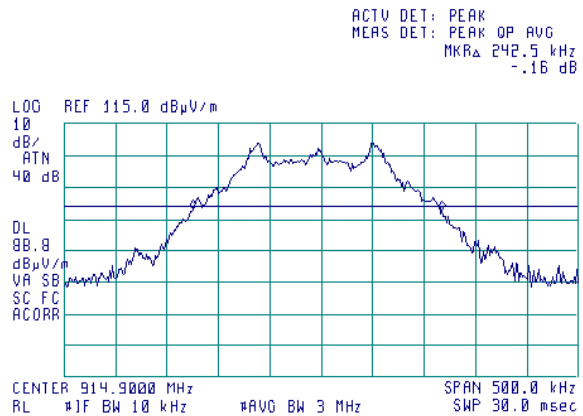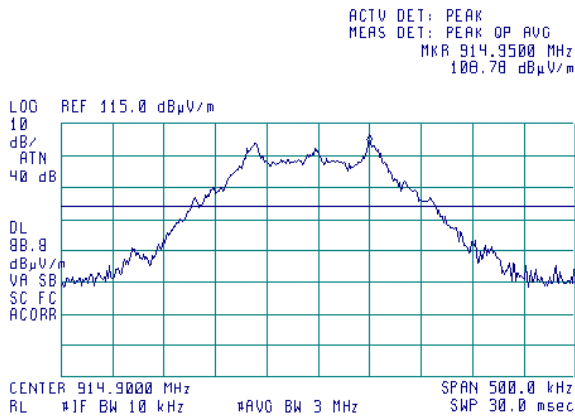

Plot 7.1.12 The 20 dB bandwidth test result at high frequency

CONFIGURATION:	FHSS 86 channels
BAUD RATE:	9600 bps

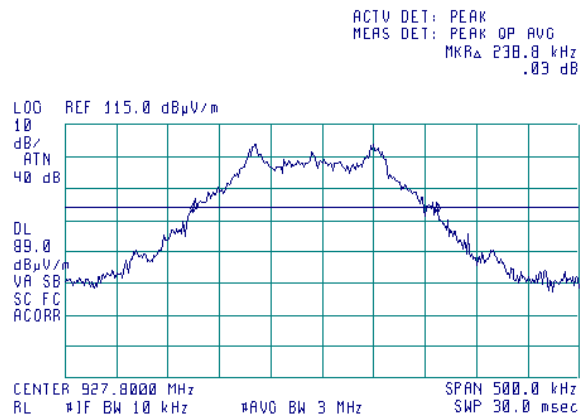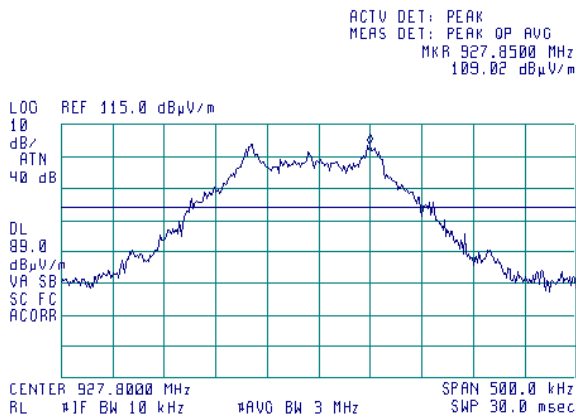





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			



Plot 7.1.13 The 20 dB bandwidth test result at high frequency

CONFIGURATION:	FHSS 86 channels
BAUD RATE:	19200 bps

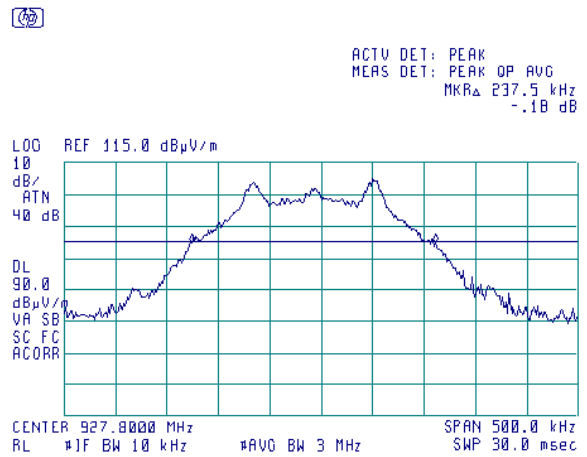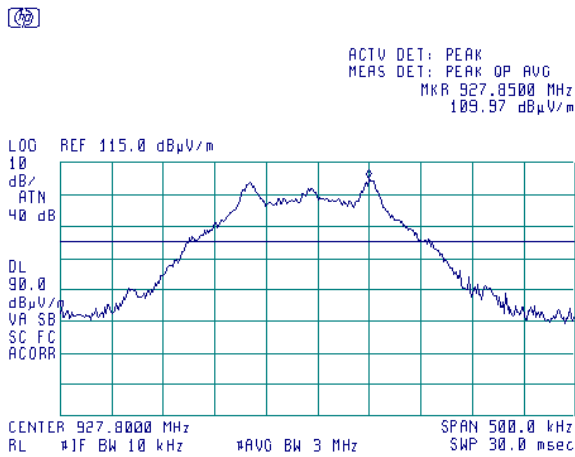

Plot 7.1.14 The 20 dB bandwidth test result at high frequency



CONFIGURATION:	FHSS 86 channels
BAUD RATE:	38400 bps

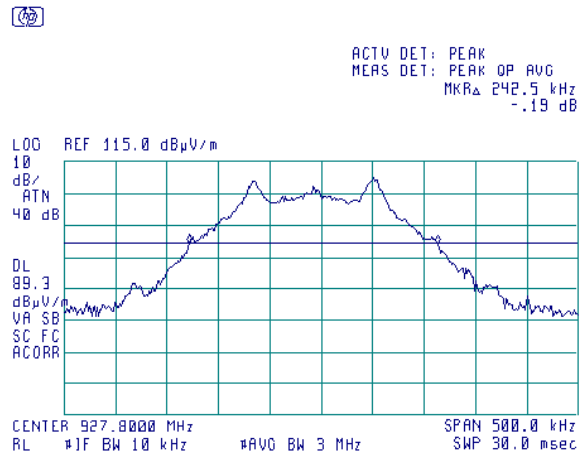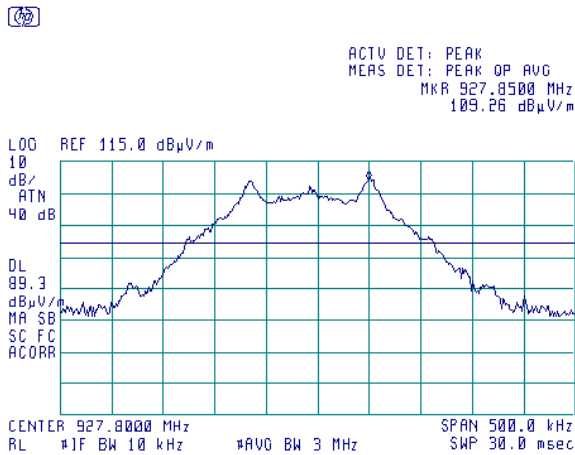

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			



Plot 7.1.15 The 20 dB bandwidth test result at high frequency

CONFIGURATION:	FHSS 86 channels
BAUD RATE:	115200 bps

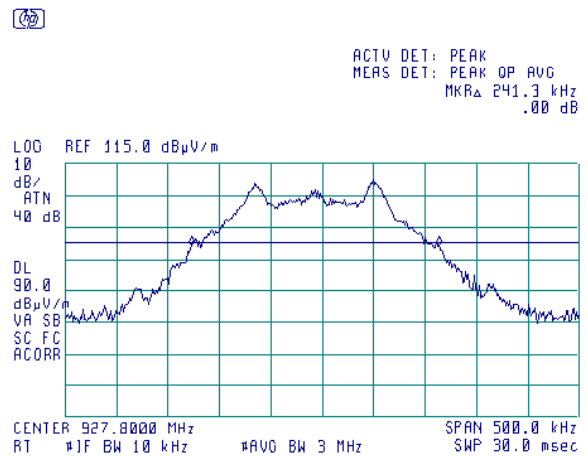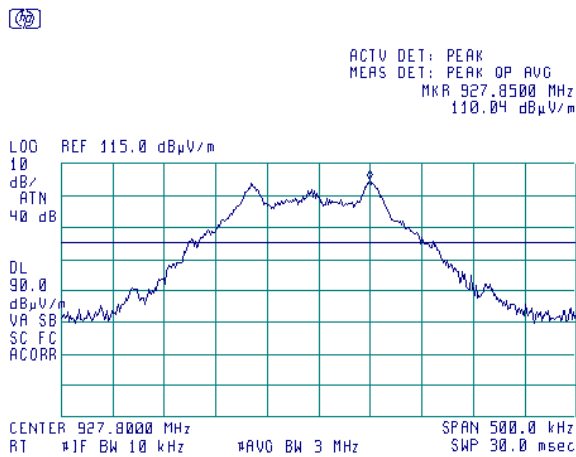

Plot 7.1.16 The 20 dB bandwidth test result at high frequency



CONFIGURATION:	FHSS 240 channels
BAUD RATE:	9600 bps

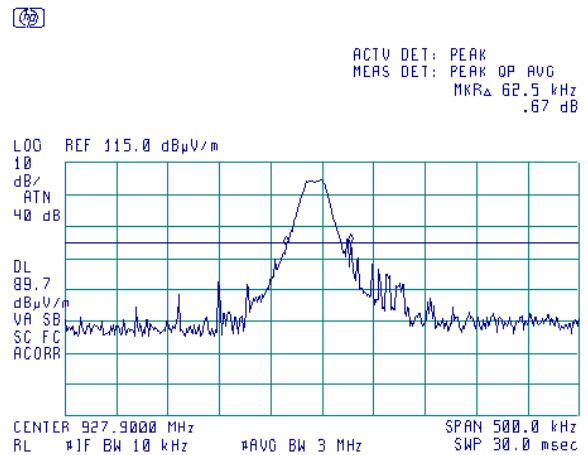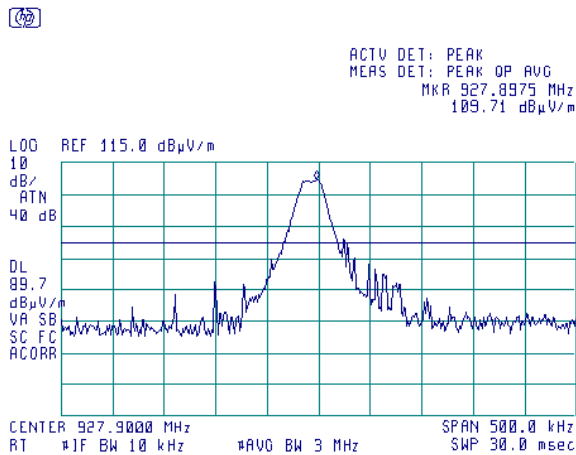

Test specification: Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			



Plot 7.1.17 The 20 dB bandwidth test result at high frequency

CONFIGURATION:	FHSS 240 channels
BAUD RATE:	19200 bps

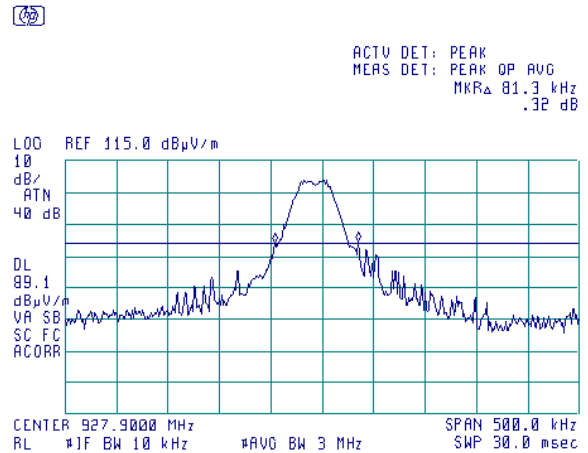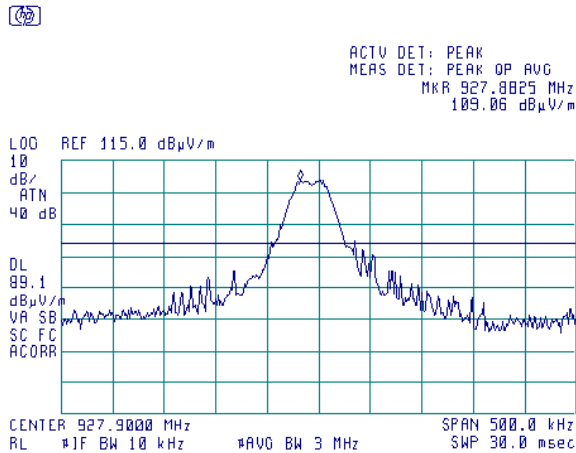

Plot 7.1.18 The 20 dB bandwidth test result at high frequency

CONFIGURATION:	FHSS 240 channels
BAUD RATE:	38400 bps

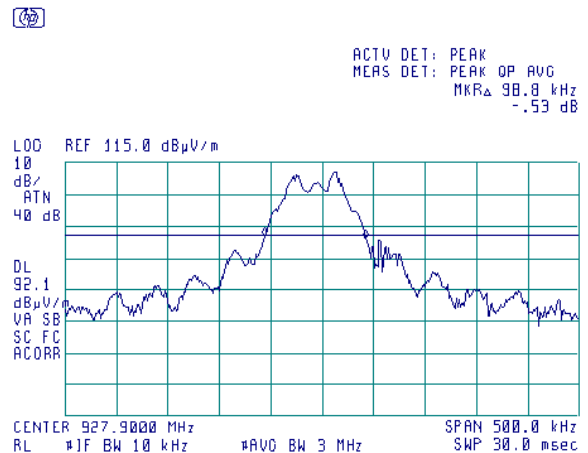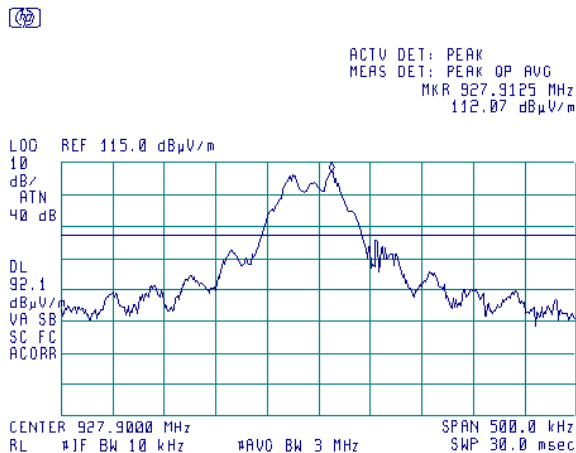

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/14/2011		
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/14/2011		
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: FSK
 DETECTOR USED: Peak
 FREQUENCY HOPPING: Enabled

MODE: 86 channels
 20 dB BANDWIDTH: 242.5 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
297.5	242.5	55.0	Pass

MODE: 240 channels
 20 dB BANDWIDTH: 98.8 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
100.9	98.8	2.1	Pass

* - Margin = Carrier frequency separation – specification limit.


Reference numbers of test equipment used

HL 1513	HL 1984	HL 3001					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/14/2011		
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Carrier frequency separation, 86 channels mode

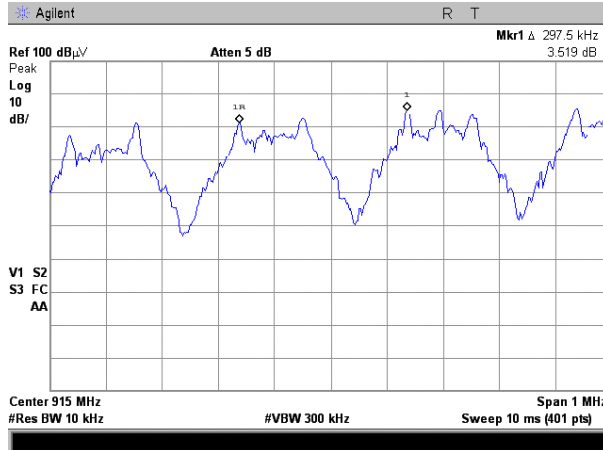

Plot 7.2.2 Carrier frequency separation, 240 channels mode

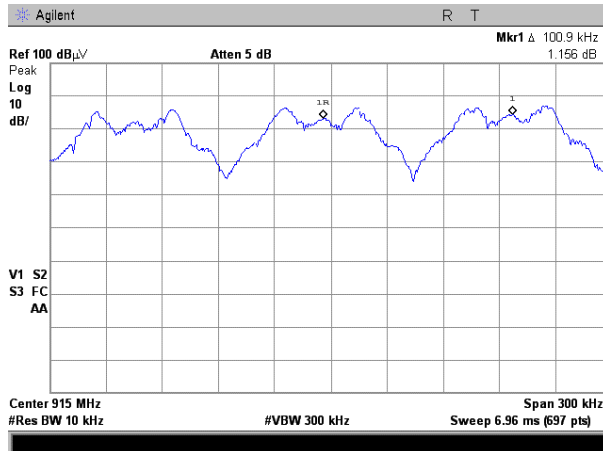

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 111 hPa	Relative Humidity: 37 %	Power Supply: Battery
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.

7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.

7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.

7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 111 hPa	Relative Humidity: 37 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: FSK
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: ≥ 1% of the span
 VIDEO BANDWIDTH: ≥ RBW
 FREQUENCY HOPPING: Enabled
 OPERATING MODE: Wide channel

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
86	50	36	Pass

OPERATING MODE: Narrow channel

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
240	50	190	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.


Reference numbers of test equipment used

HL 1513	HL 1984	HL 3001				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 111 hPa	Relative Humidity: 37 %	Power Supply: Battery
Remarks:			

Plot 7.3.1 Number of hopping frequencies in wide channel mode (26 channels)

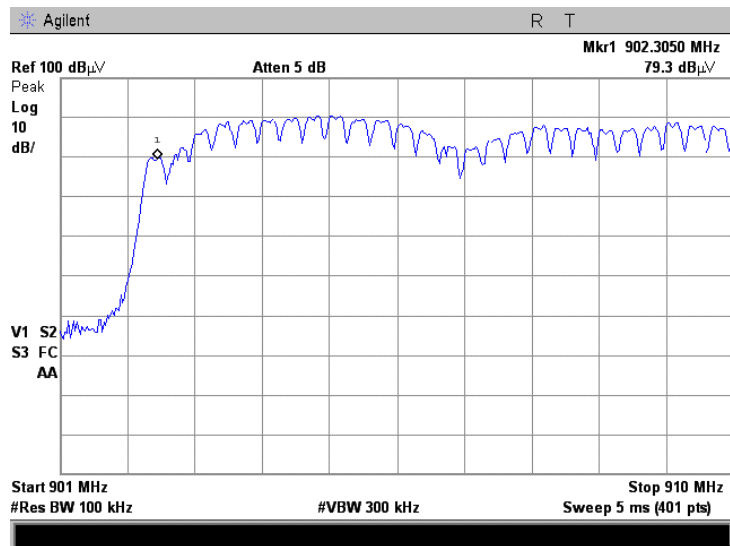


Plot 7.3.2 Number of hopping frequencies in wide channel mode (31 channels)

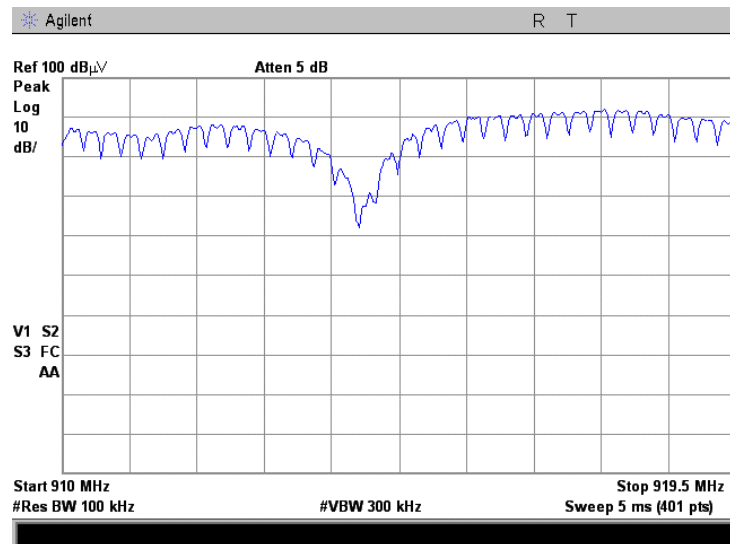


Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 111 hPa	Relative Humidity: 37 %	Power Supply: Battery
Remarks:			

Plot 7.3.3 Number of hopping frequencies in wide channel mode (29 channels)

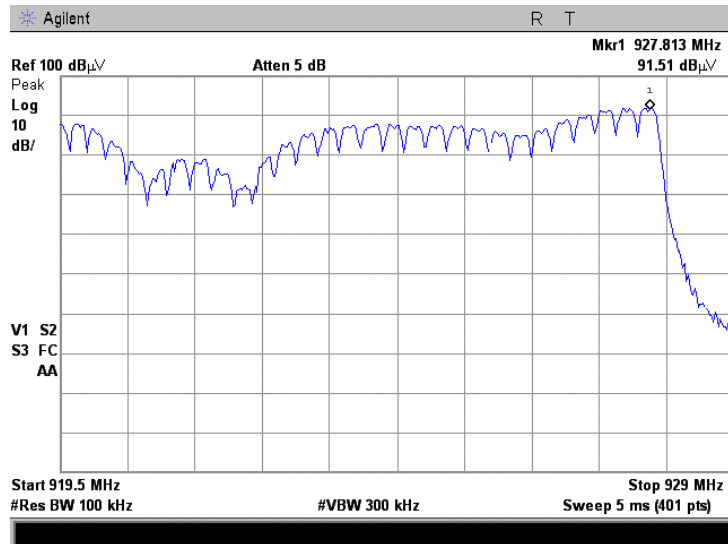


Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 111 hPa	Relative Humidity: 37 %	Power Supply: Battery
Remarks:			

Plot 7.3.4 Number of hopping frequencies in narrow channel mode (70 channels)

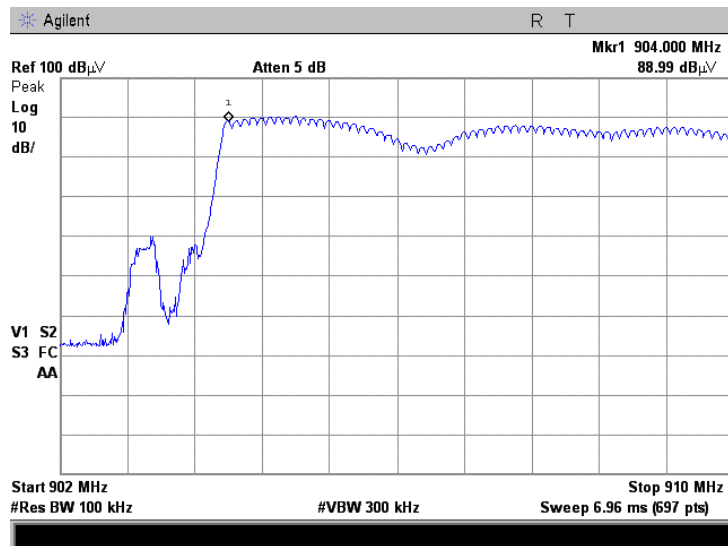


Plot 7.3.5 Number of hopping frequencies in narrow channel mode (90 channels)

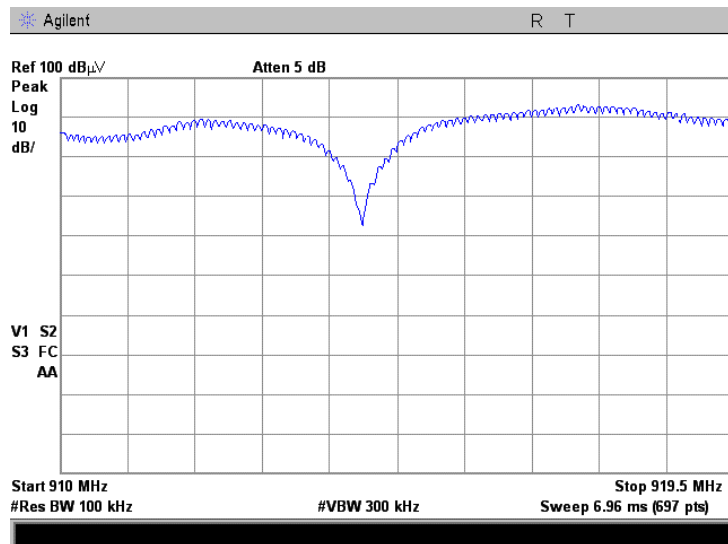

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 111 hPa	Relative Humidity: 37 %	Power Supply: Battery
Remarks:			

Plot 7.3.6 Number of hopping frequencies in narrow channel mode (80 channels)

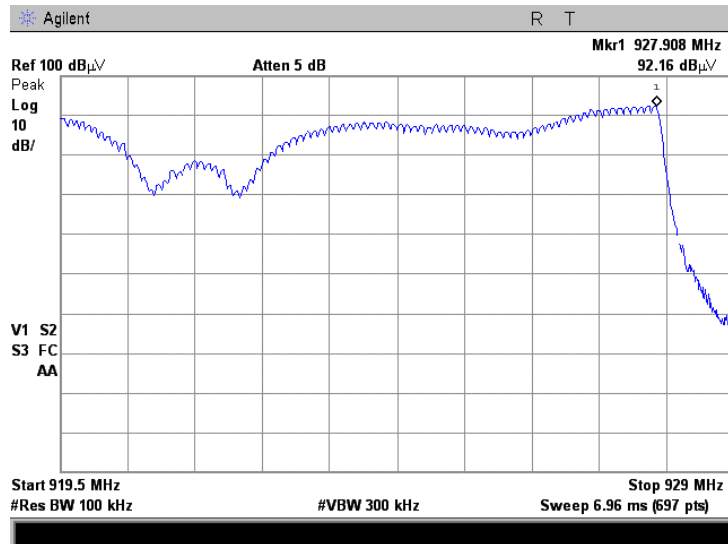

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: Battery
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.


7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.

7.4.2.3 The single transmission duration and period were measured with oscilloscope.

7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.

7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Test specification:		Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict: PASS	
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: FSK
 DETECTOR USED: Peak
 FREQUENCY HOPPING: Enabled
 INVESTIGATED PERIOD: 20 s
 NUMBER OF HOPPING FREQUENCIES: 86

Carrier frequency, MHz	Single transmission duration, ms	Single transmission period, s	Average time of occupancy*, s	Bit rate, bps	Limit, s	Margin, s**	Verdict
915	5	3.4	0.0294	38400	0.4	-0.3706	Pass

NUMBER OF HOPPING FREQUENCIES: 240

Carrier frequency, MHz	Single transmission duration, s	Single transmission period, s	Average time of occupancy*, s	Bit rate, bps	Limit, s	Margin, s**	Verdict
915	5	10.09	0.0099	38400	0.4	-0.3901	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / Single transmission period.

** - Margin = Average time of occupancy – specification limit.


Reference numbers of test equipment used

HL 1513	HL 1984	HL 3001				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 Single transmission duration in narrow channel mode (240 channels)

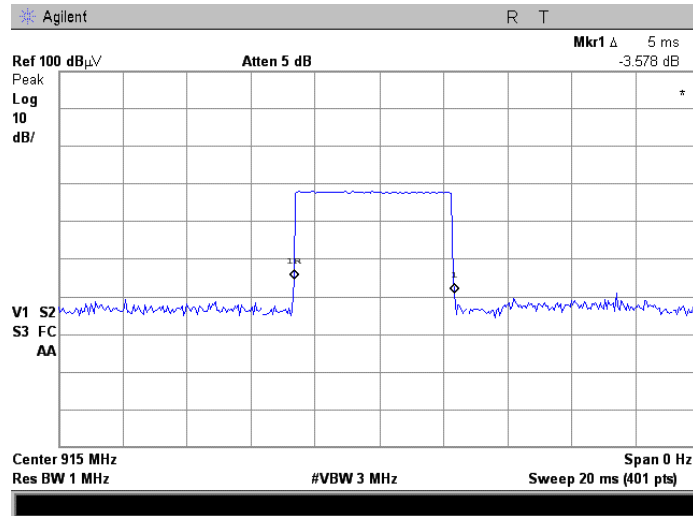


Plot 7.4.2 Single transmission period in narrow channel mode (240 channels)

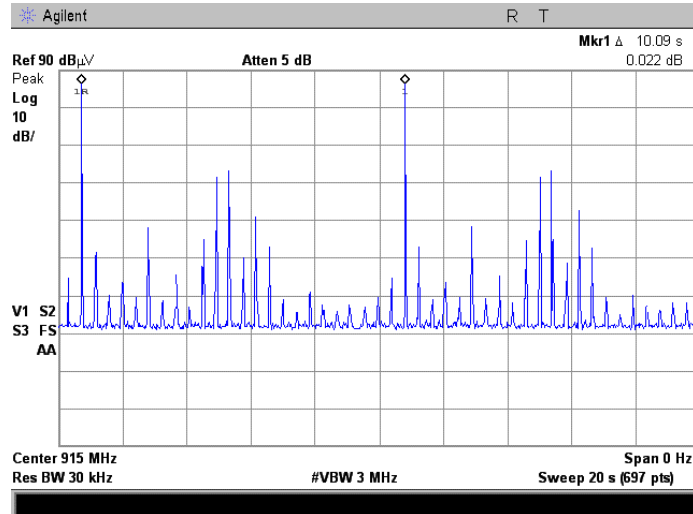


Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/19/2011		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 38 %	Power Supply: Battery
Remarks:			

Plot 7.4.3 Single transmission duration in wide channel mode (86 channels)

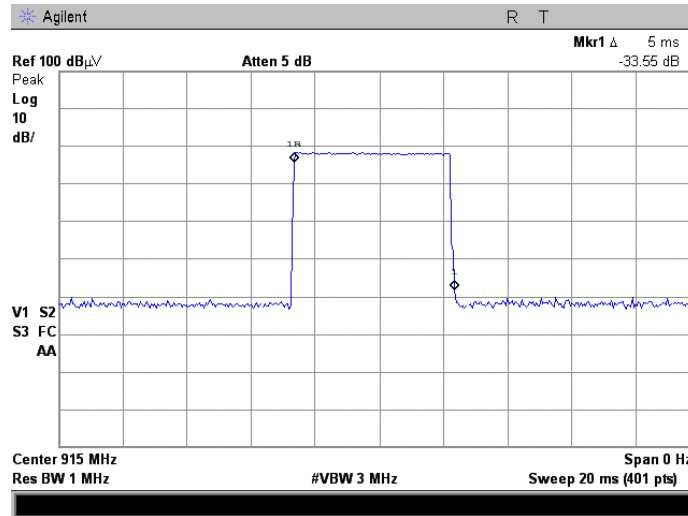

Plot 7.4.4 Single transmission period in wide channel mode (86 channels)

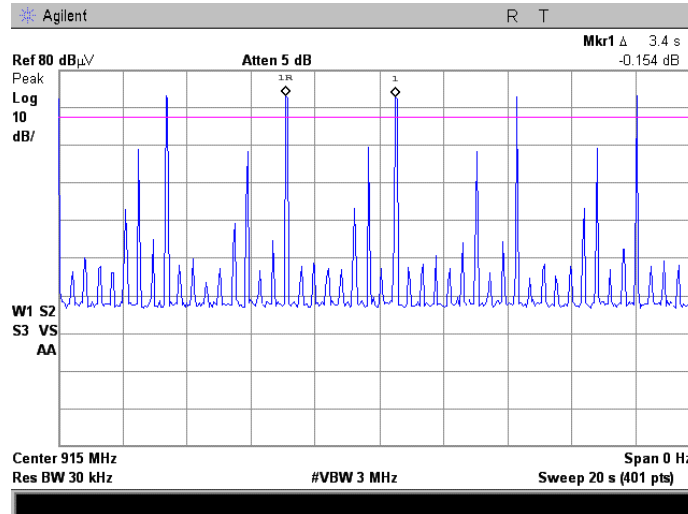

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	1.0	30.0	125.2	
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0 (<75 hopping channels)	122.2 (<75 hopping channels)	6.0*
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{(30 \times P \times G)/r}$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

** - The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.



HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

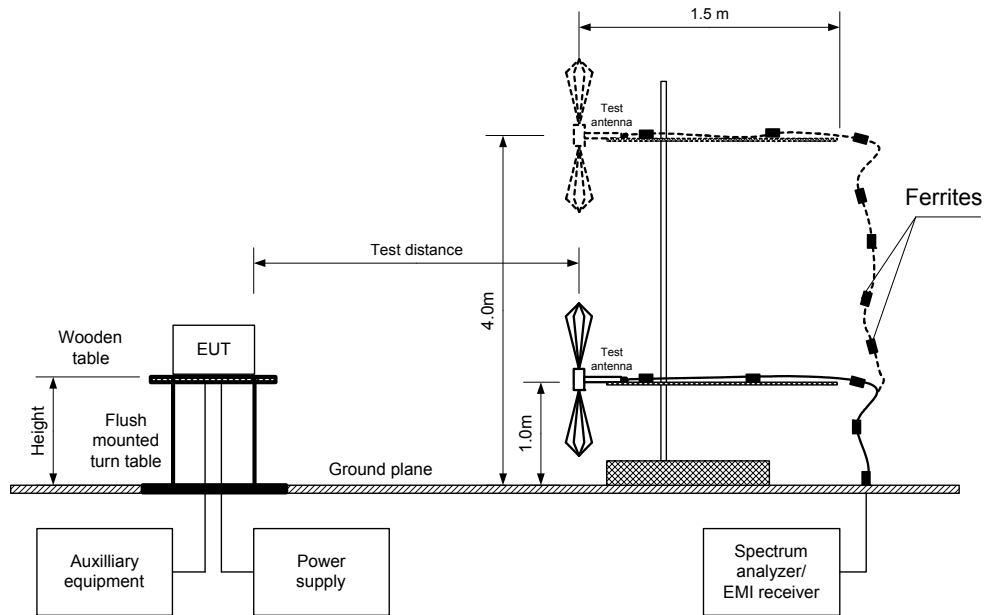



HERMON LABORATORIES

Test specification:		Section 15.247(b), RSS-210 section A8.4(1), Peak output power			
Test procedure:		Public notice DA 00-705			
Test mode:		Compliance		Verdict: PASS	
Date(s):		8/15/2011 - 9/13/2011			
Temperature: 22 °C		Air Pressure: 1008 hPa		Relative Humidity: 47 %	
Power Supply:		Battery			
Remarks:					

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY: 902-928 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 MODULATION: FSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 FREQUENCY HOPPING: Disabled
 FHSS CONFIGURATION: 86 channels

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
Bit rate 9600 bps									
902.3	109.88	Vert	1.0	231	0.5	14.18	30.0	-15.82	Pass
914.9	110.78	Vert	1.0	206	0.5	15.08	30.0	-14.92	Pass
927.8	110.58	Vert	1.0	206	0.5	14.88	30.0	-15.12	Pass
Bit rate 19200 bps									
902.3	111.30	Vert	1.0	231	0.5	15.60	30.0	-14.40	Pass
914.9	110.48	Vert	1.0	206	0.5	14.78	30.0	-15.22	Pass
927.8	110.81	Vert	1.0	206	0.5	15.11	30.0	-14.89	Pass
Bit rate 38400 bps									
902.3	111.45	Vert	1.0	231	0.5	15.75	30.0	-14.25	Pass
914.9	110.92	Vert	1.0	206	0.5	15.22	30.0	-14.78	Pass
927.8	110.69	Vert	1.0	206	0.5	14.99	30.0	-15.01	Pass
Bit rate 115200 bps									
902.3	111.56	Vert	1.0	231	0.5	15.86	30.0	-14.14	Pass
914.9	110.88	Vert	1.0	206	0.5	15.18	30.0	-14.82	Pass
927.8	110.79	Vert	1.0	206	0.5	15.09	30.0	-14.91	Pass

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.5.2 Peak output power test results (continued)

FHSS CONFIGURATION:

240 channels

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
Bit rate 9600 bps									
904.0	110.95	Vert	1.0	218	0.5	15.25	30.0	-14.75	Pass
915.0	111.21	Vert	1.0	229	0.5	15.51	30.0	-14.49	Pass
927.9	109.67	Vert	1.0	198	0.5	13.97	30.0	-16.03	Pass
Bit rate 19200 bps									
904.0	110.62	Vert	1.0	218	0.5	14.92	30.0	-15.08	Pass
915.0	110.79	Vert	1.0	229	0.5	15.09	30.0	-14.91	Pass
927.9	109.68	Vert	1.0	198	0.5	13.98	30.0	-16.02	Pass
Bit rate 38400 bps									
904.0	110.61	Vert	1.0	218	0.5	14.91	30.0	-15.09	Pass
915.0	110.48	Vert	1.0	229	0.5	14.78	30.0	-15.22	Pass
927.9	109.96	Vert	1.0	198	0.5	14.26	30.0	-15.74	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power - specification limit.

Note: Maximum peak output power was obtained at Unom input power voltage.

Reference numbers of test equipment used

HL 0415	HL 0521	HL 0583	HL 0604	HL 0812	HL 1425	HL 2871	HL 3623
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.1 Field strength of carrier at low frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps
ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 902.200 MHz
109.80 dBµV/m

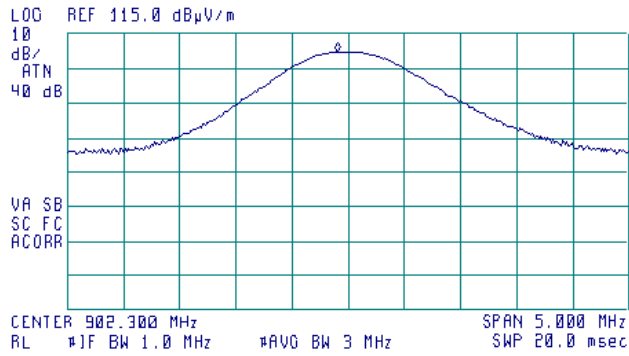


Plot 7.5.2 Field strength of carrier at low frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 19200 bps
ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 902.225 MHz
111.30 dBµV/m

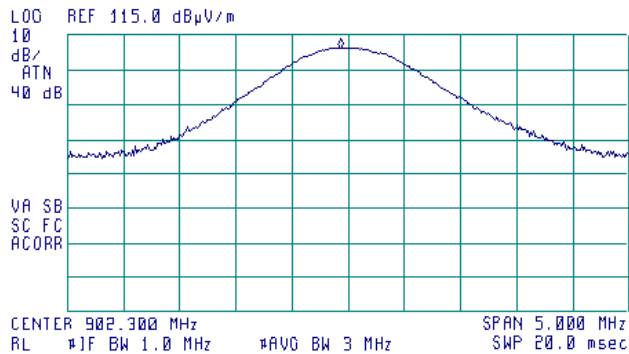



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.3 Field strength of carrier at low frequency

CONFIGURATION: FHSS 86 channels
 BIT RATE: 38400 bps
 ANTENNA POLARIZATION: Vertical and Horizontal




ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 902.238 MHz
 111.45 dBμV/m

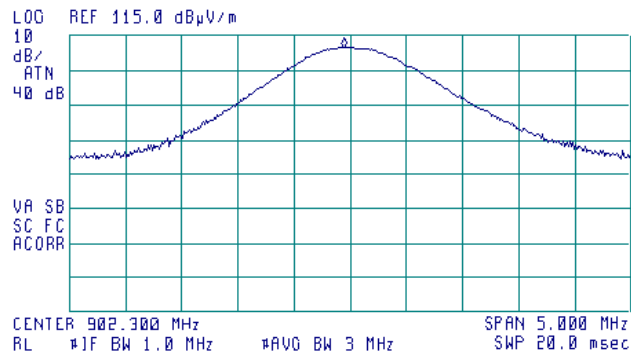

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			


Plot 7.5.4 Field strength of carrier at low frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 115200 bps
ANTENNA POLARIZATION: Vertical and Horizontal

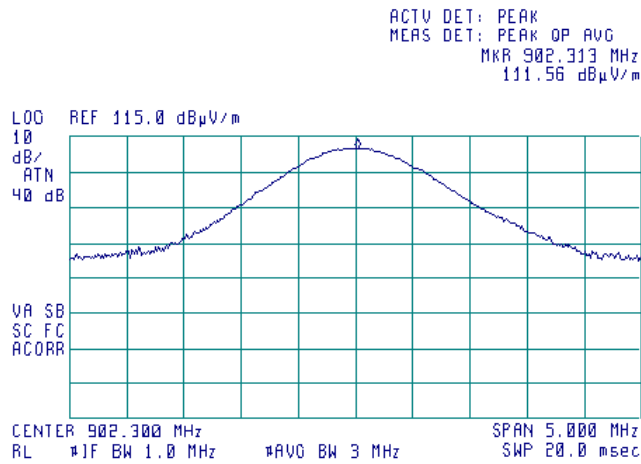

Plot 7.5.5 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps
ANTENNA POLARIZATION: Vertical and Horizontal

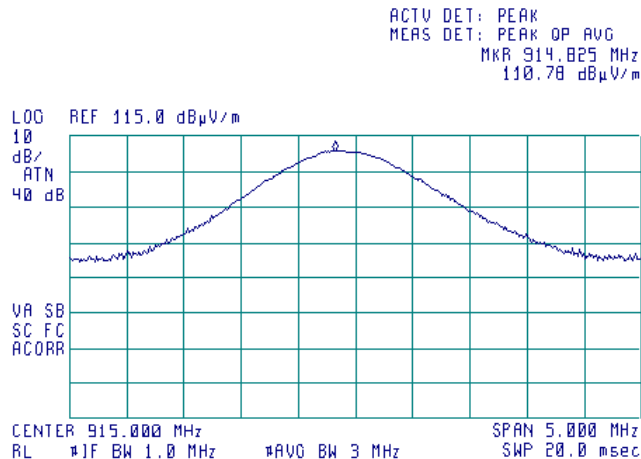



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.6 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 86 channels
 BIT RATE: 19200 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 914.775 MHz
 110.48 dBµV/m

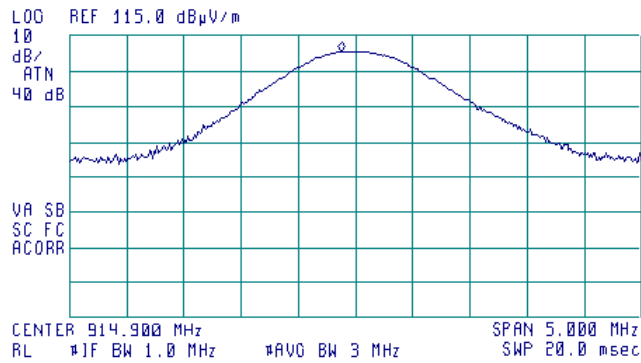


Plot 7.5.7 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 86 channels
 BIT RATE: 38400 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 914.800 MHz
 110.92 dBµV/m

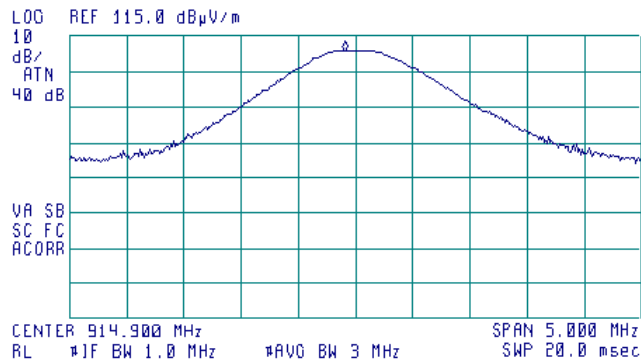



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.8 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 86 channels
 BIT RATE: 115200 bps
 ANTENNA POLARIZATION: Vertical and Horizontal




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 914.863 MHz
 110.88 dBµV/m

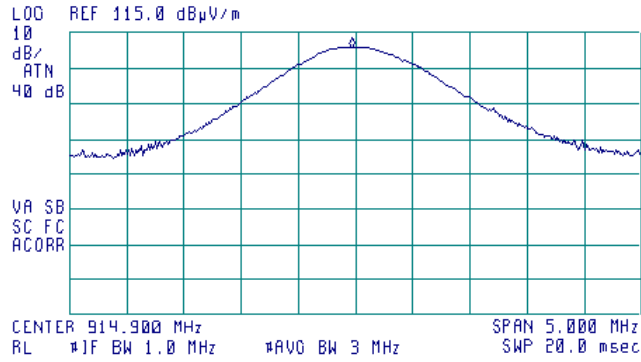

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			


Plot 7.5.9 Field strength of carrier at high frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps
ANTENNA POLARIZATION: Vertical and Horizontal

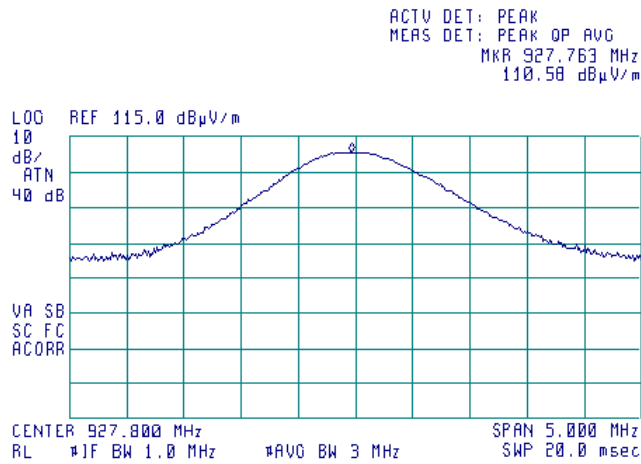

Plot 7.5.10 Field strength of carrier at high frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 19200 bps
ANTENNA POLARIZATION: Vertical and Horizontal

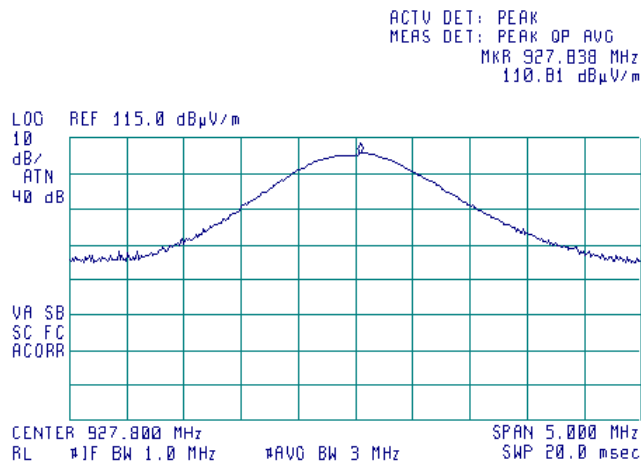




HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			


Plot 7.5.11 Field strength of carrier at high frequency

CONFIGURATION: FHSS 86 channels
 BIT RATE: 38400 bps
 ANTENNA POLARIZATION: Vertical and Horizontal

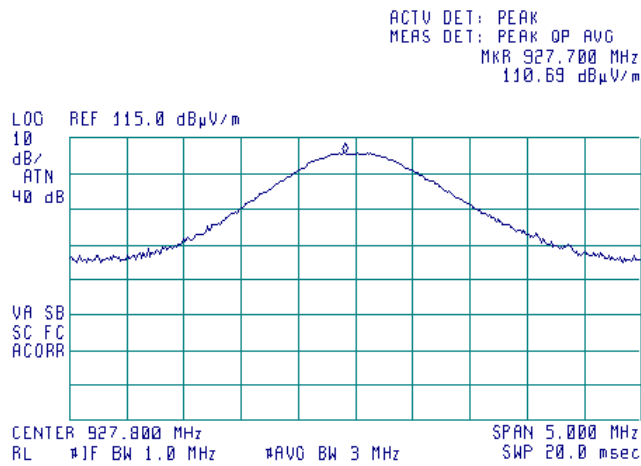

Plot 7.5.12 Field strength of carrier at high frequency


CONFIGURATION: FHSS 86 channels
 BIT RATE: 115200 bps
 ANTENNA POLARIZATION: Vertical and Horizontal

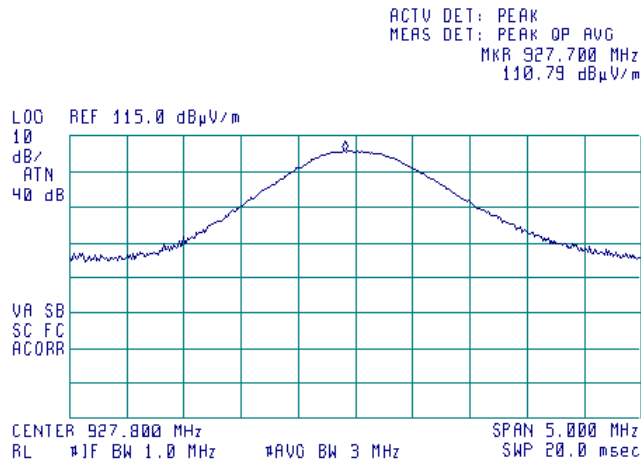

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			


Plot 7.5.13 Field strength of carrier at low frequency

CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps
ANTENNA POLARIZATION: Vertical & Horizontal

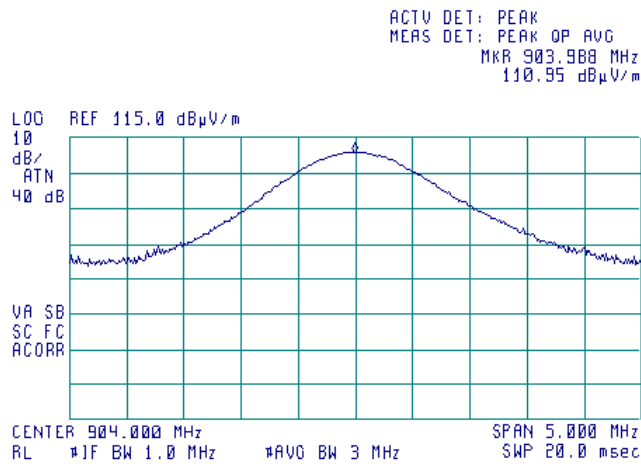

Plot 7.5.14 Field strength of carrier at low frequency

CONFIGURATION: FHSS 240 channels
BIT RATE: 19200 bps
ANTENNA POLARIZATION: Vertical and Horizontal

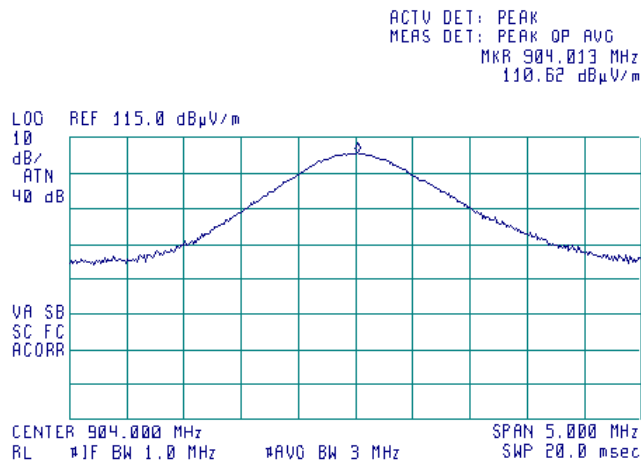



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.15 Field strength of carrier at low frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 38400 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 903.950 MHz
 110.61 dBµV/m

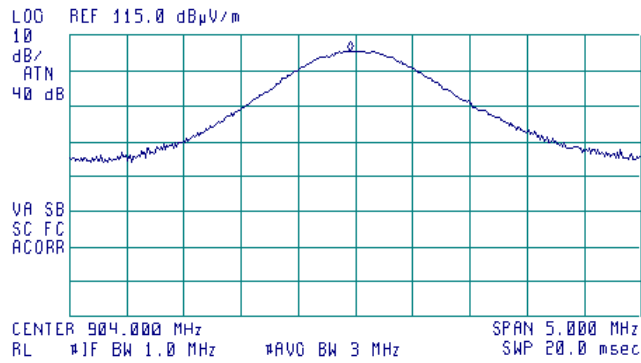



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.16 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 9600 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 915.000 MHz
 111.21 dBµV/m

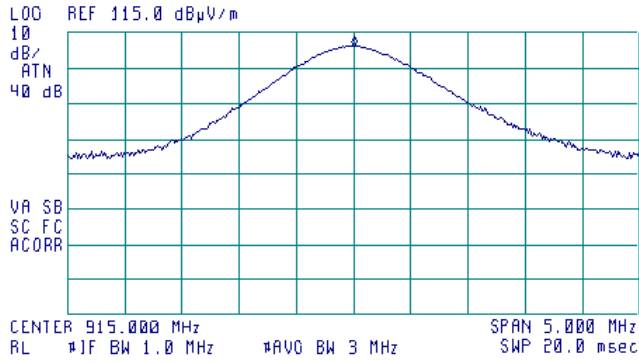


Plot 7.5.17 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 19200 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 915.025 MHz
 110.79 dBµV/m

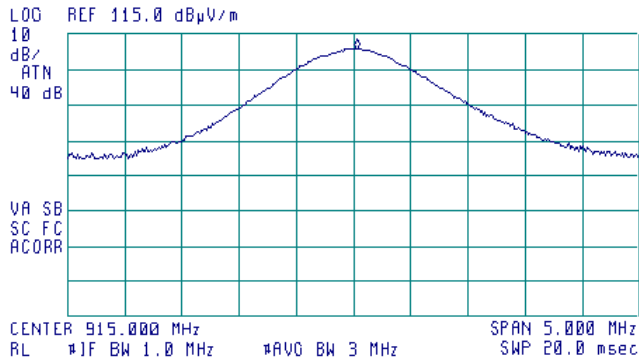



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.18 Field strength of carrier at mid frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 38400 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 915.000 MHz
 110.48 dBµV/m

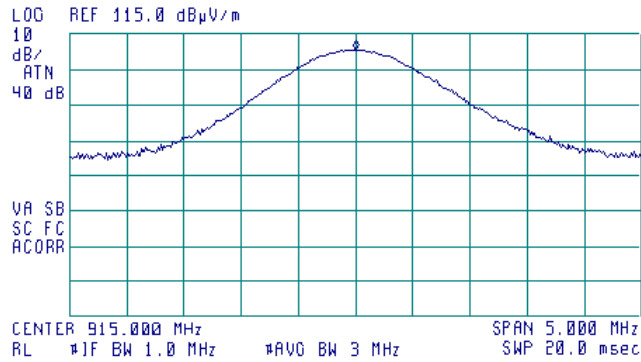




HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			


Plot 7.5.19 Field strength of carrier at high frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 9600 bps
 ANTENNA POLARIZATION: Vertical and Horizontal

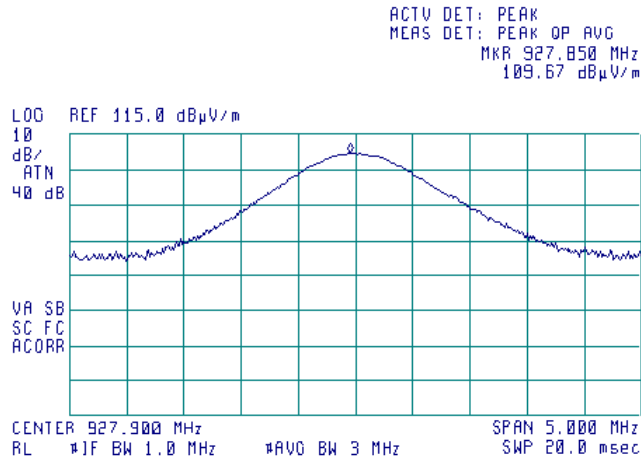

Plot 7.5.20 Field strength of carrier at high frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 19200 bps
 ANTENNA POLARIZATION: Vertical and Horizontal

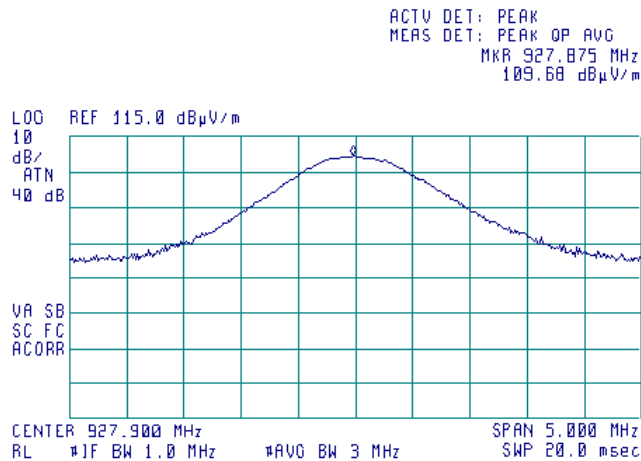



HERMON LABORATORIES


Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 9/13/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.21 Field strength of carrier at high frequency

CONFIGURATION: FHSS 240 channels
 BIT RATE: 38400 bps
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 927.863 MHz
 109.96 dBµV/m

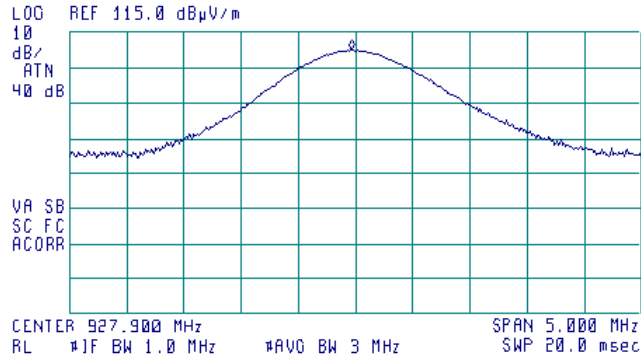

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

7.6 Band edge radiated emissions

7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μ V/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup



Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance		Verdict: PASS	
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.6.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
DETECTOR USED: Peak
MODULATION: FSK
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
RESOLUTION BANDWIDTH: ≥ 1% of the span
VIDEO BANDWIDTH: ≥ RBW
OPERATIONAL MODE: FHSS 86 channels

Frequency, MHz	Bit rate, kbps	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled							
902.000	9600	69.59	97.14	27.55	20.0	7.55	Pass
928.000	9600	59.13	96.42	37.29		17.29	
902.000	19200	70.96	97.14	26.18		6.18	
928.000	19200	66.65	96.42	29.77		9.77	
902.000	38400	71.27	97.14	25.87		5.87	
928.000	38400	75.93	96.42	20.49		0.49	
902.000	115200	70.68	97.14	26.46		6.46	
928.000	115200	65.95	96.42	30.47		10.47	
Frequency hopping enabled							
902.000	9600	69.83	97.14	27.31	20.0	7.31	Pass
928.000	9600	57.18	96.42	39.24		19.24	
902.000	19200	69.29	97.14	27.85		7.85	
928.000	19200	55.52	96.42	40.90		20.90	
902.000	38400	69.96	97.14	27.18		7.18	
928.000	38400	55.51	96.42	40.91		20.91	
902.000	115200	69.58	97.14	27.56		7.56	
928.000	115200	56.41	96.42	40.01		20.01	

OPERATIONAL MODE: FHSS 240 channels

Frequency, MHz	Bit rate, bps	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled							
902.000	9600	36.97	97.14	60.17	20.0	40.17	Pass
928.000	9600	69.35	96.42	27.07		7.07	
902.000	19200	41.24	97.14	55.90		35.90	
928.000	19200	70.33	96.42	26.09		6.09	
902.000	38400	38.12	97.14	59.02		39.02	
928.000	38400	68.68	96.42	27.74		7.74	
Frequency hopping enabled							
902.000	9600	40.66	96.59	55.93	20.0	35.93	Pass
928.000	9600	55.18	97.23	42.05		22.05	
902.000	19200	39.77	96.59	56.82		36.82	
928.000	19200	62.09	97.23	35.14		15.14	
902.000	38400	40.32	96.59	56.27		36.27	
928.000	38400	67.63	97.23	29.60		9.60	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used


HL 0337	HL 1451	HL 3001				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.1 The highest emission level within the assigned band at low carrier frequency

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps

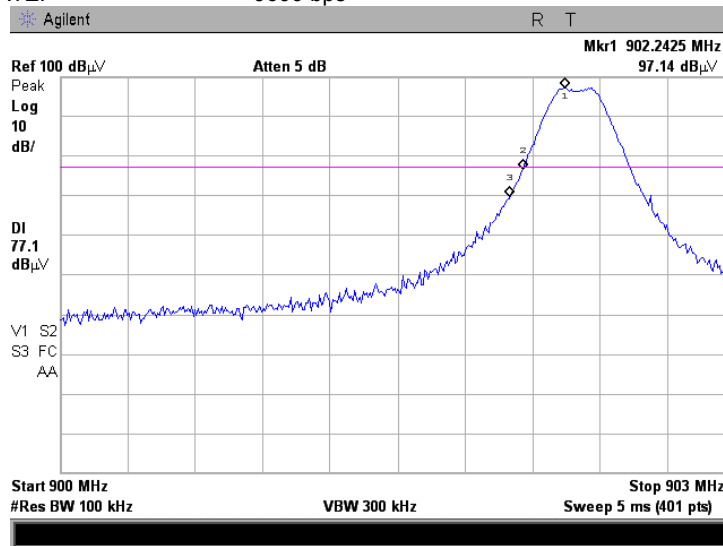

Plot 7.6.2 The highest band edge emission at low carrier frequency with hopping function disabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps

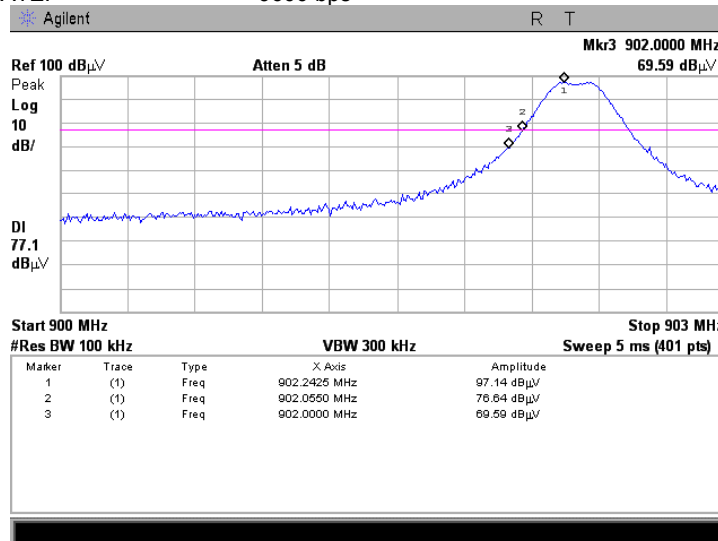

Test specification:		Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function disabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 19200 bps

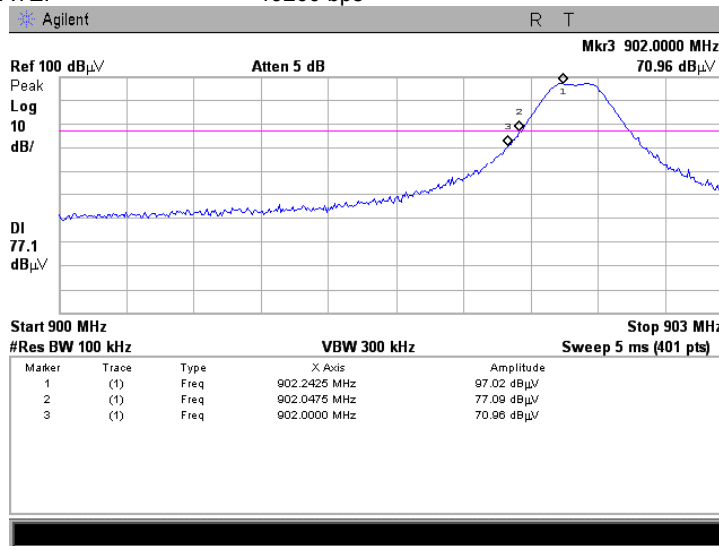

Plot 7.6.4 The highest band edge emission at low carrier frequency with hopping function disabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 38400 bps

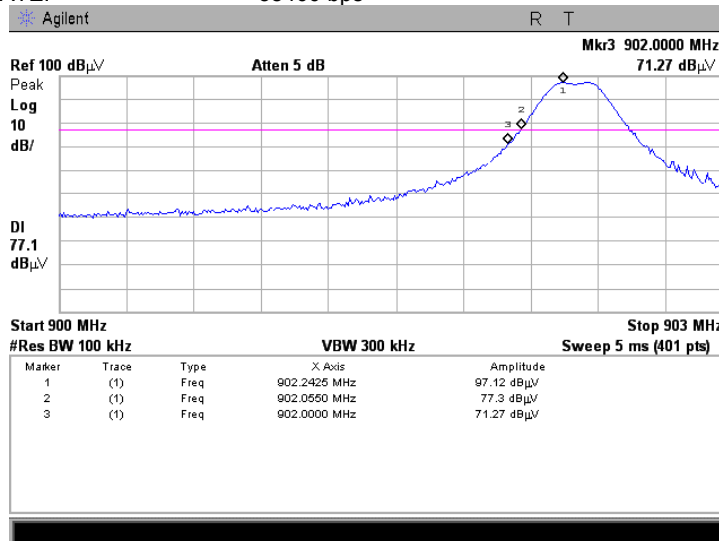

Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.5 The highest band edge emission at low carrier frequency with hopping function disabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 115200 bps

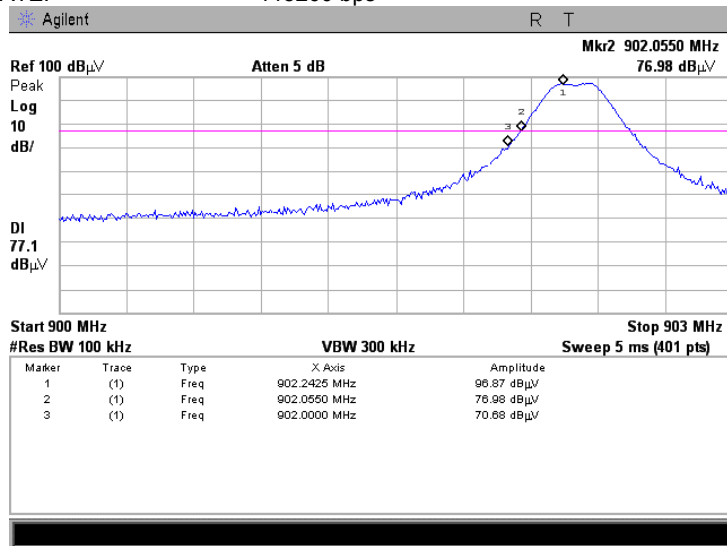

Plot 7.6.6 The highest emission level within the assigned band at high carrier frequency


CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps

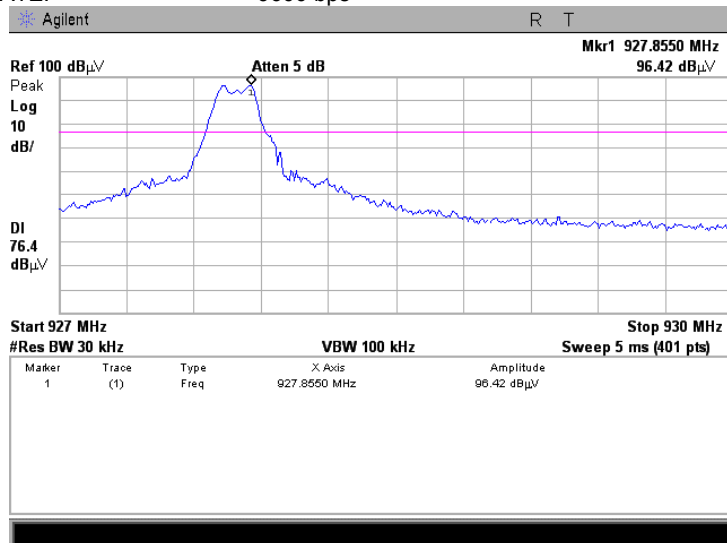

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.7 The highest band edge emission at high carrier frequency with hopping function disabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps

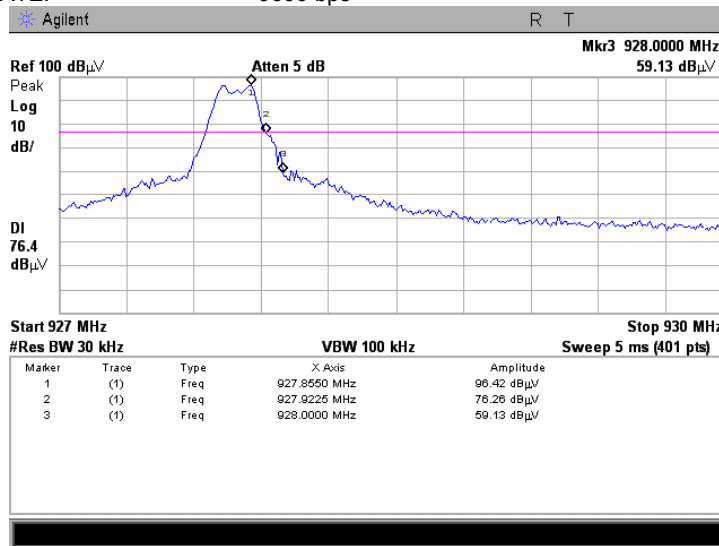

Plot 7.6.8 The highest band edge emission at high carrier frequency with hopping function disabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 19200 bps

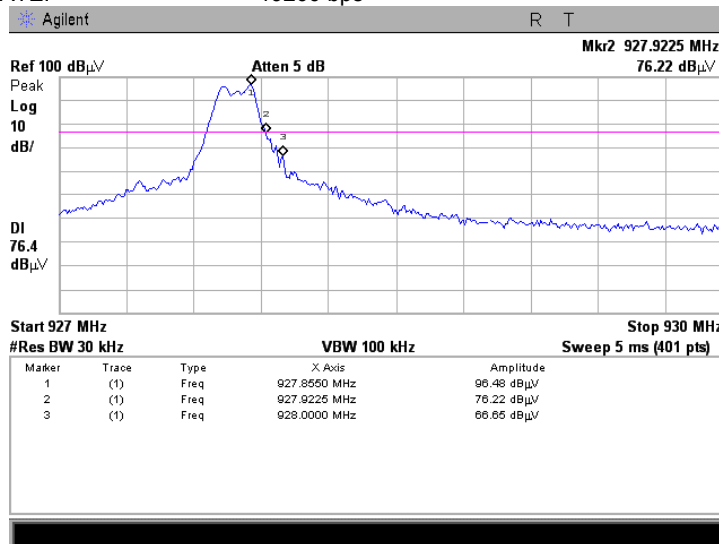

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.9 The highest band edge emission at high carrier frequency with hopping function disabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 38400 bps

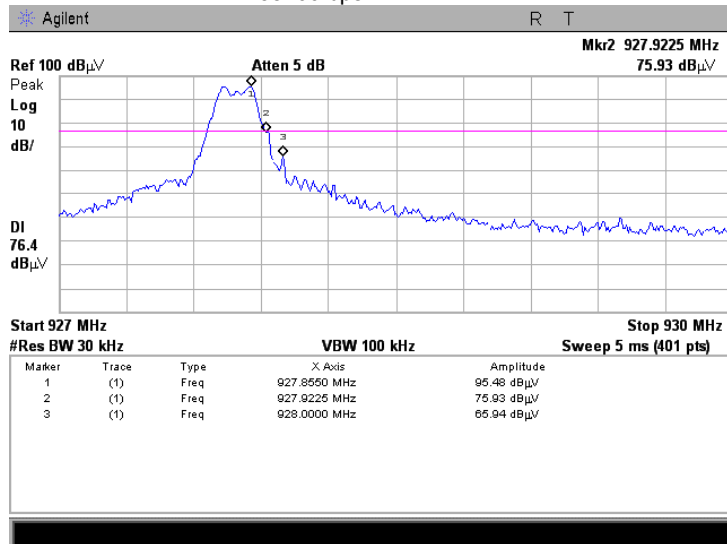

Plot 7.6.10 The highest band edge emission at high carrier frequency with hopping function disabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 115200 bps

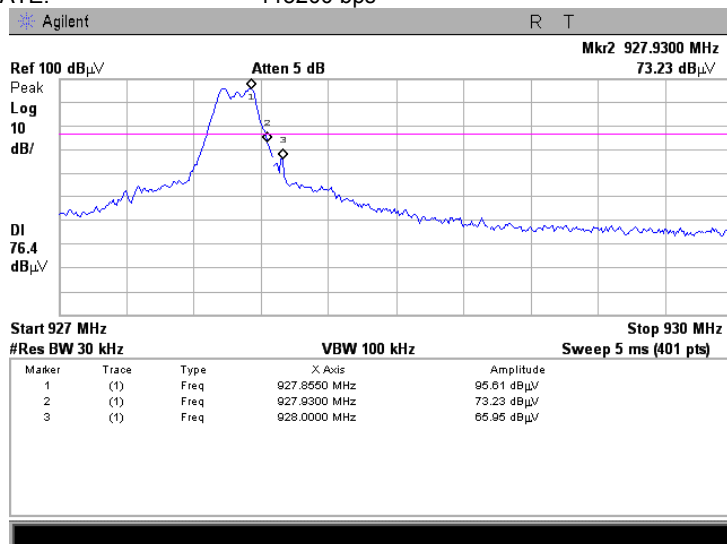

Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.11 The highest band edge emission at low carrier frequency with hopping function enabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps

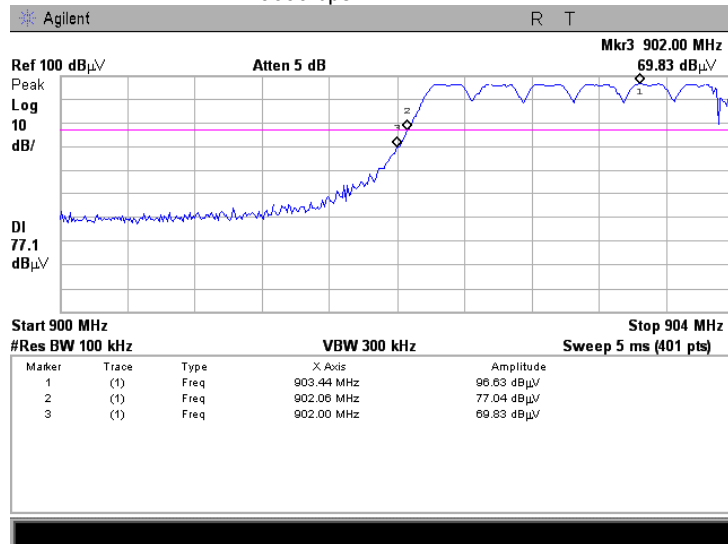

Plot 7.6.12 The highest band edge emission at low carrier frequency with hopping function enabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 19200 bps

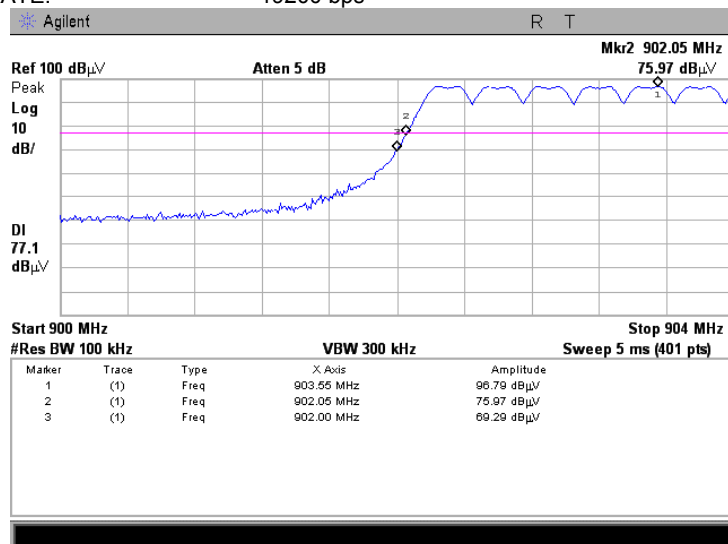

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.13 The highest band edge level at low carrier frequency with hopping function enabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 38400 bps

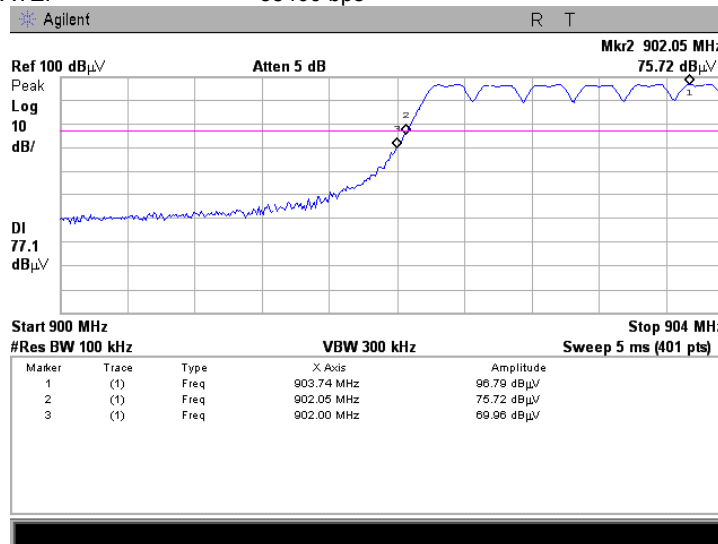

Plot 7.6.14 The highest band edge level at low carrier frequency with hopping function enabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 115200 bps

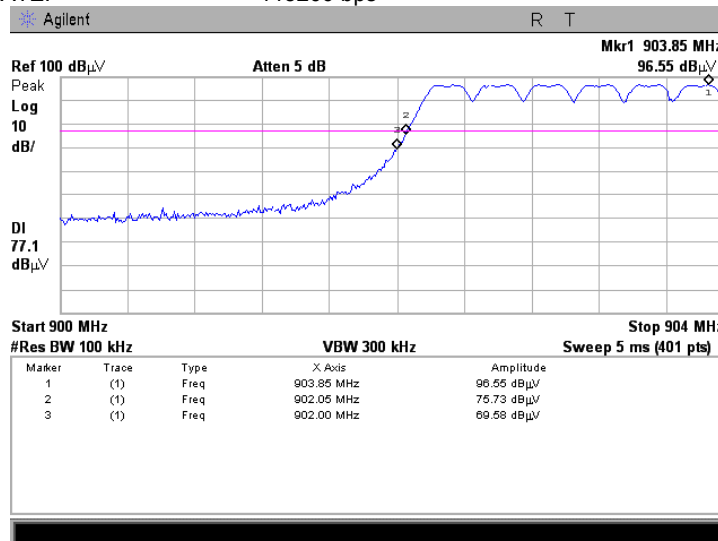

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.15 The highest band edge level at high carrier frequency with hopping function enabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 9600 bps

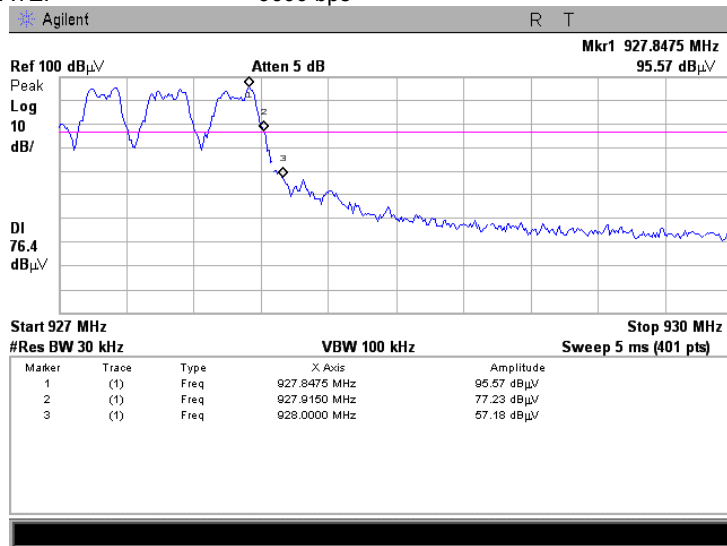

Plot 7.6.16 The highest band edge level at high carrier frequency with hopping function enabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 19200 bps

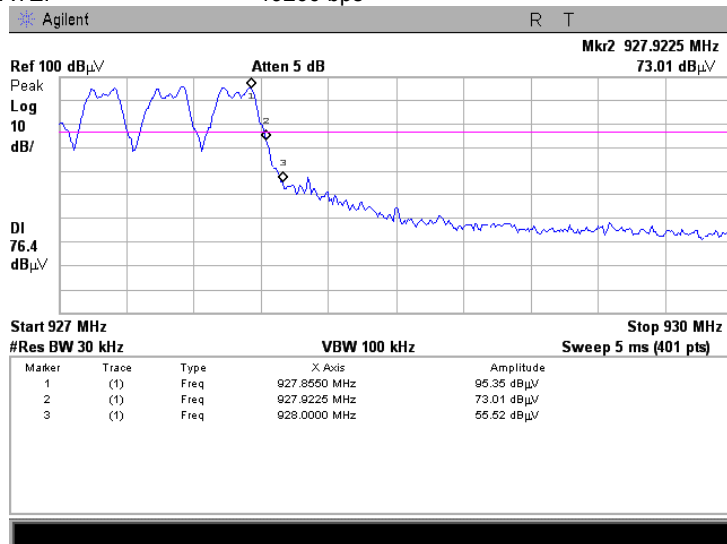

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.17 The highest band edge level at high carrier frequency with hopping function enabled

CONFIGURATION: FHSS 86 channels
BIT RATE: 38400 bps

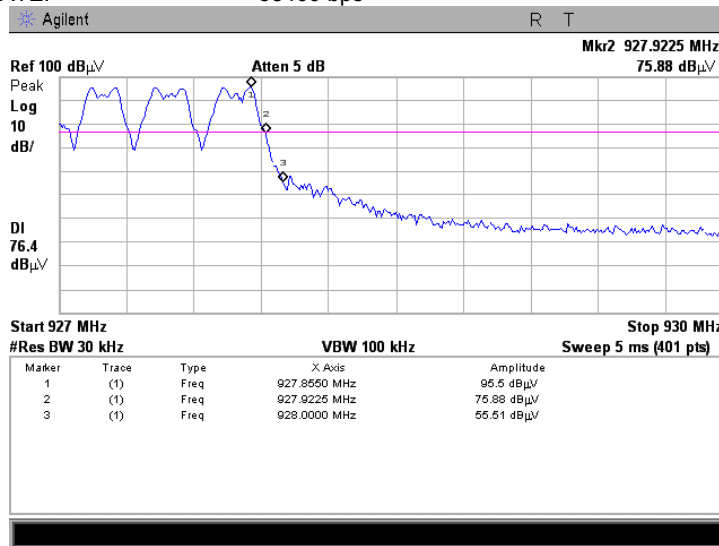

Plot 7.6.18 The highest band edge level at high carrier frequency with hopping function enabled


CONFIGURATION: FHSS 86 channels
BIT RATE: 115200 bps

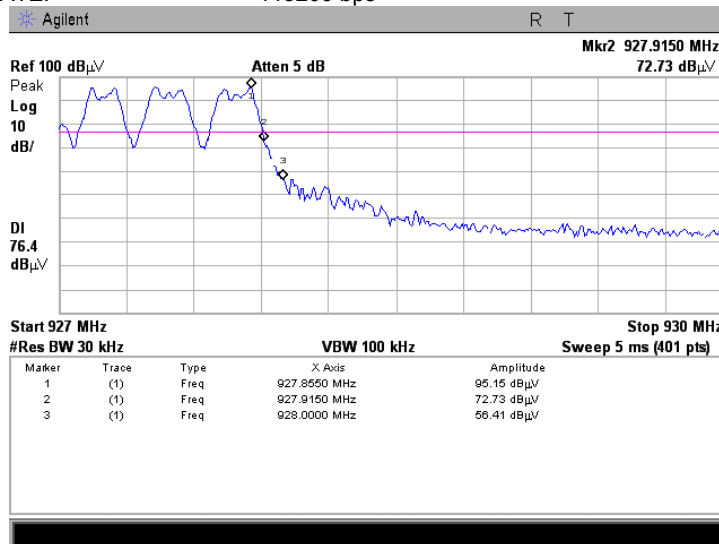

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.6.19 The highest emission level within the assigned band at low carrier frequency


CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps

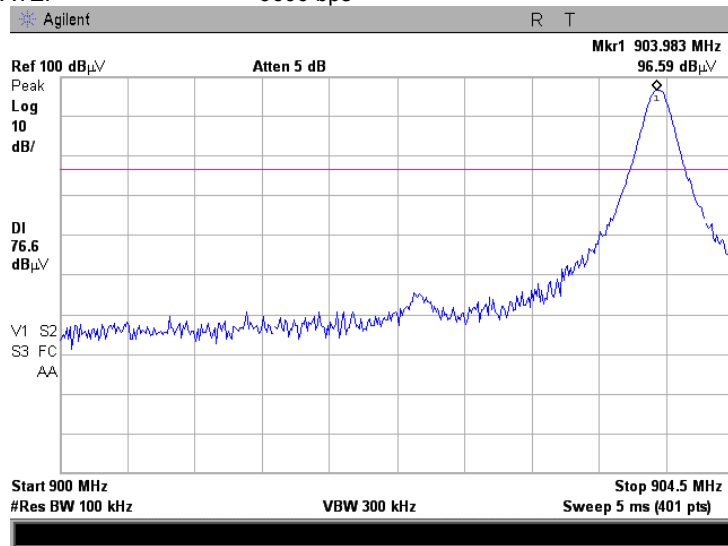

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.20 The highest band edge emission at low carrier frequency with hopping function disabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps

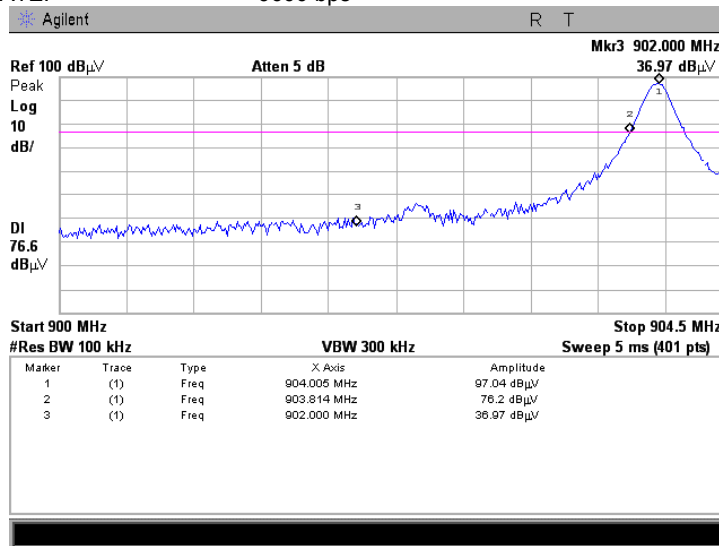

Plot 7.6.21 The highest band edge emission at low carrier frequency with hopping function disabled


CONFIGURATION: FHSS 240 channels
BIT RATE: 19200 bps

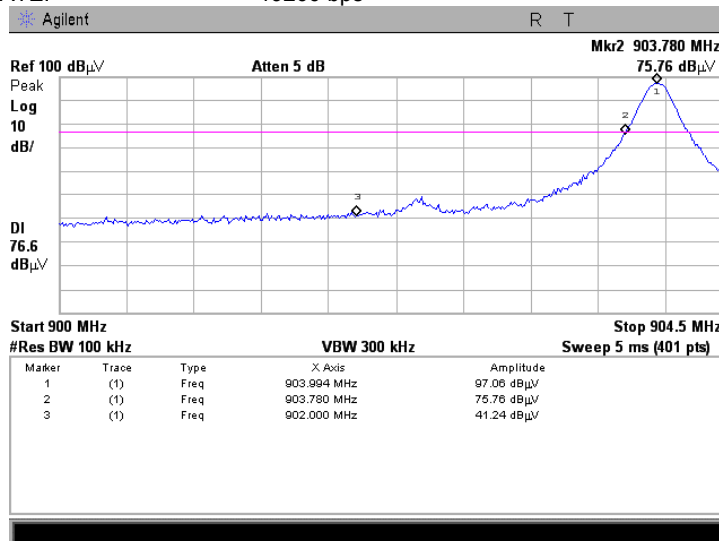

Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.22 The highest band edge emission at low carrier frequency with hopping function disabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 38400 bps

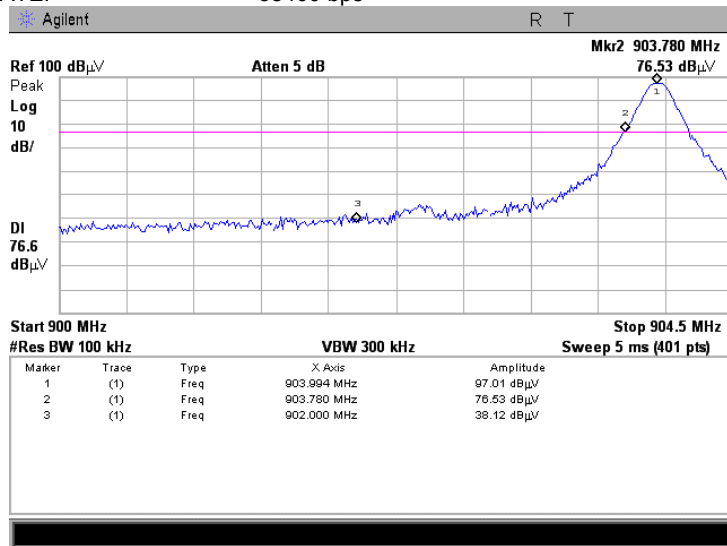

Plot 7.6.23 The highest emission level within the assigned band at high carrier frequency


CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps

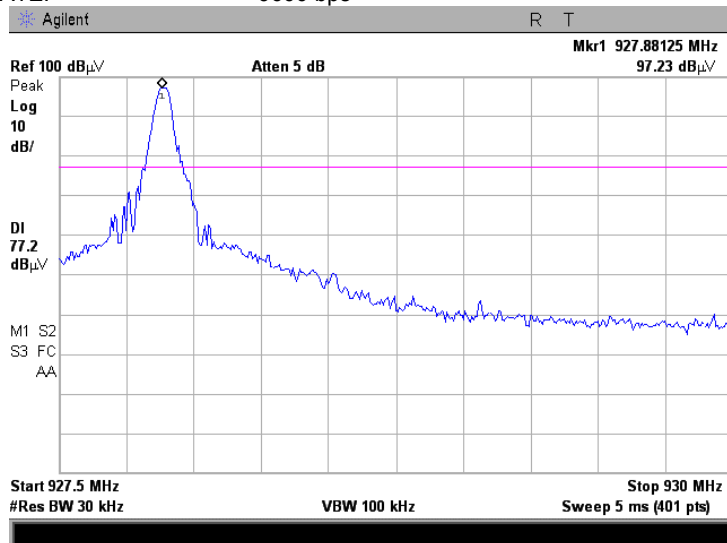

Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.24 The highest band edge emission at high carrier frequency with hopping function disabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps

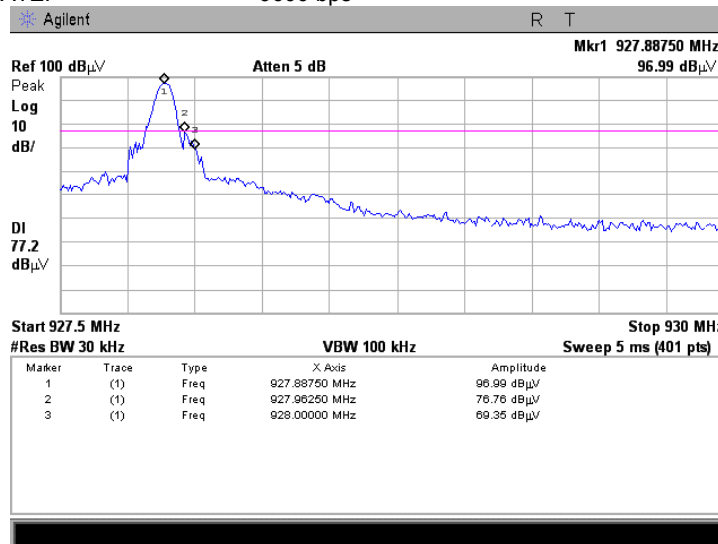

Plot 7.6.25 The highest band edge emission at high carrier frequency with hopping function disabled


CONFIGURATION: FHSS 240 channels
BIT RATE: 19200 bps

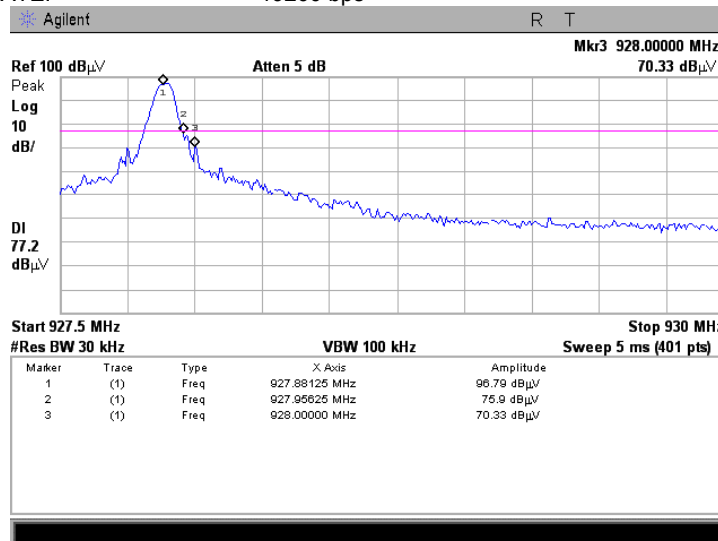

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.6.26 The highest band edge emission at high carrier frequency with hopping function disabled


CONFIGURATION: FHSS 240 channels
BIT RATE: 38400 bps

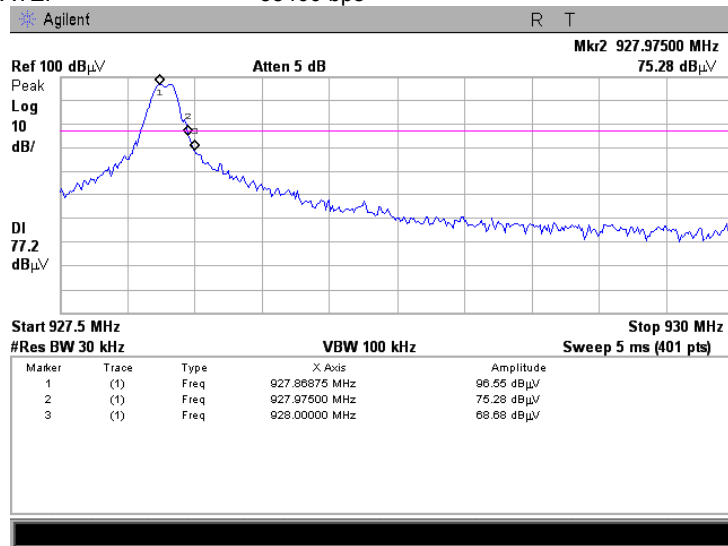

Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.27 The highest band edge emission at low carrier frequency with hopping function enabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps

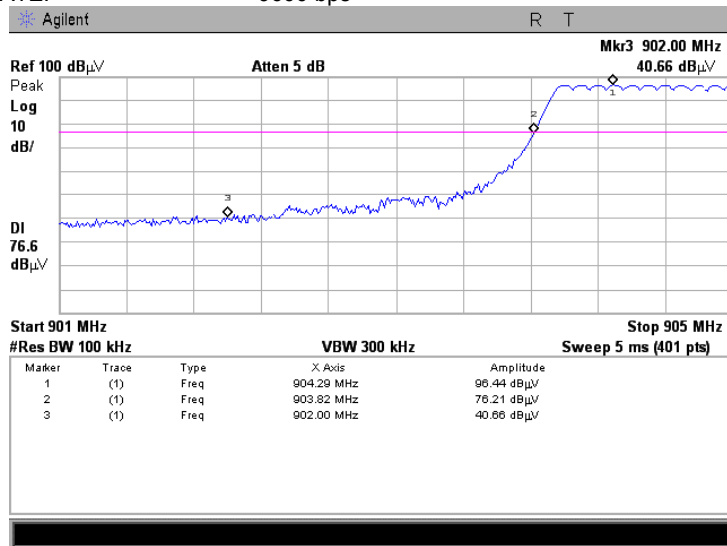

Plot 7.6.28 The highest band edge emission at low carrier frequency with hopping function enabled


CONFIGURATION: FHSS 240 channels
BIT RATE: 19200 bps

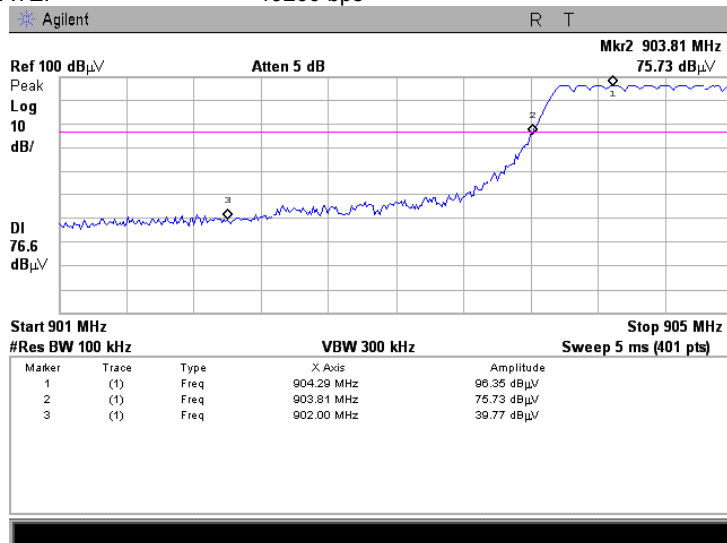

Test specification: Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/22/2011			
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.29 The highest band edge emission at low carrier frequency with hopping function enabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 38400 bps

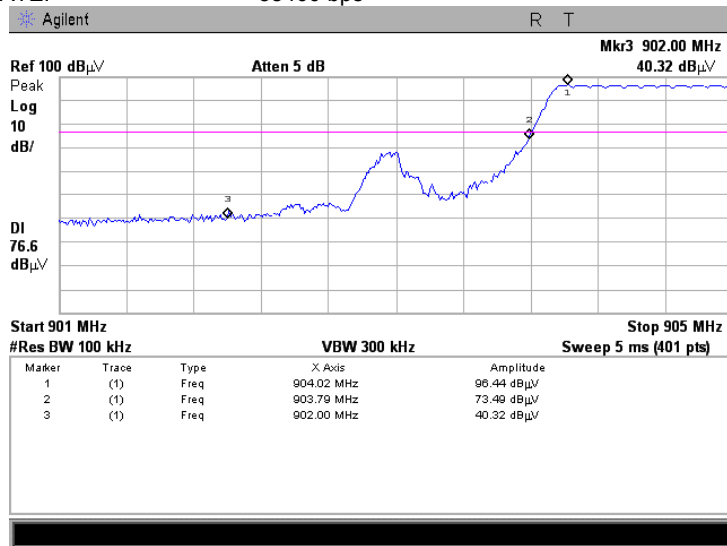

Plot 7.6.30 The highest band edge level at high carrier frequency with hopping function enabled


CONFIGURATION: FHSS 240 channels
BIT RATE: 9600 bps

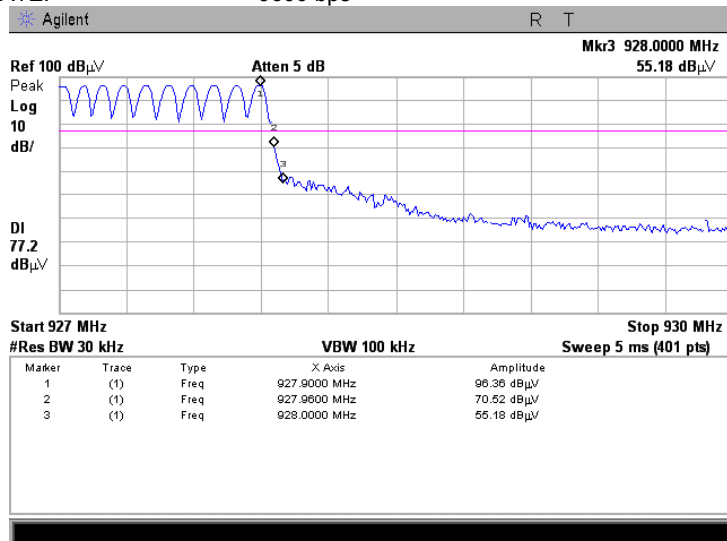

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/22/2011		
Temperature: 23.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.6.31 The highest band edge level at high carrier frequency with hopping function enabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 19200 bps

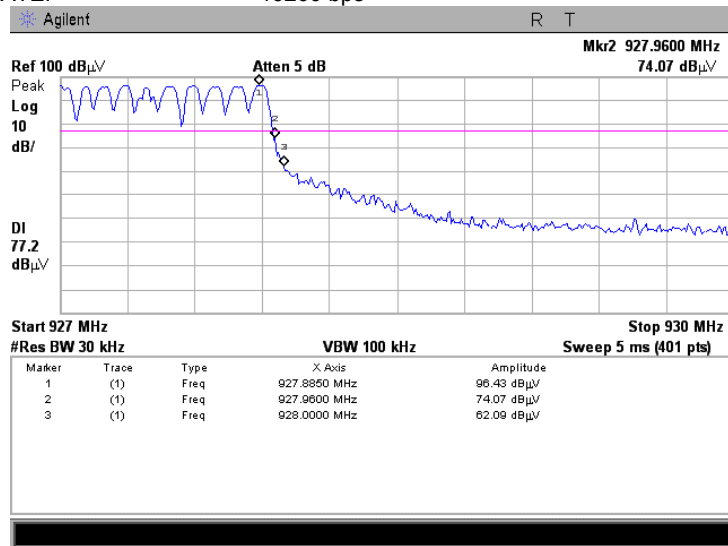

Plot 7.6.32 The highest band edge level at high carrier frequency with hopping function enabled

CONFIGURATION: FHSS 240 channels
BIT RATE: 38400 bps

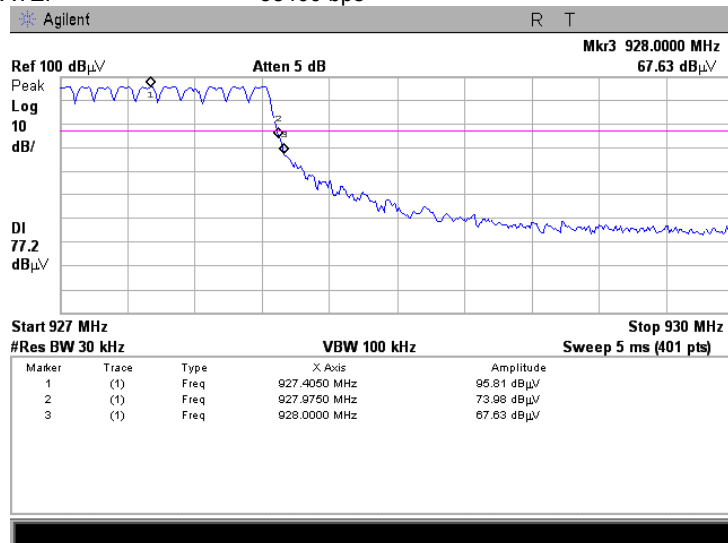

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(□V/m) ^{***}			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc ^{***}
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5 ^{**}	20.0
0.090 – 0.110	NA	108.5 – 106.8 ^{**}	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8 ^{**}	
0.490 – 1.705	NA	73.8 – 63.0 ^{**}	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


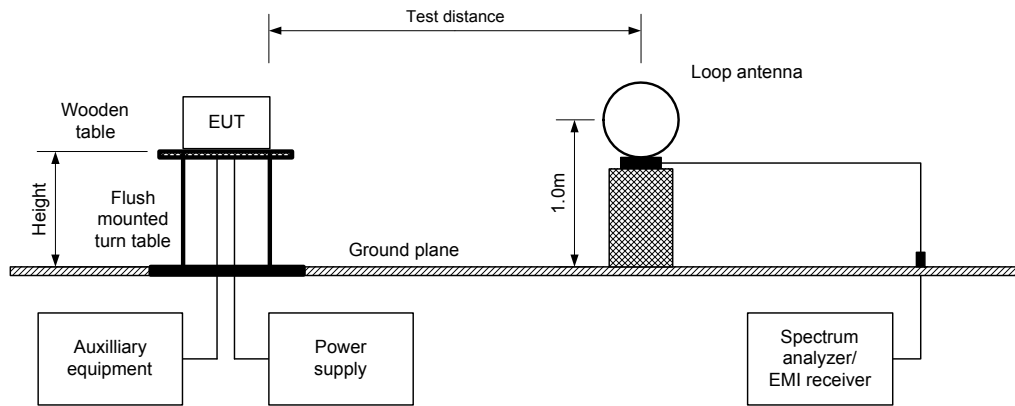


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



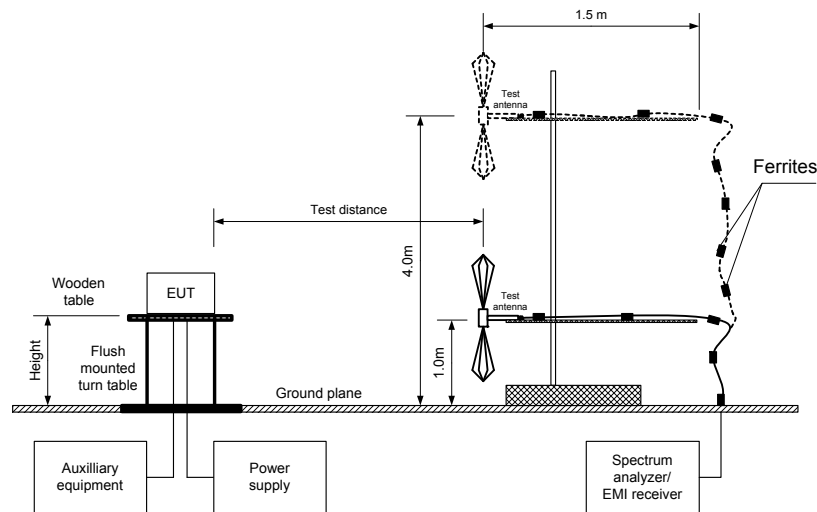

HERMON LABORATORIES

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode:	Compliance	Verdict:		PASS	
Date(s):	8/15/2011 - 8/31/2011				
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery		
Remarks:					

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY BAND: 902 - 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 9300 MHz
 TEST DISTANCE: 3 m
 MODULATION: FHSS
 MODULATING SIGNAL: PRBS
 BIT RATE: 115200 bps
 DUTY CYCLE: 1.14 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1804.705	56.69	Hor	1.4	10	108.91	52.22	20.0	32.22	Pass
6315.712	50.53	Hor	1.5	0		58.38		38.38	
7218.850	51.86	Hor	1.4	10		57.05		37.05	
Mid carrier frequency									
1829.670	54.95	Hor	1.4	10	110.37	55.42	20.0	35.42	Pass
5489.025	48.36	Hor	1.3	0		62.01		42.01	
6403.862	47.18	Hor	1.5	0		63.19		43.19	
High carrier frequency									
1855.475	60.72	Hor	1.0	0	110.06	49.34	20.0	29.34	Pass
5566.412	46.04	Hor	1.3	0		64.02		44.02	
6494.987	45.59	Hor	1.5	0		64.47		44.47	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9300 MHz
 TEST DISTANCE: 3 m
 MODULATION: FHSS
 MODULATING SIGNAL: PRBS
 BIT RATE: 115200 bps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency MHz	Antenna			Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz)				Verdict
	Polarization	Height m	Azimuth degrees	Measured dB(μV/m)	Limit, IB(μV/m)	Margin, dB**	Measured dB(μV/m)	Calculated dB(μV/m)	Limit, IB(μV/m)	Margin dB***	
Low carrier frequency											
2706.808	Hor	1.9	0	65.63	74.0	-8.37	64.77	38.62	54.0	-15.38	Pass
3609.275	Hor	1.7	350	60.10	74.0	-13.90	57.98	31.83	54.0	-22.17	
4511.575	Hor	1.5	0	61.91	74.0	-12.09	48.59	22.44	54.0	-31.56	
5414.100	Hor	1.3	320	56.26	74.0	-17.74	52.48	26.33	54.0	-27.67	
8121.175	Hor	1.5	0	57.72	74.0	-16.28	51.43	25.28	54.0	-28.72	
Mid carrier frequency											
2744.800	Hor	1.9	0	63.70	74.0	-10.30	62.72	36.57	54.0	-17.43	Pass
3659.712	Hor	1.7	0	57.53	74.0	-16.47	51.97	25.82	54.0	-28.18	
4574.687	Hor	1.5	0	62.34	74.0	-11.66	45.61	19.46	54.0	-34.54	
7319.362	Hor	1.4	10	55.49	74.0	-18.51	46.35	20.2	54.0	-33.8	
8234.150	Hor	1.5	0	58.80	74.0	-15.20	45.92	19.77	54.0	-34.23	
High carrier frequency											
2783.387	Hor	1.9	0	63.56	74.0	-10.44	62.58	36.43	55.0	-18.57	Pass
3711.287	Hor	1.7	290	52.38	74.0	-21.62	49.19	23.04	56.0	-32.96	
4638.137	Hor	1.5	0	63.09	74.0	-10.91	44.41	18.26	57.0	-38.74	
7421.912	Hor	1.4	10	56.14	74.0	-17.86	41.19	15.04	58.0	-42.96	
8350.025	Hor	1.5	0	57.70	74.0	-16.3	46.34	20.19	59.0	-38.81	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
4.925	414	NA	NA	NA	-26.15

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$
 for pulse train longer than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode:	Compliance	Verdict:		PASS	
Date(s):	8/15/2011 - 8/31/2011				
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery		
Remarks:					

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FHSS
 MODULATING SIGNAL: PRBS
 BIT RATE: 115200 bps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency								
961.502	60.20	51.0	54.0	-3.0	Vert	1.0	179	Pass
Mid carrier frequency								
960.452	60.30	51.6	54.0	-2.4	Vert	1.0	179	Pass
High carrier frequency								
960.582	61.10	52.2	54.0	-2.8	Vert	1.0	179	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.7.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used


HL 0415	HL 0446	HL 0521	HL 0583	HL 0604	HL 0812	HL 1431	HL 2871
HL 3623							

Full description is given in Appendix A.

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and horizontal
 OPERATIONAL MODE: FHSS

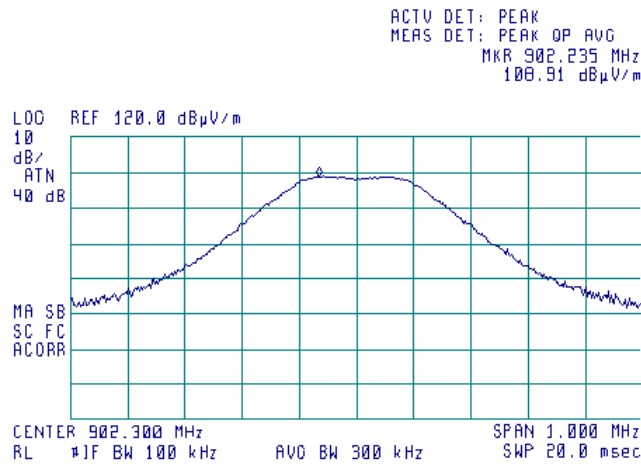

Plot 7.7.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and horizontal
 OPERATIONAL MODE: FHSS

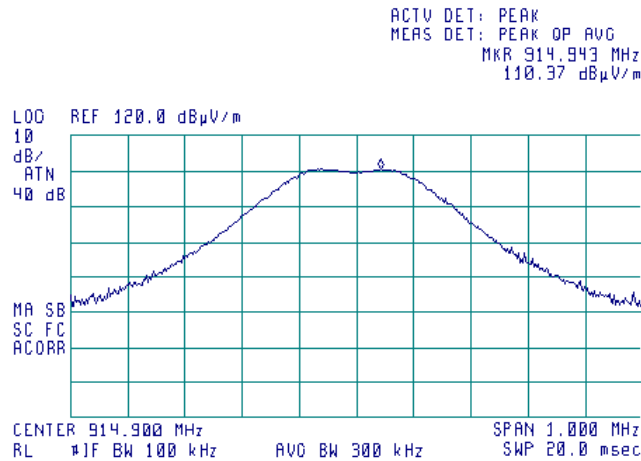



HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATIONAL MODE: FHSS




ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 927.838 MHz
110.06 dBµV/m

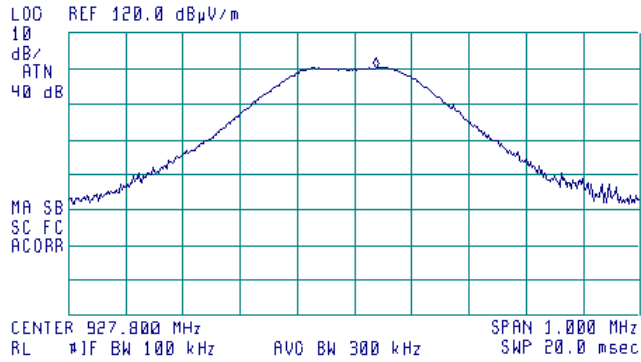

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.4 Radiated emission measurements from 9 to 150 kHz at the low, mid and high carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: FHSS

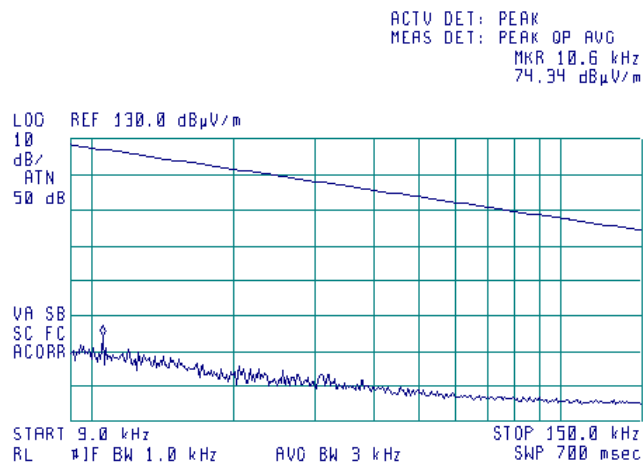

Plot 7.7.5 Radiated emission measurements from 0.15 to 30 MHz at the low, mid and high carrier frequency


TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: FHSS

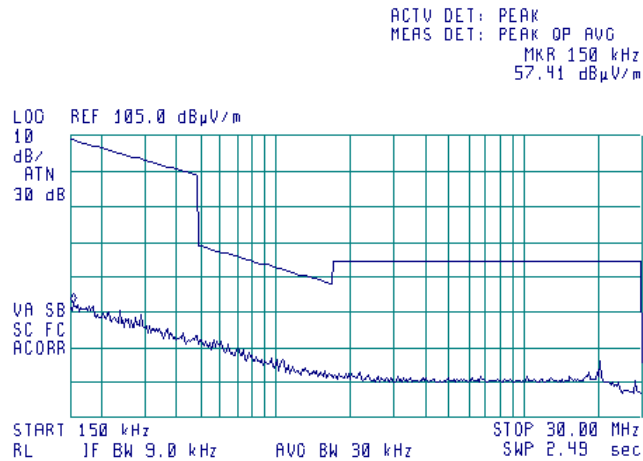

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.6 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS

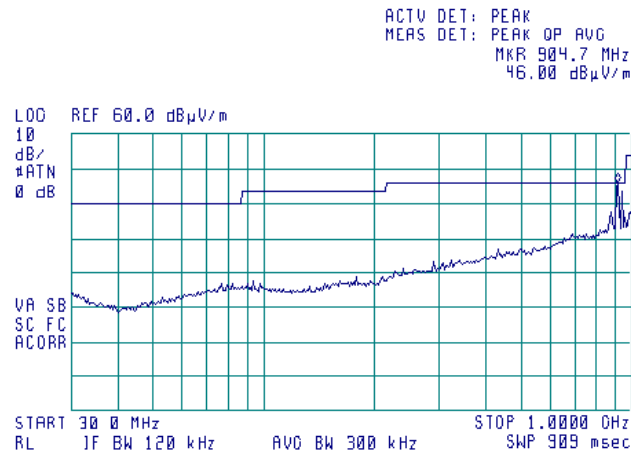

Plot 7.7.7 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS

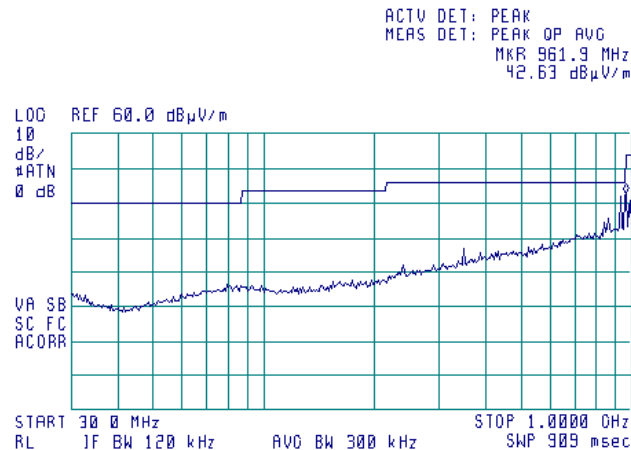




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.8 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS

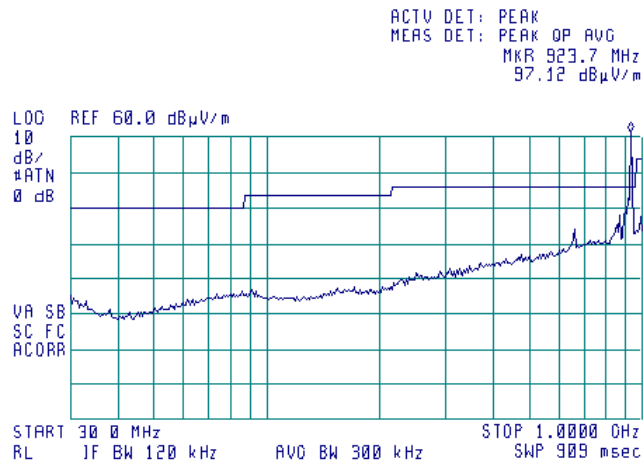

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.9 Radiated emission measurements from 1000 to 3000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

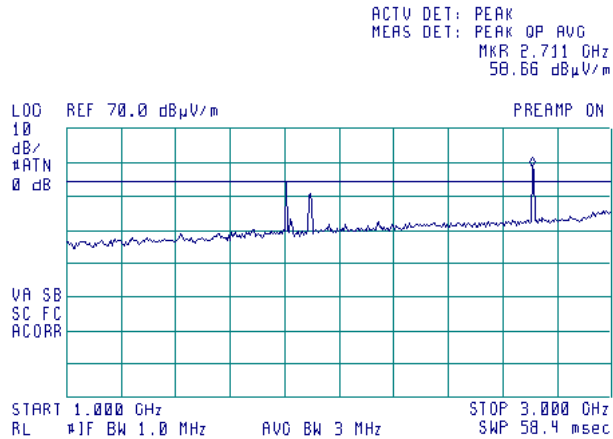

Plot 7.7.10 Radiated emission measurements from 1000 to 3000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

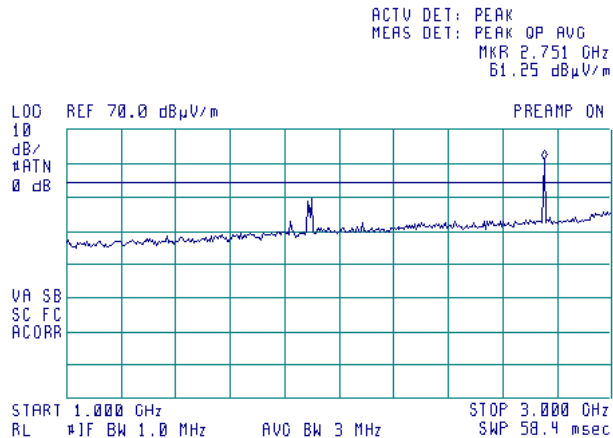




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.11 Radiated emission measurements from 1000 to 3000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


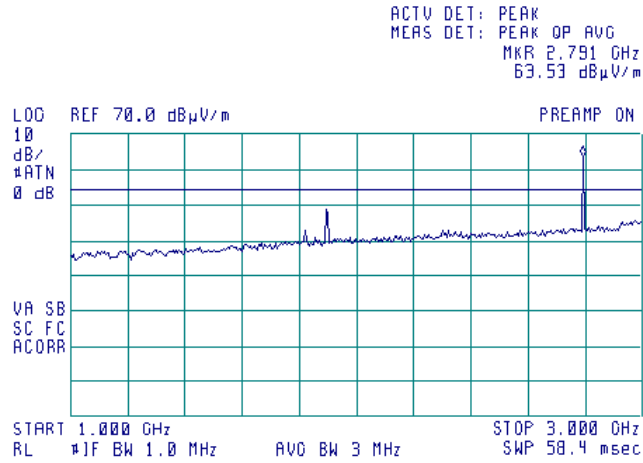


Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.12 Radiated emission measurements from 3000 to 6000 MHz at the low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



Semi anechoic chamber
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

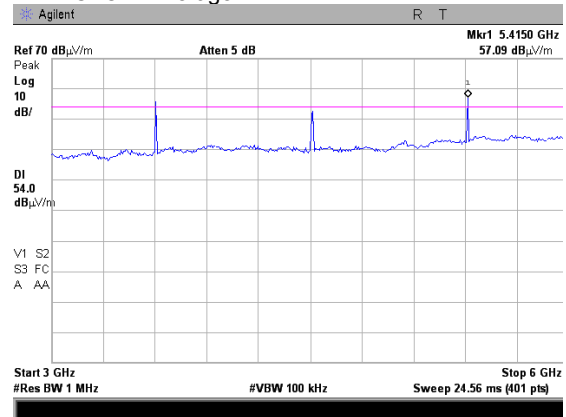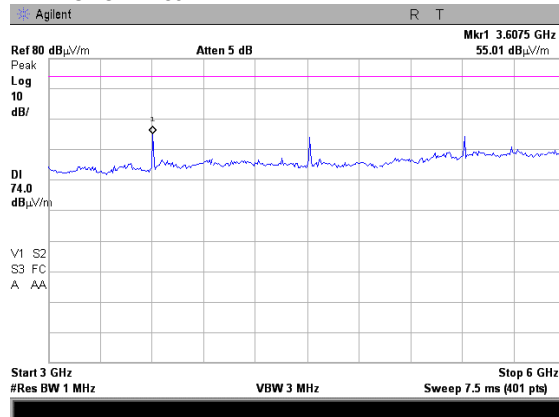

Plot 7.7.13 Radiated emission measurements from 3000 to 6000 MHz at the mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

Semi anechoic chamber
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

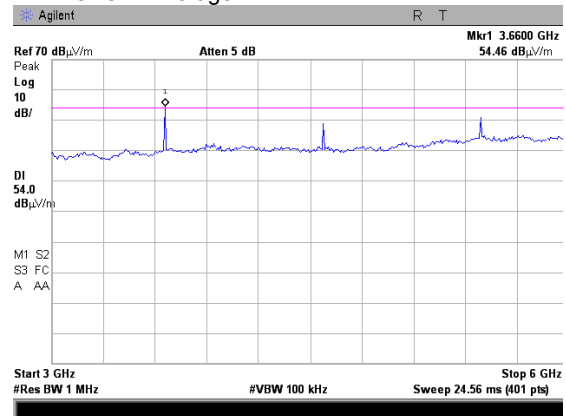
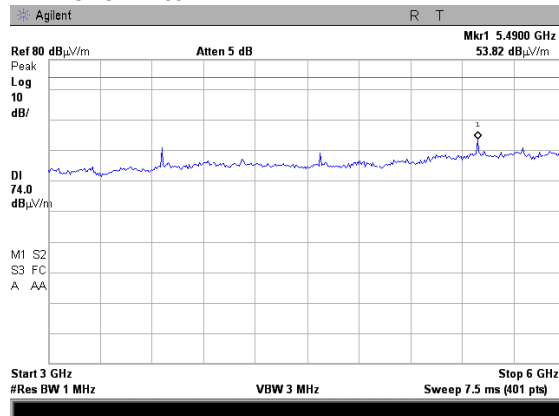


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.14 Radiated emission measurements from 3000 to 6000 MHz at the high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



Semi anechoic chamber
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

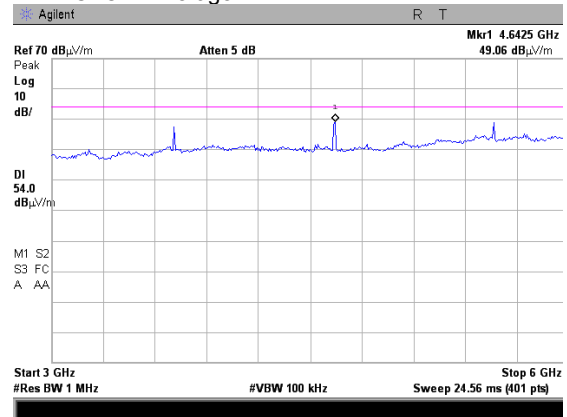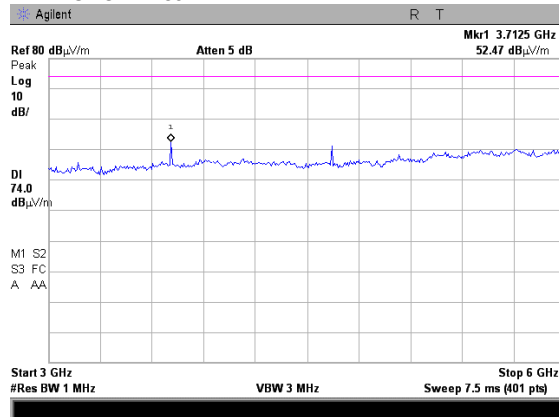

Plot 7.7.15 Radiated emission measurements from 6000 to 9300 MHz at the low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

Semi anechoic chamber
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

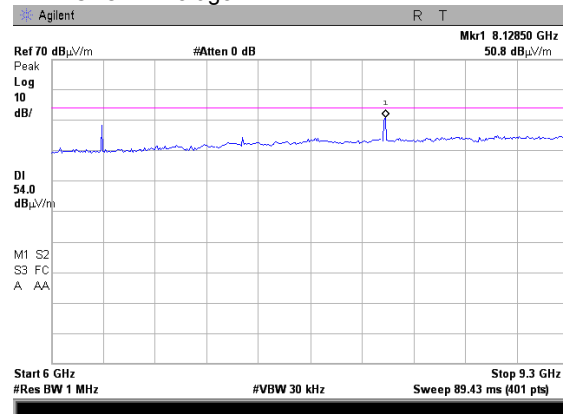
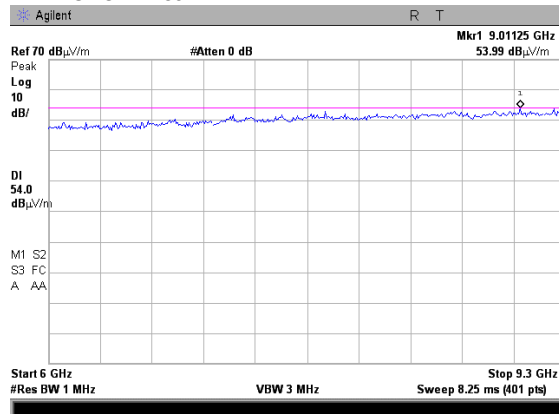


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.16 Radiated emission measurements from 6000 to 9300 MHz at the mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



Semi anechoic chamber
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

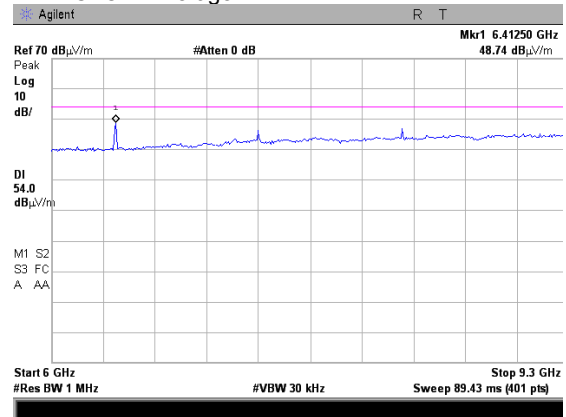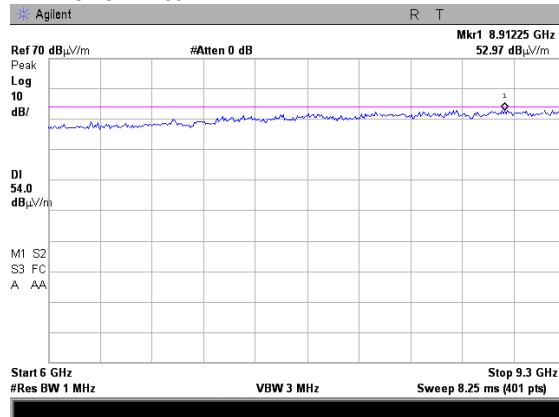

Plot 7.7.17 Radiated emission measurements from 6000 to 9300 MHz at the high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

Semi anechoic chamber
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

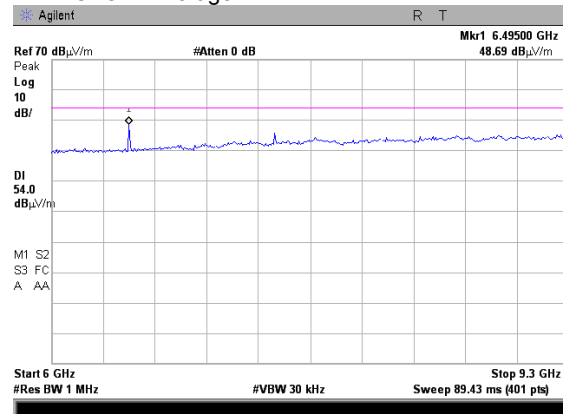
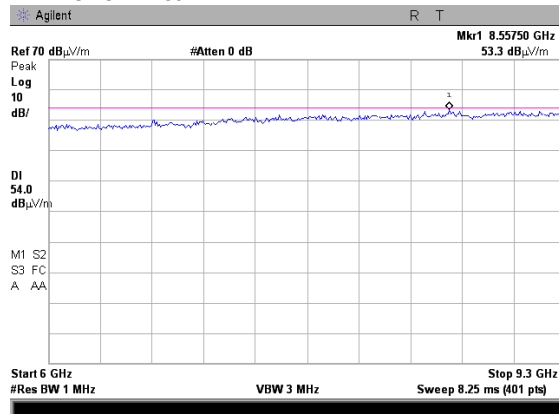


Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.18 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
OPERATIONAL MODE:
ANTENNA POLARIZATION: Vertical



Semi anechoic chamber
3 m
FHSS
ANTENNA POLARIZATION: Horizontal

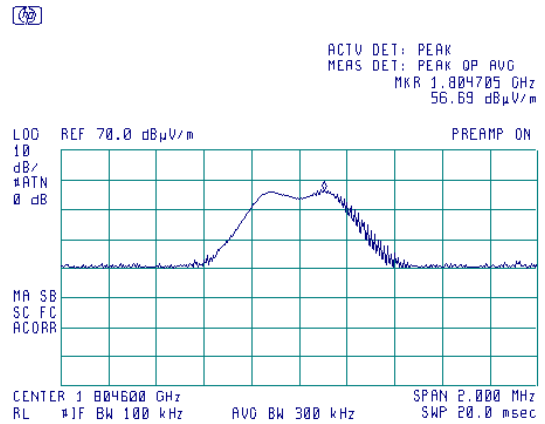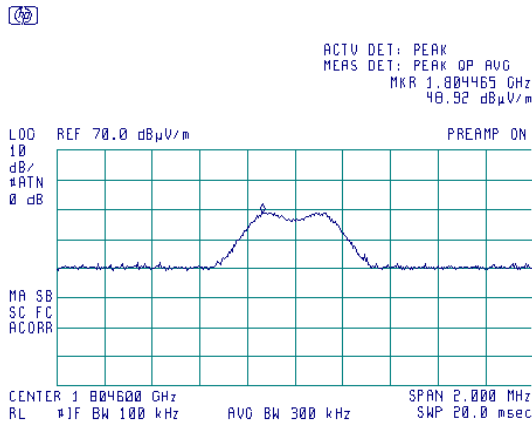

Plot 7.7.19 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
OPERATIONAL MODE:
ANTENNA POLARIZATION: Vertical

Semi anechoic chamber
3 m
FHSS
ANTENNA POLARIZATION: Horizontal

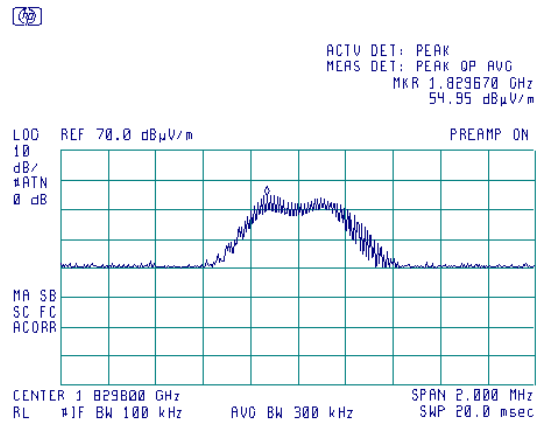
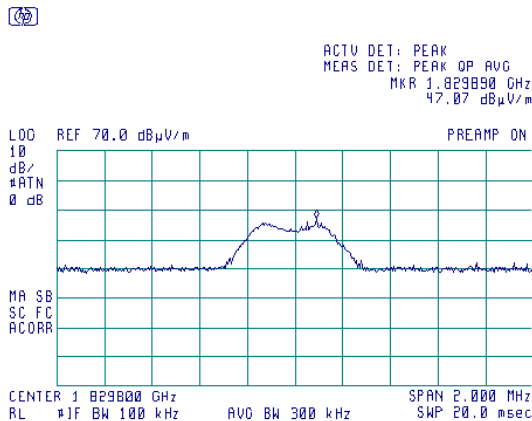


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.20 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
OPERATIONAL MODE:
ANTENNA POLARIZATION: Vertical


Semi anechoic chamber
3 m
FHSS
ANTENNA POLARIZATION: Horizontal

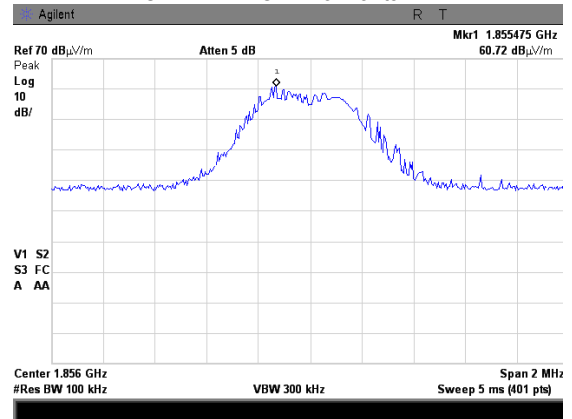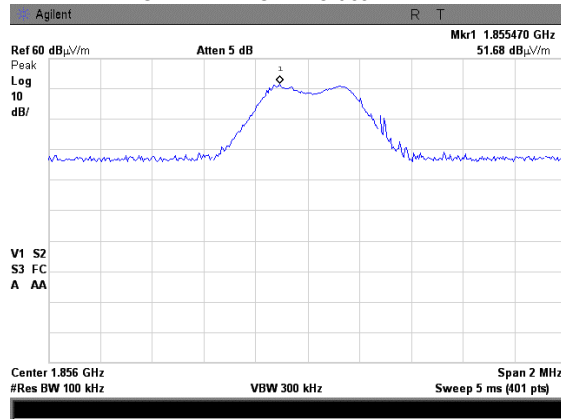

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.21 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

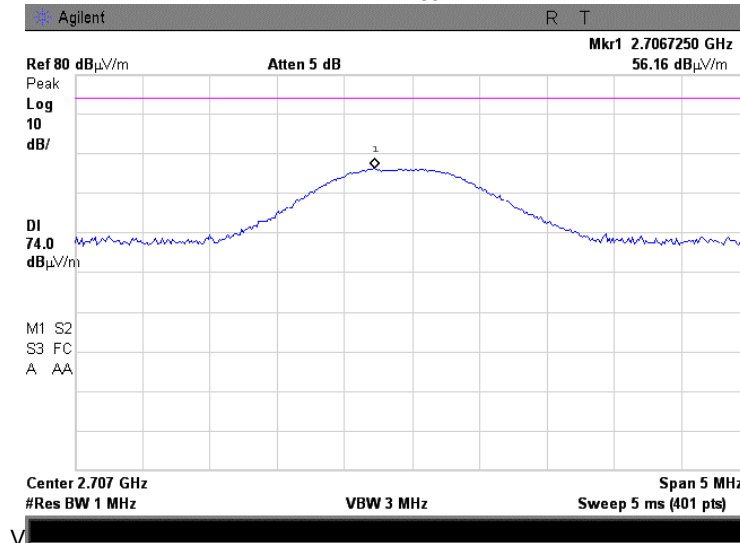

Plot 7.7.22 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average


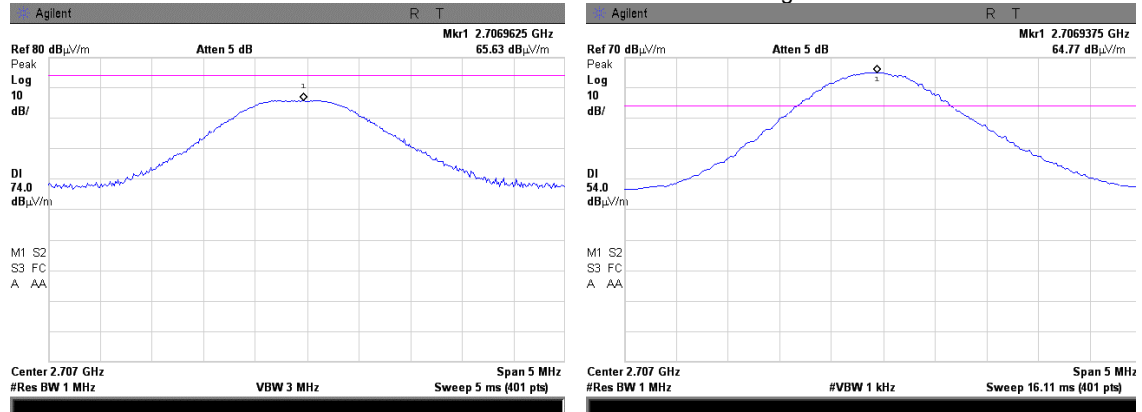


Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	
Date(s):		8/15/2011 - 8/31/2011	
Temperature: 22 °C		Air Pressure: 1008 hPa	
Remarks:		Verdict: PASS	
		Relative Humidity: 56 %	
		Power Supply: Battery	

Plot 7.7.23 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR:



OATS
3 m
Vertical
FHSS
Peak

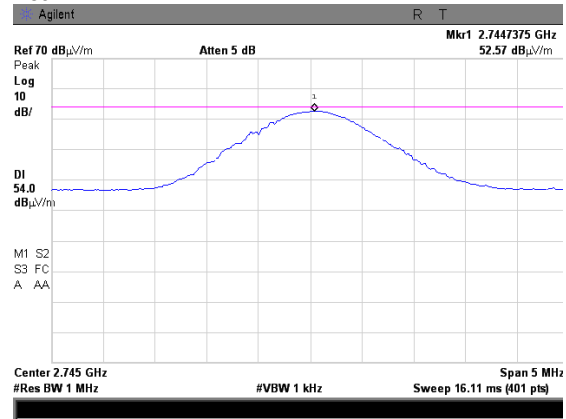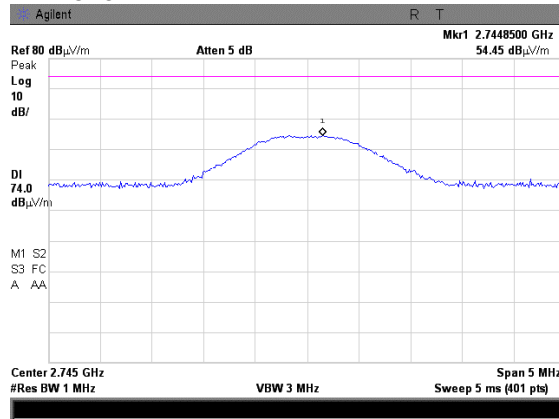

Plot 7.7.24 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

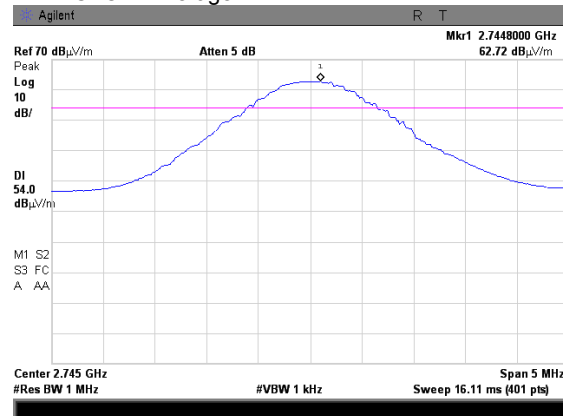
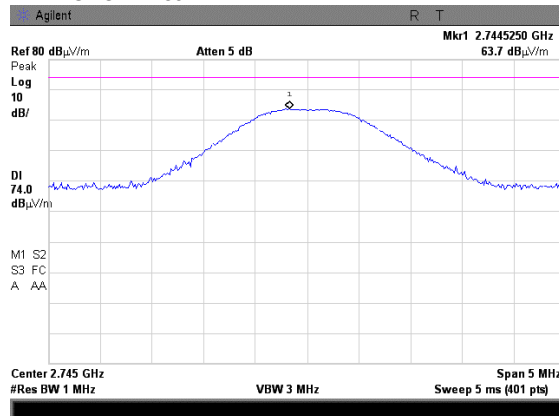


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.25 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



Semi anechoic chamber
3 m
Vertical
FHSS
DETECTOR: Average

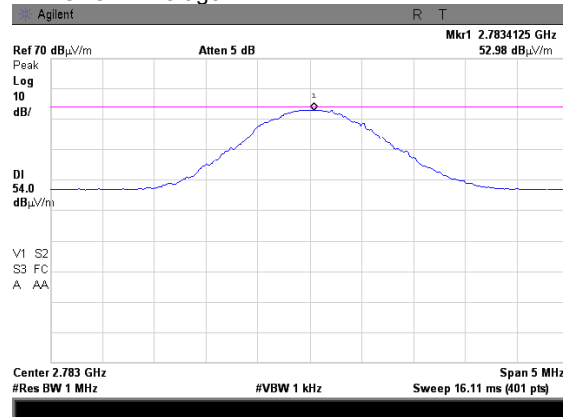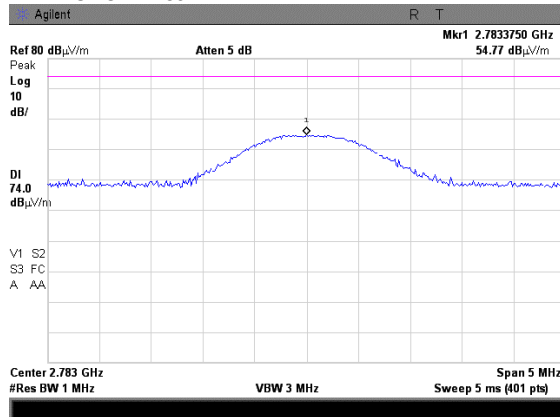

Plot 7.7.26 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

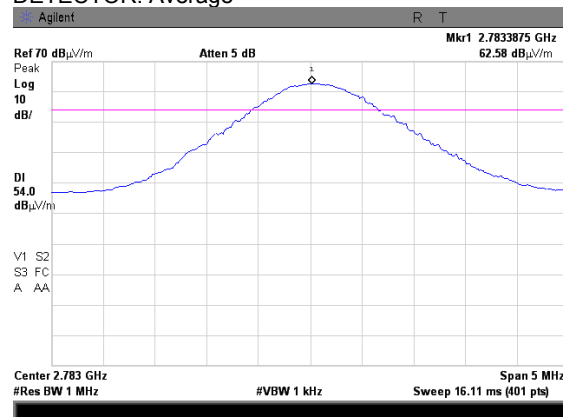
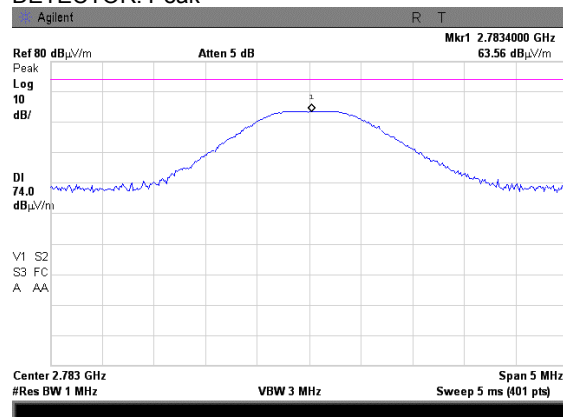


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.27 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



Semi anechoic chamber
3 m
Vertical
FHSS
DETECTOR: Average

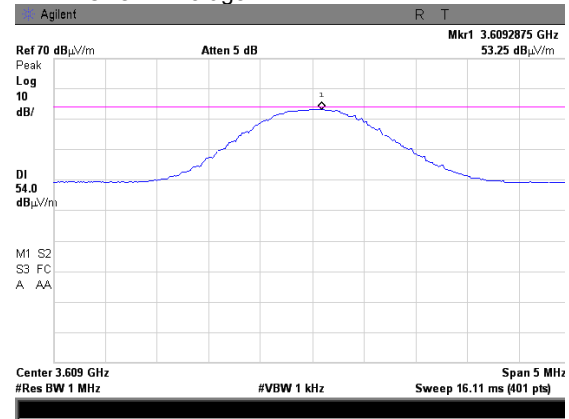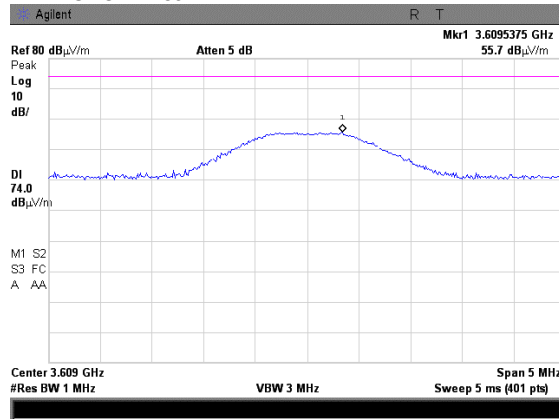

Plot 7.7.28 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

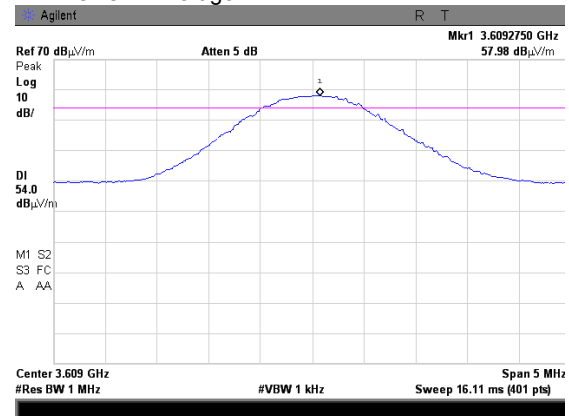
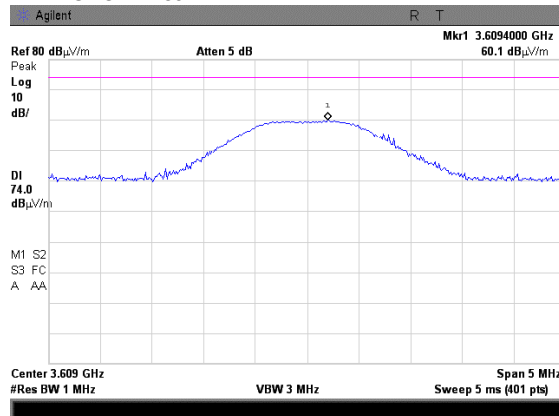


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.29 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Vertical
FHSS
DETECTOR: Average

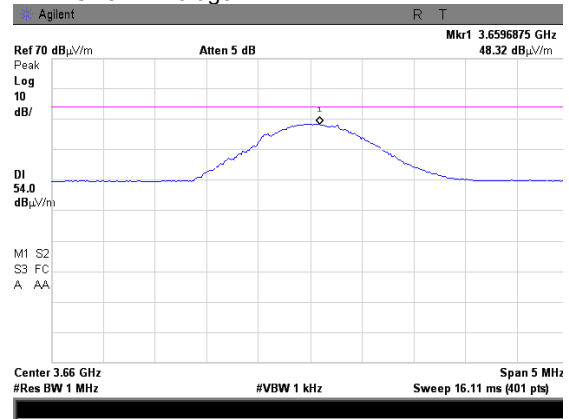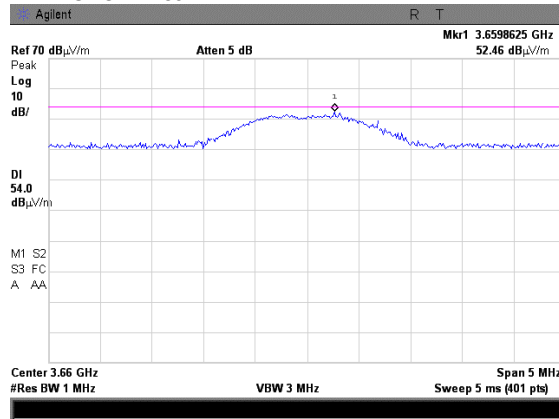

Plot 7.7.30 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

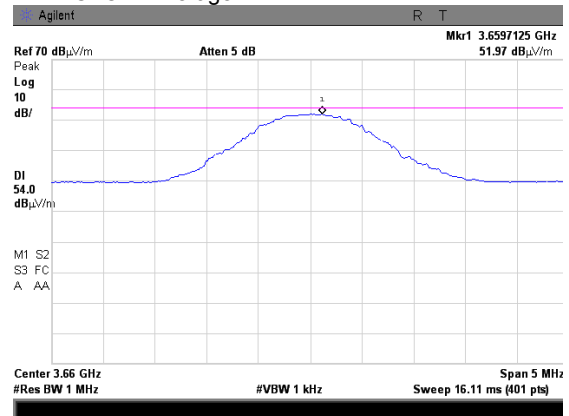
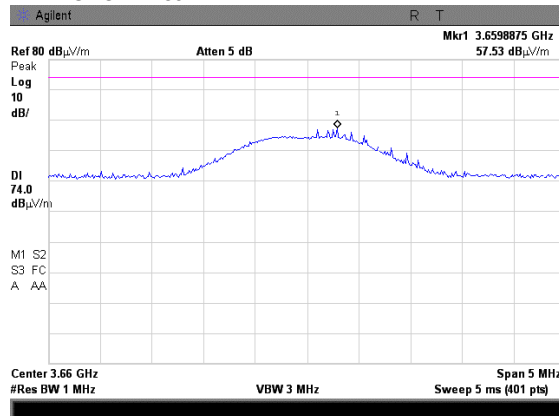


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.31 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Vertical
FHSS
DETECTOR: Average

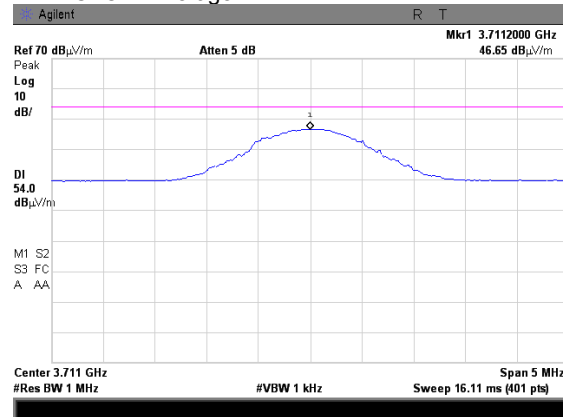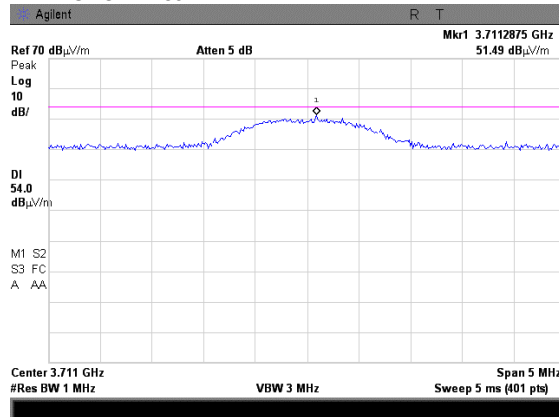

Plot 7.7.32 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

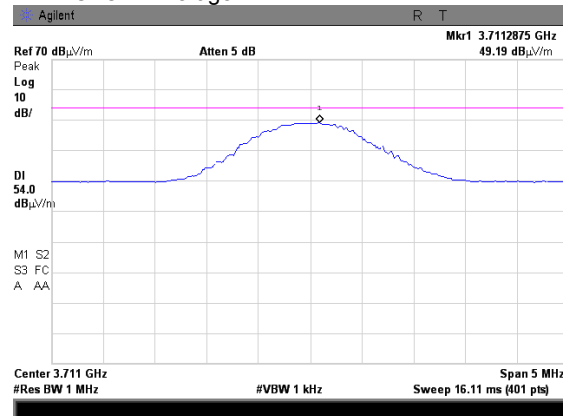
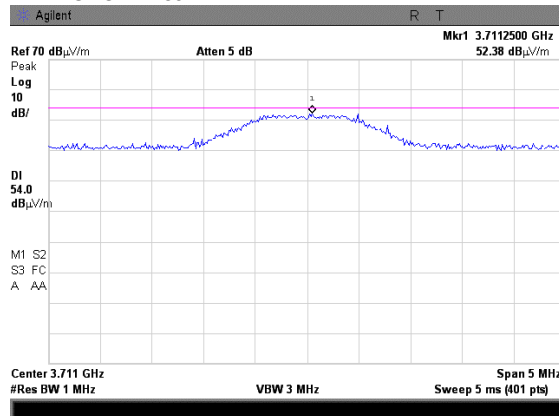


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test mode: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test procedure: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.33 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Horizontal
FHSS
DETECTOR: Average

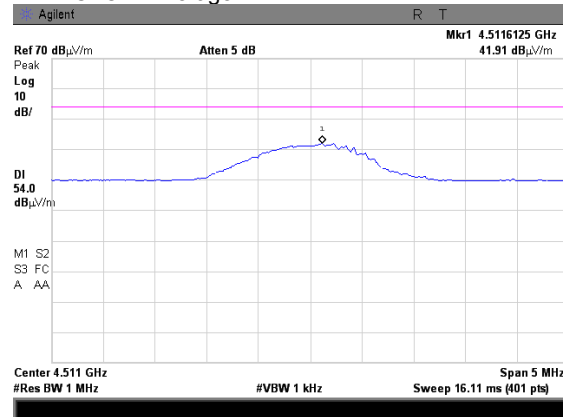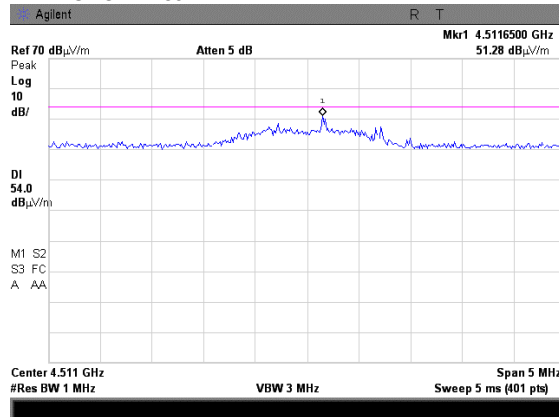

Plot 7.7.34 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Vertical
FHSS
DETECTOR: Average

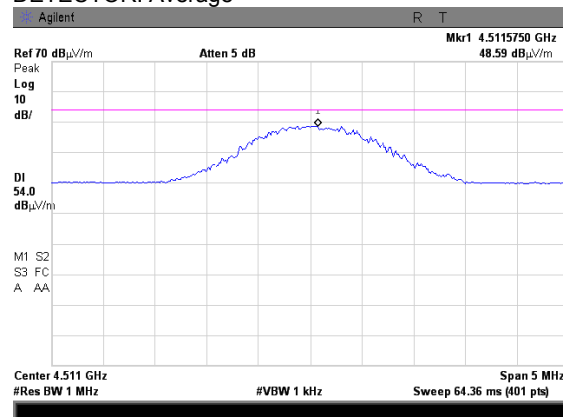
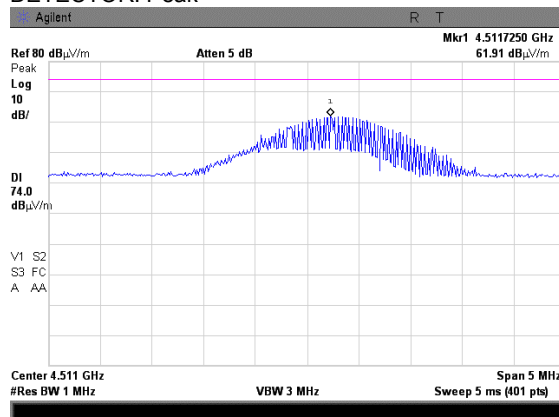


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.35 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Horizontal
FHSS
DETECTOR: Average

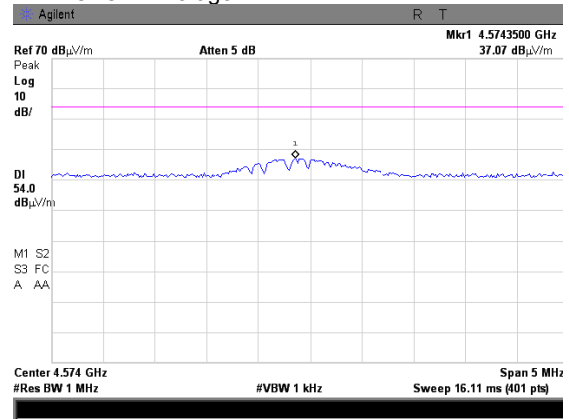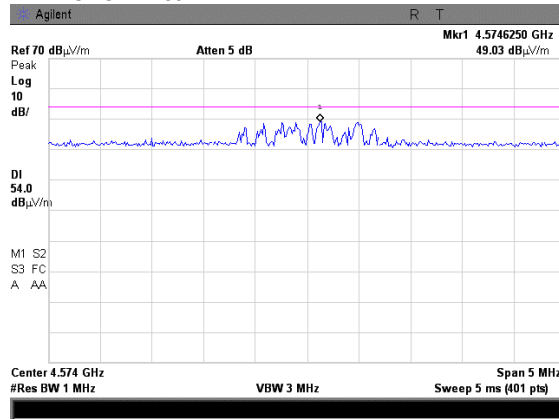

Plot 7.7.36 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

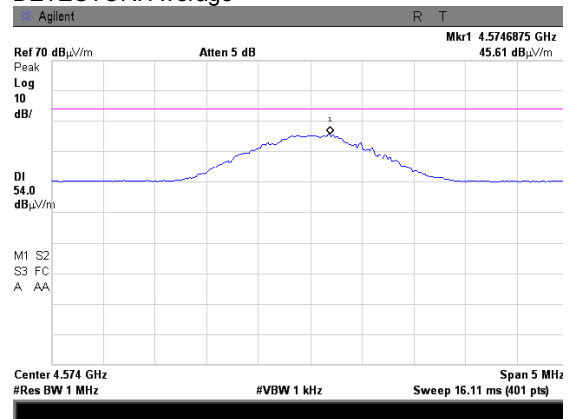
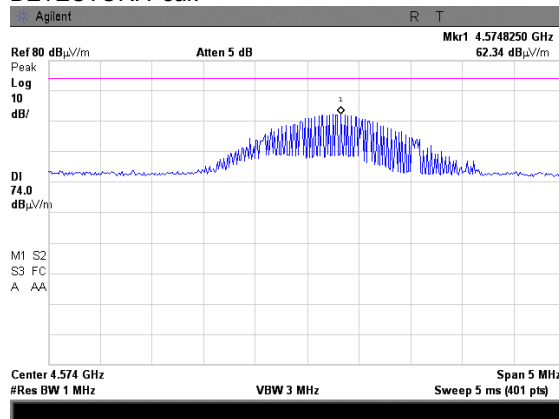


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.37 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:



OATS
3 m
Vertical
FHSS

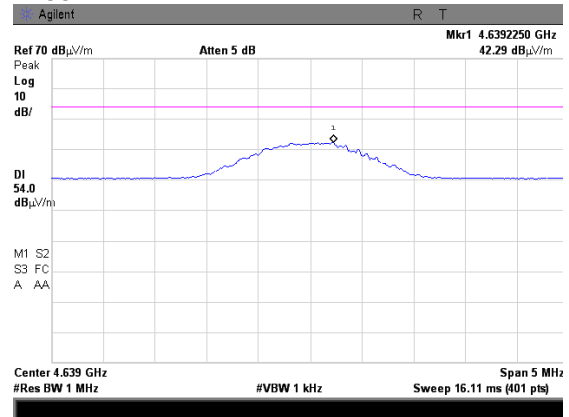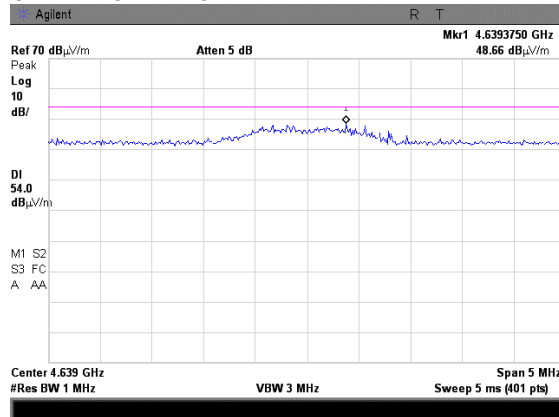

Plot 7.7.38 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

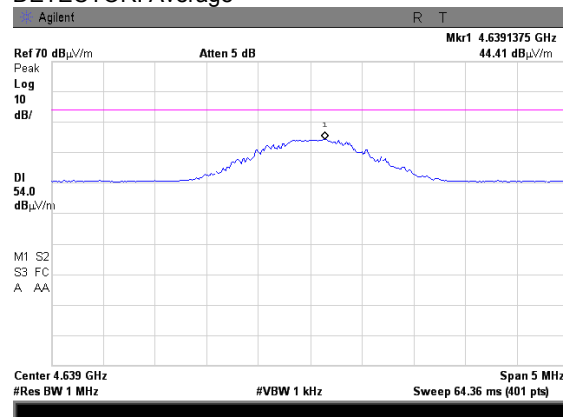
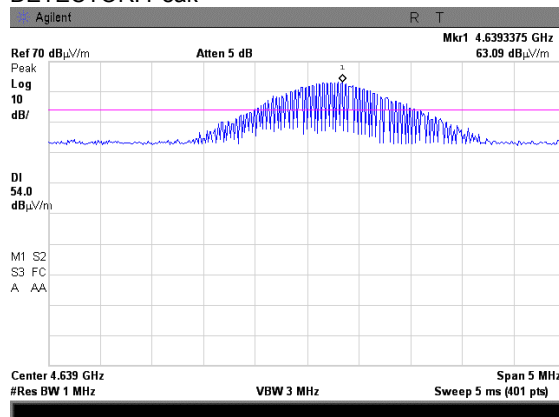


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.39 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Vertical
FHSS
DETECTOR: Average

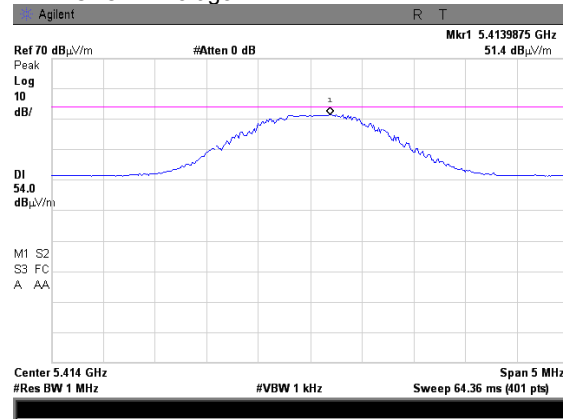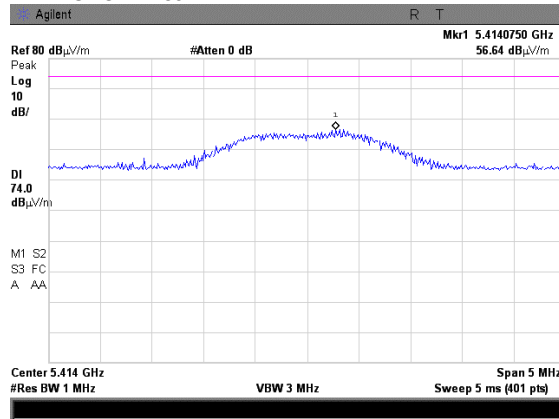

Plot 7.7.40 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak


OATS
3 m
Horizontal
FHSS
DETECTOR: Average

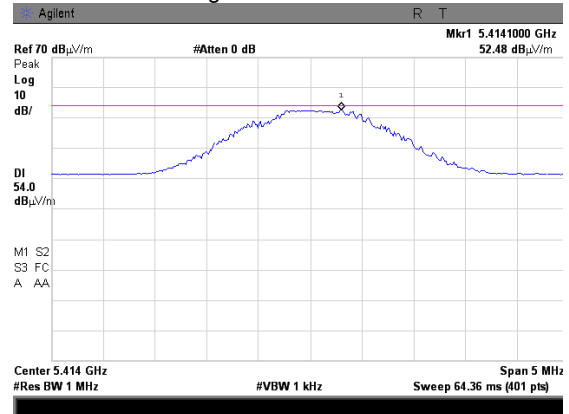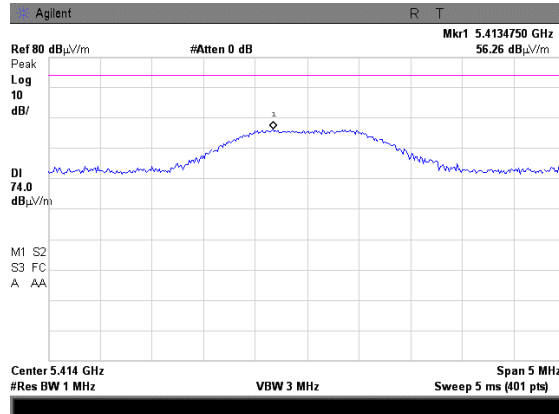

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.41 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

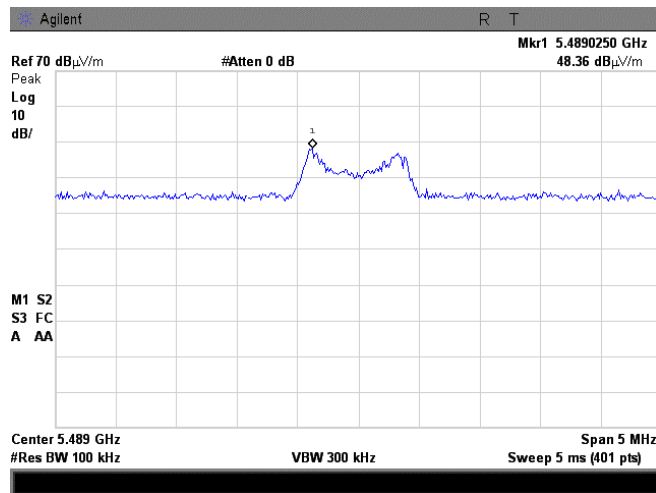

Plot 7.7.42 Radiated emission measurements at the sixth harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

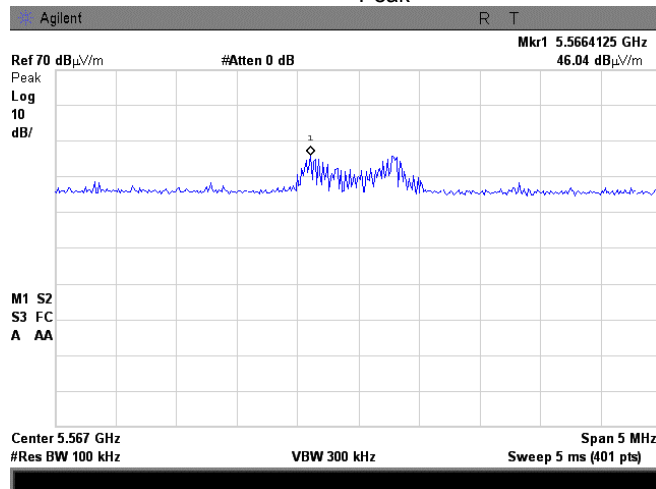

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.43 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

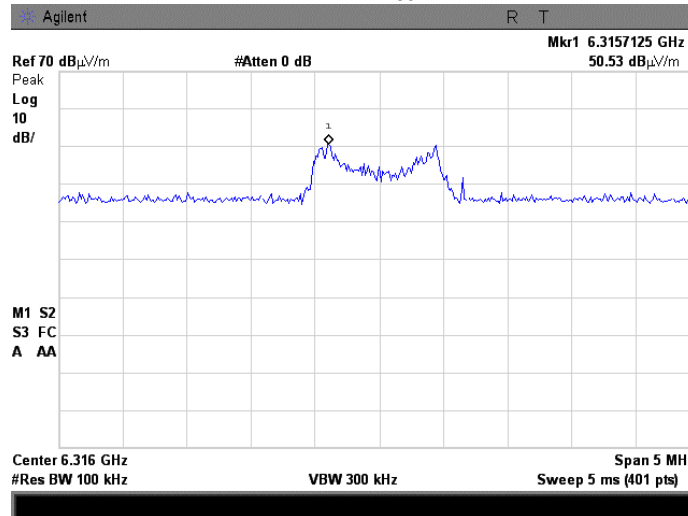

Plot 7.7.44 Radiated emission measurements at the seventh harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

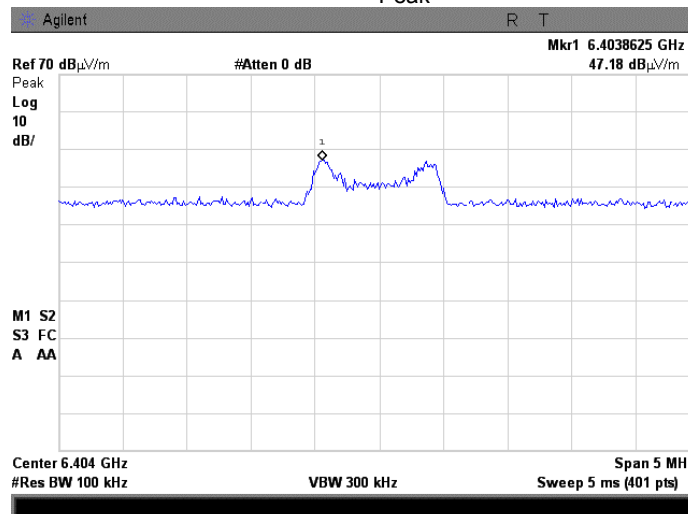

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			


Plot 7.7.45 Radiated emission measurements at the seventh harmonic of high carrier frequency

TEST SITE:	OATS
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
OPERATIONAL MODE:	FHSS
DETECTOR:	Peak

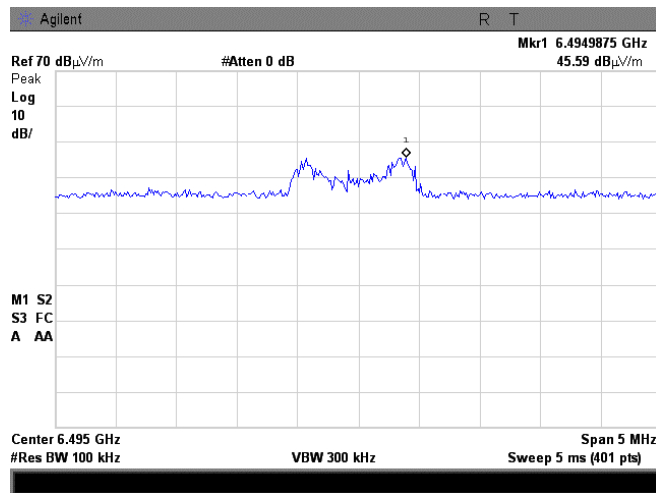

Plot 7.7.46 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE:	OATS
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
OPERATIONAL MODE:	FHSS
DETECTOR:	Peak


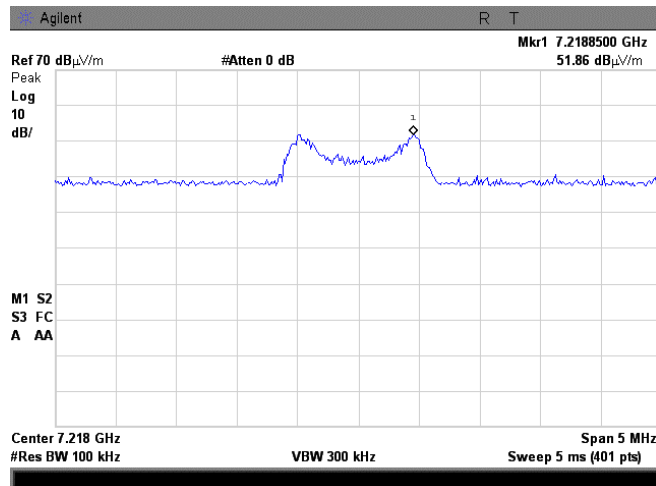


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.47 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

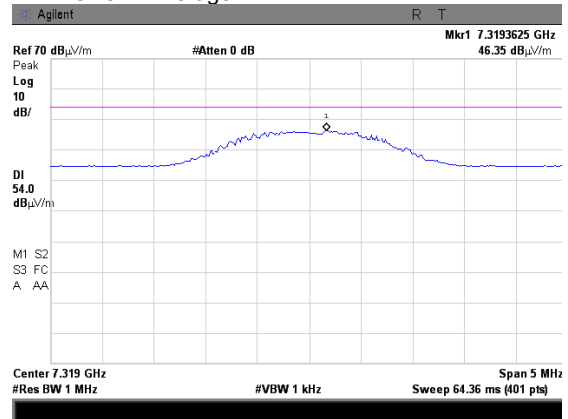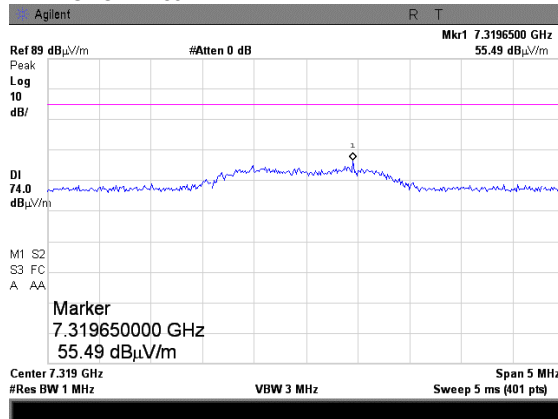

Plot 7.7.48 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

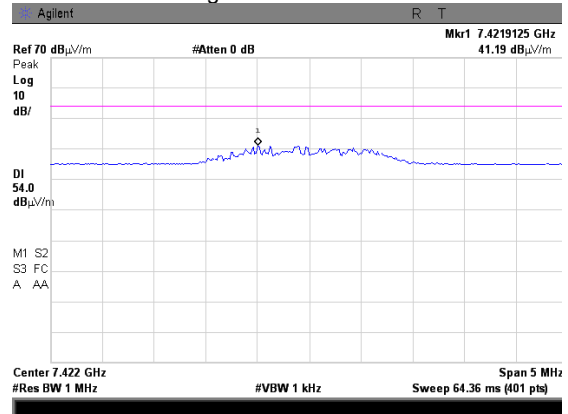
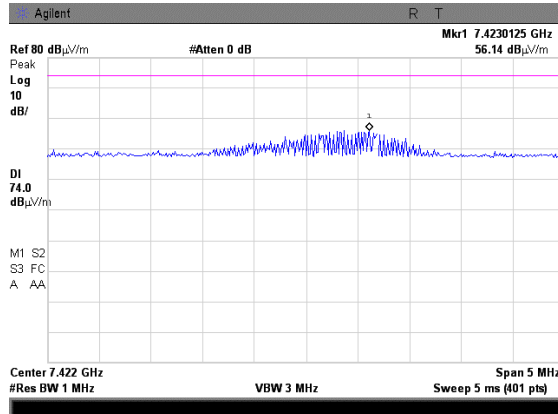


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.49 Radiated emission measurements at the ninth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Vertical and Horizontal
FHSS
DETECTOR: Average

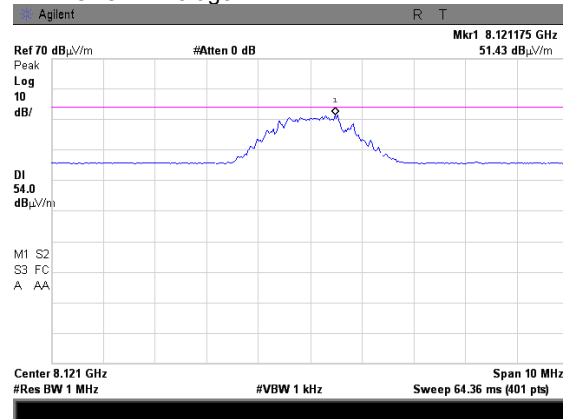
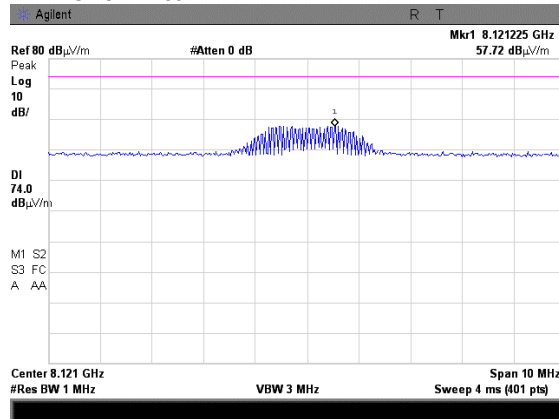


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.50 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Vertical
FHSS
DETECTOR: Average

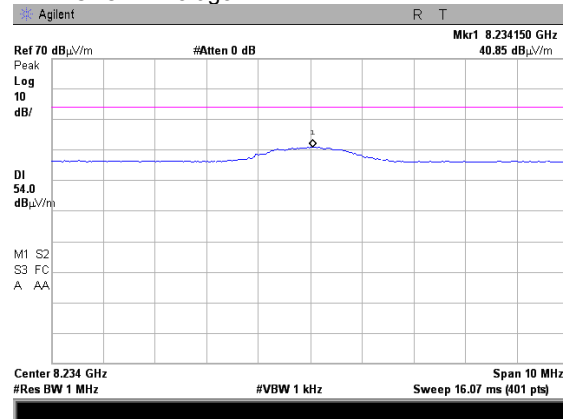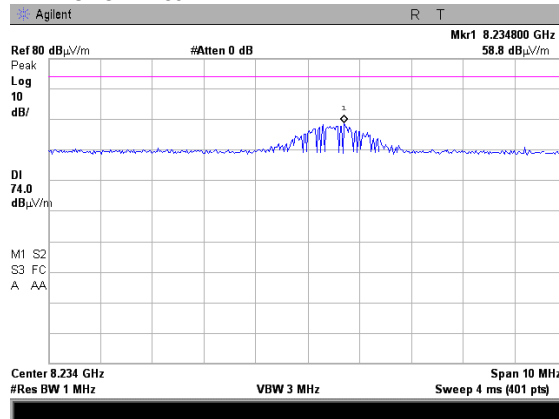

Plot 7.7.51 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

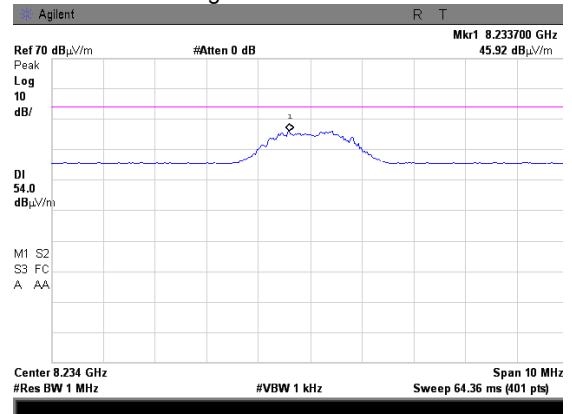
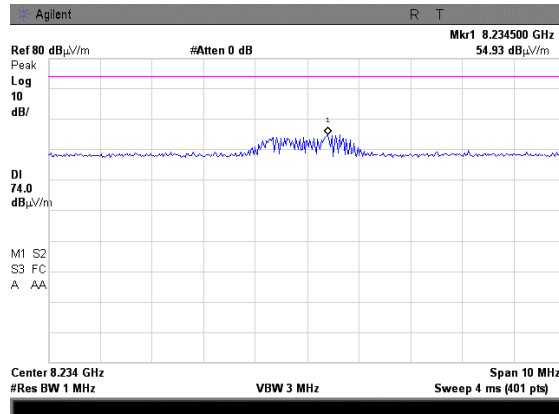


Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date(s): 8/15/2011 - 8/31/2011			
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.52 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak



OATS
3 m
Vertical
FHSS
DETECTOR: Average

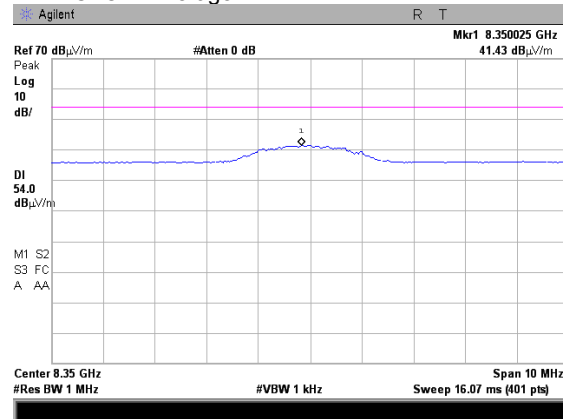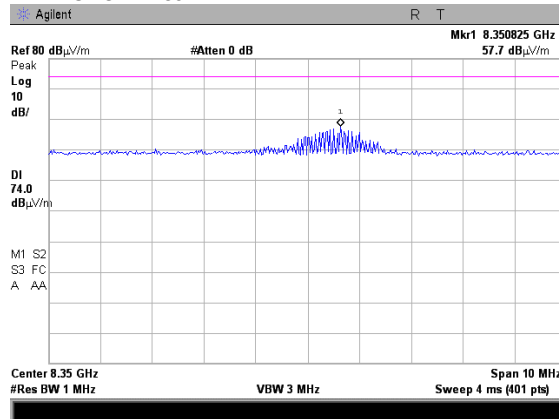

Plot 7.7.53 Radiated emission measurements at the ninth harmonic of high carrier frequency


TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
OPERATIONAL MODE:
DETECTOR: Peak

OATS
3 m
Horizontal
FHSS
DETECTOR: Average

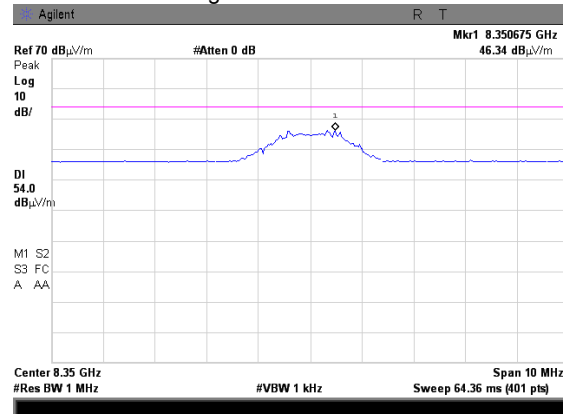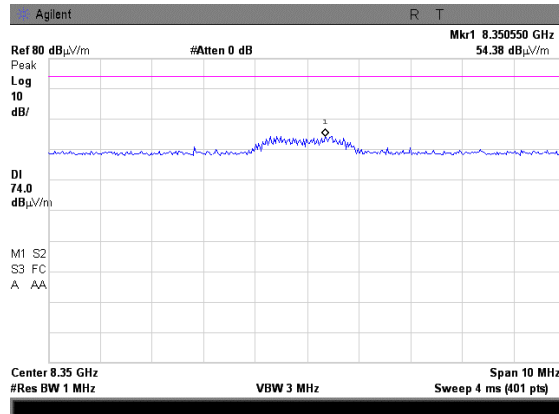


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	8/15/2011 - 8/31/2011		
Temperature: 22 °C	Air Pressure: 1008 hPa	Relative Humidity: 56 %	Power Supply: Battery
Remarks:			

Plot 7.7.54 Transmission pulse duration, FHSS

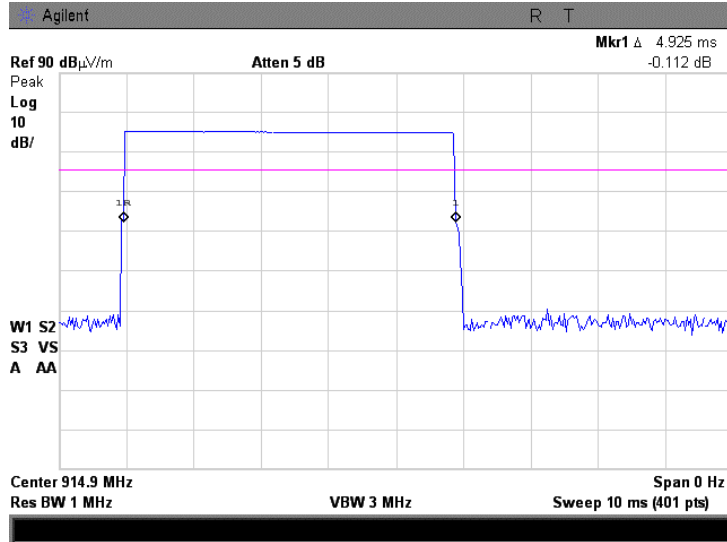

Plot 7.7.55 Transmission pulse period, FHSS

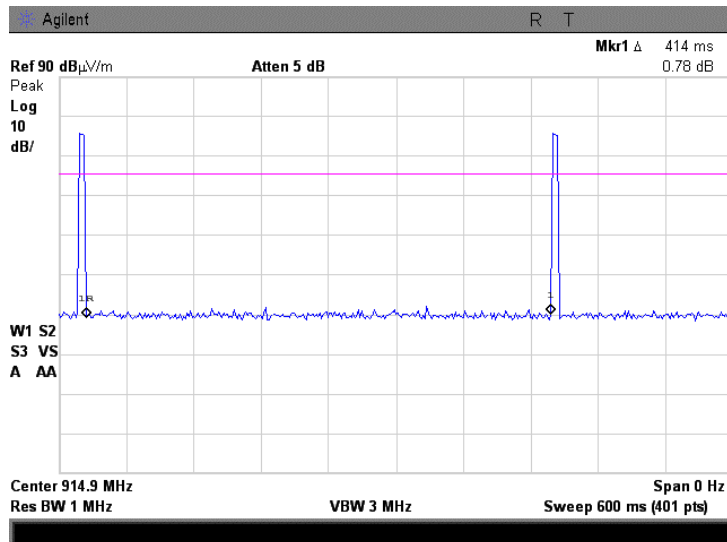



Test specification:	Section 15.203, RSS-Gen section 7.1.2, Antenna requirements		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	9/13/2011		
Temperature: 22 °C	Air Pressure: 1010 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	07-Jun-11	07-Jun-12
0415	Cable, Coax, RF, RG-214	Hermon Laboratories	CC-3	056	01-Dec-10	01-Dec-11
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-11	03-Jul-12
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	29-Aug-11	29-Sep-12
0583	Antenna, Log Periodic, 200 - 1000 MHz	Hermon Laboratories	LP 200/1000	035	04-Jul-11	04-Jul-12
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-11	11-Jan-12
0812	Cable Coax, RG-214, 11.5 m, N-type connectors	Hermon Laboratories	C214-11	148	01-Dec-10	01-Dec-11
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Aug-11	24-Aug-12
1431	Receiver RF Section, 9 kHz-2.9 GHz, part of HL1430 system	Agilent Technologies	85422E	308070026 2	25-Nov-10	25-Nov-11
1451	Cable, 1.5 m, N/N-Type	Harbour Industries	MIL 17/60- RG142	1451	01-Sep-11	01-Sep-12
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	01-Sep-11	01-Sep-12
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	16-Nov-10	16-Nov-11
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	07-Jul-11	07-Jul-12
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155- 00	2871	20-Sep-11	20-Sep-12
3001	EMC Analyzer, 9 kHz to 3 GHz	Agilent Technologies	E7402A	US394401 80	26-Dec-10	26-Dec-11
3121	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155- 00	3121	01-Jan-11	01-Jan-12
3623	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Belden	MIL C-17	NA	19-May-11	19-May-12

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2010	Radio Frequency Devices
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment

12 APPENDIX E Test equipment correction factors

**Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Log periodic antenna
Hermon Laboratories, model LP 200/1000
Ser.No.035, HL 0583

Frequency, MHz	Antenna factor, dB(1/m)
200	12.0
250	12.5
300	14.5
350	15.7
400	16.0
450	16.7
500	18.1
550	18.2
600	18.8
650	20.1
700	21.8
750	21.4
800	21.4
850	22.4
900	22.8
950	23.4
1000	24.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Cable loss
Cable Coaxial, RG-58/RG-214, s/n 056, HL 0415
+ Cable Coaxial, RG-214, 11.5m, s/n 148, HL 0812

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	20	0.73	±0.12
2	30	0.91	
3	50	1.2	
4	80	1.56	
5	100	1.76	
6	200	2.59	
7	300	3.26	
8	400	3.93	
9	500	4.42	
10	600	4.92	
11	700	5.36	
12	800	5.88	
13	900	6.41	
14	1000	6.71	
15	1500	8.63	
16	2000	10.39	

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00
HL 3121

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.08	3600	2.10	7400	3.08	11200	3.85	15100	4.58
30	0.18	3700	2.14	7500	3.11	11300	3.85	15200	4.60
50	0.26	3800	2.18	7600	3.14	11400	3.86	15300	4.63
100	0.34	3900	2.19	7700	3.16	11500	3.86	15400	4.65
200	0.47	4000	2.25	7800	3.18	11600	3.87	15500	4.71
300	0.59	4100	2.25	7900	3.20	11700	3.85	15600	4.70
400	0.66	4200	2.28	8000	3.22	11800	3.96	15700	4.69
500	0.75	4300	2.35	8100	3.26	11900	3.92	15800	4.71
600	0.83	4400	2.35	8200	3.27	12000	3.92	15900	4.74
700	0.90	4500	2.38	8300	3.29	12100	3.94	16000	4.69
800	0.96	4600	2.43	8400	3.30	12200	3.94	16100	4.72
900	1.02	4700	2.43	8500	3.31	12300	3.99	16200	4.71
1000	1.07	4800	2.45	8600	3.33	12400	4.02	16300	4.74
1100	1.12	4900	2.48	8700	3.35	12500	4.10	16400	4.74
1200	1.15	5000	2.55	8800	3.36	12600	4.09	16500	4.75
1300	1.22	5100	2.54	8900	3.38	12700	4.15	16600	4.78
1400	1.28	5200	2.56	9000	3.40	12800	4.15	16700	4.86
1500	1.29	5300	2.58	9100	3.41	12900	4.08	16800	4.84
1600	1.36	5400	2.61	9200	3.45	13000	4.21	16900	4.83
1700	1.40	5500	2.64	9300	3.48	13100	4.19	17000	4.86
1800	1.45	5600	2.69	9400	3.52	13200	4.29	17100	4.83
1900	1.51	5700	2.67	9500	3.54	13300	4.24	17200	4.90
2000	1.50	5800	2.71	9600	3.59	13400	4.26	17300	4.91
2100	1.56	5900	2.73	9700	3.59	13500	4.26	17400	4.94
2200	1.59	6000	2.75	9800	3.62	13600	4.29	17500	4.93
2300	1.63	6100	2.81	9900	3.70	13700	4.35	17600	4.93
2400	1.73	6200	2.80	10000	3.70	13800	4.31	17700	5.00
2500	1.73	6300	2.82	10100	3.72	13900	4.29	17800	5.01
2600	1.78	6400	2.85	10200	3.73	14000	4.32	17900	5.00
2700	1.84	6500	2.87	10300	3.75	14100	4.33	18000	5.00
2800	1.84	6600	2.90	10400	3.76	14200	4.34		
2900	1.91	6700	2.91	10500	3.77	14300	4.36		
3000	1.91	6800	2.94	10600	3.79	14400	4.38		
3100	1.97	6900	2.96	10700	3.80	14600	4.42		
3200	1.98	7000	2.98	10800	3.81	14700	4.42		
3300	2.04	7100	3.01	10900	3.81	14800	4.55		
3400	2.04	7200	3.02	11000	3.83	14900	4.55		
3500	2.10	7300	3.04	11100	3.84	15000	4.55		

Cable loss
Cable coaxial, MIL C-17, N type-N type, 6 m
Belden, HL 3623

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2600	4.38	5400	7.76
30	0.25	2700	4.53	5500	7.79
50	0.33	2800	4.64	5600	7.88
100	0.49	2900	4.79	5700	7.93
200	0.76	3000	4.93	5800	8.05
300	0.97	3100	5.02	5900	8.03
400	1.18	3200	5.18	6000	8.07
500	1.38	3300	5.27	6100	8.14
600	1.54	3400	5.41	6200	8.21
700	1.71	3500	5.57	6300	8.28
800	1.88	3600	5.65	6400	8.35
900	2.04	3700	5.82	6500	8.43
1000	2.19	3800	5.89		
1100	2.38	3900	6.02		
1200	2.61	4000	6.15		
1300	2.63	4100	6.26		
1400	2.79	4200	6.37		
1500	2.90	4300	6.52		
1600	3.08	4400	6.63		
1700	3.21	4500	6.74		
1800	3.31	4600	6.86		
1900	3.47	4700	6.98		
2000	3.59	4800	7.09		
2100	3.74	4900	7.17		
2200	3.86	5000	7.30		
2300	3.98	5100	7.41		
2400	4.12	5200	7.59		
2500	4.24	5300	7.71		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT