

TEST REPORT

ACCORDING TO: FCC 47CFR part 15: 2005, subpart C (§§ 15.247, 15.209),
subpart B (§ 15.109)

FOR:

Telematics Wireless Ltd.

Water reader

Model: ETMW-NA

905.45 – 923.55 MHz

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Operating frequencies	5
6.3	Changes made in the EUT	5
6.4	EUT view	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Peak output power	11
7.3	Field strength of spurious emissions	16
7.4	Peak spectral power density	95
7.5	Antenna requirements	104
7.6	Radiated emission measurements	105
8	APPENDIX A Test equipment and ancillaries used for tests	109
9	APPENDIX B Measurement uncertainties	111
10	APPENDIX C Test facility description	112
11	APPENDIX D Specification references	112
12	APPENDIX E Abbreviations and acronyms	113
13	APPENDIX F Test equipment correction factors	114



1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: slavas@telematics-wireless.com
Contact name: Mr. Slava Snitkovsky

2 Equipment under test attributes

Product name: Water reader
Model: ETMW-NA
Operating frequency range: 905.45 – 923.55 MHz
Receipt date: 4/28/2005

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: slavas@telematics-wireless.com
Contact name: Mr. Slava Snitkovsky




4 Test details

Project ID: 16440
Location: Hermon Laboratories Ltd. P.O.Box 23, Binyamina 30500, Israel
Test started: 4/28/2005
Test completed: 6/7/2005
Test specifications: FCC 47CFR part 15: 2005, subpart C (§§ 15.247, 15.209),
subpart B (§ 15.109)
Test suite: FCC_15.247_DTS_without_RF_connector (5/3/2004 5:43:35 PM, modified)

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)2, 6 dB bandwidth	Pass
Section 15.247(b)3, Peak output power	Pass
Section 15.247(c), Radiated spurious emissions	Pass
Section 15.247(d), Peak power density	Pass
Section 15.207(a), Conducted emission	Not required
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Adelberg, test engineer	June 7, 2005	
Reviewed by:	Mr. M. Nikishin, EMC group leader	June 29, 2005	
Approved by:	Mr. A. Usoskin, CEO	June 30, 2005	

6 EUT description

6.1 General information

The ETMW-NA is actually a water odometer, offering Automatic Meter Reading – AMR. The ETMW-NA is 2-way RF communicator built-in water meter. The RF capabilities enable the transmission of the meter reading and some extra information to a collecting unit. In addition specific parameters can be programmed via the RF link. The ETMW consists of the following units: RF transmitter & receiver with integral antenna that operate in 905.45-923.55 MHz range and a microcontroller (plus simple Digital Logic), which control the operational modes of the unit. The EUT is powered from 3.6 VDC supplied by two Ni-Cd internal batteries.

6.2 Operating frequencies

Source	Frequency, MHz			
Transmitter	905.45-923.55	NA	NA	NA
Receiver	916.468 (RF)	927.2 (LO)	NA	NA
Digital portion	0.032768 (clock)	14.487 (clock)	NA	NA

6.3 Changes made in the EUT

No changes were implemented.

6.4 EUT view



6.5 Transmitter characteristics

Type of equipment						
	Stand-alone (Equipment with or without its own control provisions)					
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency range		902 - 928 MHz				
Operating frequency range		905.45 – 923.55 MHz				
RF channel spacing		3.62 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm	
		Effective radiated power (for equipment with no RF connector)			19.28 dBm (FSK) 20.12 dBm (PSK)	
Is transmitter output power variable?		X	No			
			Yes	continuous variable		
				stepped variable with stepsize		dB
				minimum RF power		dBm
				maximum RF power		dBm
Antenna connection						
	unique coupling	standard connector	X	integral	with temporary RF connector	
					X without temporary RF connector	
Antenna/s technical characteristics						
Type	Manufacturer	Model number		Gain		
Integral	Telematics Wireless	Kind of Inverted Antenna		3 dBi		
Transmitter 99% power bandwidth		2 MHz (PSK modulated), 560 kHz (FSK modulated)				
Transmitter aggregate data rate/s		60 kbps (PSK modulated), 120 kbps (FSK modulated)				
Transmitter aggregate symbol (baud) rate/s		0.9 Msymbols (Mbaud) per second (PSK modulated)				
Type of modulation		PSK, FSK				
Modulating test signal (baseband)		PRBS				
Maximum transmitter duty cycle in normal use		0.12 %				
Transmitter duty cycle supplied for test		5.99 % (PSK)	Tx ON time	4.75 ms(PSK)	Period	
		1.89 % (FSK)		1.50 ms(PSK)		79.250 ms (PSK) 79.250 ms (FSK)
Transmitter power source						
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Ni-Cd	
	DC	Nominal rated voltage	VDC			
	AC mains	Nominal rated voltage	VAC	Frequency	Hz	
Common power source for transmitter and receiver			X	yes	no	
Emission designator		2M00G1DAN (PSK modulated) 560KF1DAN (FSK modulated)				
Spread spectrum technique used		Frequency hopping (FHSS)				
		X	Digital transmission system (DTS)			
		Hybrid				
Spread spectrum parameters for transmitters tested per FCC 15.247 only						
DSSS	Chip sequence length	15 bits				
	Spectrum width	2 MHz				
FHSS	Dwell time					
	Bandwidth per hop					
	Max. separation of hops					

Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/17/2005 10:23 AM		
Temperature: 26 °C	Air Pressure: 1011 hPa	Relative Humidity: 46 %	Power Supply: 3.6 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. The specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup



Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/17/2005 10:23 AM		
Temperature: 26 °C	Air Pressure: 1011 hPa	Relative Humidity: 46 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.1.2 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 - 928 MHz
DETECTOR USED: Peak
SWEEP MODE: Single
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc

MODULATION: PSK
MODULATING SIGNAL: PRBS
BIT RATE: 60 kBps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
905.420	975	500.0	475	Pass
Mid frequency				
916.300	1005	500.0	505	Pass
High frequency				
923.565	998	500.0	498	Pass

MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kBps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
905.593	1253	500.0	753	Pass
Mid frequency				
916.278	1200	500.0	700	Pass
High frequency				
923.565	1178	500.0	678	Pass


Reference numbers of test equipment used

HL 0465	HL 0521	HL 0589	HL 0593	HL 0594	HL 0604	HL 1004	HL 2009	
---------	---------	---------	---------	---------	---------	---------	---------	--


Full description is given in Appendix A.

Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/17/2005 10:23 AM		
Temperature: 26 °C	Air Pressure: 1011 hPa	Relative Humidity: 46 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.1.1 6 dB bandwidth test result at low frequency, PSK modulation

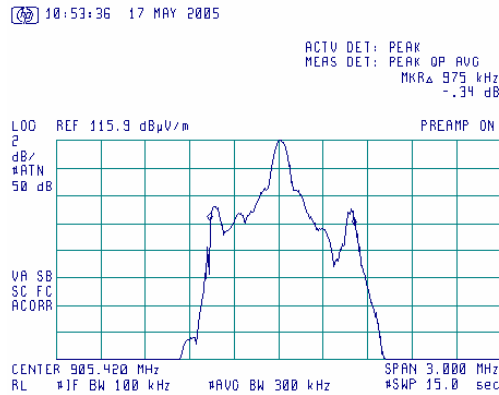

Plot 7.1.2 6 dB bandwidth test result at mid frequency, PSK modulation

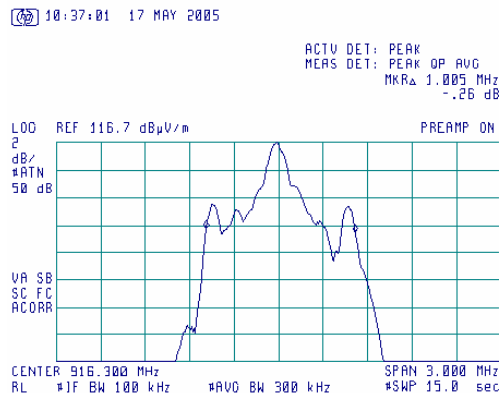


Plot 7.1.3 6 dB bandwidth test result at high frequency, PSK modulation

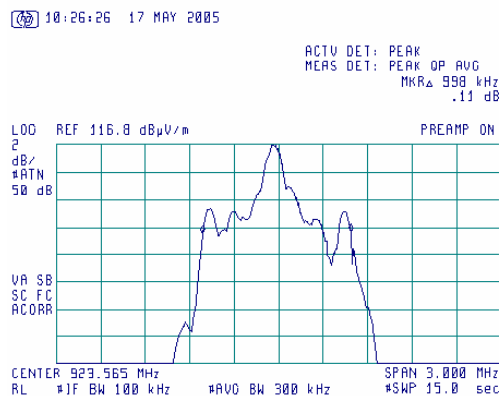


Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/17/2005 10:23 AM		
Temperature: 26 °C	Air Pressure: 1011 hPa	Relative Humidity: 46 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.1.4 6 dB bandwidth test result at low frequency, FSK modulation

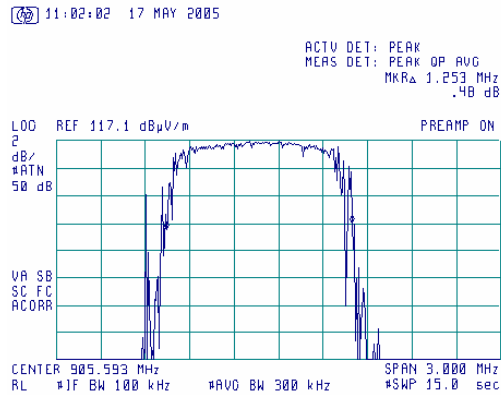

Plot 7.1.5 6 dB bandwidth test result at mid frequency, FSK modulation

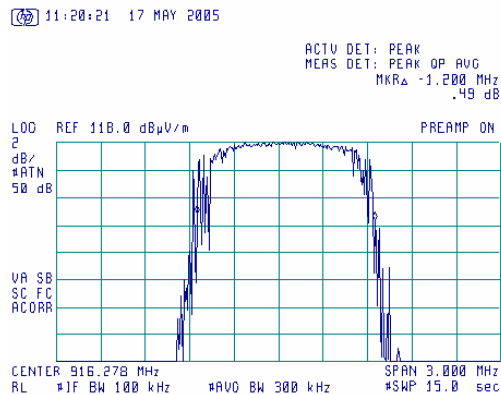

Plot 7.1.6 6 dB bandwidth test result at high frequency, FSK modulation

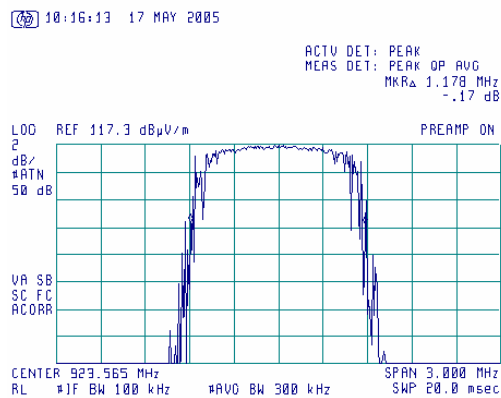

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 8:33 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 44 %	Power Supply: 3.6 VDC
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. The specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	3.0	1.0	30.0	128.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 8:33 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 44 %	Power Supply: 3.6 VDC
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

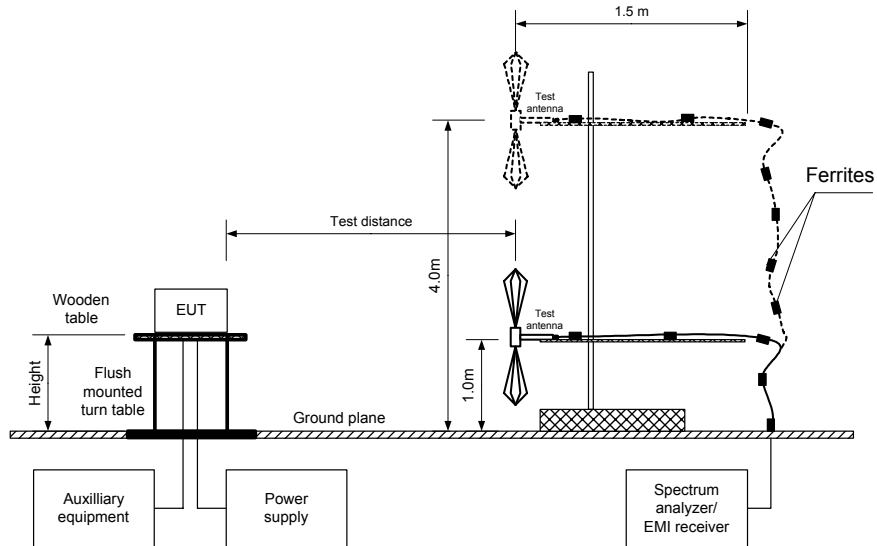

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 8:33 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 44 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 902 - 928 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3.0 MHz
 VIDEO BANDWIDTH: 3.0 MHz

EUT 6 dB BANDWIDTH: 1.0 MHz
 MODULATION: PSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kBps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.78	117.02	Vertical	1.0	206	3	18.79	30.0	-11.21	Pass
916.73	116.58	Vertical	1.0	204	3	18.35	30.0	-11.65	Pass
923.85	118.35	Vertical	1.0	195	3	20.12	30.0	-9.88	Pass

EUT 6 dB BANDWIDTH: 1.25 MHz
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 120 kBps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.75	116.97	Vertical	1.0	204	3	18.74	30.0	-11.26	Pass
916.30	115.98	Vertical	1.0	202	3	17.75	30.0	-12.25	Pass
923.84	117.51	Vertical	1.0	195	3	19.28	30.0	-10.72	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.


Reference numbers of test equipment used

HL 0465	HL 0521	HL 0589	HL 0593	HL 0594	HL 0604	HL 1004	HL 2009
---------	---------	---------	---------	---------	---------	---------	---------


Full description is given in Appendix A.

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 8:33 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 44 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.2.1 Field strength of carrier at low frequency, PSK modulation

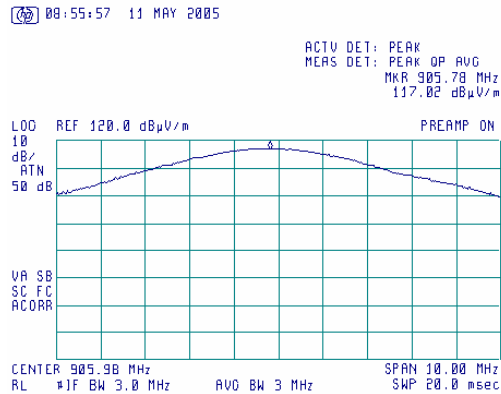

Plot 7.2.2 Field strength of carrier at mid frequency, PSK modulation

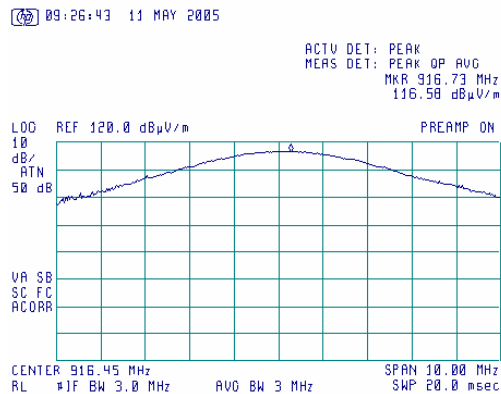


Plot 7.2.3 Field strength of carrier at high frequency, PSK modulation

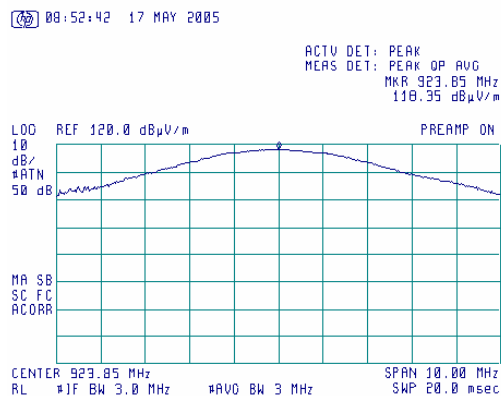


Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 8:33 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 44 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.2.4 Field strength of carrier at low frequency, FSK modulation

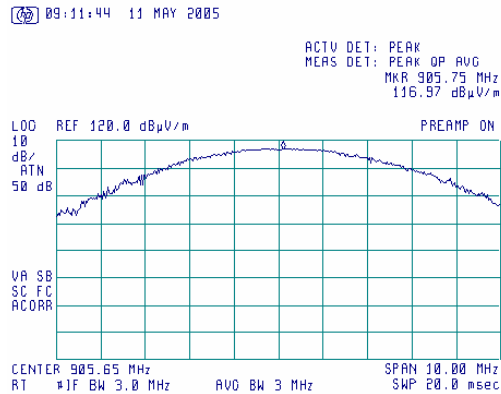

Plot 7.2.5 Field strength of carrier at mid frequency, FSK modulation

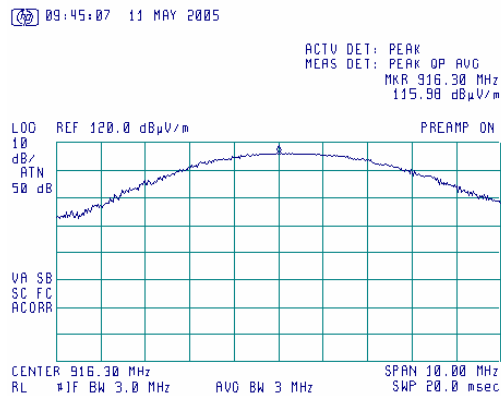

Plot 7.2.6 Field strength of carrier at high frequency, FSK modulation

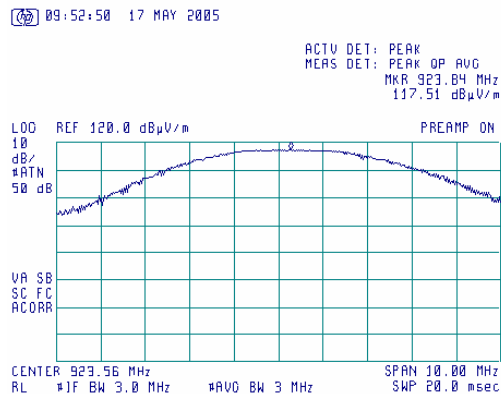

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μ V/m) ^{***}			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc ^{***}
	Peak	Quasi Peak	Average	
0.009 – 0.490*	NA	128.5 – 93.8**	NA	20.0
0.490 – 1.705*		73.8 – 63.0**		
1.705 – 30.0*		69.5**		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:
 $LimS2 = LimS1 + 40 \log (S1/S2)$,

where S1 and S2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results with respect to the limits were recorded in the associated tables and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer / EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results with respect to the limits were recorded in the associated tables and shown in the associated plots.

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


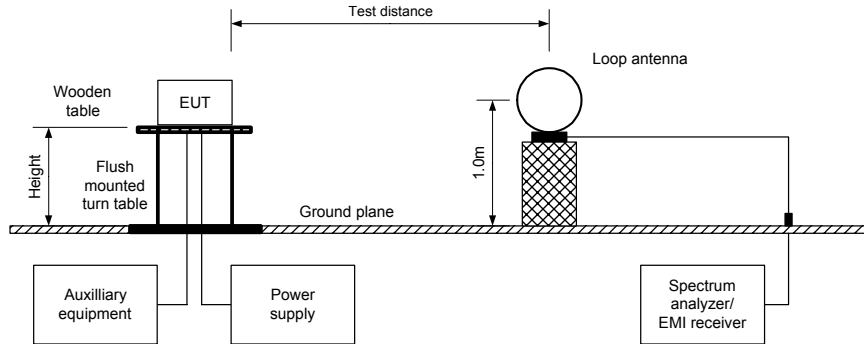


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz

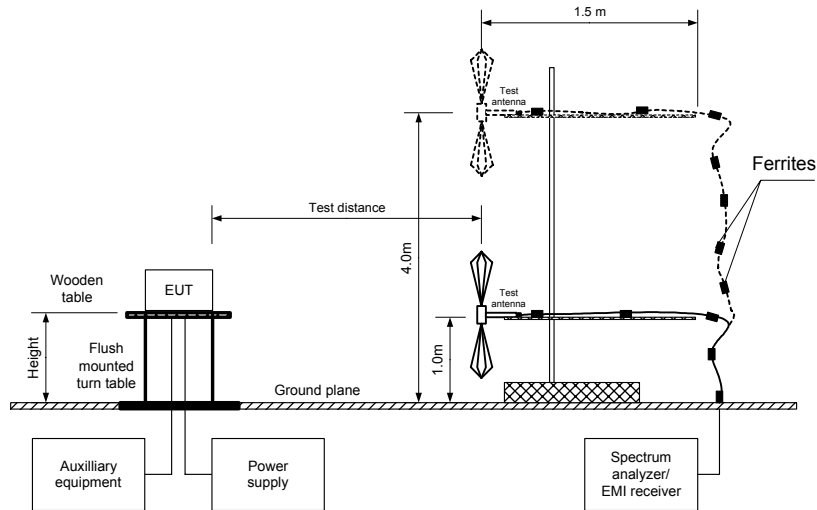

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 9500 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

MODULATION: PSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 DUTY CYCLE: 5.99 %
 TRANSMITTER OUTPUT POWER: 18.79 dBm at low carrier frequency
 18.35 dBm at mid carrier frequency
 20.12 dBm at high carrier frequency

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1810.86	73.74	Vertical	1.40	90	116.39	42.65	20.00	-22.65	Pass
6338.08	70.67	Vertical	1.40	85		45.72		-25.72	
7243.14	61.67	Vertical	1.50	95		54.72		-34.72	
Mid carrier frequency									
1832.58	76.61	Vertical	1.30	87	116.20	39.59	20.00	-19.59	Pass
5497.84	63.83	Vertical	1.30	77		52.37		-32.37	
6414.16	63.17	Vertical	1.60	86		53.03		-33.03	
High carrier frequency									
1847.08	75.97	Vertical	1.30	92	116.68	40.71	20.00	-20.71	Pass
5541.28	63.33	Vertical	1.50	80		53.35		-33.35	
6464.78	60.33	Vertical	1.50	90		56.35		-36.35	
9235.23	54.17	Vertical	1.40	87		62.51		-42.51	

MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 120 kbps
 DUTY CYCLE: 1.89 %
 TRANSMITTER OUTPUT POWER: 18.74 dBm at low carrier frequency
 17.75 dBm at mid carrier frequency
 19.28 dBm at high carrier frequency

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1810.86	74.60	Vertical	1.40	90	116.97	42.37	20.00	-22.37	Pass
6338.03	71.67	Vertical	1.40	85		45.30		-25.30	
7243.42	63.00	Vertical	1.50	95		53.97		-33.97	
Mid carrier frequency									
1832.57	78.20	Vertical	1.30	87	118.13	39.93	20.00	-19.93	Pass
5497.80	64.83	Vertical	1.30	77		53.30		-33.30	
6414.06	67.00	Vertical	1.60	86		51.13		-31.13	
High carrier frequency									
1847.07	77.30	Vertical	1.30	92	117.64	40.34	20.00	-20.34	Pass
5541.29	64.67	Vertical	1.50	80		52.97		-32.97	
6464.72	62.17	Vertical	1.50	90		55.47		-35.47	
9236.10	58.00	Vertical	1.40	87		59.64		-39.64	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Attenuation below carrier – specification limit.

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9500 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

MODULATION: PSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 DUTY CYCLE: 5.99 %
 TRANSMITTER OUTPUT POWER: 18.79 dBm at low carrier frequency
 18.35 dBm at mid carrier frequency
 20.12 dBm at high carrier frequency

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=300 Hz)			Verdict	
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)		Margin, dB***
Low carrier frequency											
2716.17	Vertical	1.50	90.00	56.17	74.00	-17.83	51.17	26.77	54.00	-27.23	Pass
3621.69	Vertical	1.50	77.00	73.39		-0.61	55.05	30.65		-23.35	
4526.84	Vertical	1.40	85.00	60.77		-13.23	44.77	20.37		-33.63	
5432.54	Vertical	1.60	90.00	69.50		-4.50	50.67	26.27		-27.73	
8148.37	Vertical	1.40	90.00	67.17		-6.83	48.00	23.60		-30.40	
9053.93	Vertical	1.50	83.00	62.13		-11.87	46.71	22.31		-31.69	
Mid carrier frequency											
2748.67	Vertical	1.40	90.00	56.00	74.00	-18.00	51.17	26.77	54.00	-27.23	Pass
3665.12	Vertical	1.50	78.00	72.00		-2.00	63.67	39.27		-14.73	
4581.41	Vertical	1.70	80.00	56.83		-17.17	46.33	21.93		-32.07	
4582.41	Vertical	1.40	87.00	56.83		-17.17	47.33	22.93		-31.07	
7330.12	Vertical	1.50	90.00	58.83		-15.17	42.33	17.93		-36.07	
8246.31	Vertical	1.50	90.00	57.67		-16.33	45.50	21.10		-32.90	
9162.97	Vertical	1.50	79.00	61.67	-12.33	43.50	19.10	-34.90			
High carrier frequency											
2770.48	Vertical	1.50	96.00	52.17	74.00	-21.83	44.67	20.27	54.00	-33.73	Pass
3694.15	Vertical	1.40	81.00	72.50		-1.50	63.83	39.43		-14.57	
4617.72	Vertical	1.50	85.00	55.67		-18.33	45.17	20.77		-33.23	
7388.21	Vertical	1.60	90.00	63.33		-10.67	50.50	26.10		-27.90	
8311.90	Vertical	1.40	91.00	56.33		-17.67	47.33	22.93		-31.07	

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 120 kbps
 DUTY CYCLE: 1.89 %
 TRANSMITTER OUTPUT POWER: 18.74 dBm at low carrier frequency
 17.75 dBm at mid carrier frequency
 19.28 dBm at high carrier frequency

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Average factor, dB	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
2717.18	Vertical	1.50	90.00	61.95	74.00	-12.05	-34.4	27.55	54.00	-26.45	Pass
3622.64	Vertical	1.50	77.00	73.07		-0.93	-34.4	38.67		-15.33	
4528.45	Vertical	1.40	85.00	56.82		-17.18	-34.4	22.42		-31.58	
5431.29	Vertical	1.60	90.00	63.67		-10.33	-34.4	29.27		-24.73	
8146.42	Vertical	1.40	90.00	58.50		-15.50	-34.4	24.10		-29.90	
9051.83	Vertical	1.50	83.00	60.50		-13.50	-34.4	26.10		-27.90	
Mid carrier frequency											
2748.30	Vertical	1.40	90.00	52.50	74.00	-21.50	-34.4	18.10	54.00	-35.90	Pass
3666.58	Vertical	1.50	78.00	69.00		-5.00	-34.4	34.60		-19.40	
4580.38	Vertical	1.70	80.00	53.50		-20.50	-34.4	19.10		-34.90	
7328.35	Vertical	1.40	87.00	63.00		-11.00	-34.4	28.60		-25.40	
8244.35	Vertical	1.50	90.00	59.00		-15.00	-34.4	24.60		-29.40	
9160.49	Vertical	1.50	90.00	58.67		-15.33	-34.4	24.27		-29.73	
High carrier frequency											
2771.03	Vertical	1.50	96.00	54.00	74.00	-20.00	-34.4	19.60	54.00	-34.40	Pass
3694.10	Vertical	1.40	81.00	69.00		-5.00	-34.4	34.60		-19.40	
4616.75	Vertical	1.50	85.00	54.33		-19.67	-34.4	19.93		-34.07	
7386.53	Vertical	1.60	90.00	62.33		-11.67	-34.4	27.93		-26.07	
8309.68	Vertical	1.40	91.00	58.17		-15.83	-34.4	23.77		-30.23	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.3.4 Average factor calculation

Transmission pulse		Average factor, dB
Duration, ms	Period, ms	
PSK modulated signal		
4.750	79.250	-24.4
FSK modulated signal		
1.500	79.250	-34.4

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100ms} \times Number\ of\ bursts\ within\ 100ms \right)$$

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 MODULATION: PSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 DUTY CYCLE: 5.99 %
 TRANSMITTER OUTPUT POWER: 18.79 dBm at low carrier frequency
 18.35 dBm at mid carrier frequency
 20.12 dBm at high carrier frequency

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency								
No spurious emissions were found.								Pass
Mid carrier frequency								
No spurious emissions were found.								Pass
High carrier frequency								
No spurious emissions were found.								Pass

MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 120 kbps
 DUTY CYCLE: 1.89 %
 TRANSMITTER OUTPUT POWER: 18.74 dBm at low carrier frequency
 17.75 dBm at mid carrier frequency
 19.28 dBm at high carrier frequency

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency								
No spurious emissions were found.								Pass
Mid carrier frequency								
No spurious emissions were found.								Pass
High carrier frequency								
No spurious emissions were found.								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.3.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2655 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0287	HL 0410	HL 0446	HL 0465	HL 0521	HL 0589	HL 0593	HL 0594
HL 0604	HL 0813	HL 1004	HL 1200	HL 1424	HL 1430	HL 1552	HL 1848
HL 1941	HL 1947	HL 1984	HL 2009	HL 2254	HL 2259	HL 2387	HL 2499


Full description is given in Appendix A.

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.1 Field strength measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: FSK


11:55:32 17 MAY 2005

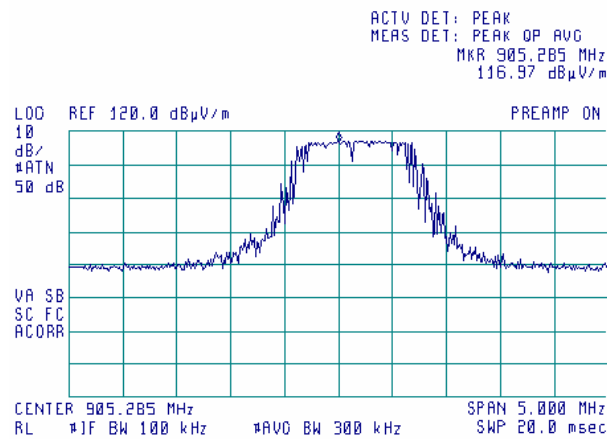

Plot 7.3.2 Field strength measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 MODULATION: FSK

11:48:24 17 MAY 2005

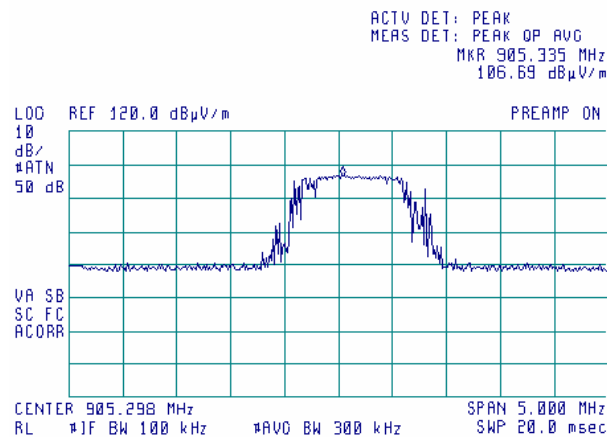


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.3 Field strength measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: FSK


11:35:40 17 MAY 2005

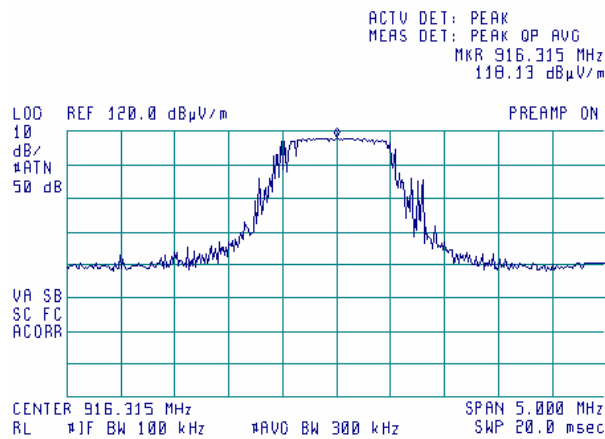

Plot 7.3.4 Field strength measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: FSK

11:41:41 17 MAY 2005

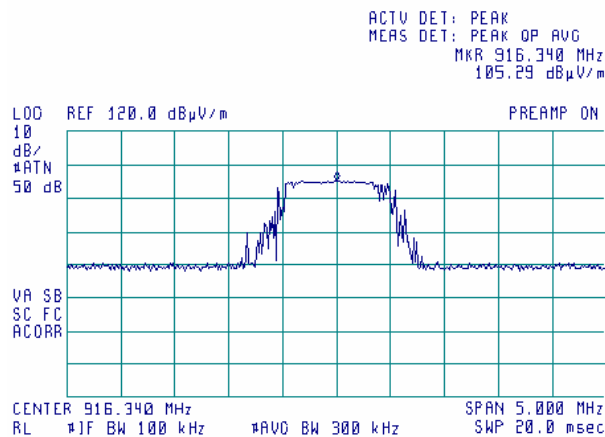


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.5 Field strength measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: FSK


11:59:18 17 MAY 2005

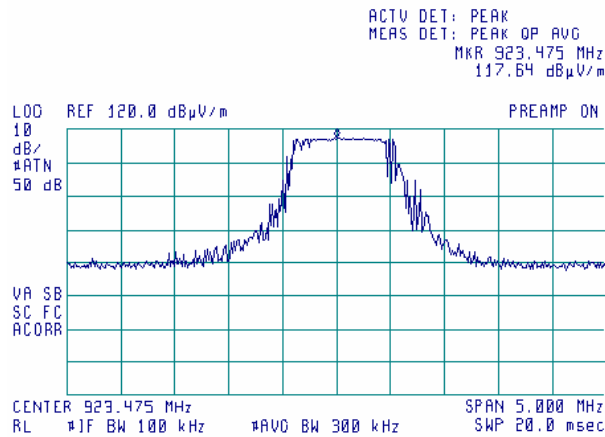

Plot 7.3.6 Field strength measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: FSK

12:03:19 17 MAY 2005

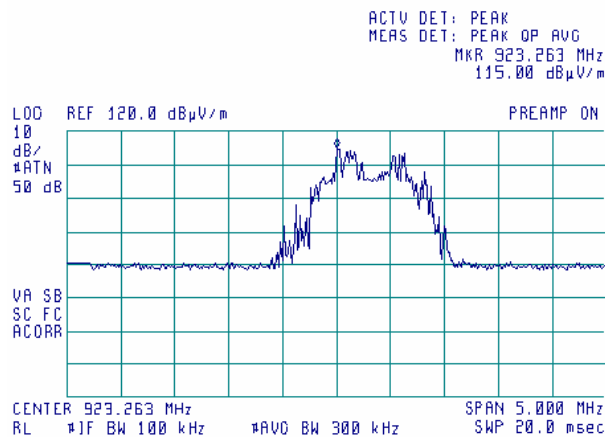


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.7 Field strength measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK


12:21:44 17 MAY 2005

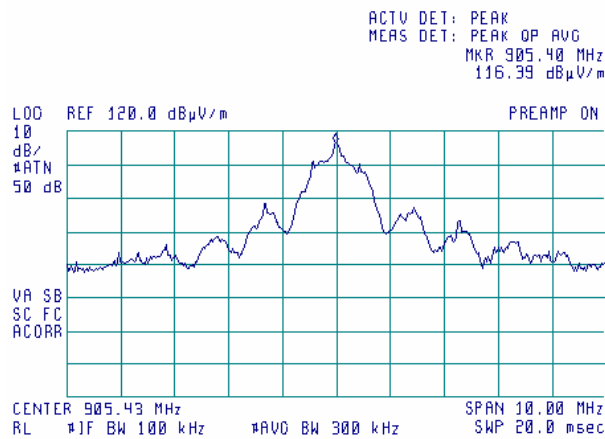

Plot 7.3.8 Field strength measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

12:17:43 17 MAY 2005

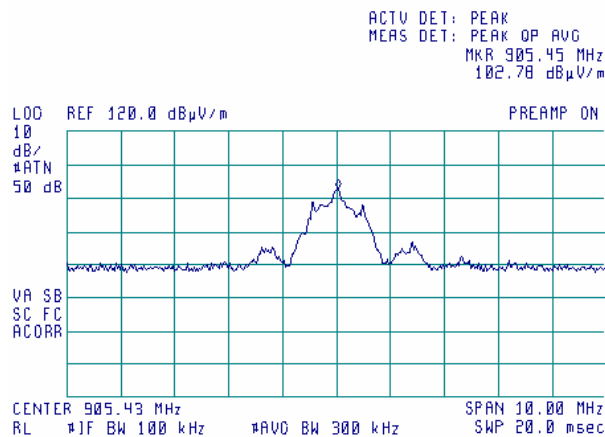


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.9 Field strength measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK


12:12:31 17 MAY 2005

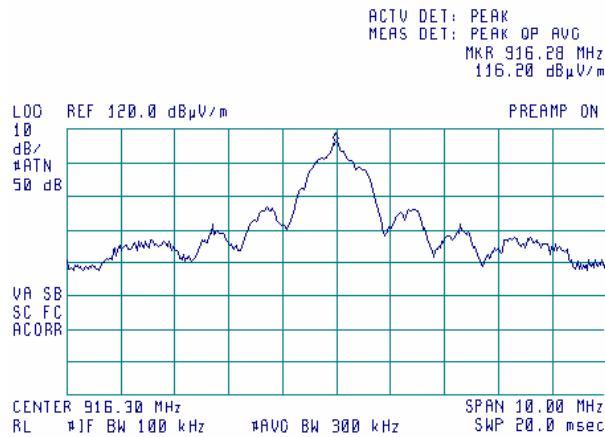

Plot 7.3.10 Field strength measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

12:14:25 17 MAY 2005

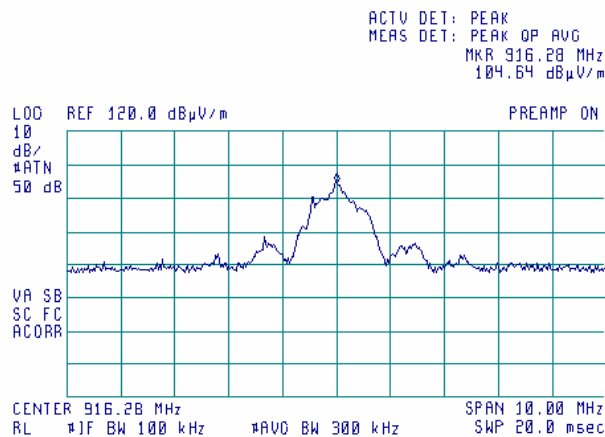


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.11 Field strength measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK


12:10:06 17 MAY 2005

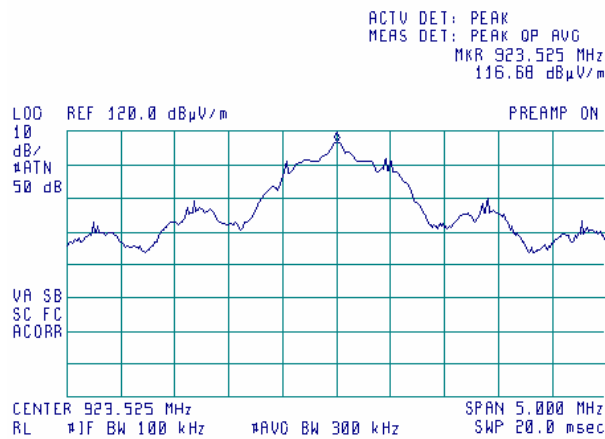

Plot 7.3.12 Field strength measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

12:07:49 17 MAY 2005

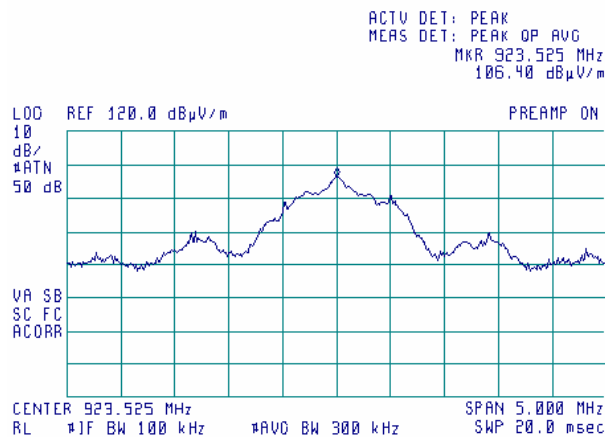


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.13 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK


11:45:59 JUN 03, 2005

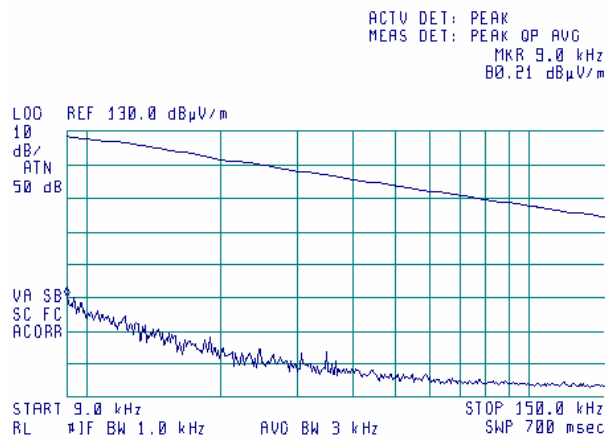

Plot 7.3.14 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: FSK

11:44:58 JUN 03, 2005

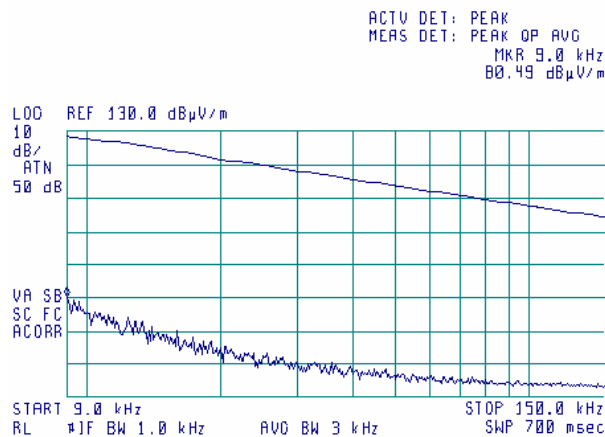


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.15 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK


11:41:34 JUN 03, 2005

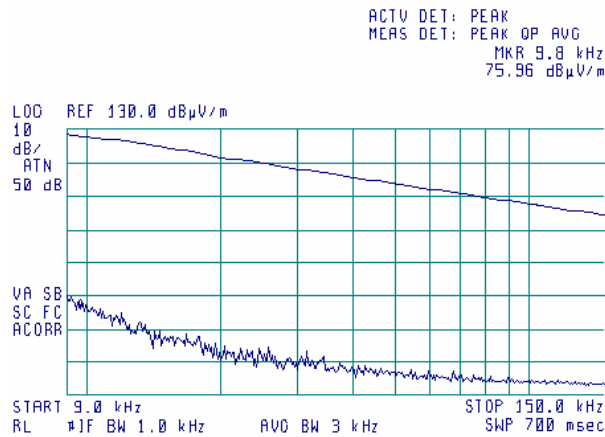

Plot 7.3.16 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: FSK

11:44:00 JUN 03, 2005

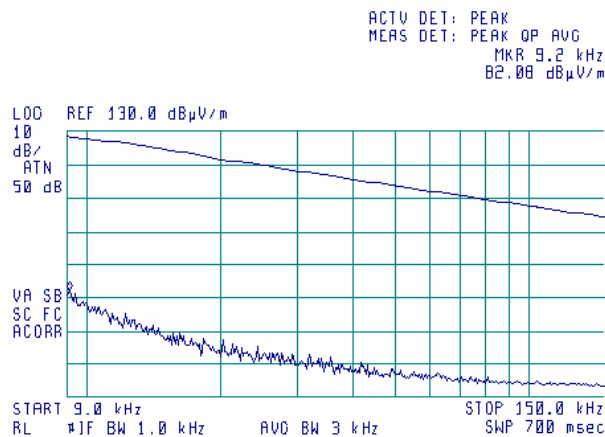


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.17 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK


11:40:17 JUN 03, 2005

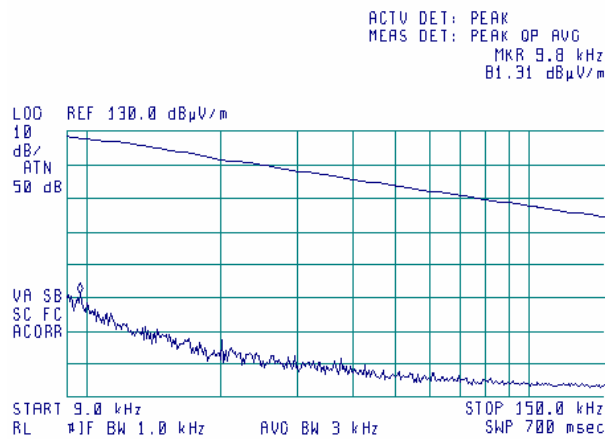

Plot 7.3.18 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: FSK

11:38:29 JUN 03, 2005

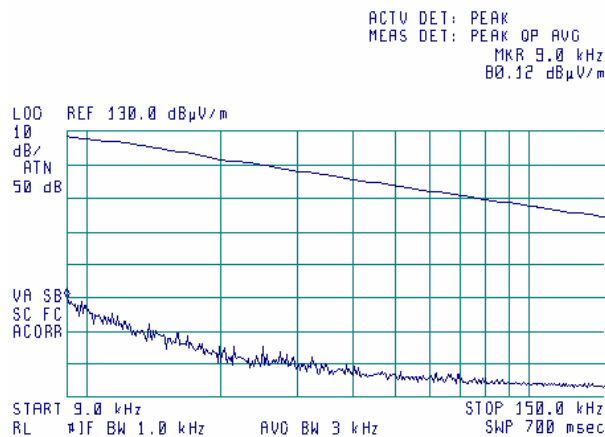


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.19 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK


11:51:39 JUN 03, 2005

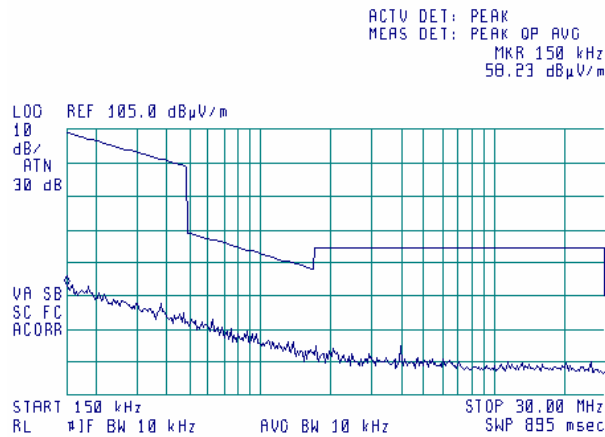

Plot 7.3.20 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: FSK

11:54:01 JUN 03, 2005

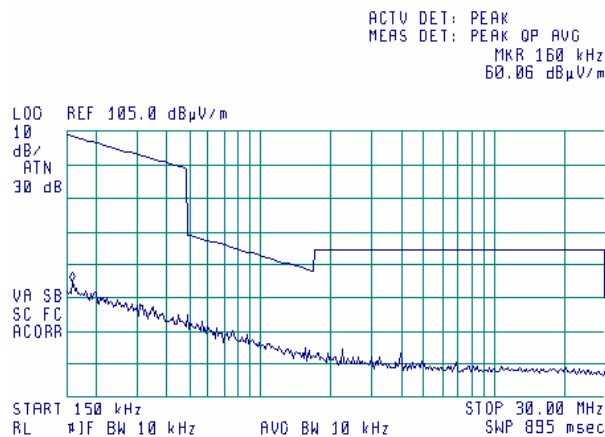


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.21 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK


11:56:05 JUN 03, 2005

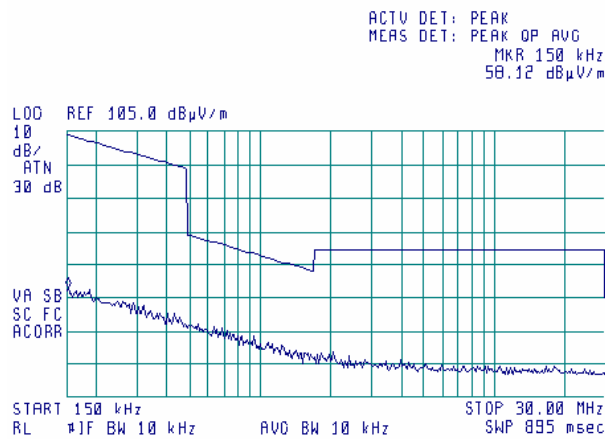

Plot 7.3.22 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: FSK

11:55:06 JUN 03, 2005

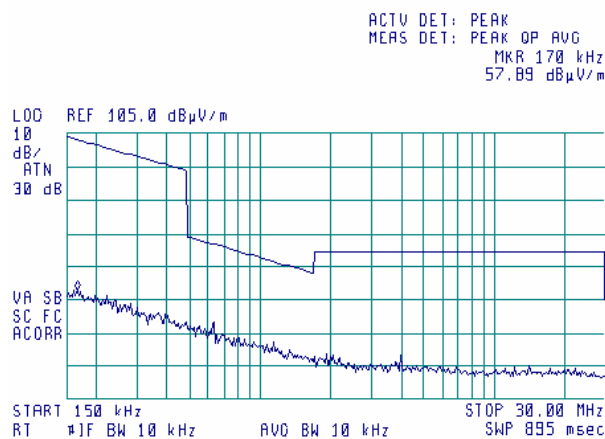


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.23 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK


11:57:12 JUN 03, 2005

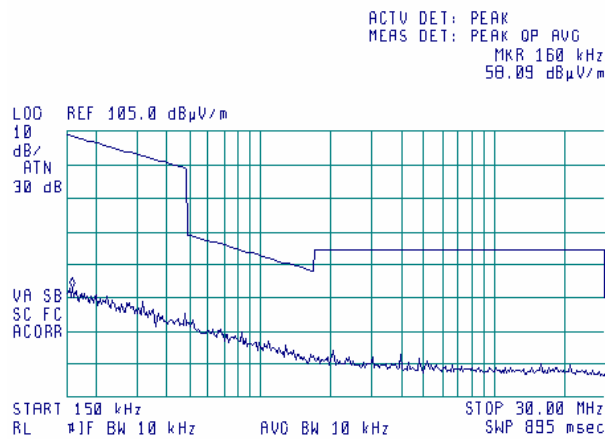

Plot 7.3.24 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: FSK

11:58:19 JUN 03, 2005

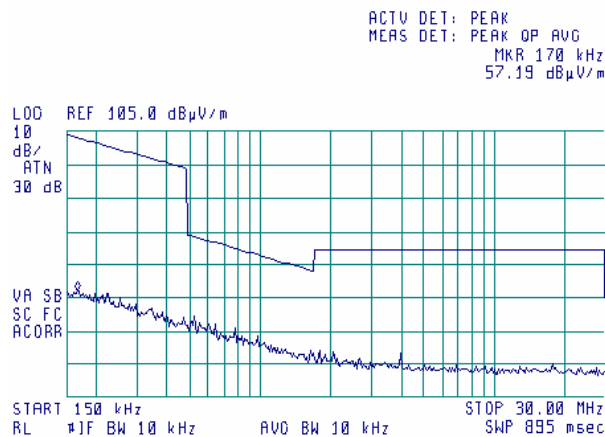


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.25 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK


13:10:33 17 MAY 2005

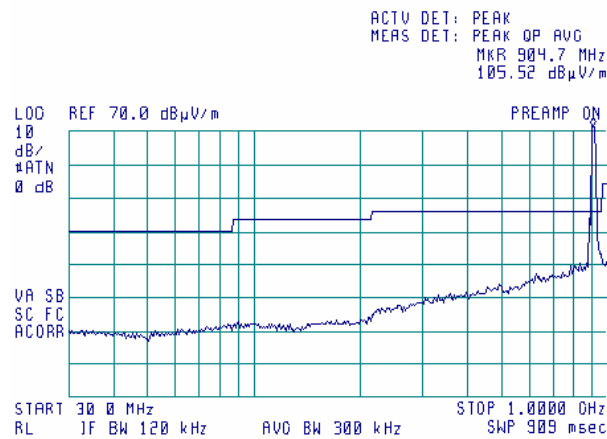

Plot 7.3.26 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK

13:20:02 17 MAY 2005

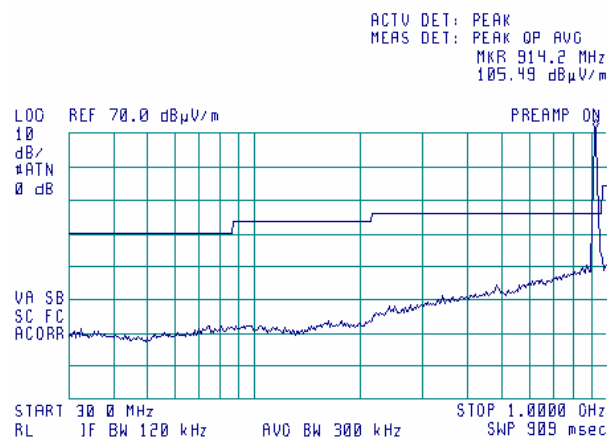


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.27 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK


13:24:59 17 MAY 2005

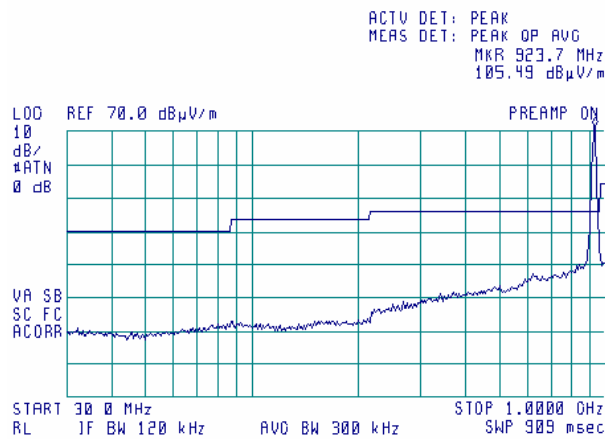

Plot 7.3.28 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

13:42:49 17 MAY 2005

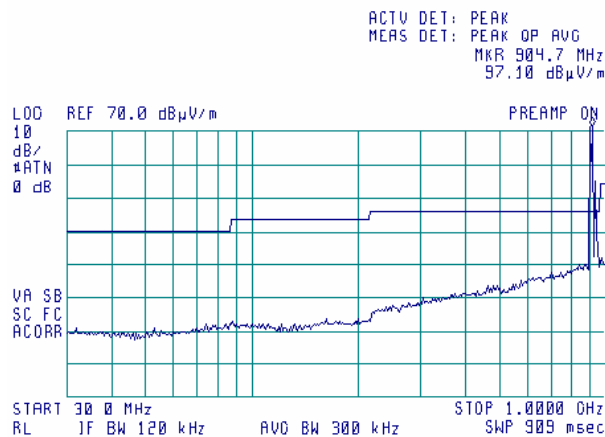


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.29 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: FSK


13:38:07 17 MAY 2005

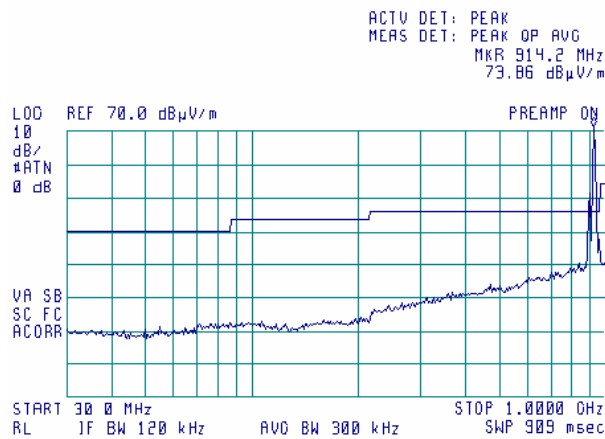

Plot 7.3.30 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: FSK

13:32:18 17 MAY 2005

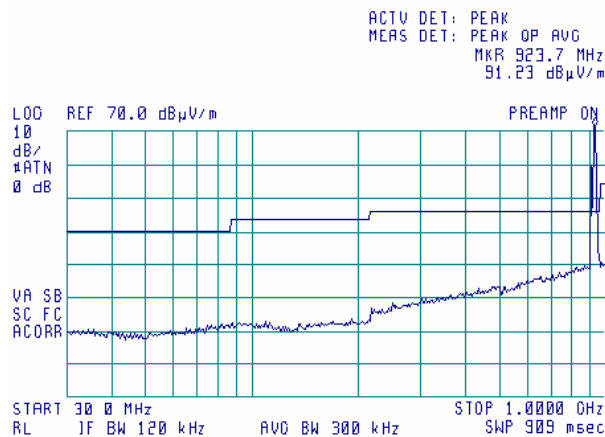


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.31 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: PSK


08:42:27 JUN 03, 2005

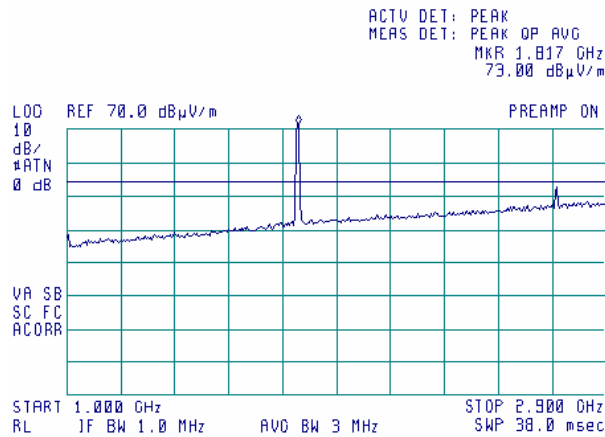

Plot 7.3.32 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: FSK

08:54:04 JUN 03, 2005

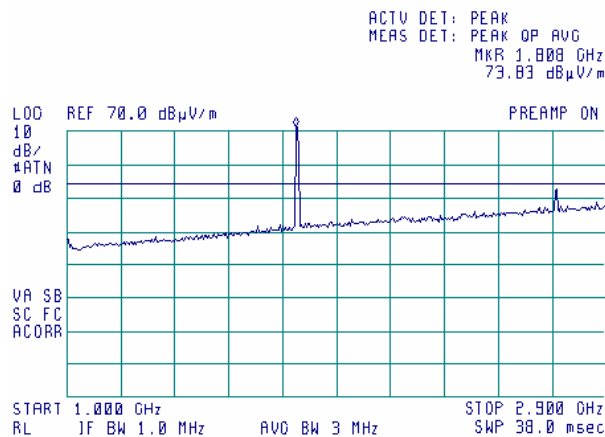


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.33 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK


08:59:05 JUN 03, 2005

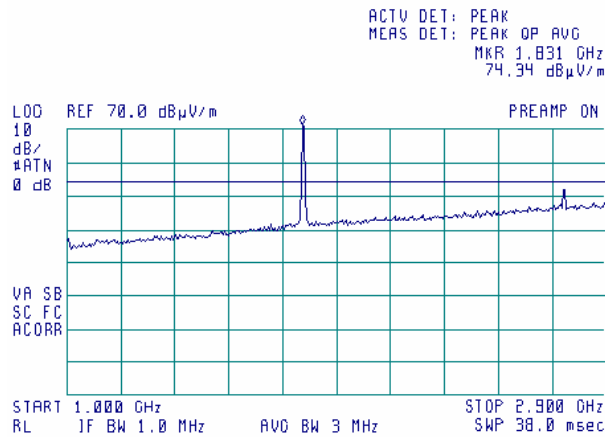

Plot 7.3.34 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

08:56:03 JUN 03, 2005

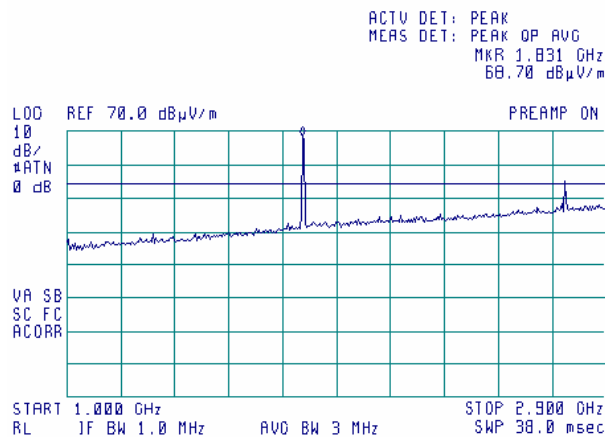


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.35 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK


09:02:30 JUN 03, 2005

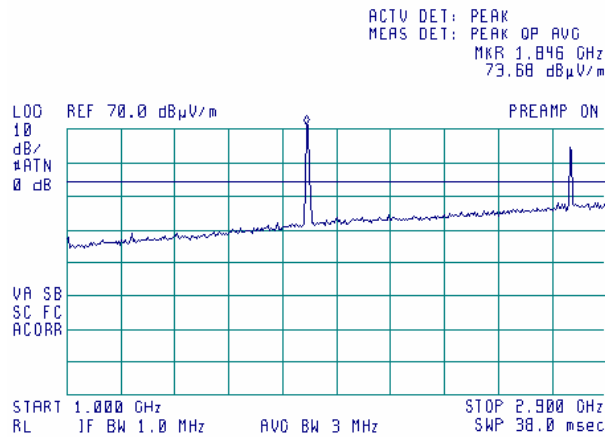

Plot 7.3.36 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK


09:05:30 JUN 03, 2005

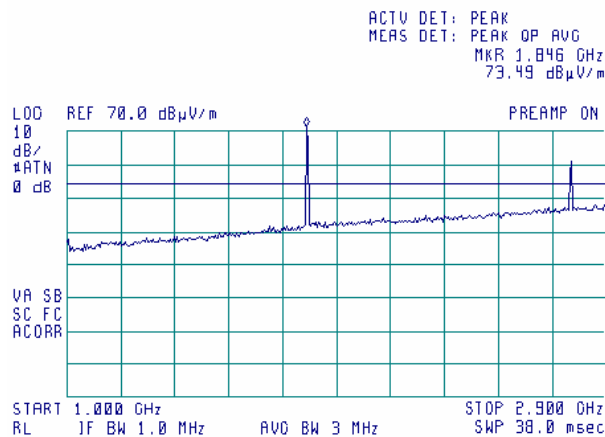

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.37 Radiated emission measurements from 2900 to 8000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK

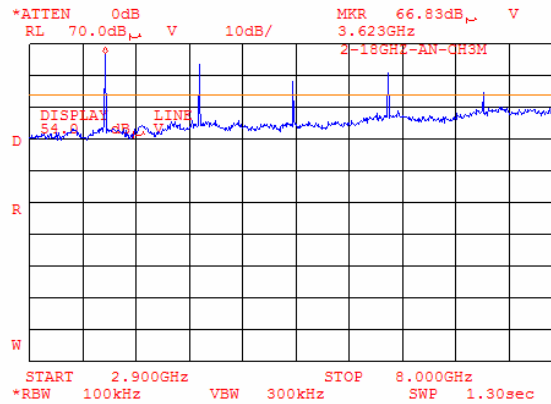

Plot 7.3.38 Radiated emission measurements from 2900 to 8000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

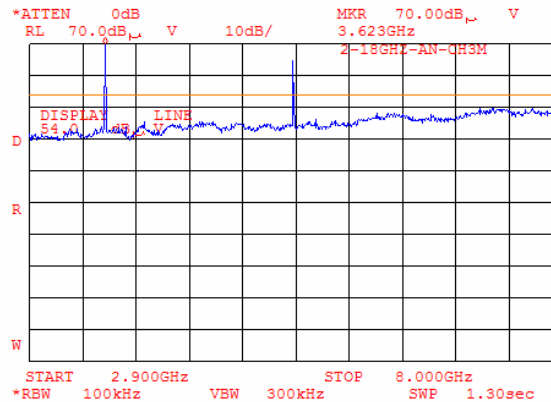

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.39 Radiated emission measurements from 2900 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK

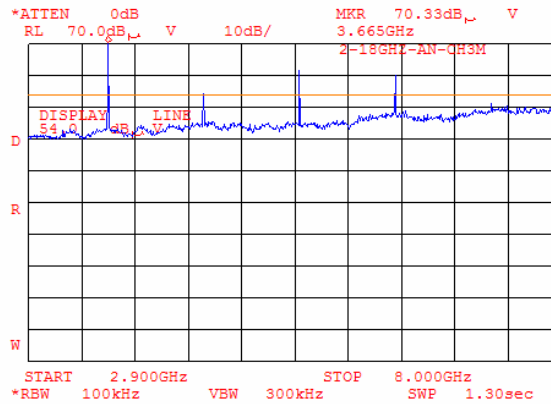

Plot 7.3.40 Radiated emission measurements from 2900 to 8000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

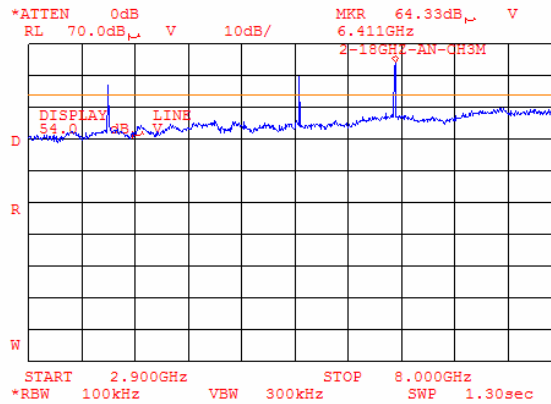

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.41 Radiated emission measurements from 2900 to 8000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: PSK

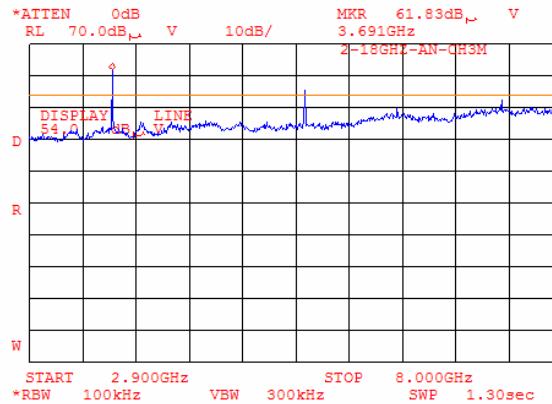

Plot 7.3.42 Radiated emission measurements from 2900 to 8000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: FSK

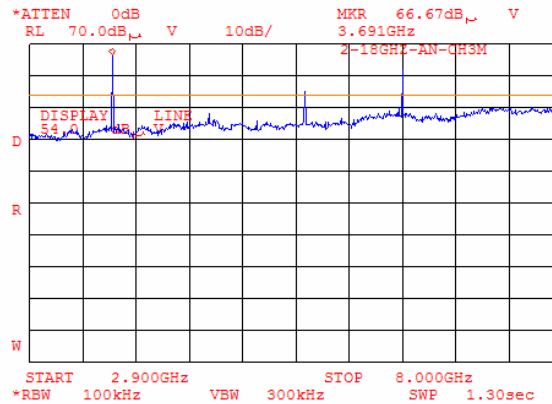

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.43 Radiated emission measurements from 8000 to 9500 MHz at the low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK

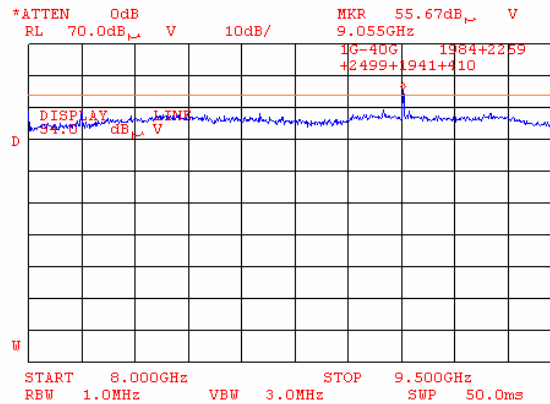

Plot 7.3.44 Radiated emission measurements from 8000 to 9500 MHz at the low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

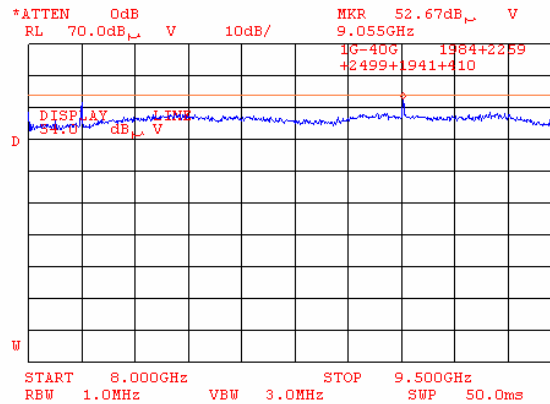

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.45 Radiated emission measurements from 8000 to 9500 MHz at the mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK

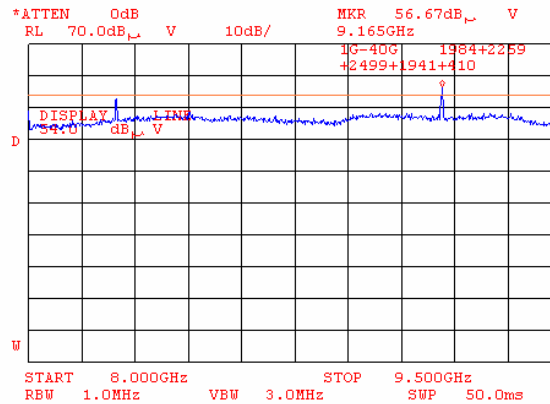

Plot 7.3.46 Radiated emission measurements from 8000 to 9500 MHz at the mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

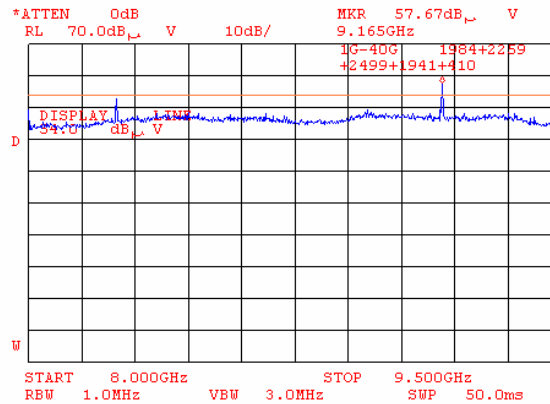

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.47 Radiated emission measurements from 8000 to 9500 MHz at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: PSK

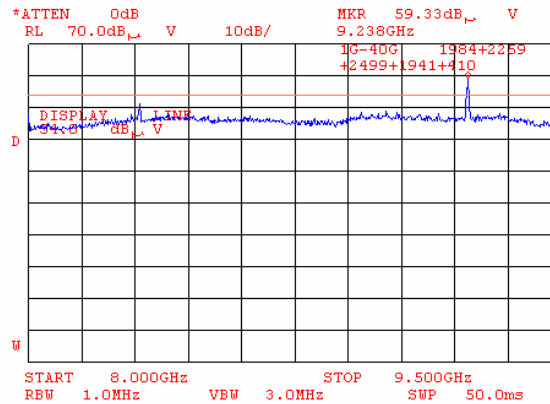

Plot 7.3.48 Radiated emission measurements from 8000 to 9500 MHz at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: FSK

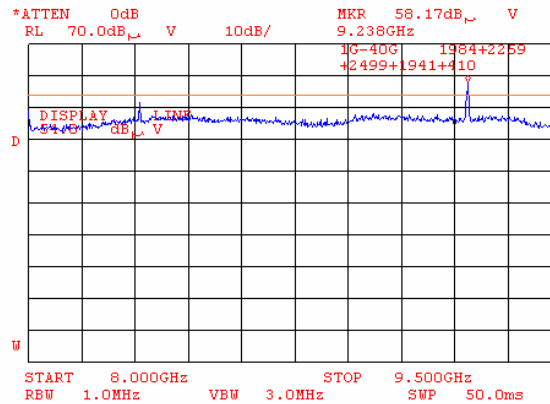


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.49 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: PSK


10:16:34 JUN 03, 2005

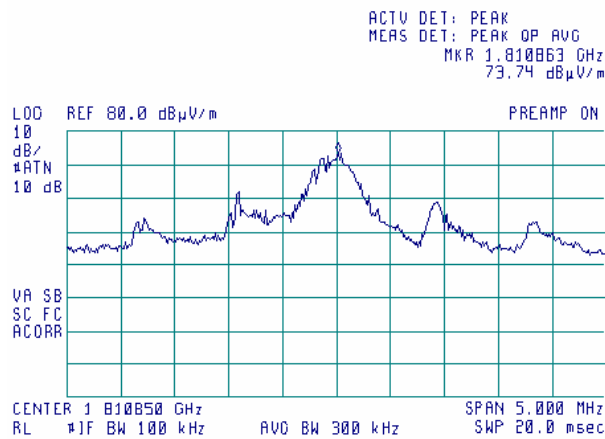

Plot 7.3.50 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: FSK

10:22:21 JUN 03, 2005

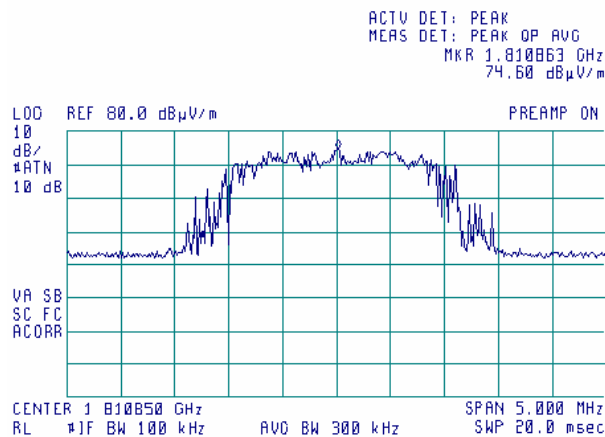


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.51 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: PSK


10:28:03 JUN 03, 2005

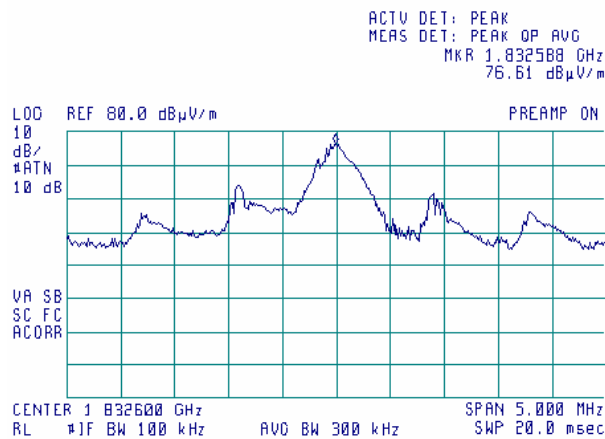

Plot 7.3.52 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: FSK

10:34:08 JUN 03, 2005

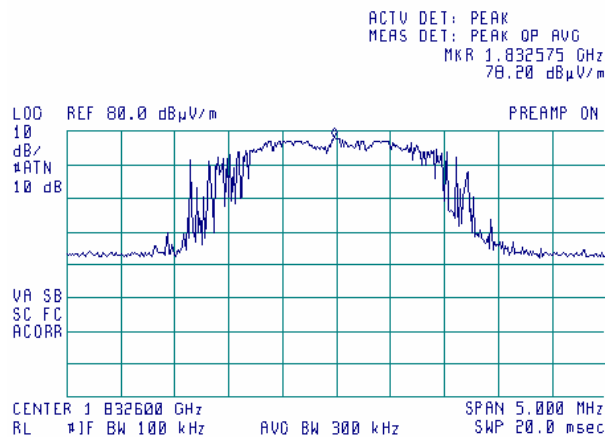


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.53 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: PSK


10:38:13 JUN 03, 2005

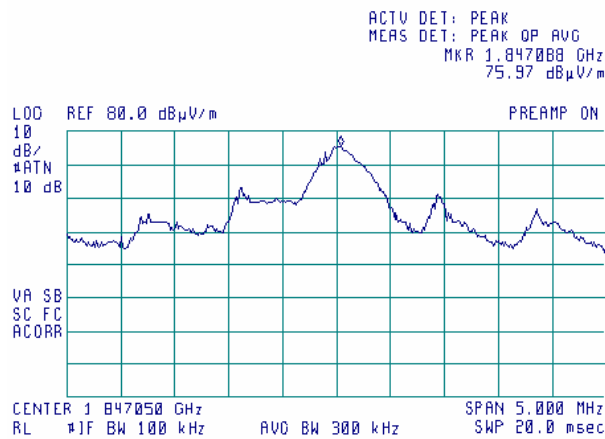

Plot 7.3.54 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: FSK


10:42:07 JUN 03, 2005

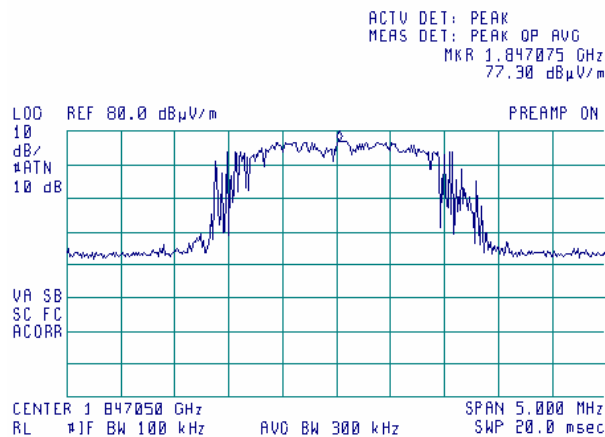

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.55 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

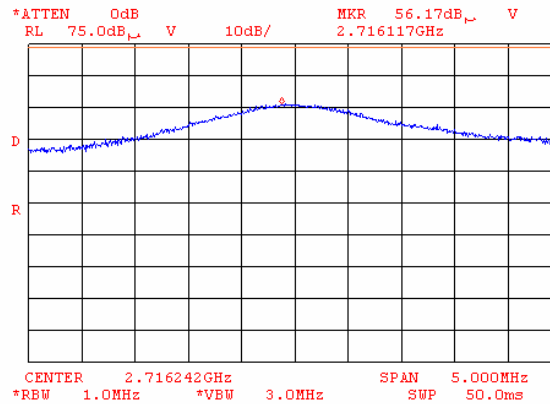

Plot 7.3.56 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

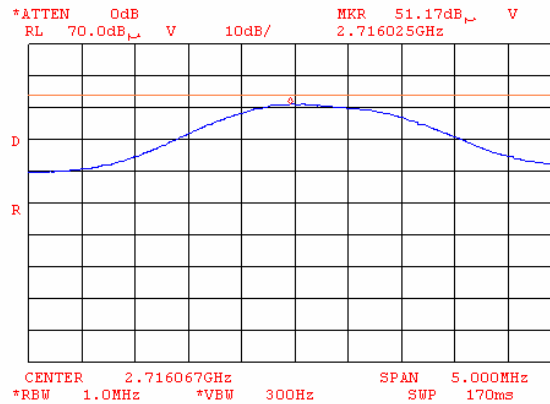


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.57 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK


15:33:02 17 MAY 2005

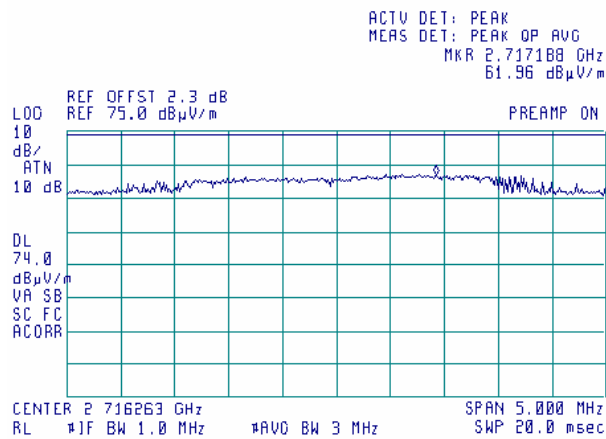

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.58 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

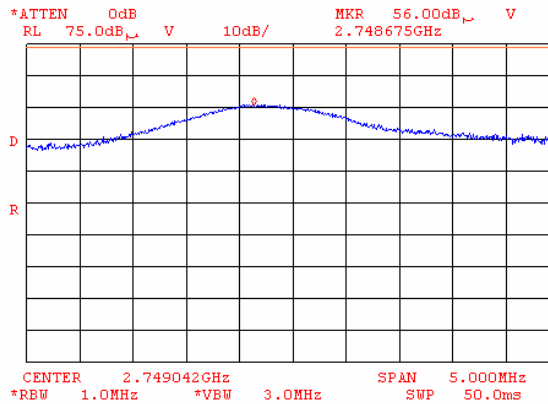

Plot 7.3.59 Radiated emission measurements at the third harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

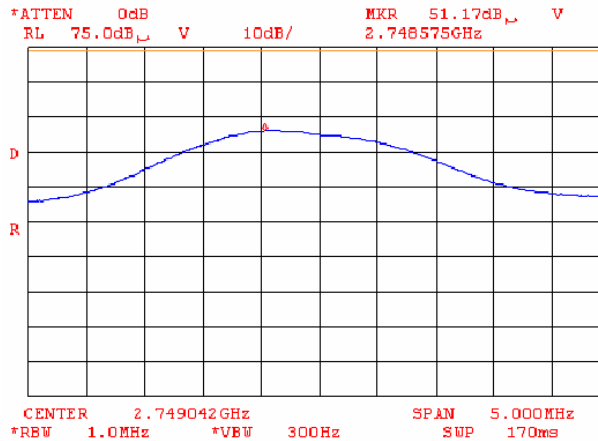

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.60 Radiated emission measurements at the third harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK

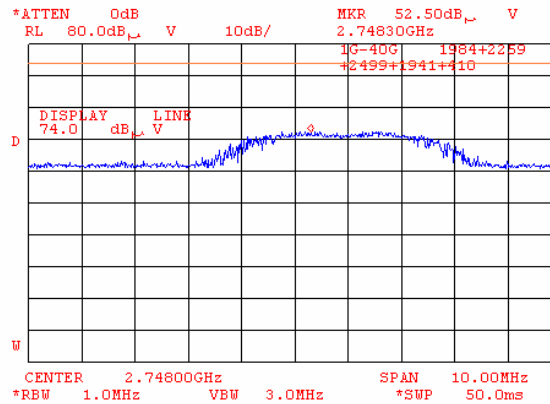

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.61 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

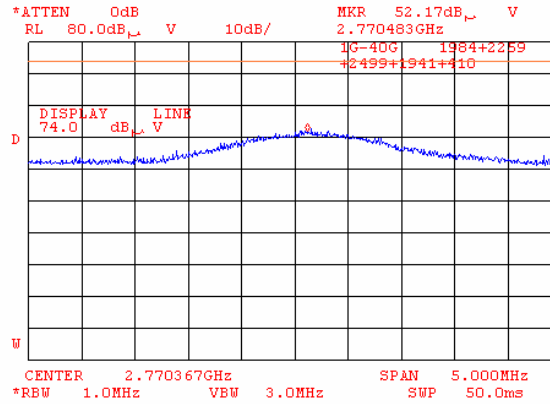

Plot 7.3.62 Radiated emission measurements at the third harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

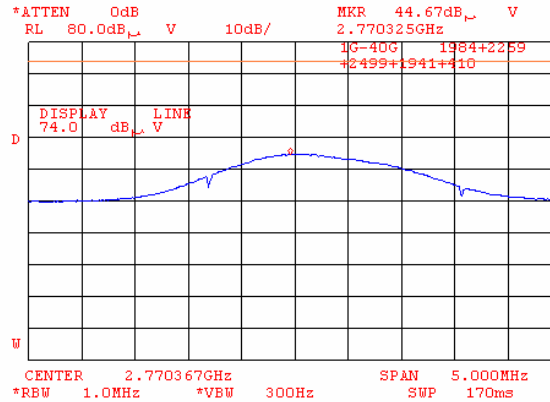

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.63 Radiated emission measurements at the third harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK

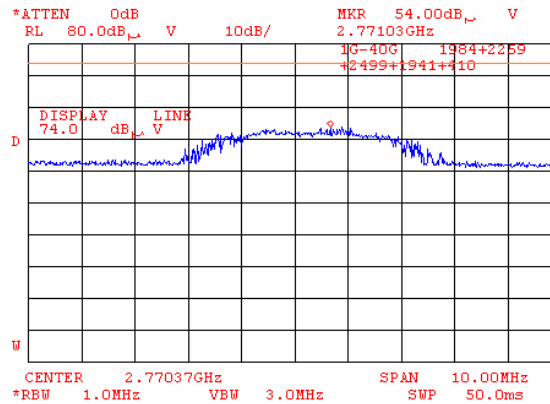

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.64 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

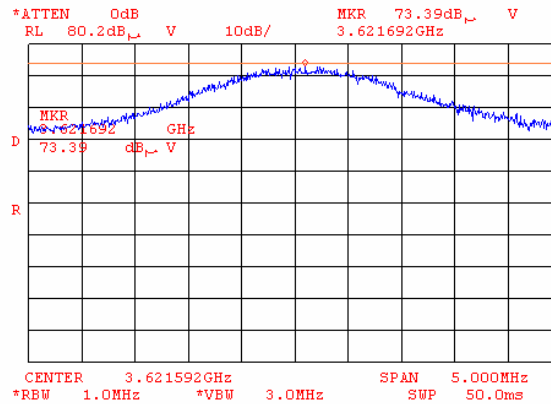

Plot 7.3.65 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

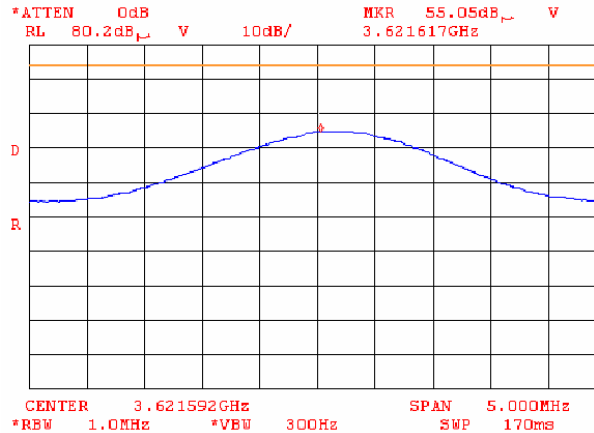


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.66 Radiated emission measurements at the forth harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK


15:45:56 17 MAY 2005

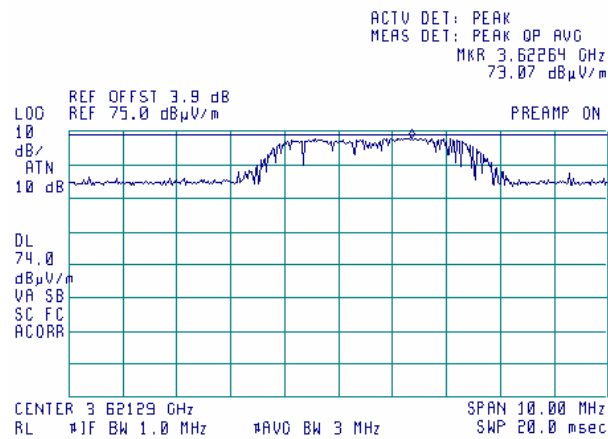

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.67 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

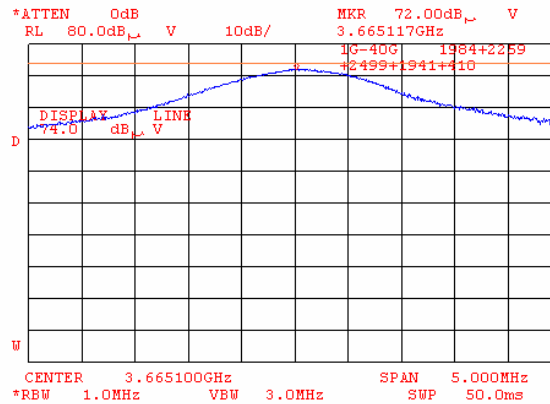

Plot 7.3.68 Radiated emission measurements at the fourth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

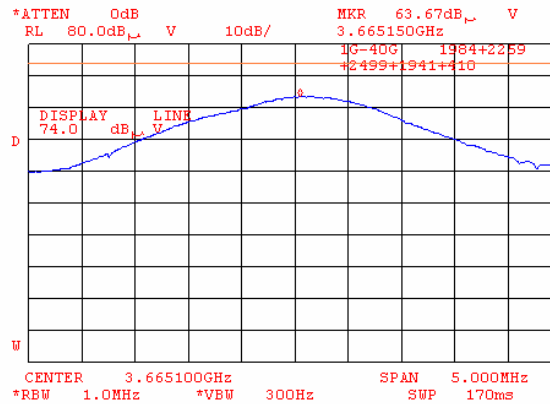

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.69 Radiated emission measurements at the fourth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

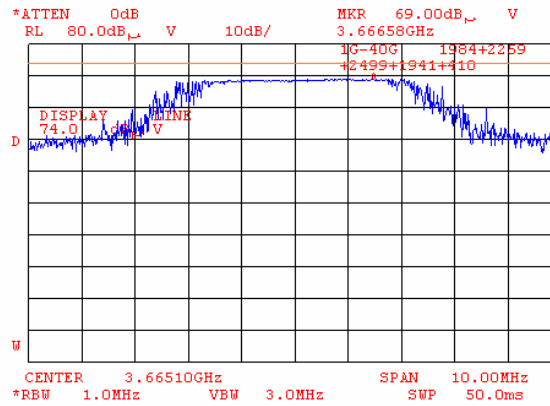

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.70 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

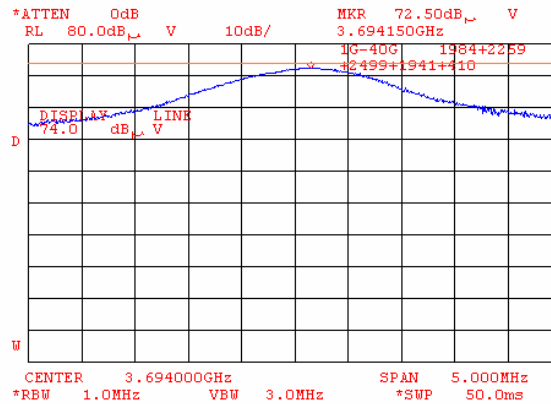

Plot 7.3.71 Radiated emission measurements at the fourth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

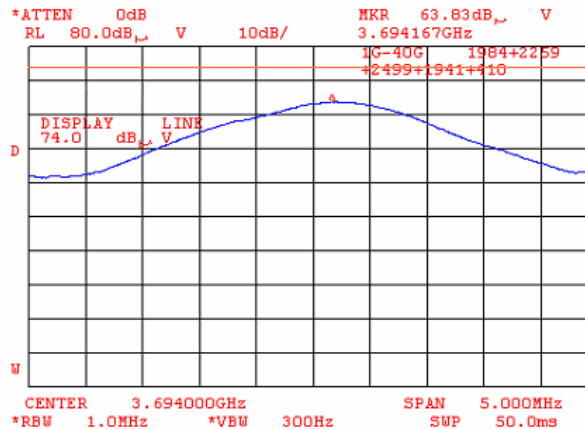

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.72 Radiated emission measurements at the fourth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

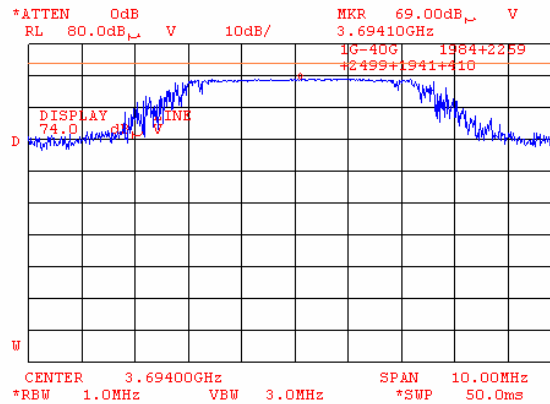

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.73 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

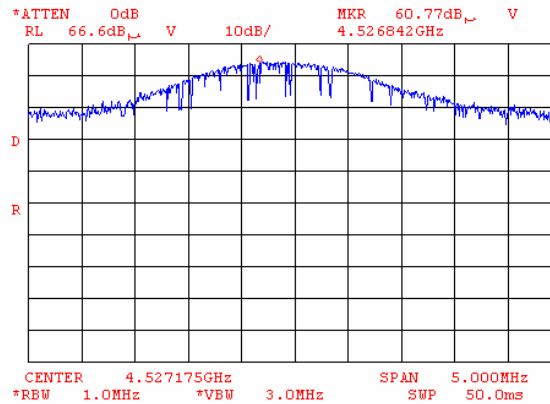

Plot 7.3.74 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

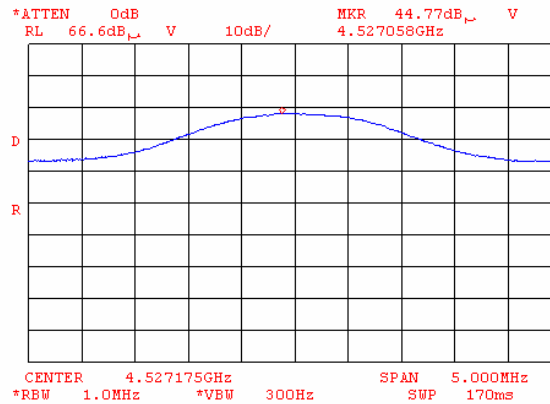


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.75 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK


17:42:11 17 MAY 2005

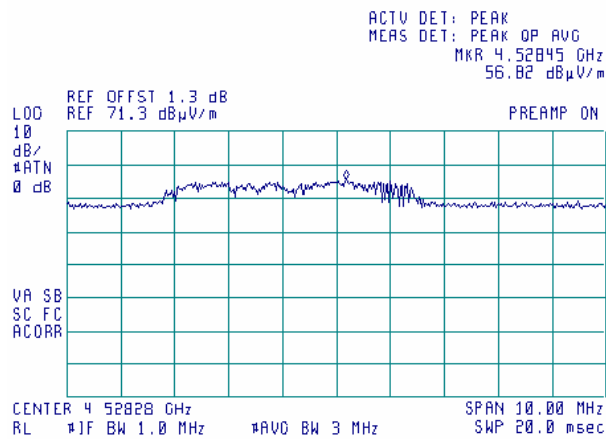

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.76 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

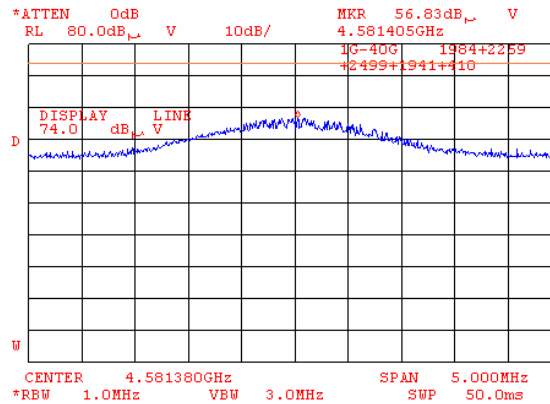

Plot 7.3.77 Radiated emission measurements at the fifth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

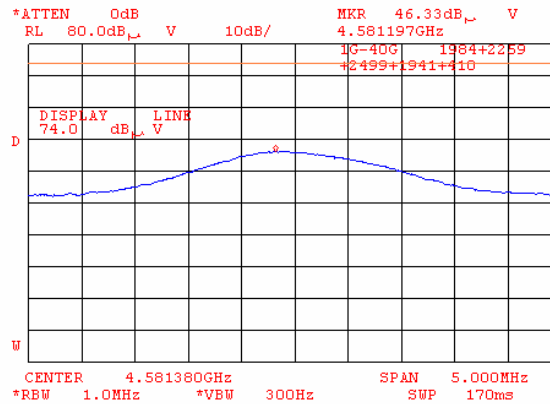

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.78 Radiated emission measurements at the fifth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

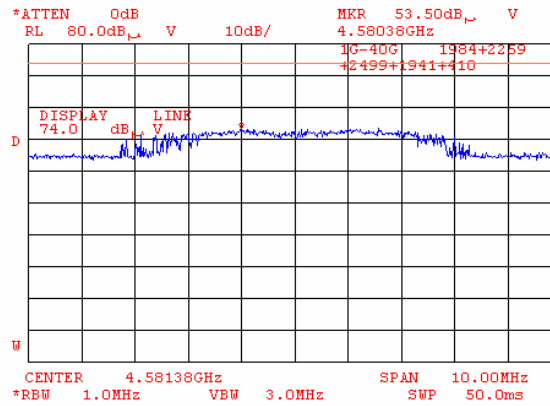

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.79 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

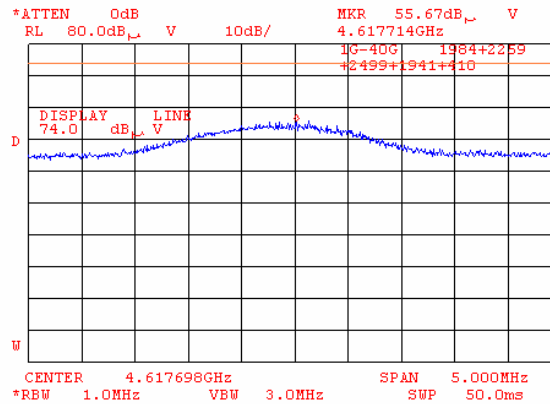

Plot 7.3.80 Radiated emission measurements at the fifth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

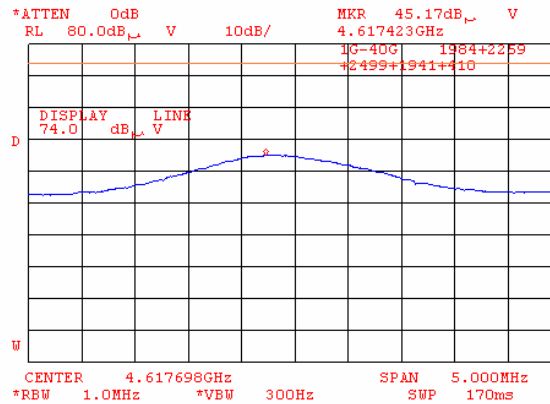

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.81 Radiated emission measurements at the fifth harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK

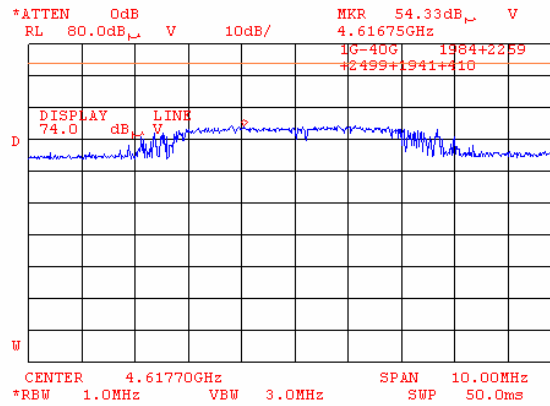

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.82 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

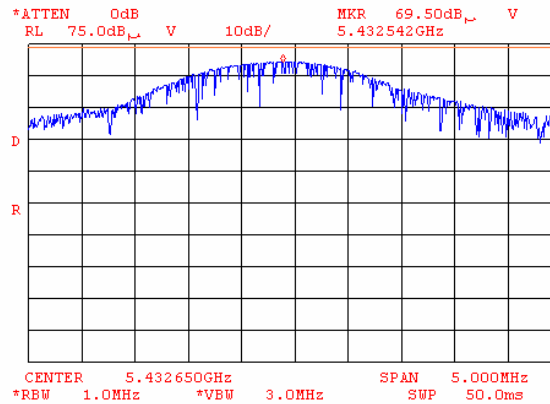

Plot 7.3.83 Radiated emission measurements at the sixth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

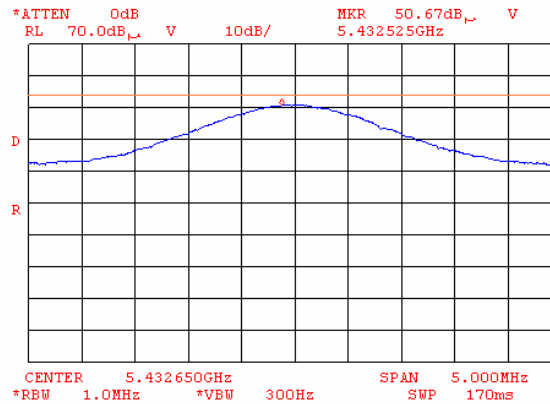

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.84 Radiated emission measurements at the sixth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

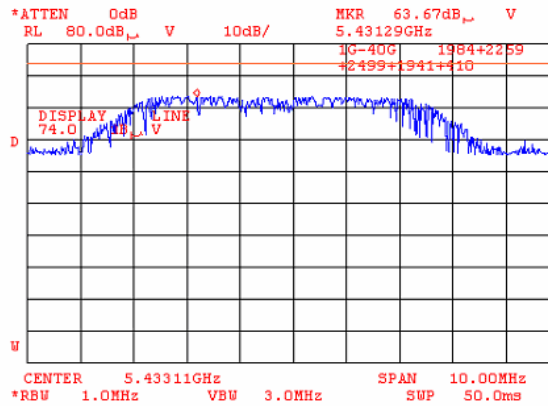

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.85 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

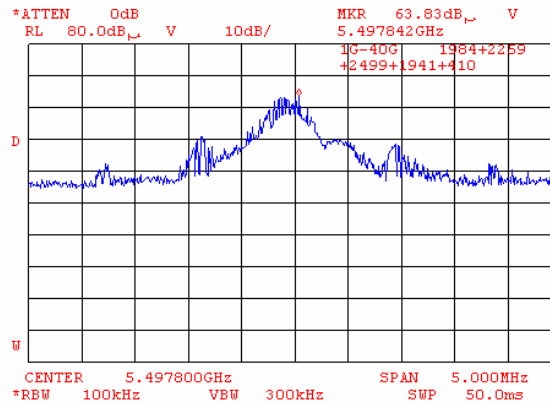

Plot 7.3.86 Radiated emission measurements at the sixth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

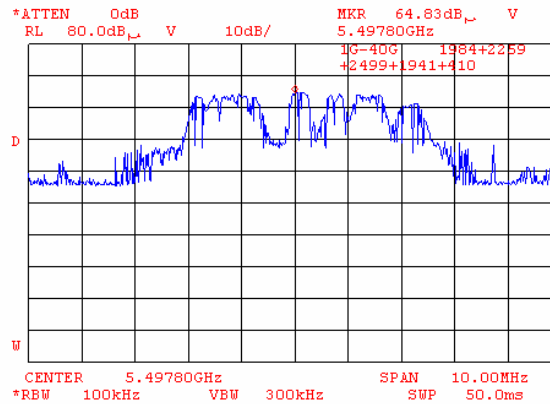

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.87 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

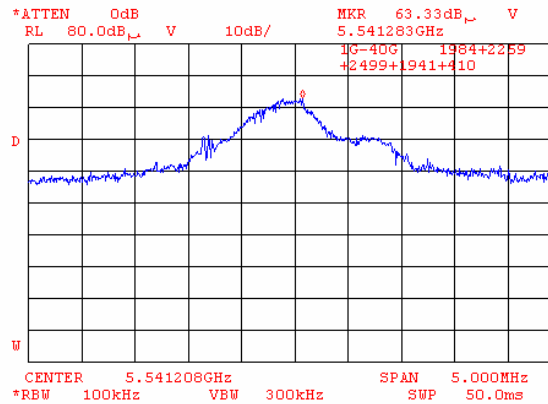

Plot 7.3.88 Radiated emission measurements at the sixth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

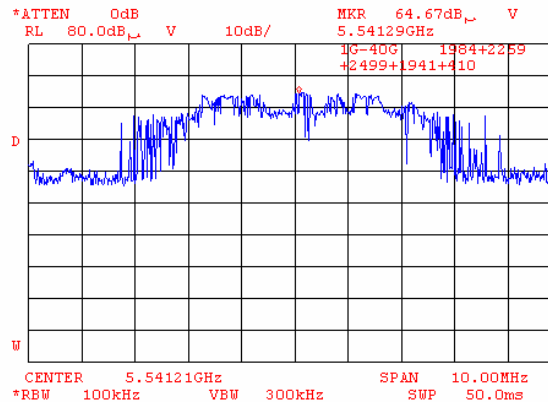

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.89 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

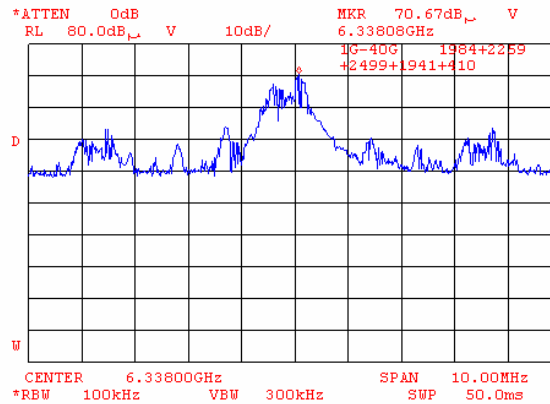

Plot 7.3.90 Radiated emission measurements at the seventh harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

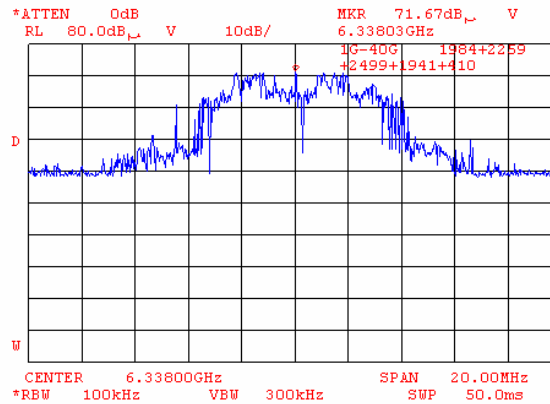

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.91 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

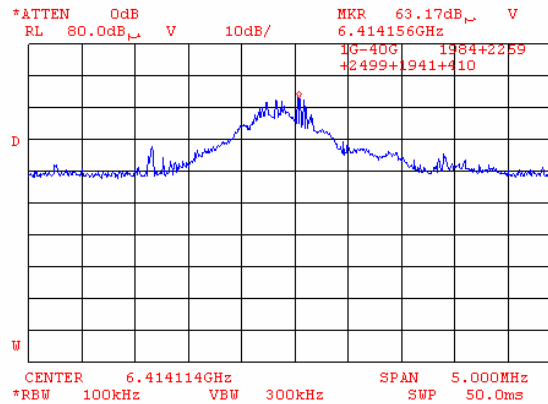

Plot 7.3.92 Radiated emission measurements at the seventh harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

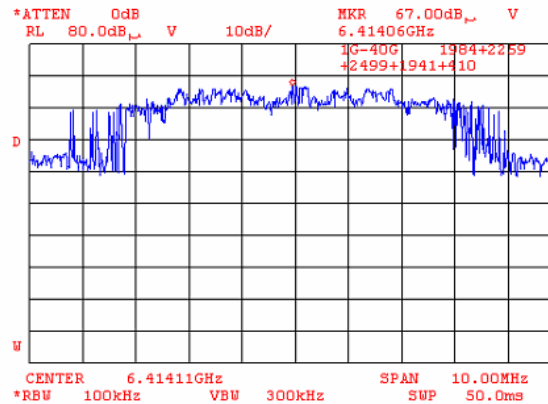

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.93 Radiated emission measurements at the seventh harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

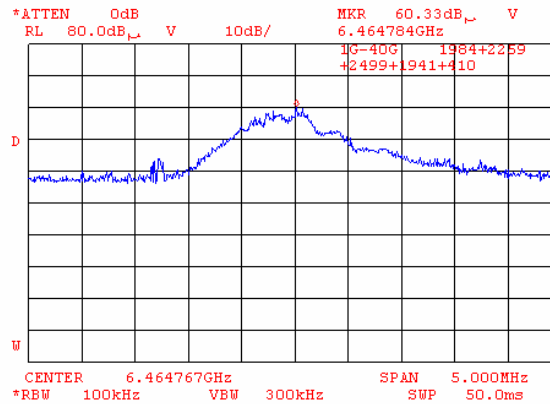

Plot 7.3.94 Radiated emission measurements at the seventh harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

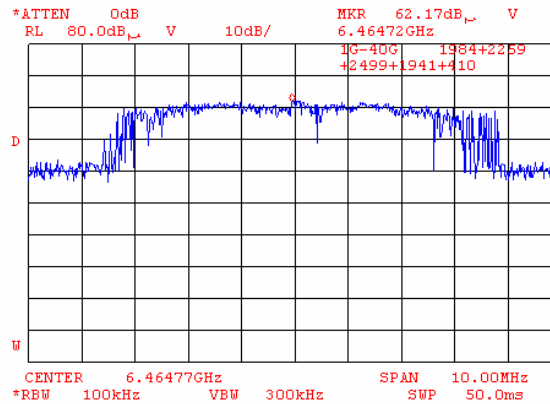

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.95 Radiated emission measurements at the eight harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

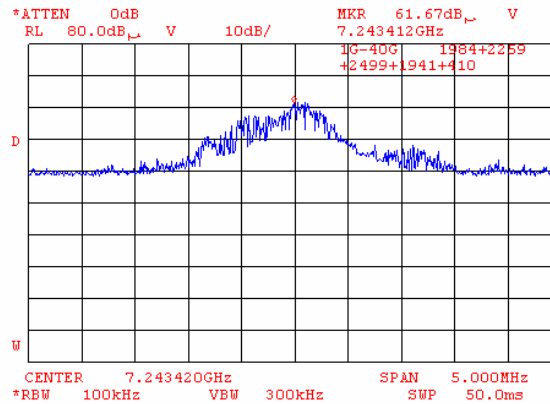

Plot 7.3.96 Radiated emission measurements at the eight harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

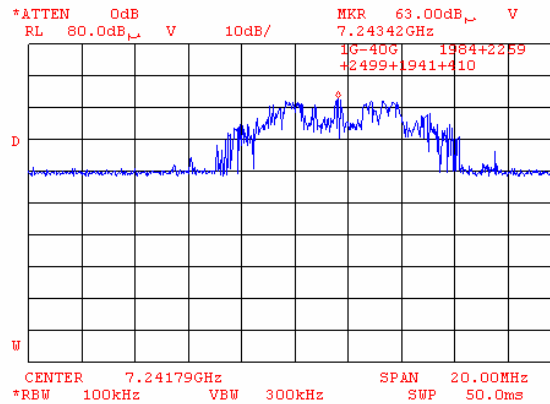

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.97 Radiated emission measurements at the eight harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

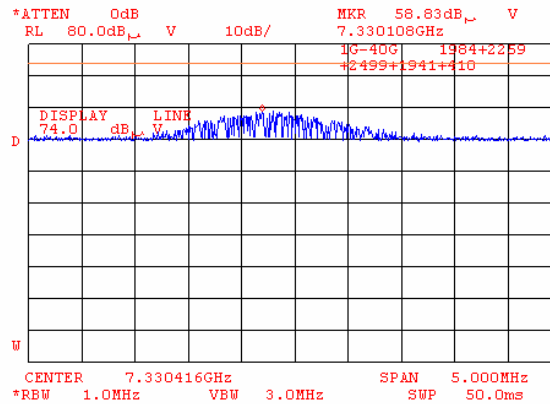

Plot 7.3.98 Radiated emission measurements at the eight harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

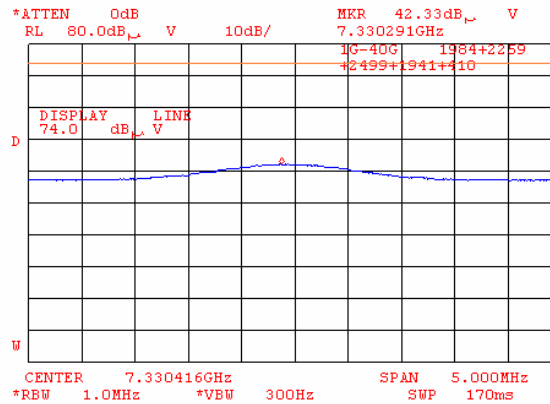

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.100 Radiated emission measurements at the eight harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

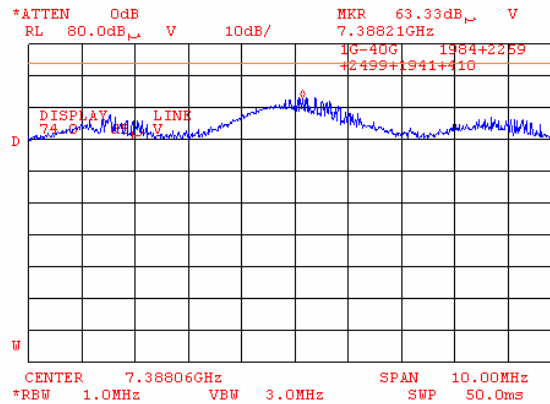

Plot 7.3.101 Radiated emission measurements at the eight harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

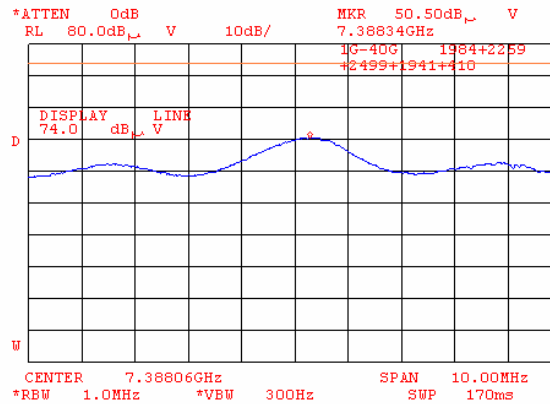

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.102 Radiated emission measurements at the eight harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK

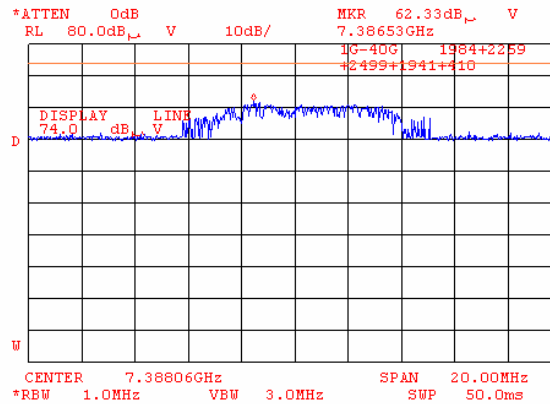

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.103 Radiated emission measurements at the neight harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

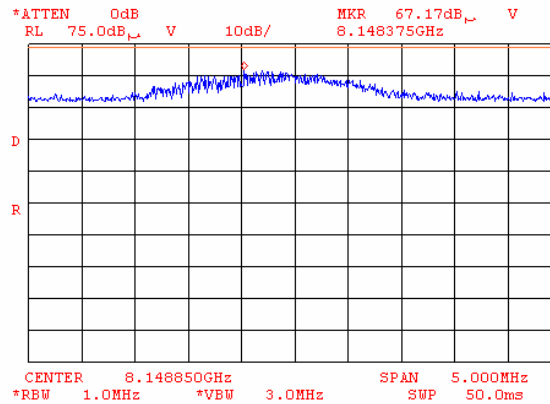

Plot 7.3.104 Radiated emission measurements at the neight harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

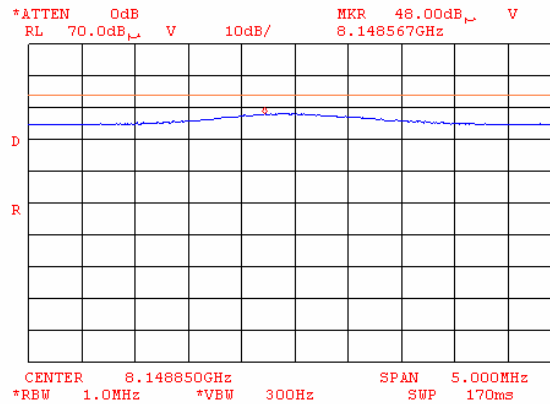

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.105 Radiated emission measurements at the neight harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK

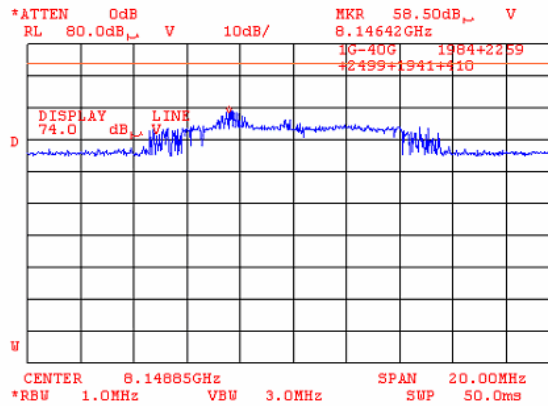

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.106 Radiated emission measurements at the neight harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

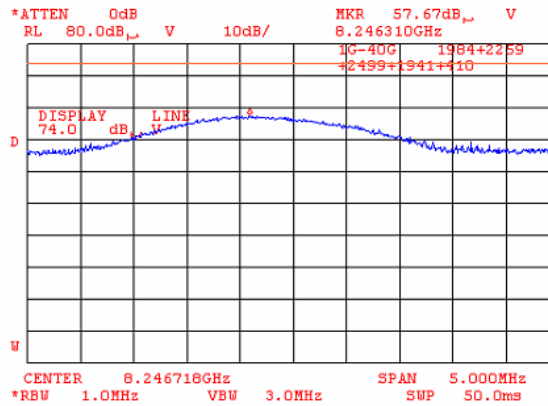

Plot 7.3.107 Radiated emission measurements at the neight harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

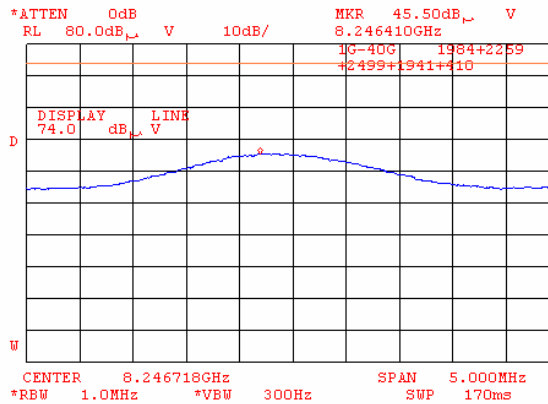

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.108 Radiated emission measurements at the neight harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

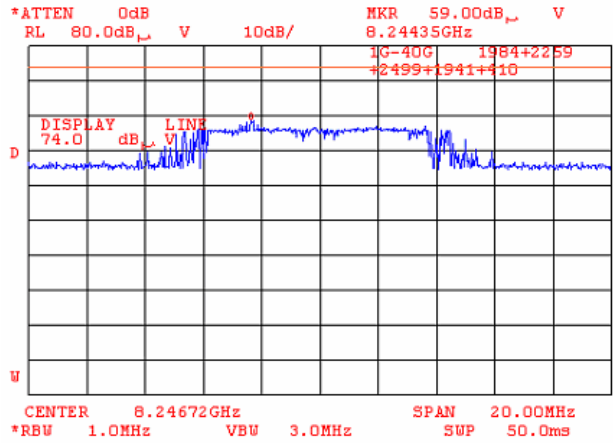

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.109 Radiated emission measurements at the neight harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

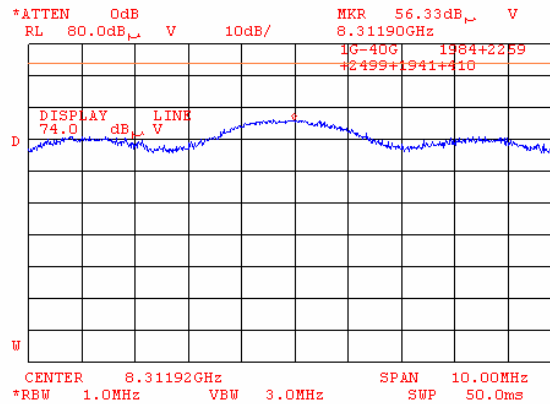

Plot 7.3.110 Radiated emission measurements at the neight harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

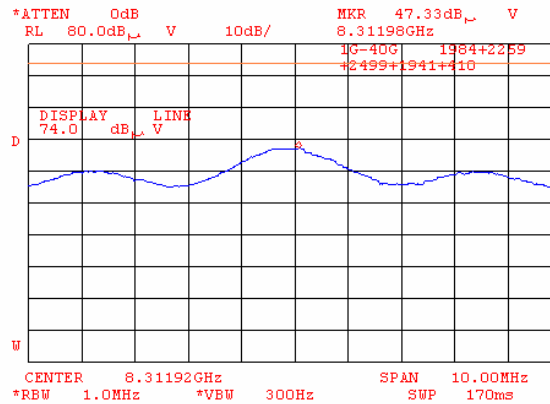

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.111 Radiated emission measurements at the neinght harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: FSK

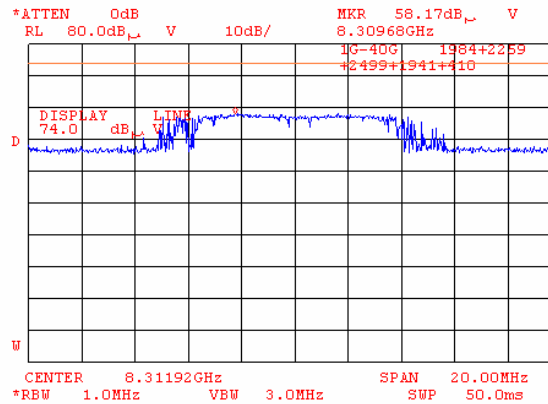

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.112 Radiated emission measurements at the tenth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

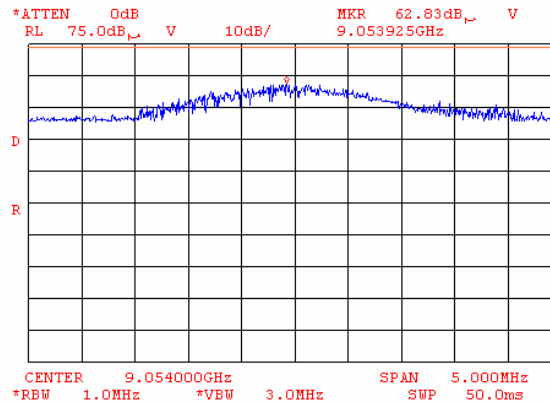

Plot 7.3.113 Radiated emission measurements at the tenth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

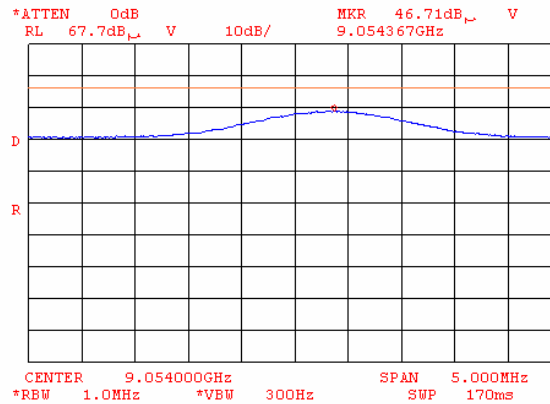

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.114 Radiated emission measurements at the tenth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

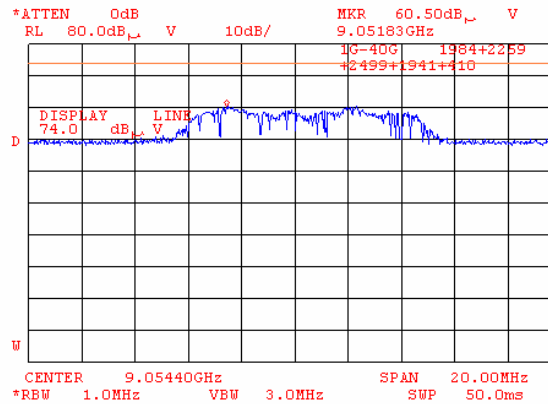

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.115 Radiated emission measurements at the tenth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: PSK

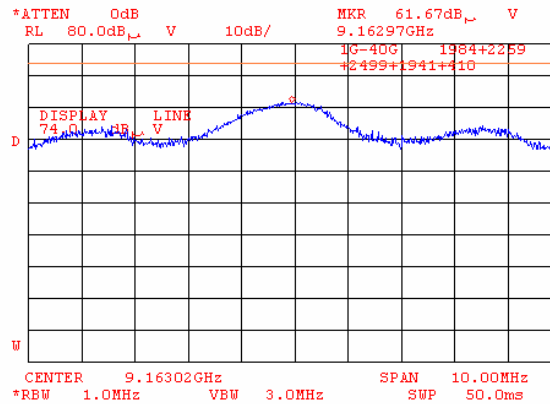

Plot 7.3.116 Radiated emission measurements at the tenth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 Hz
MODULATION: PSK

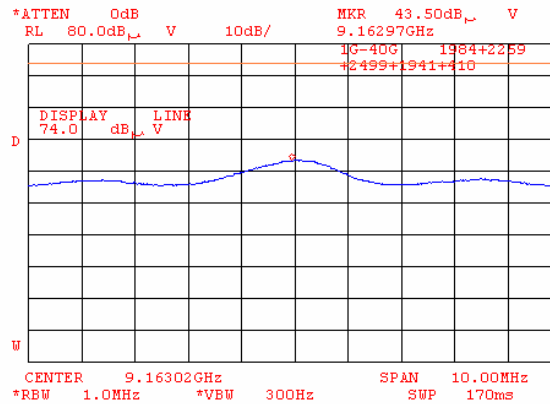

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.117 Radiated emission measurements at the tenth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 3 MHz
MODULATION: FSK

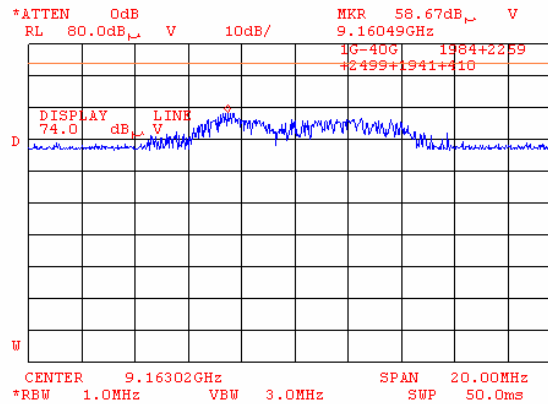

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			


Plot 7.3.118 Radiated emission measurements at the tenth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: PSK

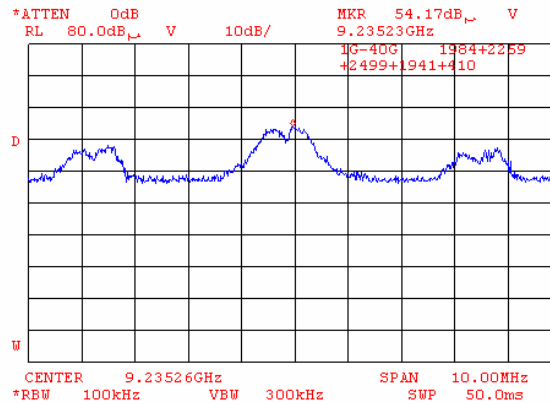

Plot 7.3.119 Radiated emission measurements at the tenth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK

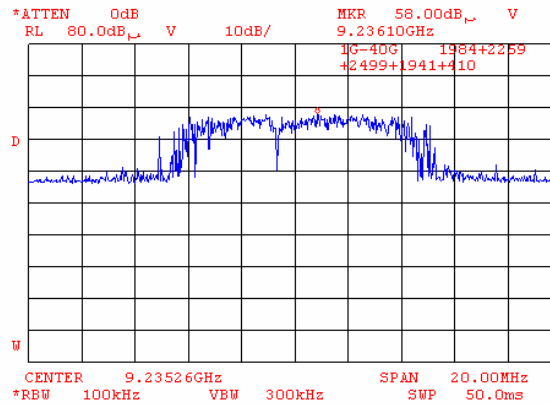


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.120 Radiated emission measurements from 901 to 905.55 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: PSK


11:04:19 JUN 03, 2005

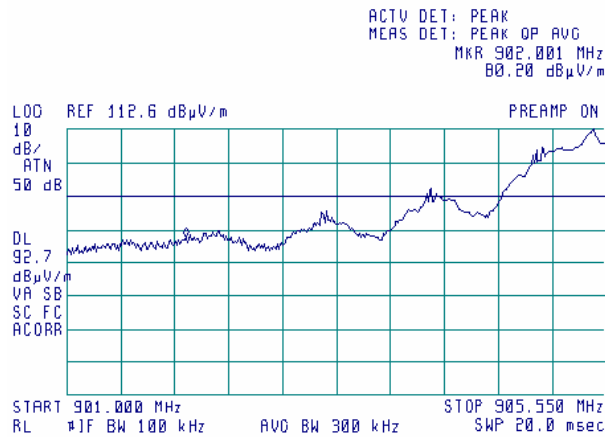

Plot 7.3.121 Radiated emission measurements from 901 to 905.55 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: FSK

11:01:17 JUN 03, 2005

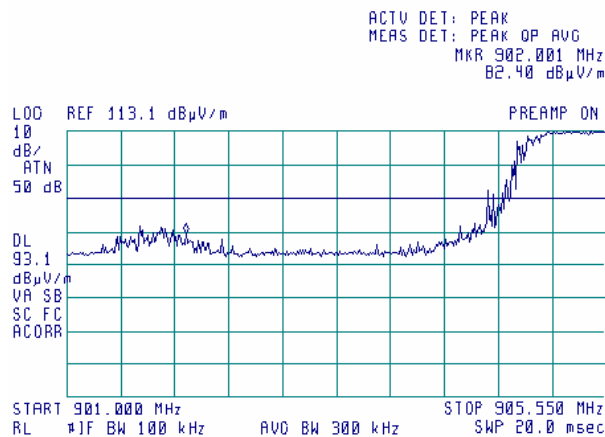


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.122 Radiated emission measurements from 923 to 929 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: PSK


11:07:19 JUN 03, 2005

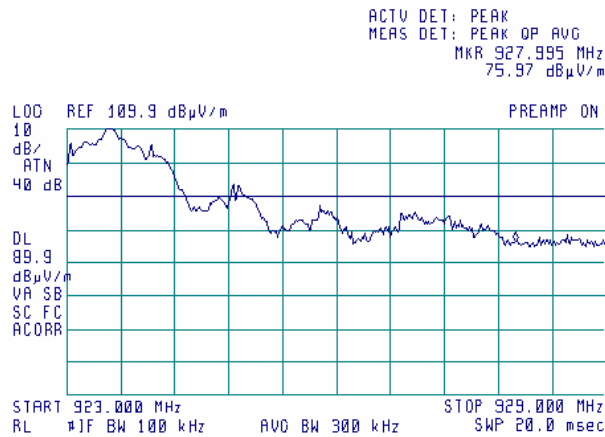

Plot 7.3.123 Radiated emission measurements from 923 to 929 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: FSK

11:18:27 JUN 03, 2005

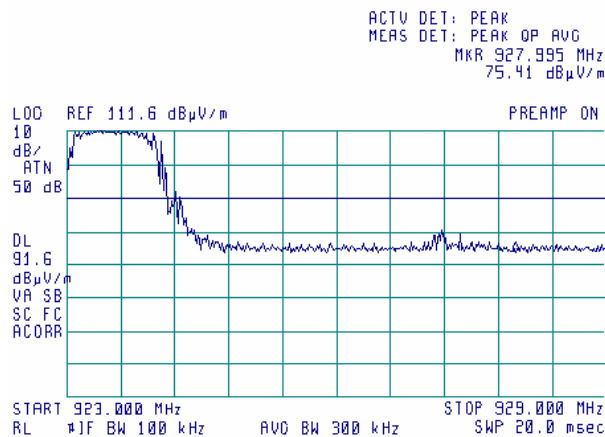


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.124 Transmission pulse duration

MODULATION: PSK


10:50:03 JUN 03, 2005

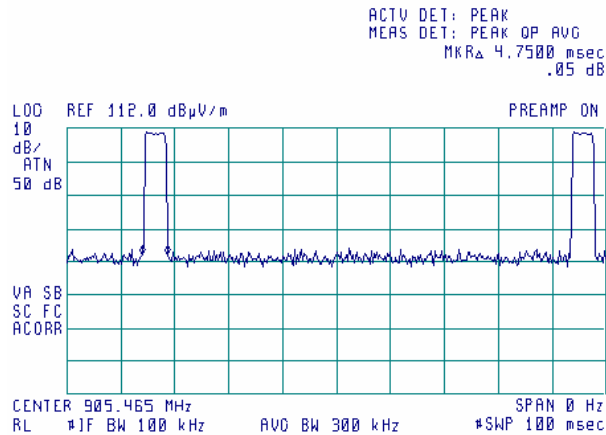

Plot 7.3.125 Transmission pulse period

MODULATION: PSK

10:51:08 JUN 03, 2005

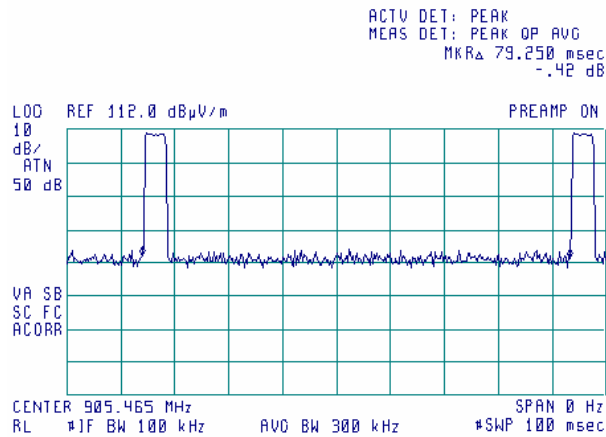


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	06/03/2005 10:03 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.3.126 Transmission pulse duration

MODULATION: FSK


10:53:27 JUN 03, 2005

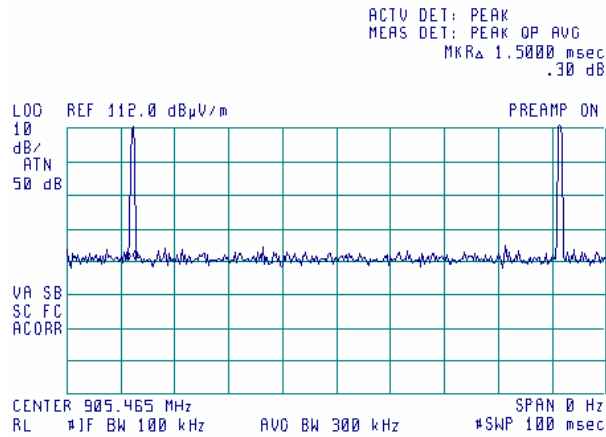

Plot 7.3.127 Transmission pulse period

MODULATION: FSK

10:54:33 JUN 03, 2005

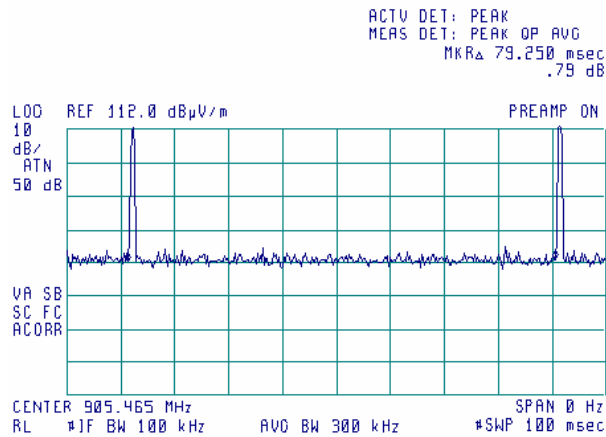

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

7.4 Peak spectral power density

7.4.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μ V/m)*
902.0 – 928.0	3.0	8.0	103.2


* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.4.2 Test procedure for field strength measurements

- 7.4.2.1** The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.
- 7.4.2.2** The EUT was adjusted to produce maximum available to end user RF output power.
- 7.4.2.3** The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.4.2.4** The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.4.2.5** The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.4.2 and the associated plots.

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Figure 7.4.1 Setup for carrier field strength measurements

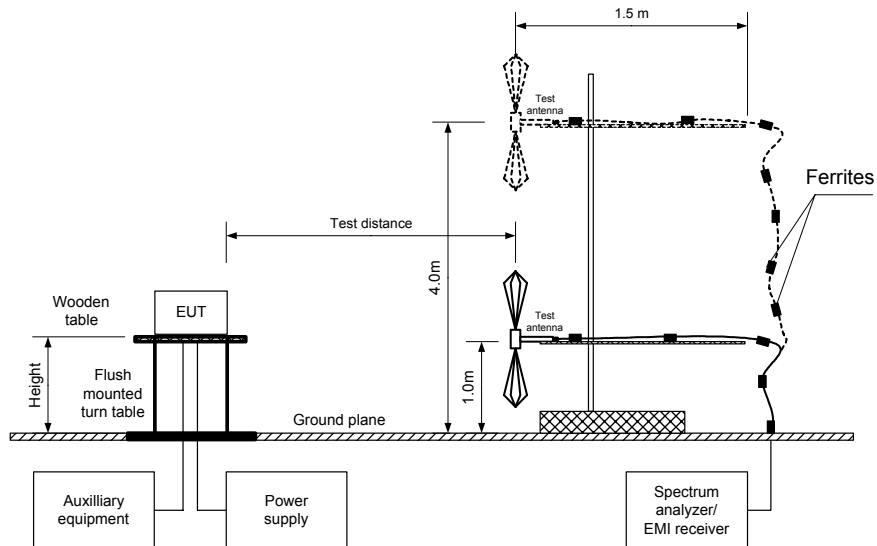

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.4.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 10 kHz
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION: PSK
MODULATING SIGNAL: PRBS
BIT RATE: 60 kbps
TRANSMITTER OUTPUT POWER: 18.79 dBm at low carrier frequency
18.35 dBm at mid carrier frequency
20.12 dBm at high carrier frequency

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
905.494	103.24	3.0	103.20	-2.94	Vertical	1.0	206
916.359	102.55	3.0	103.20	-3.65	Vertical	1.0	204
923.605	105.06	3.0	103.20	-1.14	Vertical	1.0	195

MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kbps
TRANSMITTER OUTPUT POWER: 18.74 dBm at low carrier frequency
17.75 dBm at mid carrier frequency
19.28 dBm at high carrier frequency

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
905.196	106.11	3.0	103.20	-0.09	Vertical	1.0	204
916.473	104.45	3.0	103.20	-1.75	Vertical	1.0	202
923.521	105.41	3.0	103.20	-0.79	Vertical	1.0	195

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0465	HL 0521	HL 0589	HL 0593	HL 0594	HL 0604	HL 1004	HL 2009
---------	---------	---------	---------	---------	---------	---------	---------


Full description is given in Appendix A.

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.4.1 Peak spectral power density at low frequency within 6 dB band

MODULATION: PSK


09:00:24 11 MAY 2005

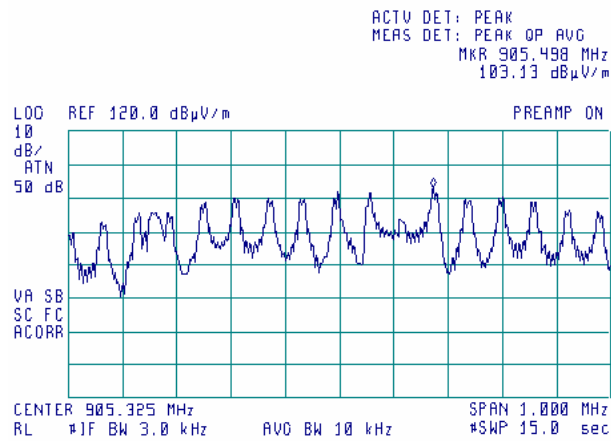

Plot 7.4.2 Peak spectral power density at low frequency zoomed at the peak

MODULATION: PSK

09:07:20 11 MAY 2005

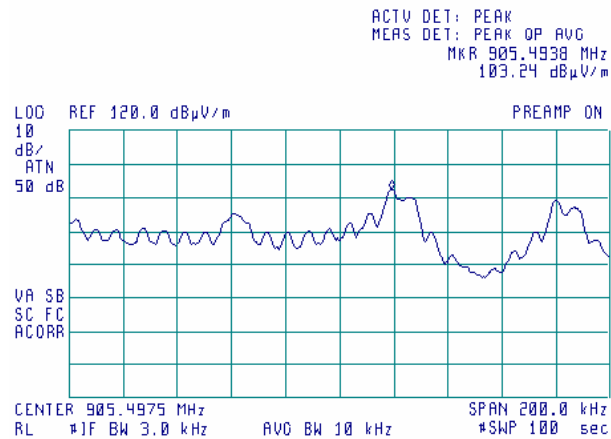


Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.4.3 Peak spectral power density at mid frequency within 6 dB band

MODULATION: PSK


09:30:55 11 MAY 2005

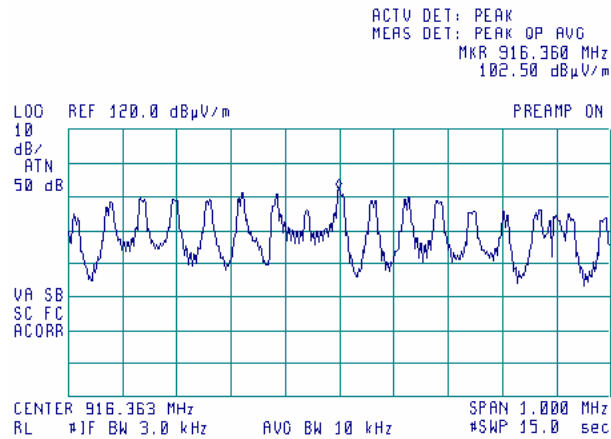

Plot 7.4.4 Peak spectral power density at mid frequency zoomed at the peak

MODULATION: PSK

09:35:43 11 MAY 2005

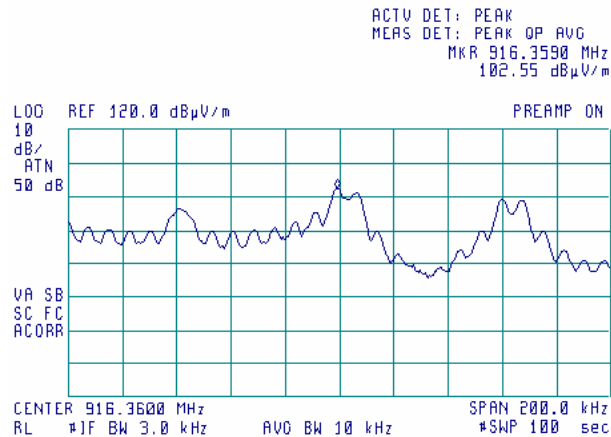


Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.4.5 Peak spectral power density at high frequency within 6 dB band

MODULATION: PSK


08:59:29 17 MAY 2005

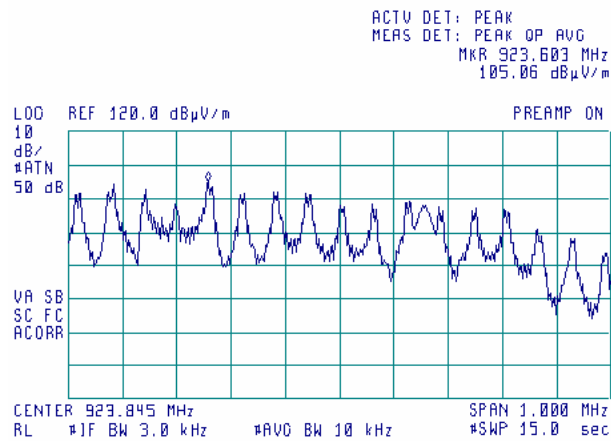

Plot 7.4.6 Peak spectral power density at high frequency zoomed at the peak

MODULATION: PSK

09:04:43 17 MAY 2005

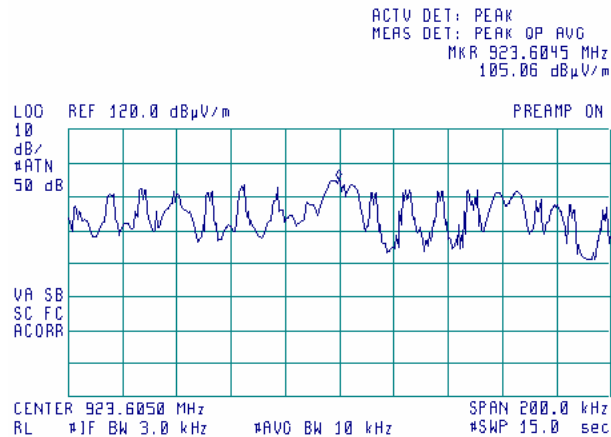


Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.4.7 Peak spectral power density at low frequency within 6 dB band

MODULATION: FSK


09:16:45 11 MAY 2005

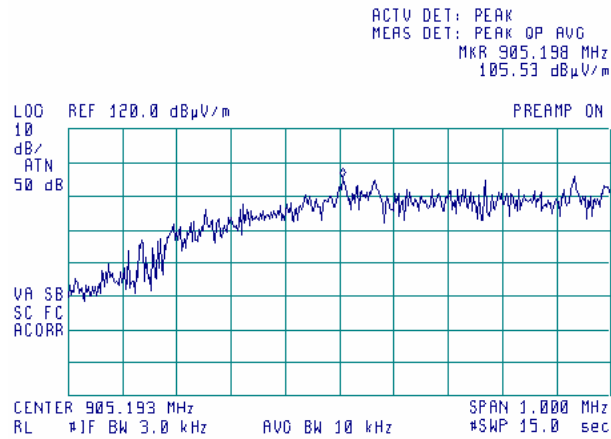

Plot 7.4.8 Peak spectral power density at low frequency zoomed at the peak

MODULATION: FSK

09:21:44 11 MAY 2005

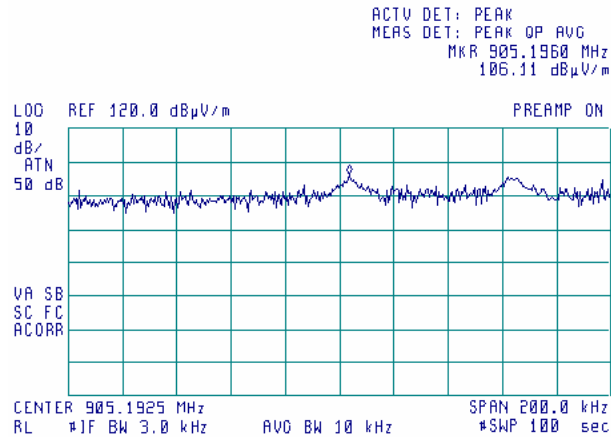


Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.4.9 Peak spectral power density at mid frequency within 6 dB band

MODULATION: FSK


09:49:06 11 MAY 2005

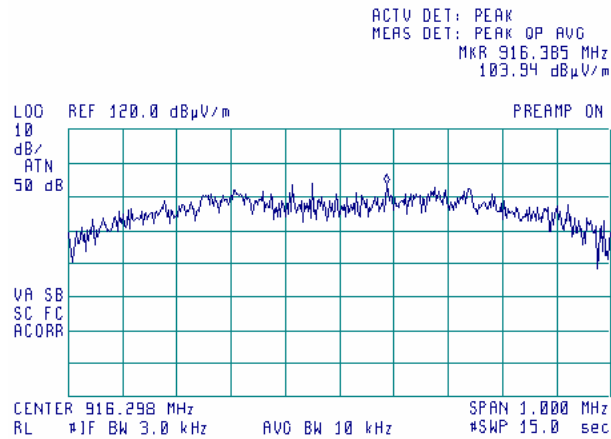

Plot 7.4.10 Peak spectral power density at mid frequency zoomed at the peak

MODULATION: FSK

09:53:35 11 MAY 2005

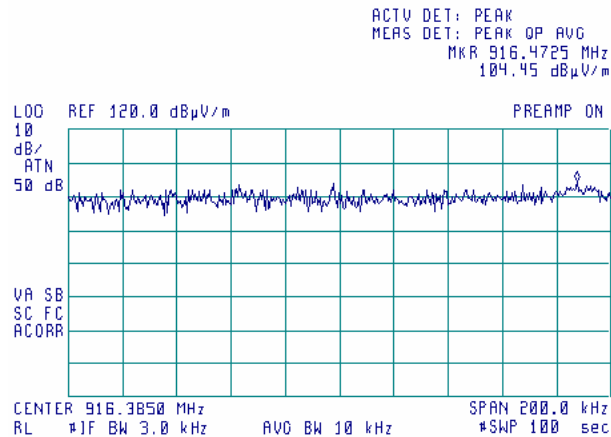


Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	05/11/2005 9:00 AM		
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 48 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.4.11 Peak spectral power density at high frequency within 6 dB band

MODULATION: FSK


09:46:05 17 MAY 2005

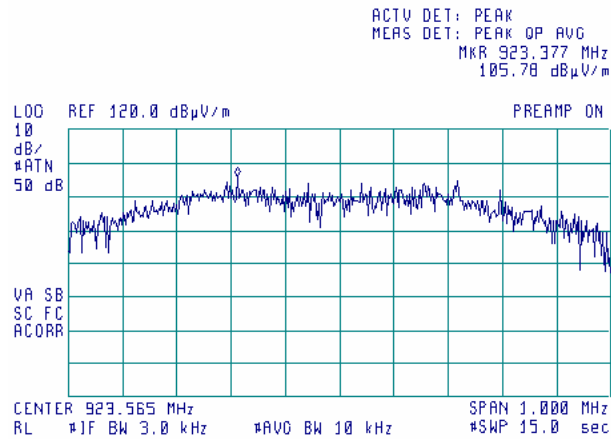

Plot 7.4.12 Peak spectral power density at high frequency zoomed at the peak

MODULATION: FSK

09:44:03 17 MAY 2005

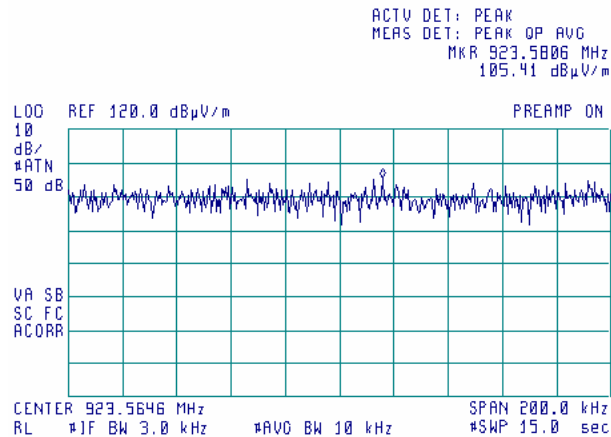

Test specification:	Section 15.203, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	6/30/2005 9:21 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

7.5 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	6/30/2005 9:21 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

7.6 Radiated emission measurements

7.6.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.


7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and the EUT performance was checked.

7.6.2.2 The specified frequency range was investigated with the antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

7.6.2.3 The worst test results with respect to the limits were recorded in Table 7.6.2 and shown in the associated plots.

Figure 7.6.1 Setup for radiated emission measurements in anechoic chamber, table-top EUT

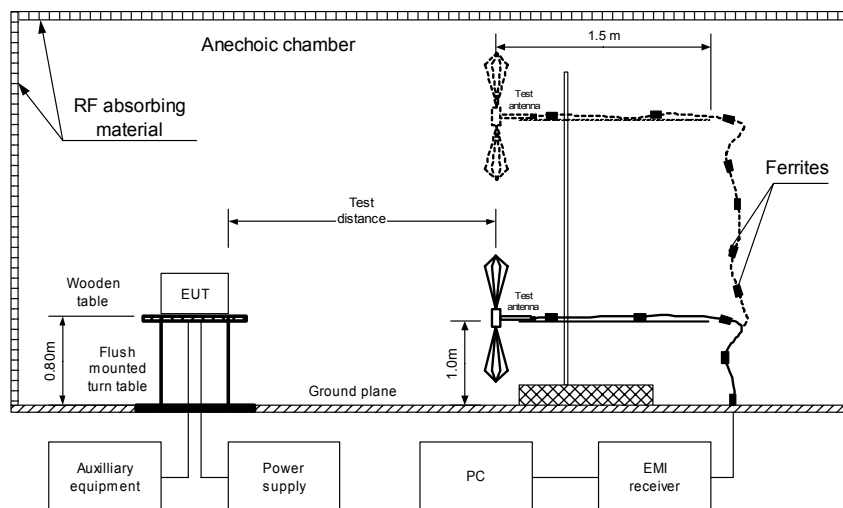

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	6/30/2005 9:21 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Table 7.6.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTOR USED: PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found.								Pass

TEST SITE: ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTOR USED: PEAK
FREQUENCY RANGE: 1000 MHz – 5000 MHz

Frequency, MHz	Peak emission, dB(μV/m)	Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found.								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0410	HL 1424	HL 1425	HL 1553	HL 1566	HL 1567	HL 1849	HL 1850
HL 1984	HL 2109	HL 2259	HL 2499	HL 2697			


Full description is given in Appendix A.

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	6/30/2005 9:21 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.6.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by


12:13:24 JUN 03, 2005

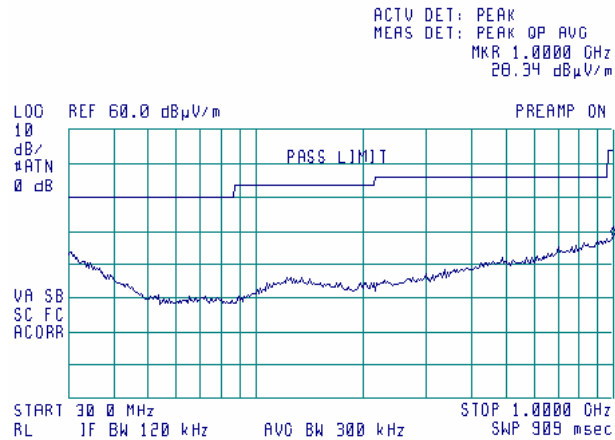

Plot 7.6.2 Radiated emission measurements in 1000 - 2900 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by


12:34:53 JUN 03, 2005

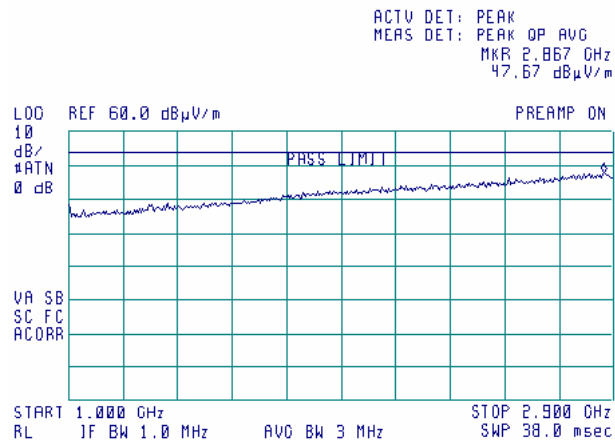

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	6/30/2005 9:21 AM		
Temperature: 28 °C	Air Pressure: 1009 hPa	Relative Humidity: 47 %	Power Supply: 3.6 VDC
Remarks:			

Plot 7.6.3 Radiated emission measurements in 2900 - 5000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

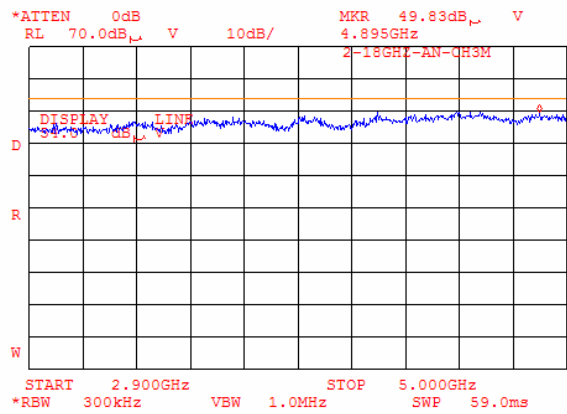

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0287	Turntable, Motorized Diameter, 2 m (OATS)	HL	TMD-2	042	11-Nov-04	11-Nov-05
0410	Cable, Coax, Microwave, DC-18 GHz, N-N, 1 m	Gore	PFP01P01039.4	9338767	11-Nov-04	11-Nov-05
0446	Antenna, Loop active, 10kHz-30MHz	EMCO	6502	2857	11-Nov-04	11-Nov-05
0465	Anechoic Chamber 9(L) x 6.5(W) x 5.5(H) m	HL	AC - 1	023	10-Oct-04	10-Oct-05
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A0025 3	10-Oct-04	10-Oct-05
0589	Cable Coaxial, GORE A2P01POL118, 2.3 m	HL	GORE-3	176	02-Dec-04	02-Dec-05
0593	Antenna Mast, 1-4 m Pneumatic	Madgesh	AM-F1	101	03-Feb-05	03-Feb-06
0594	Turn Table for anechoic chamber flush mount d=1.2 m Pneumatic	HL	TT-WDC1	102	27-Jan-05	27-Jan-06
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE 26 - 2000 MHz	EMCO	3141	9611-1011	27-Jan-05	27-Jan-06
0813	Cable Coax, RG-214, 12 m, N-type connectors	HL	C214-12	149	27-Jan-05	27-Jan-06
1004	Cable Coaxial, ANDREW PSWJ4, 6m	HL	ANDREW-6	163	27-Jan-05	27-Jan-06
1200	Quadruplexer 1-12 GHz (1-2 GHz; 2-4GHz;4-8 GHz; 8-12GHz)	Electronica S.p.A. - Roma	UE 84	D/00240	10-Feb-05	10-Feb-06
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies (HP)	8564EC	3946A00219	27-Jan-05	27-Jan-06
1425	EMI Receiver, 9 kHz - 2.9 GHz	Agilent Technologies (HP)	8542E	3710A00222, 3705A00204	27-Jan-05	27-Jan-06
1430	EMI Receiver, 9 kHz - 2.9 GHz	Agilent Technologies (HP)	8542E	3807A00262, 3705A00217	27-Jan-05	27-Jan-06
1552	Cable RF, 8 m	Alpha Wire	RG-214	1552	27-Jan-05	27-Jan-06
1553	Cable RF, 3.5 m	Alpha Wire	RG-214	1553	27-Jan-05	27-Jan-06
1566	Cable RF, 2 m	Huber-Suhner	Sucoflex 104PE	13094/4PE	27-Jan-05	27-Jan-06
1567	Cable RF, 2 m	Huber-Suhner	Sucoflex 104PE	13095/4PE	27-Jan-05	27-Jan-06
1848	Antenna mast 4m/6m with polarity control (OATS)	Sh. I. Machines	AM-5	1	19-Apr-05	19-Apr-06
1849	Antenna mast with polarity control (Small Anechoic chamber)	Sh. I. Machines	AM-F4	1849	18-Jan-05	18-Jan-06
1850	Turntable	Sh. I. Machines	TT-M-3	1850	18-Jan-05	18-Jan-06
1941	Cable 18GHz, 4 m, green	Rhophase Microwave Limited	SPS-1803A-4000-NPS	T4657	18-Jan-05	18-Jan-06
1947	Cable 18GHz, 6.5 m, blue	Rhophase Microwave Limited	NPS-1803A-6500-NPS	T4974	18-Jan-05	18-Jan-06

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W, N-type	EMC Test Systems	3115	9911-5964	22-Mar-05	22-Mar-06
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	18-Jan-05	18-Jan-06
2109	Anechoic Chamber 6(L) x 5.5(W) x 2.95(H) m	HL	AC-2	2109	12-Dec-04	12-Dec-05
2254	Cable 40GHz, 0.8 m, blue	Rhophase Microwave Limited	KPS-1503A-800-KPS	W4907	12-Dec-04	12-Dec-05
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	12-Dec-04	12-Dec-05
2387	Filter Bandpass, 8-14 GHz	HL	FBP8-14	2387	05-Jun-05	05-Jun-06
2499	Quadruplexer 1-12 GHz (1-2 GHz; 2-4GHz; 4-8 GHz; 8-12GHz)	Elettronica S.p.A. - Roma	UE 84	D/00239	10-Feb-05	10-Feb-06
2697	Antenna, 30 MHz - 3.0 GHz	Sunol Sciences Corp. Pleasanton, California USA	JB3	A022805	10-Mar-05	10-Mar-06

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error. The standards and instruments used in the calibration system conform to the present requirements of ISO/IEC 17025 (or alternately ANSI/NCSL Z540-1).

The laboratory calibrates its measurement standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements. The Hermon Labs EMC measurements uncertainty is given in the table above.
Person for contact: Mr. Alex Usoskin, CEO.

10 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

47CFR part 15: 2005	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μV)	decibel referred to one microvolt
dB(μV/m)	decibel referred to one microvolt per meter
DC	direct current
DTS	digital transmission system
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
FHSS	frequency hopping spread spectrum
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LISN	line impedance stabilization network
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PCB	printed circuit board
PS	power supply
ppm	part per million (10 ⁻⁶)
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

13 APPENDIX F Test equipment correction factors

Antenna Factor
Active Loop Antenna
EMC Test Systems, model 6502, serial number 2857

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ A/m).
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO, model 3141, serial number 1011

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	560	19.8	1300	27.0
28	7.8	580	20.6	1320	27.8
30	7.8	600	21.3	1340	28.3
40	7.2	620	21.5	1360	28.2
60	7.1	640	21.2	1380	27.9
70	8.5	660	21.4	1400	27.9
80	9.4	680	21.9	1420	27.9
90	9.8	700	22.2	1440	27.8
100	9.7	720	22.2	1460	27.8
110	9.3	740	22.1	1480	28.0
120	8.8	760	22.3	1500	28.5
130	8.7	780	22.6	1520	28.9
140	9.2	800	22.7	1540	29.6
150	9.8	820	22.9	1560	29.8
160	10.2	840	23.1	1580	29.6
170	10.4	860	23.4	1600	29.5
180	10.4	880	23.8	1620	29.3
190	10.3	900	24.1	1640	29.2
200	10.6	920	24.1	1660	29.4
220	11.6	940	24.0	1680	29.6
240	12.4	960	24.1	1700	29.8
260	12.8	980	24.5	1720	30.3
280	13.7	1000	24.9	1740	30.8
300	14.7	1020	25.0	1760	31.1
320	15.2	1040	25.2	1780	31.0
340	15.4	1060	25.4	1800	30.9
360	16.1	1080	25.6	1820	30.7
380	16.4	1100	25.7	1840	30.6
400	16.6	1120	26.0	1860	30.6
420	16.7	1140	26.4	1880	30.6
440	17.0	1160	27.0	1900	30.6
460	17.7	1180	27.0	1920	30.7
480	18.1	1200	26.7	1940	30.9
500	18.5	1220	26.5	1960	31.2
520	19.1	1240	26.5	1980	31.6
540	19.5	1260	26.5	2000	32.0
		1280	26.6		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna calibration
Sunol Sciences Inc., model JB3, serial number A022805

Frequency, MHz	ACF, dB	Gain, dB	Num gain	Frequency, MHz	ACF, dB	Gain, dB	Num gain	Frequency, MHz	ACF, dB	Gain, dB	Num gain	Frequency, MHz	ACF, dB	Gain, dB	Num gain	Frequency, MHz	ACF, dB	Gain, dB	Num gain
30	22.7	-22.5	0.01	620	19.7	6.3	4.27	1215	24.9	5.05	1910	28.2	7.1	5.08	2405	30.9	6.9	4.93	
35	18.5	-17.4	0.02	625	19.7	6.5	4.42	1220	24.9	5.05	1915	28.5	6.9	4.91	2410	30.9	6.9	4.89	
40	14.7	-12.5	0.06	630	19.6	6.6	4.57	1225	25.1	6.9	4.91	1820	28.6	6.8	4.74	2415	31.0	6.9	4.85
45	11.3	-8.1	0.16	635	19.7	6.5	4.48	1230	25.2	6.8	4.82	1825	28.7	6.8	4.75	2420	31.0	6.8	4.82
45	11.3	-8.1	0.16	640	19.9	6.4	4.40	1235	25.1	7.0	4.96	1830	28.7	6.8	4.76	2425	31.1	6.8	4.81
50	9.9	-4.7	0.34	645	19.9	6.5	4.45	1240	25.0	7.1	5.12	1840	28.8	6.7	4.69	2430	31.0	6.9	4.87
55	7.9	-2.8	0.62	650	19.9	6.5	4.51	1245	25.0	7.1	5.12	1840	28.8	6.7	4.69	2435	31.0	6.9	4.88
60	7.8	-2.1	0.62	655	19.9	6.6	4.60	1250	25.0	7.1	5.15	1845	28.6	6.9	4.90	2440	31.2	6.8	4.74
65	8.5	-2.0	0.63	660	19.9	6.7	4.69	1255	25.0	7.2	5.25	1850	28.4	7.1	5.12	2445	31.1	6.9	4.91
70	9.0	-1.9	0.66	665	19.9	6.7	4.70	1260	24.9	7.3	5.36	1855	28.5	7.0	5.07	2450	31.0	7.0	4.96
75	9.8	-1.1	0.77	670	20.0	6.7	4.71	1265	25.0	7.3	5.31	1860	28.6	7.0	5.07	2455	31.0	7.0	5.01
80	8.4	-0.2	0.97	675	20.1	6.7	4.71	1270	25.1	7.2	5.26	1865	28.5	7.1	5.17	2460	30.9	7.2	5.19
85	8.0	0.8	1.20	680	20.1	6.7	4.71	1275	25.3	7.0	5.05	1870	28.4	7.3	5.33	2465	31.1	6.9	4.95
90	8.2	1.1	1.29	685	20.1	6.8	4.79	1280	25.5	6.8	4.84	1875	28.4	7.2	5.28	2470	31.3	6.8	4.76
95	9.2	0.5	1.13	690	20.1	6.9	4.88	1285	25.4	7.0	4.97	1880	28.5	7.2	5.22	2475	31.4	6.7	4.69
100	10.6	-0.4	0.92	695	20.2	6.8	4.82	1290	25.3	7.1	5.10	1885	28.5	7.0	5.22	2480	31.3	6.8	4.79
105	11.7	-1.1	0.78	700	20.3	6.8	4.76	1295	25.3	7.2	5.22	1890	28.6	7.2	5.21	2485	31.1	7.0	5.00
110	12.6	-1.6	0.70	705	20.4	6.8	4.75	1300	25.2	7.3	5.33	1895	28.6	7.2	5.24	2490	31.1	7.0	4.99
115	13.3	-1.9	0.65	710	20.5	6.8	4.75	1305	25.3	7.2	5.21	1900	28.6	7.2	5.27	2495	31.2	7.0	4.99
120	13.9	-2.1	0.62	715	20.5	6.8	4.80	1310	25.5	7.1	5.09	1905	28.5	7.3	5.36	2500	30.9	7.2	5.27
125	14.2	-2.0	0.63	720	20.5	6.9	4.85	1315	25.4	7.2	5.23	1910	28.5	7.4	5.45	2505	31.1	7.1	5.15
130	14.2	-1.7	0.68	725	20.6	6.8	4.81	1320	25.3	7.3	5.36	1915	28.5	7.3	5.38	2510	31.0	7.2	5.22
135	13.8	-1.0	0.79	730	20.7	6.8	4.77	1325	25.5	7.2	5.21	1920	28.6	7.3	5.31	2515	31.0	7.2	5.26
140	13.4	-0.3	0.94	735	20.9	6.7	4.65	1330	25.6	7.0	5.06	1925	28.6	7.3	5.35	2520	31.2	7.0	5.05
145	13.1	0.3	1.08	740	21.0	6.6	4.53	1335	25.7	7.1	5.07	1930	28.6	7.3	5.39	2525	30.8	7.4	5.54
150	12.9	0.8	1.21	745	21.0	6.6	4.59	1340	25.7	7.1	5.09	1935	28.6	7.4	5.43	2530	31.4	7.0	5.37
155	12.7	1.3	1.34	750	21.0	6.7	4.64	1345	25.7	7.1	5.13	1940	28.4	7.6	5.70	2535	31.2	7.0	5.06
160	12.7	1.6	1.44	755	21.0	6.8	4.74	1350	25.7	7.1	5.17	1945	28.5	7.5	5.59	2540	31.2	7.1	5.09
165	12.5	2.0	1.59	760	21.0	6.8	4.83	1355	25.8	7.0	5.06	1950	28.6	7.4	5.48	2545	31.0	7.3	5.43
170	12.2	2.6	1.83	765	21.1	6.8	4.73	1360	25.9	6.9	4.95	1955	28.6	7.5	5.57	2550	31.0	7.3	5.39
175	11.8	3.7	2.37	770	21.2	6.8	4.67	1365	25.9	6.9	4.96	1960	28.5	7.0	5.22	2555	31.3	6.8	4.79
180	11.6	3.7	2.36	775	21.3	6.7	4.68	1370	26.0	7.0	4.96	1965	28.7	7.4	5.47	2560	31.0	7.4	5.49
185	11.5	4.0	2.54	780	21.3	6.7	4.72	1375	26.0	7.0	5.01	1970	28.9	7.2	5.29	2565	30.8	7.6	5.70
190	11.6	4.2	2.61	785	21.3	6.8	4.77	1380	26.0	7.0	5.06	1975	28.9	7.2	5.22	2570	31.1	7.3	5.37
195	12.1	3.9	2.47	790	21.3	6.8	4.82	1385	26.0	7.0	4.99	1980	29.0	7.1	5.16	2575	31.5	7.0	4.96
200	12.1	3.1	2.72	795	21.3	6.8	4.79	1390	26.1	6.9	4.92	1985	29.1	7.1	5.13	2580	31.6	6.9	4.87
205	12.0	4.4	2.76	800	21.5	6.8	4.77	1395	26.2	6.9	4.94	1990	29.1	7.0	5.06	2585	31.6	6.8	4.79
210	11.0	5.6	3.66	805	21.6	6.7	4.71	1400	26.2	7.0	4.96	1995	29.1	7.1	5.09	2590	31.6	6.9	4.88
215	11.3	5.6	3.59	810	21.7	6.7	4.66	1405	26.1	7.0	5.02	2000	29.1	7.1	5.11	2595	31.5	7.0	4.97
220	11.6	5.5	3.52	815	21.7	6.7	4.72	1410	26.1	7.1	5.09	2005	29.1	7.1	5.16	2600	31.6	6.9	4.86
225	11.7	5.5	3.55	820	21.7	6.8	4.80	1415	26.2	7.0	5.02	2010	29.1	7.1	5.15	2605	31.3	7.2	5.30
230	11.9	5.8	3.71	825	21.7	6.8	4.82	1420	26.3	7.0	4.96	2015	29.2	7.1	5.13	2610	31.4	7.1	5.15
235	12.1	5.5	3.56	830	21.7	6.9	4.85	1425	26.2	7.1	5.10	2020	29.2	7.1	5.18	2615	31.7	6.9	4.88
240	12.3	5.5	3.54	835	21.8	6.8	4.82	1430	26.1	7.2	5.20	2025	29.3	7.1	5.18	2620	31.6	7.0	4.97
245	12.3	5.7	3.71	840	21.9	6.8	4.80	1435	26.1	7.2	5.24	2030	29.3	7.0	5.05	2625	31.4	7.1	5.17
250	12.3	5.9	3.88	845	21.9	6.8	4.83	1440	26.2	7.2	5.24	2035	29.3	7.1	5.07	2630	31.6	7.0	5.00
255	12.5	5.9	3.85	850	21.9	6.9	4.86	1445	26.3	7.1	5.11	2040	29.3	7.1	5.13	2635	31.8	6.8	4.82
260	12.7	5.8	3.73	855	22.0	6.9	4.90	1450	26.5	7.0	4.98	2045	29.2	7.2	5.23	2640	31.7	7.0	4.98
265	13.2	5.8	3.54	860	22.0	6.8	4.74	1455	26.4	7.1	5.07	2050	29.2	7.2	5.27	2645	31.7	6.9	4.93
270	13.7	5.2	3.27	865	22.0	6.9	4.92	1460	26.4	7.1	5.17	2055	29.3	7.2	5.21	2650	31.8	6.9	4.85
275	13.7	5.3	3.39	870	21.9	7.1	5.11	1465	26.4	7.2	5.19	2060	29.3	7.0	5.02	2655	31.8	6.9	4.85
280	13.7	5.4	3.50	875	22.0	7.1	5.08	1470	26.4	7.2	5.22	2065	29.4	7.1	5.08	2660	31.7	7.0	5.02
285	13.7	5.6	3.61	880	22.1	7.0	5.05	1475	26.4	7.1	5.17	2070	29.4	7.1	5.10	2665	32.0	6.7	4.71
290	13.7	5.7	3.72	885	22.1	7.0	5.06	1480	26.5	7.1	5.10	2075	29.4	7.1	5.13	2670	31.9	6.7	4.67
295	13.8	5.8	3.77	890	22.1	7.0	5.06	1485	26.5	7.1	5.14	2080	29.8	6.8	4.76	2675	31.9	6.8	4.81
300	13.9	5.8	3.81	895	22.2	7.1	5.09	1490	26.5	7.1	5.17	2085	29.7	6.9	4.89	2680	31.7	7.0	5.04
305	14.0	5.9	3.85	900	22.2	7.1	5.12	1495	26.5	7.2	5.24	2090	29.7	6.9	4.86	2685	31.9	6.8	4.83
310	14.1	5.9	3.88	905	22.3	7.1	5.09	1500	26.5	7.2	5.31	2095	29.8	6.8	4.78	2690	32.1	6.7	4.72
315	14.3	5.9	3.89	910	22.3	7.0	5.05	1505	26.5	7.2	5.27	2100	29.9	6.8	4.75	2695	32.1	6.7	4.71
320	14.4	5.9	3.90	915	22.4	7.0	4.99	1510	26.6	7.2	5.23	2105	29.8	6.8	4.81	2700	32.0	6.8	4.81
325	14.2	6.2	4.07	920	22.3	6.9	4.92	1515	26.6	7.2	5.30	2110	29.9	6.8	4.72	2705	32.0	6.8	4.80
330	14.6	5.9	3.93	925	22.7	6.9	4.85	1520	26.5	7.3	5.38	2115	29.9	6.8	4.76	2710	32.1	6.8	4.79
335	14.7	6.0	4.02	930	22.8	6.8	4.77	1525	26.6	7.3	5.37	2120	29.9	6.8	4.84	2715	32.1	6.7	4.71
340	14.7	6.2	4.12	935	22.8	6.8	4.83	1530	26.6	7.3	5.36	2125	29.9	6.9	4.89	2720	32.4	6.5	4.47
345	14.9	6.1	4.06	940	22.8	6.9	4.89	1535	26.6	7.4	5.44	2130	29.9	6.9	4.89	2725	32.2	6.7	4.63
350	15.1	6.0	3.99	945	22.8	6.9	4.87	1540	26.5	7.4	5.53	2135	29.8	6.9	4.94	2730	31.9	7.1	5.05
355	15.3	5.9	3.88	950	22.9	6.9	4.85	1545	26.5	7.5	5.58	2140	29.8	7.1	5.08	2735	31.6	7.4	5.44
360	15.6	5.8	3.78	955	23.0	6.8	4.81	1550											

Antenna factor
Double-ridged wave guide horn antenna
EMC Test Systems, model 3115, serial no: 9911-5964

Frequency, MHz	Antenna factor (s/n 9911-5964), dB(1/m)	Antenna factor (s/n 00027177), dB(1/m)
1000.0	24.5	24.7
1500.0	24.8	25.7
2000.0	27.6	27.8
2500.0	28.7	28.9
3000.0	30.8	30.7
3500.0	32.9	31.8
4000.0	32.7	33.0
4500.0	32.0	32.8
5000.0	33.6	34.2
5500.0	35.3	34.9
6000.0	35.7	35.2
6500.0	35.8	35.4
7000.0	36.2	36.3
7500.0	37.2	37.3
8000.0	37.2	37.5
8500.0	38.1	38.0
9000.0	38.6	38.3
9500.0	38.3	38.3
10000.0	38.4	38.7
10500.0	38.3	38.7
11000.0	38.8	38.9
11500.0	39.9	39.5
12000.0	39.6	39.5
12500.0	39.5	39.4
13000.0	40.5	40.5
13500.0	41.1	40.8
14000.0	41.5	41.5
14500.0	40.8	41.3
15000.0	39.5	40.2
15500.0	38.1	38.7
16000.0	38.1	38.5
16500.0	40.1	39.8
17000.0	42.6	41.9
17500.0	45.4	45.8
18000.0	48.7	49.1

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss

Cable coaxial, GORE A2P01POL118, 2.3 m, model GORE-3, serial number 176, HL 0589
+ Cable coaxial, ANDREW PSWJ4, 6 m, model: ANDREW-6, serial number 163, HL 1004

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	30	0.33	≤ 6.5	±0.12
2	50	0.40		
3	100	0.57		
4	300	0.97		
5	500	1.25		
6	800	1.59		
7	1000	1.81		
8	1200	1.97		
9	1400	2.15		
10	1600	2.28		
11	1800	2.43		
12	2000	2.61		
13	2200	2.75		
14	2400	2.89		
15	2600	2.97		
16	2800	3.21	≤ 6.5	±0.12
17	3000	3.32		
18	3300	3.47		
19	3600	3.62		
20	3900	3.84		
21	4200	3.92		
22	4500	4.07		
23	4800	4.36		
24	5100	4.62		
25	5400	4.78		
26	5700	5.16		
27	6000	5.67		
28	6500	5.99		
				±0.17

Cable 18 GHz, 6.5 m, blue, model NPS-1803A-6500-NPS, serial number T4974, HL 1947
Calibration data

Frequency, GHz	Insertion loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Insertion loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92

Cable loss
RF cable 8 m, model RG-214, serial number C-56, HL 2009

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		

Calibration data
RF cable 8 m, model RG-214, serial number 1552, HL 1552

No.	Parameter	Set, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB
1	Insertion Loss	20	0.27	-	NA	±0.12
2		30	0.31	-		
3		50	0.40	-		
4		80	0.49	-		
5		100	0.55	-		
6		200	0.80	-		
7		300	0.99	-		
8		400	1.17	-		
9		500	1.32	-		
10		600	1.45	-		
11		700	1.60	-		
12		800	1.72	-		
13		900	1.84	-		
14		1000	2.00	-		
15		1200	2.19	-		
16		1400	2.40	-		
17		1500	2.51	-		
18		1600	2.61	-		
19		1800	2.82	-		
20		2000	3.00	-		

Cable 40 GHz, 0.8 m, blue, model KPS-1503A-800-KPS, serial number W4907 (HL 2254), insertion loss

Frequency, GHz	Insertion loss, dB	Frequency, GHz	Insertion loss, dB
0.03	0.05	10.30	1.20
0.05	0.09	10.50	1.22
0.1	0.10	10.70	1.30
0.2	0.16	10.90	1.21
0.3	0.21	11.10	1.19
0.5	0.26	11.30	1.26
0.7	0.31	11.50	1.25
0.9	0.36	11.70	1.23
1.1	0.39	11.90	1.29
1.3	0.42	12.10	1.25
1.5	0.46	12.40	1.33
1.7	0.47	13.00	1.41
1.9	0.51	13.50	1.42
2.1	0.55	14.00	1.61
2.3	0.54	14.50	1.53
2.5	0.56	15.00	1.63
2.7	0.60	15.50	1.53
2.9	0.61	16.00	1.53
3.1	0.63	16.50	1.54
3.3	0.66	17.00	1.67
3.5	0.68	17.50	1.88
3.7	0.72	18.00	1.76
3.9	0.70	18.50	2.03
4.1	0.75	19.00	1.66
4.3	0.75	19.50	1.71
4.5	0.80	20.00	1.65
4.7	0.78	20.50	1.87
4.9	0.81	21.00	1.75
5.1	0.82	21.50	1.86
5.3	0.84	22.00	1.81
5.5	0.84	22.50	2.03
5.7	0.86	23.00	1.91
5.9	0.90	23.50	1.87
6.1	0.91	24.00	1.97
6.3	0.95	24.50	1.85
6.5	0.92	25.00	2.01
6.7	0.91	25.50	2.02
6.9	0.95	26.00	2.15
7.1	0.98	26.50	2.11
7.3	1.03	27.00	2.00
7.5	0.98	28.00	2.04
7.7	1.06	29.00	1.97
7.9	1.08	30.00	1.97
8.1	1.06	31.00	2.31
8.3	1.10	32.00	2.24
8.5	1.10	33.00	2.31
8.7	1.12	34.00	2.36
8.9	1.12	35.00	2.33
9.1	1.14	36.00	2.47
9.3	1.18	37.00	2.56
9.5	1.16	38.00	2.45
9.7	1.18	39.00	2.68
9.9	1.17	40.00	2.60
10.1	1.18		

Calibration data
RF cable 12 m, RG-214, model C214-12, serial number 149, HL 813

No.	Parameter	Set, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB
1	Insertion Loss	20	0.43	-	NA	±0.12
2		30	0.53	-		
3		50	0.71	-		
4		80	0.92	-		
5		100	1.04	-		
6		200	1.51	-		
7		300	1.90	-		
8		400	2.26	-		
9		500	2.54	-		
10		600	2.83	-		
11		700	3.12	-		
12		800	3.37	-		
13		900	3.61	-		
14		1000	3.85	-		
15		1200	4.31	-		
16		1400	4.74	-		
17		1500	4.92	-		
18		1600	5.17	-		
19		1800	5.58	-		
20		2000	5.95	-		

Cable 18GHz, 4 m, green, model: SPS-1803A-4000-NPS, s/n T4657 (HL 1941)
Calibration data

Frequency, GHz	Insertion loss, dB
0.03	0.19
0.05	0.24
0.10	0.33
0.20	0.46
0.30	0.57
0.40	0.65
0.50	0.73
0.60	0.80
0.70	0.87
0.80	0.92
0.90	0.98
1.00	1.03
1.10	1.08
1.20	1.14
1.30	1.18
1.40	1.22
1.50	1.27
1.60	1.32
1.70	1.35
1.80	1.40
1.90	1.43
2.00	1.46
2.10	1.50
2.20	1.54
2.30	1.57
2.40	1.61
2.50	1.64
2.60	1.67
2.70	1.70
2.80	1.74
2.90	1.77
3.10	1.83
3.30	1.89
3.50	1.95
3.70	2.01
3.90	2.07
4.10	2.14
4.30	2.18
4.50	2.26
4.70	2.31
4.90	2.32
5.10	2.42
5.30	2.45
5.50	2.47
5.70	2.53
5.90	2.59

Frequency, GHz	Insertion loss, dB
6.10	2.63
6.30	2.66
6.50	2.72
6.70	2.77
6.90	2.78
7.10	2.81
7.30	2.87
7.50	2.92
7.70	2.94
7.90	3.02
8.10	3.06
8.30	3.13
8.50	3.14
8.70	3.16
8.90	3.23
9.10	3.20
9.30	3.22
9.50	3.31
9.70	3.32
9.90	3.39
10.10	3.42
10.30	3.46
10.50	3.46
10.70	3.48
10.90	3.50
11.10	3.58
11.30	3.63
11.50	3.65
11.70	3.85
11.90	3.81
12.10	3.84
12.40	3.91
13.00	3.87
13.50	3.99
14.00	4.12
14.50	4.17
15.00	4.27
15.50	4.33
16.00	4.38
16.50	4.38
17.00	4.42
17.50	4.61
18.00	4.78

Cable RF, 2m, model: Sucoflex 104PE, s/n 13094/4PE (HL 1566)
Calibration data

No.	Parameter	Set, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB	Notes
1	Insertion Loss	30	0.10	-	≤ 5.0	±0.12	
2		50	0.13	-			
3		100	0.20	-			
4		300	0.33	-			
5		500	0.45	-			
6		800	0.60	-			
7		1000	0.65	-			
8		1500	0.91	-			
9		2000	1.08	-			
10		2500	1.19	-			
11		3000	1.28	-			
12		3500	1.49	-			
13		4000	1.63	-			
14	Insertion Loss	4500	1.63	-	≤ 5.0	±0.17	
15		5000	1.66	-			
16		5500	1.88	-			
17		6000	1.96	-			
18		6500	1.93	-			
19		7000	2.07	-			
20		7500	2.37	-			
21		8000	2.34	-			
22		8500	2.64	-			
23		9000	2.68	-			
24		9500	2.64	-			
25		10000	2.70	-			
26		10500	2.84	-			
27		11000	2.88	-			
28		11500	3.19	-			
29		12000	3.15	-			
30	Insertion Loss	12500	3.20		≤ 5.0	±0.26	
31		13000	3.22				
32		13500	3.47				
33		14000	3.41				
34		14500	3.59				
35		15000	3.79				
36		15500	4.24				
37		16000	4.12				
38		16500	4.46				
39		17000	4.50				
40		17500	4.49				
41		18000	4.45				

Cable RF, 2m, model: Sucoflex 104PE, s/n 13095/4PE (HL 1567)
Calibration data

No.	Parameter	Set, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB	Notes
1	Insertion Loss	30	0.09	-	≤ 5.0	±0.12	
2		50	0.15	-			
3		100	0.23	-			
4		300	0.31	-			
5		500	0.46	-			
6		800	0.63	-			
7		1000	0.67	-			
8		1500	0.89	-			
9		2000	1.05	-			
10		2500	1.18	-			
11		300	1.26	-		±0.17	
12		5300	1.51	-			
13		4000	1.66	-			
14		4500	1.61	-			
15		5000	1.67	-			
16		5500	1.91	-			
17		6000	1.98	-			
18		6500	1.91	-			
19		7000	2.04	-			
20		7500	2.36	-			
21		8000	2.36	-			
22		8500	2.61	-			
23		9000	2.69	-		±0.26	
24		9500	2.62	-			
25		10000	2.73	-			
26		10500	2.83	-			
27		11000	2.84	-			
28		11500	3.22	-			
29		12000	3.17	-			
30		12500	3.17	-			
31		13000	3.18	-			
32		13500	3.49	-			
33		14000	3.43	-			
34		14500	3.57	-			
35		15000	3.76	-			
36		15500	4.20	-			
37		16000	4.10	-			
38		16500	4.49	-			
39		17000	4.53	-			
40		17500	4.46	-			
41		18000	4.47	-			

Cable RF, 3.5m, model RG-214, serial number 1553 (HL 1553)

No.	Parameter	Set		Measured, dBm	Attenuation, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB
		MHz	dBm					
1	Attenuation	1	-0.12	-0.13	0.01	NA	NA	±0.12
2		10	0.00	-0.07	0.07			
3		30	-0.10	-0.22	0.12			
4		50	-0.09	-0.31	0.22			
5		100	-0.13	-0.39	0.26			
6		200	-0.08	-0.48	0.40			
7		300	-0.12	-0.64	0.52			
8		400	-0.03	-0.63	0.60			
9		500	0.19	-0.51	0.70			
10		600	0.05	-0.72	0.77			
11		700	-0.06	-0.90	0.84			
12		800	-0.01	-1.01	1.00			
13		900	0.03	-0.97	1.00			
14		1000	-0.08	-1.13	1.05			
15		2000	-0.19	-1.89	1.70			

Insertion loss
Cable coax microwave, 1 m, model: PFP01P10394, HL 0410

Frequency, GHz	Insertion loss, dB
0.03	0.04
0.05	0.06
0.1	0.08
0.2	0.11
0.3	0.13
0.5	0.19
0.7	0.23
0.9	0.26
1.1	0.30
1.3	0.32
1.5	0.33
1.7	0.39
1.9	0.38
2.1	0.43
2.3	0.44
2.5	0.48
2.7	0.49
2.9	0.49
3.1	0.53
3.3	0.50
3.5	0.58
3.7	0.56
3.9	0.71
4.1	0.66
4.3	0.79
4.5	0.72
4.7	0.71
4.9	0.68
5.1	0.65
5.3	0.66
5.5	0.78
5.7	0.86
5.9	0.85
6.1	0.99
6.3	0.82
6.5	0.87
6.7	0.77
6.9	0.81
7.1	0.84
7.3	0.97
7.5	0.90
7.7	0.90

Frequency, GHz	Insertion loss, dB
7.9	0.96
8.1	0.83
8.3	1.02
8.5	0.94
8.7	1.14
8.9	1.06
9.1	1.23
9.3	1.02
9.5	1.04
9.7	1.09
9.9	1.05
10.1	1.29
10.3	1.24
10.5	1.39
10.7	1.17
10.9	1.39
11.1	1.11
11.3	1.31
11.5	1.15
11.7	1.18
11.9	1.20
12.1	1.21
12.4	1.20
13.0	1.22
13.5	1.38
14.0	1.56
14.5	1.34
15.0	1.56
15.5	1.65
16.0	1.35
16.5	1.47
17.0	1.60
17.5	1.55
18.0	1.93