

FCC Part 74 Subpart H

EMI TEST REPORT

of

E.U.T. : Power Amplifier
FCC ID. : NTMAB-771T
Model No. : AB-771T
Working Frequency : 640 – 664 MHz

for

APPLICANT : OKAYO Electronics Co., Ltd.
ADDRESS : No.2, Gongye 10th Rd., Dali Dist., Taichung
41280, Taiwan

Test Performed by

ELECTRONICS TESTING CENTER (ETC) , TAIWAN
NO. 34, LIN 5, DINGFU TSUEN, LINKOU SHIANG
TAIPEI COUNTY, TAIWAN, 24442, R.O.C.
TEL : (02)26023052 FAX : (02)26010910
[http:// www.etc.org.tw](http://www.etc.org.tw) ; e-mail:emc@etc.org.tw

Report Number : 12-06-RBF-059-01

TEST REPORT CERTIFICATION

Applicant : OKAYO Electronics Co., Ltd.
No.2, Gongye 10th Rd., Dali Dist., Taichung 41280, Taiwan

Manufacturer : OKAYO Electronics Co., Ltd.
No.2, Gongye 10th Rd., Dali Dist., Taichung 41280, Taiwan

Description of EUT :

a) Type of EUT : Power Amplifier

b) Trade Name : OKAYO

c) Model No. : AB-771T

d) FCC ID : NTMAB-771T


e) Working Frequency : 640 – 664 MHz

f) Power Supply : Adapter Model: STD-05010U
I/P:100-240V, 47-63Hz, 0.19A; O/P:5V, 1.0A, 5W

Regulation Applied: FCC Rules and Regulations Part 74 Subpart H

I HEREBY CERTIFY THAT; The data shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Issued Date : Jul. 22, 2013

Test Engineer : 
(Vincent Chang, Engineer)


Approve & Authorized Signer : 
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents

Page

1. GENERAL INFORMATION	1
1.1 PRODUCT DESCRIPTION.....	1
1.2 TEST METHODOLOGY.....	1
1.3 TEST FACILITY	1
2. REQUIREMENTS OF PROVISIONS	2
2.1 DEFINITION	2
2.2 FREQUENCIES AVAILABLE	2
2.3 REQUIREMENTS FOR RADIO EQUIPMENT ON CERTIFICATION	2
2.4 LABELING REQUIREMENT.....	3
3. OUTPUT POWER MEASUREMENT	4
3.1 PROVISION APPLICABLE.....	4
3.2 MEASUREMENT PROCEDURE.....	4
3.3 TEST DATA.....	6
3.4 RESULT CALCULATION.....	7
3.5 TEST EQUIPMENT	7
4. MODULATION CHARACTERISTICS	8
4.1 PROVISIONS APPLICABLE	8
4.2 MEASUREMENT METHOD.....	8
4.3 MEASUREMENT INSTRUMENT.....	9
4.4 MEASUREMENT RESULT.....	9
5. OCCUPIED BANDWIDTH OF EMISSION	11
5.1 PROVISIONS APPLICABLE	11
5.2 MEASUREMENT METHOD.....	11
5.3 OCCUPIED BANDWIDTH TEST EQUIPMENT	11
5.4 BANDWIDTH MEASURED	12
5.4.1 <i>Input Level Derived</i>	12
5.4.2 <i>Occupied Bandwidth Plotted</i>	13
6. FIELD STRENGTH OF EMISSION.....	17
6.1 PROVISIONS APPLICABLE	17
6.2 MEASUREMENT PROCEDURE.....	17
6.3 MEASURING INSTRUMENT.....	18
6.4 MEASURING DATA	19
6.4.1 <i>Emission Test Data</i>	19
6.4.2 <i>Emission mask plots</i>	22
6.5 OTHER EMISSION	25
6.6 RADIATED MEASUREMENT PHOTOS	26
7. FREQUENCY STABILITY MEASUREMENT.....	27
7.1 PROVISIONS APPLICABLE	27
7.2 MEASUREMENT PROCEDURE	27
7.3 MEASUREMENT INSTRUMENT.....	28
7.4 MEASUREMENT DATA.....	29
8 CONDUCTED EMISSION MEASUREMENT.....	32
8.1 STANDARD APPLICABLE.....	32
8.2 MEASUREMENT PROCEDURE	32
8.3 CONDUCTED EMISSION DATA	33
8.4 RESULT DATA CALCULATION	35
8.5 CONDUCTED MEASUREMENT EQUIPMENT.....	35
8.6 PHOTOS OF CONDUCTION MEASURING SETUP.....	36

1. GENERAL INFORMATION

1.1 Product Description

a) Type of EUT	:	Power Amplifier
b) Trade Name	:	OKAYO
c) Model No.	:	AB-771T
d) FCC ID	:	NTMAB-771T
e) Working Frequency	:	640 – 664 MHz
f) Power Supply	:	Adapter Model: STD-05010U I/P:100-240V, 47-63Hz, 0.19A; O/P:5V, 1.0A, 5W
g) Emission Designator	:	62K0F3E 2M+2DK=2x(6kHz)+2x(25kHz)x1=62kHz

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in chapter 13 of ANSI C63.4 (2003). Test also follow “TIA-603-C(2004)-Land Mobile FM or PM Communications Equipment Measurement and Performance Standards” and section 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, and 2.1055 of Part 2 of CFR 47.

The EUT is a power amplifier. It only amplifies the input RF signal with a maximum output up to 23 dBm. For testing the modulation characteristics a transmitter EJ-774T was used to provide RF signal. For output power, spurious emission and conducted emission test a signal generator was employed.

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO.34, LIN 5, DINGFU TSUEN, LINKOU SHIANG TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Aug. 05, 2008.

2. REQUIREMENTS OF PROVISIONS

2.1 Definition

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Frequencies Available

According to sec. 74.802 of Part 74, the following frequencies are available for low power auxiliary station :

Frequencies (MHz)	
26.100-26.480	455.000-456.000
54.000-72.000	470.000-488.000
76.000-88.000	488.000-494.000
161.625-161.775	494.000-608.000
174.000-216.000	614.000-806.000
450.000-451.000	944.000-952.000

2.3 Requirements for Radio Equipment on Certification

(1) RF Output Power

For transmitters, the power output shall be measured at the RF output terminals.

(2) Modulation Characteristics

For Voice Modulated Communication Equipment, a curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

(3) Occupied Bandwidth

For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

(4) Spurious Emissions at Antenna Terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminal when properly loaded with a suitable artificial antenna.

(5) Field Strength of Spurious Emissions

Measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation.

(6) Frequencies Tolerance

- a) The frequency stability shall be measured with variation of ambient temperature.
- b) The frequency stability shall be measured with variation of primary supply voltage.

2.4 Labeling Requirement

Each equipment for which a type acceptance application is filed on or after May 1,1981, shall bear an identification plate or label pursuant to § 2.925 (Identification of equipment) and §2.926 (FCC identifier) .

3. OUTPUT POWER MEASUREMENT


3.1 Provision Applicable

According to §74.861(e)(1)(ii), the output power shall not exceed 250 milliwatts.

3.2 Measurement Procedure


1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° , and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.
7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

Figure 1 : Frequencies measured below 1 GHz configuration

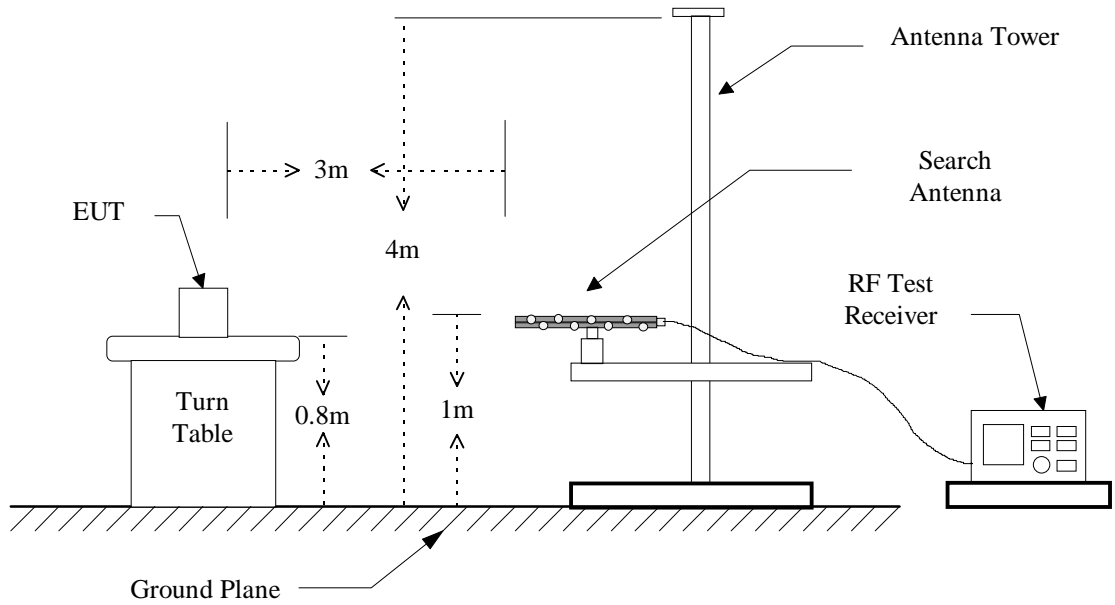

Note: For substitution method, replace the EUT with a tuned dipole antenna relative to each frequency and connect to a standard signal generator (SG) via a low loss cable.

Figure 2 : Frequencies measured above 1 GHz configuration

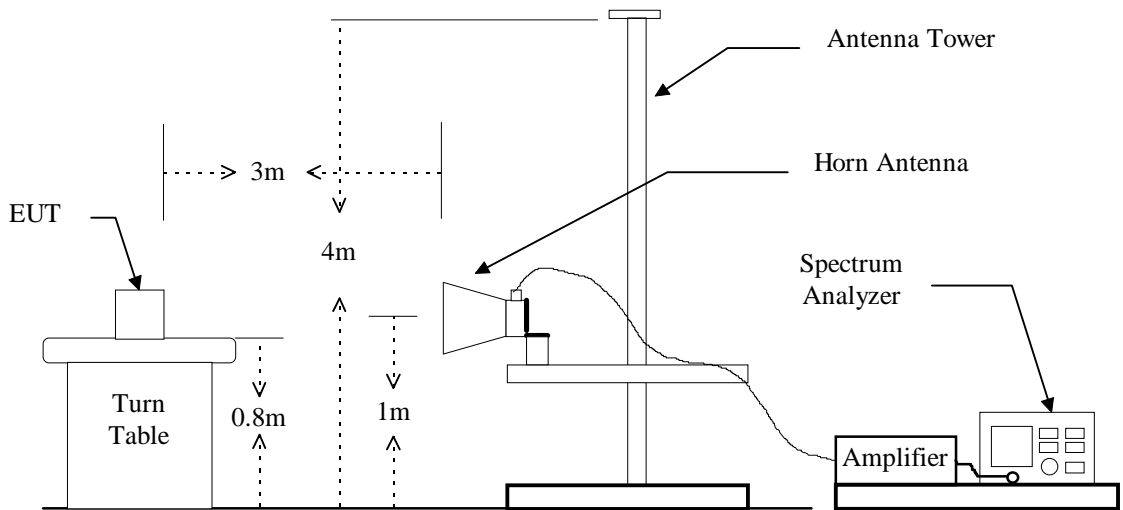

Note: For substitution method, replace the EUT with a horn antenna and connect to a standard signal generator (SG) via a low loss cable.

3.3 Test Data

Band 640 – 664 MHzOperated mode : TX
Temperature : 25 °CTest Date : Jul. 22, 2013
Humidity : 65 %

Frequency (MHz)	Meter Reading (dB μ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
640.100	95.3	24.2	2.4	----	21.8	151.4	250

Frequency (MHz)	Meter Reading (dB μ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
652.100	95.4	24.0	2.4	----	21.6	144.5	250

Frequency (MHz)	Meter Reading (dB μ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
663.900	95.2	24.6	2.3	----	22.3	169.8	250

Note: For measured frequency below 1GHz, a tuned dipole antenna is used.

3.4 Result Calculation

Result calculation is as following :

Result = SG Reading + Cable Loss + Antenna Gain Corrected

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

$$\text{mW} = \log^{-1}\left[\frac{\text{Result(dBm)}}{10}\right]$$

3.5 Test Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2013/05/14	2014/05/13
Dipole Antenna	Schwarzbeck	897;898	2012/09/07	2013/09/07
Log-periodic Antenna	EMCO	3146	2012/10/17	2013/10/17
Amplifier	HP	8447D	2013/05/03	2014/05/02
Signal generator	HP	83732B	2012/09/06	2013/09/06

4. MODULATION CHARACTERISTICS

4.1 Provisions Applicable

According to § 2.1047 (a), for Voice Modulated Communication Equipment, the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be measured.

4.2 Measurement Method


A) Modulation Limit

1. Position the EUT as shown in figure 3, adjust the audio input frequency to 100 Hz and the input level from 0V to maximum permitted input voltage with recording each carrier frequency deviation responding to respective input level.
2. Repeat step 1 with changing the input frequency for 200, 500, 1000, 3000, and 5000 Hz in sequence.

B) Frequency response of all circuits

1. Position the EUT as shown in figure 3.
2. Vary the modulating frequency from 100 Hz to 15000 Hz with constant input voltage (derived from 5.4(a) of this test report), and observe the change in output.

Figure 3 : Modulation characteristic measurement configuration

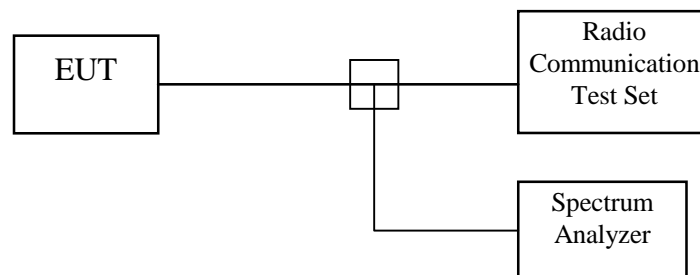

4.3 Measurement Instrument

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Communications Service Monitor	AEROFLEX	2945B	2013/05/13	2014/05/12
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20

4.4 Measurement Result


RF Frequency : 640MHz

Test Date : Jul. 22, 2013


Temperature : 24 °C

Humidity : 55 %


A). Frequency response

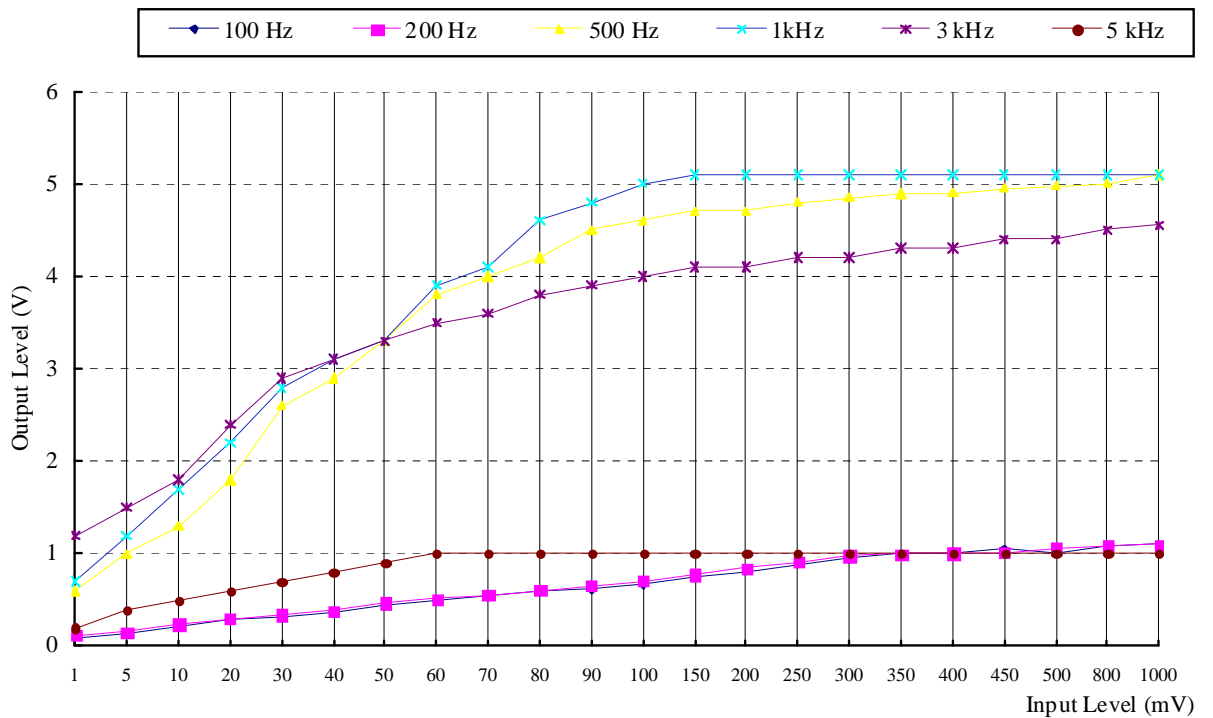

B). Modulation Limit

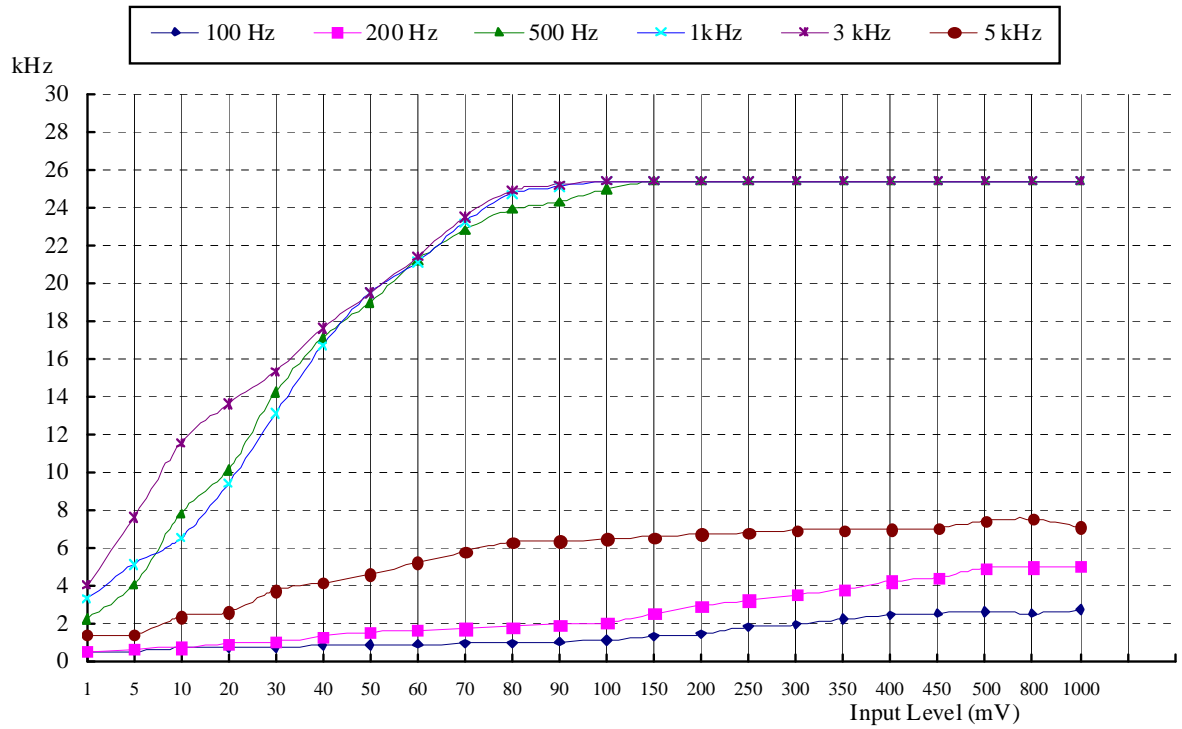

C). Frequency response of all circuits

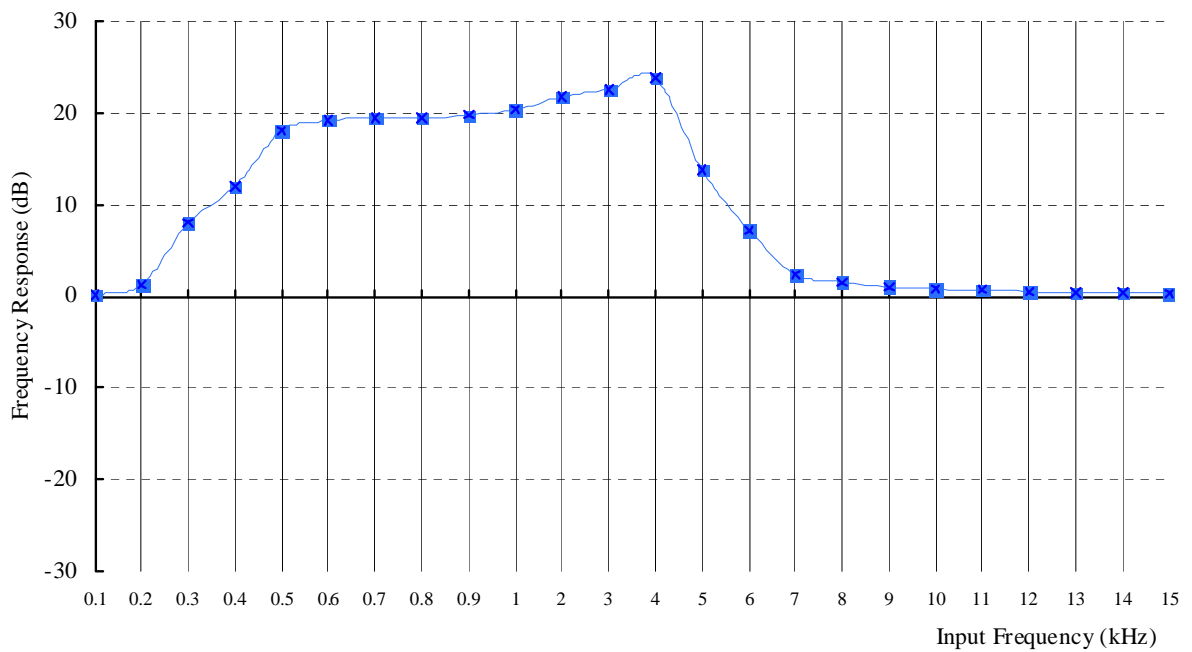

5. OCCUPIED BANDWIDTH OF EMISSION

5.1 Provisions Applicable


According to §2.1049 (c)(1), For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

According to §74.861(e)(5), the frequency emission bandwidth shall not exceed 200 kHz.

5.2 Measurement Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4, and Install new batteries in the EUT. Turn on the EUT and set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Apply a 2.5 kHz modulation signal to EUT and measure the frequencies of the modulated signal from the EUT where it is the specified number of dB below the reference level set in step 2. This is the occupied bandwidth specified.

Figure 4 : Occupied bandwidth measurement configuration

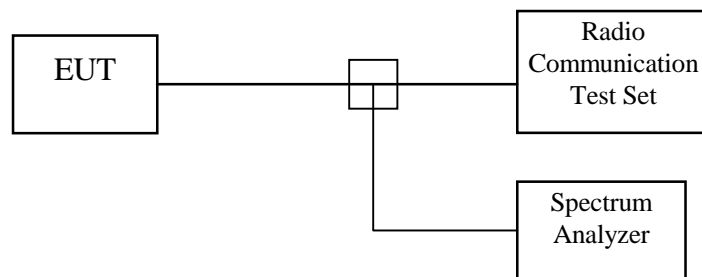

5.3 Occupied Bandwidth Test Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Communications Service Monitor	AEROFLEX	2945B	2013/05/13	2014/05/12
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20

5.4 Bandwidth Measured

5.4.1 Input Level Derived


Test Date : Jul. 22, 2013

Temperature : 24 °C

Humidity : 55 %

RF Frequency : 640MHz


Input Audio Frequency : 2.5 kHz, Sine Wave

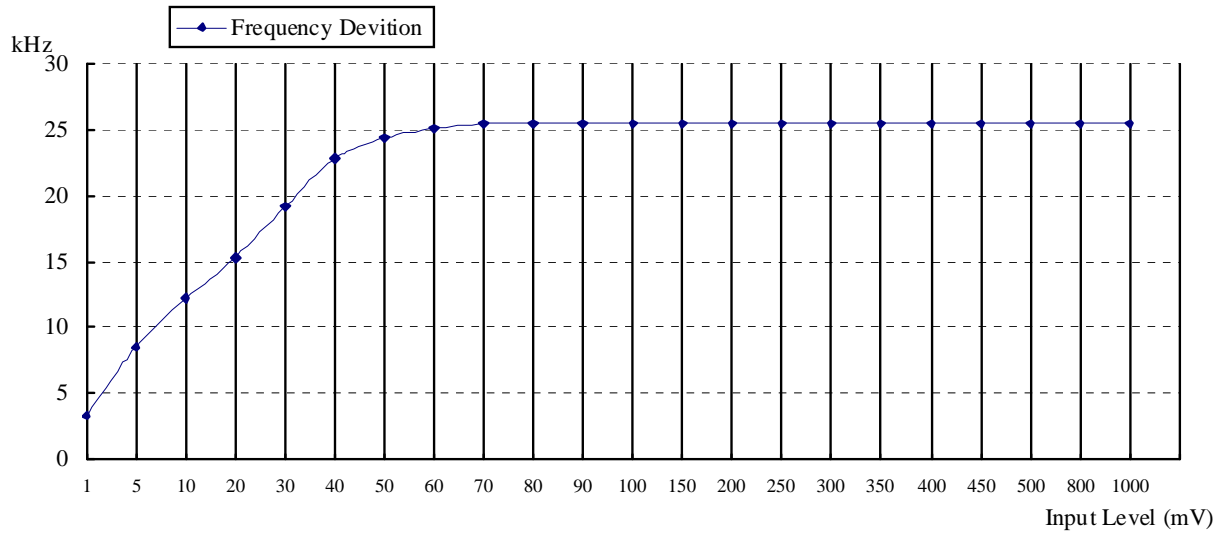



The Level input to produce 50% modulation is 10 mV, therefore the magnitude 16 dB greater than it is 63.1 mV.

5.4.2 Occupied Bandwidth PlottedTest Date : Jul. 23, 2013Temperature : 24 °CHumidity : 55 %

RF Frequency (MHz)	26 dB Bandwidth (kHz)
640.1	44.0
652.1	44.5
663.9	44.5

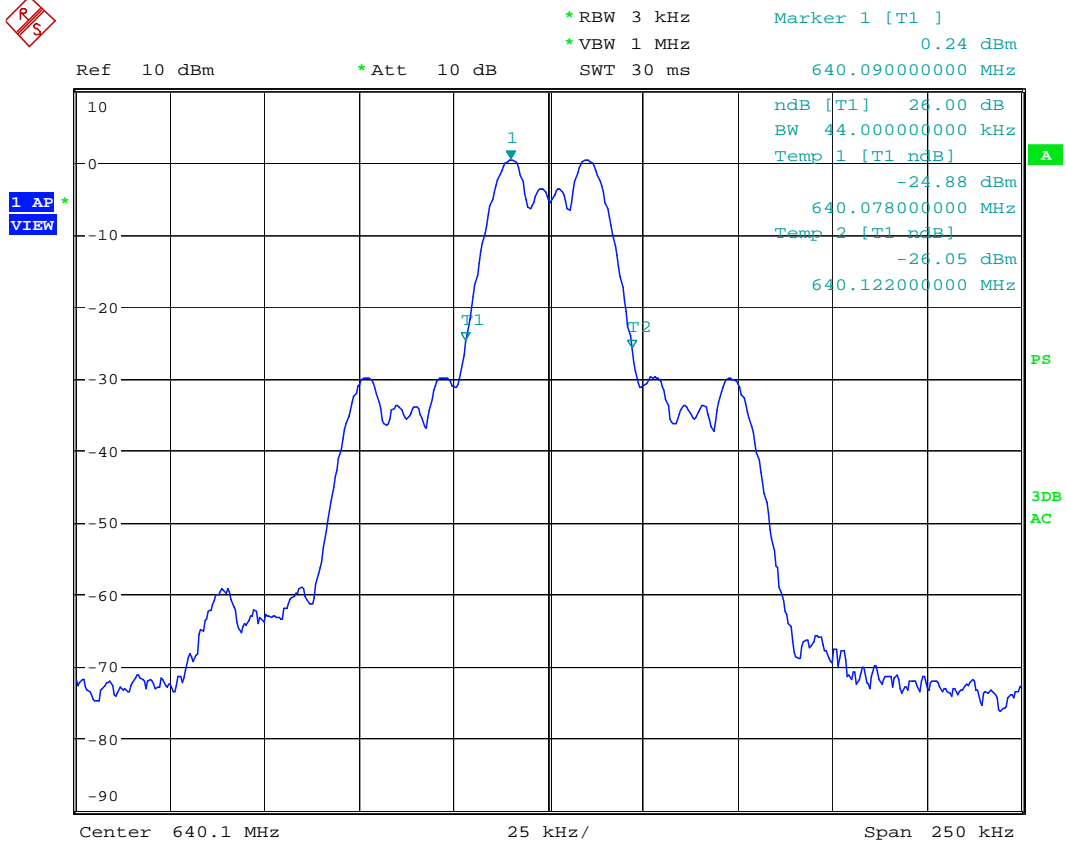

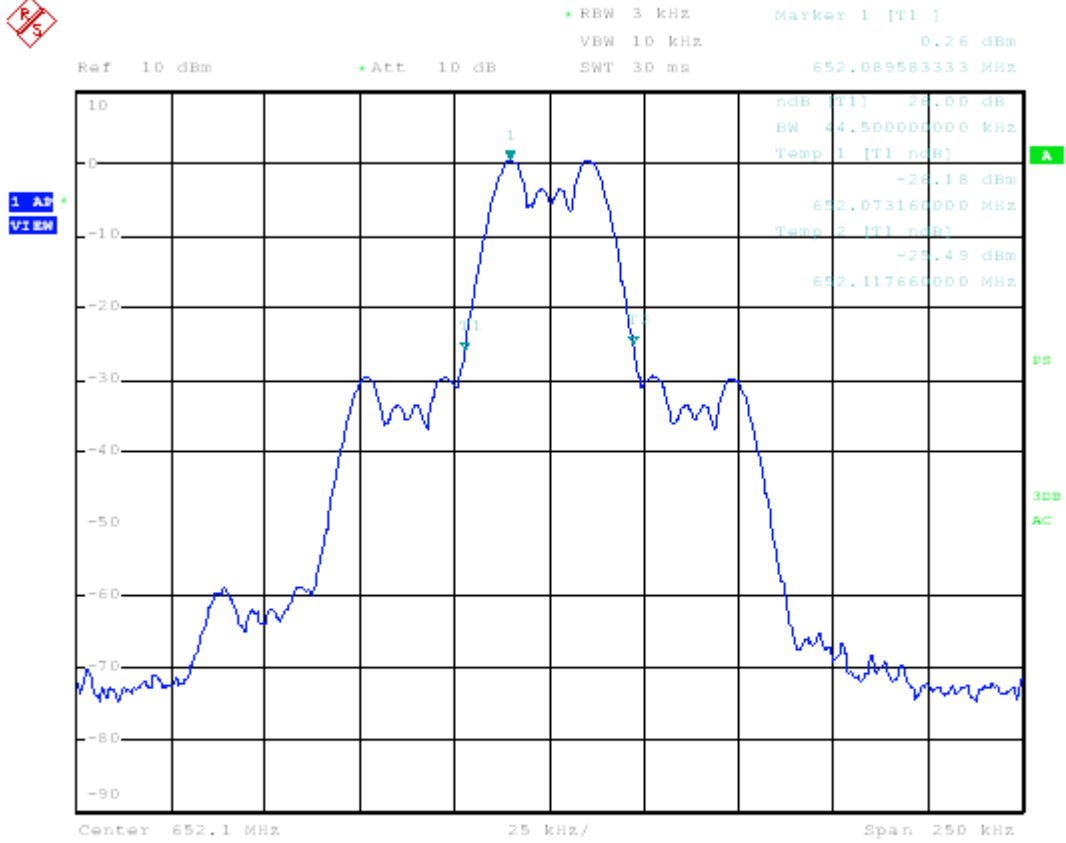

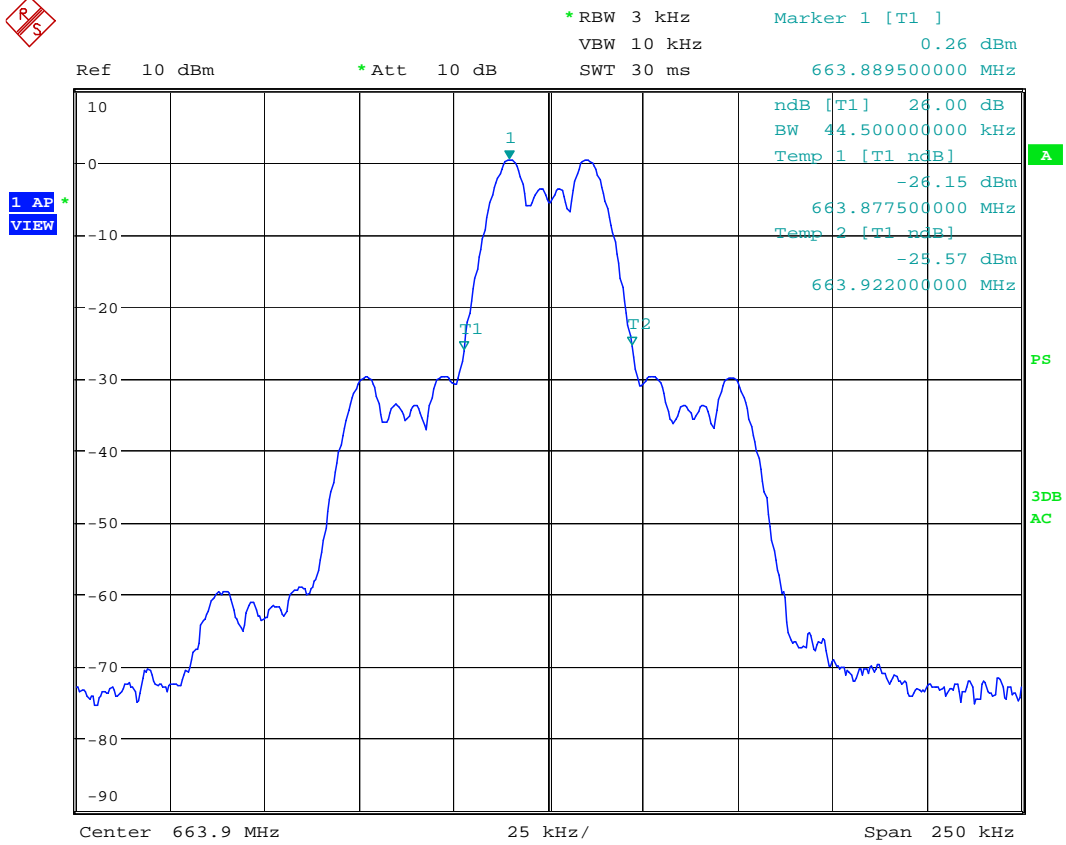

6. FIELD STRENGTH OF EMISSION

6.1 Provisions Applicable

According to §2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

According to §74.861(e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) on any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (ii) on any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (iii) on any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth shall be attenuated below the unmodulated carrier by at least 43 plus 10 Log(output power in watts) dB.

6.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power as measured in chapter 3.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° , and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.

7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

6.3 Measuring Instrument

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20
Double Ridged Antenna	EMCO	3115	2013/04/29	2014/04/28
Double Ridged Antenna	EMCO	3115	2013/04/29	2014/04/28
Log-periodic Antenna	EMCO	3146	2012/10/07	2013/10/06
Biconical Antenna	EMCO	3110	2012/10/07	2013/10/06
Dipole Antenna	Schwarzbeck	897;898	2012/09/07	2013/09/07
Amplifier	HP	8449B	2013/01/09	2014/01/08
Amplifier	HP	8447D	2013/05/03	2014/05/02
Signal generator	HP	83732B	2012/09/06	2013/09/06

Measuring instrument setup in frequency band measured is as following :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz

6.4 Measuring Data

6.4.1. Emission Test Data

a. Tx Frequency: 640.1MHz

Operated mode : TX

Test Date : Jul. 22, 2013

Temperature : 25 °C

Humidity : 65 %

Unmodulated carrier output power is 21.8dBm , or 151.4 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$21.8 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBUV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1280.200	---	---	---	---	6.4	-2.0	1.30	---	---	-13.0	---
1920.300	---	---	---	---	9.3	-2.0	1.75	---	---	-13.0	---
2560.400	---	---	---	---	9.2	-2.0	1.75	---	---	-13.0	---
3200.500	---	---	---	---	9.7	-2.0	1.75	---	---	-13.0	---
3840.600	---	---	---	---	9.6	-2.0	2.10	---	---	-13.0	---
4480.700	---	---	---	---	10.6	-2.0	2.10	---	---	-13.0	---
5120.800	---	---	---	---	10.9	-2.0	2.10	---	---	-13.0	---
5760.900	---	---	---	---	10.9	-2.0	2.60	---	---	-13.0	---
6401.000	---	---	---	---	12.1	-2.0	2.60	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

$$\text{Result} = \text{SG Reading} + \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

4. Spurious or harmonics above 1 GHz is too low to be detected or attenuated more than 60 dB from limit value.

b. Tx Frequency: 652.1MHz

Operated mode : TX

Test Date : Jul. 22, 2013

Temperature : 25 °C

Humidity : 65 %

Unmodulated carrier output power is 21.6 dBm , or 144.5 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$21.6 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1304.200	---	---	---	---	6.4	-2.0	1.30	---	---	-13.0	---
1956.300	---	---	---	---	9.3	-2.0	1.75	---	---	-13.0	---
2608.400	---	---	---	---	9.2	-2.0	1.75	---	---	-13.0	---
3260.500	---	---	---	---	9.7	-2.0	1.75	---	---	-13.0	---
3912.600	---	---	---	---	9.6	-2.0	2.10	---	---	-13.0	---
4564.700	---	---	---	---	10.6	-2.0	2.10	---	---	-13.0	---
5216.800	---	---	---	---	10.9	-2.0	2.10	---	---	-13.0	---
5868.900	---	---	---	---	10.9	-2.0	2.60	---	---	-13.0	---
6521.000	---	---	---	---	12.1	-2.0	2.60	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

$$\text{Result} = \text{SG Reading} + \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

4. Spurious or harmonics above 1 GHz is too low to be detected or attenuated more than 60 dB from limit value.

c. Tx Frequency: 663.9MHz

Operated mode : TX

Test Date : Jul. 22, 2013

Temperature : 25 °C

Humidity : 65 %

Unmodulated carrier output power is 22.3 dBm , or 169.8 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$22.3-[43+10\log(\text{carrier output power in W})], \text{ or } -13\text{dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1327.800	---	---	---	---	6.4	-2.0	1.30	---	---	-13.0	---
1991.700	---	---	---	---	9.3	-2.0	1.75	---	---	-13.0	---
2655.600	---	---	---	---	9.2	-2.0	1.75	---	---	-13.0	---
3319.500	---	---	---	---	9.7	-2.0	1.75	---	---	-13.0	---
3983.400	---	---	---	---	9.6	-2.0	2.10	---	---	-13.0	---
4647.300	---	---	---	---	10.6	-2.0	2.10	---	---	-13.0	---
5311.200	---	---	---	---	10.9	-2.0	2.10	---	---	-13.0	---
5975.100	---	---	---	---	10.9	-2.0	2.60	---	---	-13.0	---
6639.000	---	---	---	---	12.1	-2.0	2.60	---	---	-13.0	---

Note :


1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :


$$\text{Result} = \text{SG Reading} + \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$


Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

4. Spurious or harmonics above 1 GHz is too low to be detected or attenuated more than 60 dB from limit value.

6.4.2 Emission mask plots

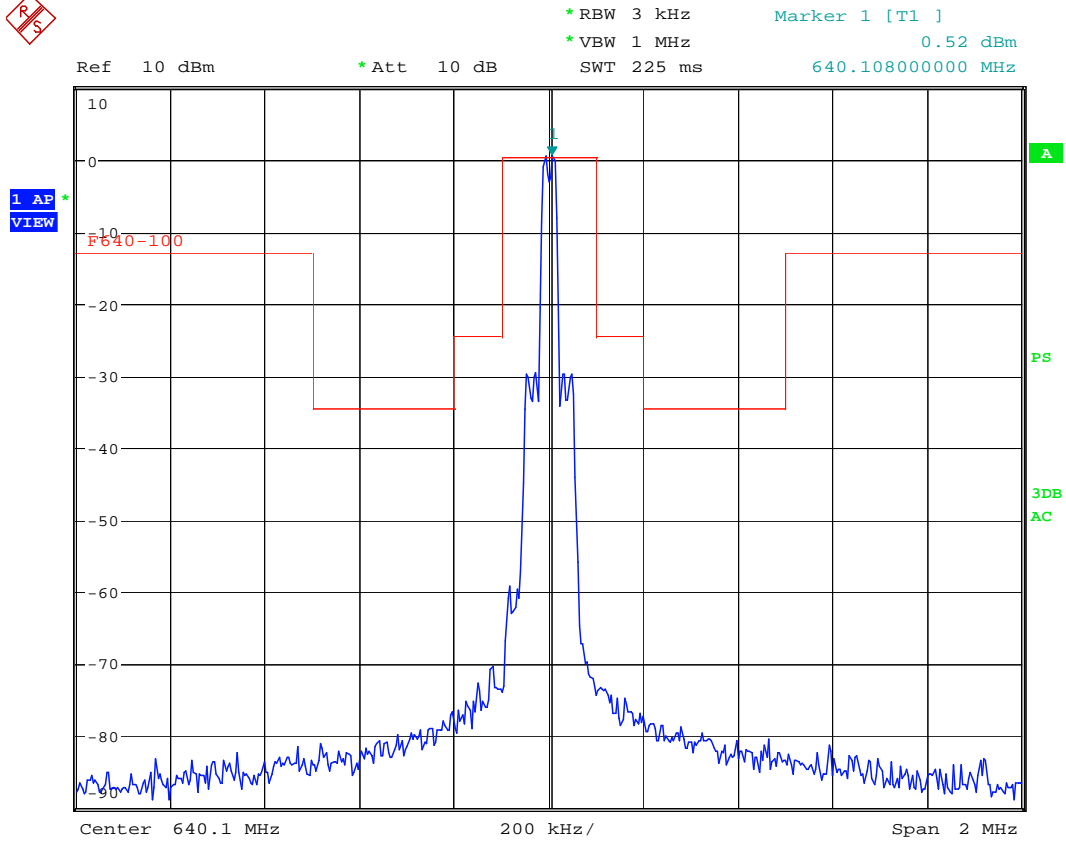

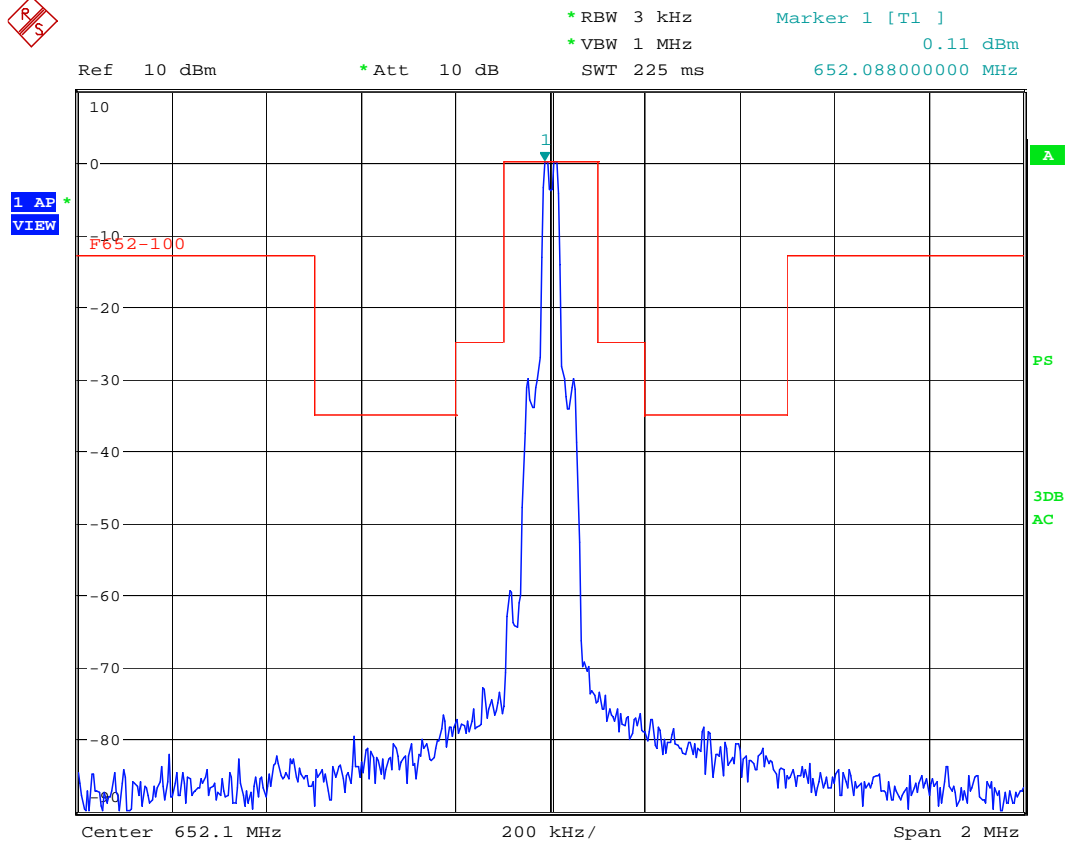

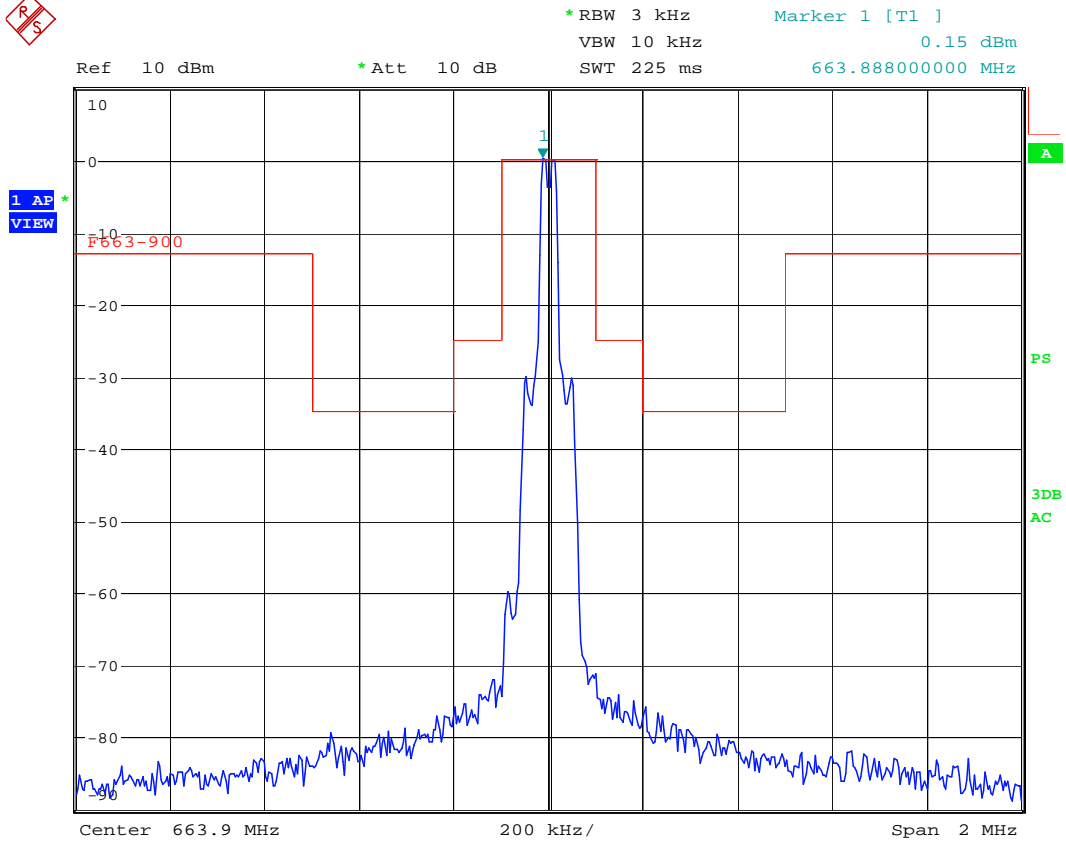

6.5 Other Emission

a) Emission frequencies below 1 GHz

Test Date : Jul. 22, 2013

Temperature : 26 °C

Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
44.58	V	16.7	11.9	28.6	40.0	-11.4	177	1.0
124.77	V	4.6	13.2	17.8	43.5	-25.7	182	1.0
139.89	V	4.4	14.0	18.4	43.5	-25.1	194	1.0
154.74	V	2.6	14.6	17.2	43.5	-26.3	185	1.0
236.01	V	-2.3	19.5	17.2	46.0	-28.8	192	1.0
282.41	V	-7.3	23.5	16.2	46.0	-29.8	179	1.0

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

6.6 Radiated Measurement Photos



7. FREQUENCY STABILITY MEASUREMENT

7.1 Provisions Applicable

According to §2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade, and according to §2.1055 (d)(2), the frequency stability shall be measured with variation of primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

According to §74.861(e)(4), the frequency tolerance of the transmitter shall be 0.005 percent.

7.2 Measurement Procedure

A) Frequency stability versus environmental temperature

1. Setup the configuration per figure 5 for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measurement frequencies.


B) Frequency stability versus input voltage

1. Setup the configuration per figure 7 for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.

2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.

3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Figure 5 : Frequency stability measurement configuration

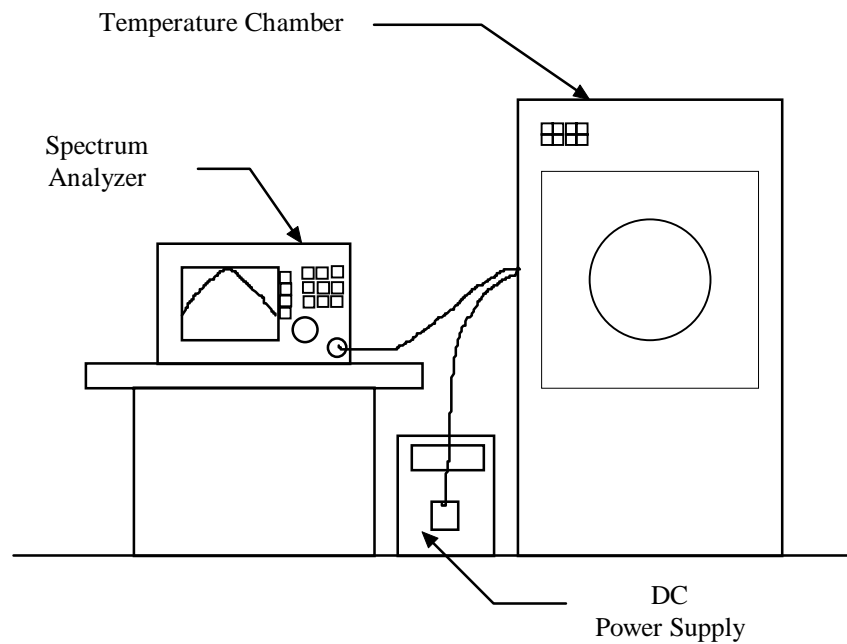

7.3 Measurement Instrument

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2012/09/20	2013/09/20
Temperature Chamber	MALLIER	MCT-2X-M	2013/05/03	2014/05/02

7.4 Measurement DataTest Date : Jul. 22, 2013Temperature : 25 °CHumidity : 60 %**A. Tx Frequency 640.1MHz****A1. Frequency stability versus environment temperature**

Reference Frequency : 640.1 MHz		Limit : 0.00025%					
Environment Temperature (°C)	Power Supplied (Vac)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	120	640.1000	-0.00001	640.1002	0.00003	640.1003	0.00005
40		640.1008	0.00013	640.1009	0.00014	640.1000	-0.00001
30		640.0997	-0.00004	640.0995	-0.00007	640.1012	0.00018
20		640.1004	0.00007	640.1006	0.00009	640.1003	0.00005
10		640.1006	0.00010	640.1005	0.00007	640.0999	-0.00001
0		640.0995	-0.00008	640.1002	0.00002	640.0988	-0.00018
-10		640.0996	-0.00007	640.1007	0.00011	640.0991	-0.00013
-20		640.1006	0.00009	640.0994	-0.00009	640.0999	-0.00001
-30		640.1002	0.00004	640.0990	-0.00015	640.0990	-0.00016

A2. Frequency stability versus supplied voltage (85% - 115%)

Reference Frequency : 640.1 MHz		Limit : 0.00025%					
Environment Temperature (°C)	Power Supplied (Vac)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
25	102	640.1000	-0.00001	640.0997	-0.00005	640.0996	-0.00006
25	138	640.1010	0.00016	640.0993	-0.00011	640.0998	-0.00003

Test Date : Jul. 22, 2013

Temperature : 25 °C

Humidity : 60 %

B. Tx Frequency 652.1MHz**B1. Frequency stability versus environment temperature**

Reference Frequency : 652.1 MHz		Limit : 0.00025%					
Environment Temperature (°C)	Power Supplied (Vac)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	120	652.1002	0.00003	652.1003	0.00004	652.1000	0.00000
40		652.1007	0.00011	652.0989	-0.00017	652.0999	-0.00002
30		652.0997	-0.00005	652.0990	-0.00015	652.0992	-0.00013
20		652.1004	0.00006	652.1000	0.00000	652.0988	-0.00018
10		652.0992	-0.00013	652.0991	-0.00014	652.0990	-0.00015
0		652.0995	-0.00008	652.0998	-0.00003	652.0998	-0.00003
-10		652.1003	0.00004	652.1012	0.00019	652.1003	0.00005
-20		652.1005	0.00007	652.1000	-0.00001	652.0993	-0.00011
-30		652.0996	-0.00005	652.0996	-0.00007	652.1012	0.00019

B2. Frequency stability versus supplied voltage (85% - 115%)

Reference Frequency : 652.1 MHz		Limit : 0.00025%					
Environment Temperature (°C)	Power Supplied (Vac)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
25	102	652.0991	-0.00013	652.1004	0.00006	652.0988	-0.00019
25	138	652.1006	0.00009	652.1010	0.00016	652.0995	-0.00008

Test Date : Jul. 22, 2013

Temperature : 25 °C

Humidity : 60 %

C. Tx Frequency 663.9MHz**C1. Frequency stability versus environment temperature**

Reference Frequency : 663.9 MHz		Limit : 0.00025%					
Environment Temperature (°C)	Power Supplied (Vac)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	120	663.8989	-0.00017	663.8992	-0.00013	663.8993	-0.00011
40		663.9005	0.00007	663.9001	0.00001	663.8991	-0.00013
30		663.8995	-0.00008	663.8991	-0.00013	663.8991	-0.00014
20		663.9009	0.00014	663.9010	0.00015	663.9007	0.00011
10		663.8997	-0.00004	663.8991	-0.00014	663.8992	-0.00012
0		663.9009	0.00013	663.8994	-0.00009	663.8990	-0.00015
-10		663.9012	0.00019	663.8994	-0.00008	663.8993	-0.00010
-20		663.9010	0.00015	663.8997	-0.00004	663.8993	-0.00010
-30		663.8999	-0.00002	663.8994	-0.00009	663.9001	0.00001

C2. Frequency stability versus supplied voltage (85% - 115%)

Reference Frequency : 663.9 MHz		Limit : 0.00025%					
Environment Temperature (°C)	Power Supplied (Vac)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
25	102	663.8997	-0.00004	663.9008	0.00012	663.9009	0.00013
25	138	663.9007	0.00010	663.9002	0.00004	663.8994	-0.00009

8 CONDUCTED EMISSION MEASUREMENT


8.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively .


8.2 Measurement Procedure

1. Setup the configuration per figure 6.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then records the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 6 : Conducted emissions measurement configuration

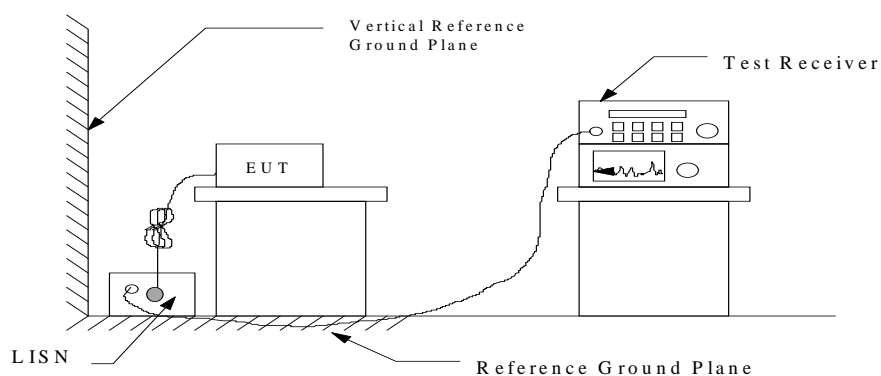

8.3 Conducted Emission Data

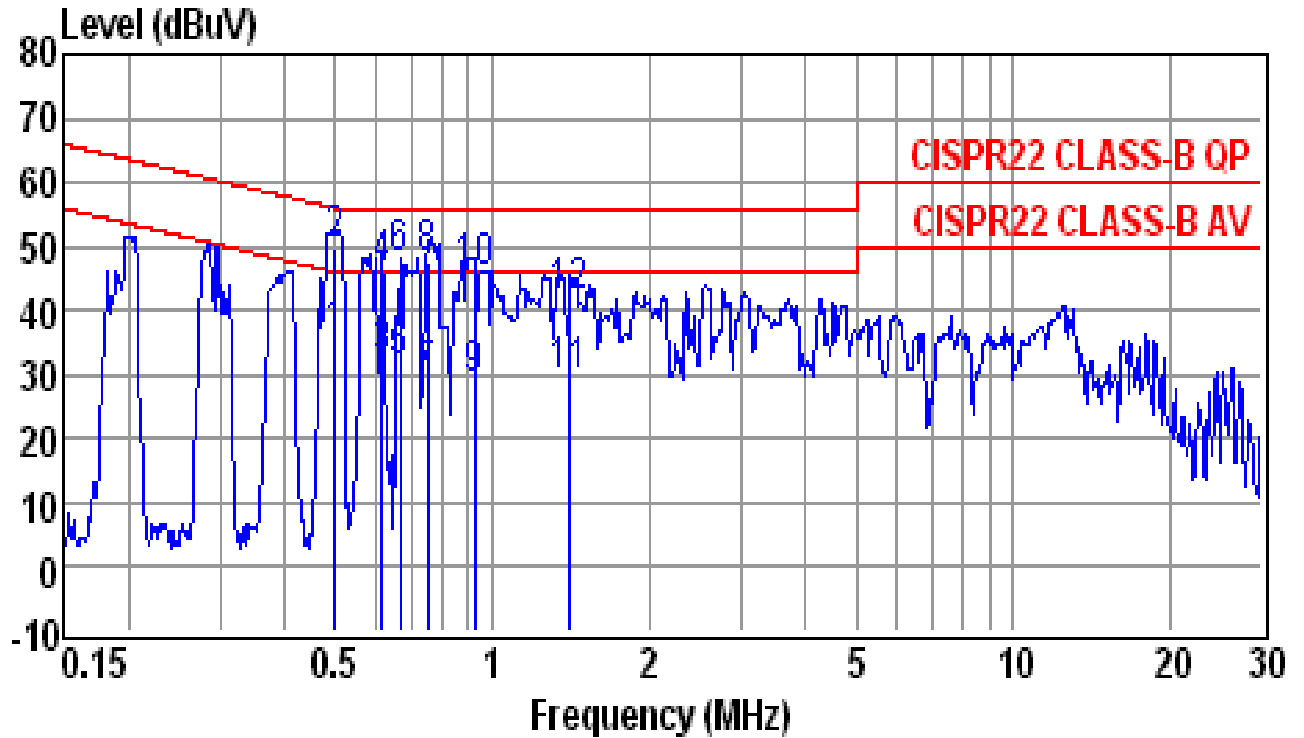


Site : conducted #1 Date : 07-22-2013
 Condition : CISPR22 CLASS-B QP LISN : NEUTRAL
 Tem / Hum : 28 °C / 65% Test Mode : Tx
 EUT : AB-771T Power Rating: AD:STD-05010U (DC5V)
 Memo : ANT:AN0652-13A01TM Memo :

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.4994	34.66	0.40	35.06	46.01	-10.95	Average
0.4994	49.41	0.40	49.81	56.01	-6.20	QP
0.6140	31.72	0.41	32.13	46.00	-13.87	Average
0.6140	45.41	0.41	45.82	56.00	-10.18	QP
0.6648	31.29	0.41	31.70	46.00	-14.30	Average
0.6648	47.32	0.41	47.73	56.00	-8.27	QP
0.7509	28.39	0.42	28.81	46.00	-17.19	Average
0.7509	47.42	0.42	47.84	56.00	-8.16	QP
0.9233	28.17	0.42	28.59	46.00	-17.41	Average
0.9233	45.27	0.42	45.69	56.00	-10.31	QP
1.4110	28.85	0.45	29.30	46.00	-16.70	Average
1.4110	41.52	0.45	41.97	56.00	-14.03	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

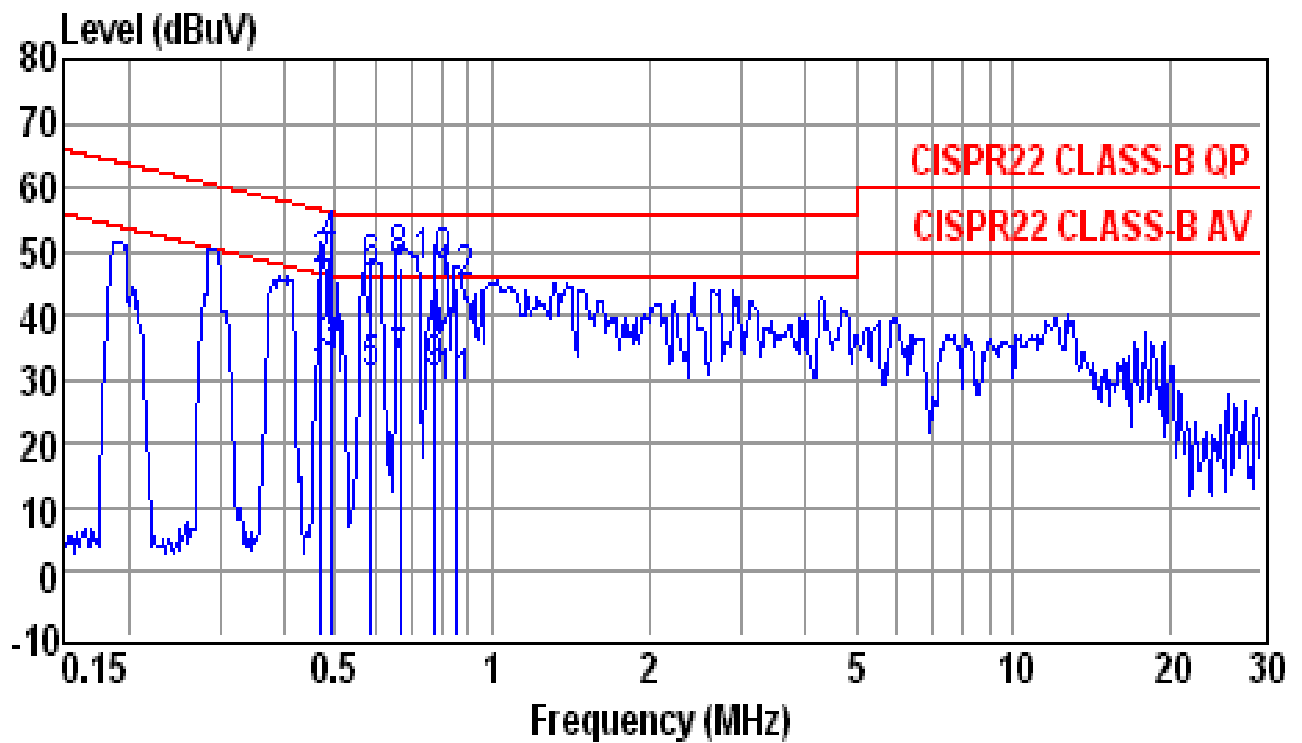

Site : conducted #1 Date : 07-22-2013
 Condition : CISPR22 CLASS-B QP LISN : LINE
 Tem / Hum : 28 °C / 65% Test Mode : OPERATION MODE
 EUT : AB-771T Power Rating : AD:STD-05010U (DC5V)
 Memo : ANT: AN0652-13A01TM Memo :

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.4686	28.68	0.40	29.08	46.54	-17.46	Average
0.4686	46.40	0.40	46.80	56.54	-9.74	QP
0.4889	33.24	0.40	33.64	46.19	-12.55	Average
0.4889	49.27	0.40	49.67	56.19	-6.52	QP
0.5854	30.23	0.41	30.64	46.00	-15.36	Average
0.5854	45.51	0.41	45.92	56.00	-10.08	QP
0.6648	31.23	0.41	31.64	46.00	-14.36	Average
0.6648	47.32	0.41	47.73	56.00	-8.27	QP
0.7752	29.85	0.42	30.27	46.00	-15.73	Average
0.7752	46.90	0.42	47.32	56.00	-8.68	QP
0.8573	27.84	0.42	28.26	46.00	-17.74	Average
0.8573	44.04	0.42	44.46	56.00	-11.54	QP

Note :
 1. Result = Reading + Factor
 2. Factor = LISN Factor + Cable Loss

8.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

8.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2012/07/16	2013/07/15
LISN	EMCO	3625/2	2013/05/07	2014/05/06
LISN	Rohde & Schwarz	ESH2-Z5	2013/04/12	2014/04/11

8.6 Photos of Conduction Measuring Setup

