FCC PART 15, SUBPART B and C; FCC 15.247; RSS-247 and RSS-GEN TEST REPORT

for

RESIDENTIAL ELECTRONIC DEADBOLT

MODEL: 9800, HVIN: HAL3

Prepared for

SPECTRUM BRANDS, INC. 19701 DAVINCI LAKE FOREST, CALIFORNIA 92610

Prepared by: James Rom

JAMES ROSS

Approved by: Kyle Figure 1

KYLE FUJIMOTO

COMPATIBLE ELECTRONICS INC. 114 OLINDA DRIVE BREA, CALIFORNIA 92823 (714) 579-0500

DATE: AUGUST 16, 2024

	REPORT		APPENDICES			TOTAL	
	BODY	A	В	C	D	E	
PAGES	27	2	2	2	16	263	312

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.





TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
1.1 Decision Rule & Risk	7
2. ADMINISTRATIVE DATA 2.1 Location of Testing 2.2 Traceability Statement 2.3 Cognizant Personnel 2.4 Date Test Sample was Received 2.5 Disposition of the Test Sample	8 8 8 8 8
2.6 Abbreviations and Acronyms 3. APPLICABLE DOCUMENTS	8 9
4. DESCRIPTION OF TEST CONFIGURATION 4.1.1 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT 5.1 EUT and Accessory List	12 12
5.2 Emissions Test Equipment	13
6. TEST SITE DESCRIPTION	14
6.1 Test Facility Description	14
6.2 EUT Mounting, Bonding and Grounding	14
6.3 Measurement Uncertainty	14
7. CHARACTERISTICS OF THE TRANSMITTER	15
7.1 Channel Description and Frequencies 7.2 Antenna Gain	15 15
8. TEST PROCEDURES 8.1 RF Emissions	16
8.1.1 Conducted Emissions Test	16
8.1.2 Radiated Emissions Test	17
8.1.3 RF Emissions Test Results	19
8.1.4 Sample Calculations	20
8.2 DTS Bandwidth	22
8.3 Maximum Peak Conducted Output Power – BLE Mode	22
 8.4 Maximum Peak Conducted Output Power – WiFi Mode 8.5 Emissions in Non-Restricted Bands 	23
8.6 RF Band Edges	23 24
8.7 Spectral Density Test	25
8.8 99 % Bandwidth	25
8.9 Variation of the Input Power	26
9. CONCLUSIONS	27

Residential Electronic Deadbolt Model: 9800

LIST OF APPENDICES

APPENDIX	TITLE		
A	Laboratory Accreditations and Recognitions		
В	Modifications to the EUT		
С	Additional Models Covered Under This Report		
D	Diagrams and Charts		
	Test Setup Diagrams		
	Antenna and Effective Gain Factors		
Е	Data Sheets		

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Layout of the Semi-Anechoic Test Chamber

LIST OF TABLES

TABLE	TITLE
1	Conducted Emissions Test Results

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested: Residential Electronic Deadbolt

Model: 9800, HVIN: HAL3

S/N: Unit 1

Product Description: The EUT is a residential electronic deadbolt.

The clock oscillators are 32.768 kHz and 32 MHz Dimensions: 3 cm (L) x 2 cm (W) x 5.5 cm (H).

Modifications: The EUT was not modified to meet the specifications.

Customer: Spectrum Brands, Inc.

19701 DaVinci

Lake Forest, California 92610

Test Dates: June 10, 11, 12, 13, 14, 26, 27, and 28, 2024

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements

CFR Title 47, Part 15, Subpart B;

CFR Title 47, Part 15, Subpart C, sections 15.205, 15.207, 15.209, and 15.247;

RSS-247 and RSS-Gen



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS		
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery power only.		
2	Spurious Radiated RF Emissions, 30 MHz – 25000 MHz	The EUT complies with the Class B limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15, Subpart C, section 15.209; RSS-247 and RSS-GEN Highest reading in relation to spec limit 52.58 dBuV/m (AVG) @ 4804 MHz (*U = 4.06 dB)		
3	Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 9 kHz – 25000 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d); RSS-247 and RSS-GEN		
4	Emissions produced by the intentional radiator in restricted bands, 9 kHz – 25000 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, section 15.247 (d); RSS-247 and RSS-GEN		
5	DTS Bandwidth	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (a)(2); RSS-247		
6	Maximum Conducted Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(3); RSS-247		
7	RF Conducted Antenna Test	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (d); RSS-247		
8	Power Spectral Density from the Intentional Radiator to the Antenna	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (e); RSS-247		
9	Variation of the Input Power	This test was not performed because the EUT operates on battery power only.		
10	99% Bandwidth	This test was performed to obtain the emission designator required by Innovation, Science and Economic Development Canada.		

Residential Electronic Deadbolt

Model: 9800

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Residential Electronic Deadbolt, Model: 9800, HVIN: HAL3. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15, Subpart B, section 15.109; and Subpart C, sections 15.205, 15.207, 15.209 and 15.247; and the specifications limits defined by RSS-247 and RSS-Gen.

1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a preproduction representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

ELECTRONICS

2. ADMINISTRATIVE DATA

2.1 **Location of Testing**

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 **Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 **Cognizant Personnel**

Spectrum Brands, Inc.

Associate Principal Engineer Thuan Nguyen

Compatible Electronics Inc.

Kyle Fujimoto Sr. Test Engineer James Ross Sr. Test Engineer

2.4 **Date Test Sample was Received**

The test sample was received on prior to the initial test date.

2.5 **Disposition of the Test Sample**

The test sample has not been returned to Spectrum Brands, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

Electromagnetic Interference **EMI** Equipment Under Test **EUT**

Part Number P/N S/N Serial Number

FCC Federal Communications Commission

Declaration of Conformity DoC

Not Applicable N/A Tx **Transmit** Receive Rx Incorporated Inc. RF Radio Frequency **BLE** Bluetooth Low Energy **CFR** Code of Federal Regulations

Senior Sr.

DC Direct Current

Radio Standards Specification RSS

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
558074 D01 DTS Meas Guidance v05 r02	Guidance for Performing Compliance Measurements on Digital Transmissions Systems (DTS) Operating Under Section 15.247
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation
ANSI C63.4 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
RSS-Gen Issue 5: 2018 + Amendment 1: 2019 + Amendment 2: 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmissions Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE- LAN) Devices

Residential Electronic Deadbolt

Model: 9800

4. DESCRIPTION OF TEST CONFIGURATION

The Residential Electronic Deadbolt, Model: 9800, HVIN: HAL3 (EUT) was mounted on a representative enclosure. The EUT was continuously transmitting BLE, 802.11b, 802.11g, or 802.11n (20 MHz) on a continuous basis for the Redpine chip and BLE or Thread for the Nordic chip.

The BLE of the Redpine chip and the BLE of the Nordic chip can transmit at the same time, but never on the same frequency.

The BLE of the Redpine chip and the Thread of the Nordic chip can transmit at the same time, but the channels cannot overlap.

The WiFi on the RedPine chip cannot transmit at the same time as the Nordic chip. In this mode, only the WiFi from the RedPine chip will be transmitting.

The EUT also displayed the temperature when in normal operation.

The final radiated data was taken in the modes described above. All initial investigations were performed with the EMI Receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix D.

The firmware was stored on the company's servers.



The EUT had no external cables.





5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	ID
RESIDENTIAL ELECTRONIC DEADBOLT	SPECTRUM BRANDS, INC.	9800	UNIT 1	FCC ID: NUL-HAL3S IC: NUL-HAL3S
LAPTOP*	VOSTRO	3490	DQNH703	DoC
BLE FIRMWARE	SILICON LABS	RS1162	Version 2.2.6	N/A
WIFI FIRMWARE	SILICON LABS	RS116W	Version 1.2	N/A
BLE FIRMWARE FOR NORDIC	NORDIC	H3-FCC	V.2.0	N/A
THREAD FIRMWARE FOR NORDIC	NORDIC	H3-FCC	V5.20	N/A

^{*}The laptop was used to program the EUT only and was removed from the test setup after the EUT was programmed.

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 3 Hz – 44 GHz	Keysight Technologies, Inc.	N9038A	MY59050117	July 14, 2023	July 14, 2024
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	February 10, 2025
CombiLog Antenna	Com-Power	AC-220	10030004	November 22, 2023	November 22, 2025
Horn Antenna	Com-Power	AH-118	10050192	November 30, 2023	November 30, 2025
Preamplifier	Com-Power	PA-118	181653	March 7, 2022	March 7, 2025
Horn Antenna	Com-Power	AH826	0071957	NCR NCR	
High Pass Filter	Microwave Circuits	H3G020G4	495523	December 6, 2023 December 6, 202	
Preamplifier	Com-Power	PA-840	711013	April 8, 2022 April 8, 202	
Below 1 GHz Radiated Cable	N/A	N/A	Asset #: 0006	October 27, 2023	October 27, 2025
Power Sensor	ETS-Lindgren	7002-006	00151018	June 2, 2022	June 2, 2025
Above 1 GHz Cable	Suhner	Sucoflex 102EA	2291	August 22, 2023	August 22, 2025
Above 1 GHz Cable	Suhner	Sucoflex 102EA	501393	August 22, 2023 August 22, 202	
Above 1 GHz Cable	Suhner	Sucoflex 102EA	501394	August 22, 2023 August 22, 202	
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A

RSS-247 and RSS-GEN Test Report Residential Electronic Deadbolt Model: 9800

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Measurement Uncertainty

Compatible Electronics' U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_{\mathsf{c}}(y) = \sqrt{\sum_{i} c_{i}^{2} u^{2}(x_{i})}$$

Measureme	$ m U_{cispr}$	$U_{\text{lab}} = 2 \ uc \ (y)$	
Conducted disturbance (mains port)	(150 kHz - 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB

RSS-247 and RSS-GEN Test Report Residential Electronic Deadbolt Model: 9800

7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Description and Frequencies

BLE Mode: The EUT operates on 40 channels. The low channel is 2402 MHz and the high channel is 2480 MHz.

802.11b Mode: The EUT operates on 11 channels. The low channel is 2412 MHz and the high channel is 2462 MHz.

802.11g Mode: The EUT operates on 11 channels. The low channel is 2412 MHz and the high channel is 2462 MHz.

802.11n Mode (20 MHz): The EUT operates on 11 channels. The low channel is 2412 MHz and the high channel is 2462 MHz.

Thread: The EUT operates on 15 channels. The low channel is 2405 MHz and the high channel is 2475 MHz.

7.2 Antenna Gain

The EUT utilizes a chip antenna with 2.62 dBi gain.

8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

Test Results:

This test was not performed because the EUT operates on battery power only.

8.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The frequencies above 1 GHz were averaged using the RMS detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

RSS-247 and RSS-GEN Test Report Residential Electronic Deadbolt Model: 9800

Radiated Emissions Test (Continued)

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	FREQUENCY RANGE EFFECTIVE MEASUREMENT BANDWIDTH	
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 25 GHz	1 MHz	Horn Antenna

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.247; and the limits of RSS-247 and RSS-Gen for radiated emissions.



Residential Electronic Deadbolt

Model: 9800

8.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS

Residential Electronic Deadbolt, Model: 9800, HVIN: HAL3

Frequency MHz	Corrected Reading* dBµV/m	Specification Limit dBμV/m	Delta (Cor. Reading – Spec. Limit) dB
4810.00 (Nordic) (Thread) (V)	52.58 (AV)	53.97	-1.39
4804.00 (Nordic) (BLE) (V)	52.44 (AV)	53.97	-1.53
4804.00 (Nordic) (BLE) (H)	52.26 (AV)	53.97	-1.71
4810.00 (Nordic) (Thread) (H)	51.41 (AV)	53.97	-2.56
4960.00 (Nordic) (BLE) (V)	49.28 (AV)	53.97	-4.69
7440.00 (RedPine) (BLE) (H)	47.92 (AV)	53.97	-6.05

Notes:

- * The complete emissions data is given in Appendix E of this report.
- (V) Vertical
- (H) Horizontal
- (AV) Average
- (QP) Quasi-Peak

Report Number: B40630D1

8.1.4 Sample Calculations

A correction factor for the antenna, cable, and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit (μ V/m) log x 20 = Specification Limit in dBuV/m To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) log x 40 = distance factor For measurements above 30 MHz: (Specification distance / test distance) log x 20 = distance factor Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor

A= amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H[dB(S/m)]$

where: H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

 L_C is the cable loss,

 G_{PA} is the gain of the preamplifier (if used), and

 AF^{H} is the magnetic antenna factor.

The G_{PA} term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

Model: 9800

Sample Calculations (Continued)

If the "electrical" antenna factor is used instead, the above equation becomes:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E[dB(m^{-1})] - 51.5 [dB\Omega]$ where: AF^E is the "electric" antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$\begin{split} E[dB(\mu V/m)] &= V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E \left[dB(m^{-1})\right] \\ \text{or, if the magnetic antenna factor is used:} \end{split}$$

 $E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H \left[dB(S/m)\right] + 51.5[dB\Omega]$ The display of the receiver (or spectrum analyzer) **shall not** be configured in units of current, e.g. μA or $dB(\mu A)$. That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is $50~\Omega$, while the magnetic field calculation is based on the free-space impedance of $377~\Omega$.

8.2 DTS Bandwidth

The DTS Bandwidth was measured using the EMI Receiver. The bandwidth was measured using a direct connection from the EUT. The following steps were performed for measuring the DTS Bandwidth.

- 1. Set RBW = 100 kHz
- 2. Set the video bandwidth (VBW) to equal or greater than 3 times the RBW
- 3. Detector = Peak
- 4. Trace Mode = Max Hold
- 5. Sweep = Auto Couple
- 6. Allow the trace to stabilize
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (a)(2); and RSS-247.

8.3 Maximum Peak Conducted Output Power – BLE Mode

The maximum peak conducted output power was measured using the EMI Receiver. The following steps were performed for measuring the maximum peak conducted output power.

- 1. Set the RBW ≥ DTS Bandwidth
- 2. Set the VBW \geq [3 X RBW]
- 3. Set span \geq [3 X RBW]
- 4. Sweep time = auto couple
- 5. Detector = peak
- 6. Trace mode = max hold
- 7. Allow trace to fully stabilize
- 8. Use the peak marker function to determine the peak amplitude level

Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C Section 15.247 (b)(3); and RSS-247.

Report Number: **B40630D1**

8.4 Maximum Peak Conducted Output Power – WiFi Mode

The maximum peak conducted output power was measured using the power meter. The output power was measured using the procedure described in section 11.9.1.3 of ANSI C63.10

Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C Section 15.247 (b)(3); and RSS-247.

8.5 Emissions in Non-Restricted Bands

The emissions in the non-restricted frequency bands measurements were performed using the EMI receiver directly connected to the EUT. The reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to ≥ 1.5 times the DTS bandwidth. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with sweep set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20 dB below that was the reference level. For emission level measurement, the center frequency and span were set to encompass the frequency range to be measured. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than the span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d); and RSS-247.

FCC Part 15 Subpart B and C; FCC Section 15.247; and RSS-247 and RSS-GEN Test Report

Residential Electronic Deadbolt

TRONICS

Model: 9800

8.6 RF Band Edges

The RF band edges were taken at 2390 MHz when the EUT was on the low channel and 2483.5 MHz when the EUT was on the high channel using the EMI Receiver. A preamplifier was used to boost the signal level, with the plots being taken at a 3-meter test distance. The radiated emissions test procedure as described in section 8.1.2 of this test report was used to maximize the emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d). The RF power at the restricted bands closest to the band edges at 2390 MHz and 2483.5 MHz also meet the limits of section 15.209; and RSS-247. Please see the data sheets located in Appendix E.

Residential Electronic Deadbolt

Model: 9800

8.7 Spectral Density Test

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

- 1. Set analyzer center frequency to DTS channel center frequency
- 2. Set the span to 1.5 times the OBW.
- 3. Set the RBW to 3 kHz \leq RBW \leq 100 kHz
- 4. Set the VBW \geq [3 X RBW]
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW
- 10. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (e); and RSS-247.

8.8 99 % Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

- 1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
- 4. Set the peak detector to max hold.
- 5. Set the sweep time to auto
- 6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

FCC Part 15 Subpart B and C; FCC Section 15.247; and RSS-247 and RSS-GEN Test Report

Residential Electronic Deadbolt

TRONICS

Model: 9800

8.9 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

Test Results:

This test was not performed because the EUT operates on battery power only.

9. CONCLUSIONS

The Residential Electronic Deadbolt, Model: 9800, HVIN: HAL3, as tested, meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-GEN and RSS-247.



APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit http://celectronics.com/quality/scope/

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

ISED Test Site Registration Number: 2154A

APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.247; RSS-GEN and RSS-247 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



APPENDIX C

MODELS COVERED
UNDER THIS REPORT

MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Residential Electronic Deadbolt Model: 9800, HVIN: HAL3 S/N: Unit 1

There are no additional models covered under this report.



Report Number: B40630D1

APPENDIX D

DIAGRAMS AND CHARTS

FIGURE 1: CONDUCTED EMISSIONS TEST SETUP


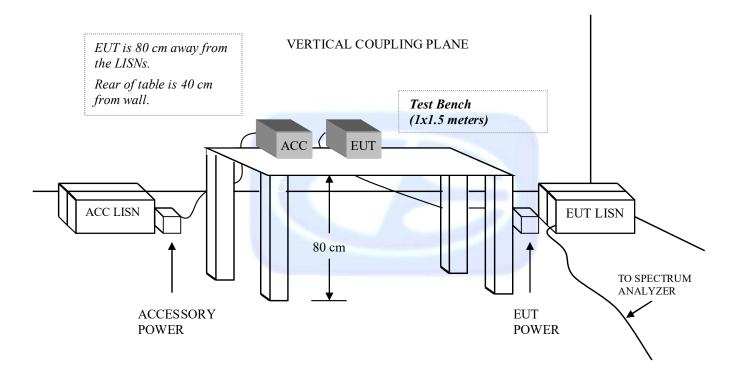


FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER



Model: 9800

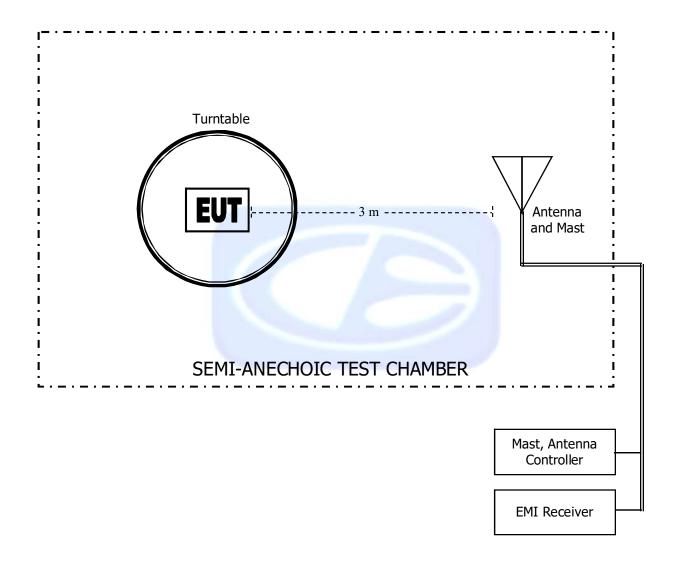

COM-POWER AL-130R

LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 10, 2022

	CALIBRATION DATE: FEBRUARY 10, 2022				
FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)			
0.009	15.6	-35.8			
0.01	15.8	-35.6			
0.02	14.8	-36.6			
0.03	15.6	-35.9			
0.04	15.0	-36.5			
0.05	14.4	-37.1			
0.06	14.6	-36.9			
0.07	14.3	-37.2			
0.08	14.3	-37.2			
0.09	14.4	-37.0			
0.10	14.1	-37.4			
0.20	14.1	-37.4			
0.30	14.0	-37.5			
0.40	13.9	-37.6			
0.50	14.1	-37.3			
0.60	14.1	-37.3			
0.70	14.2	-37.3			
0.80	14.2	-37.3			
0.90	14.2	-37.2			
1.00	14.4	-37.2			
2.00	14.6	-36.9			
3.00	14.6	-36.8			
4.00	14.6	-36.6			
5.00	14.9				
6.00	14.9	-36.7 -36.7			
7.00					
7.00 8.00	14.6	-36.8			
9.00	14.5 14.3	-37.0 -37.2			
10.00	14.5	-37.0			
11.00	14.6	-36.9			
12.00	14.7	-36.7			
13.00	14.9	-36.6			
14.00	15.0	-36.5			
15.00	14.9	-36.6			
16.00	14.9	-36.6			
17.00	14.6	-36.8			
18.00	14.4	-37.1			
19.00	14.5	-37.0			
20.00	14.5	-37.0			
21.00	14.2	-37.3			
22.00	13.9	-37.5			
23.00	13.9	-37.5			
24.00	13.8	-37.7			
25.00	13.4	-38.0			
26.00	13.2	-38.2			
27.00	13.2	-38.3			
28.00	12.7	-38.7			
29.00	12.7	-38.8			
30.00	12.4	-39.0			

COM-POWER AC-220

COMBILOG ANTENNA

S/N: 10030004

CALIBRATION DATE: NOVEMBER 22, 2023

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	23.10	200	16.10
35	22.00	250	17.90
40	41.30	300	19.10
45	20.50	350	20.30
50	19.30	400	21.60
60	15.40	450	22.20
70	12.40	500	23.20
80	12.40	550	23.70
90	14.10	600	25.10
100	15.50	650	25.30
120	15.90	700	25.10
125	15.90	750	26.70
140	14.80	800	26.60
150	14.60	850	27.20
160	14.80	900	28.00
175	15.90	950	29.10
180	15.50	1000	28.90

COM POWER AH-118

HORN ANTENNA

S/N: 10050192

CALIBRATION DATE: NOVEMBER 30, 2023

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
1.0	24.01	10.0	38.78
1.5	25.25	10.5	39.29
2.0	27.21	11.0	39.30
2.5	27.42	11.5	39.87
3.0	28.89	12.0	39.77
3.5	30.58	12.5	40.21
4.0	31.78	13.0	40.01
4.5	32.48	13.5	40.06
5.0	33.13	14.0	40.63
5.5	34.27	14.5	41.41
6.0	34.92	15.0	41.53
6.5	35.58	15.5	40.59
7.0	36.83	16.0	41.63
7.5	37.02	16.5	40.93
8.0	36.93	17.0	41.27
8.5	37.67	17.5	41.69
9.0	37.53	18.0	44.00
9.5	38.76		

COM-POWER PAM-118

PREAMPLIFIER

S/N: 181653

CALIBRATION DATE: MARCH 7, 2022

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		



COM-POWER AH-826

HORN ANTENNA

S/N: 71957

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
18.0	33.5	22.5	35.5
18.5	33.5	23.0	35.9
19.0	34.0	23.5	35.7
19.5	34.0	24.0	35.6
20.0	34.3	24.5	36.0
20.5	34.9	25.0	36.2
21.0	34.7	25.5	36.1
21.5	35.0	26.0	36.2
22.0	35.0	26.5	35.7

COM-POWER PA-840

MICROWAVE PREAMPLIFIER

S/N: 711013

CALIBRATION DATE: APRIL 8, 2022

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
18.0	24.85	31.0	25.37
19.0	24.25	31.5	25.44
20.0	22.69	32.0	24.96
21.0	22.17	32.5	26.17
22.0	22.78	33.0	25.83
23.0	23.23	33.5	25.19
24.0	23.72	34.0	26.31
25.0	24.13	34.5	24.70
26.0	24.28	35.0	25.31
26.5	25.06	35.5	24.39
27.0	26.22	36.0	25.09
27.5	24.85	36.5	25.24
28.0	25.30	37.0	27.10
28.5	25.01	37.5	27.45
29.0	25.54	38.0	23.72
29.5	26.23	38.5	23.01
30.0	26.00	39.0	21.29
30.5	25.39	39.5	21.11
		40.0	19.17

Report Number: **B40630D1**


FCC Part 15 Subpart B and C; FCC Section 15.247; and RSS-247 and RSS-GEN Test Report

COMPATIBLE

Residential Electronic Deadbolt

ELECTRONICS

Model: 9800

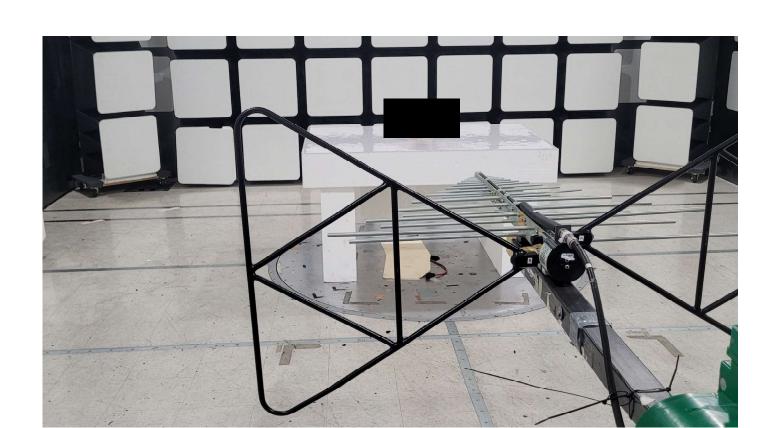


FRONT VIEW

SPECTRUM BRANDS, INC.
RESIDENTIAL ELECTRONIC DEADBOLT
MODEL: 9800, HVIN: HAL3

FCC SUBPART B AND C; RSS-247 AND RSS-GEN - RADIATED EMISSIONS - BELOW 1 GHz

Report Number: B40630D1

FCC Part 15 Subpart B and C; FCC Section 15.247; and RSS-247 and RSS-GEN Test Report COMPATIBLE ELECTRONICS Residential Electronic Deadbolt Model: 9800

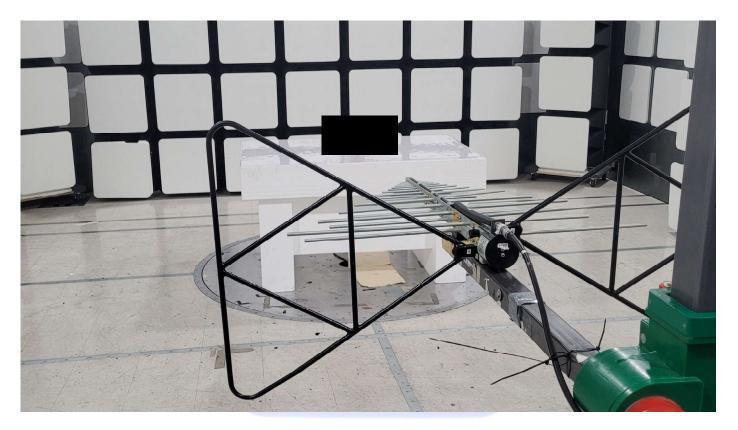


REAR VIEW

SPECTRUM BRANDS, INC. RESIDENTIAL ELECTRONIC DEADBOLT MODEL: 9800, HVIN: HAL3

FCC SUBPART B AND C; RSS-247 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz




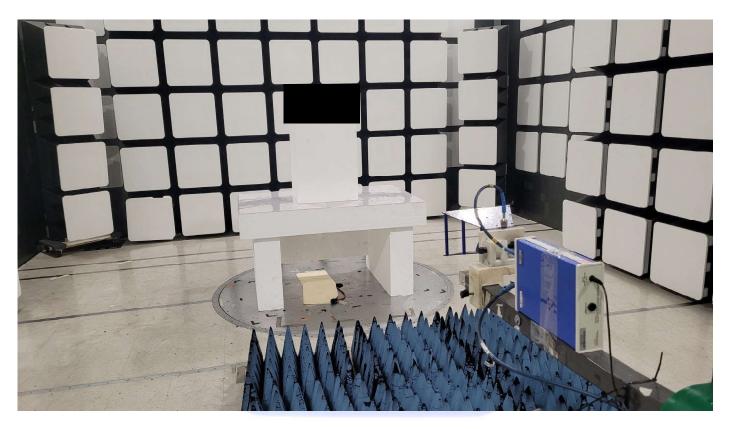

FRONT VIEW

SPECTRUM BRANDS, INC.
RESIDENTIAL ELECTRONIC DEADBOLT
MODEL: 9800, HVIN: HAL3

FCC SUBPART B AND C; RSS-247 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

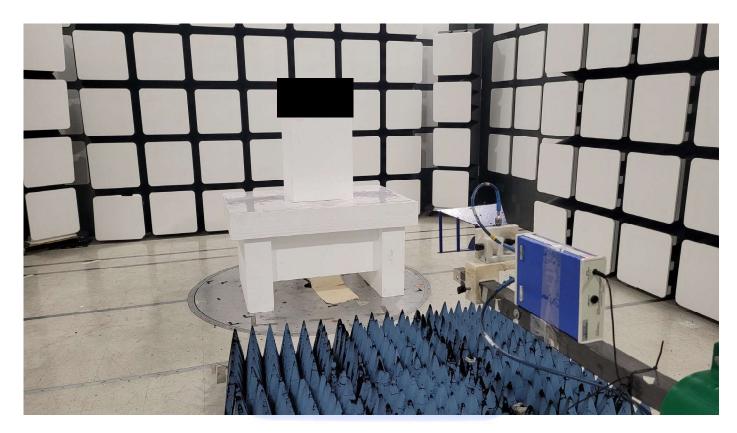


REAR VIEW

SPECTRUM BRANDS, INC. RESIDENTIAL ELECTRONIC DEADBOLT MODEL: 9800, HVIN: HAL3

FCC SUBPART B AND C; RSS-247 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz



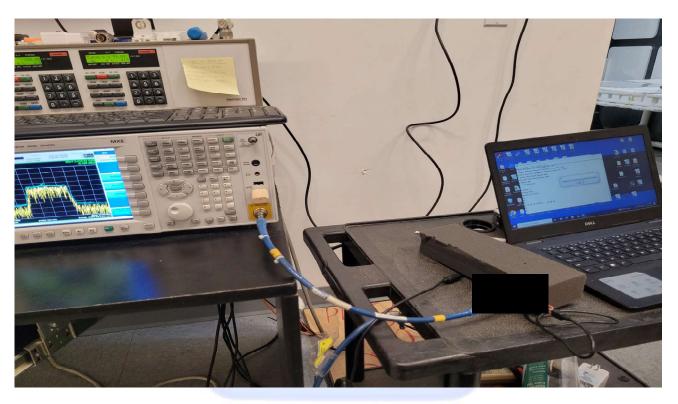

REAR VIEW

SPECTRUM BRANDS, INC.
RESIDENTIAL ELECTRONIC DEADBOLT
MODEL: 9800, HVIN: HAL3
FCC SUBPART B AND C; AND RSS-GEN – DIRECT MEASUREMENTS