







SMARTCODE 912


Installation and User Guide







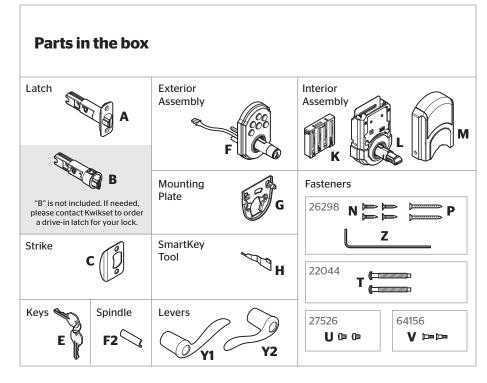


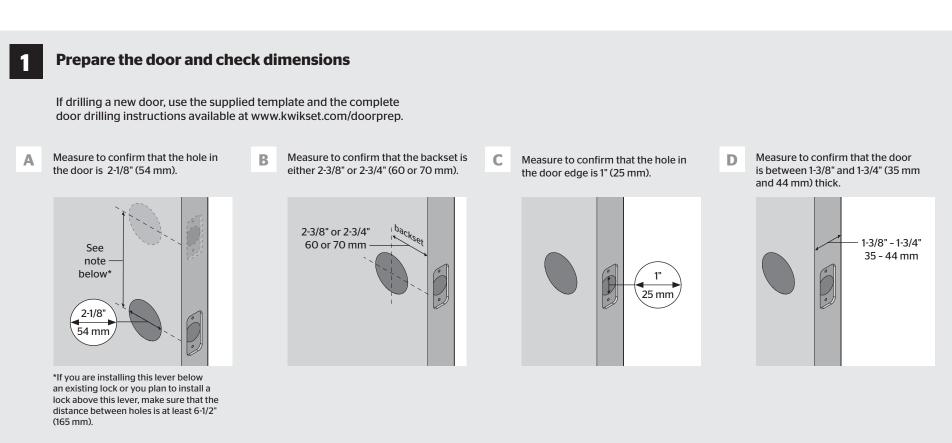


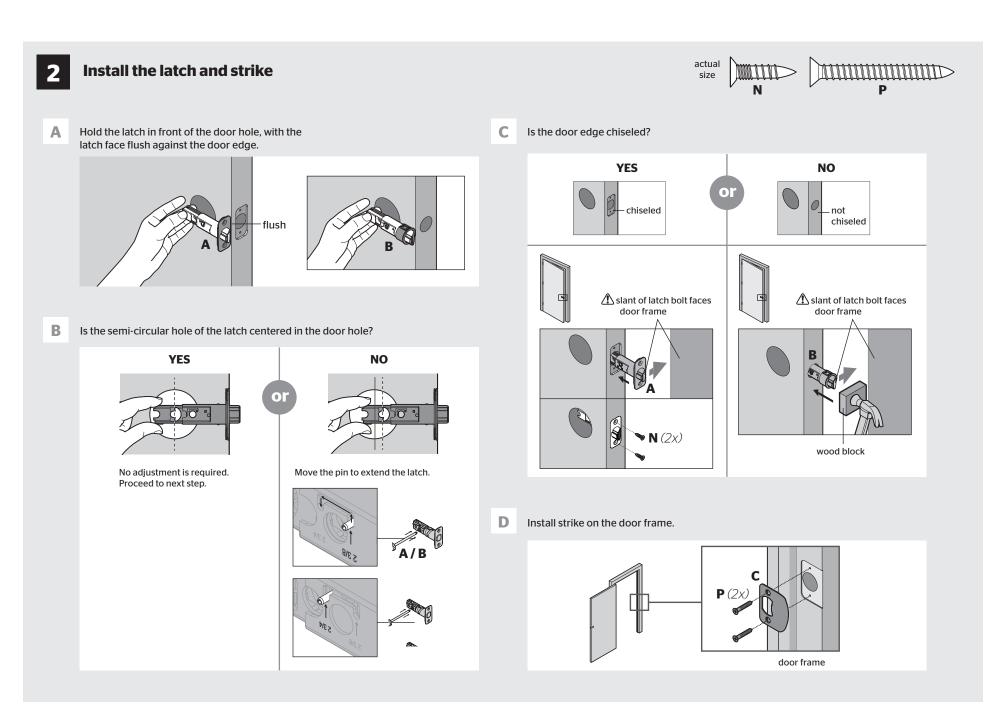

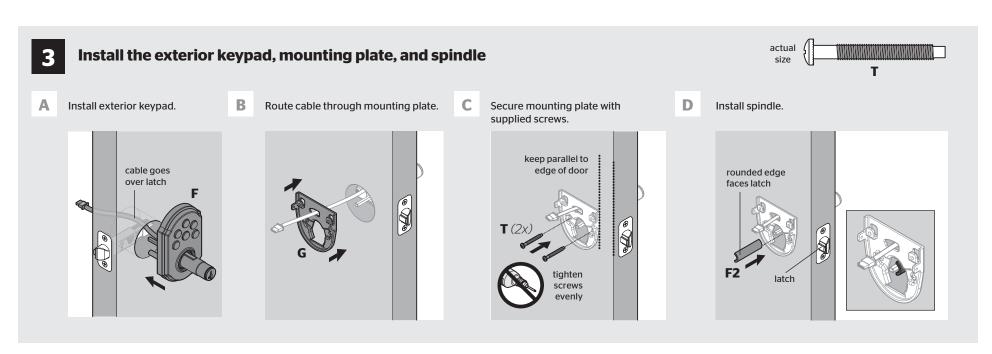

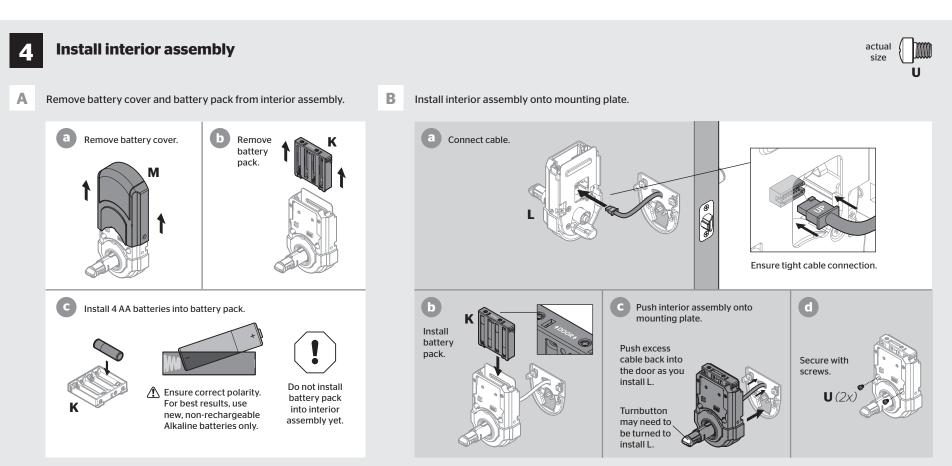

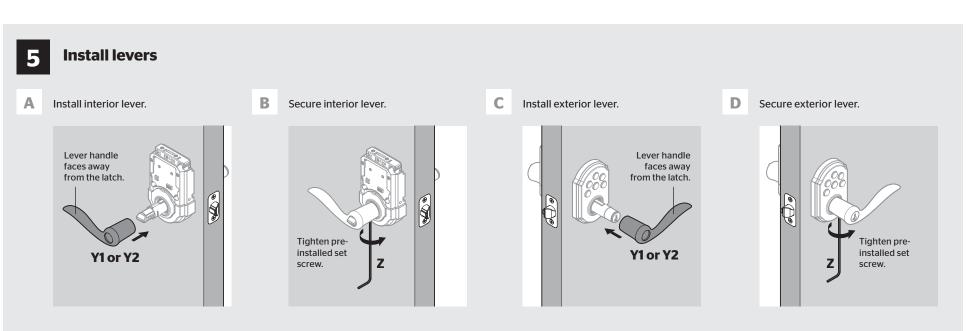

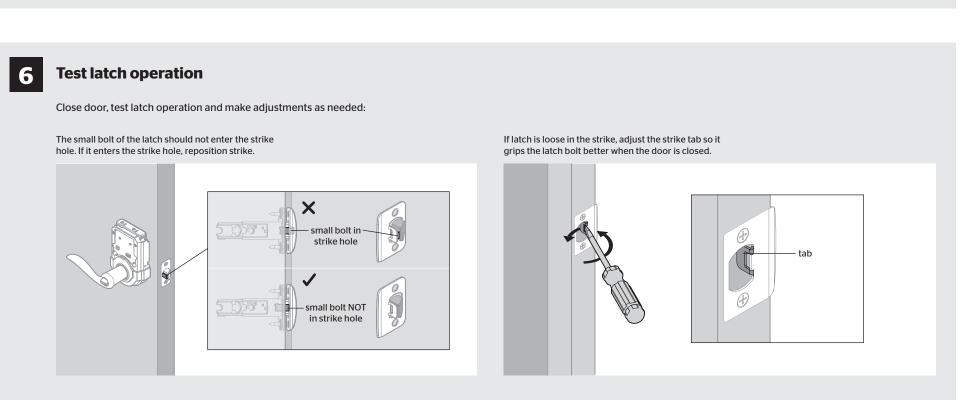


7

Pair the lock with your smart home system

If your controller is S2-compatible, please refer to the S2 Pairing Guide on the SmartCode 912 page at www.kwikset.com.

Α

Initiate the pairing process at your smart home controller. Refer to your smart home system instructions for more information. B When prompted by your smart home system to initiate pairing at the lock, press button "A" on the lock interior one time. The red LED will illuminate when pairing mode has been entered.



Please allow time for the controller to pair with the lock.

If the pairing process is successful, re-name the lock in your system (if applicable).

If pairing is unsuccessful, follow your system's instructions to remove the lock from the controller and any other network, then press button "A" on the lock one time.

Perform steps 7A-7C again.

If pairing is still unsuccessful, consult the Programming and Troubleshooting Guide on the SmartCode 912 page at www.kwikset.com.




Add user codes (30 max)

It is recommended that you add and delete all user codes through your smart home control system. If your system does not allow this, codes may be added directly to the lock as shown here.


Programming Timeout

If no button is pressed for 5 seconds, the system will time out and you will need to restart the procedure.

Make sure the door is open. Press the Program button the number of times that corresponds to the user code position being programmed.



B Enter user code. A total of 30 user codes may be programmed.



C Press Lock button once.



What lights and sounds does the lock produce?



Three red flashes with three beeps*



Make sure the user code is not a duplicate and that it is between 4 and 8 digits during your next attempt.



Programming time out.

Make sure not to pause for more than 5 seconds during programming.

 $^*Beeping \ sound \ will \ only \ be \ heard \ if \ switch \ \#3 \ (on \ the \ lock \ interior) \ is \ in \ the \ on \ positon. See \ ``Switches \ and \ Status \ LED \ Colors'' \ on \ page \ 4.$

Mastercode


For enhanced security, a mastercode may be used when adding and deleting user codes. For more information about the mastercode, download the Programming and Troubleshooting Guide on the SmartCode 912 page at www.kwikset.com.



Test the lock (review normal operation)

Confirm that the code(s) added in previous step can unlock the door.

Locking the Door




Unlocking the Door

Tip: You can press the Lock button before entering your user code to light up the keypad at night.

10

Re-key the lock (if needed) and install the battery cover






Re-ke


Re-key the lock to work with your existing key. See the supplied SmartKey Re-key instructions for more information.




Reinstall battery pack.

Install the battery cover.





SmartCode at a Glance

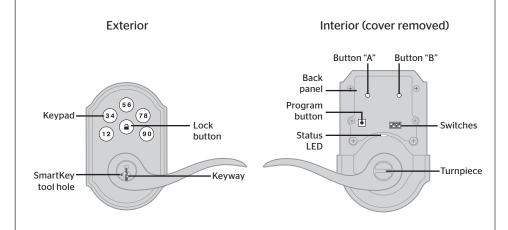


System Alerts

Alert	Reason	Solution
Keypad flashes red 1 time with 1 beep*	Door jammed while attempting to lock.	Manually re-lock door. If needed, reposition strike.
Keypad flashes red 3 times with 3 beeps*	Unsuccessful programming.	Attempt programming procedure again.
	One incorrect code entered.	Re-enter code.
	No user code programmed.	Program at least one user code.
Keypad flashes red 10 times with 10 beeps*	Low battery.	Replace batteries.
Lock beeps 2 times.		Attempt programming procedure again, making sure not to pause for more than 5 seconds.
Keypad flashes red 3 times.	Programming timeout.	
Keypad flashes red 6 times with 6 beeps*.		
Keypad flashes red 15 times with 15 beeps*	Three incorrect codes entered within one minute.	Re-enter code after 60 second keypad lockout.

^{*}Beeping sound will only be heard if switch #3 is on.

Switches and Status LED colors



Switch	Function	
1	Door lock status LED blinks every 6 seconds	
2	Lock automatically re-locks door 30 seconds after unlocking. Disabled if no codes are programmed.	
3	Audio	
4	Not used.	



Color	Lock Status
Green	Unlocked
Amber	Locked
Red	Low battery

Deleting a user code

In order to delete a user code, you must override the code by adding a different user code in the same position. For example, if you want to delete the third code, add a different user code in position three.

Test the old user code to make sure it can no longer unlock the door.


If you cannot remember the user code position, you may wish to perform a factory reset to delete all codes associated with the lock.

Troubleshooting

A complete Programming and Troubleshooting Guide is available on the SmartCode 912 page at www.kwikset.com.


Battery Replacement

If another lock is installed above the lever, remove the interior assembly when battery replacement is required.

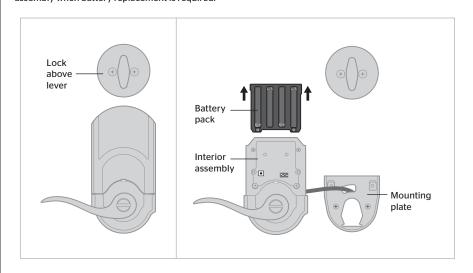

Factory Reset


A factory reset will delete all codes associated with the lock, and it will remove it from your smart home system.

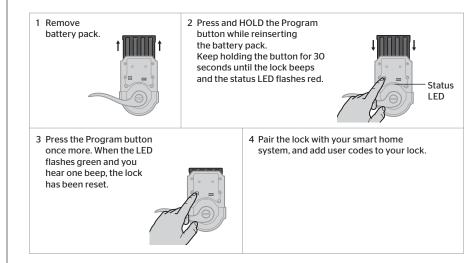

Network Information

Removing the lock from the network

Follow your smart home system's instructions to remove the lock from the network. When prompted by the system, press button A" on the lock interior once.



Z-Wave System Notes

This product is a security enabled Z-wave Plus product and must be used with a Security Enabled Z-Wave controller to be fully utilized. Z-Wave is a "Wireless mesh network," and results may vary based on building construction and communication path, with 35 feether being typical installed distance from smart home controller. It may be necessary to install additional Z-Wave beaming capable devices that can serve as repeaters to enhance the communication path between the lock and controller for a more robust Z-Wave network.

To assure interoperability, each Z-Wave product must pass a stringent conformance test to assure that it meets the Z-Wave standard for complete compliance with all other devices and controls. The Z-Wave identity mark assures consumers, integrators, dealers and manufacturers that their products will reliably perform with any other Z-Wave device. And, regardless of the vendor, always powered nodes may act as a repeater for Kwikset/Weiser/Baldwin products.

 $Z-Wave\ Configuration\ and\ Association\ Parameters\ are\ available\ on\ the\ SmartCode\ 912\ page\ at\ www.kwikset.com.$

Important Safeguards

- 1. Read all instructions in their entirety.
- $2. \quad \text{Familiarize yourself with all warning and caution statements}.$
- Remind all family members of safety precautions.
- 4. Protect your user codes and mastercode.
- 5. Dispose of used batteries according to local laws and regulations.
- CAUTION: Prevent unauthorized entry. Since anyone with access to the back panel can change the user codes, you must restrict access to the back panel and routinely check the user codes to ensure they have not been altered without your knowledge. The use of a mastercode can help protect your system's settings.
- WARNING: This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.