

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 491-16R1**

In Accordance with the Requirements of

**FCC PART 27:2015 Subpart C
FCC PART 20:2015
746-757 MHz & 776-787 MHz
IC RSS-130, Issue 1
746-756 MHz & 777-787 MHz**

Issued to

**Westell, Inc.
750 North Commons Drive
Aurora, IL 60504**


for

**DSP85 Series Digital Repeater
DSP85-U7C
Representing Model DSP85-U7C/AW**

**FCC ID: NVRDSP85-U7CAW
IC: 4307A-DSP85U7CAW**


**Original Report Issued on October 31, 2016
R1 Issued December 9, 2016**

Tested by

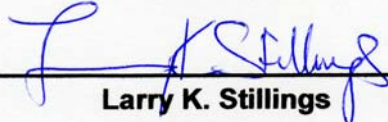

Larry K. Stillings

Reviewed By



Brian F. Breault

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope	3
2. Product Details	3
2.1. Manufacturer	3
2.2. Model Number	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source	3
2.6. Software Version	3
2.7. EMC Modifications	3
3. Product Configuration	4
3.1. Support Equipment	4
3.2. Cables	4
3.3. Operational Characteristics & Software	5
3.4. Block Diagram	5
4. Measurement Parameters	6
4.1. Measurement Equipment Used to Perform Test	6
4.2. Measurement & Equipment Setup	6
4.3. Test Procedure	6
5. Measurement Summary	7
6. Measurement Data	8
6.1. Power and Antenna Height Limits 27.50 (b) (4)	8
6.2. Bandwidth Limitations 2.1049	14
6.3. Spurious Emissions at the Antenna Terminals 27.53 (c)	19
6.4. Field Strength of Spurious Emissions 27.53 (c)	32
6.5. Frequency Stability 27.54	38
6.6. Out of Band Rejection	39
6.7. Public Exposure to Radio Frequency Energy Levels 1.1307 (b)(1)	41
7. Test Site Description	42
8. Test Setup Photographs	43
Appendix A	48

1. Scope

This test report certifies that the Westell DSP85-U7CAW, as tested, meets the FCC Part 27 Subpart C and IC RSS-130, Issue 1 requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required. R1 issued to update FCC and IC numbers on cover.

2. Product Details

2.1. Manufacturer: Westell Technologies, Inc.

2.2. Model Numbers: DSP85-U7C tested also represents Model DSP85-U7C/AW

2.3. Serial Number: C6ZZ00002

2.4. Description: An in-building digital repeater is utilized to propagate over-the-air radio frequency signals from a local cell tower into buildings via a fiber or coax distributed antenna system (DAS). Once installed, a digital repeater provides the signal power necessary for wireless devices in the building to operate seamlessly.

2.5. Power Source: 120 VAC, 60 Hz via APX Technologies AS4528R

2.6. Software Version: 03.00.09 REL

2.7. EMC Modifications: None

3. Product Configuration

3.1. Support Equipment

Device	Manufacturer	Model	Serial No.	Comment
RF Signal Generator	R & S	SMIQ06B	10090	Generating W-CDMA Signals
IQ Modulation Generator	R & S	AMIQ04	100540	Generating AWS Signals
Power Supply	APX Technologies	AS4528R	101710062	
Notebook PC	Dell	Latitude C400	9760689253	Configuring Unit

3.2. Cables

Cable Type	Length	Shield	From	To
RF, 50 Ω, N male – N male	1M	Yes	DUT	Signal Generator
RF, 50 Ω, N male – N male	1M	Yes	DUT	50 Ω Load
Power Supply	2M + 2M	Yes	DUT	120 VAC, 60 Hz
Serial	2M	Yes	DUT	Notebook PC
USB	2M	Yes	DUT	Notebook PC
Ethernet	2M	No	DUT	Notebook PC

Notebook PC is connected only during setup

3.3. Operational Characteristics & Software


Emission Designator	Modulation	Occupied Bandwidth	Channel Bandwidth
4M18F9W	AWGN	4.1 MHz	5 MHz

3. Product Configuration (continued)

3.3. Operational Characteristics & Software

- (1) The unit was allowed to power up normally and go through its configuration cycle.
- (2) Using an RF Signal Generator on the Input and a Spectrum Analyzer on the output Downlink or Uplink frequencies a signal was generated over the intended bandwidth of operation.
- (3) The signal generator was configured to provide AWS / LTE 4.1 MHz AWGN digital modulation to the input of the amplifier across the Cell bands to be used by the product.
- (4) The units internal AGC threshold was determined by applying an input signal until a 1 dB increase in input signal did not cause a 1 dB in output signal for each of the Uplink and Downlink frequencies.

3.4. Block Diagram

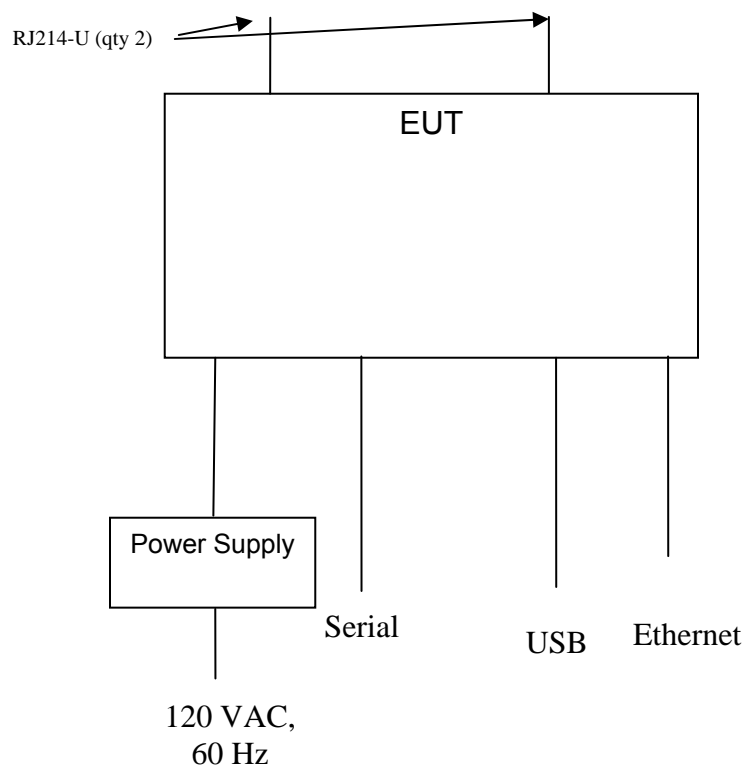

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Test Receiver, 9kHz - 7GHz ¹	Rohde & Schwarz	ESR7	101156	7/23/2017	2 Years
Spectrum Analyzer 20 Hz – 40 GHz ²	Rohde & Schwarz	FSV40	100899	7/23/2017	2 Years
Spectrum Analyzer, 9 kHz to 40 GHz ³	Rohde & Schwarz	FSVR40	100909	7/23/2017	2 Years
EMI Receiver, 9 kHz to 6.5 GHz	Hewlett Packard	8546A	3650A00360	6/4/2017	3 Years
Combilog Antenna, 30 MHz to 2 GHz	Com-Power	AC-220	25509	5/12/2018	2 Years
Horn Antenna 1 to 18 GHz	ETS-Lindgren	3117	00143292	2/22/2019	3 Years
Preamplifier, 1 GHz to 26.5 GHz	Hewlett Packard	8449B	3008A01323	7/21/2017	2 Years
Digital Barometer	Control Company	4195	ID236	10/8/2017	2 Years

¹ ESR7 Firmware revision: V2.28,SP1 Date installed: 9/2/2016 Previous V2.26, installed 8/15/2014.
² FSV40 Firmware revision: V2.30 SP4, Date installed: 5/4/2016 Previous V2.30 SP1, installed 10/22/2014.
³ FSVR40 Firmware revision: V2.23, Date installed: 10/20/2014 Previous V1.63 SP1, installed 8/28/2013.
⁴ FSW26 Firmware revision: V2.50, Date installed: 9/12/2016 Previous V2.40, installed 5/4/2016.

4.2. Measurement & Equipment Setup

Test Dates: 7/27/2016, 7/28/2016,
10/3/2016, 10/4/2016

Test Engineer: Larry Stillings

Normal Site Temperature (15 – 35°C): 24

Relative Humidity (20 -75%RH): 33

4.3. Test Procedure

The test measurements contained in this report are based on the requirements detailed in FCC Part 27, Subpart C and RSS-130, Issue 1.

The test methods used to generate the data in this test report are in accordance with ANSI C63.4:2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, FCC OET KDB 935210 D05 Indus Booster Basic Meas v01 dated 2-12-2016, Measurements Guidance for Industrial and Non-Consumer Signal Booster, Repeater and Amplifier Devices and FCC OET KDB 971168 D01 Power Meas License Digital Systems v02r02 dated 10-17-2014.

Measurements were also made in accordance with TIA-603-C:2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard.

5. Measurement Summary

Section Description or Test Requirement	FCC Part Reference	IC RSS-130 Reference	Test Report Section	Result	Comment
Power and Antenna height limits, Output Power	27.50 (b) (4)	4.4 SRSP-518	6.1	Compliant	
Occupied Bandwidth	Part 2.1049	4.2 RSS-GEN 6.6	6.2	Compliant	
Spurious Emissions at Antenna Terminals	27.53 (c)	4.6	6.3	Compliant	
Spurious Emissions at the Antenna Terminals Additional Requirements	27.53 (f)	4.6	6.3	Compliant	
Field Strength of Spurious Emissions	27.53 (c)	4.6	6.4	Compliant	
Frequency Stability / Tolerance	27.54	4.3	6.5	N/A	The EUT does not translate the frequency of the input signal
Out of Band Rejection	N/A	N/A	6.6	Compliant	FCC KDB 935210
Public Exposure to Radio Frequency Energy Levels	Section 1.1307 (b)(1)	RSS-GEN 3.2 RSS-102	6.7	Compliant	

6. Measurement Data

6.1. Power and Antenna Height Limits 27.50 (b) (4), RSS-130 Section 4.4

Requirements:FCC: Fixed and base stations transmitting a signal in the 746-757 MHz, 758-763 MHz, 776-787 MHz and 788-793 MHz bands with an emissions bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT.

IC: For fixed and base stations transmitting in the C1 and C2 channel blocks within the frequency range 716-756 MHz with a channel bandwidth greater than 1 MHz, the maximum permissible e.i.r.p. is 1640 watts/MHz.

Mobile stations and outdoor fixed subscriber equipment, which transmit in the bands 698-716 MHz and 777-787 MHz, are limited to an e.i.r.p. of 50 Watts.

Test Method: KDB 935210 Section 3.5 & KDB 971168 Section 5.2

6.1.1. Mean Transmitter Output Power, Transmitter Only


Description of Measurement	Center Frequency	Output Power	
	(MHz)	(dBm)	(Watts)
Output Power - AWGN	754	29.12	0.817
Output Power - AWGN	779	29.25	0.841
3 dB Above AGC - AWGN	754	29.09	0.811
3 dB Above AGC - AWGN	779	29.22	0.836
Input Power - AWGN	754	-56.84	N/A
Input Power - AWGN	779	-56.83	N/A

Notes: Input Power is AGC threshold Level, Center Frequencies are determined from Out of Band Rejection f_0 measurement.

6. Measurement Data


6.1. Power and Antenna Height Limits 27.50 (b) (4), RSS-130 Section 4.4 (cont)

6.1.2. Mean Transmitter Output Power, 754 MHz AWGN

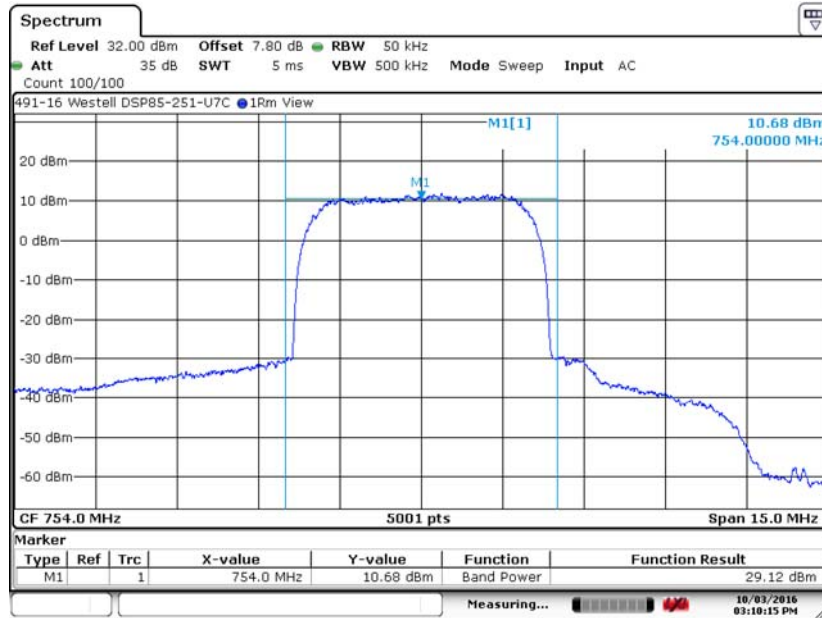

Date: 3.OCT.2016 15:10:13

6.1.3. Mean Transmitter Output Power, 754 MHz – Input Power AWGN

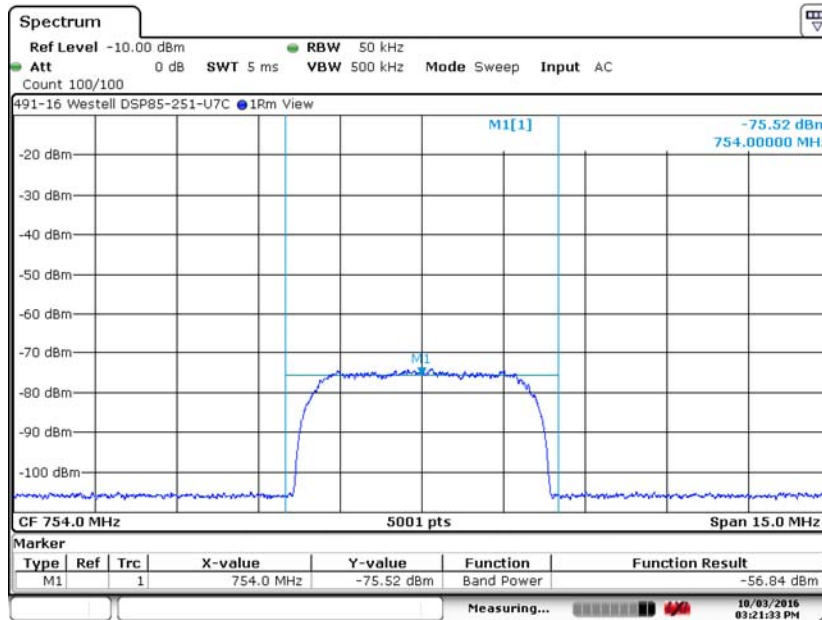


Date: 3.OCT.2016 15:21:32

6. Measurement Data


6.1. Power and Antenna Height Limits 27.50 (b) (4), RSS-130 Section 4.4 (cont)

6.1.4. Mean Transmitter Output Power, 754 MHz AWGN plus 3 dB

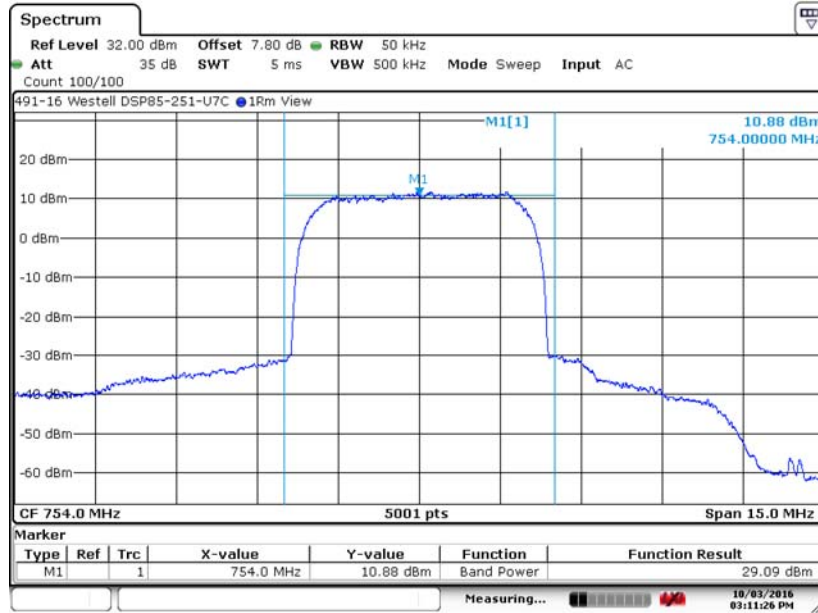

Date: 3.OCT.2016 15:11:25

6.1.5. Mean Transmitter Output Power, 754 MHz – Input Power AWGN plus 3 dB

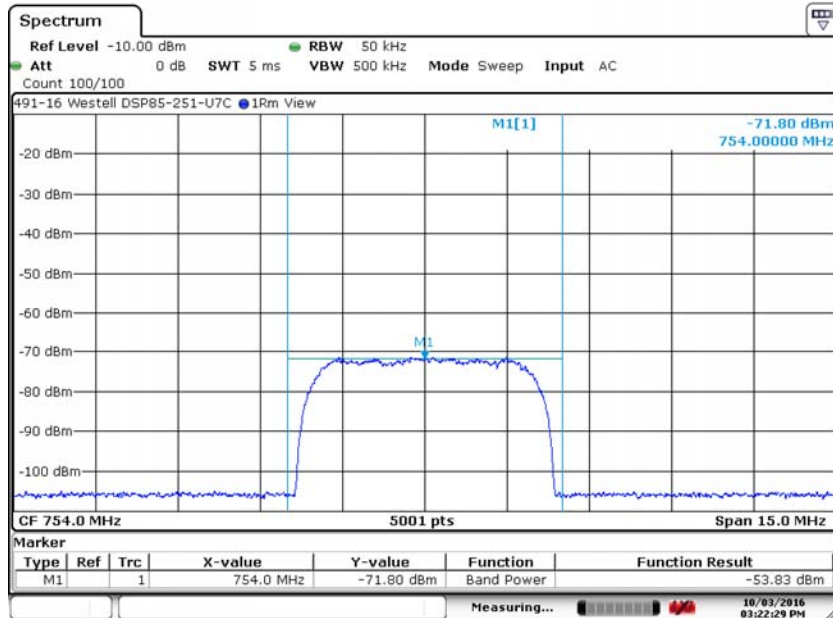


Date: 3.OCT.2016 15:22:28

6. Measurement Data


6.1. Power and Antenna Height Limits 27.50 (b) (4), RSS-130 Section 4.4 (cont)

6.1.6. Mean Transmitter Output Power, 779 MHz AWGN

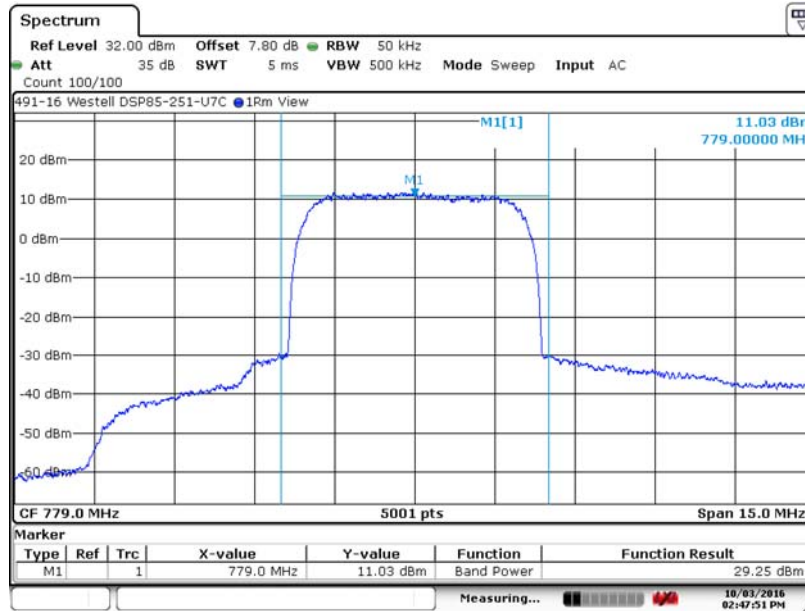

Date: 3.OCT.2016 14:47:50

6.1.7. Mean Transmitter Output Power, 779 MHz – Input Power AWGN

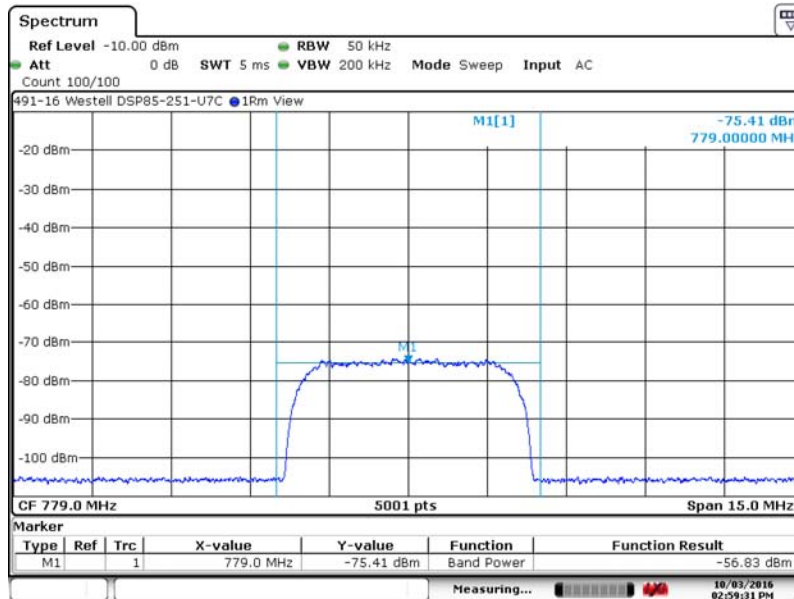


Date: 3.OCT.2016 14:59:30


6. Measurement Data

6.1. Power and Antenna Height Limits 27.50 (b) (4), RSS-130 Section 4.4 (cont)

6.1.8. Mean Transmitter Output Power, 779 MHz AWGN plus 3 dB

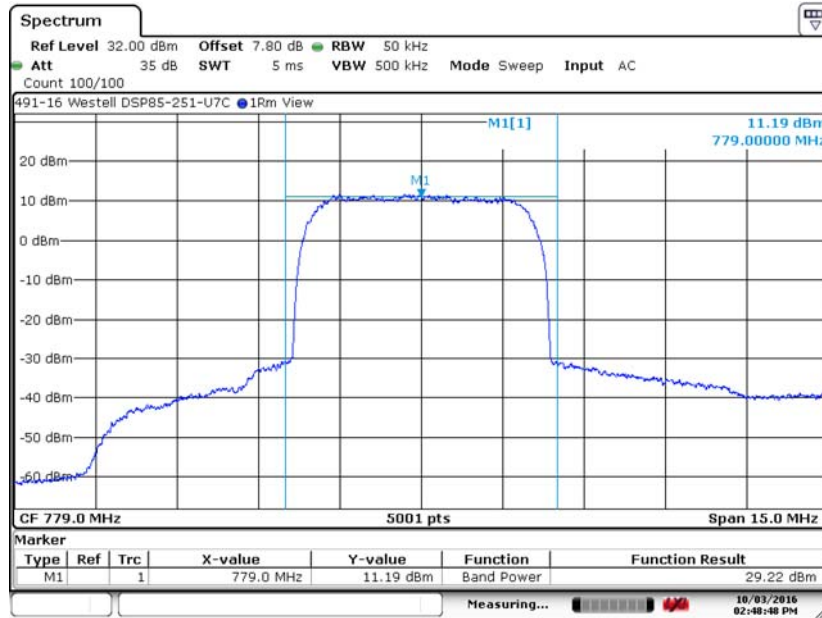

6.1.9. Mean Transmitter Output Power, 779 MHz – Input Power AWGN plus 3 dB

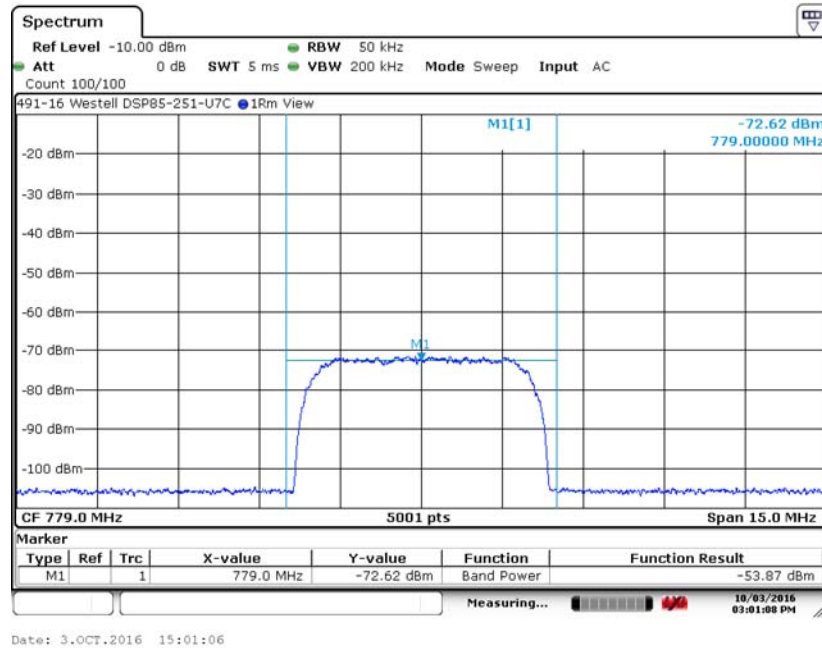

6. Measurement Data

6.1. Power and Antenna Height Limits 27.50 (b) (4), RSS-130 Section 4.4 (continued)

6.1.2. Maximum ERP

ERP is defined in FCC Title 47, Chapter I, Part 2, Subpart A, Section 2.1 as “Effective Radiated Power. The product of the power supplied to the antenna and its gain relative to a half-wave dipole in a given direction.”

$$ERP = \text{Transmitter Power (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

The manufacturer of the device under test recommends one antenna and cable combination for use with their product. The following table provides the worst case effective radiated power based on the measured transmitter output power and the antenna gain:

Description of Measurement	Center Frequency	Transmitter Power ¹	Cable Insertion Loss	Antenna Gain ²	Total Output Power	
	(MHz)	(dBm)	(dB)	(dBi)	(dBm)	(Watts)
Output Power - AWGN	754	29.12	0.00	3.00	32.12	1.63
Output Power - AWGN	779	29.25	0.00	3.00	32.25	1.68
3 dB Above AGC - AWGN	754	29.09	0.00	3.00	32.09	1.62
3 dB Above AGC - AWGN	779	29.22	0.00	3.00	32.22	1.67

¹ Measured. See section 6.1.1.

² Customer supplied 3 dBi for gain. Factor is a combination of both antenna gain and cable loss.

6.1.3. Booster gain – 85 dB Nominal

Description of Measurement	Center Frequency	Output Power	Input Power	Gain
	(MHz)	(dBm)	(dBm)	dB
Output Power - AWGN	754	29.12	-56.84	85.96
Output Power - AWGN	779	29.25	-56.83	86.08

6. Measurement Data (continued)

6.2. Bandwidth Limitations FCC Part 2.1049, RSS-GEN 6.6

Requirement: Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant.

Test Method: KDB 935210 Section 3.4


6.2.1. Occupied (99% Power) Bandwidth

Modulation Type	Center Frequency	Output Occupied Bandwidth	Input Occupied Bandwidth	Difference	Result
	MHz	kHz	kHz	kHz	
AWGN	754	4184.16	4226.16	-41.99	Compliant
AWGN + 3dB	754	4172.17	4202.16	-29.99	Compliant
AWGN	779	4181.16	4223.16	-41.99	Compliant
AWGN + 3dB	779	4178.16	4196.16	-18.00	Compliant

6. Measurement Data (continued)


6.2. Bandwidth Limitations FCC Part 2.1049, RSS-GEN 6.6 (continued)

6.2.1.1. Occupied (99% Power) Bandwidth Measurement, 754 MHz AWGN

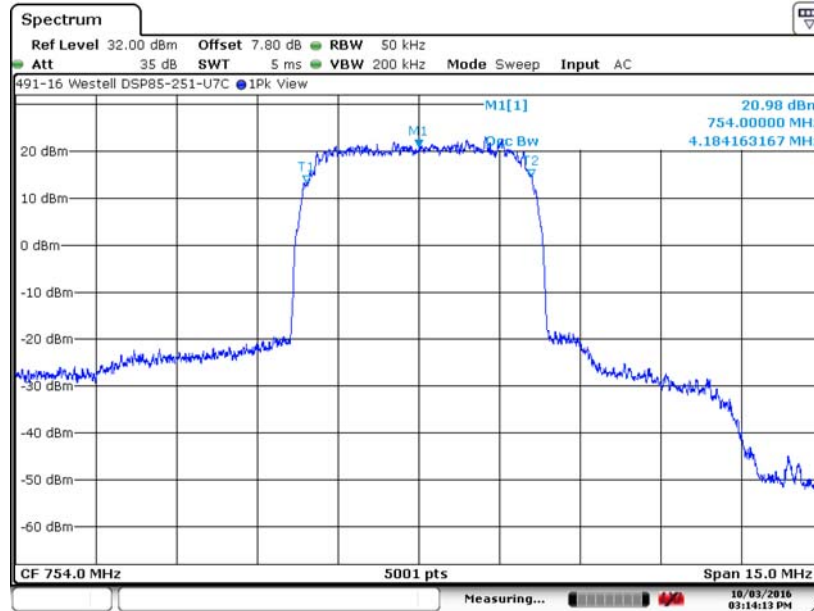

Date: 3.OCT.2016 15:14:12

6.2.1.2. Occupied (99% Power) Bandwidth Input Signal, 754 MHz AWGN

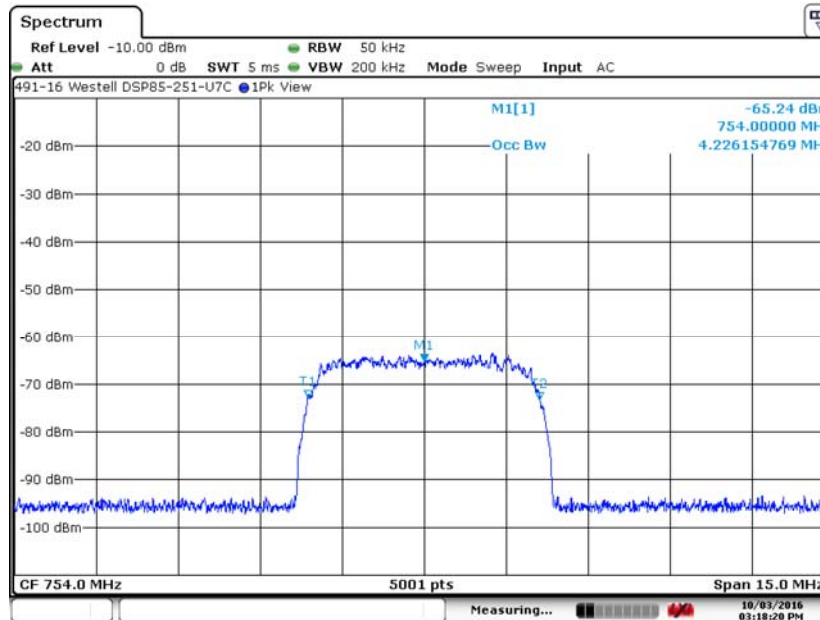


Date: 3.OCT.2016 15:18:19

6. Measurement Data (continued)


6.2. Bandwidth Limitations FCC Part 2.1049, RSS-GEN 6.6 (continued)

6.2.1.3. Occupied (99% Power) Bandwidth Measurement, 754 MHz AWGN +3dB

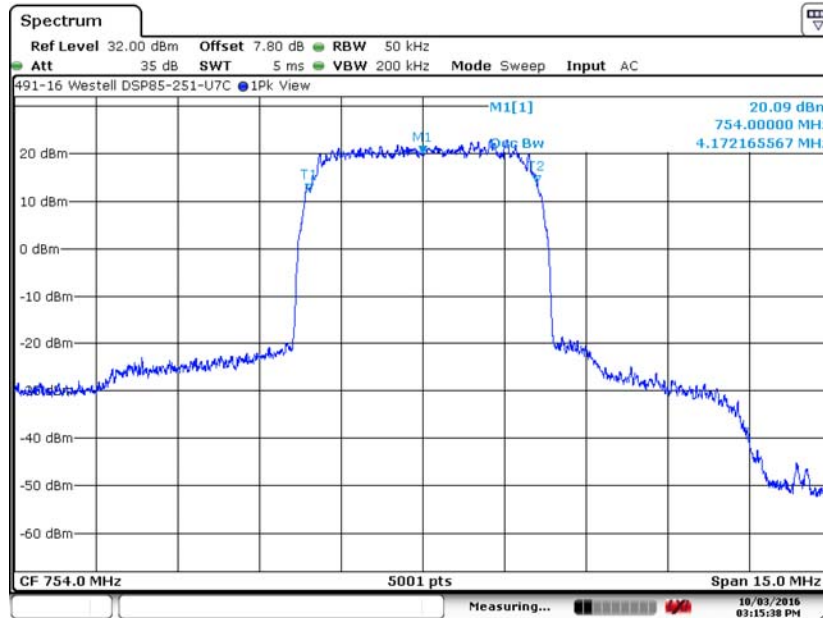

Date: 3.OCT.2016 15:15:37

6.2.1.4. Occupied (99% Power) Bandwidth Input Signal, 754 MHz AWGN + 3dB

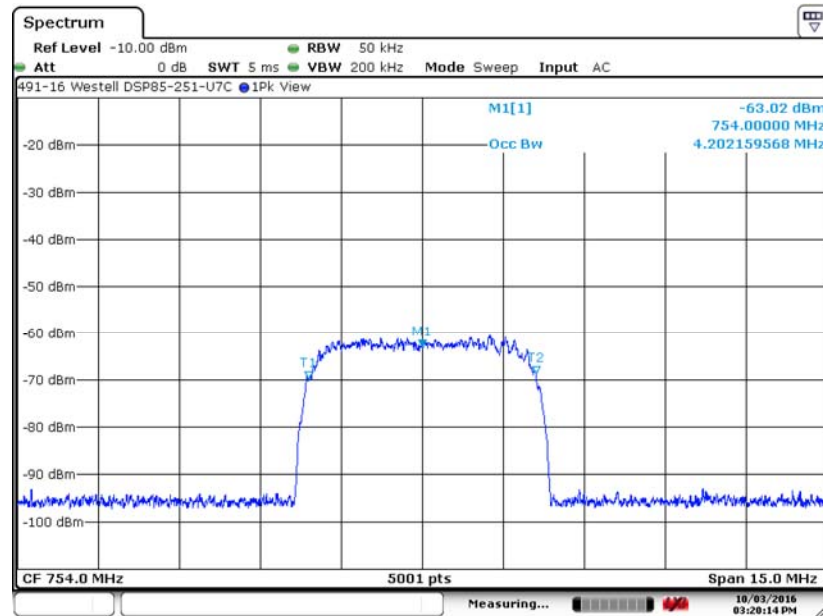


Date: 3.OCT.2016 15:20:13

6. Measurement Data (continued)


6.2. Bandwidth Limitations FCC Part 2.1049, RSS-GEN 6.6 (continued)

6.2.1.5. Occupied (99% Power) Bandwidth Measurement, 779 MHz AWGN

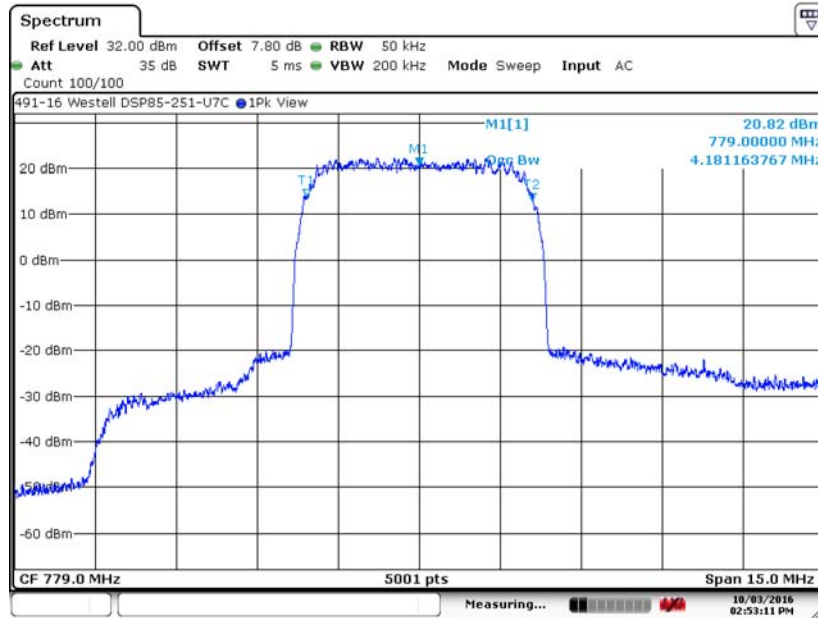

Date: 3.OCT.2016 14:53:09

6.2.1.6. Occupied (99% Power) Bandwidth Input Signal, 779 MHz AWGN

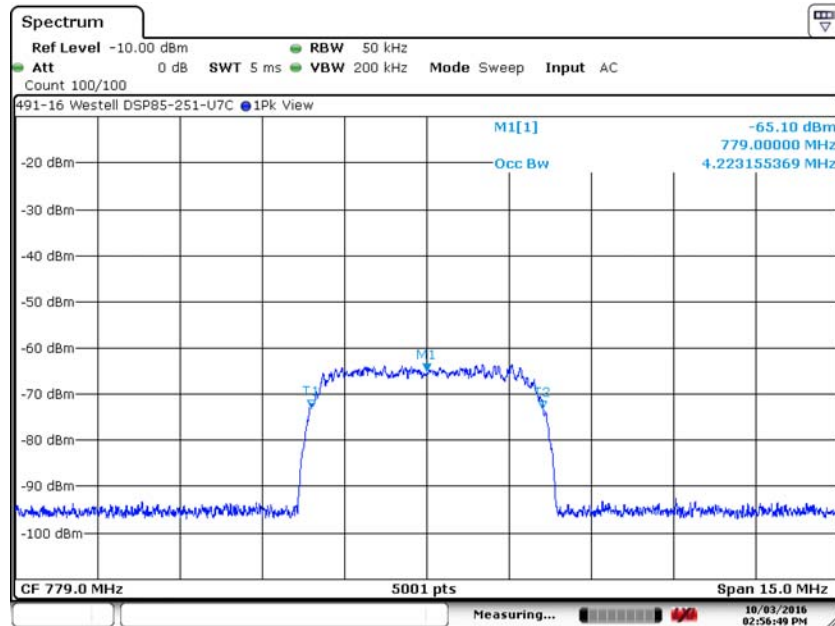


Date: 3.OCT.2016 14:56:48

6. Measurement Data (continued)


6.2. Bandwidth Limitations FCC Part 2.1049, RSS-GEN 6.6 (continued)

6.2.1.7. Occupied (99% Power) Bandwidth Measurement, 779 MHz AWGN + 3dB

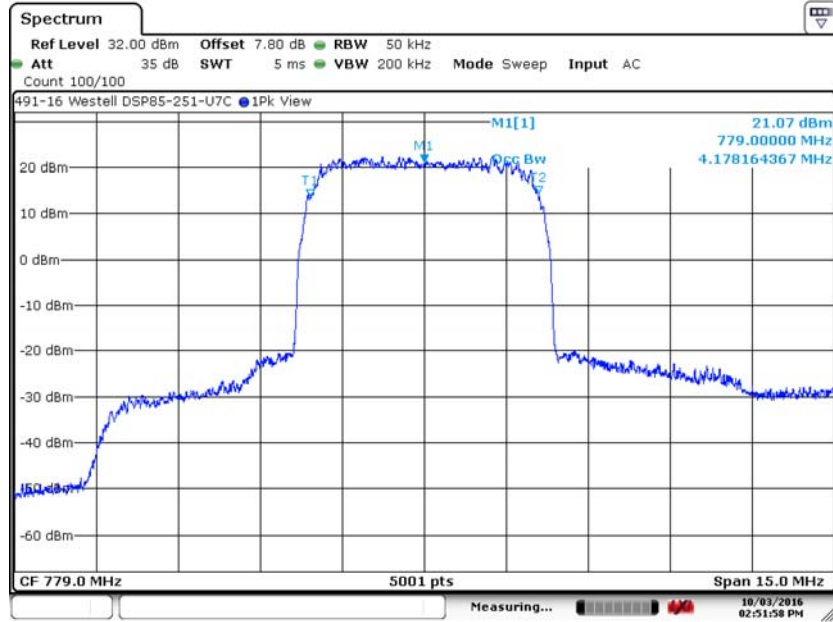

Date: 3.OCT.2016 14:51:56

6.2.1.8. Occupied (99% Power) Bandwidth Input Signal, 779 MHz AWGN +3dB

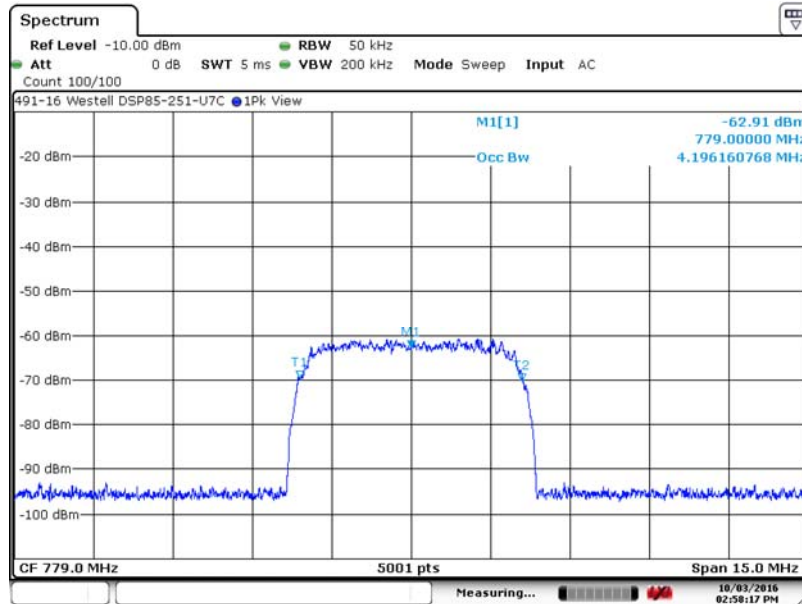

Date: 3.OCT.2016 14:58:16

6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6

Requirement: For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside of the licensee’s frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside of the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;


(2) On any frequency outside of the 776-787 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ in a 6.25 KHz band segment for base and fixed stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based upon the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 30 kHz may be employed.

Test Method: KDB 935210 Section 3.6.3


6.3.1. 748 MHz, 30 MHz to 1 GHz, AWGN

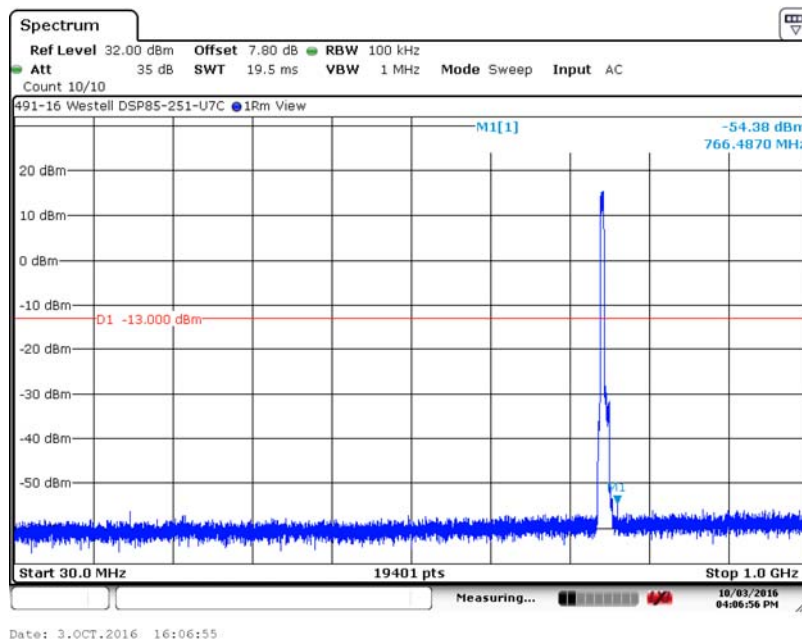


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.2. 748 MHz, 1 to 8 GHz, AWGN

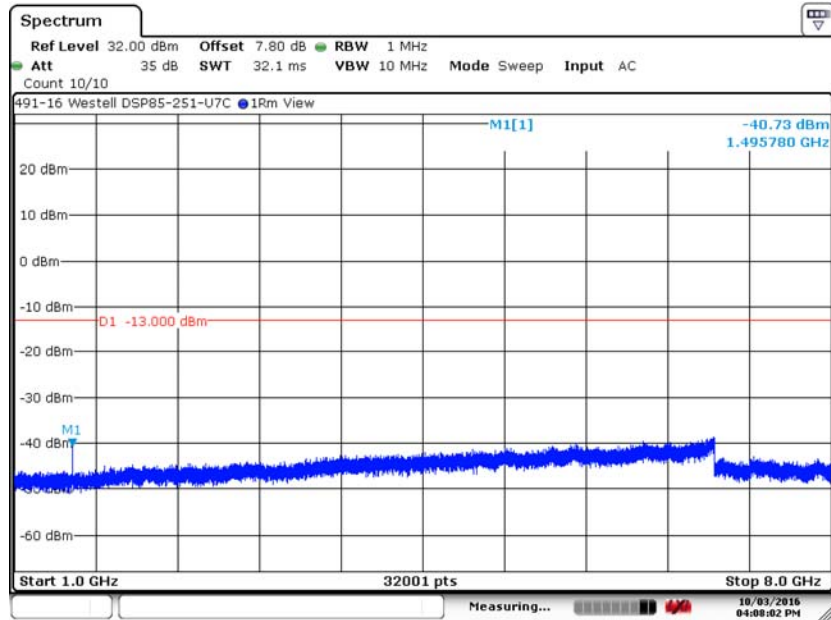


6.3.3. 751.5 MHz, 30 MHz to 1 GHz, AWGN

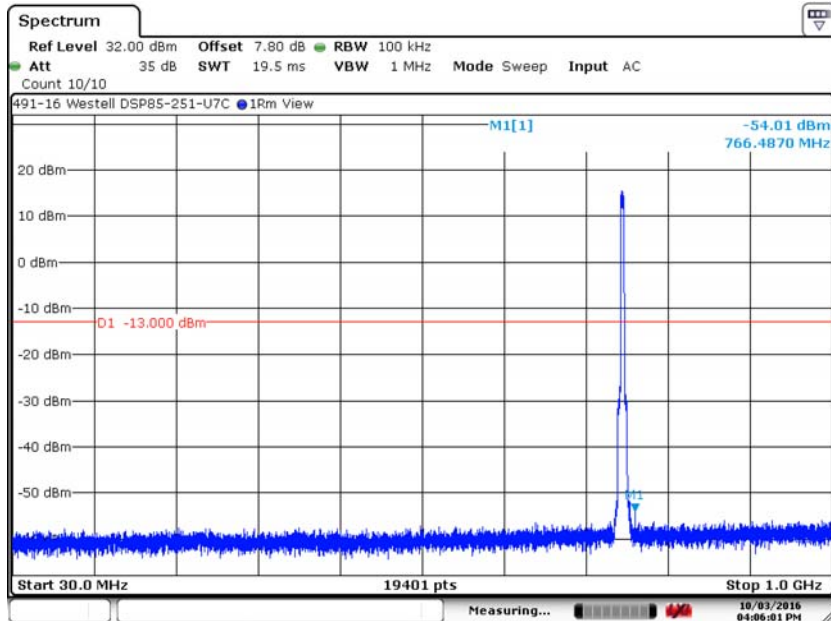


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.4. 751.5 MHz, 1 to 8 GHz, AWGN

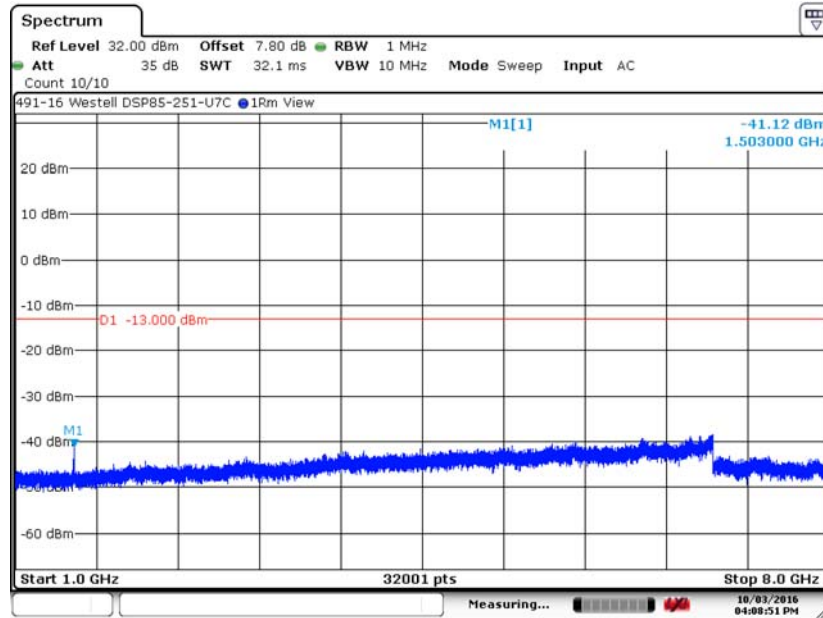


6.3.5. 754 MHz, 30 MHz to 1 GHz, AWGN

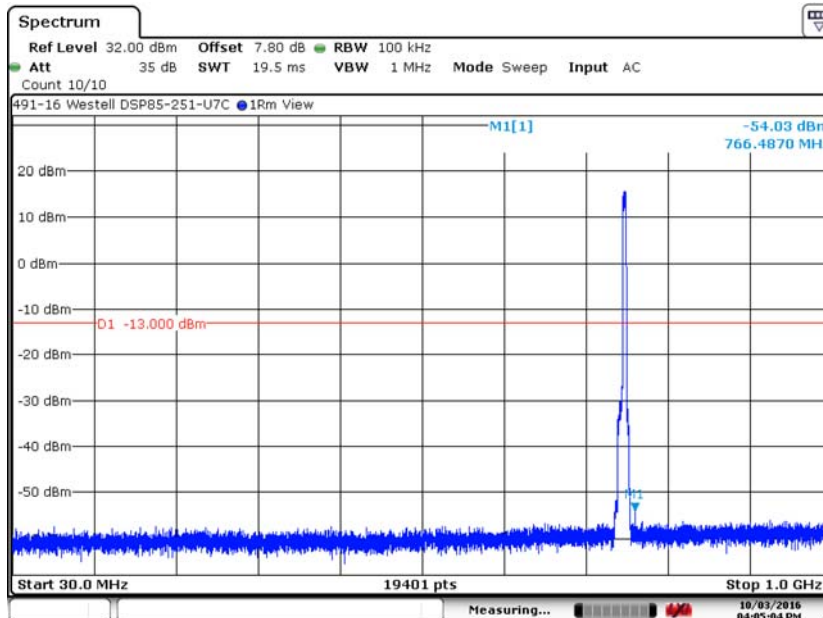

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.6. 754 MHz, 1 to 8 GHz, AWGN

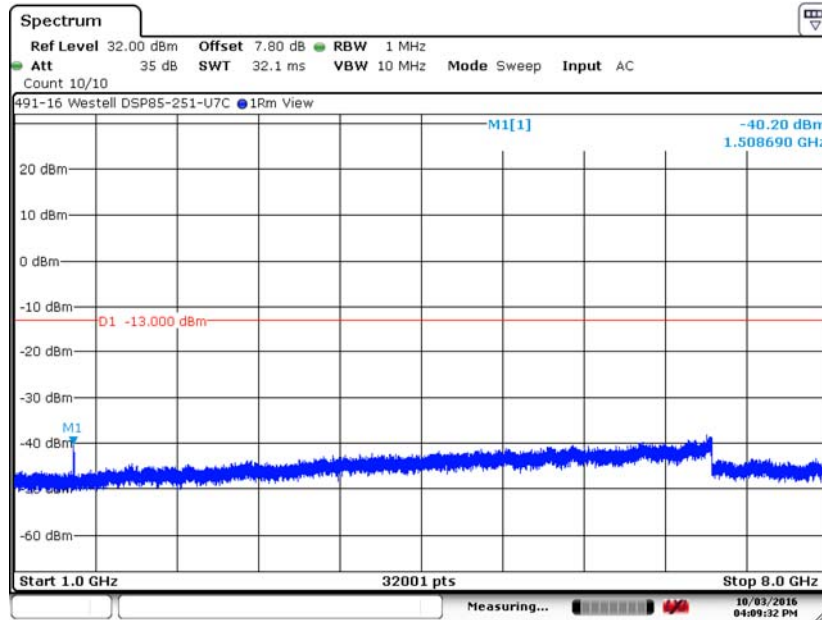

Date: 3.OCT.2016 16:09:31

6.3.7. 778 MHz, 30 MHz to 1 GHz, AWGN

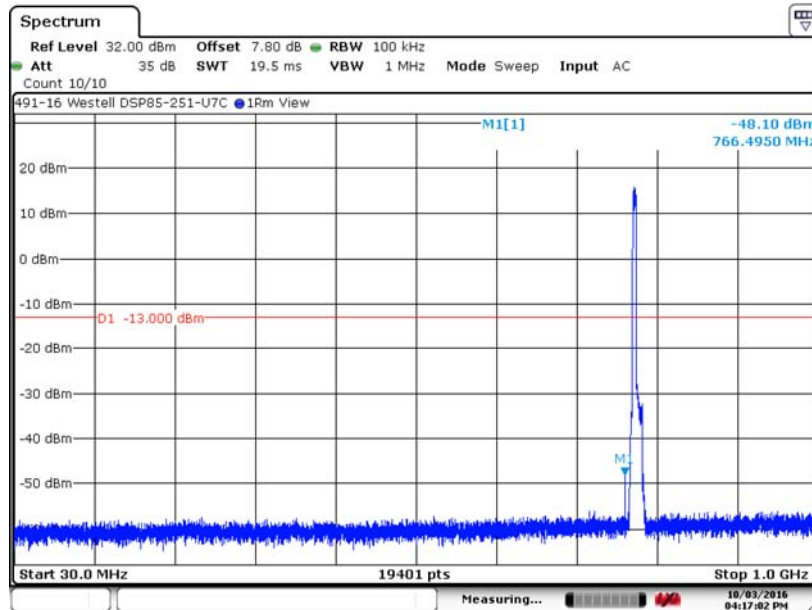


Date: 3.OCT.2016 16:17:01


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.8. 778 MHz, 1 to 8 GHz, AWGN

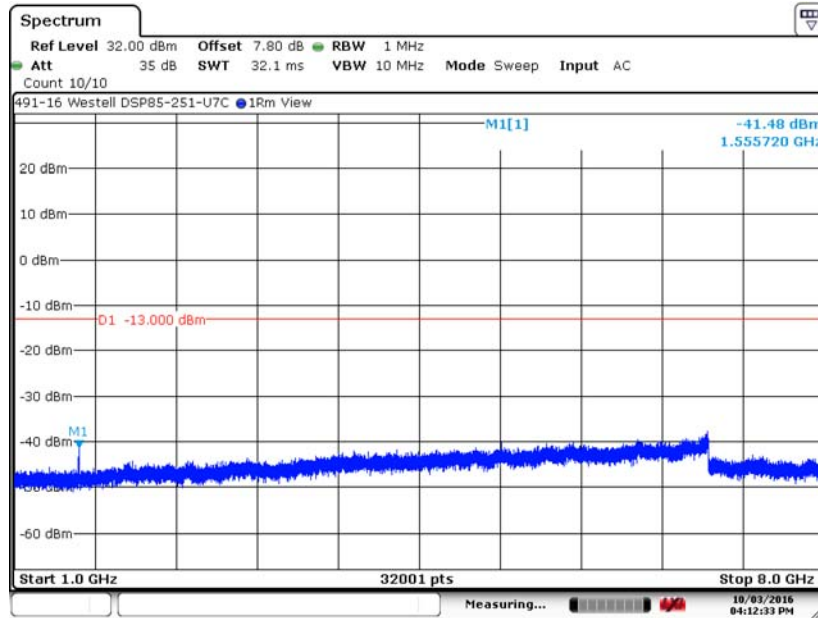


6.3.9. 781.5 MHz, 30 MHz to 1 GHz, AWGN

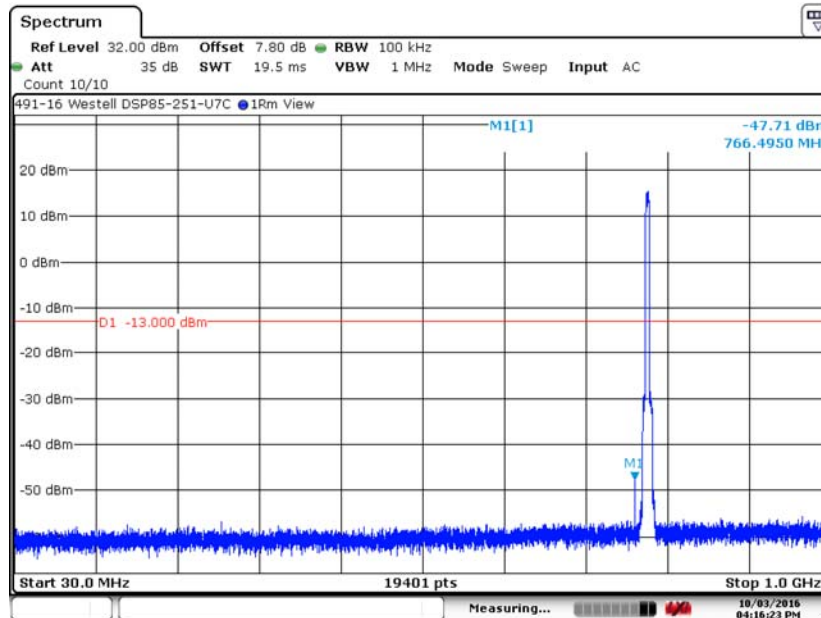


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.10. 781.5 MHz, 1 to 8 GHz, AWGN

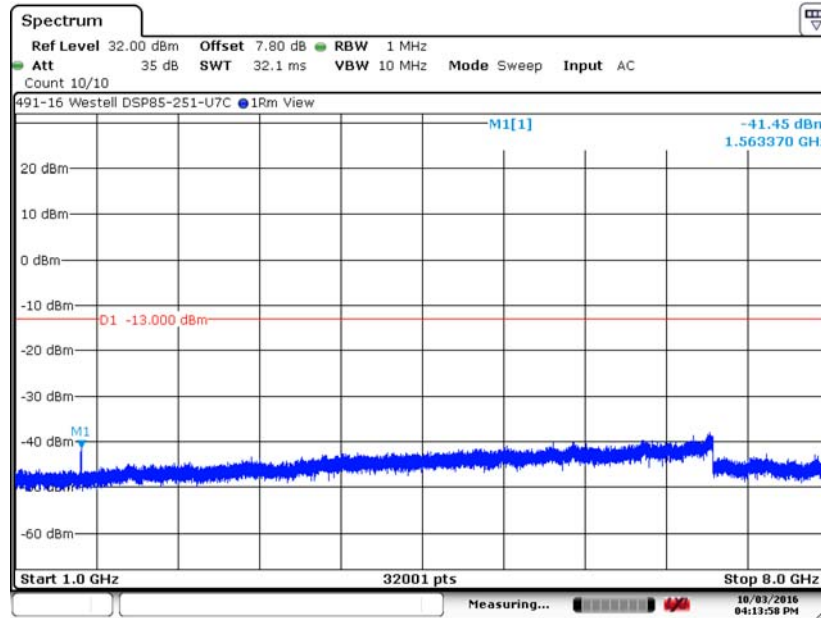


6.3.11. 785 MHz, 30 MHz to 1 GHz, AWGN

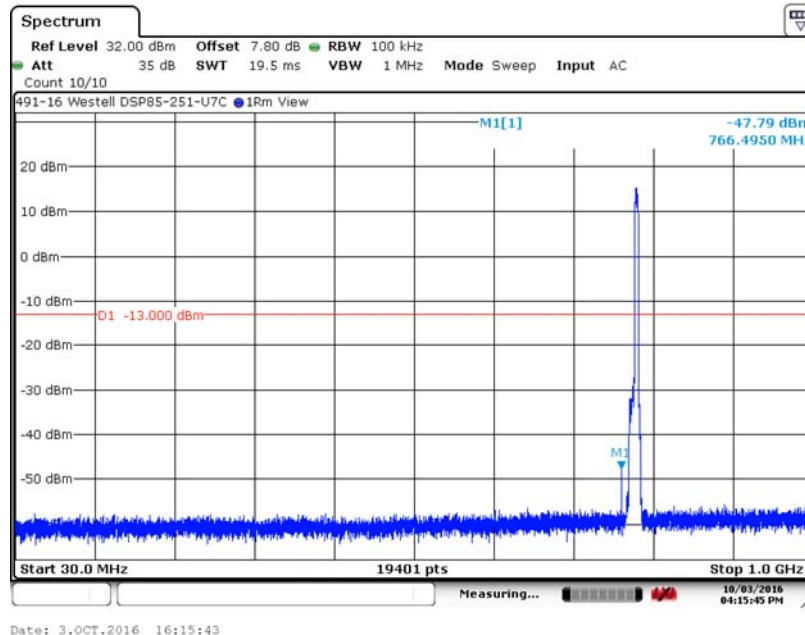

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.12. 785 MHz, 1 to 8 GHz, AWGN

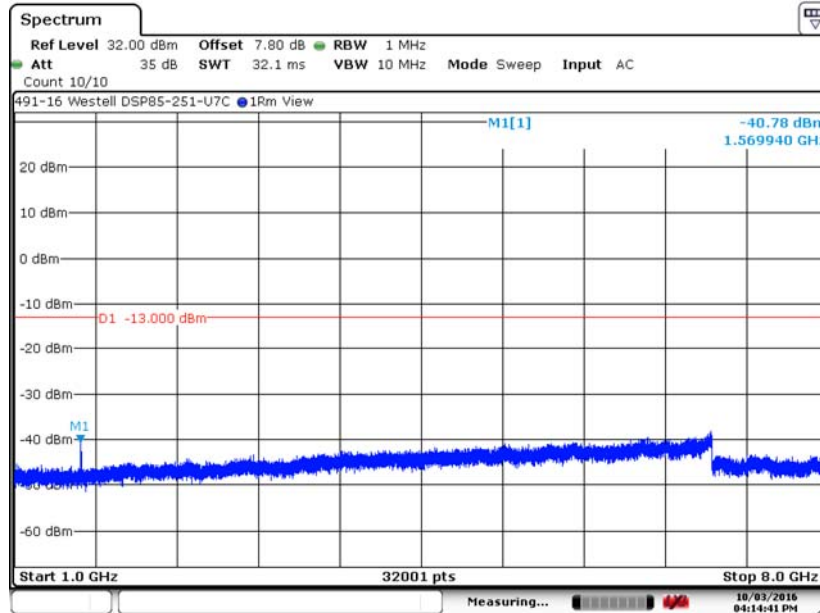

Date: 3.OCT.2016 16:14:40

6.3.13. 746 MHz Lower Bandedge, AWGN

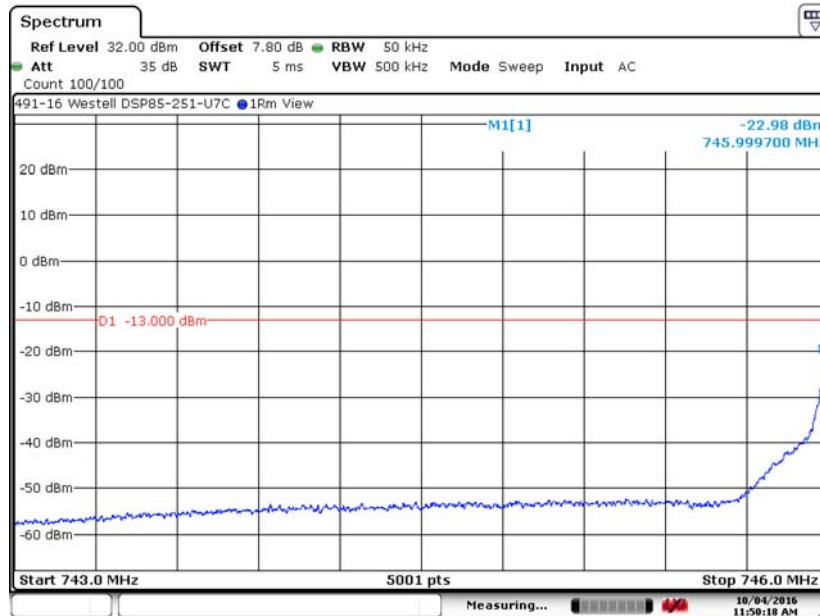


Date: 4.OCT.2016 11:50:17

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.14. 757 MHz Upper Bandedge, AWGN

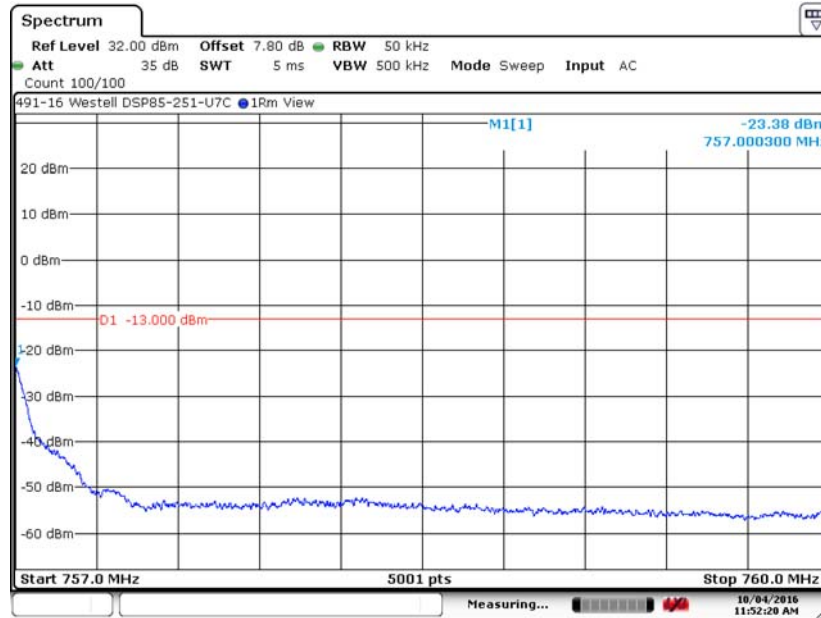

Date: 4.OCT.2016 11:52:18

6.3.15. 776 MHz, Lower bandedge, AWGN

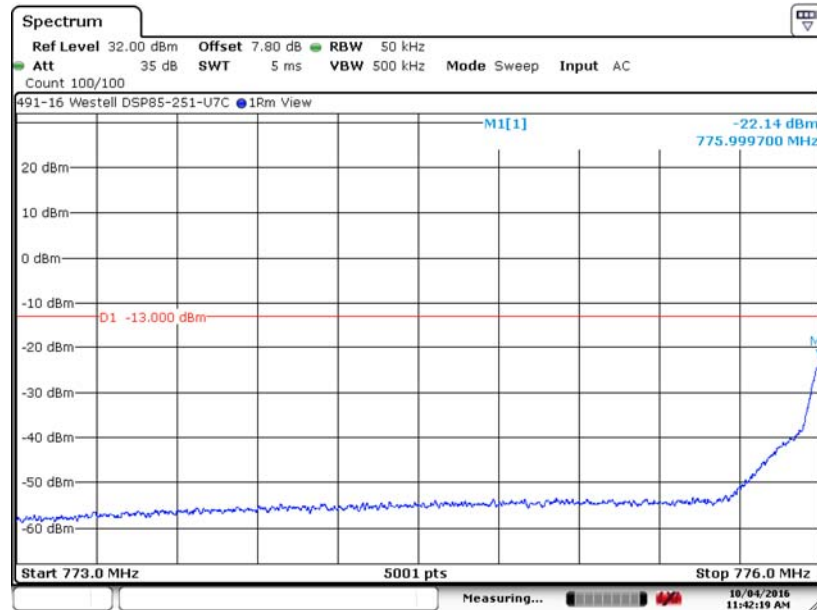


Date: 4.OCT.2016 11:42:17

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.16. 787 MHz, Upper bandedge, AWGN

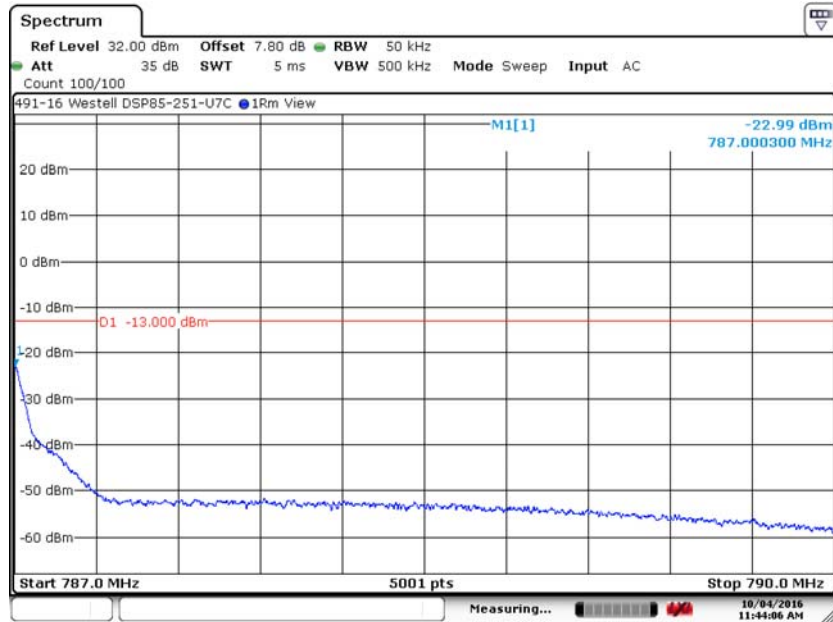

Date: 4.OCT.2016 11:44:05

6.3.17. 751.5 MHz, 763 to 775 MHz, AWGN

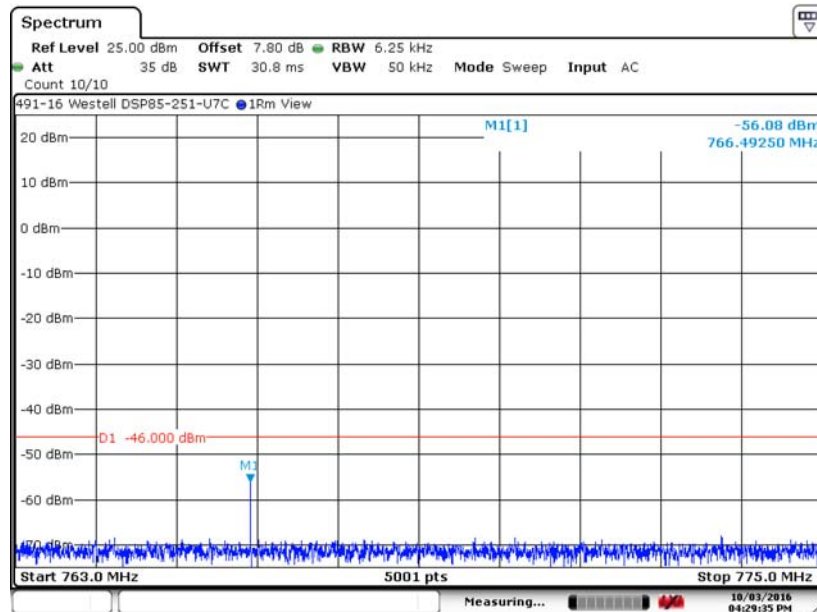


Date: 3.OCT.2016 16:29:34

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.18. 751.5 MHz, 793 to 806 MHz, AWGN

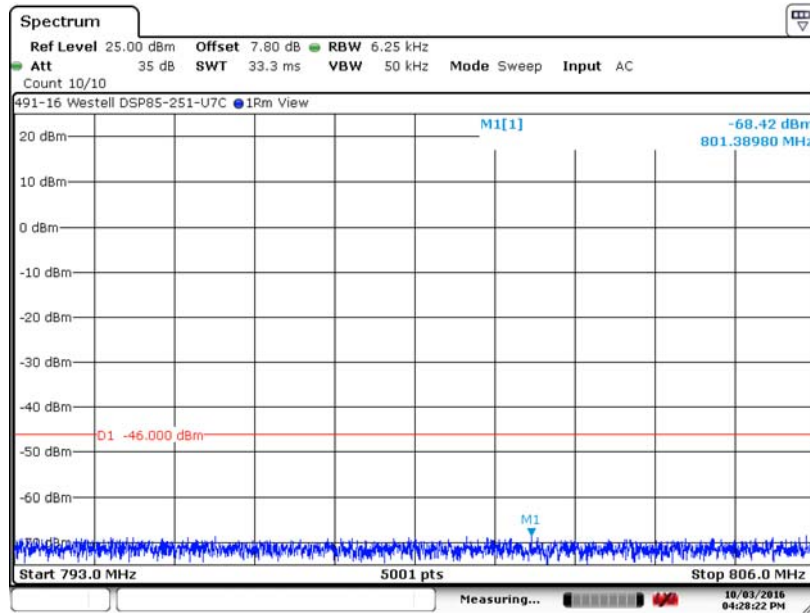

Date: 3.OCT.2016 16:28:21

6.3.19. 781.5 MHz, 763 to 775 MHz, AWGN

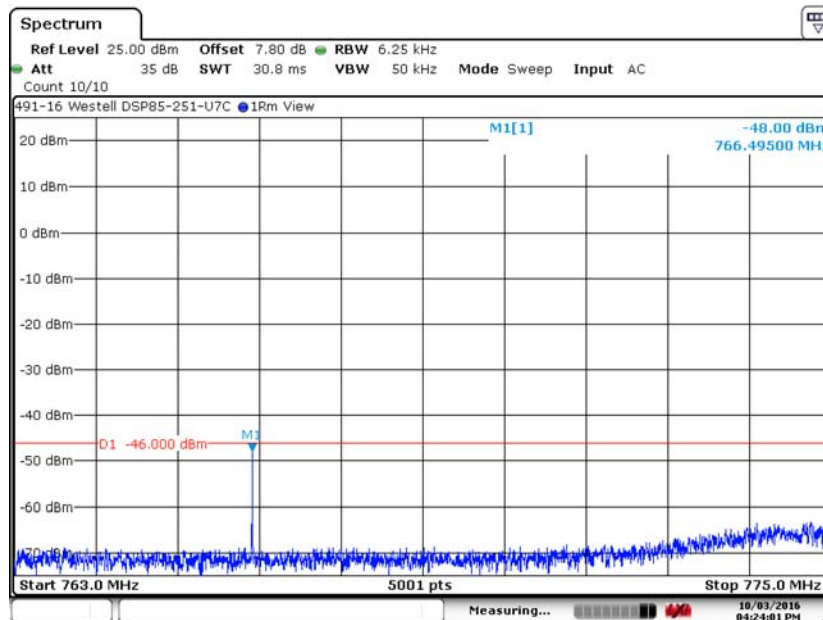


Date: 3.OCT.2016 16:23:59

6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c), RSS-130 4.6 (continued)

6.3.20. 781.5 MHz, 793 to 806 MHz, AWGN

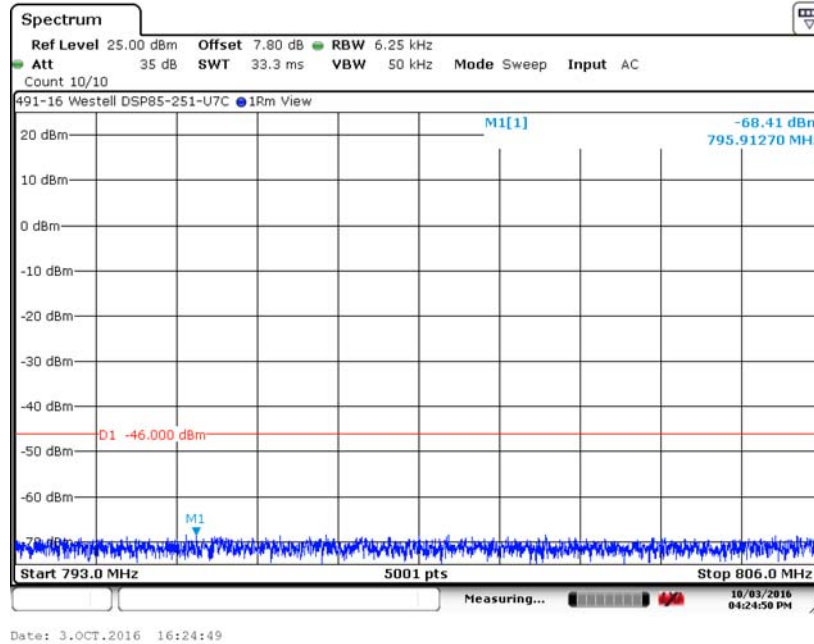


6.3. Spurious Emissions at the Antenna Terminals 27.53 (f), RSS-130 4.6
Additional Requirements

Requirement: For operations in the 746-758 MHz, 775-793 MHz and the 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (f), RSS-130 4.6 (continued)

6.3.21. 751.5 MHz, 1559 to 1610 MHz, Narrowband, AWGN

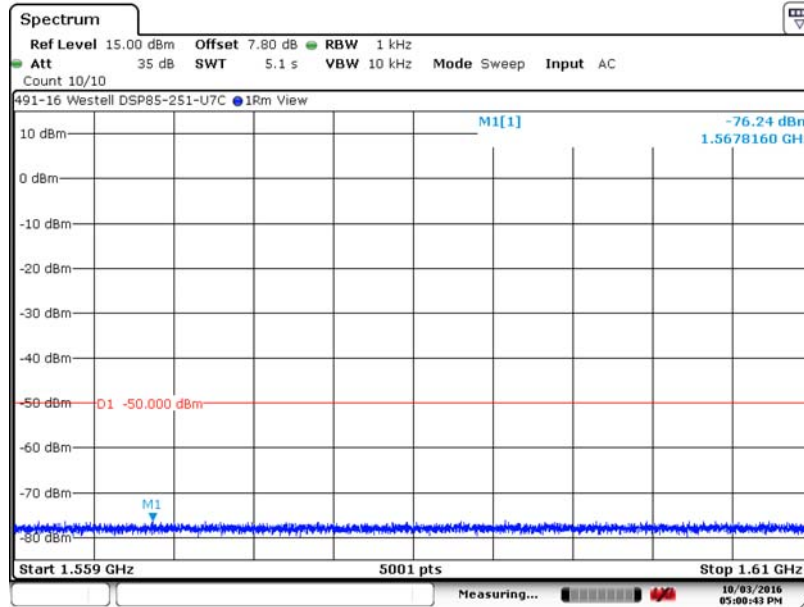

Date: 3.OCT.2016 17:00:42

6.3.22. 751.5 MHz, 1559 to 1610 MHz, Wideband AWGN

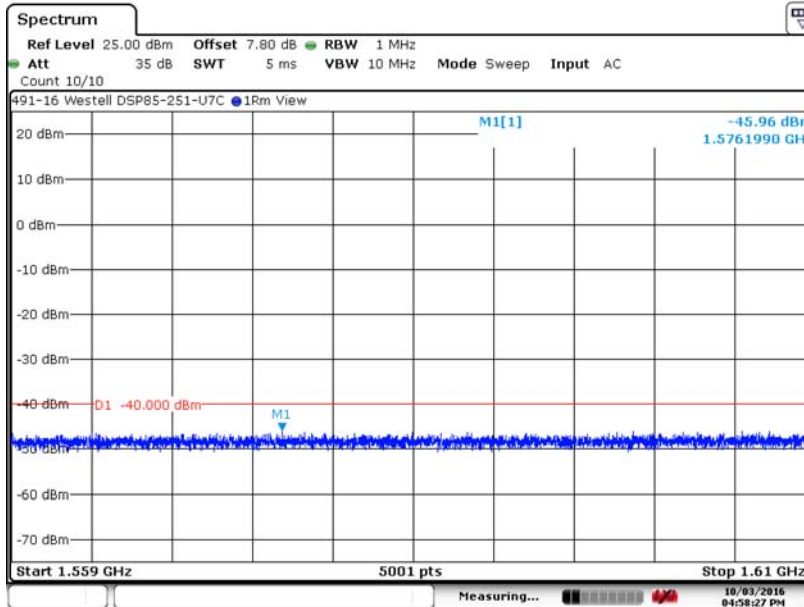


Date: 3.OCT.2016 16:58:26

6. Measurement Data (continued)


6.3. Spurious Emissions at the Antenna Terminals 27.53 (f), RSS-130 4.6 (continued)

6.3.23. 781.5 MHz, 1559 to 1610 MHz, Narrowband, AWGN

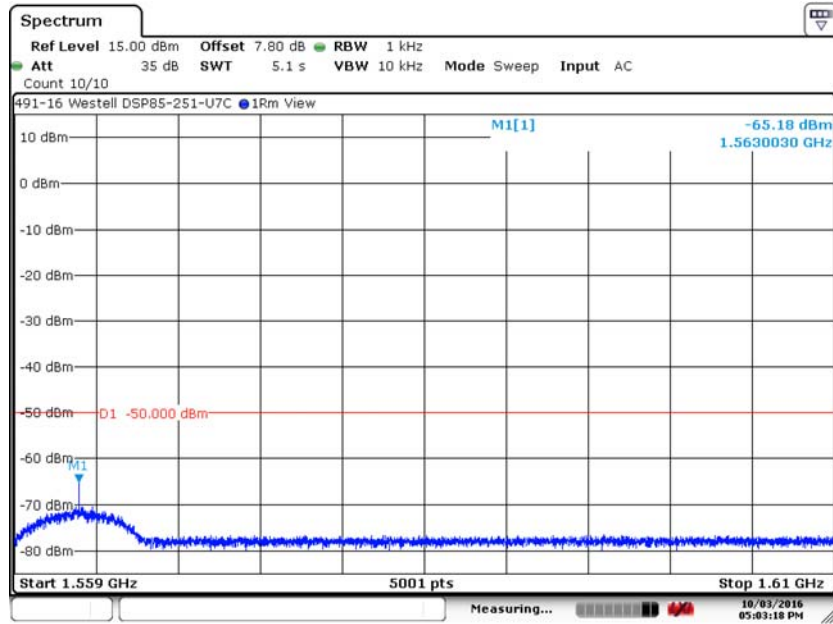

Date: 3.OCT.2016 17:03:17

6.3.24. 781.5 MHz, 1559 to 1610 MHz, Wideband AWGN

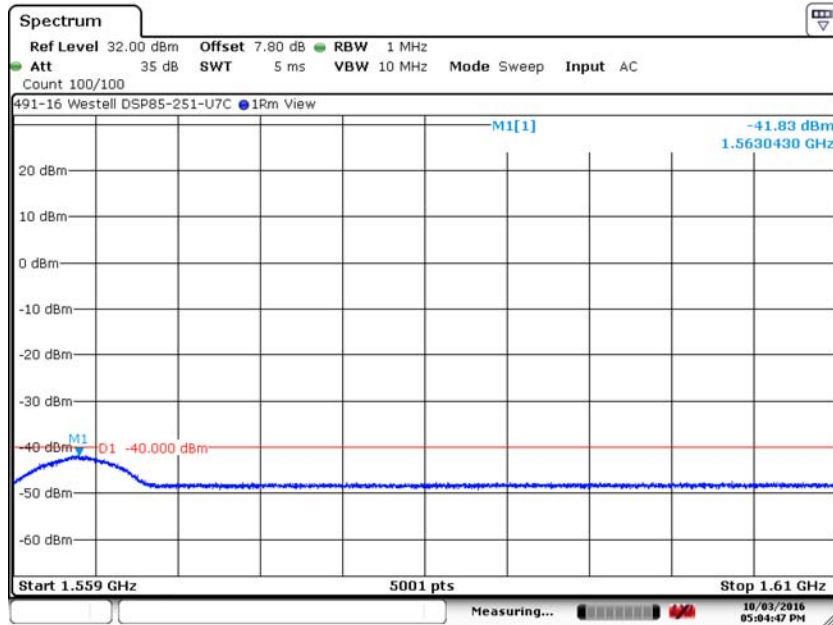

Date: 3.OCT.2016 17:04:46

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (c), RSS-130 4.6

Requirement: For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside of the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside of the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside of the 776-787 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.

Test Method: KDB 935210 Section 3.8

6.4.1. Measurement and Equipment Setup

Test Date:	7/28/2016
Test Engineer:	Cody Merry
Site Temperature (°C):	22
Relative Humidity (%RH):	32
Frequency Range:	30 MHz to 1 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	120 kHz
EMI Receiver Avg Bandwidth:	300 kHz
Detector Functions:	Peak and Quasi-Peak.
Antenna Height:	1 to 4 meters


6.4.2 Test Procedure

Test measurements were made in accordance with ANSI C63.4-2014, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (c), RSS-130 4.6 (continued)

6.4.3. Horizontal Polarity

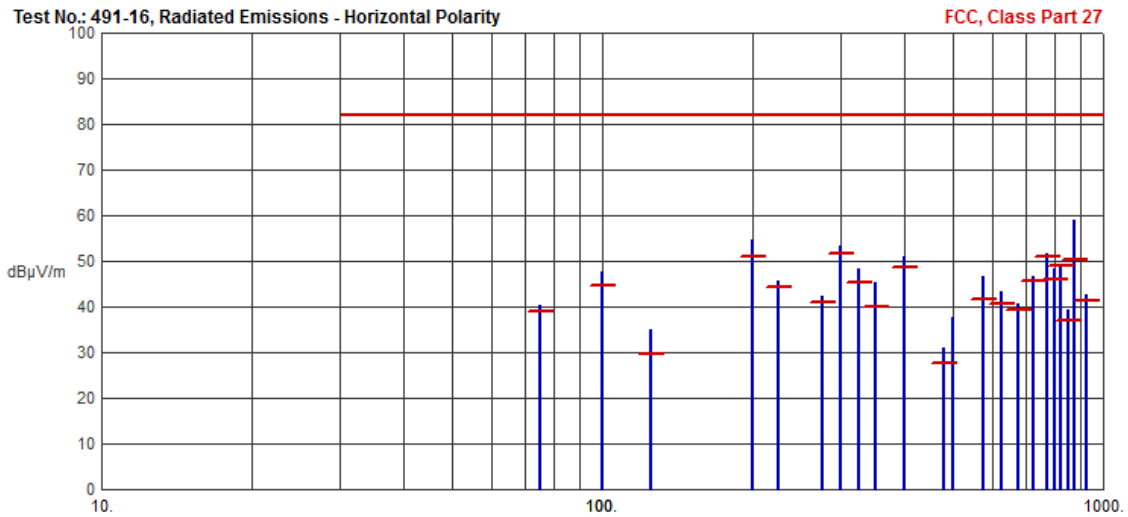

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (c), RSS-130 4.6 (continued)


6.4.3. Horizontal Polarity

Frequency (MHz)	Pk Amp (dBµV/m)	QP Amp (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
74.9873	40.39	38.92	82.00	-43.08	N/A	N/A	
100.0032	47.83	44.60	82.00	-37.40	N/A	N/A	
124.9854	35.05	29.62	82.00	-52.38	N/A	N/A	
200.0246	54.73	50.98	82.00	-31.02	N/A	N/A	
225.0066	45.53	44.44	82.00	-37.56	N/A	N/A	
275.0053	42.47	41.04	82.00	-40.96	N/A	N/A	
300.0456	53.37	51.74	82.00	-30.26	N/A	N/A	
325.0227	48.38	45.22	82.00	-36.78	N/A	N/A	
350.0086	45.44	40.05	82.00	-41.95	N/A	N/A	
400.0684	51.01	48.74	82.00	-33.26	N/A	N/A	
479.9777	30.85	27.51	82.00	-54.49	N/A	N/A	
500.0787	37.73	37.73	82.00	-44.27	N/A	N/A	
575.0070	46.55	41.79	82.00	-40.21	N/A	N/A	
625.0216	43.23	40.71	82.00	-41.29	N/A	N/A	
675.0348	40.78	39.32	82.00	-42.68	N/A	N/A	
725.0396	46.54	45.56	82.00	-36.44	N/A	N/A	
775.0346	51.68	50.98	82.00	-31.02	N/A	N/A	
800.1573	48.27	46.06	82.00	-35.94	N/A	N/A	
825.0397	49.46	48.85	82.00	-33.15	N/A	N/A	
850.0727	39.37	37.09	82.00	-44.91	N/A	N/A	
875.0531	59.14	50.17	82.00	-31.83	N/A	N/A	
925.0572	42.58	41.41	82.00	-40.59	N/A	N/A	

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (c), RSS-130 4.6 (continued)

6.4.4. Vertical Polarity

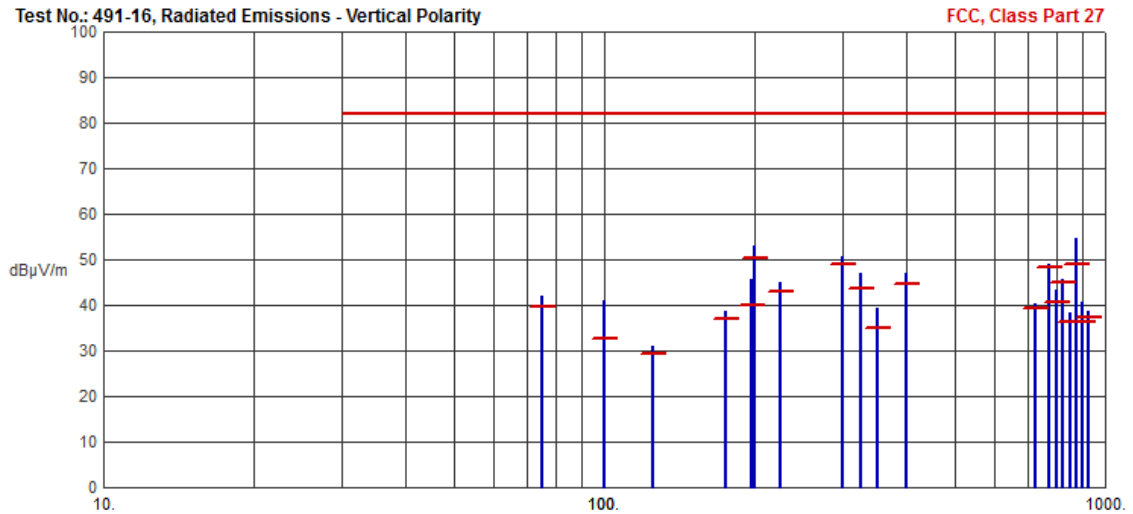

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (c), RSS-130 4.6 (continued)

6.4.4. Vertical Polarity

Frequency (MHz)	Pk Amp (dBµV/m)	QP Amp (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
74.9801	41.92	39.67	82.00	-42.33	N/A	N/A	
100.0041	41.02	32.79	82.00	-49.21	N/A	N/A	
124.9870	31.16	29.49	82.00	-52.51	N/A	N/A	
175.0177	38.67	37.13	82.00	-44.87	N/A	N/A	
196.6886	45.59	39.86	82.00	-42.14	N/A	N/A	
200.0164	53.09	50.20	82.00	-31.80	N/A	N/A	
224.9972	44.99	42.93	82.00	-39.07	N/A	N/A	
300.0429	50.64	48.99	82.00	-33.01	N/A	N/A	
324.9953	47.07	43.67	82.00	-38.33	N/A	N/A	
350.0410	39.44	35.16	82.00	-46.84	N/A	N/A	
400.0696	46.86	44.53	82.00	-37.47	N/A	N/A	
725.0429	40.23	39.27	82.00	-42.73	N/A	N/A	
775.0339	49.00	48.43	82.00	-33.57	N/A	N/A	
800.1668	43.20	40.64	82.00	-41.36	N/A	N/A	
825.0443	45.79	45.09	82.00	-36.91	N/A	N/A	
850.0472	38.23	36.40	82.00	-45.60	N/A	N/A	
875.0491	54.57	49.04	82.00	-32.96	N/A	N/A	
900.0558	40.76	36.40	82.00	-45.60	N/A	N/A	
925.0345	38.77	37.21	82.00	-44.79	N/A	N/A	

6. Measurement Data (continued)**6.4. Field Strength of Spurious Emissions 27.53 (c), RSS-130 4.6 (continued)**

6.4.5. Measurement and Equipment Setup

Test Date:	7/28/2016
Test Engineer:	Cody Merry
Site Temperature (°C):	24
Relative Humidity (%RH):	33
Frequency Range:	Above 1 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	1 MHz
EMI Receiver Avg Bandwidth:	3 MHz
Detector Functions:	Peak and Average
Antenna Height:	1 to 4 meters

6.4.6. Radiated Emissions above 1 GHz

There were no measureable emissions within 10 dB of the limit above 1 GHz

6. Measurement Data (continued)

6.5. Frequency Stability / Tolerance 27.54, RSS-130 4.3

Requirement: The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized band of operation.

Test Method: KDB 935210 Section 3.7

Note: The EUT does not translate the input frequency and therefore this testing was not performed.


6. Measurement Data (continued)

6.6. Out of Band Rejection FCC KDB 935210

Requirement: Over a +/- 250 % span of the passband of the EUT measure the 20 dB bandwidth of the pass band of the EUT.

Test Method: KDB 935210 Section 3.3

6.6.1. 751.5 MHz Center Frequency, $f_0 = 756.009$ MHz

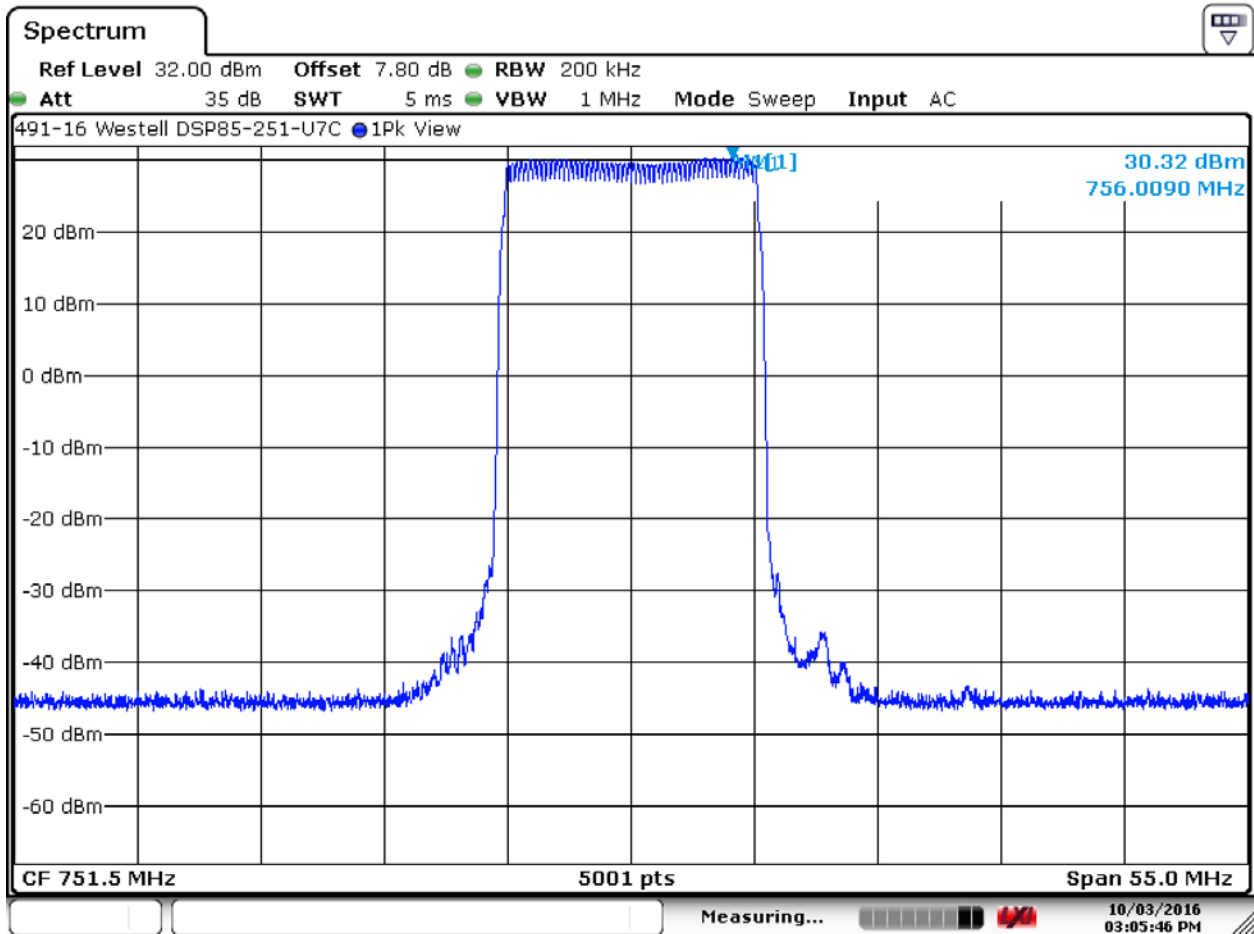

Date: 3.OCT.2016 15:05:45


Test Number: 491-16R1

Issue Date: 12/9/2016

6. Measurement Data (continued)

6.6. Out of Band Rejection FCC KDB 935210 (continued)

6.6.2. 781.5 MHz, Center Frequency, $f_0 = 777.409$ MHz

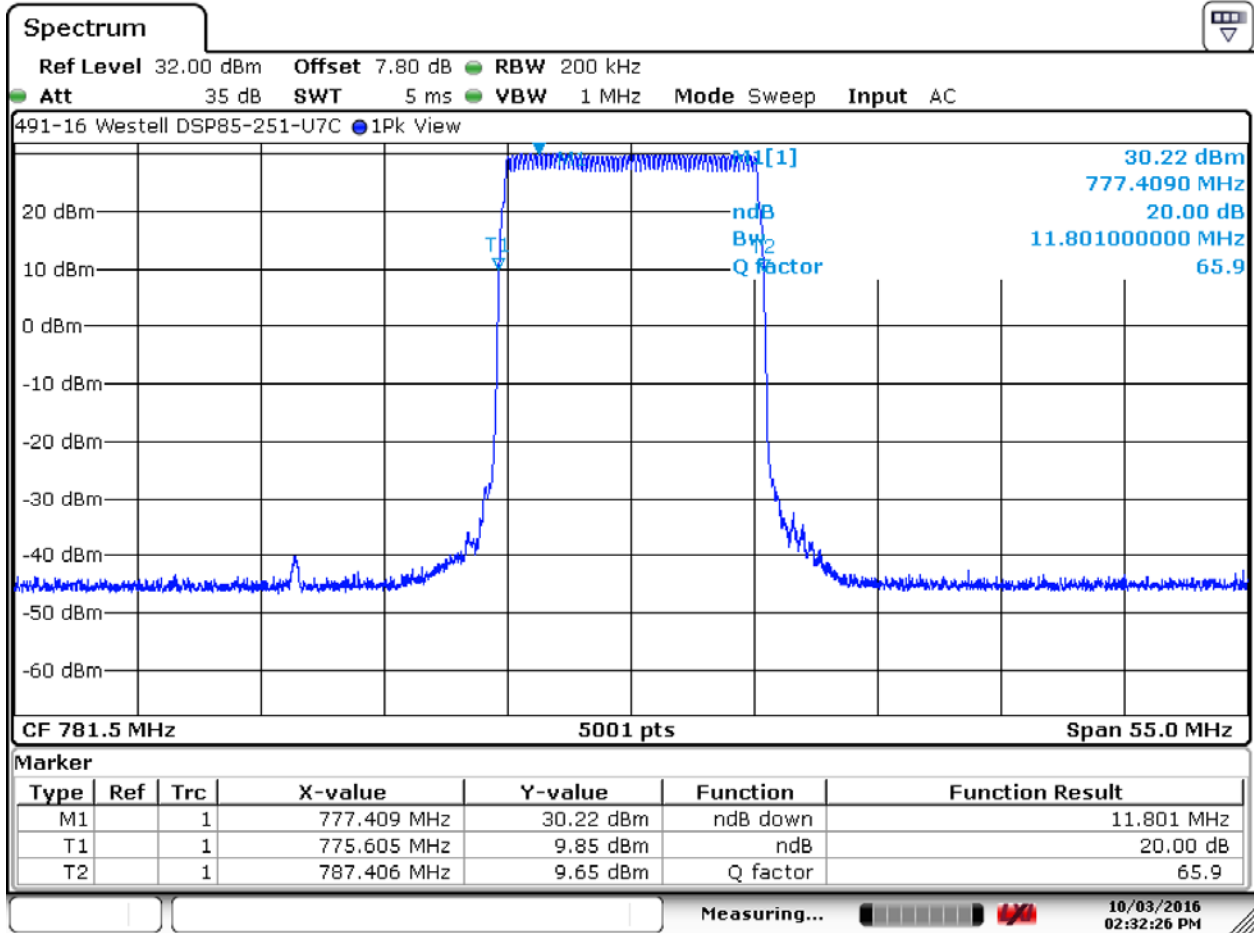

Date: 3.OCT.2016 14:32:24

6. Measurement Data (continued)

6.7. Public Exposure to Radio Frequency Energy Levels 1.1307 (b)(1), RSS-GEN, Issue 4 Section 3.2, RSS 102

Center Frequency (MHz)	MPE Distance (cm)	DUT Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		FCC Limit (mW/cm ²)	IC Limit (W/m ²)
				(mW/cm ²)	(W/m ²)		
	(1)	(2)	(3)	(4)		(5)	(6)
754.0	20.0	29.12	3.00	0.3241381	3.2413815	2.51	17.72
779.0	20.0	29.25	3.00	0.3339874	3.3398745	2.60	18.02

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

1. Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.
2. Section 6.1.2 of this test report. Note that the value has been adjusted to include the cable insertion loss.
3. Data supplied by the client for combination of cable loss and antenna gain.
4. Power density is calculated from field strength measurement and antenna gain.
5. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (A): Limits for Occupational/Controlled Exposure.
6. Reference IC RSS-102 Section 4 Table 6 Controlled Use Devices (Controlled Environment) for equipment operating from 100 to 6000 MHz, the W/m² limit is determined by the formula 0.6455 * F (MHz) ^ 0.5

7. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0208.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

8. Test Setup Photographs

8.1 Antenna Port Conducted Emissions



8. Test Setup Photographs (cont)

8.2 Radiated Emissions (Front) 30 MHz to 1 GHz



8. Test Setup Photographs (cont)

8.3 Radiated Emissions (Rear) 30 MHz to 1 GHz



8. Test Setup Photographs (cont)

8.4 Radiated Emissions (Front) 1 to 18 GHz




8. Test Setup Photographs (cont)

8.5 Radiated Emissions (Rear) 1 to 18 GHz




Appendix A

RF Output Power

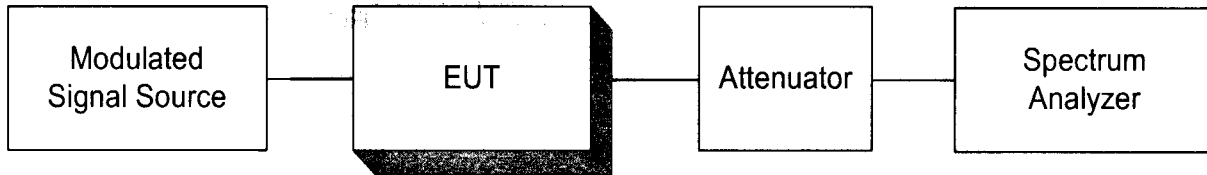


Occupied Bandwidth

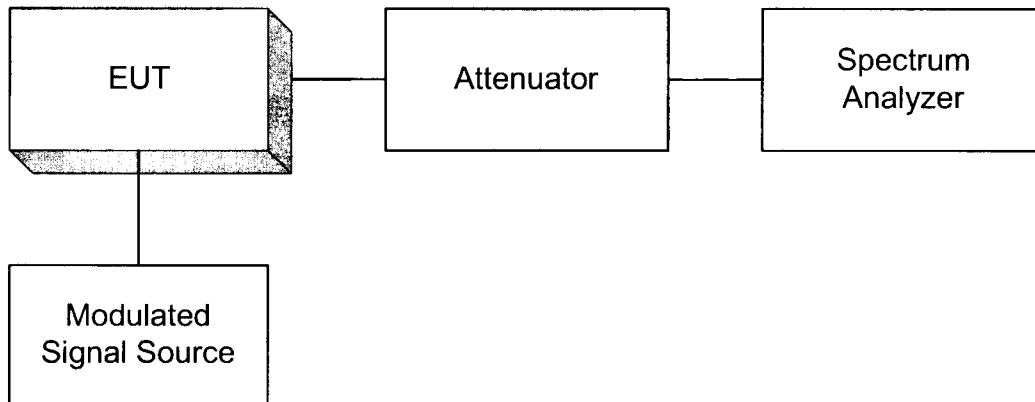

Appendix A

Spurious Emissions at the Antenna Terminals

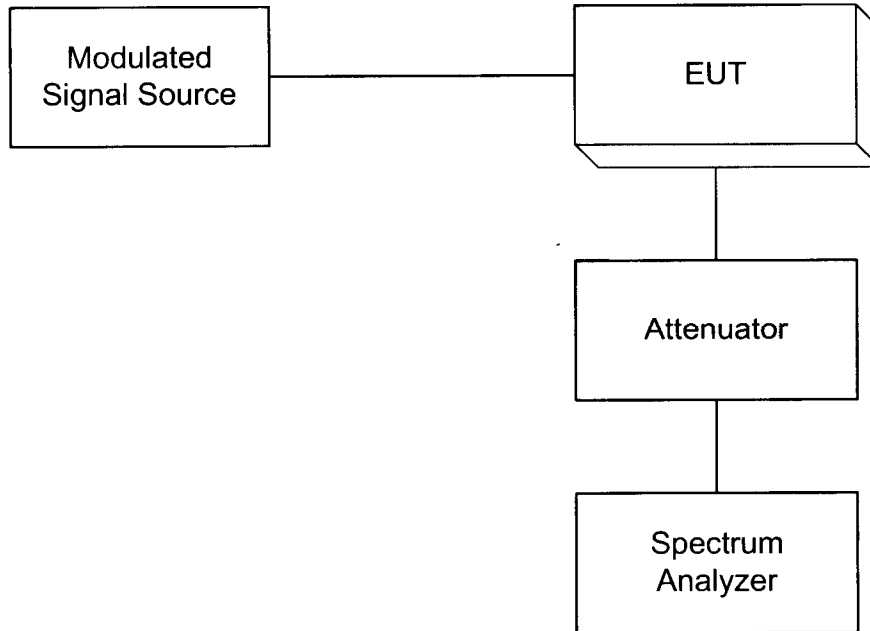

Field Strength of Spurious Radiation

