

TEST REPORT

Reference No...... : WTD22X11236852W001
FCC ID : NZ3-WN0004
Applicant : Winstars Technology Limited
Address : Block 4,Taisong Indusyrial Park, Dalang Street,Longhua Town,Bao'an District,Shenzhen,China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : AX1800 Dual-Band Mesh WiFi Router Kit
Model No...... : WS-WN552X1
Standards : FCC Part 15.407
Date of Receipt sample : 2022-08-25
Date of Test..... : 2022-08-25 to 2023-01-03
Date of Issue : 2023-01-03
Test Report Form No. : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

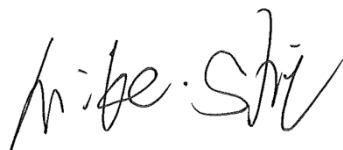
Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....5
 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....5
 1.2 TEST STANDARDS.....6
 1.3 TEST METHODOLOGY.....6
 1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING6
 1.5 EUT OPERATING DURING TEST7
 1.6 TEST FACILITY7
 1.7 EUT SETUP AND TEST MODE.....8
 1.8 MEASUREMENT UNCERTAINTY10
 1.9 TEST EQUIPMENT LIST AND DETAILS11

2. SUMMARY OF TEST RESULTS14

3. ANTENNA REQUIREMENT15
 3.1 STANDARD APPLICABLE.....15
 3.2 EVALUATION INFORMATION15

4. AUTOMATICALLY DISCONTINUE TRANSMISSION16
 4.1 STANDARD APPLICABLE.....16
 4.2 SUMMARY OF TEST RESULTS16

5. POWER SPECTRAL DENSITY17
 5.1 STANDARD APPLICABLE.....17
 5.2 TEST PROCEDURE.....17
 5.3 SUMMARY OF TEST RESULTS/PLOTS18

6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....19
 6.1 STANDARD APPLICABLE.....19
 6.2 TEST PROCEDURE.....19
 6.3 SUMMARY OF TEST RESULTS/PLOTS21

7. MAXIMUM CONDUCTED OUTPUT POWER.....22
 7.1 STANDARD APPLICABLE.....22
 7.2 TEST PROCEDURE.....22
 7.3 SUMMARY OF TEST RESULTS/PLOTS23

8. RADIATED SPURIOUS EMISSIONS.....24
 8.1 STANDARD APPLICABLE.....24
 8.2 TEST PROCEDURE.....24
 8.3 TEST RECEIVER SETUP26
 8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....26
 8.5 SUMMARY OF TEST RESULTS/PLOTS27

9. FREQUENCY STABILITY53
 9.1 STANDARD APPLICABLE.....53
 9.2 TEST PROCEDURE.....53
 9.3 SUMMARY OF TEST RESULTS/PLOTS53

10 CONDUCTED EMISSIONS54
 10.1 TEST PROCEDURE.....54
 10.2 BASIC TEST SETUP BLOCK DIAGRAM.....54
 10.3 TEST RECEIVER SETUP54
 10.4 SUMMARY OF TEST RESULTS/PLOTS54

APPENDIX SUMMARY57

APPENDIX A.....58

APPENDIX B.....80

APPENDIX C.....122

APPENDIX D.....143

APPENDIX PHOTOGRAPHS.....145

Report version

Version No.	Date of issue	Description
Rev.00	2022-09-29	Original report WTD22X08173451W001
Rev.01	2023-01-03	Refer the old report WTD22X08173451W001, So the test data from the original report.
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	AX1800 Dual-Band Mesh WiFi Router Kit
Trade Name:	/
Model No.:	WS-WN552X1
Adding Model(s):	WS-WN552X2, WS-WN552X3, WL-WN552X1, WL-WN552X2, WL-WN552X3, WS-WN552K1, WS-WN552K2, WS-WN552K3, WL-WN552K1, WL-WN552K2, WL-WN552K3, AURA Pro, 9170-00-20
Rated Voltage:	DC12V
Power Adapter Model:	MODEL:P018W1201500HU INPUT:AC100-240V~50/60Hz 0.5A MAX OUTPUT:DC12.0V,1.5A 18.0W
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model WS-WN552X1, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH20, 802.11ac-VH40, 802.11ac-VH80, 802.11ax-HE20, 802.11ax-HE40, 802.11ax-HE80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	Antenna 0: 14.54dBm (Conducted) Antenna 1: 14.78dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	3.33dBi
<p><i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i></p>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter "3646631+=" into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	520	524	52	5300	532	550	558	570	572	574	578	5825
802.11a 6Mbps	ANT 0	2.5	2.5	2.5	/	/	/	/	/	/	/	-3	-3	-3
	ANT 1	0	0	0	/	/	/	/	/	/	/	-3	-3	-3
802.11n-HT20 MCS0	ANT 0	2.0	2.0	2.0	/	/	/	/	/	/	/	-3. 5	-3. 5	-3.5
	ANT 1	-1.5	-1. 5	-1. 5	/	/	/	/	/	/	/	-3. 5	-3. 5	-3.5
802.11ax-HE20 MCS0	ANT 0	-1	-1	-1	/	/	/	/	/	/	/	-4	-4	-4
	ANT 1	-1.5	-1. 5	-1. 5	/	/	/	/	/	/	/	-4	-4	-4

Mode	Ant.	NCB: 40MHz									
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795
802.11n-HT40	ANT 0	-1	-1	/	/	/	/	/	/	-4	-4
MCS0	ANT 1	-2	-2	/	/	/	/	/	/	-4	-4
802.11ax-HE40	ANT 0	-2	-2	/	/	/	/	/	/	-4	-4
MCS0	ANT 1	-2.5	-2.5	/	/	/	/	/	/	-4	-4
Mode	Ant.	NCB: 80MHz									
		5210	5290	5530	5610	5690	5775				
802.11ac-VH80	ANT 0	-2.5	/	/	/	/	-5				
MCS0	ANT 1	-4.5	/	/	/	/	-5				
802.11ax-VE80	ANT 0	-3	/	/	/	/	-4				
MCS0	ANT 1	-4	/	/	/	/	-4				

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ax-HE20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM5	802.11ax-HE40	5190MHz,5230MHz, 5755MHz,5795MHz
TM6	802.11ac-VH80	5210MHz, 5775 MHz
TM7	802.11ax-HE80	5210MHz, 5775 MHz

Note1 : All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report; 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.

Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac/ax mode for this report; Antenna 1 Gain is 3.33dBi; Antenna 2 Gain is 3.33dBi;

According to KDB 662911, for same directional gain:

Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $3.33 + 10 \log(2)$ dBi = 6.34dBi

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.25	Unshielded	Without Ferrite
WLAN Cable	1.08	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TP00114A	R9-0YPT2W

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SMET-1313	Spectrum Analyzer	Agilent	N9020A	MY54320548	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21

SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917 0582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A101 79	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A038 69	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $RBW=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed

6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500KHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are

Reference No.: WTD22X11236852W001

placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW \geq 3MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz .
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz .
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz .
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

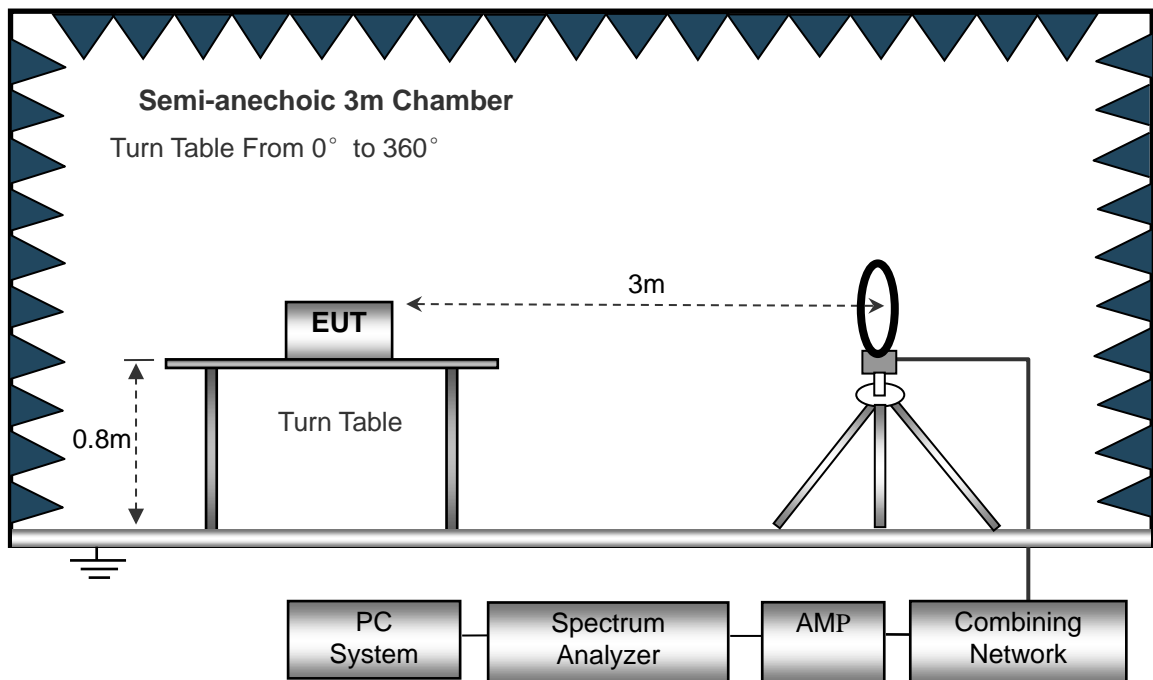
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



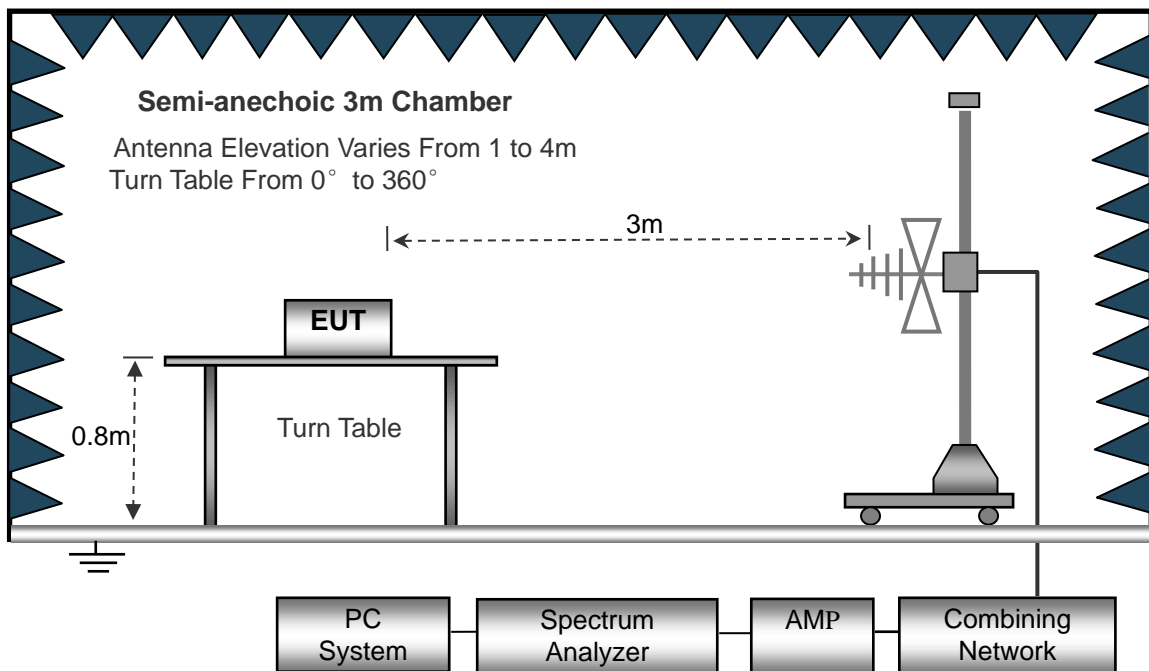The test setup for emission measurement from 30 MHz to 1 GHz.



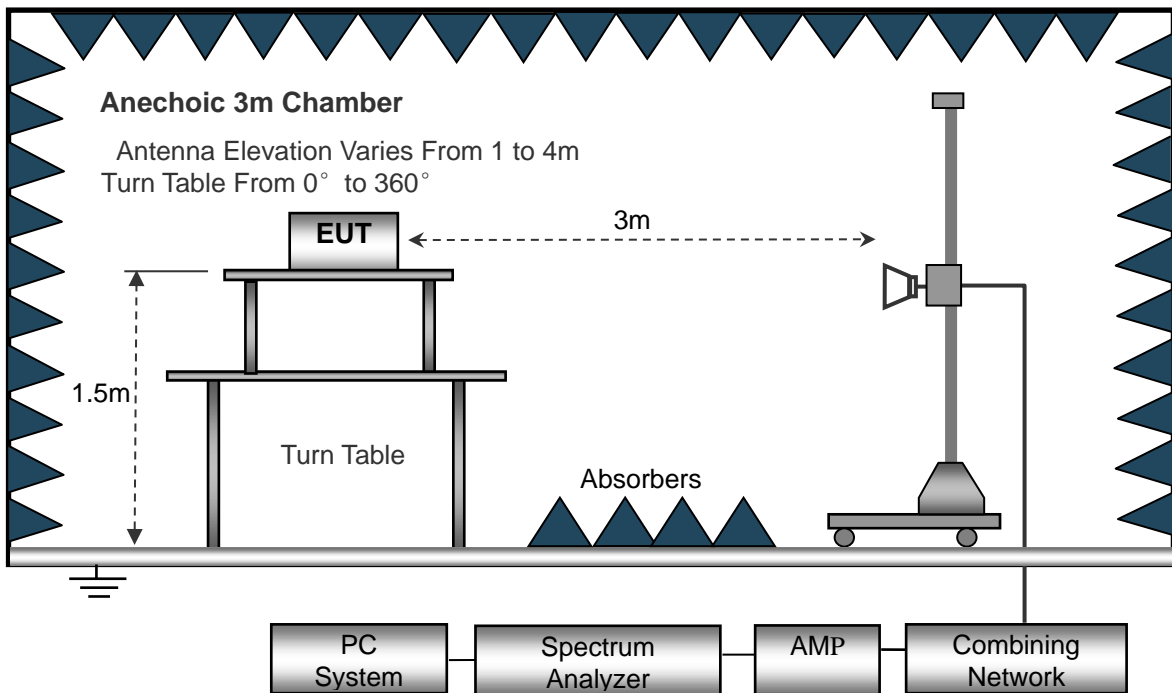The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- Antenna 0 (worst case)
- 5150-5250MHz

802.11a(worst case)			
Test Channel	5180MHz	Polarity:	Horizontal

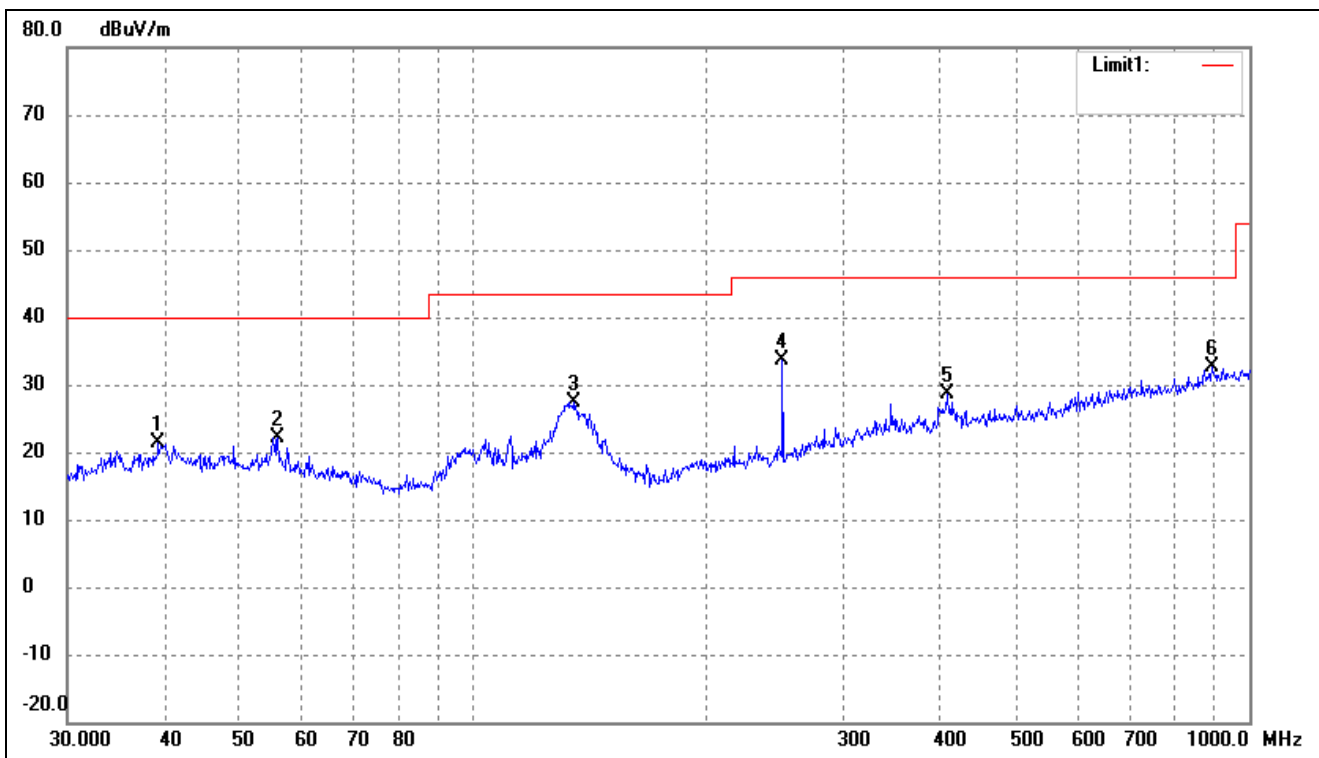


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.2991	29.34	-7.93	21.41	40.00	-18.59	-	-	peak
2	56.0007	31.20	-9.00	22.20	40.00	-17.80	-	-	peak
3	135.0319	38.91	-11.48	27.43	43.50	-16.07	-	-	peak
4	250.3012	40.77	-7.08	33.69	46.00	-12.31	-	-	peak
5	407.5145	32.27	-3.55	28.72	46.00	-17.28	-	-	peak
6	893.8567	28.92	3.79	32.71	46.00	-13.29	-	-	peak

802.11a(worst case)			
Test Channel	5180MHz	Polarity:	Vertical

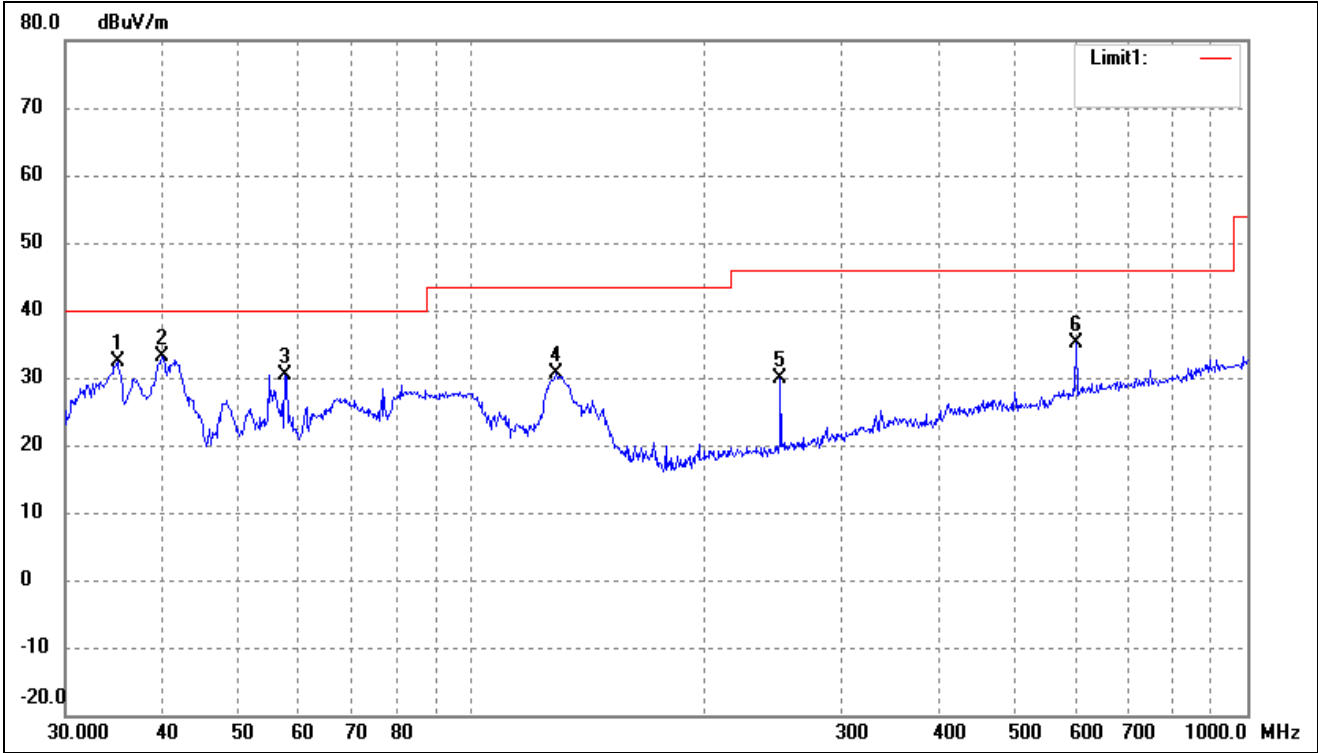


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.0048	41.35	-8.88	32.47	40.00	-7.53	-	-	peak
2	39.9942	40.97	-7.77	33.20	40.00	-6.80	-	-	peak
3	57.5939	39.57	-9.28	30.29	40.00	-9.71	-	-	peak
4	128.5630	41.41	-10.86	30.55	43.50	-12.95	-	-	peak
5	250.3012	36.93	-7.08	29.85	46.00	-16.15	-	-	peak
6	601.4265	35.51	-0.30	35.21	46.00	-10.79	-	-	peak

802.11a(worst case)			
Test Channel	5200MHz	Polarity:	Horizontal

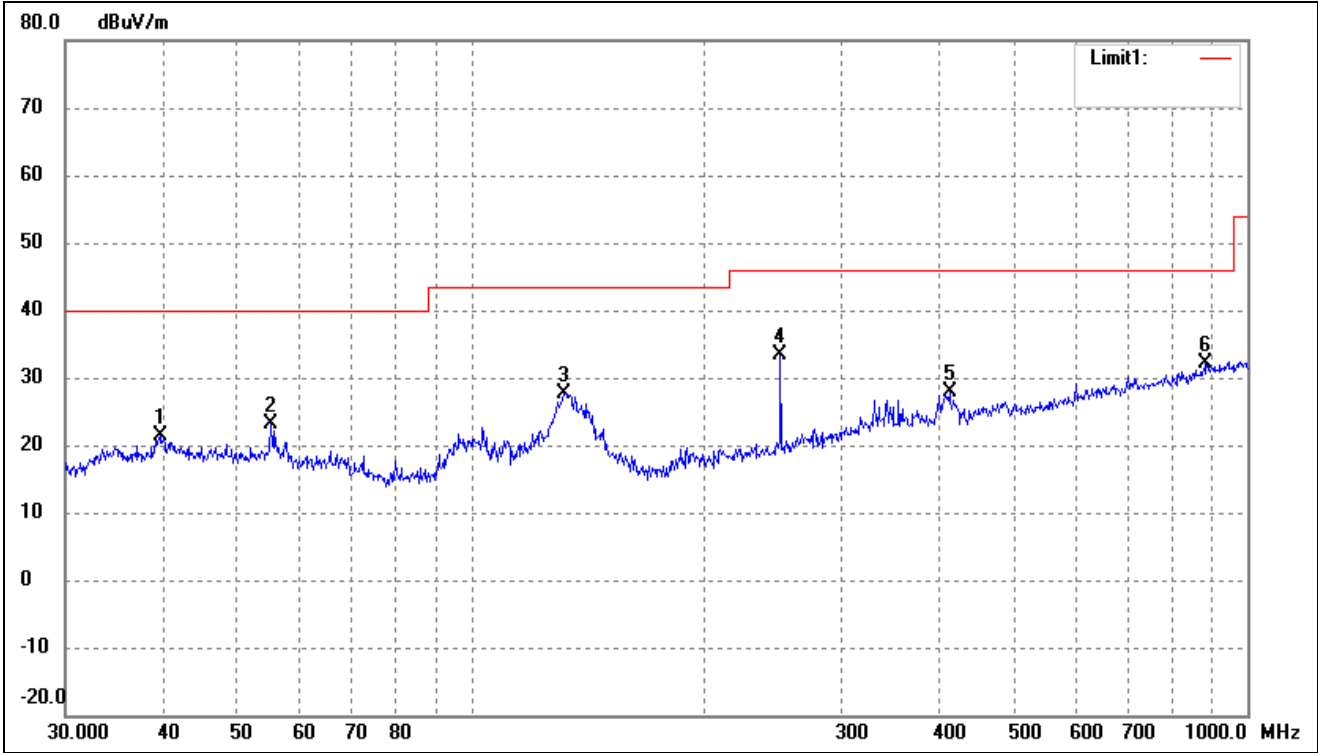


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.7147	29.13	-7.83	21.30	40.00	-18.70	-	-	peak
2	55.2207	31.98	-8.87	23.11	40.00	-16.89	-	-	peak
3	131.7577	38.99	-11.24	27.75	43.50	-15.75	-	-	peak
4	250.3012	40.35	-7.08	33.27	46.00	-12.73	-	-	peak
5	413.2706	31.35	-3.47	27.88	46.00	-18.12	-	-	peak
6	884.5029	28.43	3.62	32.05	46.00	-13.95	-	-	peak

802.11a(worst case)			
Test Channel	5200MHz	Polarity:	Vertical

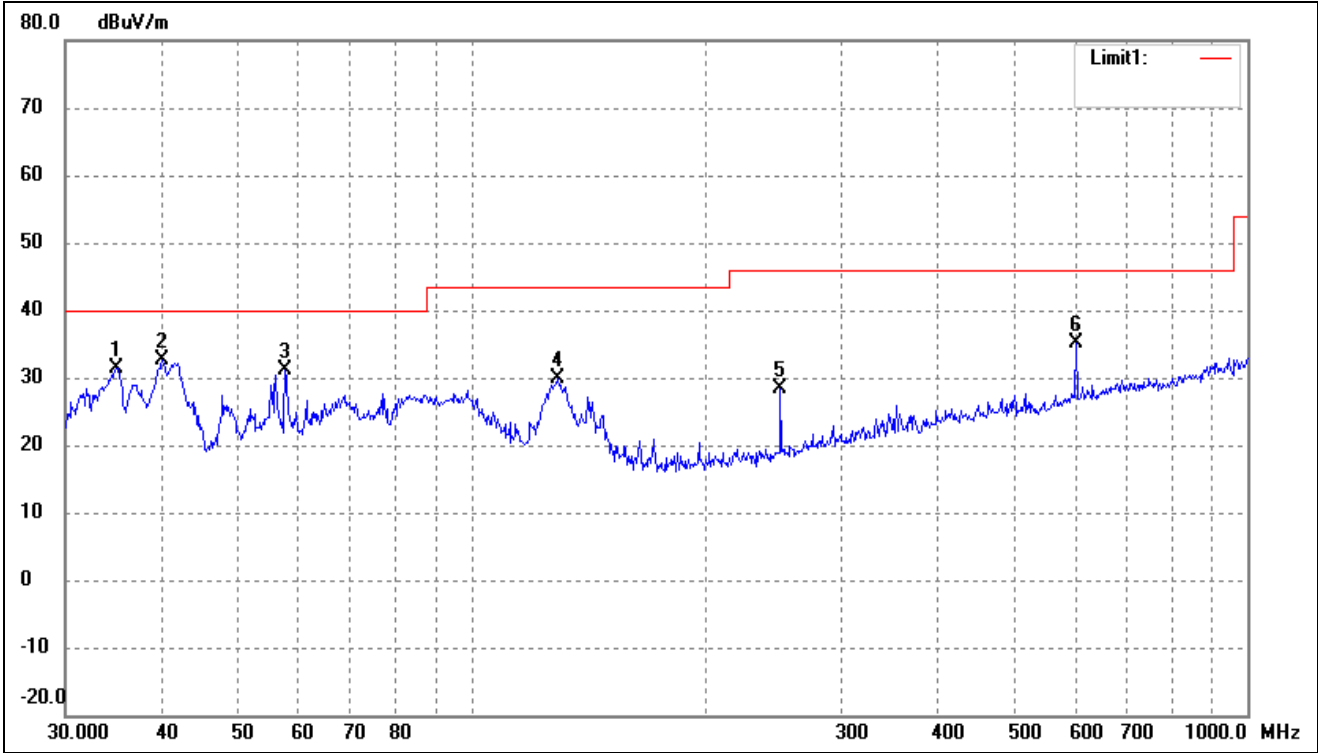


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.8823	40.28	-8.91	31.37	40.00	-8.63	-	-	peak
2	39.9942	40.29	-7.77	32.52	40.00	-7.48	-	-	peak
3	57.5939	40.49	-9.28	31.21	40.00	-8.79	-	-	peak
4	129.4678	40.99	-11.01	29.98	43.50	-13.52	-	-	peak
5	250.3012	35.49	-7.08	28.41	46.00	-17.59	-	-	peak
6	601.4265	35.45	-0.30	35.15	46.00	-10.85	-	-	peak

802.11a(worst case)			
Test Channel	5240MHz	Polarity:	Horizontal

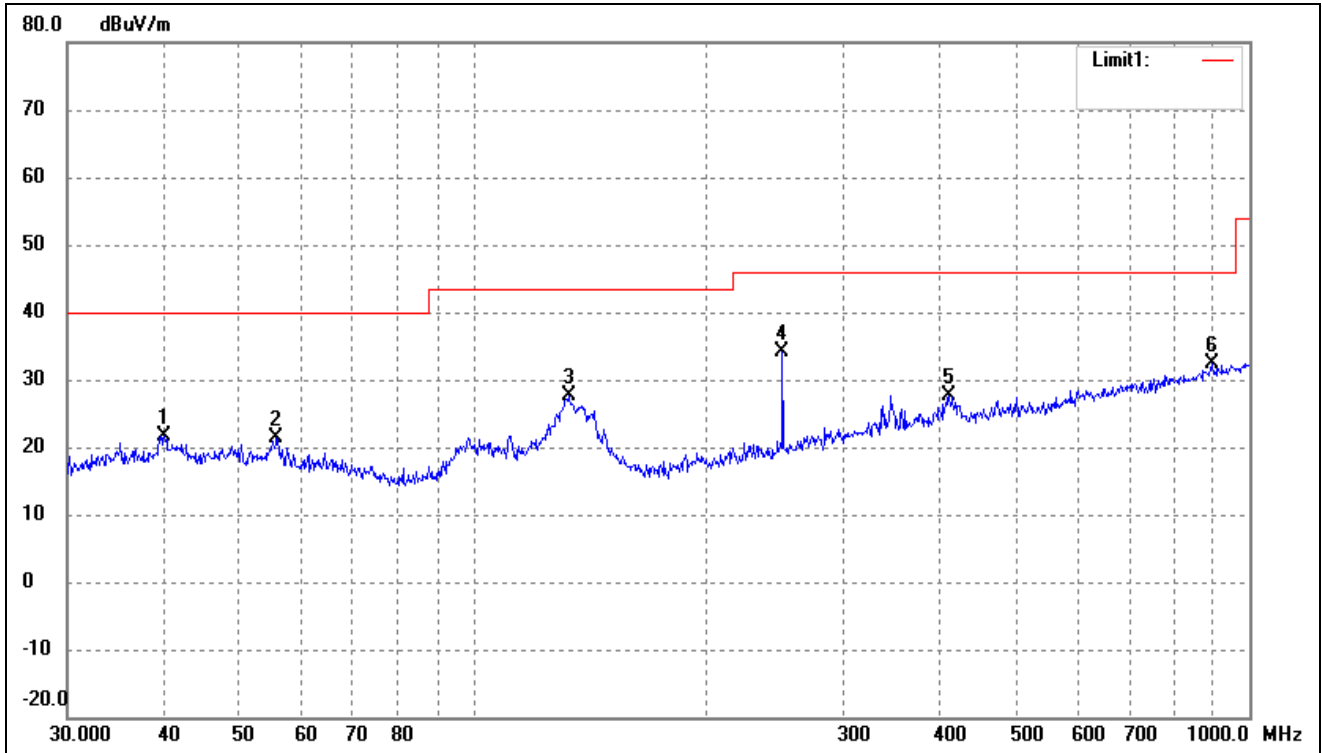

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.9942	29.34	-7.77	21.57	40.00	-18.43	-	-	peak
2	55.8047	30.22	-8.96	21.26	40.00	-18.74	-	-	peak
3	132.6850	39.02	-11.32	27.70	43.50	-15.80	-	-	peak
4	250.3012	41.12	-7.08	34.04	46.00	-11.96	-	-	peak
5	410.3825	31.06	-3.50	27.56	46.00	-18.44	-	-	peak
6	896.9965	28.58	3.85	32.43	46.00	-13.57	-	-	peak


802.11a(worst case)			
Test Channel	5240MHz	Polarity:	Vertical

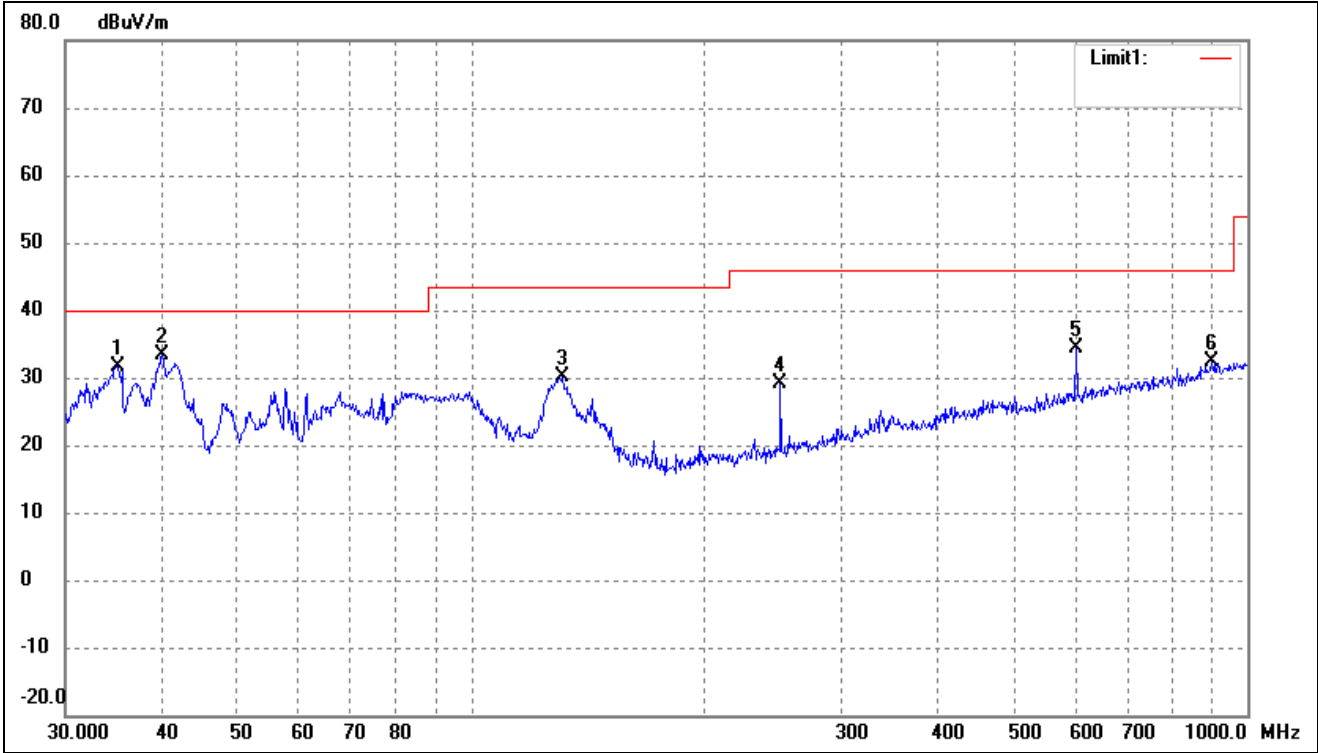

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.0048	40.50	-8.88	31.62	40.00	-8.38	-	-	peak
2	39.9942	41.19	-7.77	33.42	40.00	-6.58	-	-	peak
3	131.2965	41.43	-11.21	30.22	43.50	-13.28	-	-	peak
4	250.3012	36.10	-7.08	29.02	46.00	-16.98	-	-	peak
5	601.4265	34.67	-0.30	34.37	46.00	-11.63	-	-	peak
6	900.1474	28.52	3.90	32.42	46.00	-13.58	-	-	peak


➤ 5725-5850MHz

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Horizontal

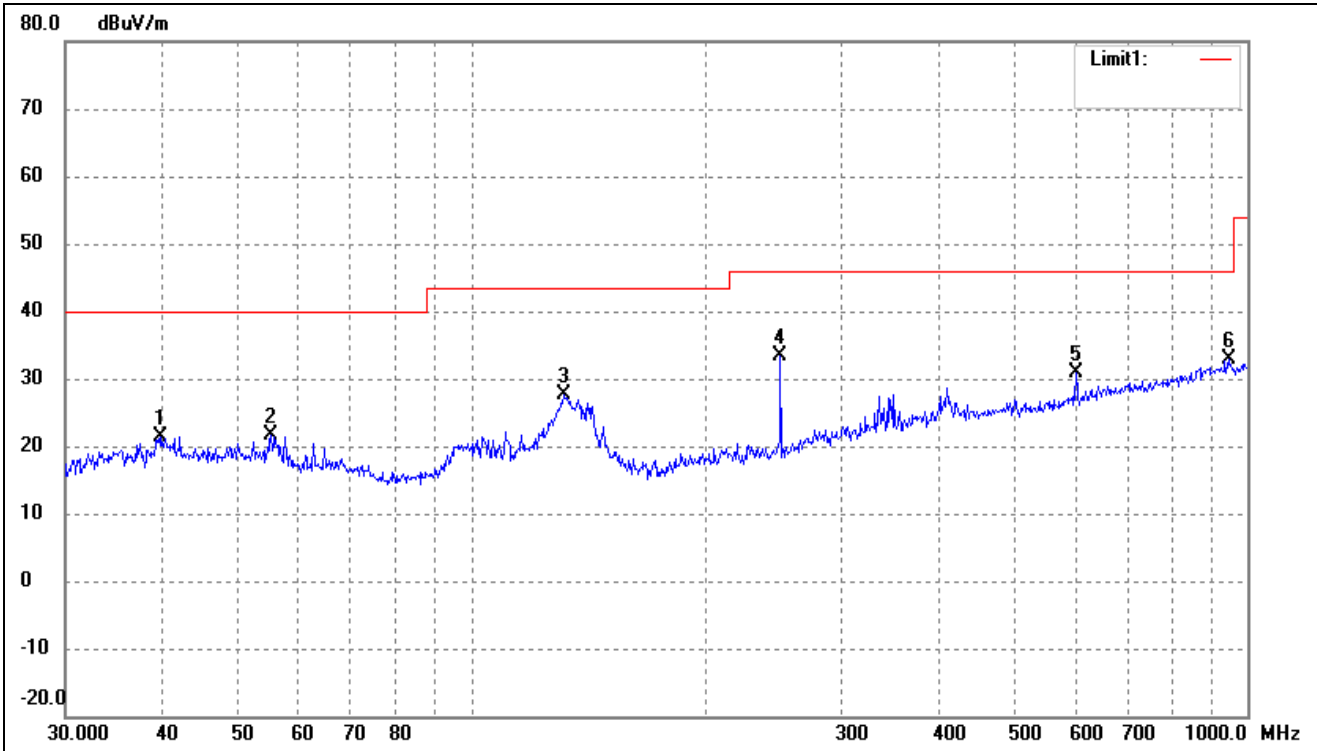


No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.8542	29.12	-7.80	21.32	40.00	-18.68	-	-	peak
2	55.2207	30.56	-8.87	21.69	40.00	-18.31	-	-	peak
3	131.7577	38.99	-11.24	27.75	43.50	-15.75	-	-	peak
4	250.3012	40.48	-7.08	33.40	46.00	-12.60	-	-	peak
5	601.4265	31.19	-0.30	30.89	46.00	-15.11	-	-	peak
6	945.4399	28.71	4.22	32.93	46.00	-13.07	-	-	peak

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical

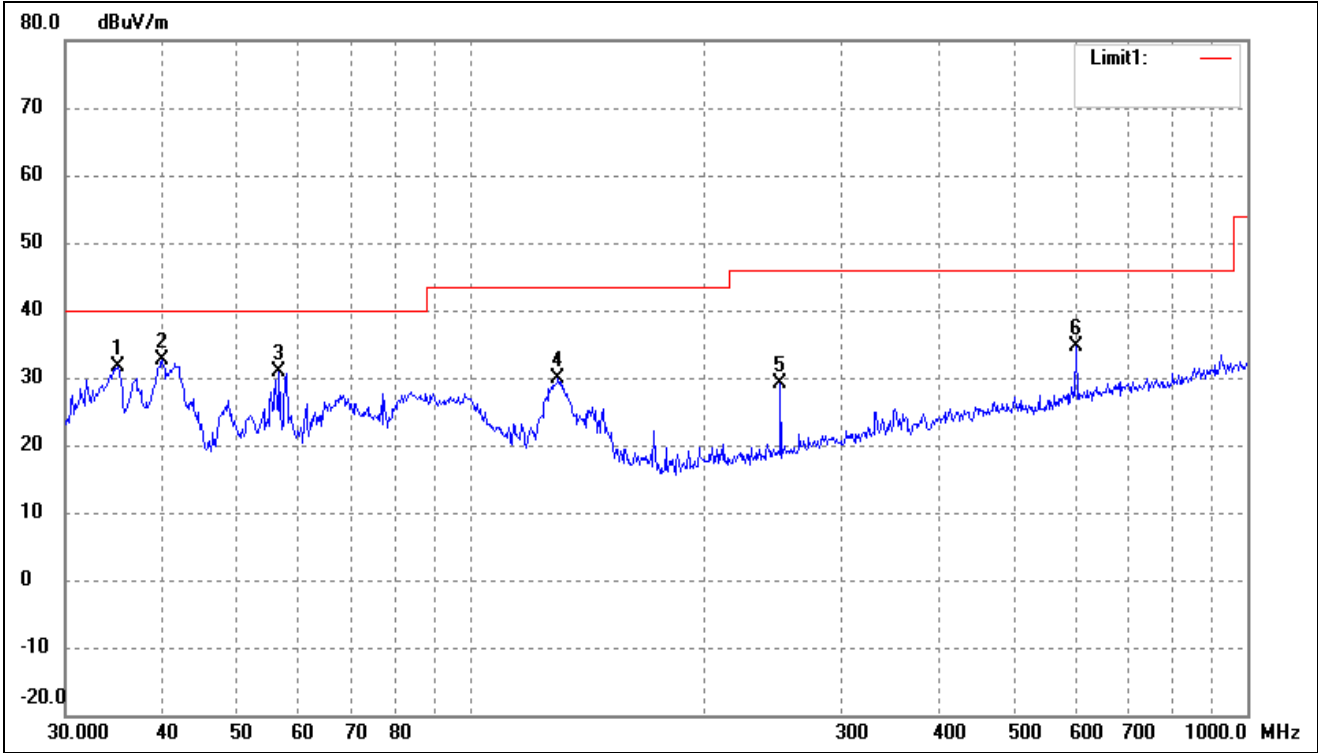


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.1278	40.46	-8.85	31.61	40.00	-8.39	-	-	peak
2	39.9942	40.37	-7.77	32.60	40.00	-7.40	-	-	peak
3	56.5929	40.02	-9.10	30.92	40.00	-9.08	-	-	peak
4	129.4678	40.78	-11.01	29.77	43.50	-13.73	-	-	peak
5	250.3012	36.19	-7.08	29.11	46.00	-16.89	-	-	peak
6	601.4265	34.86	-0.30	34.56	46.00	-11.44	-	-	peak

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Horizontal

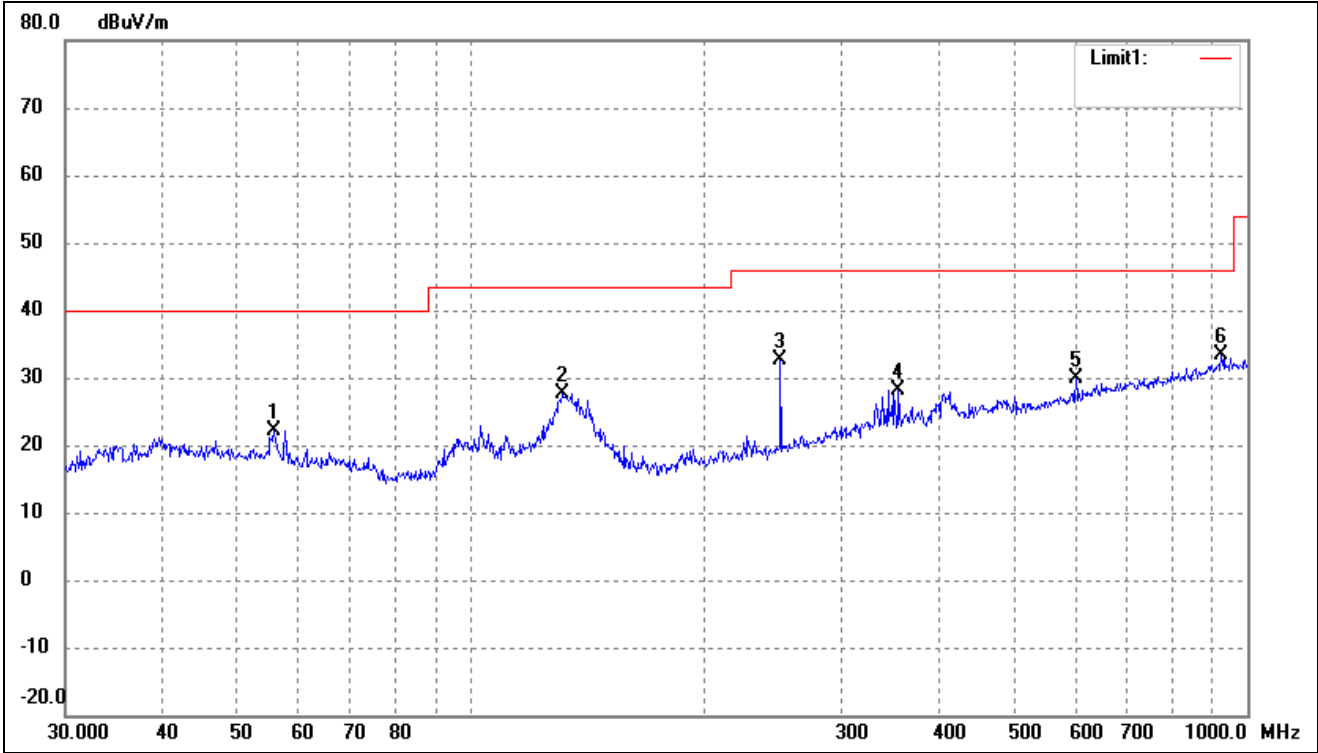


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.6094	31.07	-8.93	22.14	40.00	-17.86	-	-	peak
2	130.8369	38.84	-11.18	27.66	43.50	-15.84	-	-	peak
3	250.3012	39.77	-7.08	32.69	46.00	-13.31	-	-	peak
4	355.4273	32.59	-4.39	28.20	46.00	-17.80	-	-	peak
5	601.4265	30.23	-0.30	29.93	46.00	-16.07	-	-	peak
6	925.7563	29.19	4.08	33.27	46.00	-12.73	-	-	peak

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Vertical

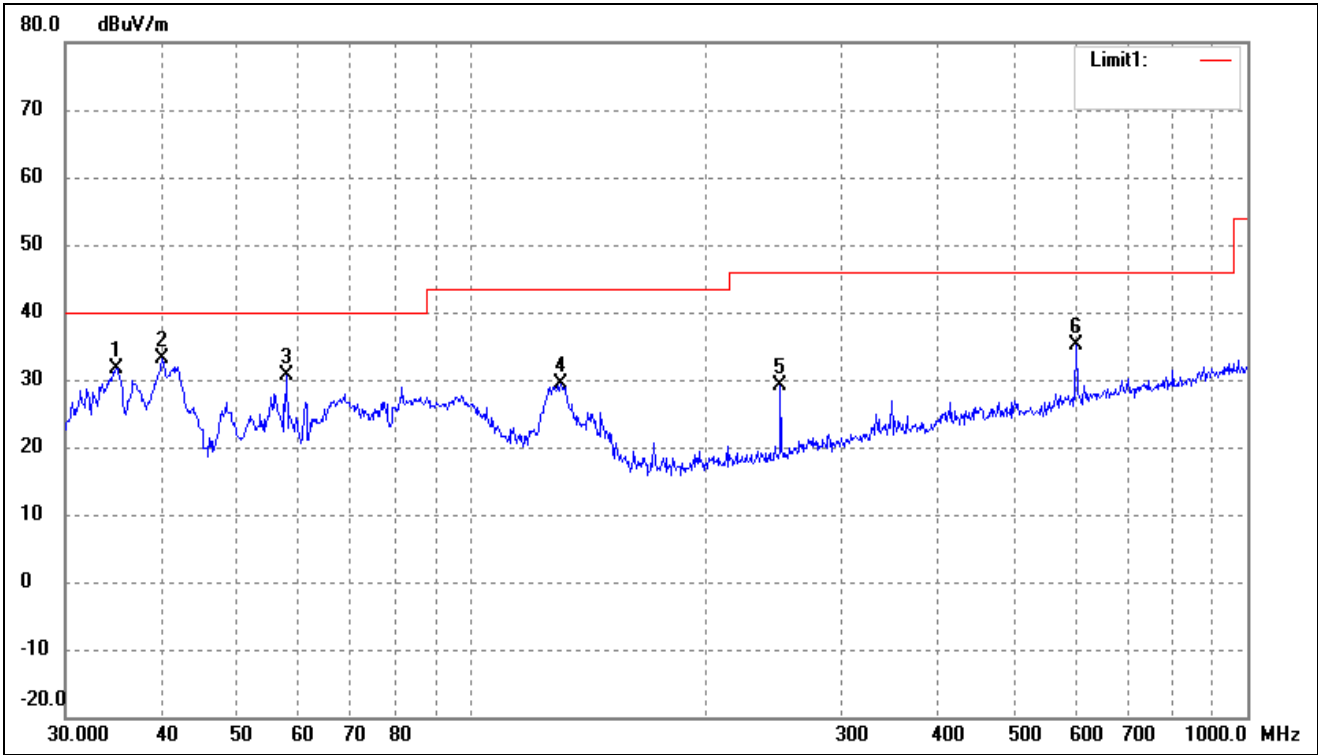


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.8823	40.45	-8.91	31.54	40.00	-8.46	-	-	peak
2	39.9942	40.84	-7.77	33.07	40.00	-6.93	-	-	peak
3	57.7962	40.01	-9.31	30.70	40.00	-9.30	-	-	peak
4	130.3789	40.51	-11.14	29.37	43.50	-14.13	-	-	peak
5	250.3012	36.15	-7.08	29.07	46.00	-16.93	-	-	peak
6	601.4265	35.31	-0.30	35.01	46.00	-10.99	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

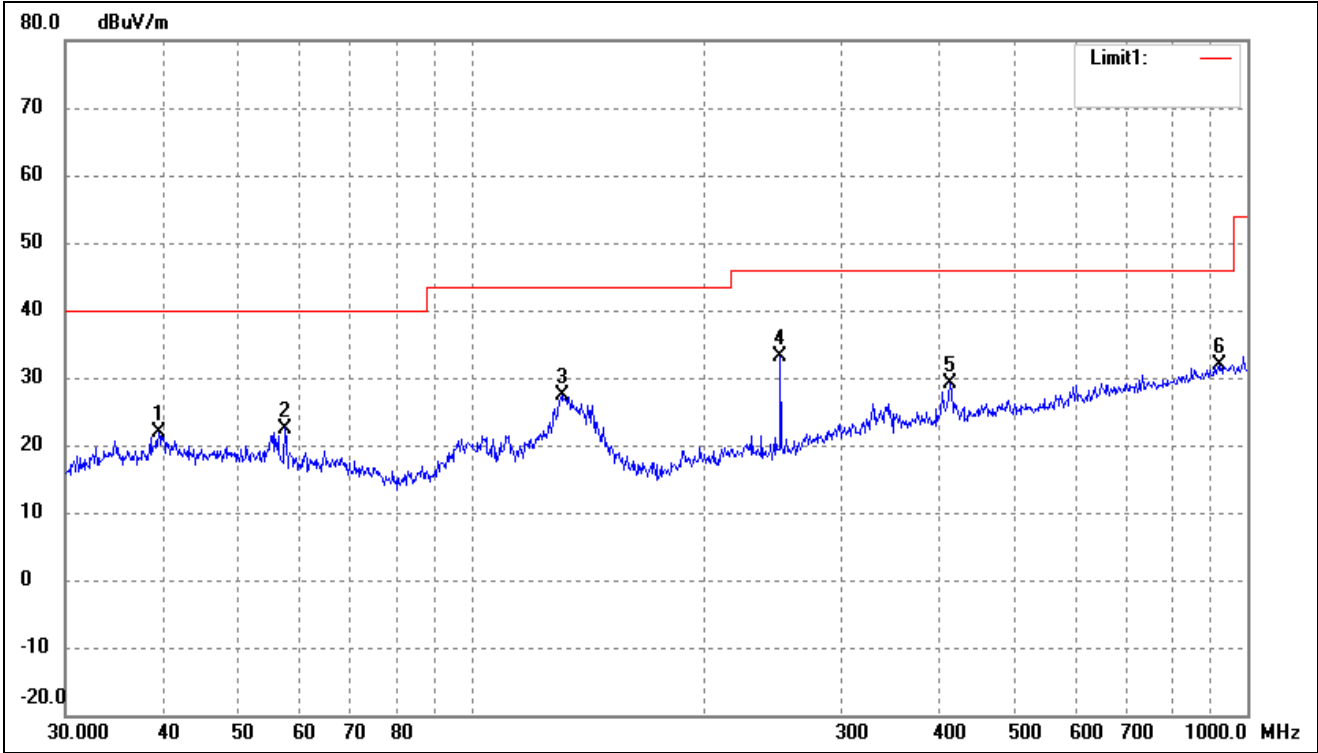

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.5757	29.66	-7.87	21.79	40.00	-18.21	-	-	peak
2	57.5939	31.78	-9.28	22.50	40.00	-17.50	-	-	peak
3	130.8369	38.58	-11.18	27.40	43.50	-16.10	-	-	peak
4	250.3012	40.26	-7.08	33.18	46.00	-12.82	-	-	peak
5	414.7223	32.60	-3.45	29.15	46.00	-16.85	-	-	peak
6	919.2866	27.81	4.04	31.85	46.00	-14.15	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

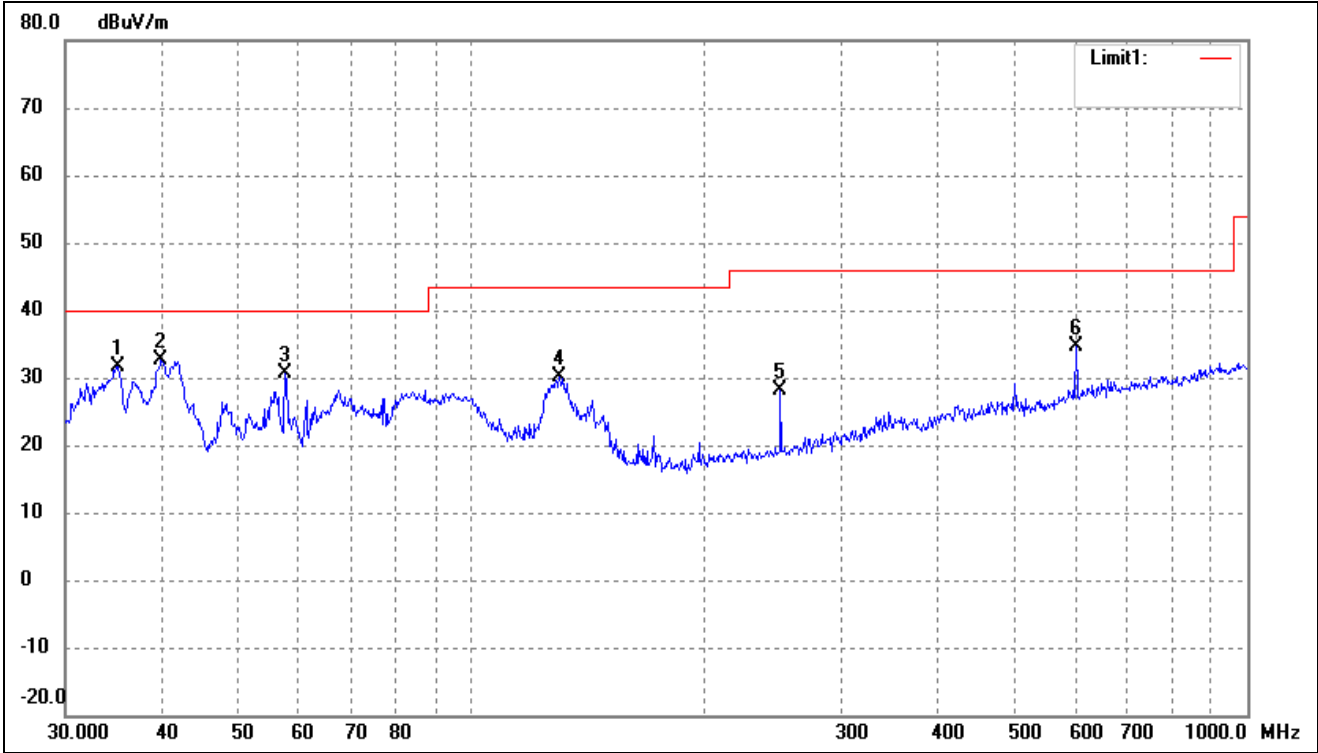


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.0048	40.60	-8.88	31.72	40.00	-8.28	-	-	peak
2	39.8542	40.32	-7.80	32.52	40.00	-7.48	-	-	peak
3	57.5939	39.83	-9.28	30.55	40.00	-9.45	-	-	peak
4	129.9226	41.34	-11.10	30.24	43.50	-13.26	-	-	peak
5	250.3012	35.26	-7.08	28.18	46.00	-17.82	-	-	peak
6	601.4265	34.96	-0.30	34.66	46.00	-11.34	-	-	peak

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emission above 1GHz
- Antenna 0(worst case)


BAND 1

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.5-5.15GHz	Polarity:	Vertical(worst case)

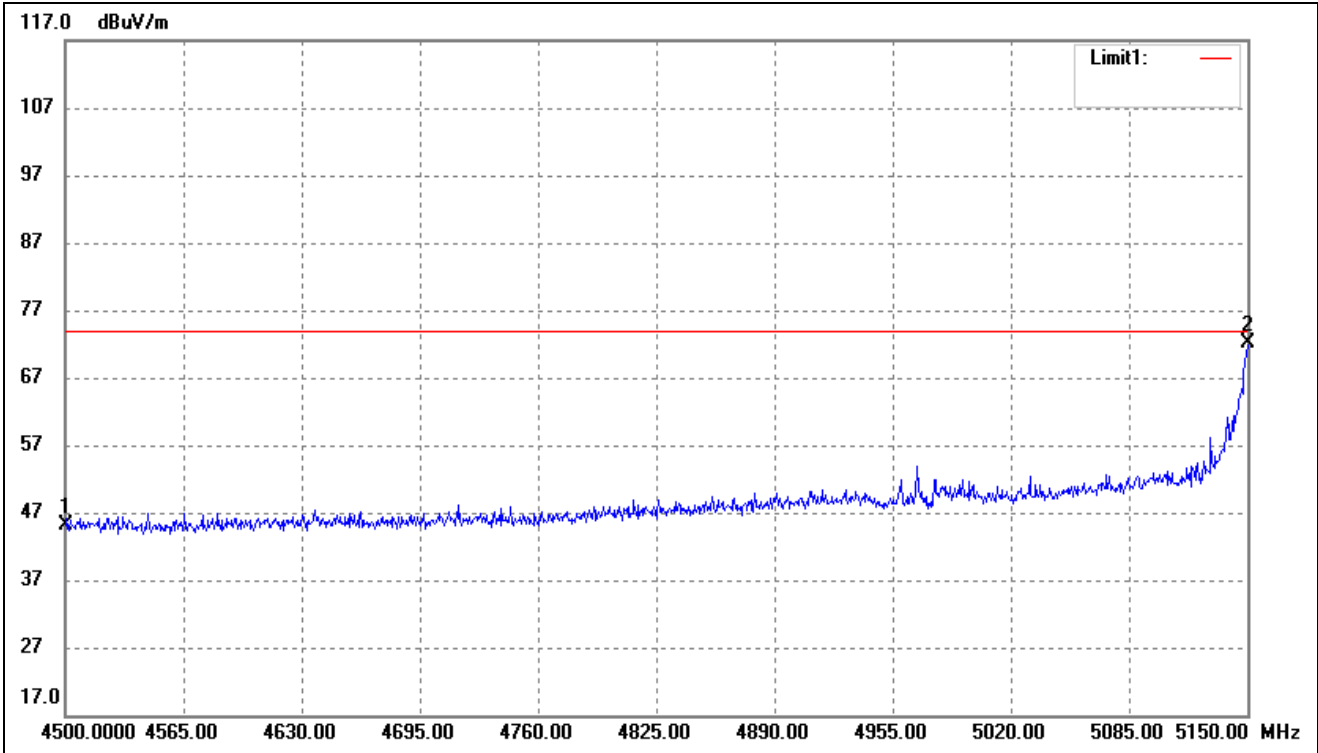

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	51.61	-6.52	45.09	74.00	-28.91	-	-	peak
2	5150.000	76.82	-4.77	72.05	74.00	-1.95	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.5-5.15GHz	Polarity:	Vertical(worst case)

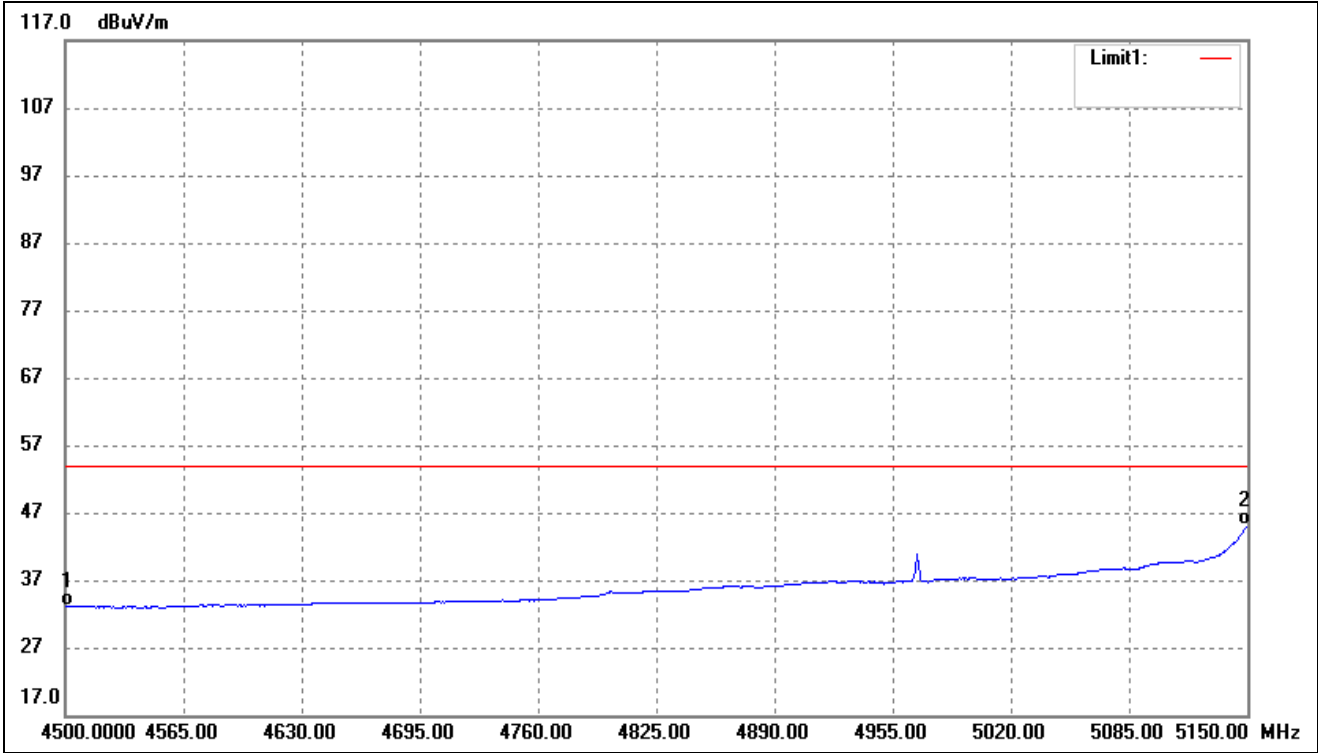

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	39.71	-6.52	33.19	54.00	-20.81	-	-	AVG
2	5150.000	49.94	-4.77	45.17	54.00	-8.83	-	-	AVG

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- The worse mode Antenna 0
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.86	7.11	61.97	74.00	-12.03	H	PK
15540	36.43	8.22	44.65	54.00	-9.35	H	AV
10360	57.44	7.11	64.55	74.00	-9.45	H	PK
15540	39.59	8.22	47.81	54.00	-6.19	H	AV
Middle Channel (5200MHz)							
10400	56.25	7.22	63.47	74.00	-10.53	H	PK
15600	33.49	8.67	42.16	54.00	-11.84	H	AV
10400	57.13	7.22	64.35	74.00	-9.65	H	PK
15600	38.86	8.67	47.53	54.00	-6.47	H	AV
High Channel (5240MHz)							
10480	56.73	7.69	64.42	74.00	-9.58	H	PK
15720	38.94	8.93	47.87	54.00	-6.13	H	AV
10480	58.31	7.69	66.00	74.00	-8.00	H	PK
15720	37.10	8.93	46.03	54.00	-7.97	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	54.92	9.45	64.37	74.00	-9.63	H	PK
17235	31.67	10.36	42.03	54.00	-11.97	H	AV
11490	54.60	9.45	64.05	74.00	-9.95	V	PK
17235	35.55	10.36	45.91	54.00	-8.09	V	AV
Middle Channel (5785MHz)							
11570	56.25	9.62	65.87	74.00	-8.13	H	PK
17355	35.63	10.67	46.30	54.00	-7.70	H	AV
11570	54.00	9.62	63.62	74.00	-10.38	V	PK
17355	35.25	10.67	45.92	54.00	-8.08	V	AV
High Channel (5825MHz)							
11650	54.35	9.84	64.19	74.00	-9.81	H	PK
17475	35.89	10.95	46.84	54.00	-7.16	H	AV
11650	55.08	9.84	64.92	74.00	-9.08	V	PK
17475	33.80	10.95	44.75	54.00	-9.25	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.24	-27
Highest	Above 5350	-44.81	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.51	-27
	5650 to 5700	-34.23	-27 to -17
	5700 to 5720	-26.42	-17 to 15.6
	5720 to 5725	-18.66	15.6 to 27
Highest	5850 to 5855	-13.93	27 to 15.6
	5855 to 5875	-24.45	15.6 to -17
	5875 to 5925	-35.31	-17 to -27
	Above 5925	-40.16	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	57.62	7.11	64.73	74.00	-9.27	H	PK
15540	39.67	8.22	47.89	54.00	-6.11	H	AV
10360	58.92	7.11	66.03	74.00	-7.97	V	PK
15540	38.99	8.22	47.21	54.00	-6.79	V	AV
Middle Channel (5200MHz)							
10400	56.05	7.22	63.27	74.00	-10.73	H	PK
15600	37.14	8.67	45.81	54.00	-8.19	H	AV
10400	57.95	7.22	65.17	74.00	-8.83	V	PK
15600	34.44	8.67	43.11	54.00	-10.89	V	AV
High Channel (5240MHz)							
10480	58.19	7.69	65.88	74.00	-8.12	H	PK
15720	32.72	8.93	41.65	54.00	-12.35	H	AV
10480	60.99	7.69	68.68	74.00	-5.32	V	PK
15720	37.61	8.93	46.54	54.00	-7.46	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	55.03	9.45	64.48	74.00	-9.52	H	PK
17235	36.85	10.36	47.21	54.00	-6.79	H	AV
11490	54.47	9.45	63.92	74.00	-10.08	V	PK
17235	34.42	10.36	44.78	54.00	-9.22	V	AV
Middle Channel (5785MHz)							
11570	61.26	9.62	70.88	74.00	-3.12	H	PK
17355	39.75	10.67	50.42	54.00	-3.58	H	AV
11570	58.51	9.62	68.13	74.00	-5.87	V	PK
17355	39.66	10.67	50.33	54.00	-3.67	V	AV
High Channel (5825MHz)							
11650	56.97	9.84	66.81	74.00	-7.19	H	PK
17475	35.15	10.95	46.10	54.00	-7.90	H	AV
11650	59.00	9.84	68.84	74.00	-5.16	V	PK
17475	35.18	10.95	46.13	54.00	-7.87	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.35	-27
Highest	Above 5350	-40.17	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-48.13	-27
	5650 to 5700	-33.22	-27 to -17
	5700 to 5720	-28.19	-17 to 15.6
	5720 to 5725	-16.57	15.6 to 27
Highest	5850 to 5855	-17.55	27 to 15.6
	5855 to 5875	-26.78	15.6 to -17
	5875 to 5925	-38.25	-17 to -27
	Above 5925	-41.40	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	54.82	7.11	61.93	74.00	-12.07	H	PK
15540	34.41	8.22	42.63	54.00	-11.37	H	AV
10360	57.69	7.11	64.80	74.00	-9.20	V	PK
15540	40.27	8.22	48.49	54.00	-5.51	V	AV
Middle Channel (5200MHz)							
10400	55.45	7.22	62.67	74.00	-11.33	H	PK
15600	35.94	8.67	44.61	54.00	-9.39	H	AV
10400	58.52	7.22	65.74	74.00	-8.26	V	PK
15600	37.19	8.67	45.86	54.00	-8.14	V	AV
High Channel (5240MHz)							
10480	55.20	7.69	62.89	74.00	-11.11	H	PK
15720	37.47	8.93	46.40	54.00	-7.60	H	AV
10480	59.11	7.69	66.80	74.00	-7.20	V	PK
15720	33.30	8.93	42.23	54.00	-11.77	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	56.78	9.45	66.23	74.00	-7.77	H	PK
17235	36.28	10.36	46.64	54.00	-7.36	H	AV
11490	54.67	9.45	64.12	74.00	-9.88	V	PK
17235	32.31	10.36	42.67	54.00	-11.33	V	AV
Middle Channel (5785MHz)							
11570	52.30	9.62	61.92	74.00	-12.08	H	PK
17355	36.93	10.67	47.60	54.00	-6.40	H	AV
11570	58.00	9.62	67.62	74.00	-6.38	V	PK
17355	35.25	10.67	45.92	54.00	-8.08	V	AV
High Channel (5825MHz)							
11650	55.79	9.84	65.63	74.00	-8.37	H	PK
17475	32.94	10.95	43.89	54.00	-10.11	H	AV
11650	56.56	9.84	66.40	74.00	-7.60	V	PK
17475	35.57	10.95	46.52	54.00	-7.48	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.15	-27
Highest	Above 5350	-38.10	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.49	-27
	5650 to 5700	-33.64	-27 to -17
	5700 to 5720	-28.36	-17 to 15.6
	5720 to 5725	-17.29	15.6 to 27
Highest	5850 to 5855	-13.59	27 to 15.6
	5855 to 5875	-25.60	15.6 to -17
	5875 to 5925	-32.61	-17 to -27
	Above 5925	-37.34	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	58.75	7.25	66.00	74.00	-8.00	H	PK
15570	37.00	8.33	45.33	54.00	-8.67	H	AV
10380	56.86	7.25	64.11	74.00	-9.89	V	PK
15570	38.05	8.33	46.38	54.00	-7.62	V	AV
High Channel (5230MHz)							
10460	58.72	7.54	66.26	74.00	-7.74	H	PK
15690	36.48	8.86	45.34	54.00	-8.66	H	AV
10460	59.08	7.54	66.62	74.00	-7.38	V	PK
15690	41.20	8.86	50.06	54.00	-3.94	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.13	9.65	65.78	74.00	-8.22	H	PK
17265	34.29	10.87	45.16	54.00	-8.84	H	AV
11510	55.59	9.65	65.24	74.00	-8.76	V	PK
17265	36.14	10.87	47.01	54.00	-6.99	V	AV
High Channel (5795MHz)							
11590	58.43	9.81	68.24	74.00	-5.76	H	PK
17385	34.49	10.89	45.38	54.00	-8.62	H	AV
11590	55.78	9.81	65.59	74.00	-8.41	V	PK
17385	35.86	10.89	46.75	54.00	-7.25	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.04	-27
Highest	Above 5350	-42.44	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-48.07	-27
	5650 to 5700	-35.35	-27 to -17
	5700 to 5720	-26.90	-17 to 15.6
	5720 to 5725	-17.35	15.6 to 27
Highest	5850 to 5855	-16.08	27 to 15.6
	5855 to 5875	-24.34	15.6 to -17
	5875 to 5925	-33.96	-17 to -27
	Above 5925	-38.62	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.70	7.25	63.95	74.00	-10.05	H	PK
15570	37.30	8.33	45.63	54.00	-8.37	H	AV
10380	59.32	7.25	66.57	74.00	-7.43	V	PK
15570	38.34	8.33	46.67	54.00	-7.33	V	AV
High Channel (5230MHz)							
10460	55.09	7.54	62.63	74.00	-11.37	H	PK
15690	38.94	8.86	47.80	54.00	-6.20	H	AV
10460	59.80	7.54	67.34	74.00	-6.66	V	PK
15690	37.17	8.86	46.03	54.00	-7.97	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.32	9.65	65.97	74.00	-8.03	H	PK
17265	35.62	10.87	46.49	54.00	-7.51	H	AV
11510	55.77	9.65	65.42	74.00	-8.58	V	PK
17265	36.70	10.87	47.57	54.00	-6.43	V	AV
High Channel (5795MHz)							
11590	53.40	9.81	63.21	74.00	-10.79	H	PK
17385	34.78	10.89	45.67	54.00	-8.33	H	AV
11590	56.29	9.81	66.10	74.00	-7.90	V	PK
17385	35.64	10.89	46.53	54.00	-7.47	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.31	-27
Highest	Above 5350	-40.17	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-48.23	-27
	5650 to 5700	-36.89	-27 to -17
	5700 to 5720	-29.06	-17 to 15.6
	5720 to 5725	-16.48	15.6 to 27
Highest	5850 to 5855	-12.94	27 to 15.6
	5855 to 5875	-24.84	15.6 to -17
	5875 to 5925	-37.26	-17 to -27
	Above 5925	-38.63	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	56.98	7.33	64.31	74.00	-9.69	H	PK
15630	38.09	8.75	46.84	54.00	-7.16	H	AV
10420	55.68	7.33	63.01	74.00	-10.99	V	PK
15630	34.90	8.75	43.65	54.00	-10.35	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	54.03	9.54	63.57	74.00	-10.43	H	PK
17325	38.45	10.59	49.04	54.00	-4.96	H	AV
11550	56.52	9.54	66.06	74.00	-7.94	V	PK
17325	33.44	10.59	44.03	54.00	-9.97	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.10	-27
Highest	Above 5350	-33.67	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.94	-27
	5650 to 5700	-34.92	-27 to -17
	5700 to 5720	-25.61	-17 to 15.6
	5720 to 5725	-17.44	15.6 to 27
Highest	5850 to 5855	-14.82	27 to 15.6
	5855 to 5875	-24.78	15.6 to -17
	5875 to 5925	-36.32	-17 to -27
	Above 5925	-37.70	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	56.79	7.33	64.12	74.00	-9.88	H	PK
15630	39.26	8.75	48.01	54.00	-5.99	H	AV
10420	55.66	7.33	62.99	74.00	-11.01	V	PK
15630	35.92	8.75	44.67	54.00	-9.33	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	52.66	9.54	62.20	74.00	-11.80	H	PK
17325	35.15	10.59	45.74	54.00	-8.26	H	AV
11550	57.62	9.54	67.16	74.00	-6.84	V	PK
17325	34.45	10.59	45.04	54.00	-8.96	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-33.05	-27
Highest	Above 5350	-30.71	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-44.98	-27
	5650 to 5700	-36.69	-27 to -17
	5700 to 5720	-29.52	-17 to 15.6
	5720 to 5725	-18.73	15.6 to 27
Highest	5850 to 5855	-15.17	27 to 15.6
	5855 to 5875	-27.54	15.6 to -17
	5875 to 5925	-34.47	-17 to -27
	Above 5925	-38.22	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

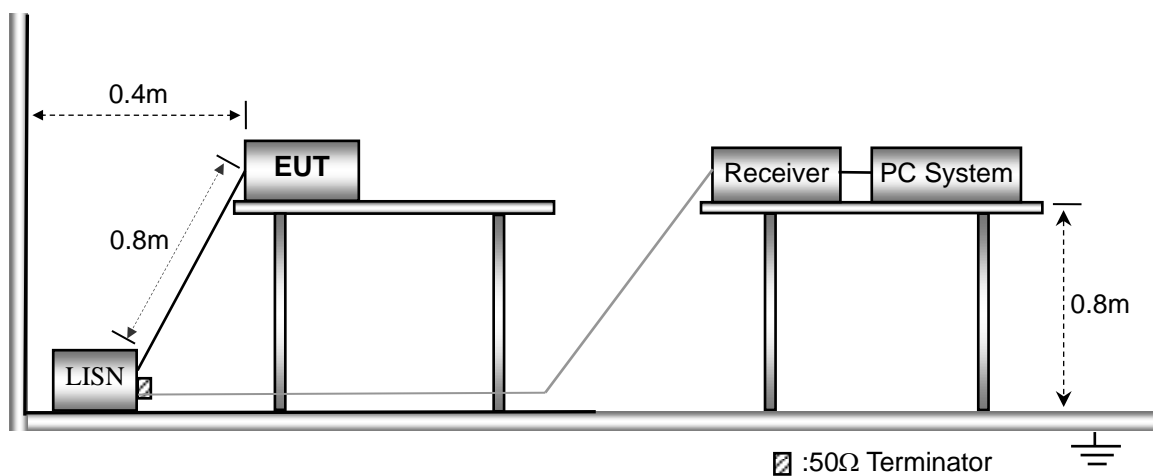
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

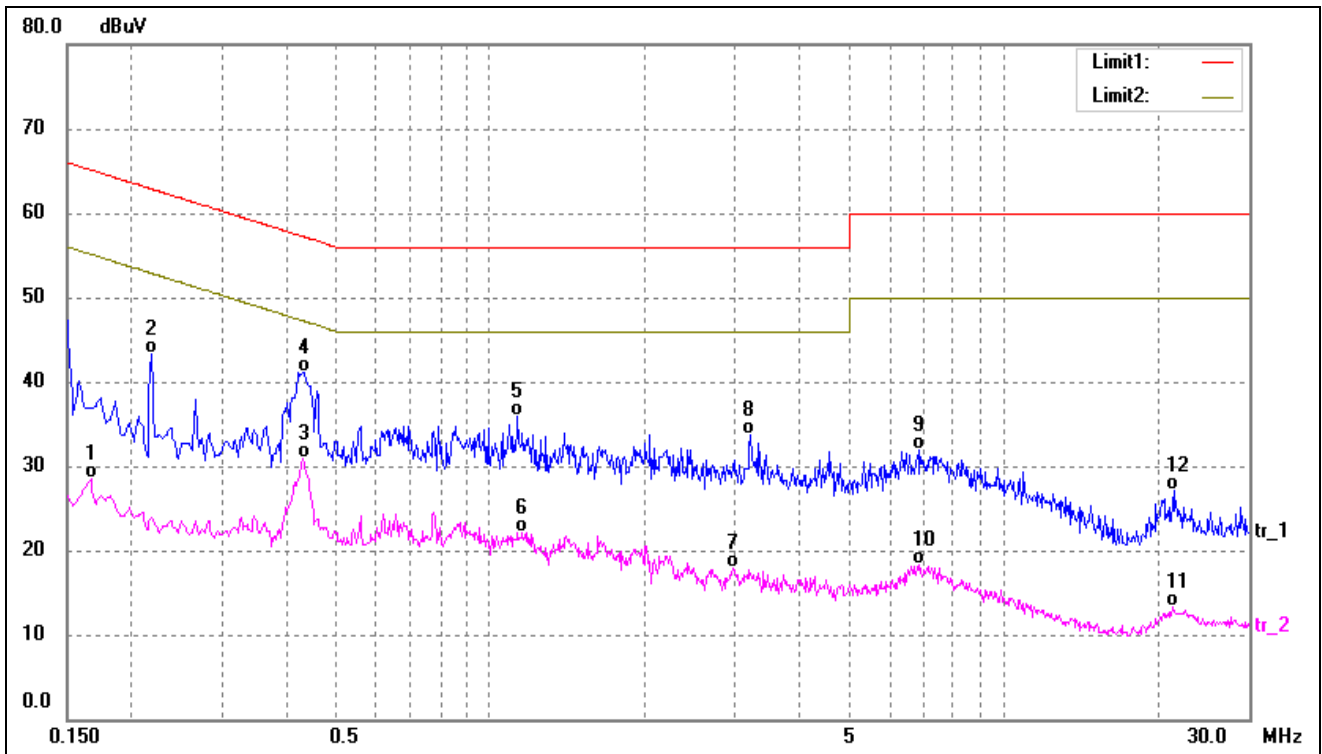

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	18.11	10.31	28.42	55.15	-26.73	AVG
2	0.2180	32.94	10.28	43.22	62.89	-19.67	QP
3	0.4300	20.65	10.23	30.88	47.25	-16.37	AVG
4*	0.4340	30.89	10.23	41.12	57.18	-16.06	QP
5	1.1340	25.79	10.15	35.94	56.00	-20.06	QP
6	1.1580	12.03	10.16	22.19	46.00	-23.81	AVG
7	2.9660	7.54	10.28	17.82	46.00	-28.18	AVG
8	3.2100	23.33	10.28	33.61	56.00	-22.39	QP
9	6.8260	21.52	10.34	31.86	60.00	-28.14	QP
10	6.8580	7.88	10.34	18.22	50.00	-31.78	AVG
11	21.2660	2.98	10.37	13.35	50.00	-36.65	AVG
12	21.3740	16.72	10.37	27.09	60.00	-32.91	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

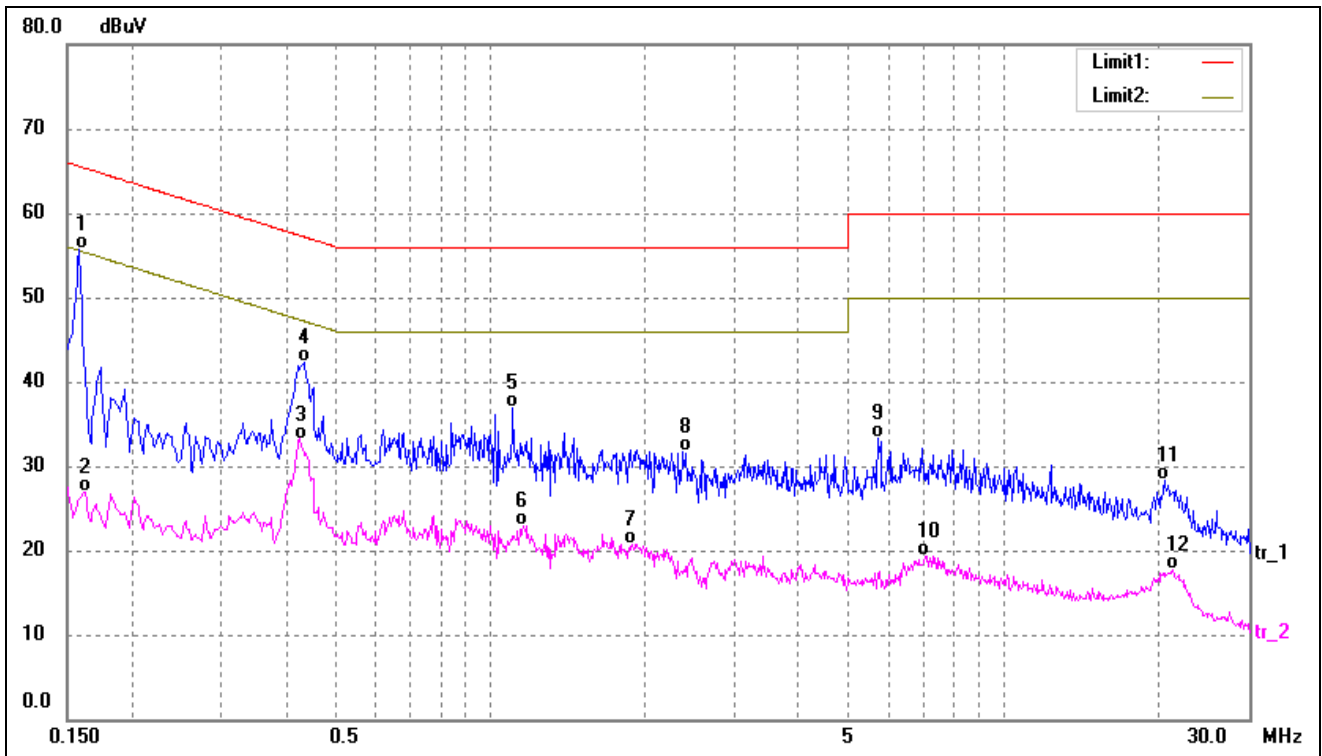

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	45.30	10.31	55.61	65.56	-9.95	QP
2	0.1620	16.69	10.31	27.00	55.36	-28.36	AVG
3	0.4260	22.98	10.22	33.20	47.33	-14.13	AVG
4	0.4340	32.08	10.23	42.31	57.18	-14.87	QP
5	1.1060	26.81	10.15	36.96	56.00	-19.04	QP
6	1.1620	12.83	10.16	22.99	46.00	-23.01	AVG
7	1.8940	10.53	10.24	20.77	46.00	-25.23	AVG
8	2.3740	21.40	10.26	31.66	56.00	-24.34	QP
9	5.6940	23.07	10.33	33.40	60.00	-26.60	QP
10	7.0300	8.92	10.34	19.26	50.00	-30.74	AVG
11	20.5500	17.89	10.37	28.26	60.00	-31.74	QP
12	21.3500	7.37	10.37	17.74	50.00	-32.26	AVG

APPENDIX SUMMARY

Project No.	WTD22X11236852W	Test Engineer	BAldi
Start date	2022/9/16	Finish date	2023/1/3
Temperature	23°C	Humidity	53%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	6.05	4.09	/	11.00
	5200	5.79	4.03	/	11.00
	5240	5.57	2.53	/	11.00
802.11n-HT20	5180	4.92	3.28	9.41	10.66
	5200	4.80	3.24	9.32	10.66
	5240	4.97	1.71	8.87	10.66
802.11n-HT40	5190	0.78	0.06	5.67	10.66
	5230	0.54	-1.65	4.81	10.66
802.11ac-VH80	5210	-2.17	-4.57	2.02	10.66
802.11ax-HE20	5180	4.29	3.44	9.12	10.66
	5200	3.99	3.03	8.77	10.66
	5240	3.28	1.70	7.79	10.66
802.11ax-HE40	5190	-0.32	-1.34	4.43	10.66
	5230	-0.73	-2.17	3.84	10.66
802.11ax-HE80	5210	-3.32	-4.29	1.45	10.66




Power Spectral Density				
U-NII-3: 5725-5850MHz				
Operating mode	Test Channel	ANT 0 dBm/1MHz	ANT 1 dBm/1MHz	Limit dBm/500kHz
802.11a	5745	1.61	2.60	30.00
	5785	1.31	2.34	30.00
	5825	0.82	2.20	30.00




Note: The test based on RBW=1MHz.




Power Spectral Density				
U-NII-3: 5725-5850MHz				
Operating mode	Test Channel	ANT 0 dBm/1MHz	ANT 1 dBm/1MHz	Limit dBm/500kHz
802.11n-HT20	5745	0.55	1.51	29.66
	5785	0.23	1.15	29.66
	5825	-0.04	0.99	29.66
802.11n HT40	5755	-2.35	-2.17	29.66
	5795	-2.83	-2.28	29.66
802.11ac VH80	5775	-4.69	-5.01	29.66
802.11ax-HE20	5745	0.58	0.49	29.66
	5785	0.12	-0.21	29.66
	5825	-0.44	-0.18	29.66
802.11ax-HE40	5755	-2.31	-2.69	29.66
	5795	-2.83	-2.44	29.66
802.11ax-HE80	5775	-5.68	-4.81	29.66




Note: The test based on RBW=1MHz.

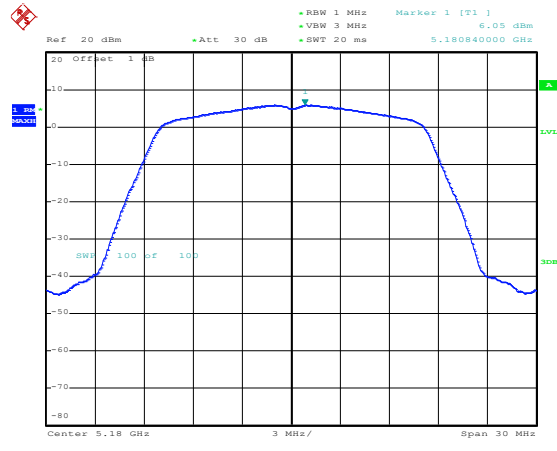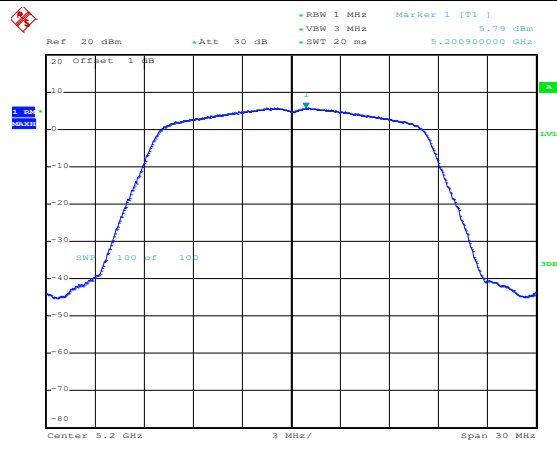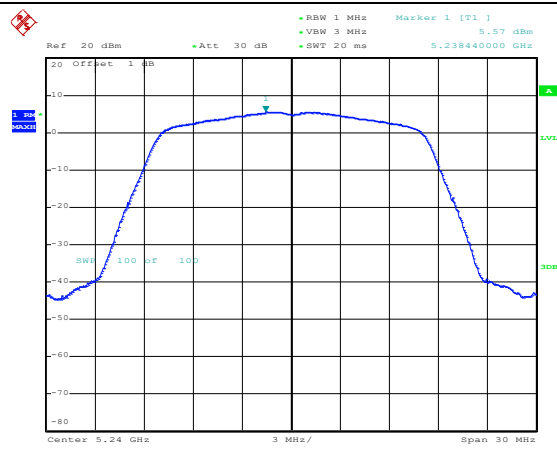ANT 0
5150-5250MHz


<p>802.11a-Low</p>	 <p>Date: 22.SEP.2022 08:53:26</p>
<p>802.11a-Middle</p>	 <p>Date: 22.SEP.2022 08:53:58</p>
<p>802.11a-High</p>	 <p>Date: 22.SEP.2022 08:54:37</p>
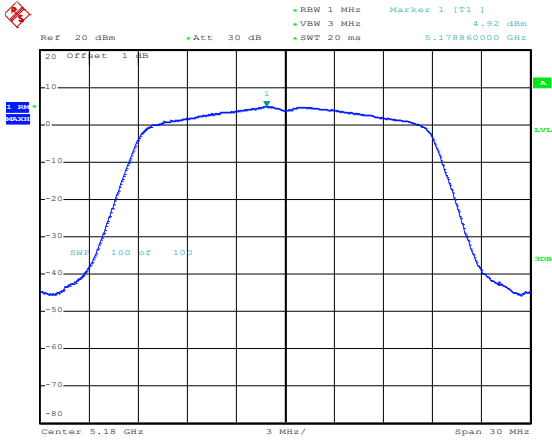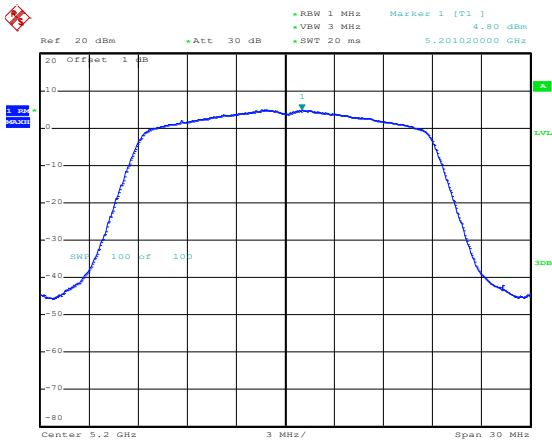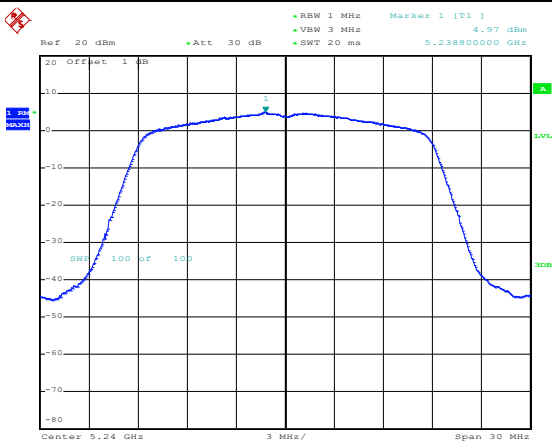
<p>802.11n-HT20-Low</p>	 <p>Date: 22.SEP.2022 08:55:25</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 22.SEP.2022 08:55:48</p>
<p>802.11n-HT20-High</p>	 <p>Date: 22.SEP.2022 08:56:14</p>
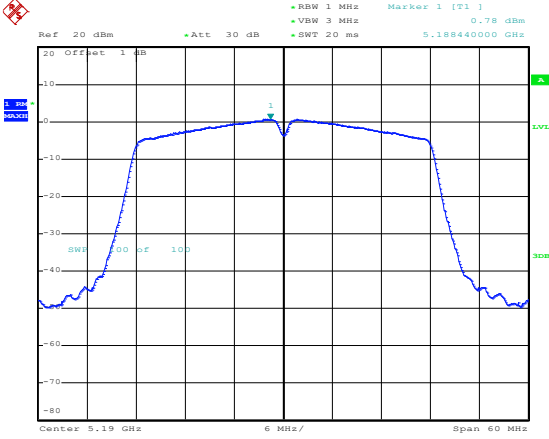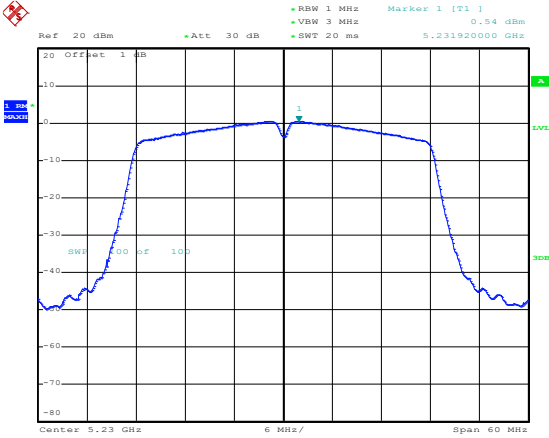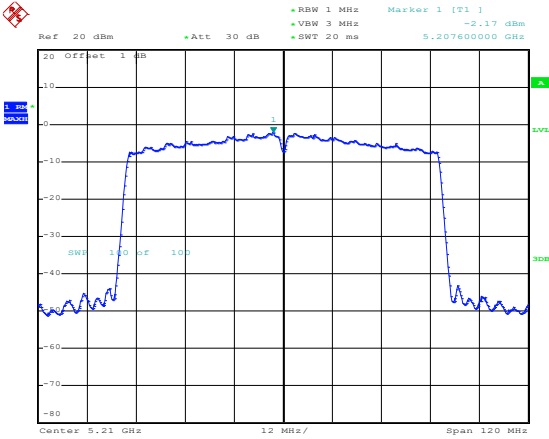
<p>802.11n-HT40-Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 0.78 dBm VBW 3 MHz SWT 20 ms 5.188440000 GHz</p> <p>Center 5.19 GHz 6 MHz/ Span 60 MHz</p> <p>Date: 22.SEP.2022 08:57:29</p>
<p>802.11n-HT40-High</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 0.54 dBm VBW 3 MHz SWT 20 ms 5.231920000 GHz</p> <p>Center 5.23 GHz 6 MHz/ Span 60 MHz</p> <p>Date: 22.SEP.2022 08:57:59</p>
<p>802.11ac-VH80</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.17 dBm VBW 3 MHz SWT 20 ms 5.207600000 GHz</p> <p>Center 5.21 GHz 12 MHz/ Span 120 MHz</p> <p>Date: 22.SEP.2022 08:58:51</p>

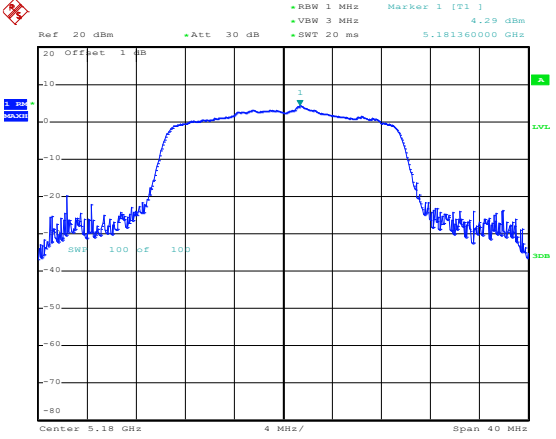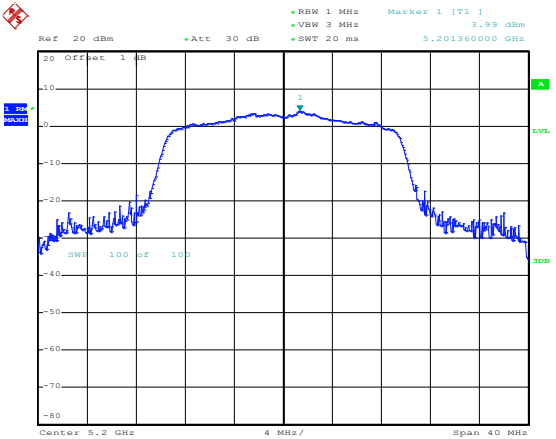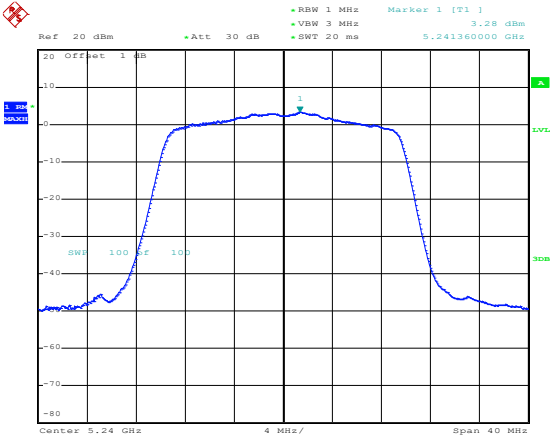
<p>802.11ax-HE20-Low</p>	 <p>Date: 22.SEP.2022 09:00:05</p>
<p>802.11ax-HE20-Middle</p>	 <p>Date: 22.SEP.2022 09:00:43</p>
<p>802.11ax-HE20-High</p>	 <p>Date: 22.SEP.2022 09:01:34</p>

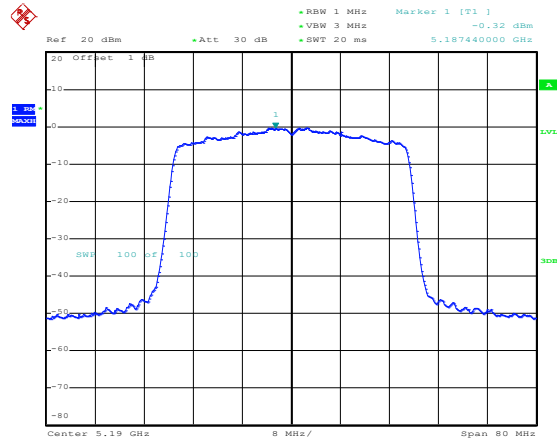802.11ax-HE40-Low




Date: 22.SEP.2022 09:02:16

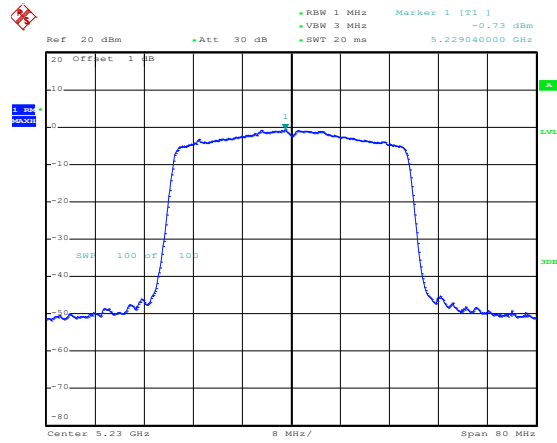802.11ax-HE40-High






Date: 22.SEP.2022 09:02:41



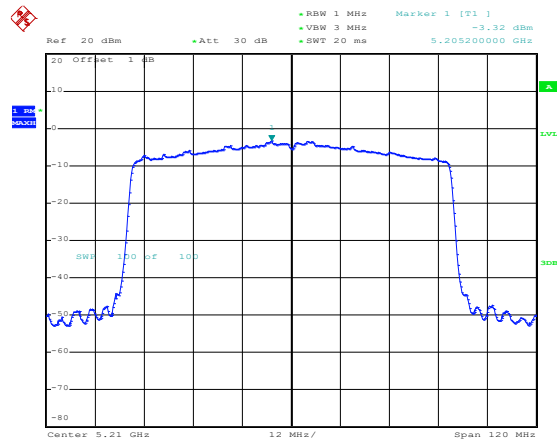
802.11ax-HE80






Date: 22.SEP.2022 09:03:33

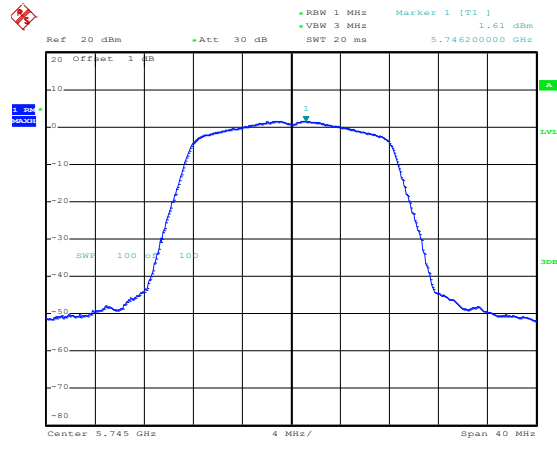
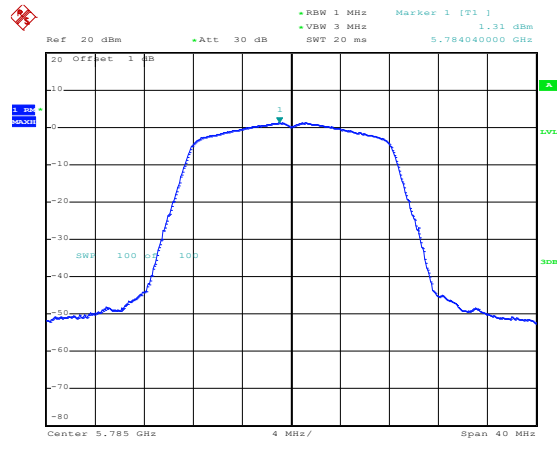
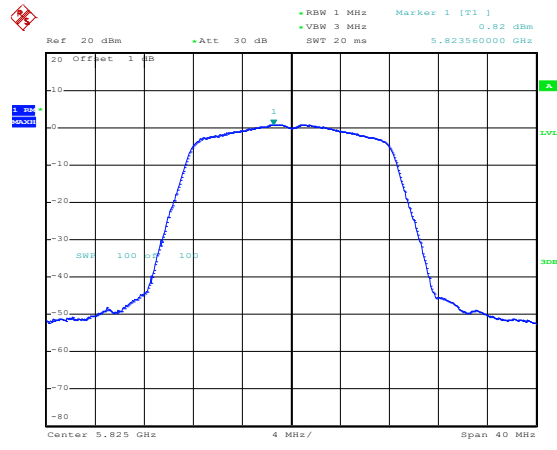
5725-5850MHz

<p>802.11a-Low</p>	 <p>Date: 22.SEP.2022 10:02:45</p>
<p>802.11a-Middle</p>	 <p>Date: 22.SEP.2022 10:03:24</p>
<p>802.11a-High</p>	 <p>Date: 22.SEP.2022 10:03:48</p>

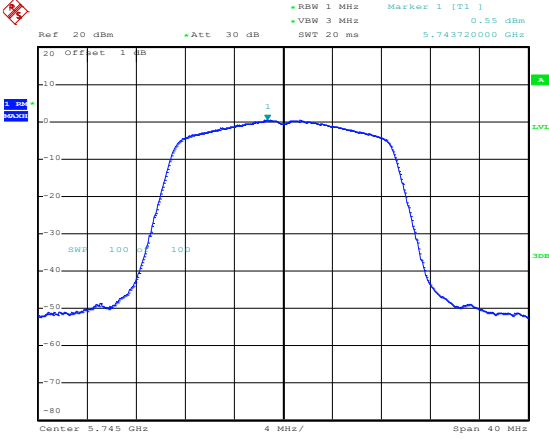
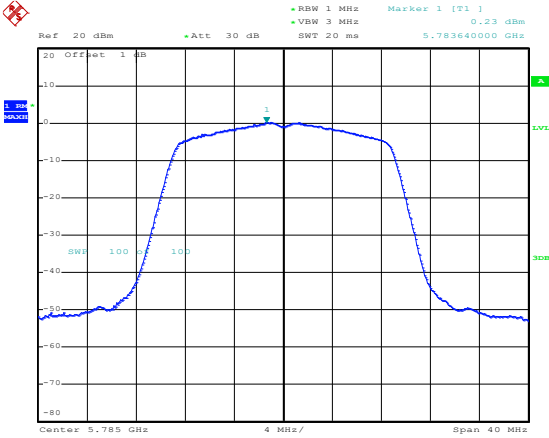
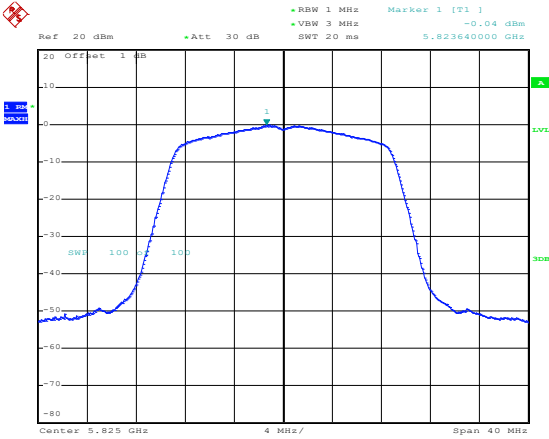
<p>802.11n-HT20-Low</p>	 <p>Date: 22.SEP.2022 10:04:22</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 22.SEP.2022 10:04:44</p>
<p>802.11n-HT20-High</p>	 <p>Date: 22.SEP.2022 10:05:12</p>

<p>802.11n-HT40-Low</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.35 dBm VBW 3 MHz SWT 20 ms 5.753720000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 10:05:58</p>
<p>802.11n-HT40-High</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.83 dBm VBW 3 MHz SWT 20 ms 5.797240000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 10:06:22</p>
<p>802.11ac-VH80</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -4.69 dBm VBW 3 MHz SWT 20 ms 5.778840000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.775 GHz 12 MHz/ Span 120 MHz</p> <p>Date: 22.SEP.2022 10:07:20</p>

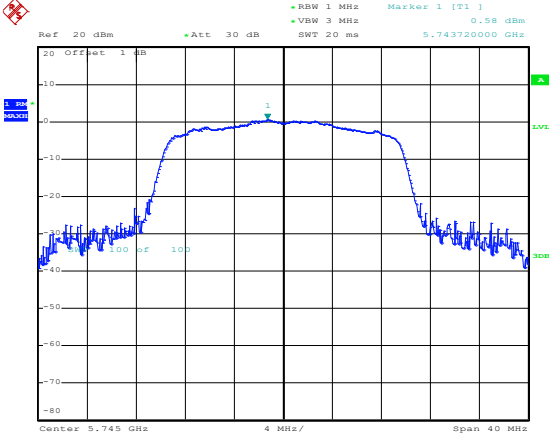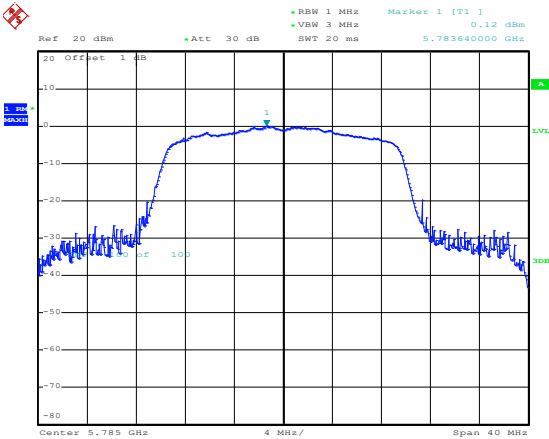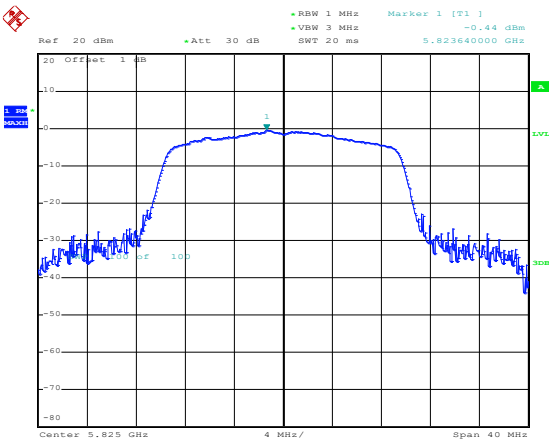
<p>802.11ax-HE20-Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 0.58 dBm VBW 3 MHz SWT 20 ms 5.743720000 GHz</p> <p>20 Offset 1 dB -10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 22.SEP.2022 10:00:40</p>
<p>802.11ax-HE20-Middle</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 0.12 dBm VBW 3 MHz SWT 20 ms 5.783640000 GHz</p> <p>20 Offset 1 dB -10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 22.SEP.2022 10:01:06</p>
<p>802.11ax-HE20-High</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -0.44 dBm VBW 3 MHz SWT 20 ms 5.823640000 GHz</p> <p>20 Offset 1 dB -10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 22.SEP.2022 10:01:38</p>
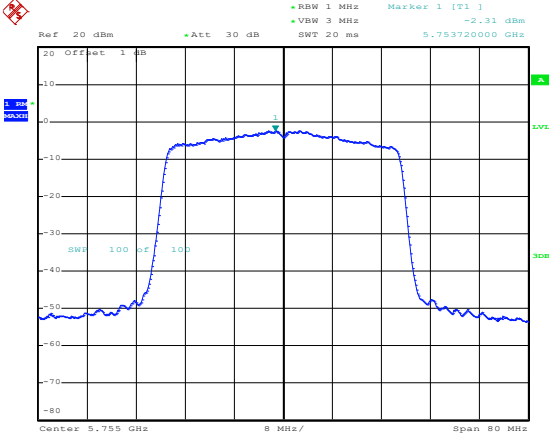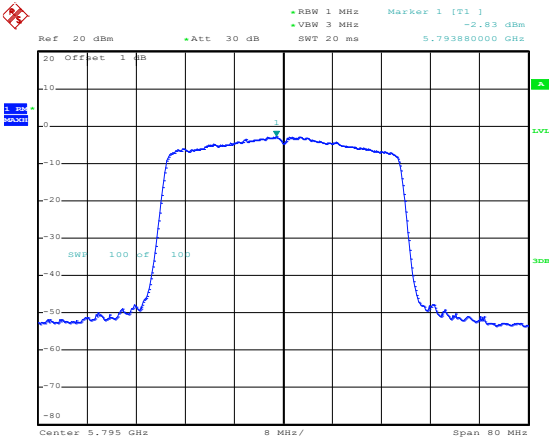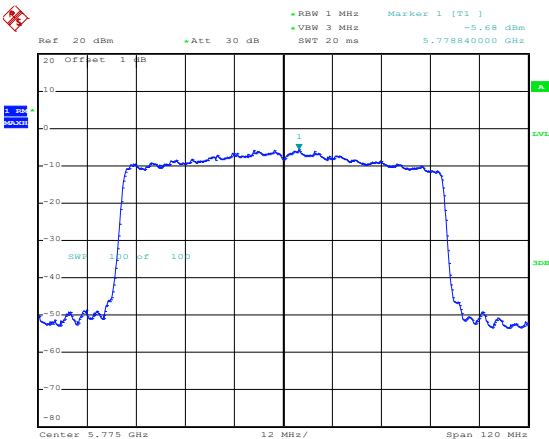
<p>802.11ax-HE40-Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.31 dBm VBW 3 MHz SWT 20 ms 5.753720000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>SWF 100 Hz 100</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 09:59:41</p>
<p>802.11ax-HE40-High</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.83 dBm VBW 3 MHz SWT 20 ms 5.793880000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>SWF 100 Hz 100</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 10:00:01</p>
<p>802.11ac-VH80</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -5.68 dBm VBW 3 MHz SWT 20 ms 5.778840000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>SWF 100 Hz 100</p> <p>Center 5.775 GHz 12 MHz/ Span 120 MHz</p> <p>Date: 22.SEP.2022 09:58:35</p>

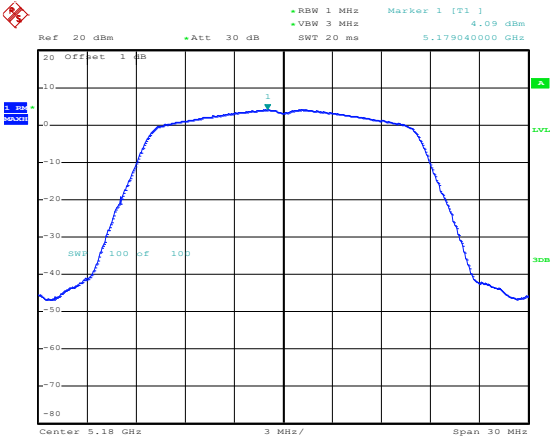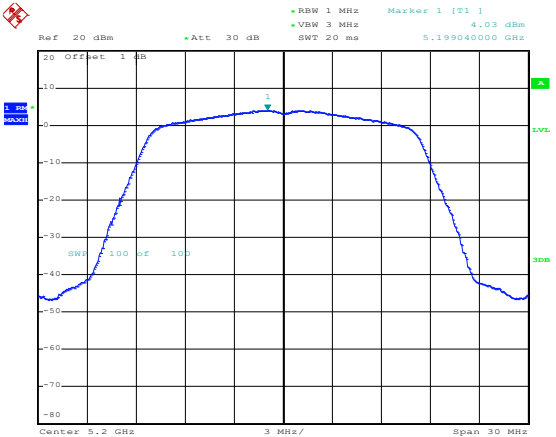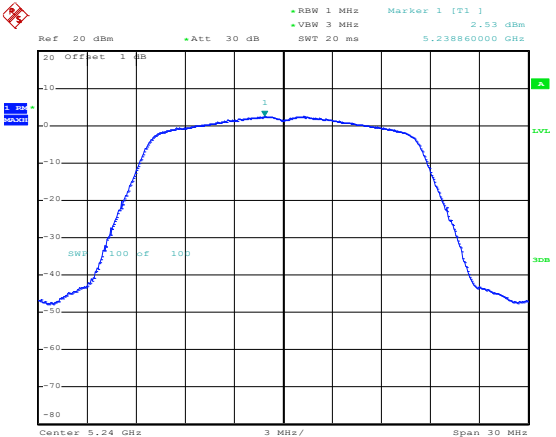ANT 1
5150-5250MHz


<p>802.11a-Low</p>	 <p>Ref: 20 dBm +Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Marker 1 [T1]: 4.09 dBm 5.179040000 GHz</p> <p>Offset: 1 dB</p> <p>Center: 5.18 GHz Span: 30 MHz</p> <p>Date: 22.SEP.2022 19:14:10</p>
<p>802.11a-Middle</p>	 <p>Ref: 20 dBm +Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Marker 1 [T1]: 4.03 dBm 5.199040000 GHz</p> <p>Offset: 1 dB</p> <p>Center: 5.2 GHz Span: 30 MHz</p> <p>Date: 22.SEP.2022 19:13:21</p>
<p>802.11a-High</p>	 <p>Ref: 20 dBm +Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Marker 1 [T1]: 2.53 dBm 5.238860000 GHz</p> <p>Offset: 1 dB</p> <p>Center: 5.24 GHz Span: 30 MHz</p> <p>Date: 22.SEP.2022 19:13:42</p>

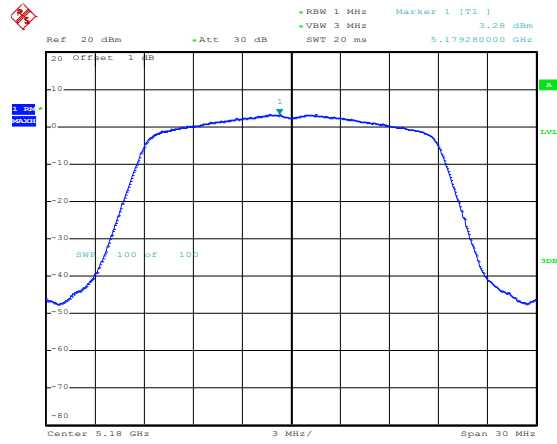802.11n-HT20-Low




Date: 22.SEP.2022 19:14:41

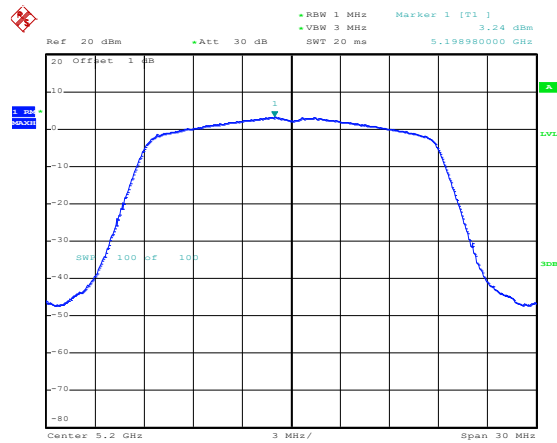802.11n-HT20-Middle




Date: 22.SEP.2022 19:14:59

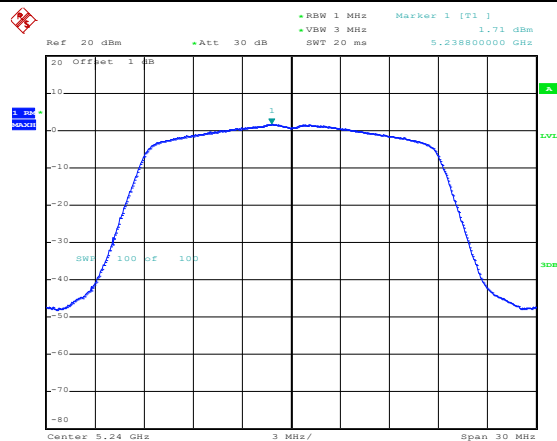802.11n-HT20-High




Date: 22.SEP.2022 19:15:20

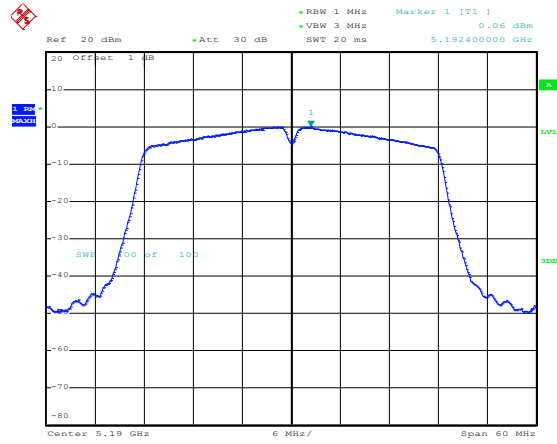802.11n-HT40-Low




Date: 22.SEP.2022 19:16:09

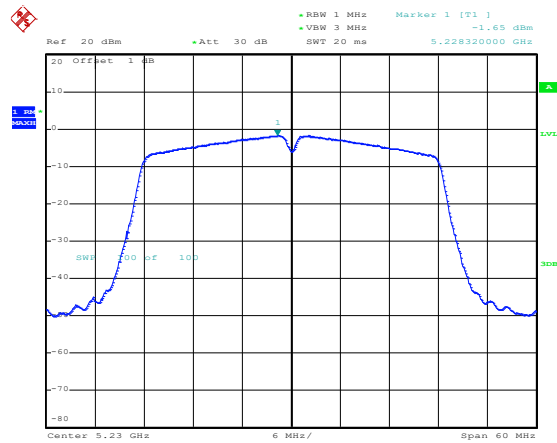802.11n-HT40-High



Date: 22.SEP.2022 19:16:33

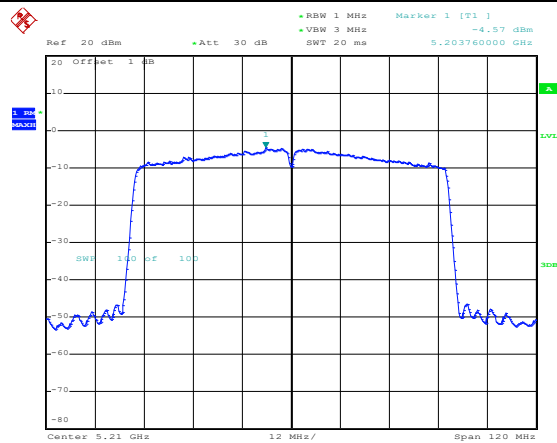
802.11ac-VH80



Date: 22.SEP.2022 19:17:43


<p>802.11ax-HE20-Low</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [F1] 3.44 dBm VBW 3 MHz SWT 20 ms 5.181440000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 22.SEP.2022 19:19:37</p>
<p>802.11ax-HE20-Middle</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [F1] 3.03 dBm VBW 3 MHz SWT 20 ms 5.198880000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 22.SEP.2022 19:20:03</p>
<p>802.11ax-HE20-High</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [F1] 1.70 dBm VBW 3 MHz SWT 20 ms 5.241200000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 22.SEP.2022 19:20:27</p>

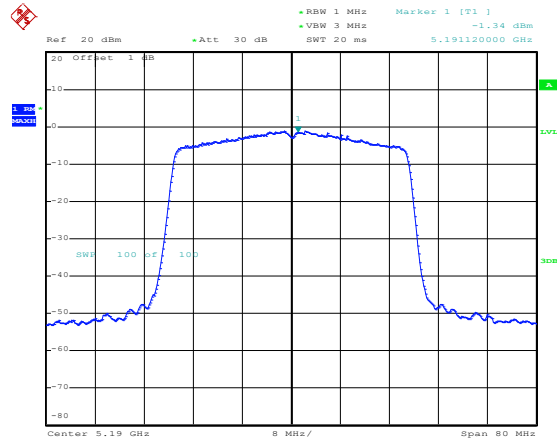802.11ax-HE40-Low




Date: 22.SEP.2022 19:21:13

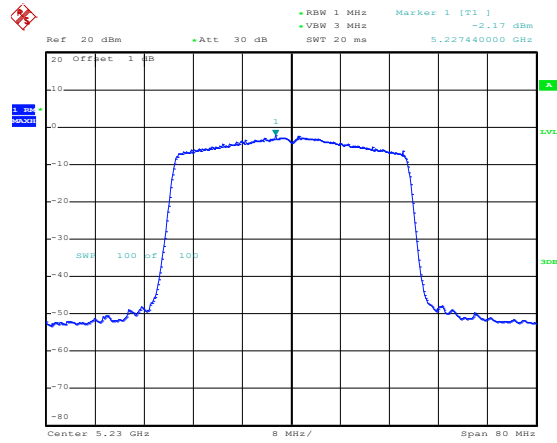802.11ax-HE40-High






Date: 22.SEP.2022 19:21:39



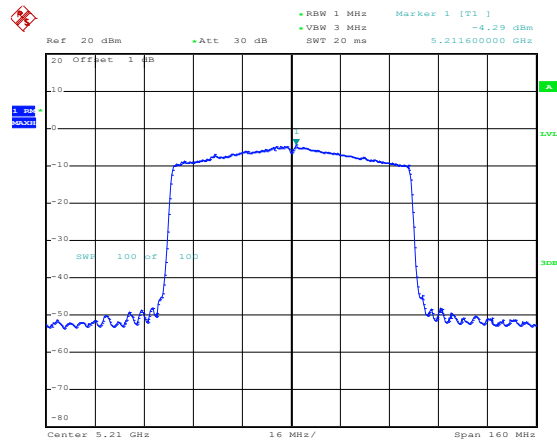
802.11ax-HE80



Date: 22.SEP.2022 19:22:42

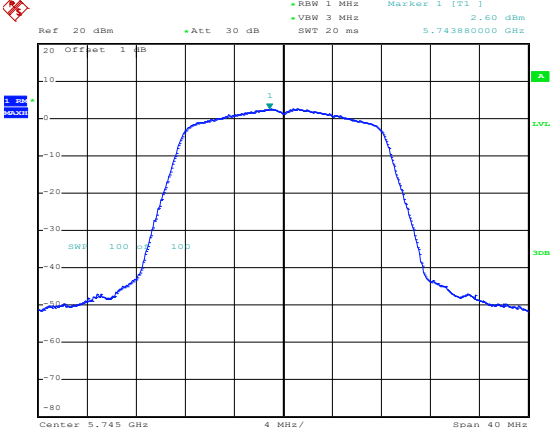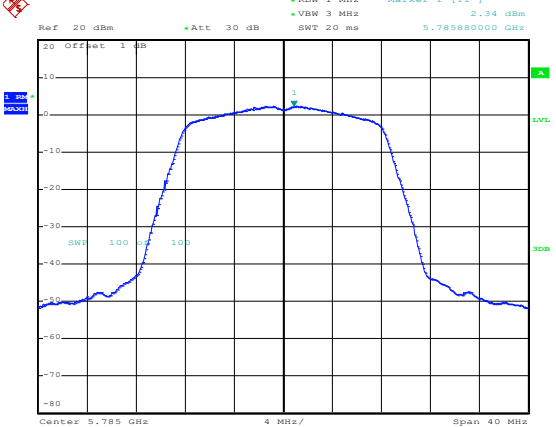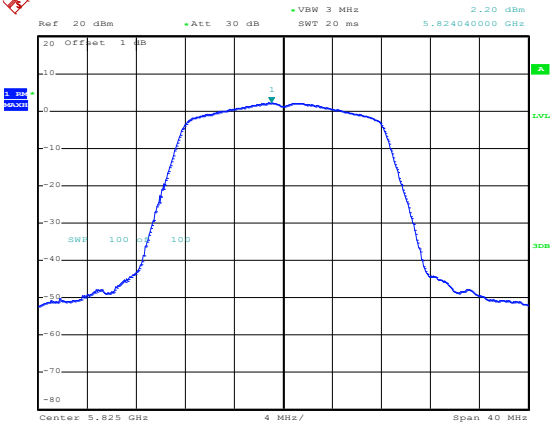
5725-5850MHz

<p>802.11a-Low</p>	 <p>Date: 22.SEP.2022 20:05:54</p>
<p>802.11a-Middle</p>	 <p>Date: 22.SEP.2022 20:06:33</p>
<p>802.11a-High</p>	 <p>Date: 22.SEP.2022 20:06:57</p>
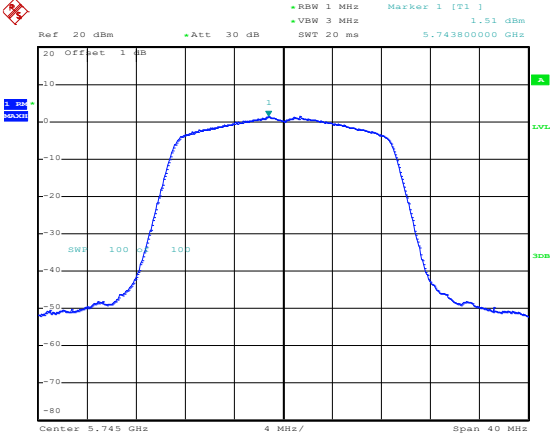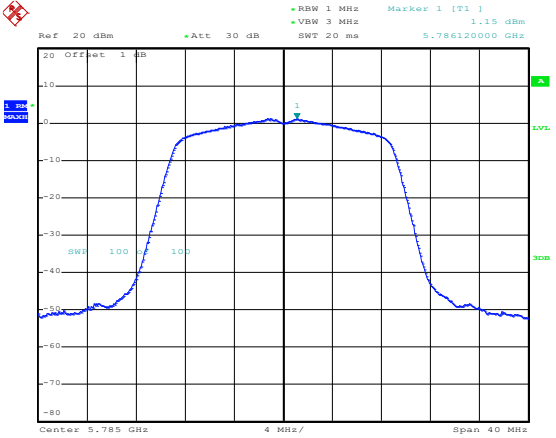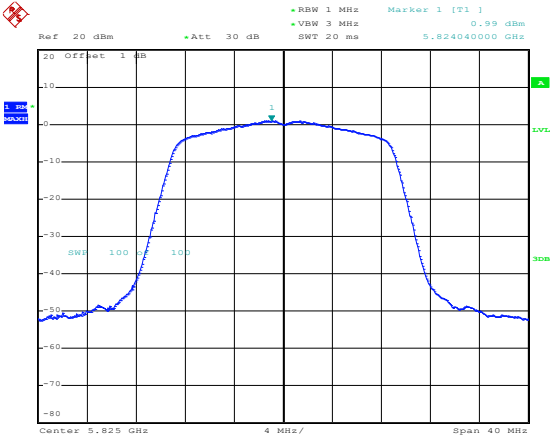
<p>802.11n-HT20-Low</p>	 <p>Date: 22.SEP.2022 20:07:31</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 22.SEP.2022 20:07:56</p>
<p>802.11n-HT20-High</p>	 <p>Date: 22.SEP.2022 20:08:21</p>


<p>802.11n-HT40-Low</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.17 dBm VBW 3 MHz SWT 20 ms 5.753560000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 20:09:07</p>
<p>802.11n-HT40-High</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.28 dBm VBW 3 MHz SWT 20 ms 5.796600000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 20:09:29</p>
<p>802.11ac-VH80</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -5.01 dBm VBW 3 MHz SWT 20 ms 5.772440000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 22.SEP.2022 20:10:02</p>

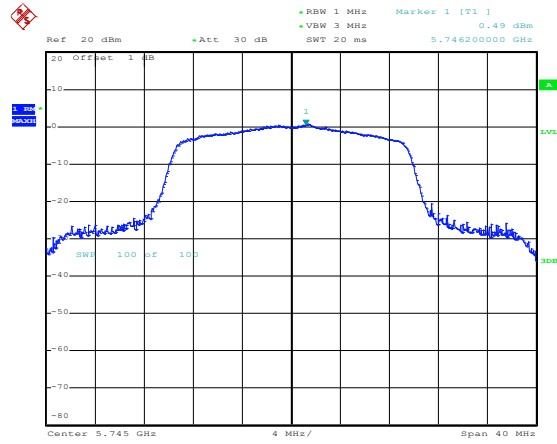802.11ax-HE20-Low




Date: 22.SEP.2022 20:39:36

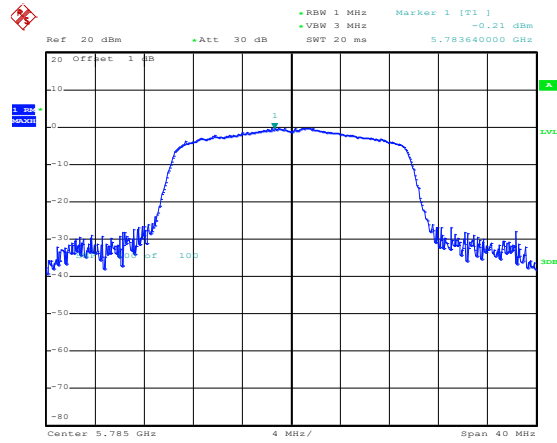802.11ax-HE20-Middle






Date: 22.SEP.2022 20:40:03

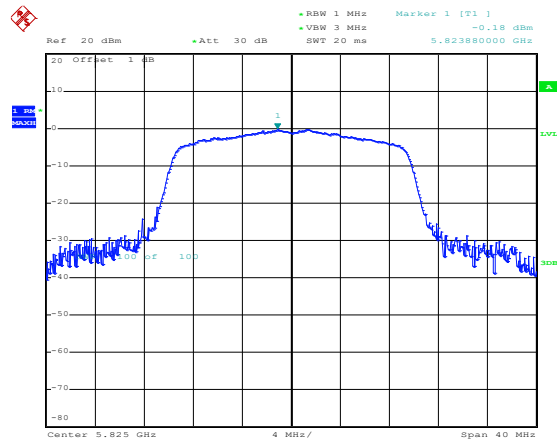802.11ax-HE20-High



Date: 22.SEP.2022 20:40:27
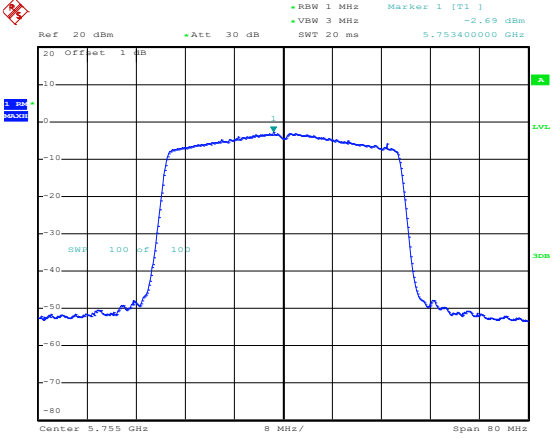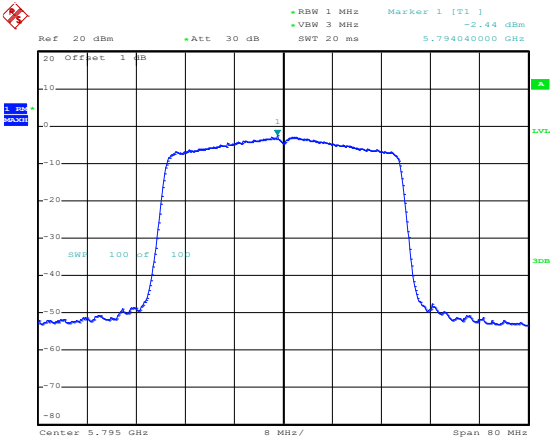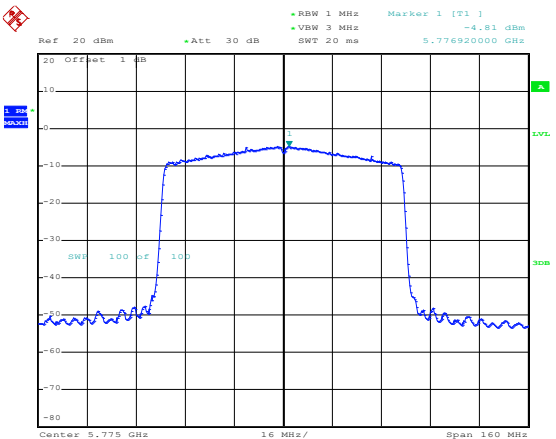
<p>802.11ax-HE40-Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.69 dBm VBW 3 MHz SWT 20 ms 5.75340000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>SWT 100 Hz 100</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 20:41:12</p>
<p>802.11ax-HE40-High</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -2.44 dBm VBW 3 MHz SWT 20 ms 5.79404000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>SWT 100 Hz 100</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 20:41:33</p>
<p>802.11ax-HE80</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -4.81 dBm VBW 3 MHz SWT 20 ms 5.77692000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>SWT 100 Hz 100</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 22.SEP.2022 20:42:29</p>

APPENDIX B

Emission Bandwidth and Occupied Bandwidth


U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	20.40	16.64	20.32	16.64	Pass
	5200	20.24	16.72	20.16	16.72	Pass
	5240	20.16	16.72	20.08	16.72	Pass
802.11n-HT20	5180	20.56	17.68	20.48	17.68	Pass
	5200	20.64	17.76	20.56	17.76	Pass
	5240	20.56	17.68	20.48	17.68	Pass
802.11n-HT40	5190	41.60	36.64	41.20	36.32	Pass
	5230	41.80	36.32	41.80	36.48	Pass
802.11ac-VH80	5210	80.80	75.84	80.80	74.88	Pass
802.11ax-HE20	5180	24.80	19.36	24.32	19.36	Pass
	5200	23.92	19.36	25.28	19.36	Pass
	5240	20.24	18.88	20.16	18.88	Pass
802.11ax-HE40	5190	41.00	37.76	41.00	37.76	Pass
	5230	40.80	37.60	37.76	37.76	Pass
802.11ax-HE80	5210	81.20	76.80	81.20	76.80	Pass

U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	15.28	16.96	15.28	16.80	≥500
	5785	15.28	16.88	15.28	16.80	≥500
	5825	15.28	16.88	15.28	16.80	≥500
802.11n-HT20	5745	15.28	17.76	15.28	17.84	≥500
	5785	15.28	17.92	15.28	17.76	≥500
	5825	15.28	17.76	15.28	17.76	≥500
802.11n-HT40	5755	35.20	36.48	35.36	36.16	≥500
	5795	35.36	36.48	35.36	36.48	≥500
802.11ac-VH80	5775	75.52	74.88	75.84	75.20	≥500
802.11ax-HE20	5745	16.40	19.20	16.88	19.12	≥500
	5785	16.08	19.20	17.76	19.04	≥500
	5825	16.88	19.12	17.28	19.20	≥500
802.11ax-HE40	5755	36.16	37.76	35.36	37.76	≥500
	5795	37.12	37.92	35.52	37.76	≥500
802.11ax-HE80	5775	72.00	76.80	75.84	76.80	≥500

ANT 0
26 dB Bandwidth MHz
5150-5250MHz


<p>802.11a-Low</p>	<p>Date: 3.JAN.2023 14:19:18</p>
<p>802.11a-Middle</p>	<p>Date: 3.JAN.2023 14:22:21</p>
<p>802.11a-High</p>	<p>Date: 3.JAN.2023 14:22:41</p>

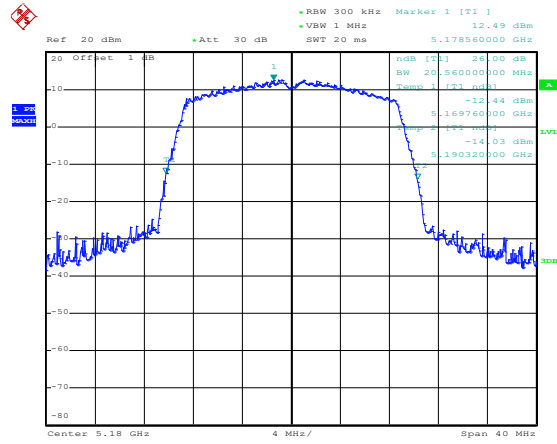802.11n-HT20-Low




Date: 3.JAN.2023 14:23:35

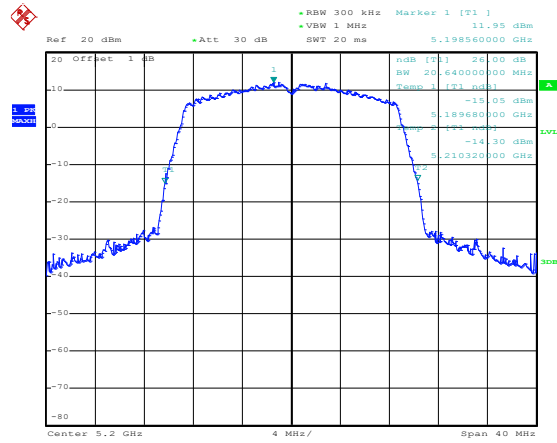802.11n-HT20-Middle






Date: 3.JAN.2023 14:23:55



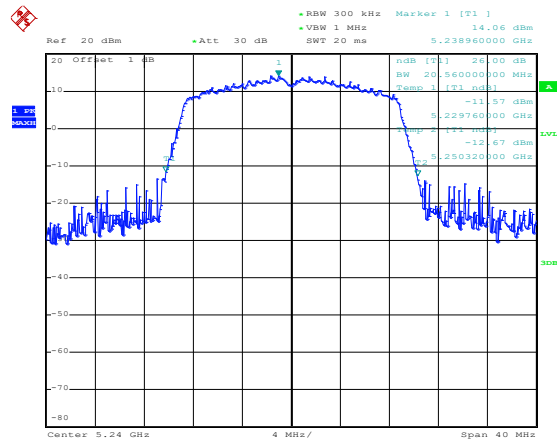
802.11n-HT20-High



Date: 3.JAN.2023 14:24:19

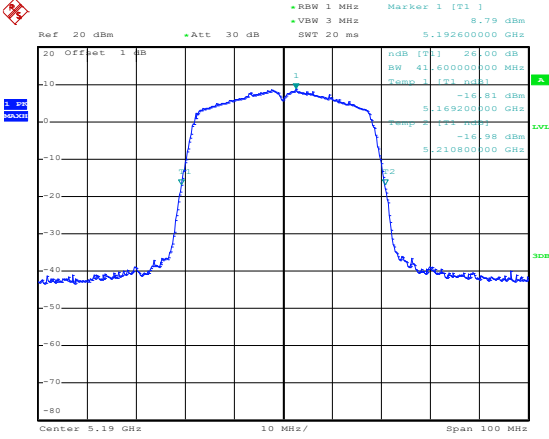
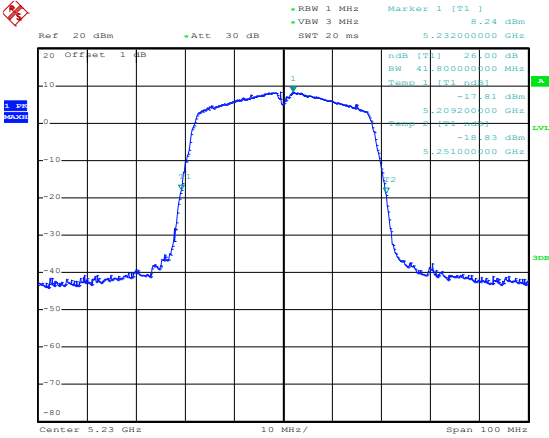
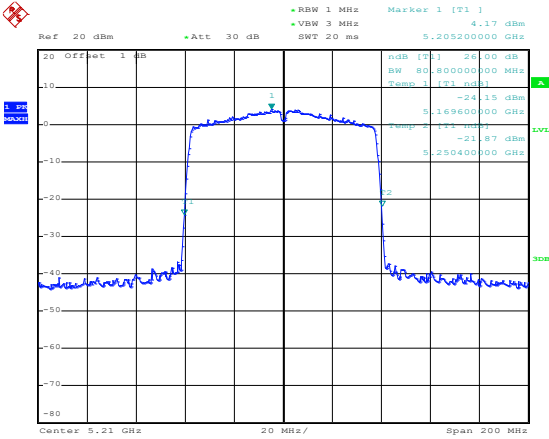
<p>802.11n-HT40-Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 8.79 dBm 5.192600000 GHz 20 Offset 1 dB 10 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.19 GHz 10 MHz/ Span 100 MHz</p> <p>Date: 22.SEP.2022 09:14:49</p>
<p>802.11n-HT40-High</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 8.24 dBm 5.232000000 GHz 20 Offset 1 dB 10 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.23 GHz 10 MHz/ Span 100 MHz</p> <p>Date: 22.SEP.2022 09:15:18</p>
<p>802.11ac-VH80</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 4.17 dBm 5.205200000 GHz 20 Offset 1 dB 10 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.21 GHz 20 MHz/ Span 200 MHz</p> <p>Date: 22.SEP.2022 09:16:16</p>




<p>802.11ax-HE20-Low</p>	<p>Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 14.98 dBm VBW 1 MHz SWT 20 ms 5.181040000 GHz dBm [T1] 26.00 dB BW 24.800000000 MHz Temp 1 [T1] null -10.77 dBm 5.168080000 GHz -10.93 dBm 5.203200000 GHz -12.62 dBm 5.212080000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:25:52</p>
<p>802.11ax-HE20-Middle</p>	<p>Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 13.18 dBm VBW 1 MHz SWT 20 ms 5.199440000 GHz dBm [T1] 26.00 dB BW 23.920000000 MHz Temp 1 [T1] null -13.42 dBm 5.188160000 GHz -12.62 dBm 5.212080000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:27:26</p>
<p>802.11ax-HE20-High</p>	<p>Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 13.89 dBm VBW 1 MHz SWT 20 ms 5.238560000 GHz dBm [T1] 26.00 dB BW 20.240000000 MHz Temp 1 [T1] null -13.41 dBm 5.229820000 GHz -10.99 dBm 5.250160000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:27:46</p>
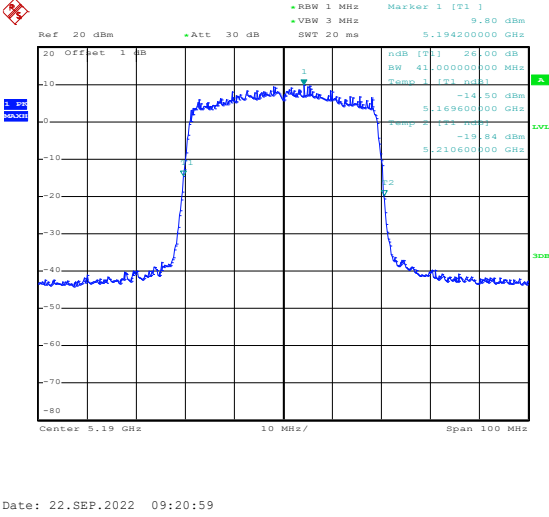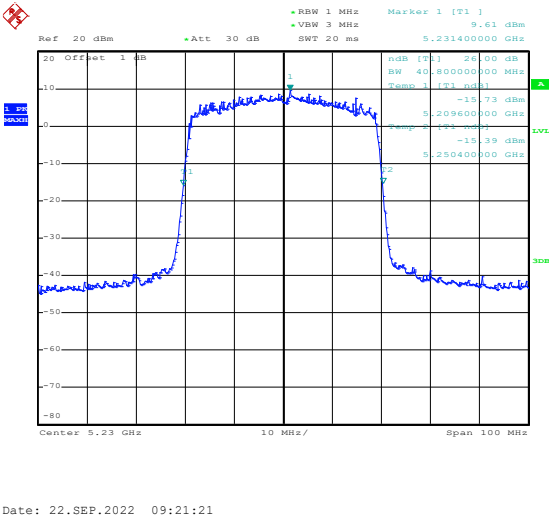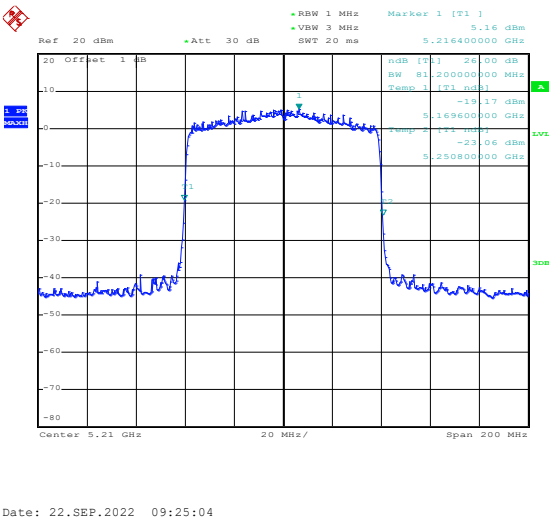
<p>802.11ax-HE40-Low</p>	 <p>Date: 22.SEP.2022 09:20:59</p>
<p>802.11ax-HE40-High</p>	 <p>Date: 22.SEP.2022 09:21:21</p>
<p>802.11ax-HE80</p>	 <p>Date: 22.SEP.2022 09:25:04</p>


5725-5850MHz

<p>802.11a-Low</p>	<p>Date: 22.SEP.2022 10:32:40</p>
<p>802.11a-Middle</p>	<p>Date: 22.SEP.2022 10:39:17</p>
<p>802.11a-High</p>	<p>Date: 22.SEP.2022 10:40:19</p>
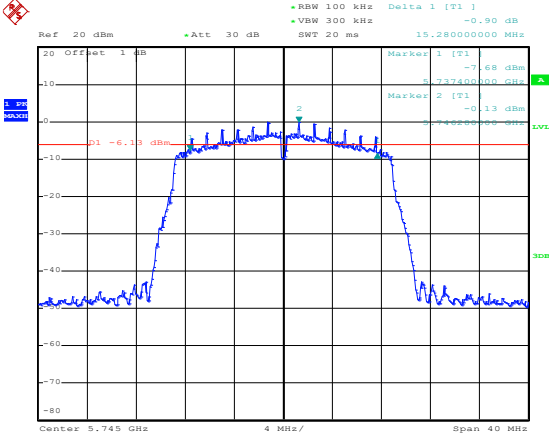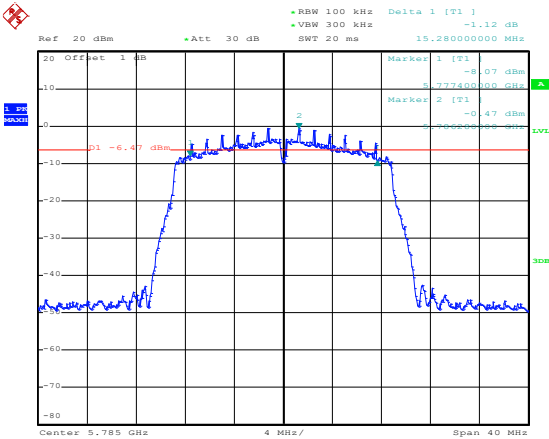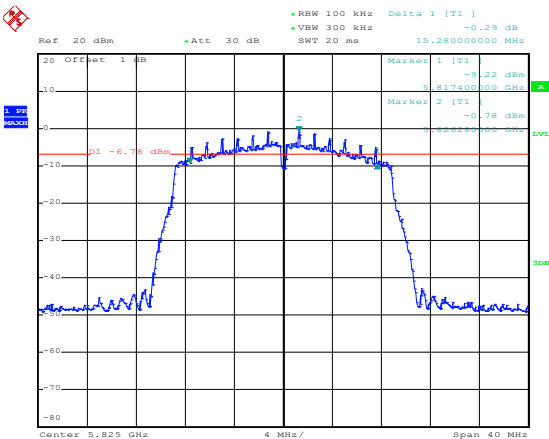
<p>802.11n-HT20-Low</p>	 <p>Date: 22.SEP.2022 10:41:24</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 22.SEP.2022 10:42:47</p>
<p>802.11n-HT20-High</p>	 <p>Date: 22.SEP.2022 10:44:22</p>

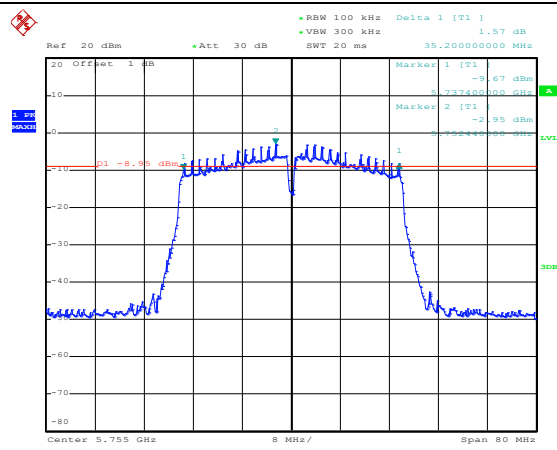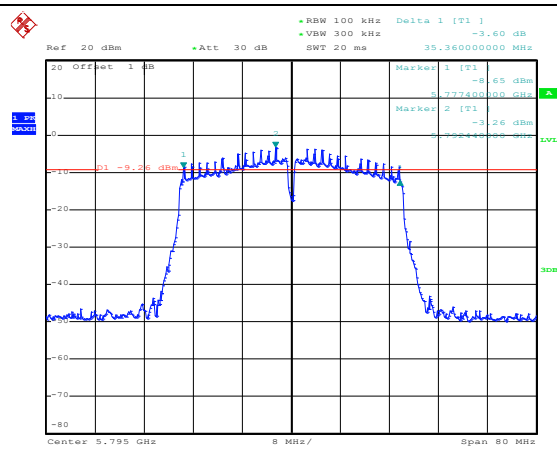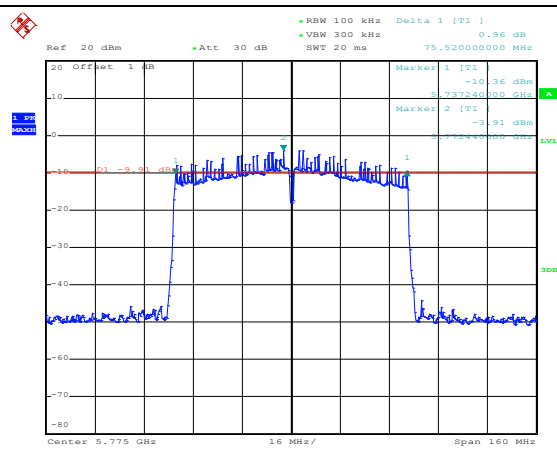
<p>802.11n-HT40-Low</p>	 <p>Date: 22.SEP.2022 10:45:42</p>
<p>802.11n-HT40-High</p>	 <p>Date: 22.SEP.2022 10:46:38</p>
<p>802.11ac-VH80</p>	 <p>Date: 22.SEP.2022 10:47:44</p>

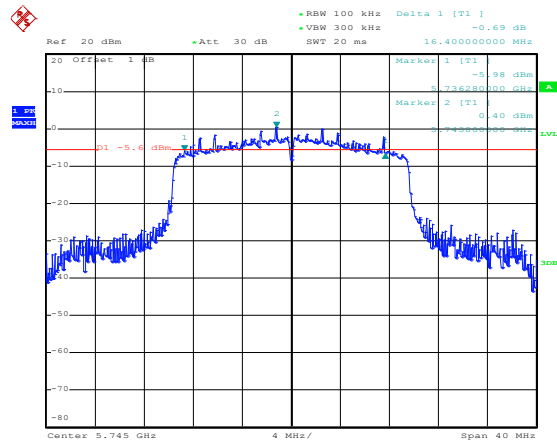802.11ax-HE20-Low




Date: 22.SEP.2022 10:48:59

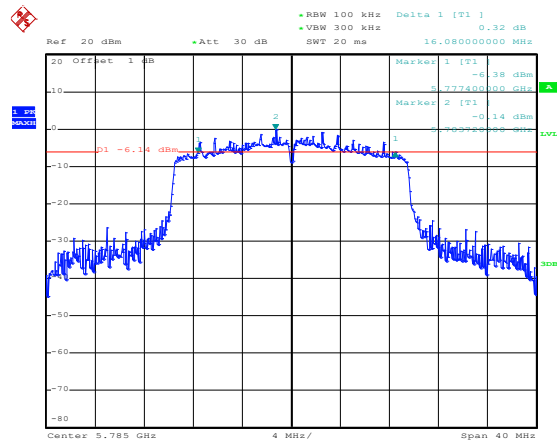802.11ax-HE20-Middle






Date: 22.SEP.2022 10:49:46

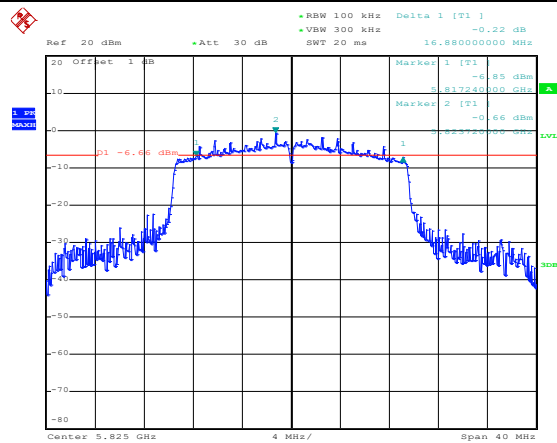802.11ax-HE20-High




Date: 22.SEP.2022 10:51:08
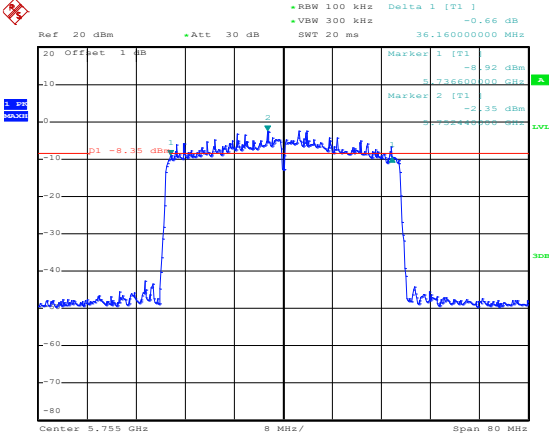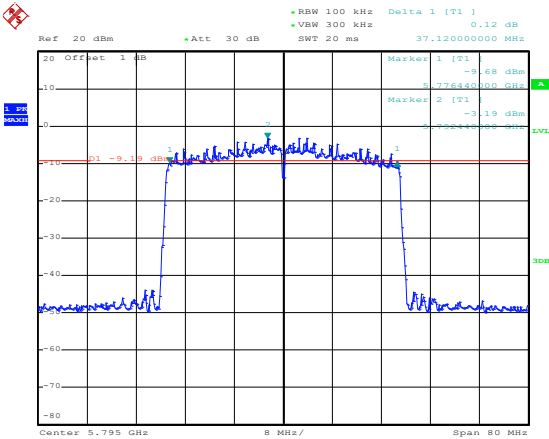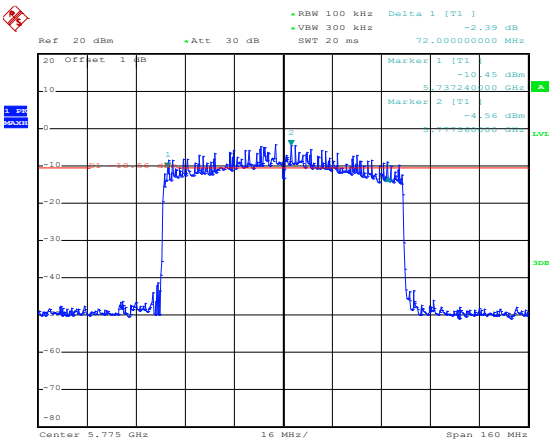
<p>802.11ax-HE40-Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] -0.66 dB VBW 300 kHz SWT 20 ms 36.16000000 MHz</p> <p>Marker 1 [T1] -8.92 dBm 5.75600000 GHz Marker 2 [T1] -2.35 dBm 5.75400000 GHz</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 10:52:22</p>
<p>802.11ax-HE40-High</p>	 <p>Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.12 dB VBW 300 kHz SWT 20 ms 37.12000000 MHz</p> <p>Marker 1 [T1] -9.68 dBm 5.75440000 GHz Marker 2 [T1] -3.19 dBm 5.75440000 GHz</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 10:53:30</p>
<p>802.11ac-VH80</p>	 <p>Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] -2.39 dB VBW 300 kHz SWT 20 ms 72.00000000 MHz</p> <p>Marker 1 [T1] -10.45 dBm 5.77240000 GHz Marker 2 [T1] -4.56 dBm 5.77240000 GHz</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 22.SEP.2022 10:54:51</p>

99% BandwidthMHz
5150-5250MHz


<p>802.11a-Low</p>	<p>Ref: 20 dBm +Att: 30 dB RBW: 300 kHz Marker 1 [T1]: 13.42 dBm VBW: 1 MHz SWT: 20 ms 5.179040000 GHz</p> <p>Offset: 1 dB</p> <p>OSW: 16.640000000 MHz Temp 1 [T1] OBW: 3.21 dBm 5.173680000 GHz Temp 2 [T2] OBW: 3.43 dBm 5.188320000 GHz</p> <p>Center: 5.18 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 3.JAN.2023 14:32:11</p>
<p>802.11a-Middle</p>	<p>Ref: 20 dBm +Att: 30 dB RBW: 300 kHz Marker 1 [T1]: 12.25 dBm VBW: 1 MHz SWT: 20 ms 5.198960000 GHz</p> <p>Offset: 1 dB</p> <p>OSW: 16.720000000 MHz Temp 1 [T1] OBW: 2.44 dBm 5.193680000 GHz Temp 2 [T2] OBW: 2.66 dBm 5.208400000 GHz</p> <p>Center: 5.2 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 3.JAN.2023 14:33:13</p>
<p>802.11a-High</p>	<p>Ref: 20 dBm +Att: 30 dB RBW: 300 kHz Marker 1 [T1]: 12.87 dBm VBW: 1 MHz SWT: 20 ms 5.240880000 GHz</p> <p>Offset: 1 dB</p> <p>OSW: 16.720000000 MHz Temp 1 [T1] OBW: 2.46 dBm 5.231680000 GHz Temp 2 [T2] OBW: 2.68 dBm 5.248400000 GHz</p> <p>Center: 5.24 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 3.JAN.2023 14:33:39</p>

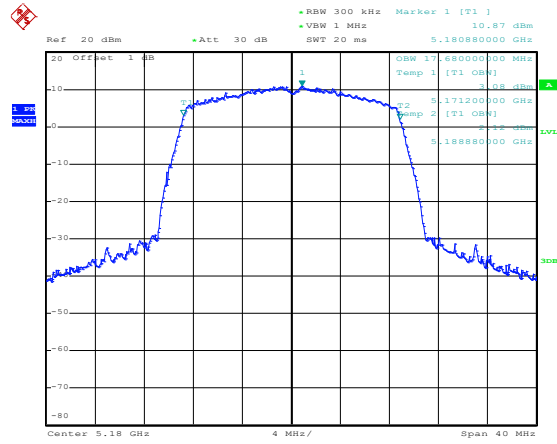802.11n-HT20-Low




Date: 3.JAN.2023 14:34:01

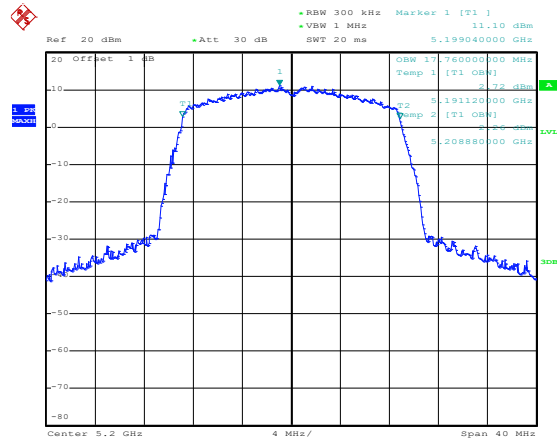802.11n-HT20-Middle






Date: 3.JAN.2023 14:34:27

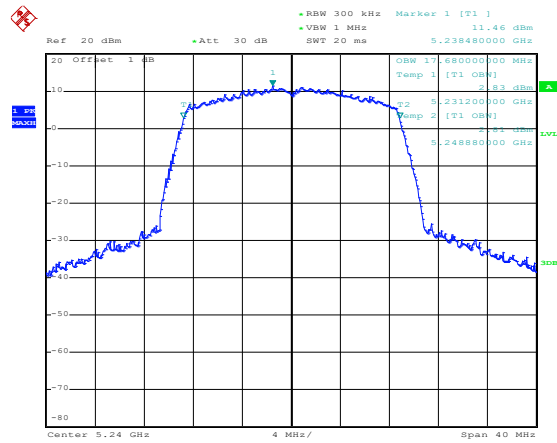802.11n-HT20-High






Date: 3.JAN.2023 14:34:47
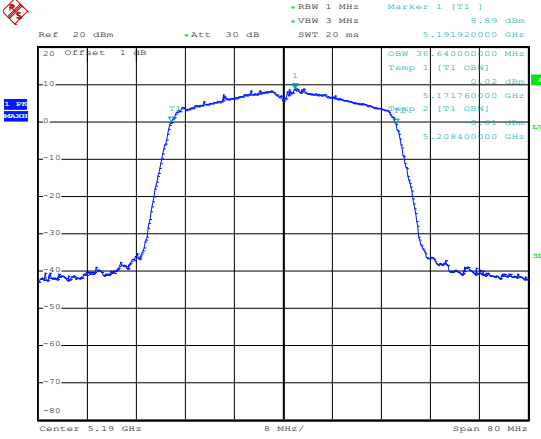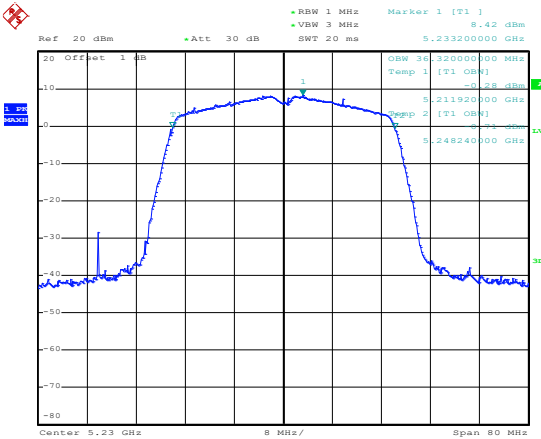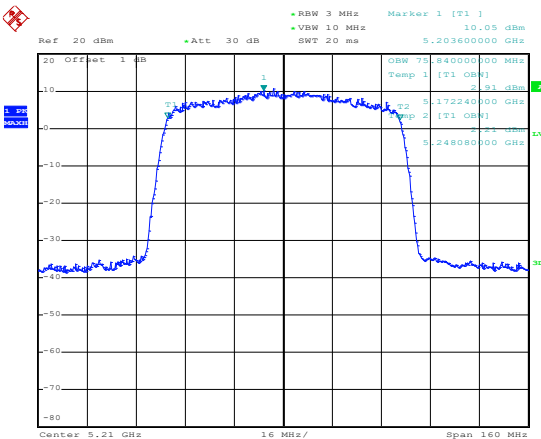
<p>802.11n-HT40-Low</p>	 <p>Ref 20 dBm +Att 30 dB</p> <p>RBW 1 MHz Marker 1 [T1] 8.89 dBm VBW 3 MHz 5.19320000 GHz SWT 20 ms</p> <p>OSW 30.0000000 MHz Temp 1 [T1] OBW] 0.02 dBm Temp 2 [T1] OBW] 5.17176000 GHz -0.01 dBm Temp 3 [T1] OBW] 5.20840000 GHz</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 09:32:19</p>
<p>802.11n-HT40-High</p>	 <p>Ref 20 dBm +Att 30 dB</p> <p>RBW 1 MHz Marker 1 [T1] 8.42 dBm VBW 3 MHz 5.23320000 GHz SWT 20 ms</p> <p>OSW 30.0000000 MHz Temp 1 [T1] OBW] -0.08 dBm Temp 2 [T1] OBW] 5.21192000 GHz -0.04 dBm Temp 3 [T1] OBW] 5.24824000 GHz</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 09:32:42</p>
<p>802.11ac-VH80</p>	 <p>Ref 20 dBm +Att 30 dB</p> <p>RBW 3 MHz Marker 1 [T1] 10.05 dBm VBW 10 MHz 5.20360000 GHz SWT 20 ms</p> <p>OSW 70.0000000 MHz Temp 1 [T1] OBW] 2.91 dBm Temp 2 [T1] OBW] 5.17224000 GHz Temp 3 [T1] OBW] 5.24808000 GHz</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 22.SEP.2022 09:34:09</p>

<p>802.11ax-HE20-Low</p>	<p>Ref 20 dBm +Att 30 dB</p> <p>RBW 300 kHz Marker 1 [T1] 13.97 dBm VBW 1 MHz 5.178960000 GHz SWT 20 ms</p> <p>OSW 10.36000000 MHz Temp 1 [T1] 0dB 5.174 dBm T2 5.170400000 GHz Temp 2 [T1] 0dB -1.45 dBm LVL 30dB</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:35:16</p>
<p>802.11ax-HE20-Middle</p>	<p>Ref 20 dBm +Att 30 dB</p> <p>RBW 300 kHz Marker 1 [T1] 12.75 dBm VBW 1 MHz 5.199600000 GHz SWT 20 ms</p> <p>OSW 10.36000000 MHz Temp 1 [T1] 0dB 1.62 dBm T2 5.190320000 GHz Temp 2 [T1] 0dB -1.45 dBm LVL 30dB</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:35:52</p>
<p>802.11ax-HE20-High</p>	<p>Ref 20 dBm +Att 30 dB</p> <p>RBW 300 kHz Marker 1 [T1] 13.56 dBm VBW 1 MHz 5.241040000 GHz SWT 20 ms</p> <p>OSW 10.88000000 MHz Temp 1 [T1] 0dB 6.05 dBm T2 5.230560000 GHz Temp 2 [T1] 0dB -1.45 dBm LVL 30dB</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:36:10</p>

<p>802.11ax-HE40-Low</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 9.53 dBm VBW 3 MHz SWT 20 ms 5.187600000 GHz</p> <p>OSW 37.00000000 MHz 10.49 dBm Temp 1 [T1] [OBW] T1 5.17000000 GHz 1.81 dBm T2 5.17320000 GHz 1.81 dBm Temp 2 [T1] [OBW] T1 5.20880000 GHz 1.81 dBm</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 09:26:19</p>
<p>802.11ax-HE40-High</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 10.49 dBm VBW 3 MHz SWT 20 ms 5.228080000 GHz</p> <p>OSW 37.00000000 MHz 10.49 dBm Temp 1 [T1] [OBW] T1 5.21280000 GHz 1.81 dBm T2 5.21280000 GHz 1.81 dBm Temp 2 [T1] [OBW] T1 5.24888000 GHz 1.81 dBm</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 22.SEP.2022 09:26:48</p>
<p>802.11ac-VH80</p>	<p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 5.34 dBm VBW 3 MHz SWT 20 ms 5.208720000 GHz</p> <p>OSW 76.00000000 MHz 5.34 dBm Temp 1 [T1] [OBW] T1 5.17160000 GHz 1.82 dBm T2 5.17160000 GHz 1.82 dBm Temp 2 [T1] [OBW] T1 5.24840000 GHz 1.82 dBm</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 22.SEP.2022 09:25:34</p>

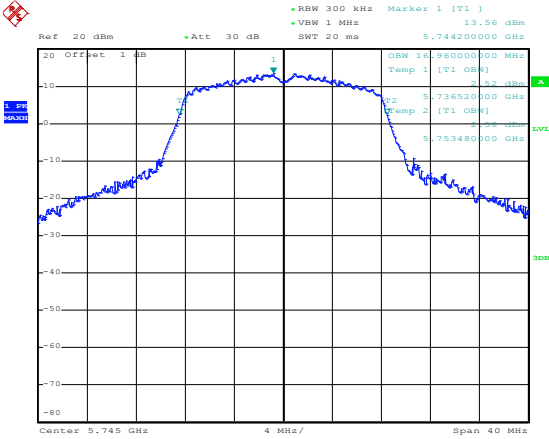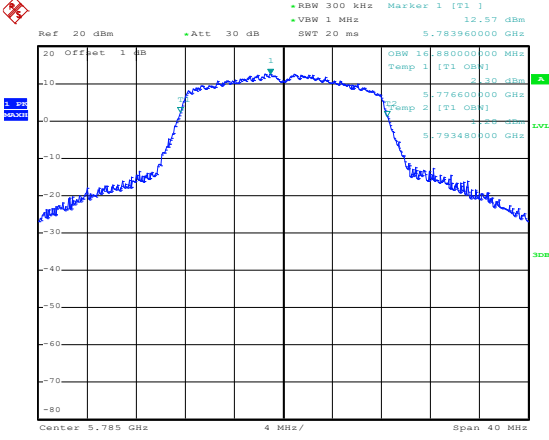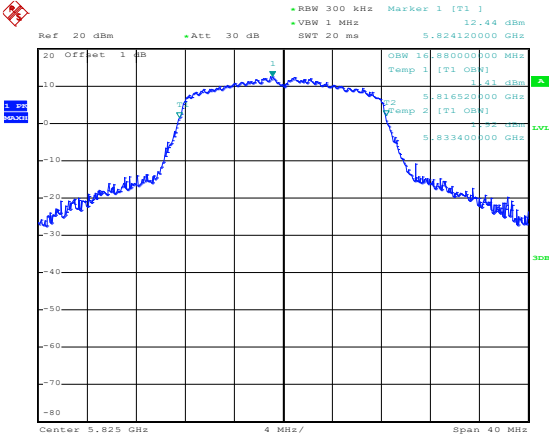5725-5850MHz

<p>802.11a-Low</p>	 <p>Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1 1] 13.56 dBm •VBW 1 MHz •SWT 20 ms 5.744200000 GHz</p> <p>OSW 16.88000000 GHz Temp 1 [T1 0dB] 2.82 dBm T2 5.736520000 GHz Temp 2 [T1 0dB] 1.88 dBm T3 5.753480000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:49:10</p>
<p>802.11a-Middle</p>	 <p>Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1 1] 12.57 dBm •VBW 1 MHz •SWT 20 ms 5.783960000 GHz</p> <p>OSW 16.88000000 GHz Temp 1 [T1 0dB] 2.10 dBm T2 5.776600000 GHz Temp 2 [T1 0dB] 1.88 dBm T3 5.793480000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:49:34</p>
<p>802.11a-High</p>	 <p>Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1 1] 12.44 dBm •VBW 1 MHz •SWT 20 ms 5.824200000 GHz</p> <p>OSW 16.88000000 GHz Temp 1 [T1 0dB] 2.81 dBm T2 5.816520000 GHz Temp 2 [T1 0dB] 1.82 dBm T3 5.833400000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 3.JAN.2023 14:50:02</p>