


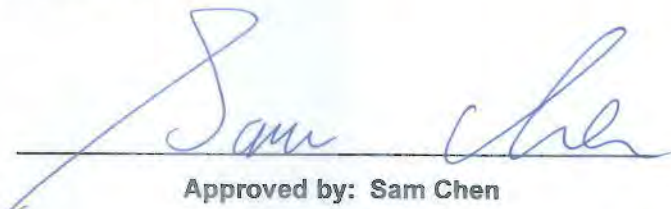


RADIO EXPOSURE TEST REPORT

FCC ID : O2U-5881
Equipment : Wireless Access Point
Brand Name : 
Model Name : WR5881
Applicant : COMPAL BROADBAND NETWORKS,INC.
13F-1, No.1, Taiyuan 1st St., Zhubei City, Hsinchu
County 30288, Taiwan, R.O.C.
Manufacturer : COMPAL BROADBAND NETWORKS,INC.
13F-1, No.1, Taiyuan 1st St., Zhubei City, Hsinchu
County 30288, Taiwan, R.O.C.
Standard : 47 CFR Part 2.1091

The product was received on Jul. 06, 2021, and testing was started from Jul. 16, 2021 and completed on Jul. 22, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Accessories	6
1.4 Table for Class II Change.....	7
1.5 Testing Location	7
2 Maximum Permissible Exposure	8
2.1 Limit of Maximum Permissible Exposure	8
2.2 MPE Calculation Method.....	8
2.3 Calculated Result and Limit.....	9
Photographs of EUT v01	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Vicky Huang



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
5GHz WLAN	5150-5250 5250-5350 5470-5725 5725-5850	5180-5240 5260-5320 5500-5720 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)



1.2 Antenna Information

Ant.	Port		Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)		Cable Loss (dB)		True Gain (dBi)	
	2.4GHz	5GHz					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	3	-	CBN	WR5581	PCB	I-Pex	3.41	-	0.67	-	2.74	-
2	2	-	CBN	WR5581	PCB	I-Pex	4.09	-	0.68	-	3.41	-
3	4	-	CBN	WR5581	PCB	I-Pex	5.22	-	0.55	-	4.67	-
4	1	-	CBN	WR5581	PCB	I-Pex	4.27	-	1.13	-	3.14	-
5	-	1	CBN	WR5581	PCB	I-Pex	-	3.48	-	0.29	-	3.19
6	-	2	CBN	WR5581	Dipole	I-Pex	-	3.80	-	0.63	-	3.17
7	-	3	CBN	WR5581	Dipole	I-Pex	-	4.43	-	0.32	-	4.11
8	-	4	CBN	WR5581	PCB	I-Pex	-	5.17	-	0.45	-	4.72

Note: The above information was declared by manufacturer.

<For 2.4GHz Band>

For IEEE 802.11b/g/n mode (4TX/4RX)

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a/n/ac/ax mode (4TX/4RX)

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously

1.3 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	Frecom	F30L7-120250SPAU	INPUT: 100-240V~50/60Hz, 0.8A OUTPUT: 12.0V, 2.5A, 30.0W
Others			
RJ-45 cable*1: Non-Shielded, 1.5m			



1.4 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FA151112

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Adding 5GHz band 2 and band 3 (5250~5350 MHz, 5470~5725 MHz) for this device	Maximum Permissible Exposure

Note: Maximum Permissible Exposure of 2.4GHz Band and 5GHz Band 1, 4 are based on original test report.

1.5 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 23 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;G1D	4.67	29.97	34.64	0.50	35.14	3.26588	23	0.49129	1.00000
5.2G;D1D	4.72	28.95	33.67	0.50	34.17	2.61216	23	0.39295	1.00000
5.3G;D1D	4.72	23.70	28.42	0.50	28.92	0.77983	23	0.11731	1.00000
5.6G;D1D	4.72	23.78	28.50	0.50	29.00	0.79433	23	0.11949	1.00000
5.8G;D1D	4.72	29.74	34.46	0.50	34.96	3.13329	23	0.47134	1.00000

Simultaneous Transmission Analysis Mode: WLAN 2.4GHz+WLAN 5GHz

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
2.4G;G1D	4.67	29.97	34.64	0.50	35.14	3.26588	23	0.49129	1.00000	0.49129
5.8G;D1D	4.72	29.74	34.46	0.50	34.96	3.13329	23	0.47134	1.00000	0.47134
-	-	--	-	-	-	-	-	-	Sum Ratio	0.96263
-	-	-	-	-	-	-	-	-	Ratio Limit	1

—————THE END—————