



Test Report

For

Applicant : **DIGICOM CORPORATION**
Equipment Type : **Wireless Indoor Security**
Transmitter/ Receiver Device
Model : **DVL-3000Tx, DVL-3001Tx**
FCC ID : **O3GDVL3000T**

Report No. : 005H061FI



Test Report Certification

Quietek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,

Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859

E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : DIGICOM CORPORATION

Address : No.1, Lane 724, Po-ai St., Chupei City, Hsinchu Hsien,
Taiwan, R.O.C.

Equipment Type : Wireless Indoor Security Transmitter/ Receiver Device

Model : DVL-3000Tx, DVL-3001Tx

FCC ID. : O3GDVL3000T

Measurement Standard : FCC Part 15 Subpart C Paragraph 15.249

Measurement Procedure : ANSI C63.4 /1992

Operation Voltage : 120VAC/60Hz

Test Result : Complied

Test Date : July 3, 2000

Report No. : 005H061FI



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Kim Hung

Test Engineer: Calien Kang

Approved: Kevin Wang



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1 EUT Description	4
1.2 Tested System Details	5
1.3 EUT Configuration.....	6
1.4 EUT Exercise Software	6
1.5 Test performed	6
1.6 Test Facility	7
2. CONDUCTED EMISSION	8
2.1 Test Equipment List.....	8
2.2 Test Setup.....	8
2.3 Limits	8
2.4 Test Procedure.....	9
2.5 Test Results.....	9
3. RADIATED EMISSION	10
3.1 Test Equipment	10
3.2 Test Setup.....	10
3.3 Limits	11
3.4 Test Procedure.....	12
3.5 Test Results.....	12
4. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....	13
5. ATTACHMENT.....	14
Attachment 1: Summary of Test Results	
Attachment 2: EUT Test Photographs	
Attachment 3: EUT Detailed Photographs	



1. General Information

1.1 EUT Description

Applicant	: DIGICOM CORPORATION
Address	: No.1, Lane 724, Po-ai St., Chupei City, Hsinchu Hsien, Taiwan, R.O.C.
Equipment Type	: Wireless Indoor Security Transmitter/ Receiver Device
Model	: DVL-3000Tx, DVL-3001Tx
FCC ID	: O3GDVL3000T
Operation Voltage	: 120VAC/60Hz
Frequency Range	: 2400 MHz to 2483.5MHz
Channel Number	: 4
Frequency of each Channel	: Channel 1: 2410MHz, Channel 2: 2430MHz,
Working Frequency	Channel 3: 2450MHz, Channel 4: 2470MHz
Type of Modulation	: FM
Operator Selection of Operating Frequency	: Manual Switch
RCA Cable (1-1)	: Non-shielded, 1.6m, 2pcs
Audio/Video RCA Cable	: Non-shielded, 1.6m, 2pcs
Power Adapter	: AC ADAPTER, MW41-12002500 Cable Out: Non-shielded, 1.8m
Remark	<div>1. This device is a 2.4GHz Wireless Indoor Security Transmitter/ Receiver Device included a 2.4GHz transmitting function, a 439MHz receiving function, an Audio/Video port and an IR-remote output.</div> <div>2. This device has 2 different models but the designing circuit and construction are same. The DVL-3000Tx device is with audio and the DVL-3001Tx is without audio.</div> <div>3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249 for non-spread spectrum devices.</div> <div>4. This device is a composite device in accordance with Part 15 regulations. The function for the receiver was, measured and made a test report that the report number is 005H060F under verification.</div>



1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Wireless Indoor Security Transmitter/ Receiver Device(EUT)

Model Number : DVL-3000Tx, DVL-3001Tx
Serial Number : N/A
FCC ID : O3GDVL3000T
Manufacturer : DIGICOM CORPORATION
IR : 1set, Non-shielded, 2m
RCA Cable (1-1) : Non-shielded, 1.6m, 2pcs
Audio/Video RCA Cable : Non-shielded, 1.6m, 2pcs
Power Adapter : AC ADAPTER, MW41-12002500
Cable Out: Non-shielded, 1.8m

1.2.2 DVD

Model Number : DVP-K800D
Serial Number : 960E411
FCC ID : AN06282
Manufacturer : SONY.
Data Cable(S-Video) : Shielded, 1.2m
Power Cord : Non-shielded,1.8m

1.2.3 Wireless Indoor Security Transmitter/ Receiver Device(RX)


Model Number : DVL-2000Rx, DVL-2001Rx
Serial Number : N/A
FCC ID : Verification
Manufacturer : DIGICOM CORPORATION
RCA Cable (1-1) : Non-shielded, 1.8m
Audio/Video RCA Cable : Non-shielded, 1.8m
Power Adapter : AC ADAPTER, MW41-12002500
Cable Out: Non-shielded, 1.8m

1.2.4 Television

Model Number : KV-14NX
Serial Number : 103125
BSMI ID : 3863A019
Manufacturer : SONY
Power Cord : Non-shielded, 1.8m



1.3 EUT Configuration

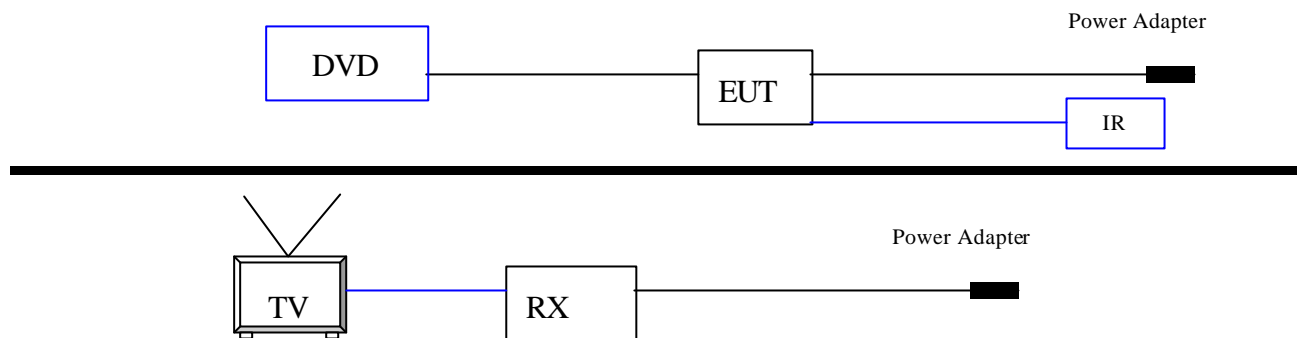

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 The EUT will transmit the radio signal form transmitter.
- 1.4.4 Repeat the above procedure 1.4.2 to 1.4.3

1.5 Test performed

Conducted emissions were invested over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were invested over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz and the frequency range from **1GHz to 24GHz** using a receiver bandwidth of 1MHz.

Radiated testing was performed at an antenna to EUT distance of **3 meters**.

1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI
Registration No. for No.2 Shielded Room C-858
Registration No. for No.1 Open Area Test Site R-823
Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2000	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2000	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2000	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

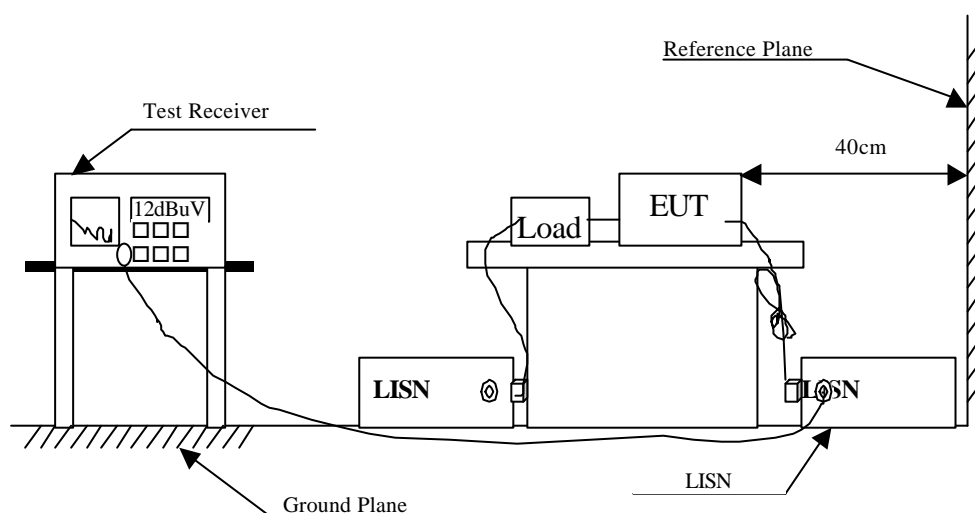

2.3 Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency MHz	Limits	
	uV	dBuV
0.45 - 30	250	48.0

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9 kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in Attachment 1. The acceptance criterion was met and the EUT passed the test.



3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2000
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2000
		Pre-Amplifier	HP	8447D/3307A01812	May, 2000
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 2000
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2000
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2000
		Pre-Amplifier	HP	8447D/3307A01814	May, 2000
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 2000

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

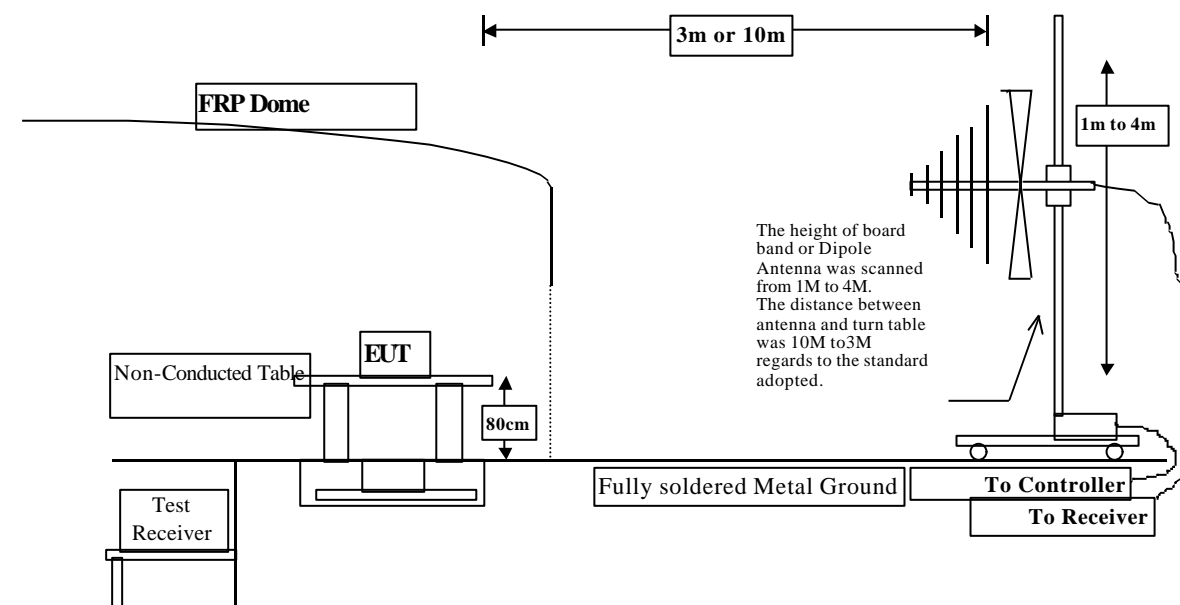

3.3 Limits

➤ Fundamental and Harmonics Emission Limits

Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
2400-2483.5	50	94 (Average)	500	54 (Average)
		114 (Peak)		74 (Peak)

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency MHz	50dB below of the fundamental (dBuV/m @3m)	15.209 Limits (dBuV/m @3m)	General Radiated Limits (dBuV/m @3m)
30-88	40	40	40
88-216	43.5	43.5	43.5
216-960	44	46	46
Above 960	44	54	54

Remarks :

1. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters .

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz and above 1GHz is 1MHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in Attachment 1. The acceptance criterion was met and the EUT passed the test.



4. EMI Reduction Method During Compliance Testing

No modification was made during testing.



5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 14
Attachment 2: EUT Test Photographs	Number of Pages: 3
Attachment 3: EUT Detailed Photographs	Number of Pages: 20



Attachment 1 : Summary of Test Results

The test results in the emission were performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission are listed as the attached data.

All the tests were carried out with the EUT (Wireless Indoor Security Transmitter/ Receiver Device) in normal operation, which was defined as:

- (1) Channel 1
- (2) Channel 3
- (3) Channel 4

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

➤ **Emission Test**

- Uncertainty in the Conducted Emission Test: $< \pm 2.0 \text{ dB}$
- Uncertainty in the field strength measured: $< \pm 4.0 \text{ dB}$