

**47 CFR PART 15 SUBPART C TEST REPORT**

**for**

**Keypad Electronic Deadbolt with**

**Zwave Smart Start**

**Model No.: A50-WG040-0C**

**FCC ID: O3I-A50WG0400C**

of

Applicant: Taiwan Fu Hsing Industrial Co., Ltd.

Address: No.88, Yucai Rd., Gangshan Dist., Kaohsiung City 820,  
Taiwan (R.O.C.)

Tested and Prepared

by

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: TW1477, TW1072**

**Industry Canada filed test laboratory Reg. No. 20037**



**Report No.: W6M22108-21184-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



Registration number: W6M22108-21184-C-1  
FCC ID: O3I-A50WG0400C

## **TABLE OF CONTENTS**

<b>1</b>	<b>GENERAL INFORMATION</b> .....	<b>2</b>
1.1	NOTES .....	2
1.2	TESTING LABORATORY .....	3
1.2.1	Location .....	3
1.2.2	Details of accreditation status .....	3
1.3	DETAILS OF APPROVAL HOLDER .....	4
1.4	APPLICATION DETAILS .....	4
1.5	GENERAL INFORMATION OF TEST ITEM .....	4
1.6	TEST STANDARDS .....	4
<b>2</b>	<b>TECHNICAL TEST</b> .....	<b>5</b>
2.1	SUMMARY OF TEST RESULTS .....	5
2.2	TEST ENVIRONMENT .....	5
2.3	TEST EQUIPMENT LIST .....	6
2.4	GENERAL TEST PROCEDURE .....	9
<b>3</b>	<b>TEST RESULTS (ENCLOSURE)</b> .....	<b>10</b>
3.1	PEAK OUTPUT POWER (TRANSMITTER) .....	11
3.2	EQUIVALENT ISOTROPIC RADIATED POWER .....	17
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS .....	17
3.4	OUT OF BAND RADIATED EMISSIONS .....	17
3.5	SPURIOUS EMISSION (TX) .....	18
3.6	RADIATED EMISSIONS FROM RECEIVER PART .....	19
3.7	RADIATED EMISSION ON THE BAND EDGE .....	20
3.8	POWER LINE CONDUCTED EMISSION .....	26
	APPENDIX .....	27



Registration number: W6M22108-21184-C-1  
FCC ID: O3I-A50WG0400C

**1 General Information**

**1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.


Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.


The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

**Tester:**

October 06, 2021	Leon Chueh	
_____	_____	_____
Date	WTS-Lab. Name	Signature

**Technical responsibility for area of testing:**

October 06, 2021	Kevin Wang	
_____	_____	_____
Date	WTS Name	Signature



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS

No.5-1, Lishui, Shuang Sing Village,

Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

FCC filed test laboratory Reg. No. TW1477, TW1072

Industry Canada filed test laboratory Reg. No. 20037

**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.



Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

### **1.3 Details of approval holder**

Name: Taiwan Fu Hsing Industrial Co., Ltd.  
Street: No.88, Yucai Rd., Gangshan Dist.,  
City: Kaohsiung City 820,  
Country: Taiwan (R.O.C.)  
Telephone: +886-7-6225151  
Fax: ./.

### **1.4 Application details**

Date of receipt of test item: September 03, 2021  
Date of test: from September 06, 2021 to September 23, 2021

### **1.5 General information of Test item**

Type of test item: Keypad Electronic Deadbolt with Zwave Smart Start  
Model Number: A50-WG040-0C  
Multi-listing model number: ./.  
Photos: see Annex

#### **Technical data**

Frequency band: 902-928 MHz  
Operation Frequency: 908.4 MHz, 908.42 MHz, 916 MHz  
Operation modes: Duplex  
Modulation Type: GFSK  
Antenna type: OnBoard Antenna  
Power supply: Battery 1.5Vd.c. x4

#### **Manufacturer: (if different from applicant)**

Name: ./.  
Street: ./.  
Town: ./.  
Country: ./.

### **1.6 Test standards**

Technical standard : 47 CFR PART 15 SUBPART C § 15.249 (2019-10)



Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

**2 Technical test**

**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

**or**

The deviations were ascertained in the course of the tests performed.

**2.2 Test environment**

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details Power supply: Battery 1.5Vd.c. x4

Extreme conditions parameters: Not required

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 1.05 dB Voltage probe : 1.05 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Peak Output Power (transmitter), Equivalent isotropic radiated power, RF Exposure Compliance Requirements, Out of Band Radiated Emissions, Spurious emission (tx), Radiated Emissions from Receiver Part)	Expanded Uncertainty : 0.009-30 MHz : 2.13 dB 30-1000 MHz : 3.53 dB 1-18 GHz : 4.19 dB 18-40 GHz : 4.09 dB
Estimation Result of Uncertainty of Band Edge Measurement (Radiated Emission on the band edge)	Expanded Uncertainty : 1.33 dBc

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

## 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2021/6/17	2022/6/16
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2020/11/6	2021/11/5
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2021/9/21	2022/9/20
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2021/7/29	2022/7/28
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2020/10/26	2021/10/25
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2021/7/28	2022/7/27
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2021/6/17	2022/6/16
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2021/9/7	2022/9/6
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2021/8/4	2022/8/3
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2021/5/31	2022/5/30
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2021/6/16	2022/6/15
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2021/5/5	2022/5/4
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2021/3/18	2022/3/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2021/5/21	2022/5/20
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2021/7/14	2022/7/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2021/3/16	2022/3/15
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2021/2/19	2022/2/18
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2021/5/14	2022/5/13
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2020/10/15	2021/10/14
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2021/9/7	2022/9/6
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2021/5/27	2022/5/26
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
FCC ID: O3I-A50WG0400C

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2021/1/6	2022/1/5
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2020/12/25	2021/12/24
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2021/6/8	2022/6/7
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2021/2/19	2022/2/18
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2021/5/14	2022/5/13
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2021/6/4	2022/6/3
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2021/4/7	2022/4/6
ETSTW-RE 148	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04006	ETC	2021/7/2	2022/7/1
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2021/9/21	2022/9/20
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2021/7/19	2022/7/18
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2021/6/2	2022/6/1
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2021/3/16	2022/3/15
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2021/4/27	2022/4/26
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2020/11/10	2021/11/9
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2021/1/6	2022/1/5
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2021/1/6	2022/1/5
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2021/1/6	2022/1/5
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2021/1/6	2022/1/5
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2021/9/7	2022/9/6
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2021/4/1	2022/3/31
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2021/8/6	2022/8/5
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2021/7/1	2022/6/30
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2021/5/7	2022/5/6
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2021/9/7	2022/9/6
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2021/9/7	2022/9/6
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2021/2/19	2022/2/18
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2021/5/14	2022/5/13





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2021/7/2	2022/7/1
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2021/6/4	2022/6/3
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2021/6/4	2022/6/3
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2021/5/14	2022/5/13
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2021/5/14	2022/5/13
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2021/9/21	2022/9/20
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2021/9/21	2022/9/20



Registration number: W6M22108-21184-C-1  
FCC ID: O3I-A50WG0400C

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m

**ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm height and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the centre of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**ANSI STANDARD C63.10-2013 B.2.7:** Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M22108-21184-C-1  
FCC ID: O3I-A50WG0400C

**3 Test results (enclosure)**

Test case	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.249 (a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.249 (e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.249 (e)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Receiver Part	15.109	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Out of Band Spurious Emission, Band edge-Transmitter operating	15.249 (d)(e), 15.35 (b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C


## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.249 (a)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

908.4 MHz

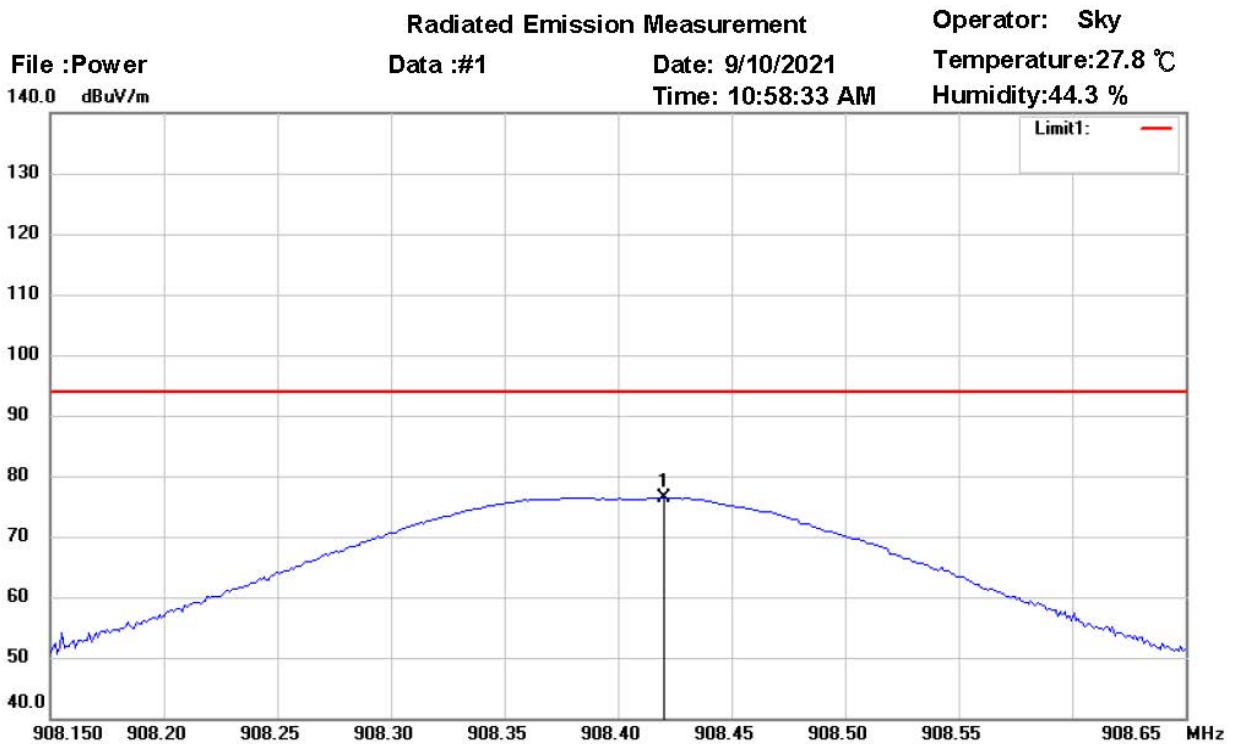

Site : Chamber

Condition : FCC 15.249 power(902-928)\_QP

EUT : W6M22108-21184

M/N:

Test Mode : TX 908.4MHz


Note :

Polarization: *Horizontal*

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	908.4202	44.73	QP	31.72	76.45	94.00	215	359	-17.55	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C

## Radiated Emission Measurement


Operator: Sky

File :Power  
 140.0 dBuV/m

Data :#2

Date: 9/10/2021  
 Time: 11:07:31 AM

Temperature:27.8 °C  
 Humidity:44.3 %

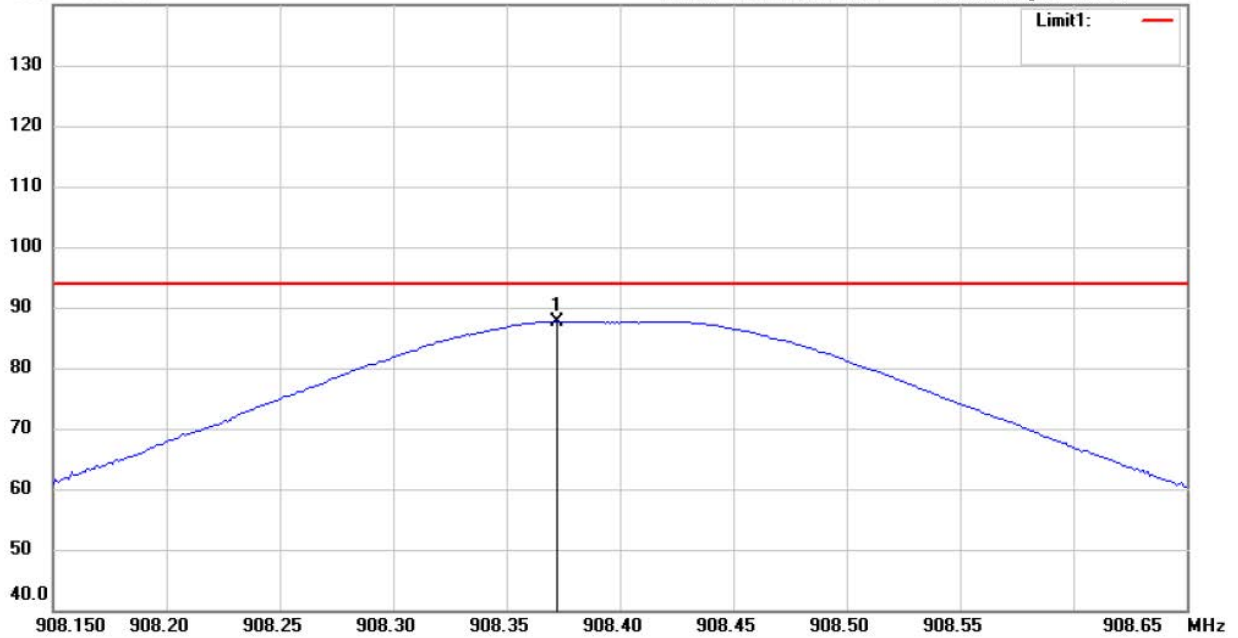

Site : Chamber

Condition : FCC 15.249 power(902-928)\_QP

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	908.3722	56.01	QP	31.72	87.73	94.00	100	310	-6.27	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C  
 908.42 MHz


## Radiated Emission Measurement

Operator: Sky  
 Temperature: 27.8 °C  
 Humidity: 44.3 %

File : Power  
 140.0 dBuV/m

Data : #1

Date: 9/10/2021  
 Time: 11:47:03 AM

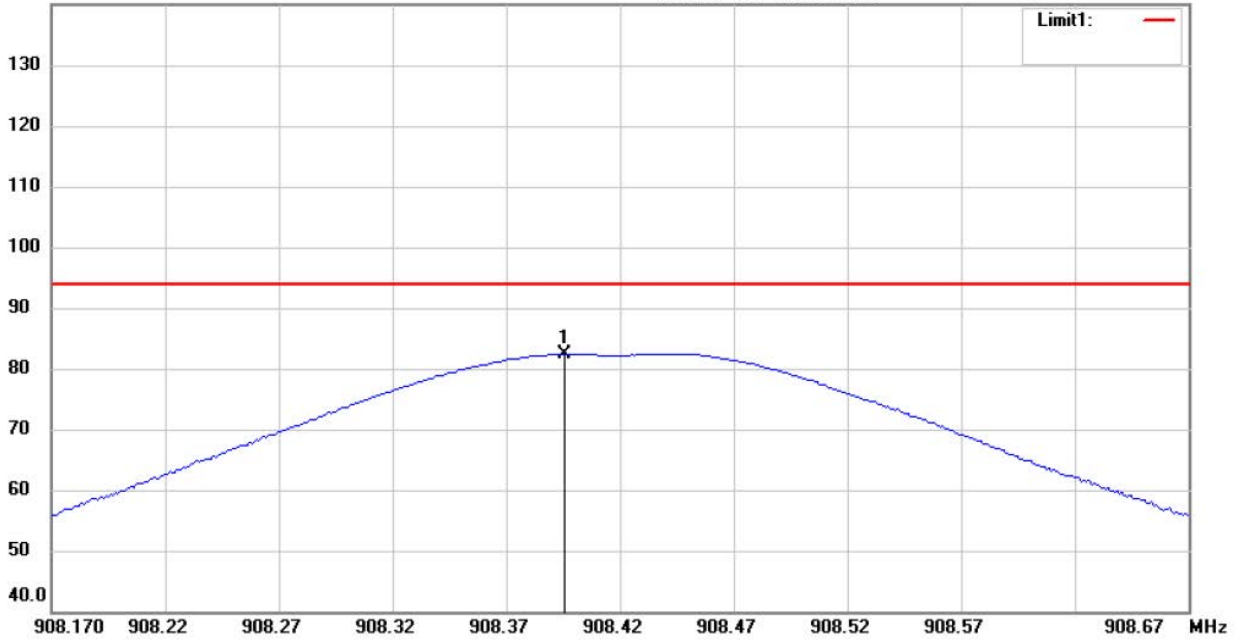

Site : Chamber

Condition : FCC 15.249 power(902-928)\_QP

EUT : W6M22108-21184

M/N:

Test Mode : TX 908.42MHz


Note :

Polarization: *Horizontal*

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	908.3955	50.78	QP	31.72	82.50	94.00	210	300	-11.50	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C

## Radiated Emission Measurement

Operator: Sky

File :Power  
 140.0 dBuV/m


Data :#2

Date: 9/10/2021

Temperature:27.8 °C

Time: 11:56:39 AM

Humidity:44.3 %

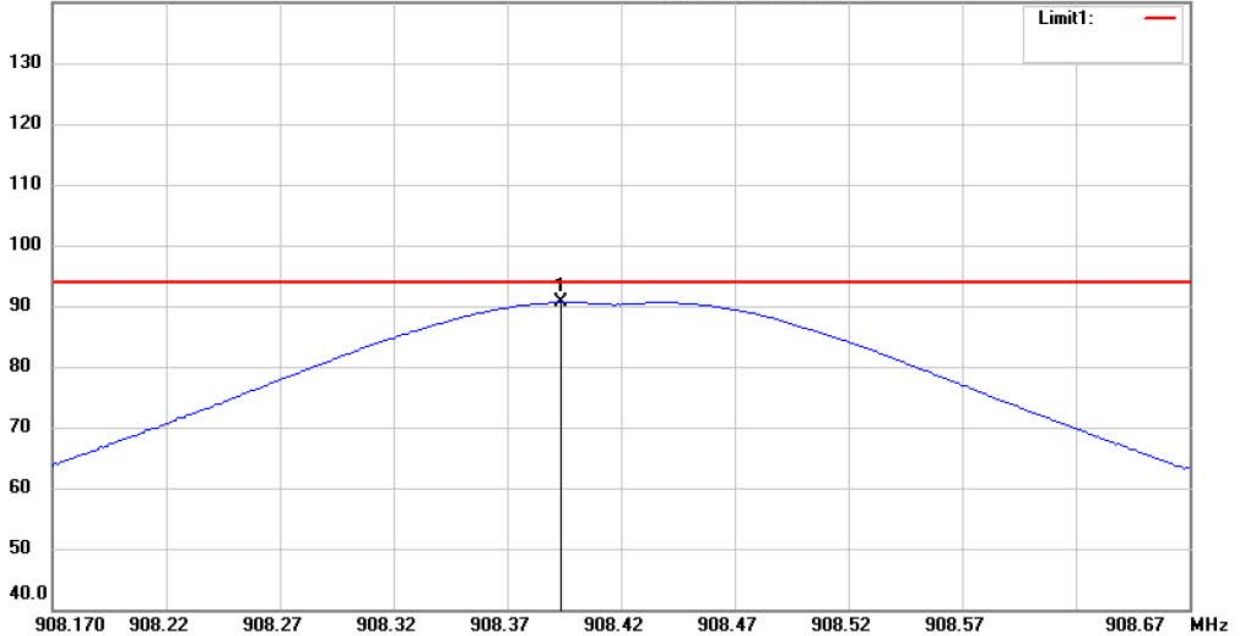

Site : Chamber

Condition : FCC 15.249 power(902-928)\_QP

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	908.3934	58.87	QP	31.72	90.59	94.00	100	330	-3.41	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C  
 916 MHz

### Radiated Emission Measurement

Operator: Allen

File :Power  
 140.0 dBuV/m


Data :#1

Date: 9/8/2021

Temperature:30.3 °C

Time: 12:54:58 AM

Humidity:49.2 %

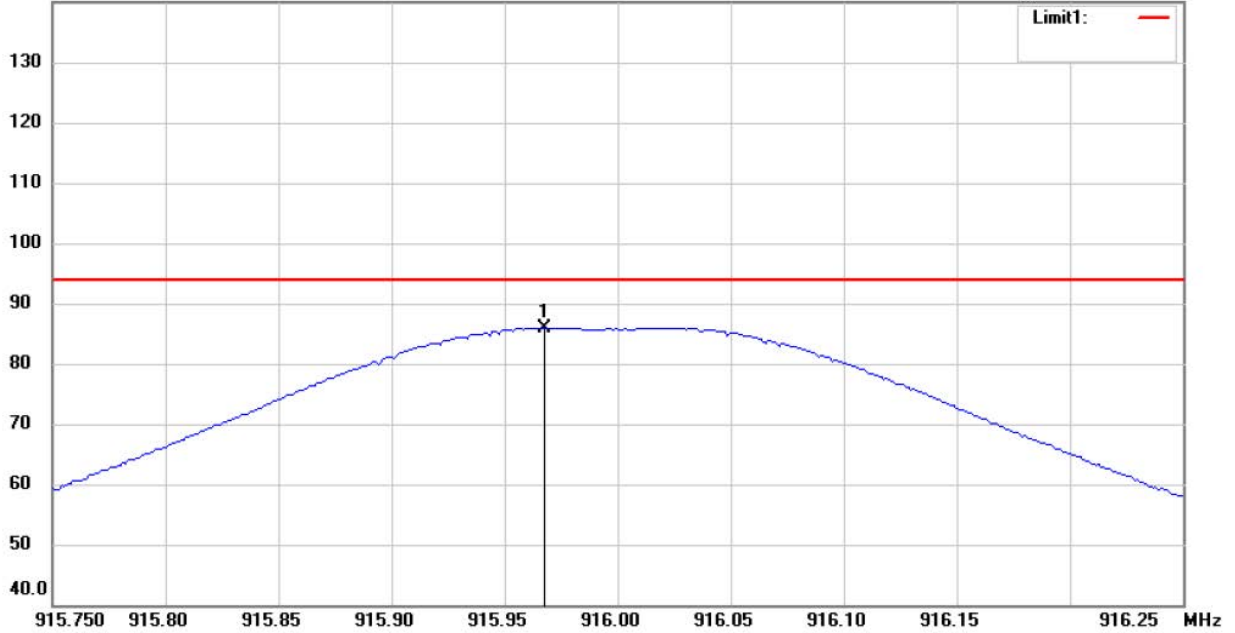

Site : Chamber

Condition : FCC 15.249 power(902-928)\_QP

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	915.9673	54.07	QP	31.86	85.93	94.00	110	225	-8.07	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C

**Radiated Emission Measurement**


Operator: Allen

File :Power  
 140.0 dBuV/m

Data :#2

Date: 9/8/2021  
 Time: 1:01:19 AM

Temperature:30.3 °C  
 Humidity:49.2 %

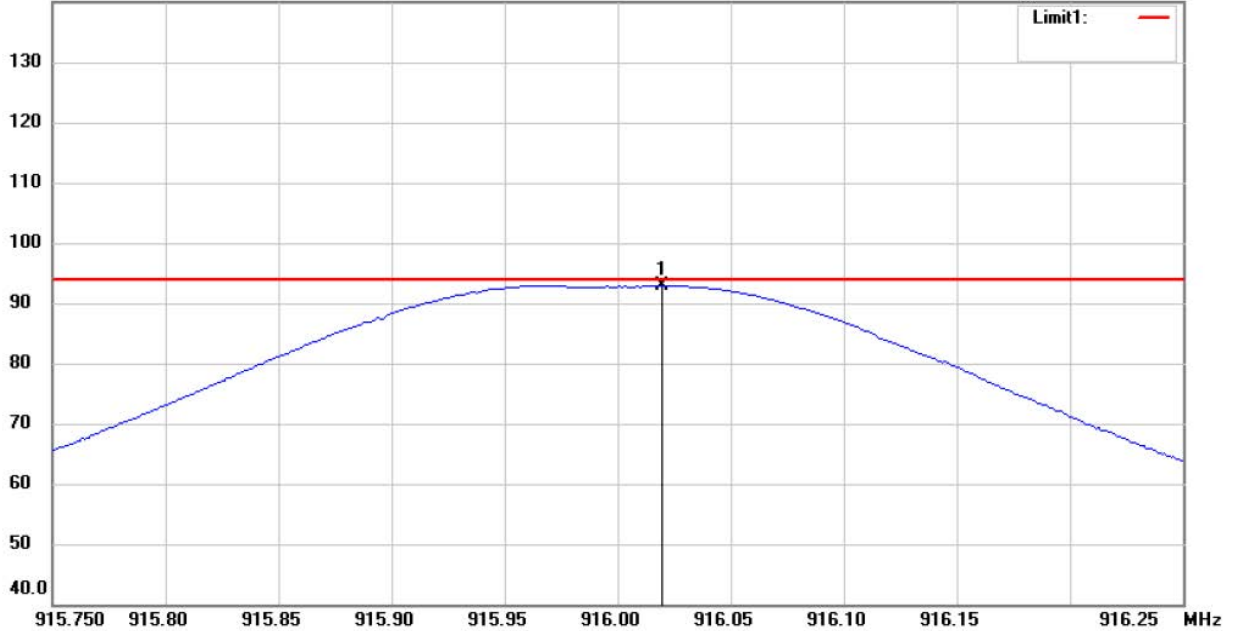

Site : Chamber

Condition : FCC 15.249 power(902-928)\_QP

EUT : W6M22108-21184

M/N:

Test Mode : TX 916MHz

Note :

Polarization: *Vertical*

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	916.0195	61.00	QP	31.86	92.86	94.00	100	230	-1.14	

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

**3.2 Equivalent isotropic radiated power**

Because using an permanent antenna there are no deviations from the radiated test results according 3.1.

**3.3 RF Exposure Compliance Requirements**

Not applicable for this EUT for the low power level.

**3.4 Out of Band Radiated Emissions**

FCC Rule: 15.249 (d)(e), 15.35(b)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

For frequency above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Limits:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.5
Above 960	500	54.0

For frequencies above 1 GHz (Peak measurements).

Limit + 20 dB    54.0 dBμV/m + 20 dB= 74 dBμV/m

Or

Must be attenuated at least 50dB below the level of fundament

Test equipment used: ETSTW-RE 004, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 030

Explanation: Please see attached diagram as appendix.



Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

**3.5 Spurious emission (tx)**

Spurious emission was measured with modulation (declared by manufacturer).

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

SAMPLE CALCULATION OF LIMIT. ALL results will be updated by an automatic measuring system in accordance with point 2.3.

The peak and average spurious emission plots was measured with the average limits. The critical peak value listed in the table agree with the above calculated limits.

**Summary table with radiated data of the test plots**

Model:	A50-WG040-0C	Date:	--
Mode:	--	Temperature:	-- °C
Polarization:	Horizontal	Humidity:	-- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

**Note**

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: PK Limit Line, Down Line: Ave Limit Line.
6. Please see attached diagrams in appendix.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 030, ETSTW-RE 088, ETSTW-RE 018



Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

**3.6 Radiated Emissions from Receiver Part**

**Summary table with radiated data of the test plots**

Model: A50-WG040-0C Date: --  
 Mode: -- Temperature: -- °C Engineer: --  
 Polarization: -- Humidity: -- %

Frequency (MHz)	Reading (dBUV)	Detector	Factor (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBUV)		Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

**Note**

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Please see attached diagrams in appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 030




Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C

**3.7 Radiated Emission on the band edge**

From the following plots, they show that the fundamental emissions are confined in the specified band and they are at least 50 dB below the carrier level at band edge (2400 and 2483.5 MHz). It meets the requirement of section 15.249(d).

908.4 MHz

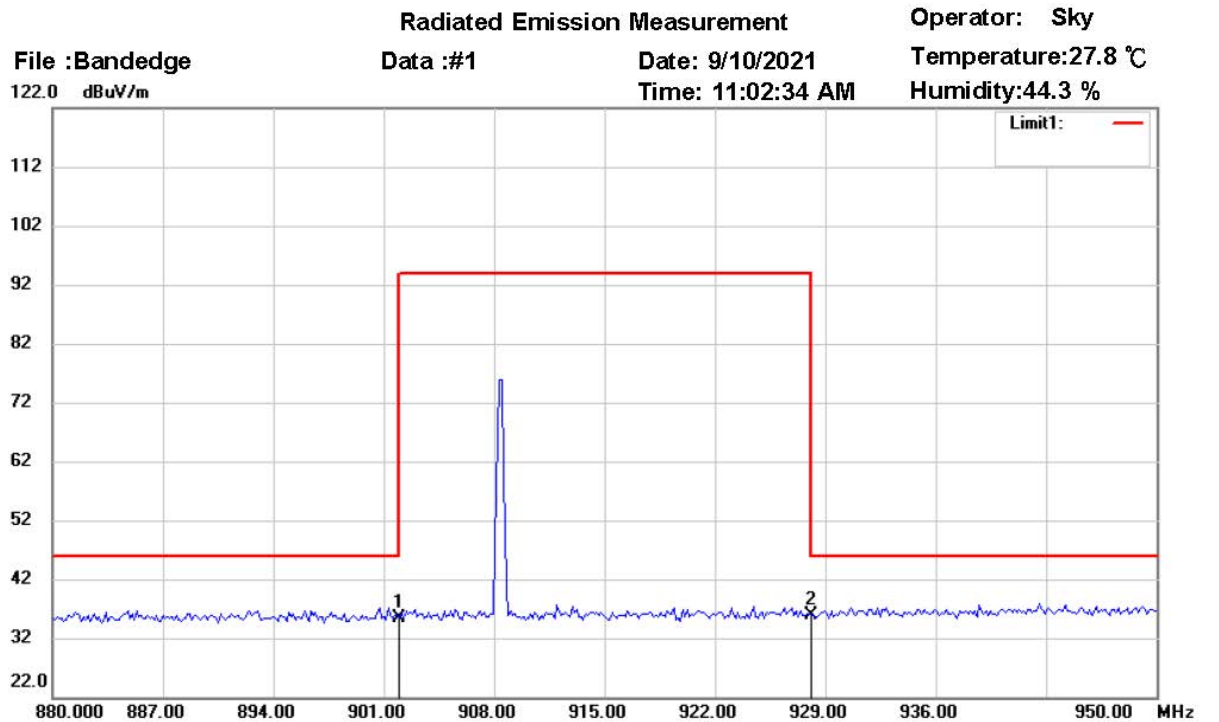

Site : Chamber

Condition : FCC 15.249 Bandedge(902-928)\_QP

EUT : W6M22108-21184

M/N:

Test Mode : TX 908.4MHz

Note :

Polarization: *Horizontal*

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	902.0000	3.89	QP	31.60	35.49	46.00	215	359	-10.51	
*	928.0000	3.73	QP	32.08	35.81	46.00	215	359	-10.19	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C


## Radiated Emission Measurement

Operator: Sky  
 Temperature: 27.8 °C  
 Humidity: 44.3 %

File : Bandedge  
 122.0 dBuV/m

Data : #2

Date: 9/10/2021  
 Time: 11:08:10 AM

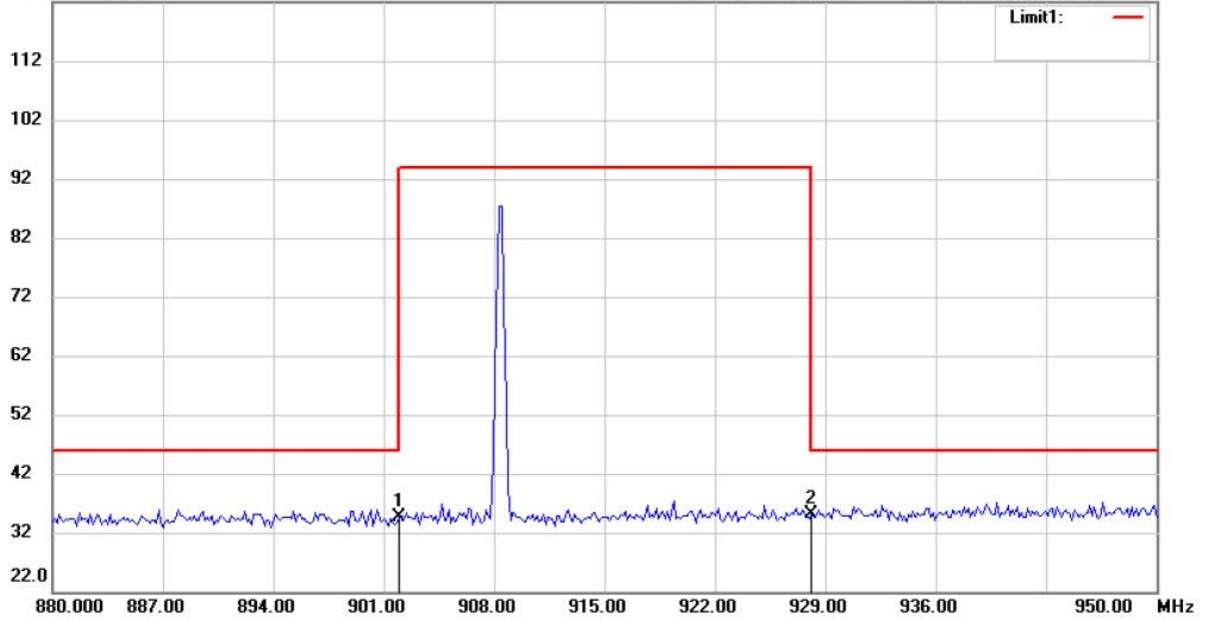

Site : Chamber

Condition : FCC 15.249 Bandedge(902-928)\_QP

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	902.0000	3.05	QP	31.60	34.65	46.00	100	310	-11.35	
*	928.0000	3.16	QP	32.08	35.24	46.00	100	310	-10.76	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C  
 908.42 MHz

## Radiated Emission Measurement

Operator: Sky

File :Bandedge  
 122.0 dBuV/m


Data :#1

Date: 9/10/2021

Temperature:27.8 °C

Time: 11:52:19 AM

Humidity:44.3 %

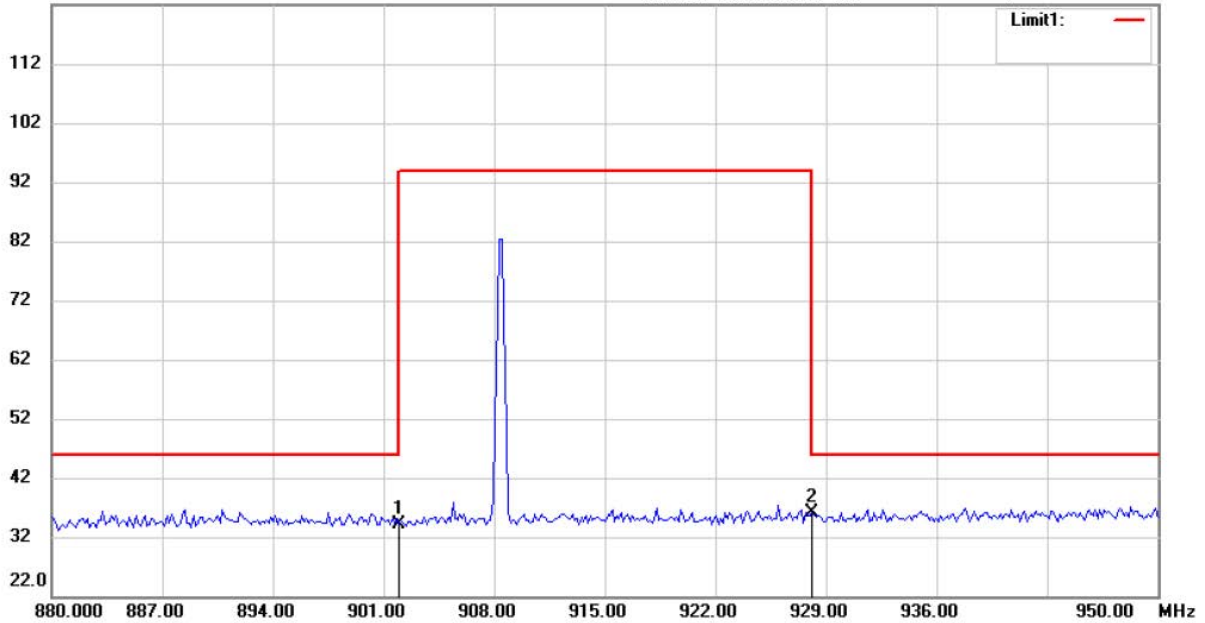

Site : Chamber

Condition : FCC 15.249 Bandedge(902-928)\_QP

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	902.0000	2.59	QP	31.60	34.19	46.00	210	300	-11.81	
*	928.0000	4.13	QP	32.08	36.21	46.00	210	300	-9.79	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C

## Radiated Emission Measurement

Operator: Sky

File :Bandedge  
 122.0 dBuV/m


Data :#2

Date: 9/10/2021

Temperature:27.8 °C

Time: 11:58:26 AM

Humidity:44.3 %

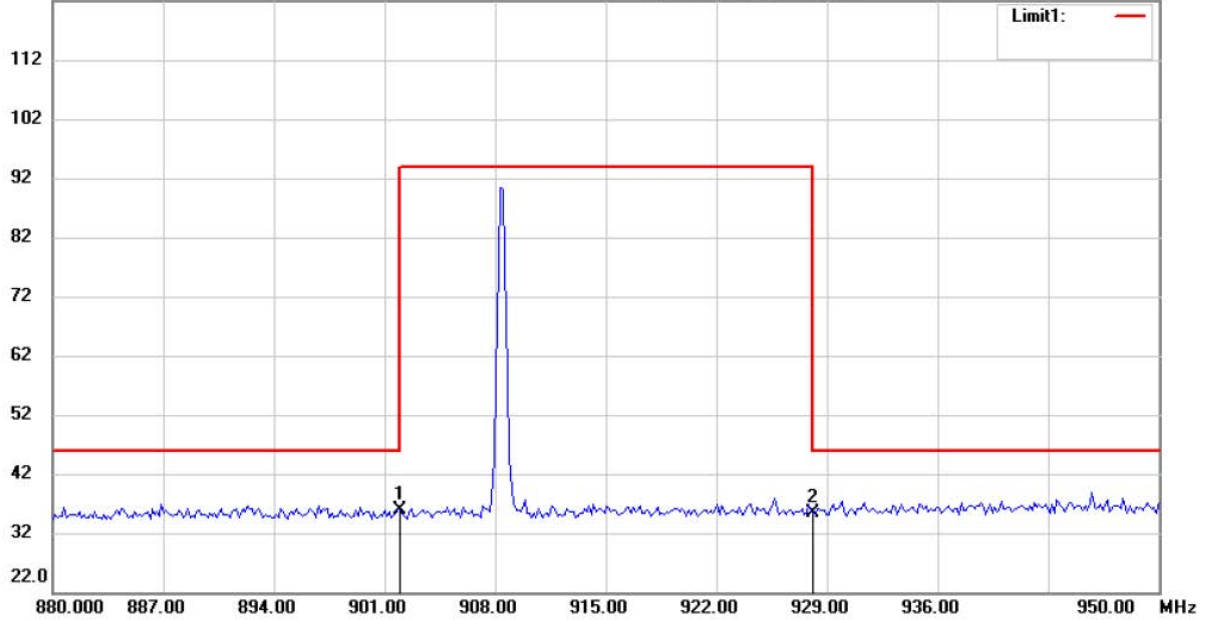

Site : Chamber

Condition : FCC 15.249 Bandedge(902-928)\_QP

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	902.0000	4.36	QP	31.60	35.96	46.00	100	330	-10.04	
	928.0000	3.26	QP	32.08	35.34	46.00	100	330	-10.66	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C  
 916 MHz


## Radiated Emission Measurement

Operator: Sky  
 Temperature: 27.8 °C  
 Humidity: 44.3 %

File : bandedge  
 122.0 dBuV/m

Data : #1

Date: 9/10/2021  
 Time: 1:11:16 PM

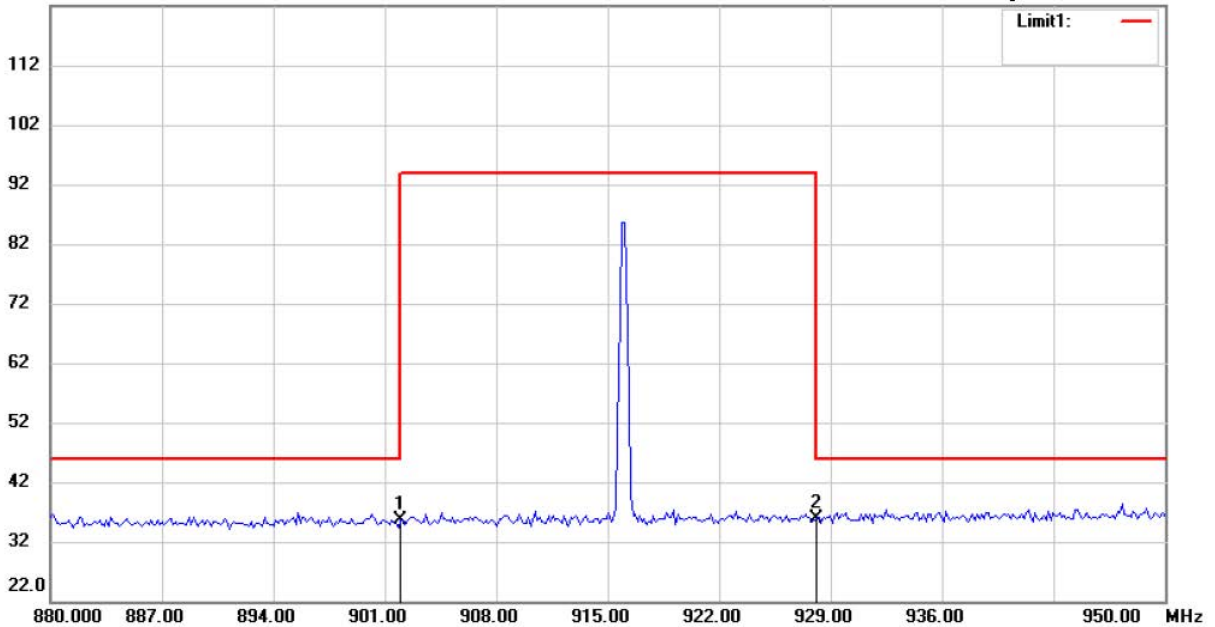

Site : Chamber

Condition : FCC 15.249 Bandedge(902-928)\_QP

EUT : W6M22108-21184

M/N:

Test Mode : TX 916MHz

Note :

Polarization: *Horizontal*

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	902.0000	4.02	QP	31.60	35.62	46.00	110	225	-10.38	
*	928.0000	3.74	QP	32.08	35.82	46.00	110	225	-10.18	




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22108-21184-C-1  
 FCC ID: O3I-A50WG0400C

**Radiated Emission Measurement**

File :bandedge      Data :#2      Date: 9/10/2021      Operator: Sky  
 122.0 dBuV/m      Time: 1:17:10 PM      Temperature:27.8 °C  
 Humidity:44.3 %

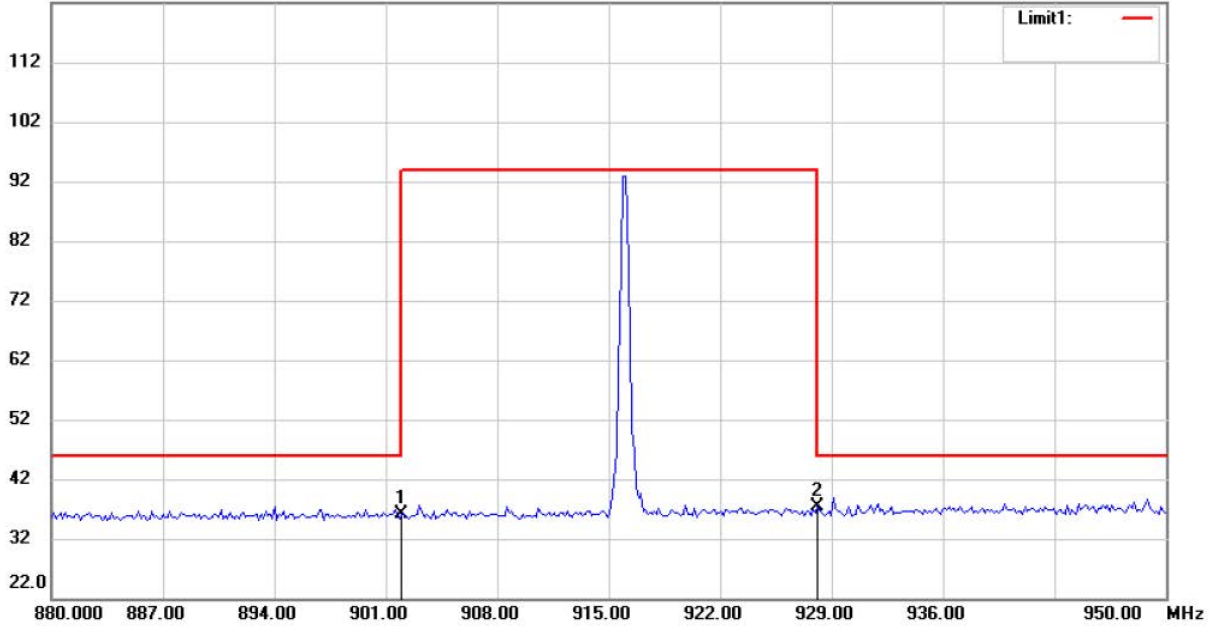

Site : Chamber  
 Condition : FCC 15.249 Bandedge(902-928)\_QP      Polarization: *Vertical*  
 EUT : W6M22108-21184      Power : 6 Vd.c.  
 M/N:      Distance: 3m  
 Test Mode : TX 916MHz  
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	902.0000	4.47	QP	31.60	36.07	46.00	100	230	-9.93	
*	928.0000	5.40	QP	32.08	37.48	46.00	100	230	-8.52	

Limit:

Frequency Range (MHz)	Limit (dB $\mu$ V/m)	
	Peak	Average
902 – 928	114	94
2400 – 2483.5	74	54
5725 – 5875	74	54

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M22108-21184-C-1

FCC ID: O3I-A50WG0400C

**3.8 Power Line Conducted Emission**

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dB $\mu$ V)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

- Note:**
1. The formula of measured value as: **Test Result = Reading + Correction Factor**
  2. The Correction Factor = Cable Loss + LISN Insertion Loss
  3. Detector function in the form : PK = Peak, QP = Qusai Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. Up Line: QP Limit Line, Down Line: Ave Limit Line.
  6. This test is not required because EUT is battery-used.

**Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



## **Appendix**

### **A Photos**

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission

### **B Measurement diagrams**

Spurious Emissions radiated



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

## Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:10:56 AM

Humidity:49.2 %

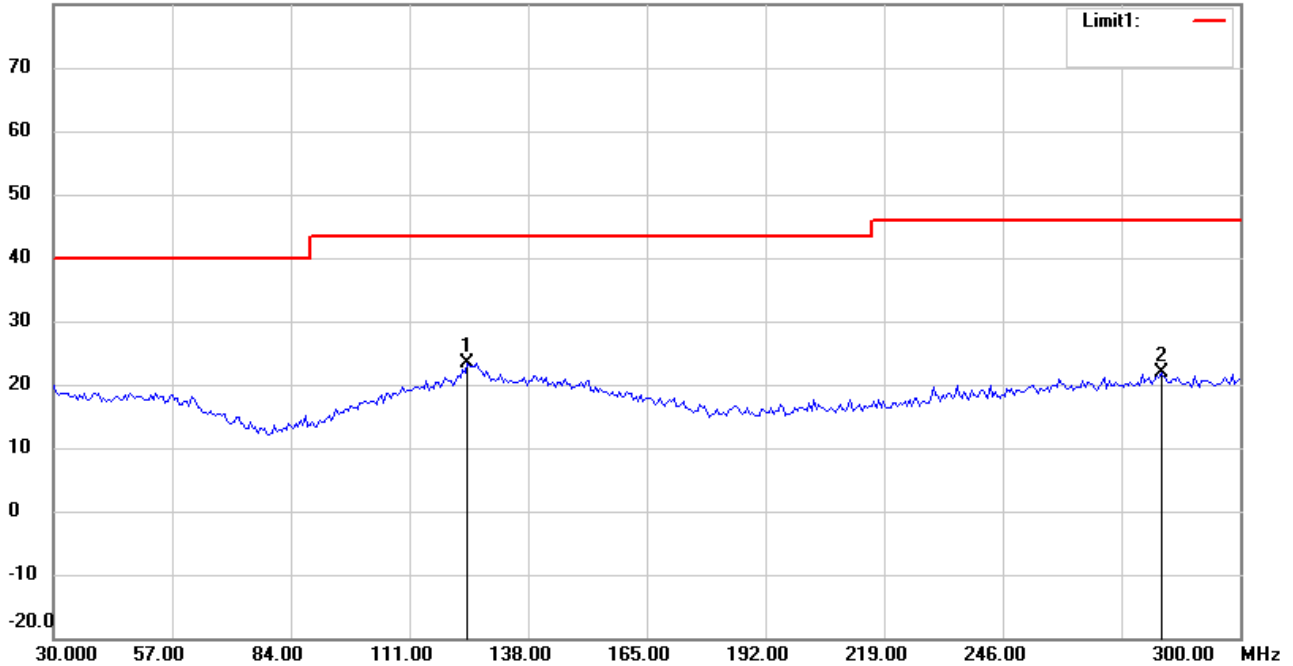

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	124.1483	30.24	peak	-6.85	23.39	43.50	110	60	-20.11	
	282.1443	27.55	peak	-5.79	21.76	46.00	135	192	-24.24	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:12:30 AM

Humidity:49.2 %

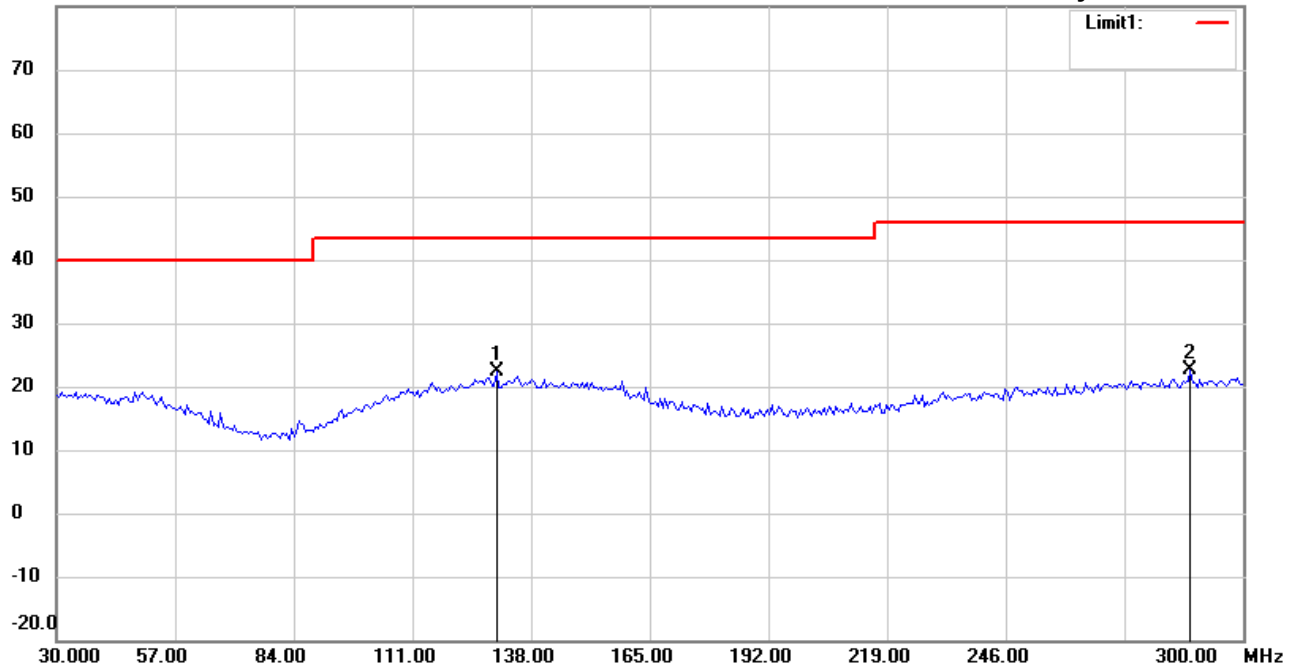

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	130.1002	28.87	peak	-6.57	22.30	43.50	142	196	-21.20	
	288.0962	28.51	peak	-5.84	22.67	46.00	110	113	-23.33	



Radiated Emission Measurement

Operator: Allen

File :2

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:14:58 AM

Humidity:49.2 %

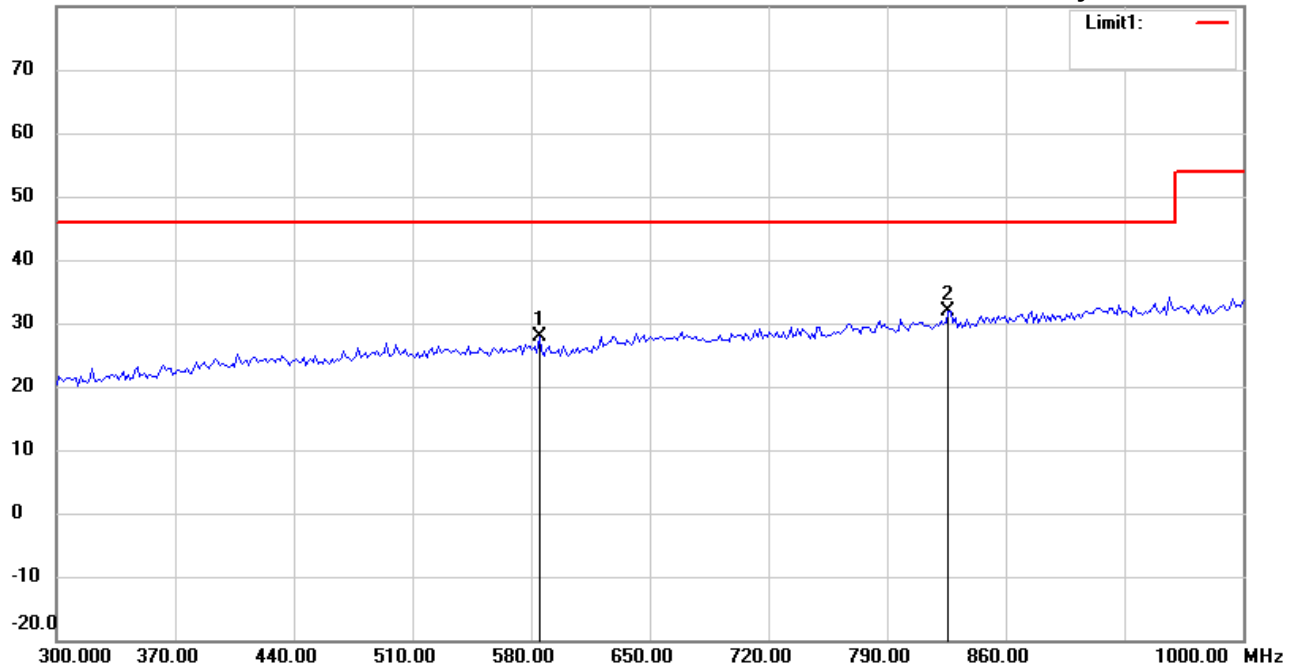

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	584.7695	29.24	peak	-1.46	27.78	46.00	100	300	-18.22	
*	826.0521	28.69	peak	3.21	31.90	46.00	145	276	-14.10	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :2

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:16:26 AM

Humidity:49.2 %

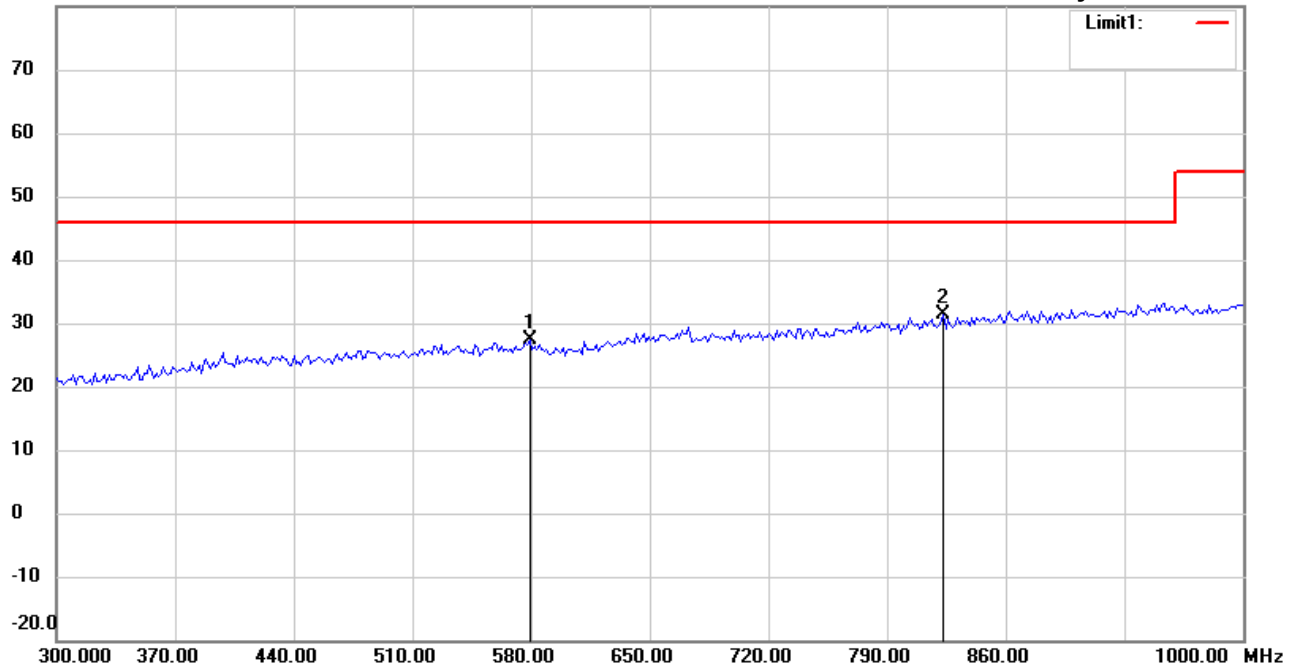

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	579.1583	28.80	peak	-1.47	27.33	46.00	112	149	-18.67	
*	823.2465	28.35	peak	3.14	31.49	46.00	136	55	-14.51	

\*:Maximum data    x:Over limit    !:over margin





Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:16:03 AM

Humidity:49.2 %

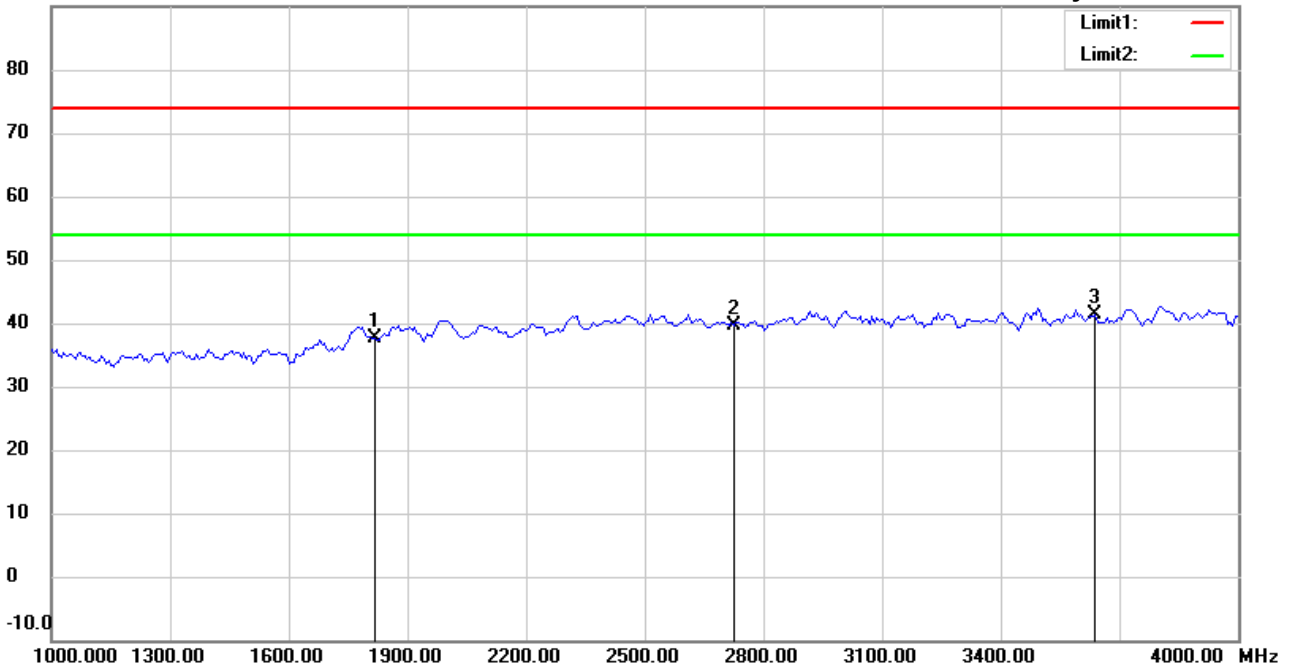

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1816.800	40.93	peak	-3.18	37.75	74.00	150	103	-36.25	
	2725.200	40.44	peak	-0.92	39.52	74.00	150	57	-34.48	
*	3633.600	40.38	peak	0.96	41.34	74.00	150	320	-32.66	



Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:19:58 AM

Humidity:49.2 %

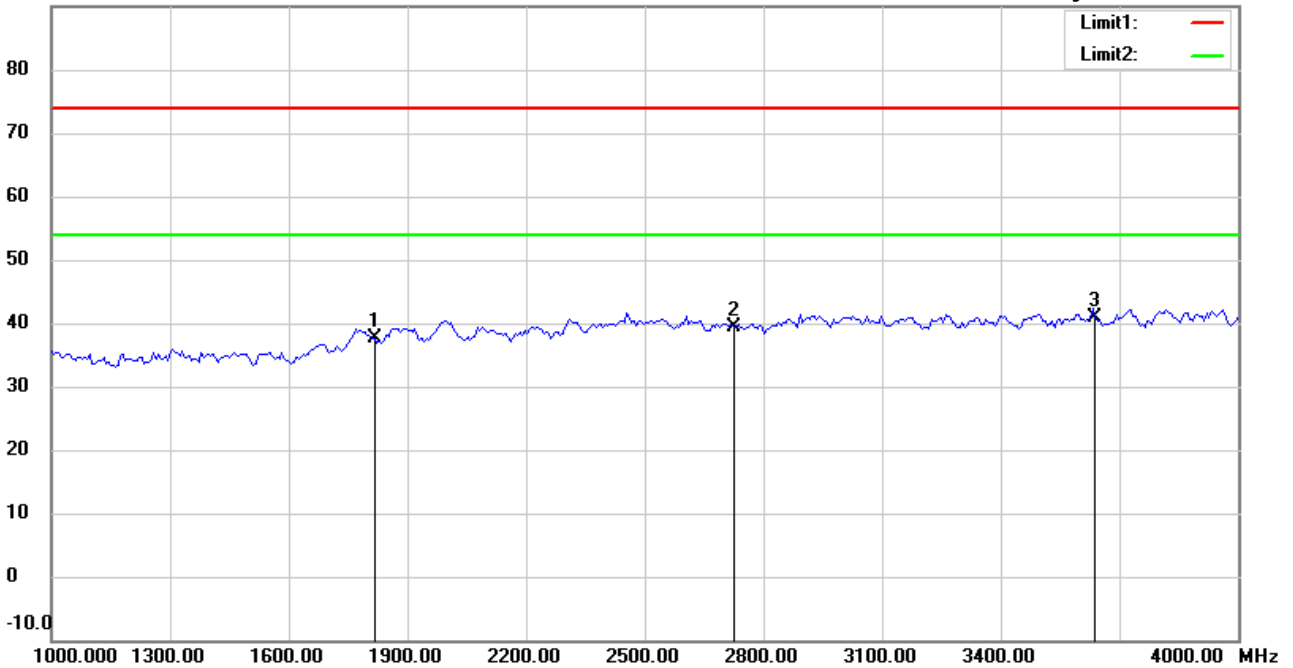

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: **Vertical**

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1816.800	40.71	peak	-3.18	37.53	74.00	150	342	-36.47	
	2725.200	40.22	peak	-0.92	39.30	74.00	150	55	-34.70	
*	3633.600	40.01	peak	0.96	40.97	74.00	150	190	-33.03	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:17:04 AM

Humidity:49.2 %

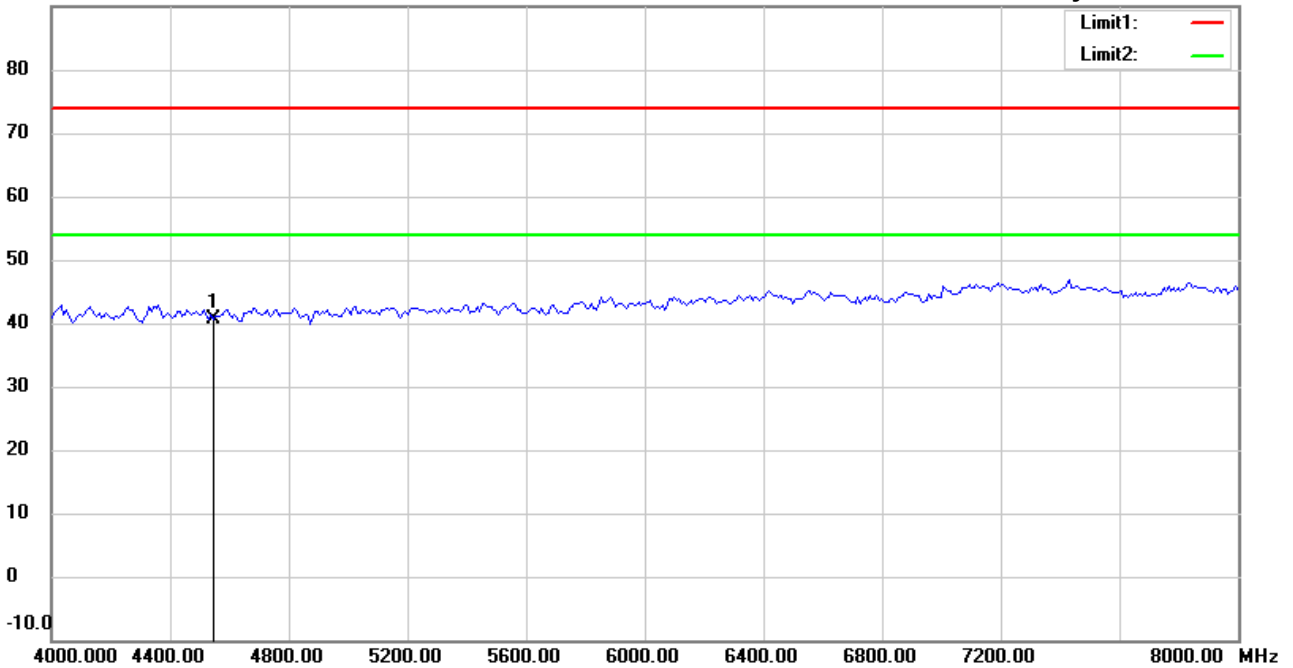

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4542.000	39.60	peak	1.11	40.71	74.00	150	69	-33.29	

\*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:20:59 AM

Humidity:49.2 %

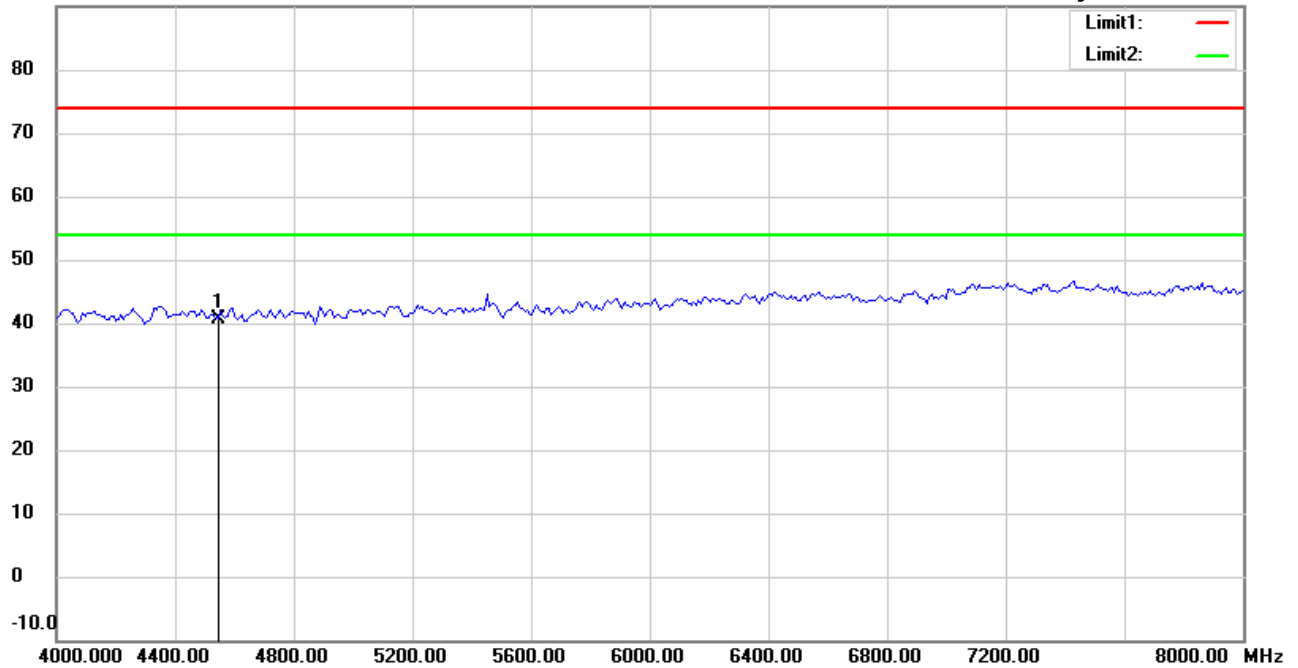

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4542.000	39.50	peak	1.11	40.61	74.00	150	200	-33.39	

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:18:12 AM

Humidity:49.2 %

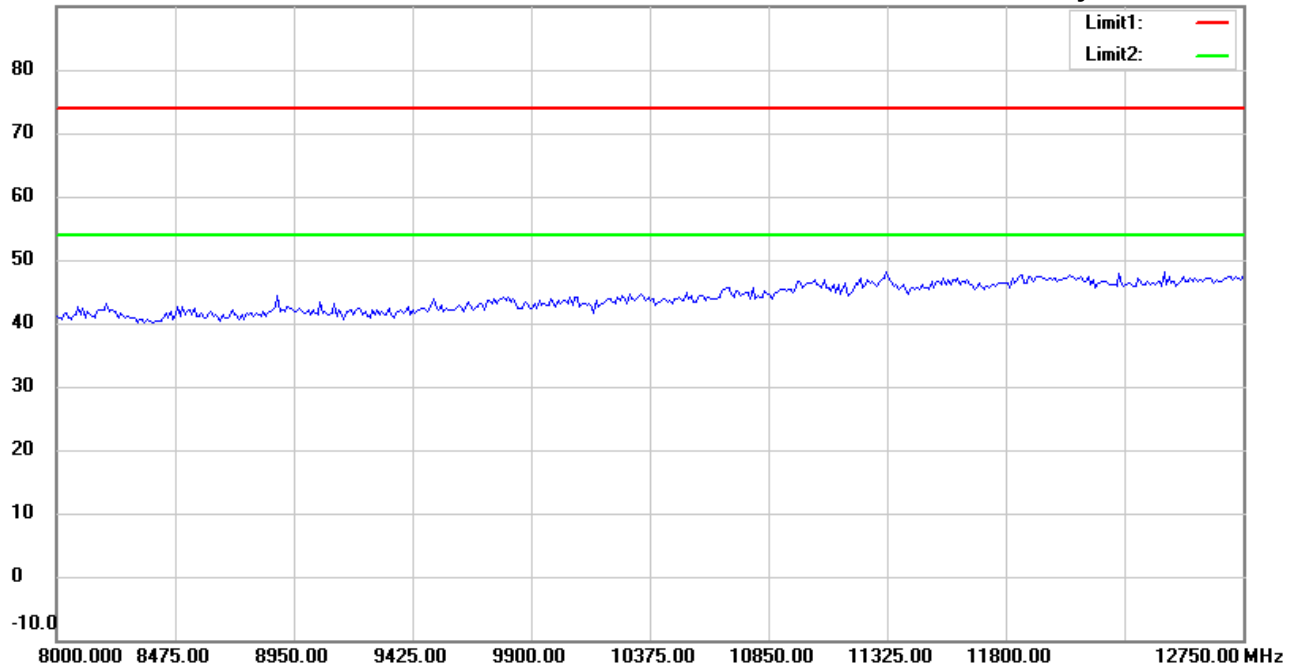

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:23:27 AM

Humidity:49.2 %

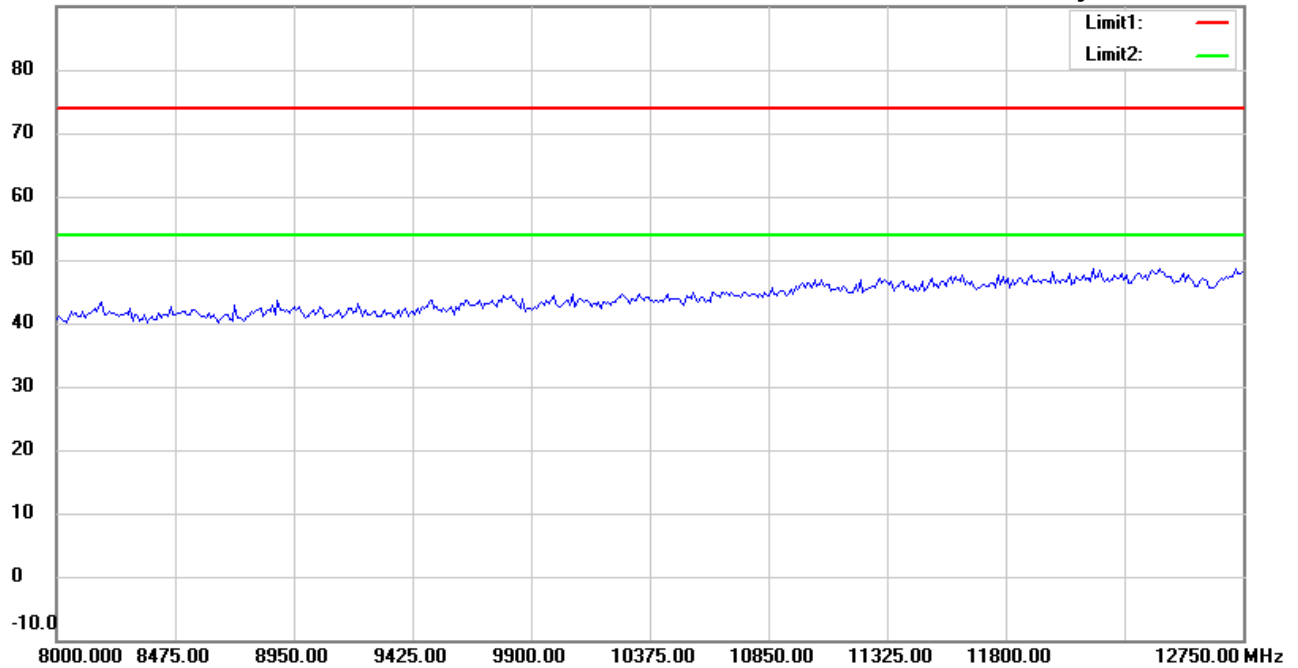

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:38:02 AM

Humidity:49.2 %

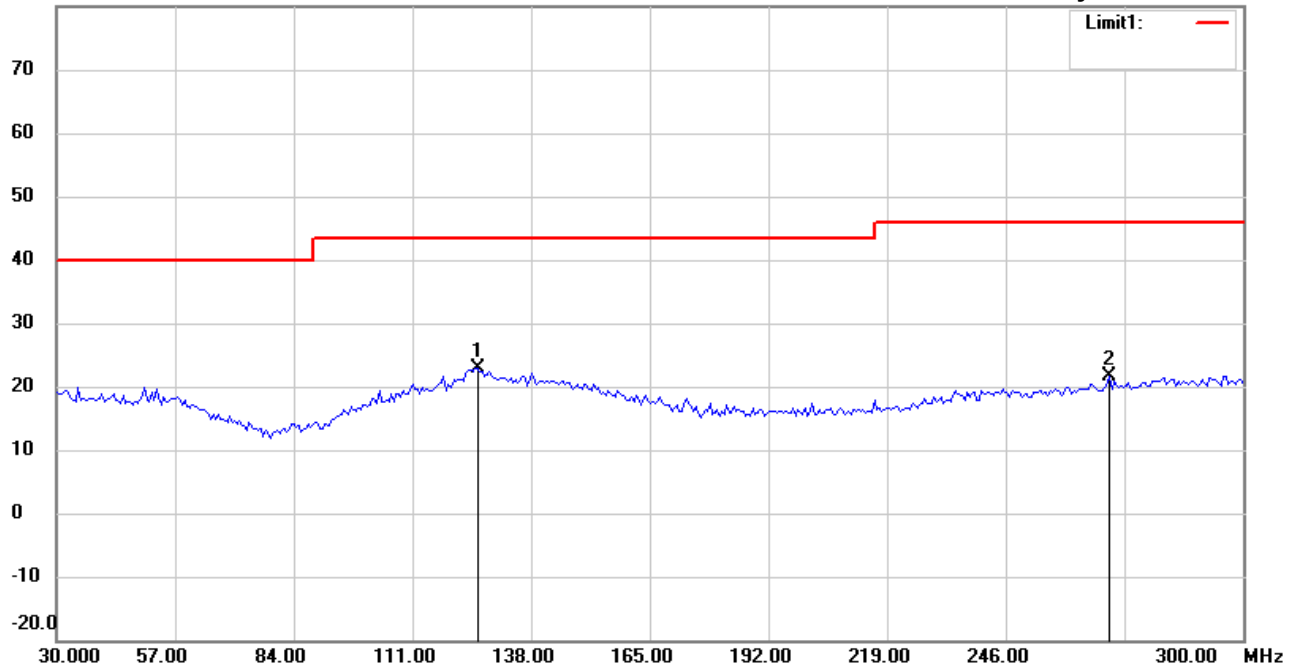

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.7715	29.73	peak	-6.77	22.96	43.50	106	242	-20.54	
	269.6994	27.97	peak	-6.24	21.73	46.00	137	96	-24.27	

\*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:39:44 AM

Humidity:49.2 %

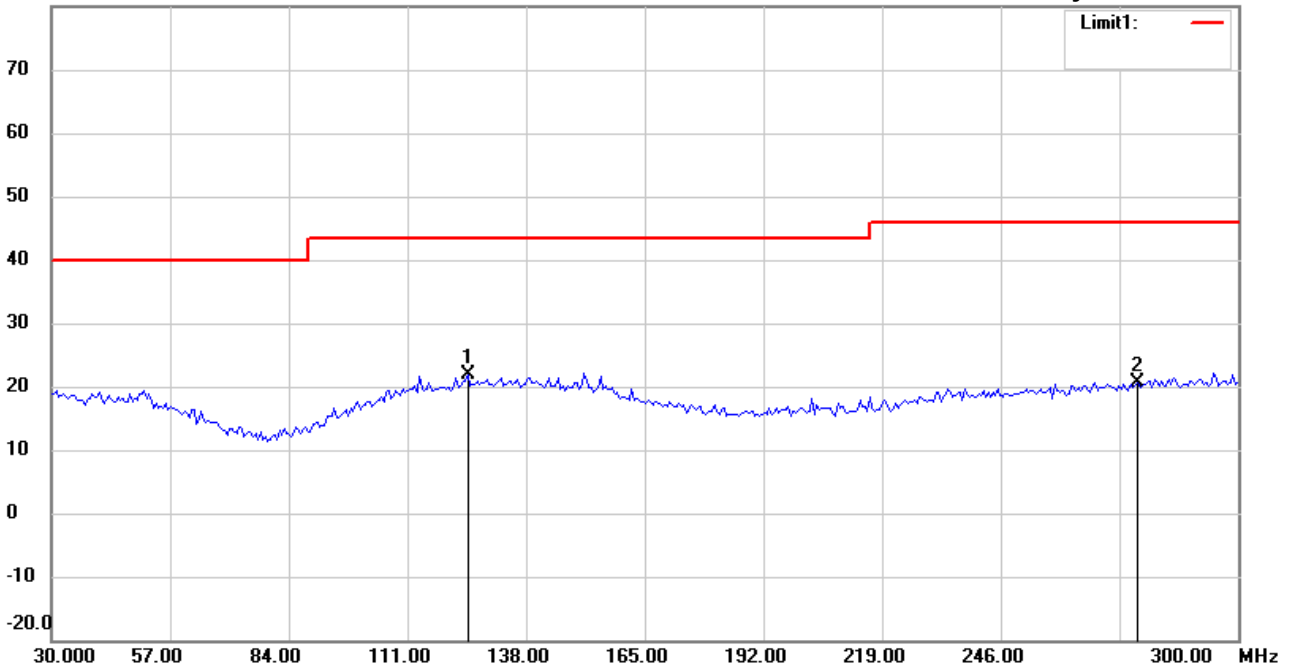

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	124.6894	28.66	peak	-6.82	21.84	43.50	144	105	-21.66	
	277.2745	26.64	peak	-5.90	20.74	46.00	100	285	-25.26	





Radiated Emission Measurement

Operator: Allen

File :2

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:43:54 AM

Humidity:49.2 %

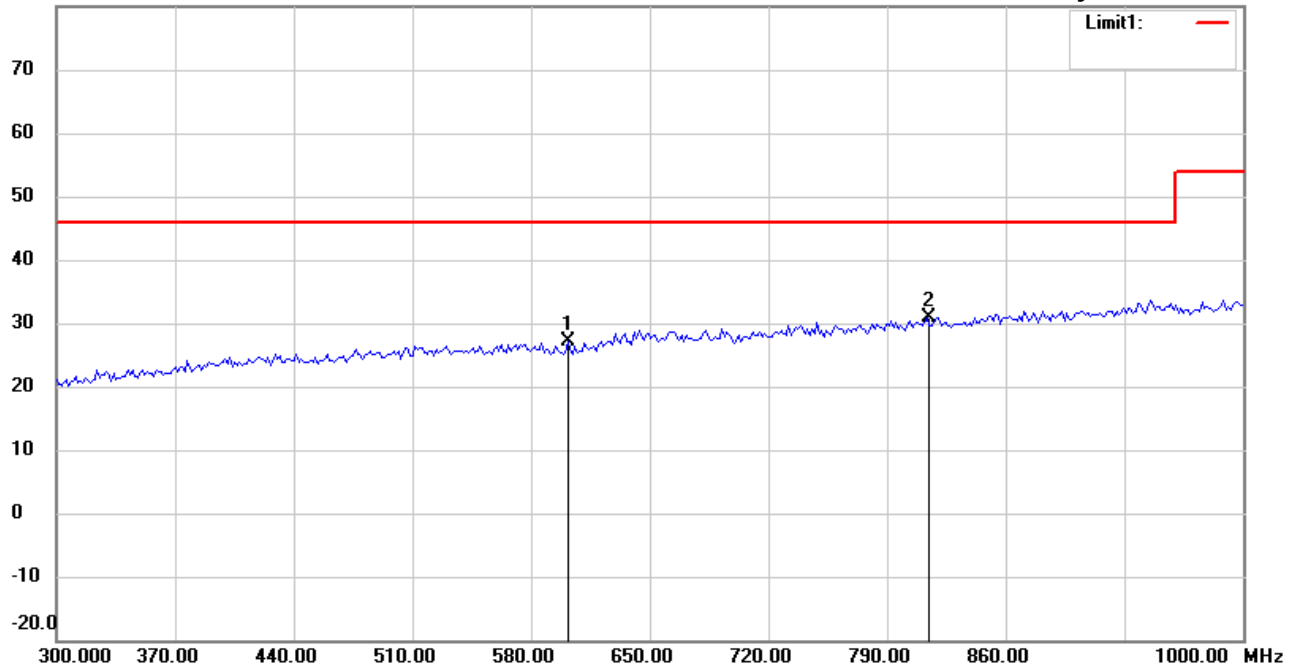

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	601.6032	28.54	peak	-1.38	27.16	46.00	100	168	-18.84	
*	813.4270	27.96	peak	2.90	30.86	46.00	132	40	-15.14	



Radiated Emission Measurement

Operator: Allen

File :2

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:46:11 AM

Humidity:49.2 %

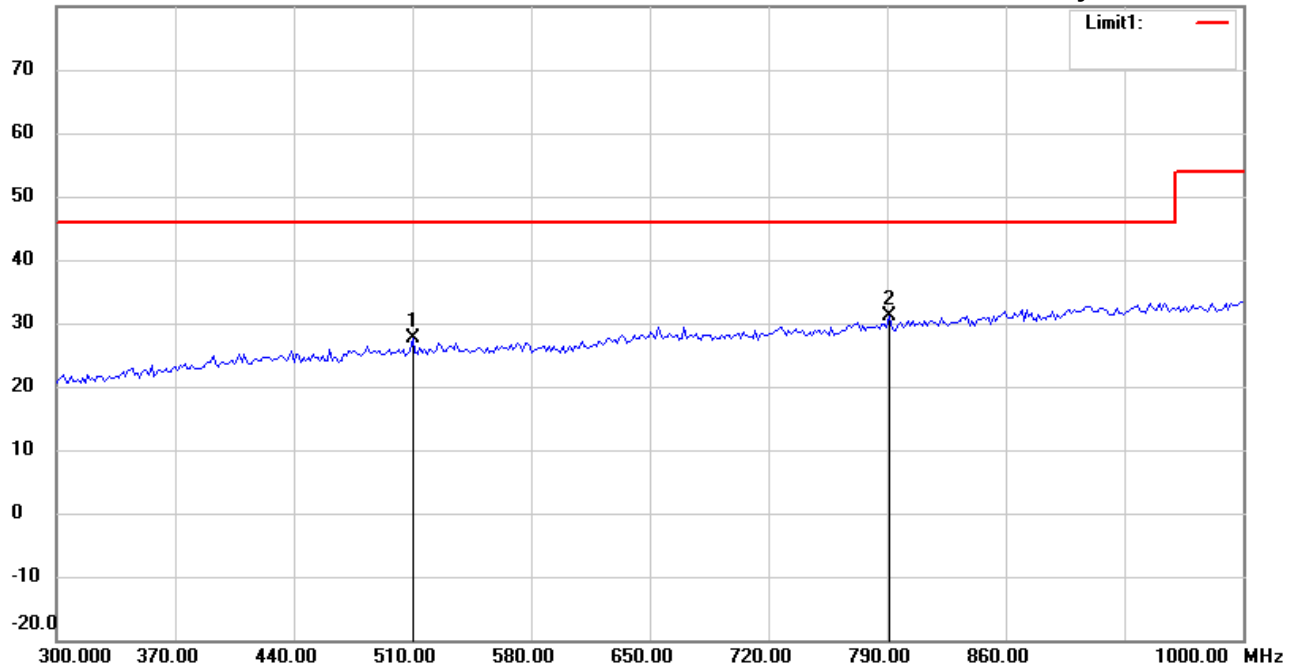

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	510.4208	29.47	peak	-1.93	27.54	46.00	131	355	-18.46	
*	790.9820	28.64	peak	2.41	31.05	46.00	104	140	-14.95	



Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:12:18 AM

Humidity:49.2 %

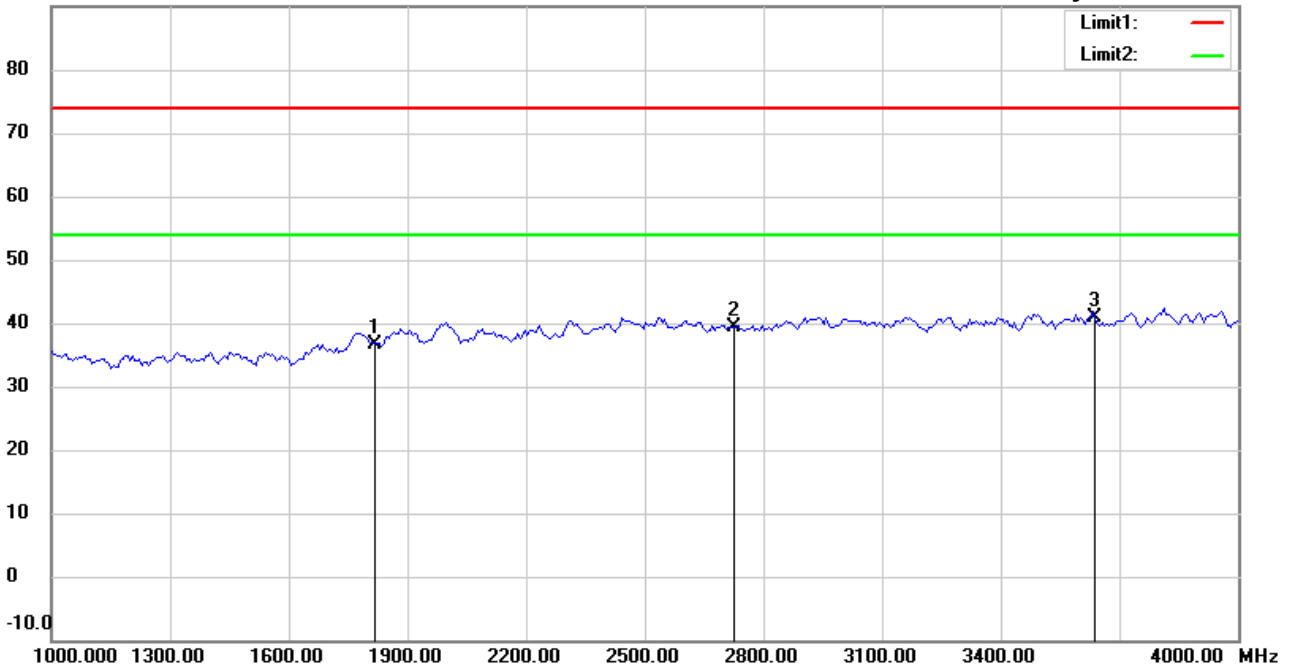

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1816.840	39.86	peak	-3.18	36.68	74.00	150	150	-37.32	
	2725.260	40.24	peak	-0.92	39.32	74.00	150	62	-34.68	
*	3633.680	39.81	peak	0.96	40.77	74.00	150	284	-33.23	



Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:15:57 AM

Humidity:49.2 %

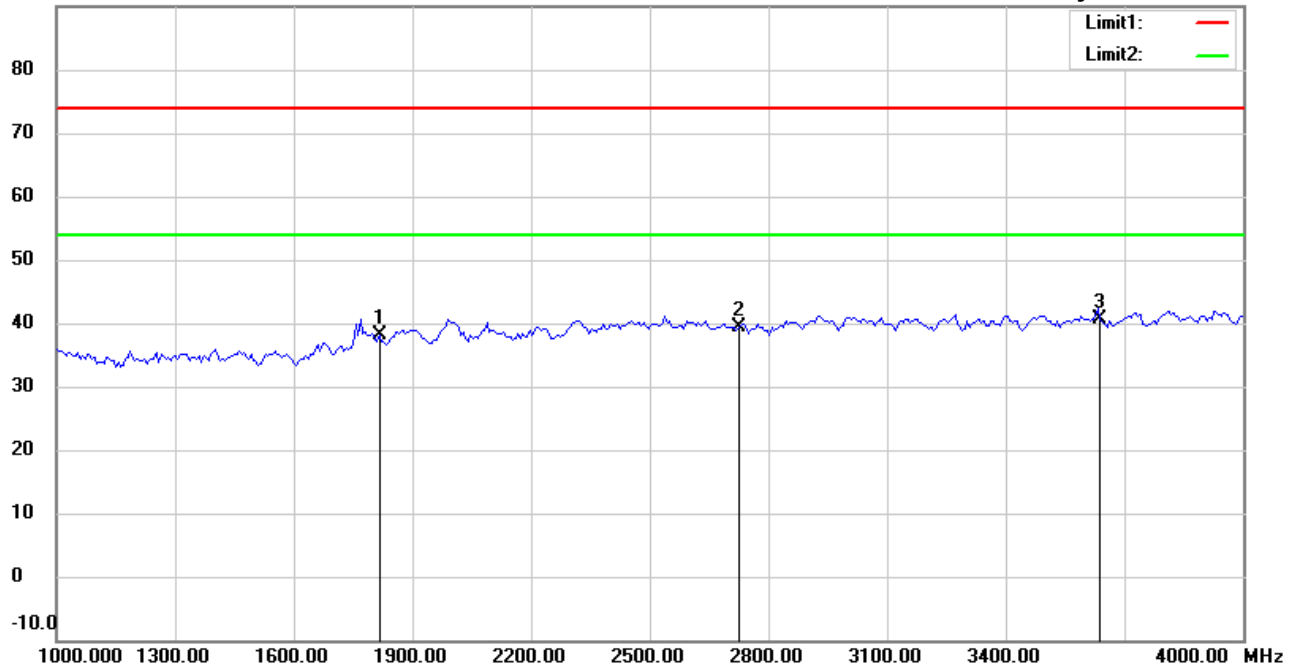

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: **Vertical**

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1816.840	41.19	peak	-3.18	38.01	74.00	150	112	-35.99	
	2725.260	40.29	peak	-0.92	39.37	74.00	150	340	-34.63	
*	3633.680	39.65	peak	0.96	40.61	74.00	150	196	-33.39	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:13:20 AM

Humidity:49.2 %

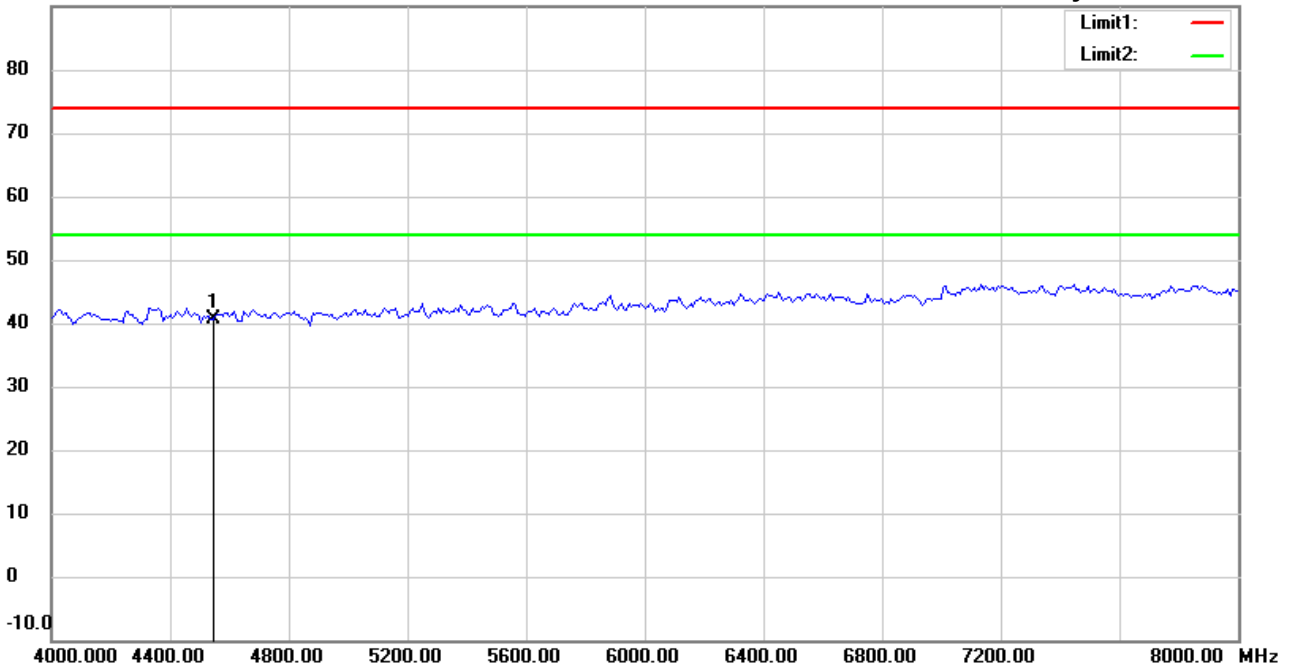

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4542.100	39.62	peak	1.11	40.73	74.00	150	92	-33.27	

\*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:16:59 AM

Humidity:49.2 %

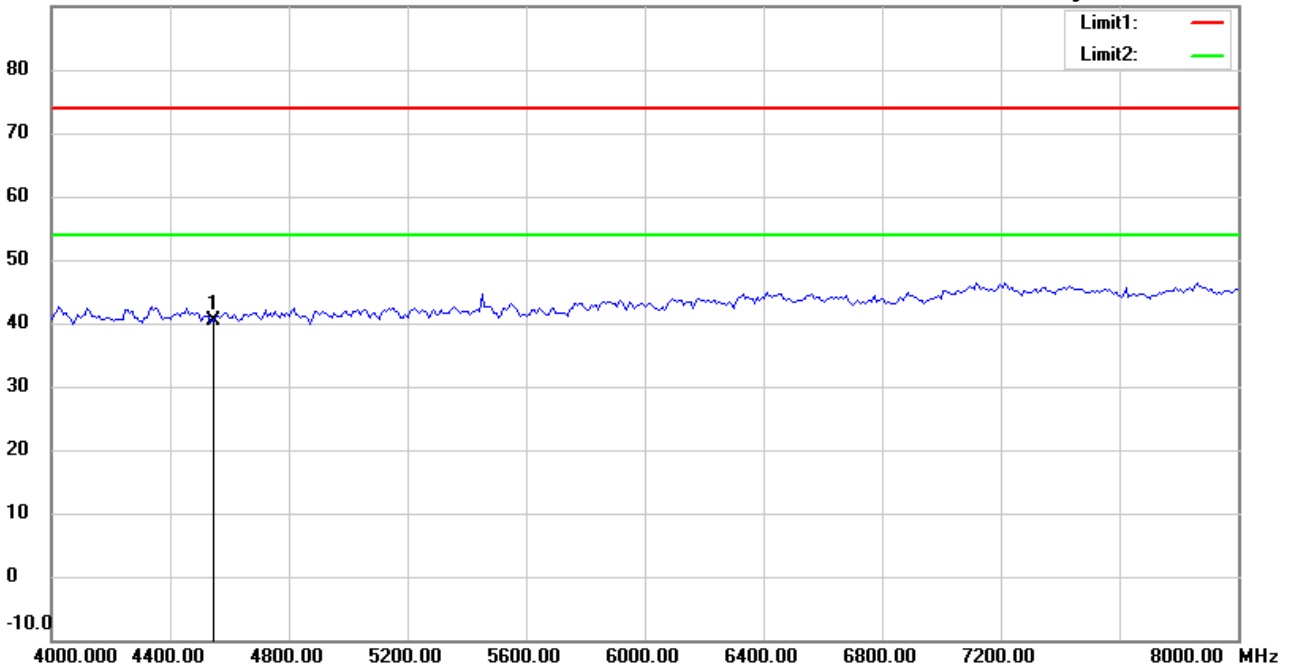

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4542.100	39.30	peak	1.11	40.41	74.00	150	205	-33.59	

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:14:39 AM

Humidity:49.2 %

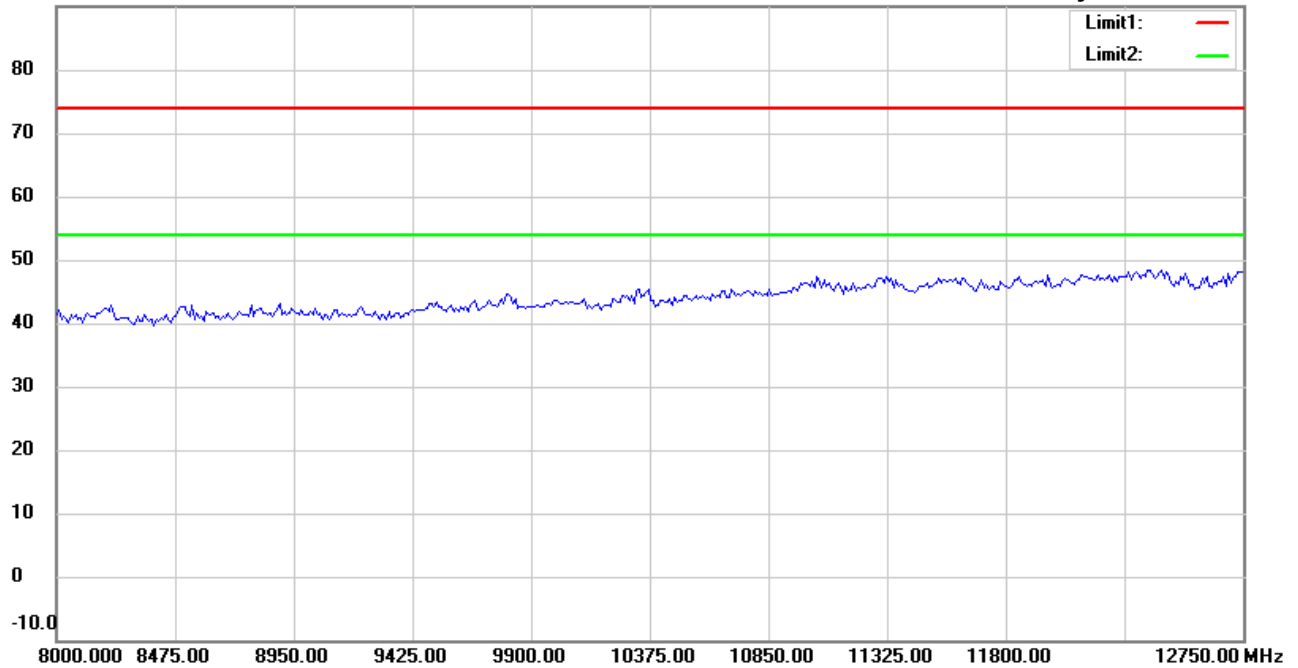

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:18:23 AM

Humidity:49.2 %

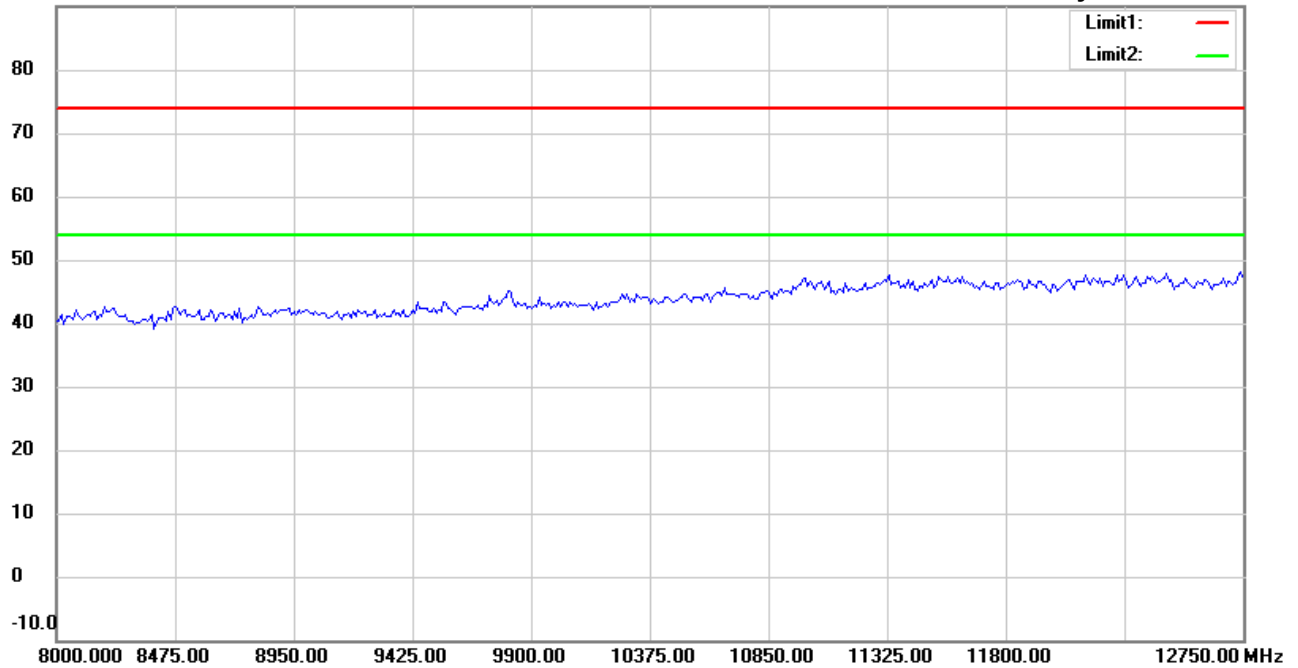

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin





Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 1:51:10 AM

Humidity:49.2 %

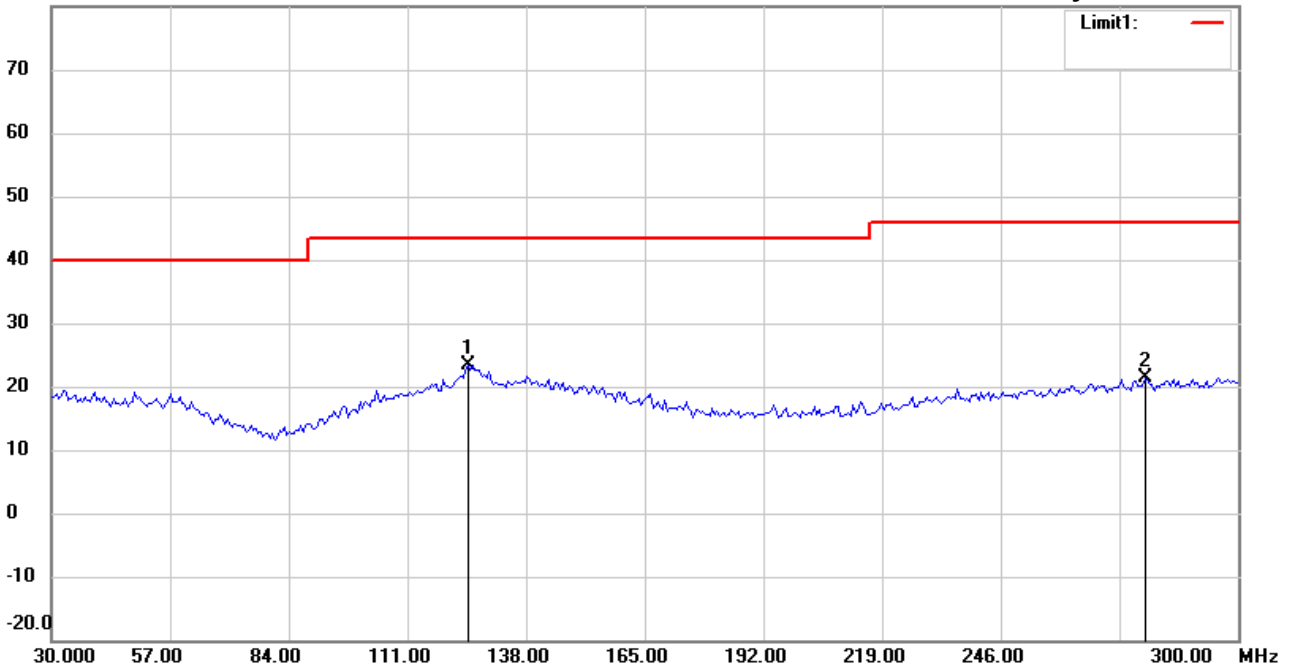

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	124.6894	30.14	peak	-6.82	23.32	43.50	100	28	-20.18	
	278.8977	27.21	peak	-5.83	21.38	46.00	135	140	-24.62	



Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 1:52:11 AM

Humidity:49.2 %

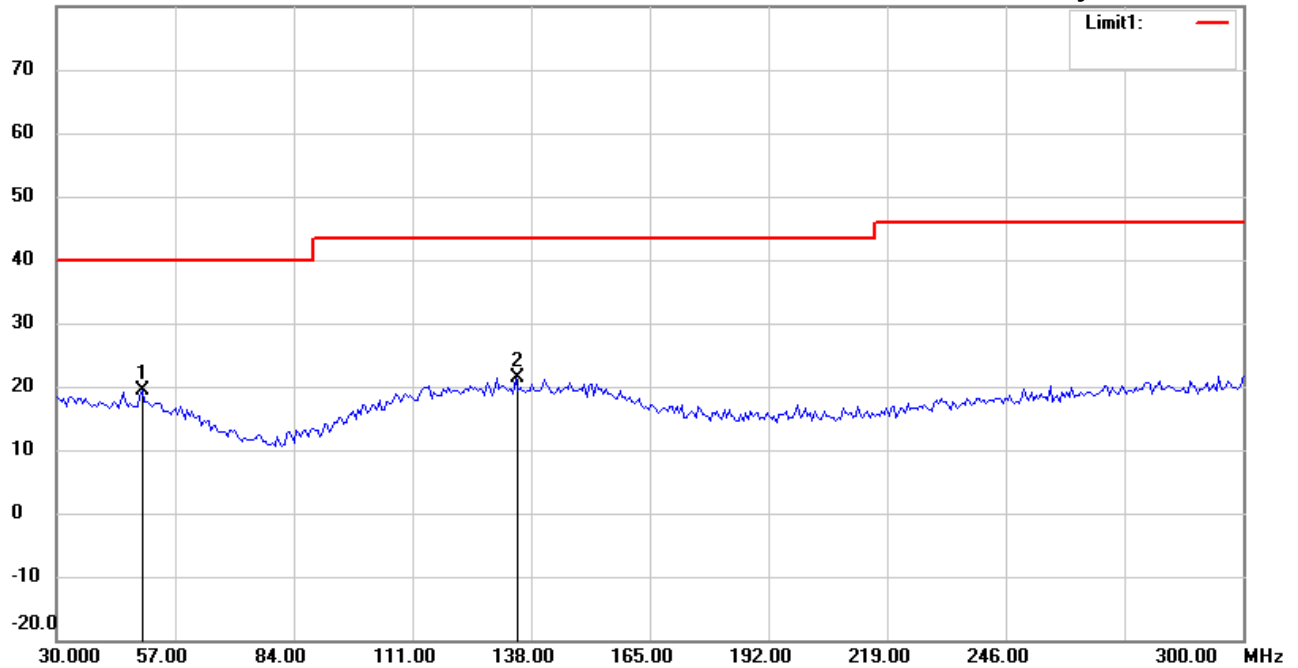

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

EUT : W6M22108-21184

M/N:

Test Mode : TX 916MHz

Note :

Polarization: *Vertical*

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	49.4790	29.51	peak	-10.14	19.37	40.00	106	172	-20.63	
	134.4290	27.92	peak	-6.49	21.43	43.50	120	300	-22.07	



Radiated Emission Measurement

Operator: Allen

File :2

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 1:55:36 AM

Humidity:49.2 %

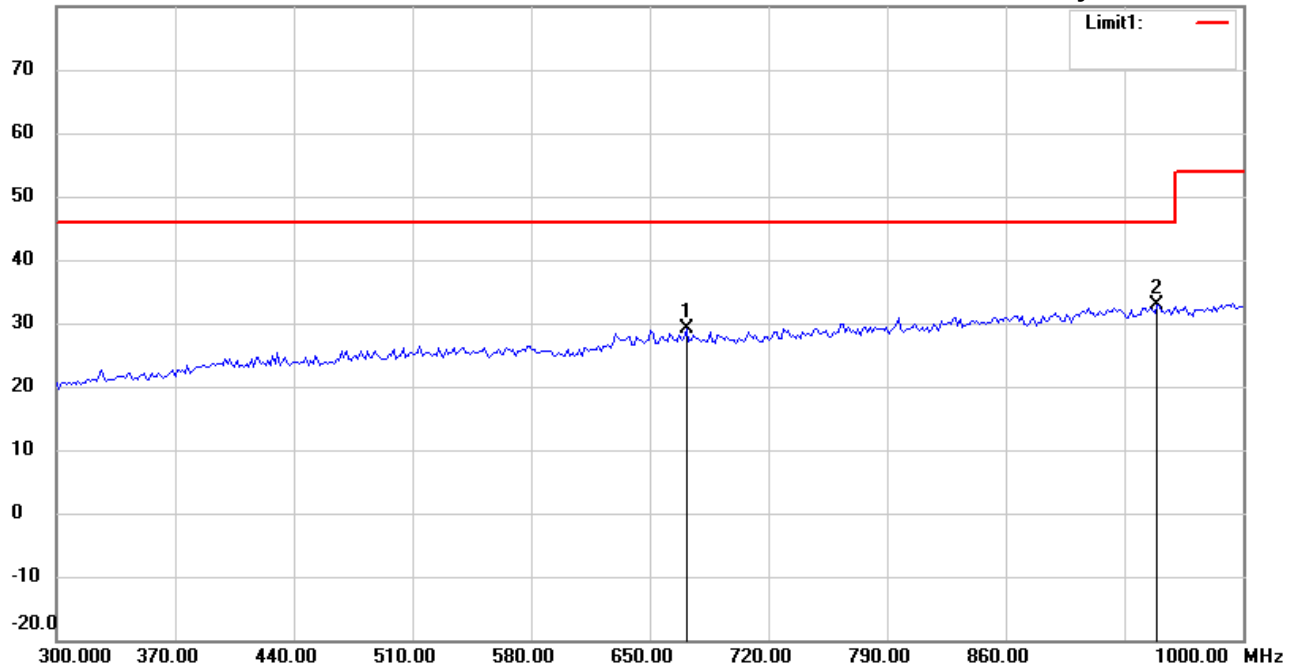

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	671.7435	28.56	peak	0.60	29.16	46.00	110	115	-16.84	
*	949.4990	27.22	peak	5.62	32.84	46.00	124	280	-13.16	



Radiated Emission Measurement

Operator: Allen

File :2

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 1:57:06 AM

Humidity:49.2 %

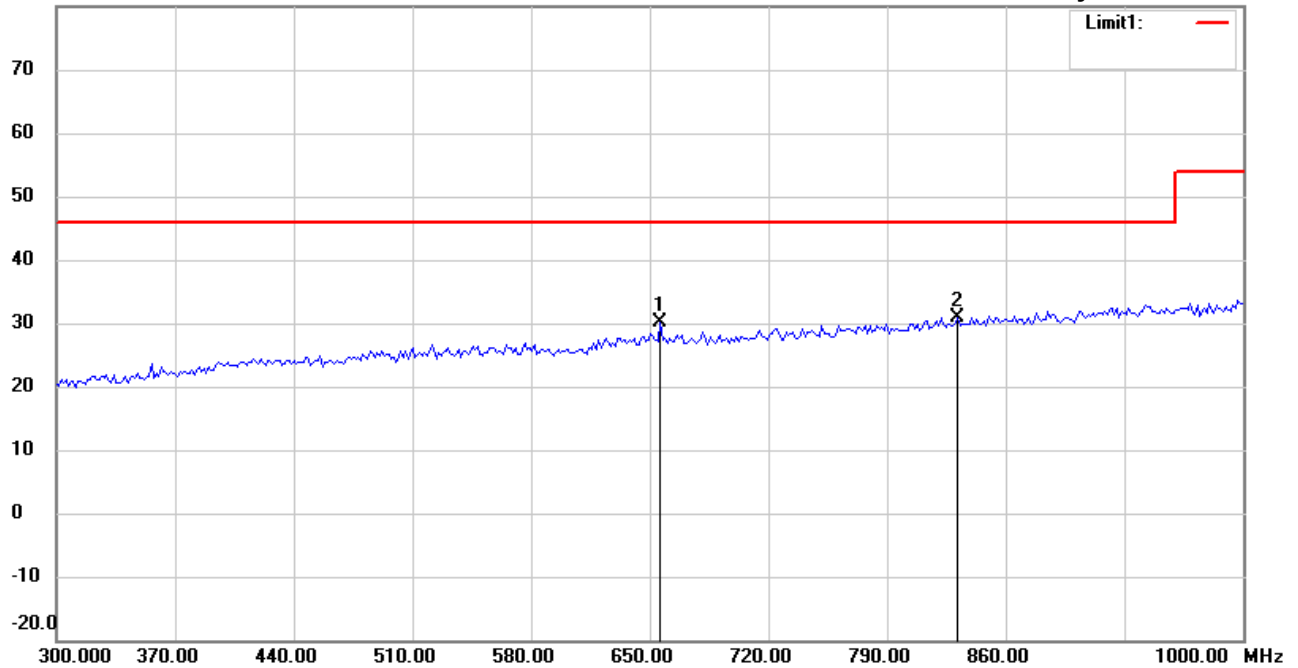

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	656.3126	29.56	peak	0.53	30.09	46.00	100	168	-15.91	
*	831.6633	27.63	peak	3.35	30.98	46.00	145	190	-15.02	



Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:38:14 AM

Humidity:49.2 %

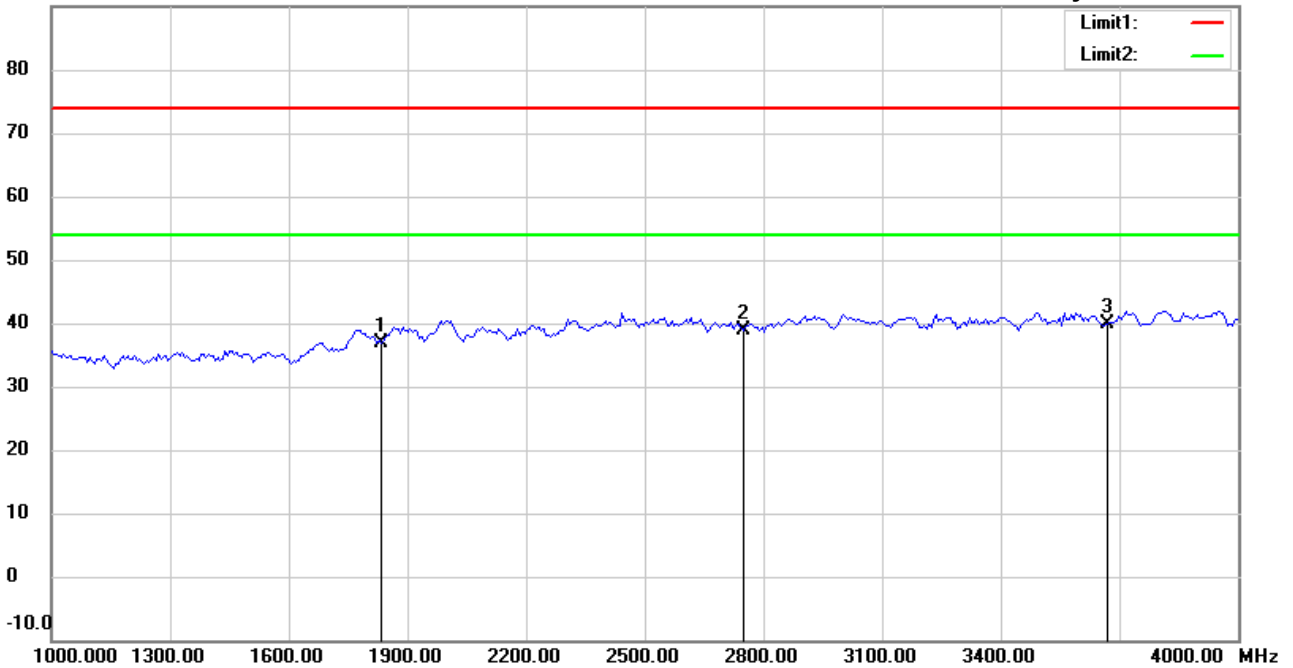

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1832.000	39.98	peak	-3.09	36.89	74.00	150	210	-37.11	
	2748.000	39.68	peak	-0.91	38.77	74.00	150	129	-35.23	
*	3664.000	38.86	peak	0.97	39.83	74.00	150	90	-34.17	



Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:47:46 AM

Humidity:49.2 %

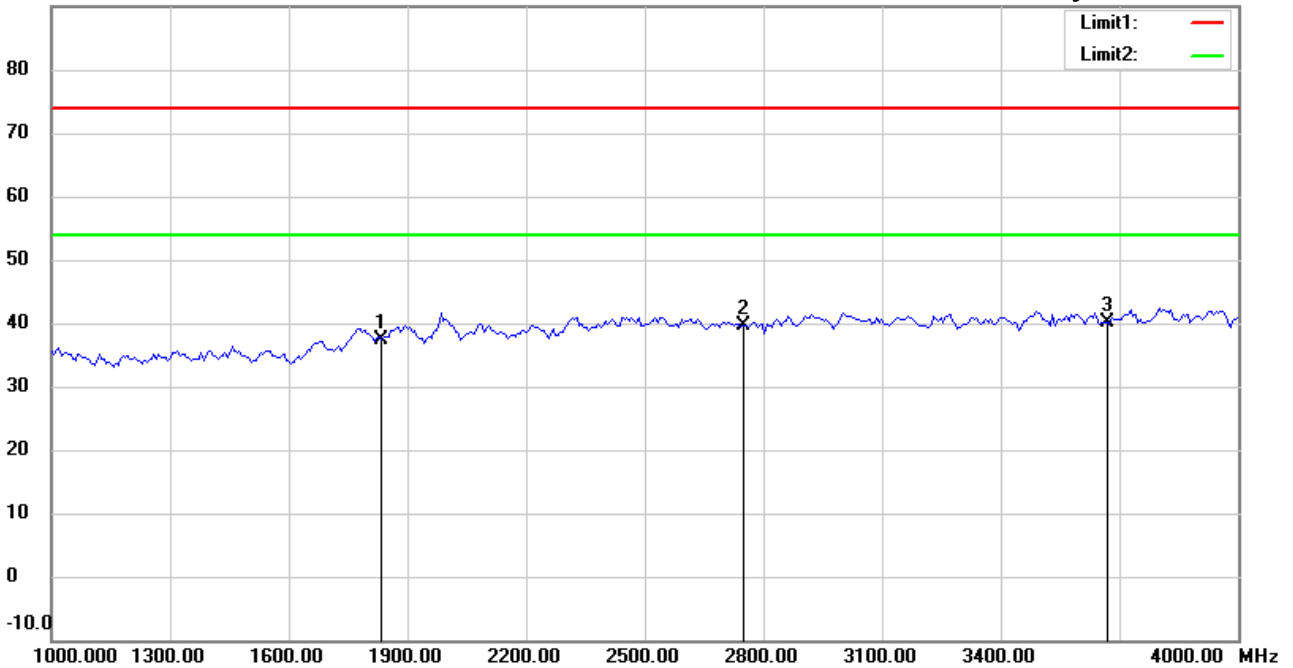

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

EUT : W6M22108-21184

M/N:

Test Mode : TX 916MHz

Note :

Polarization: **Vertical**

Power : 6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1832.000	40.55	peak	-3.09	37.46	74.00	150	98	-36.54	
	2748.000	40.50	peak	-0.91	39.59	74.00	150	230	-34.41	
*	3664.000	39.16	peak	0.97	40.13	74.00	150	165	-33.87	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:39:15 AM

Humidity:49.2 %

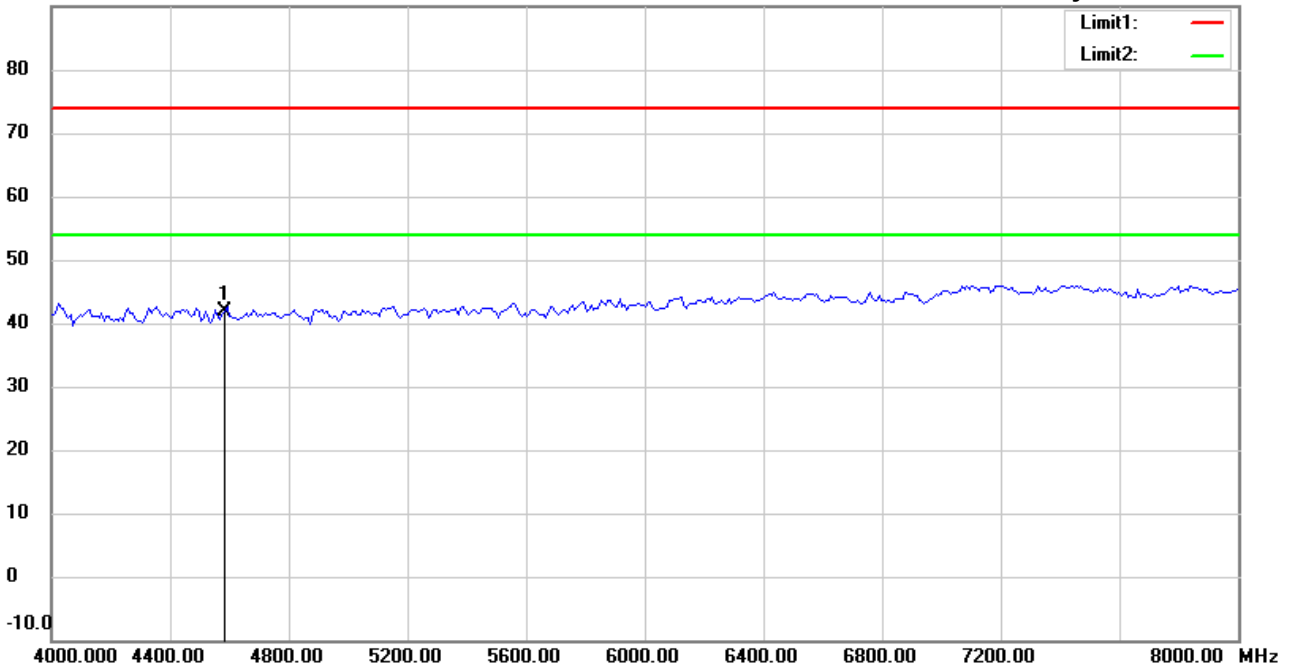

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4580.000	40.77	peak	1.19	41.96	74.00	150	47	-32.04	

\*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:48:47 AM

Humidity:49.2 %

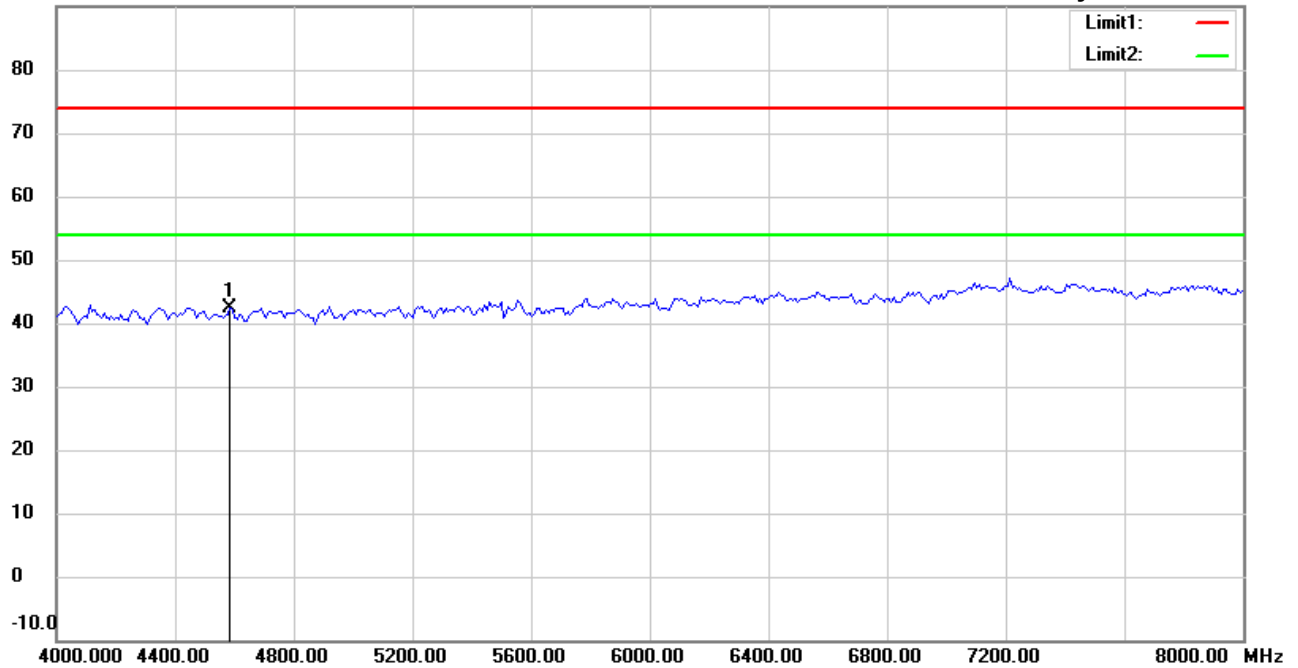

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4580.000	41.12	peak	1.19	42.31	74.00	150	172	-31.69	

\*:Maximum data    x:Over limit    !:over margin





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:46:25 AM

Humidity:49.2 %

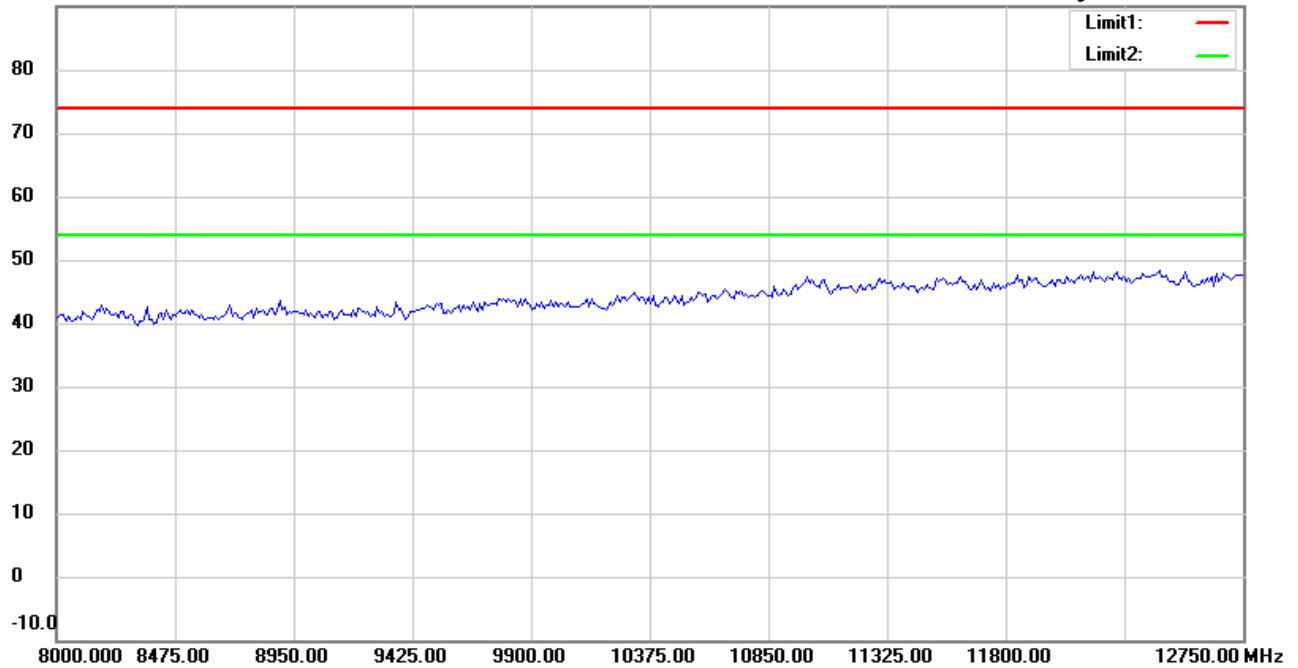

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:50:19 AM

Humidity:49.2 %

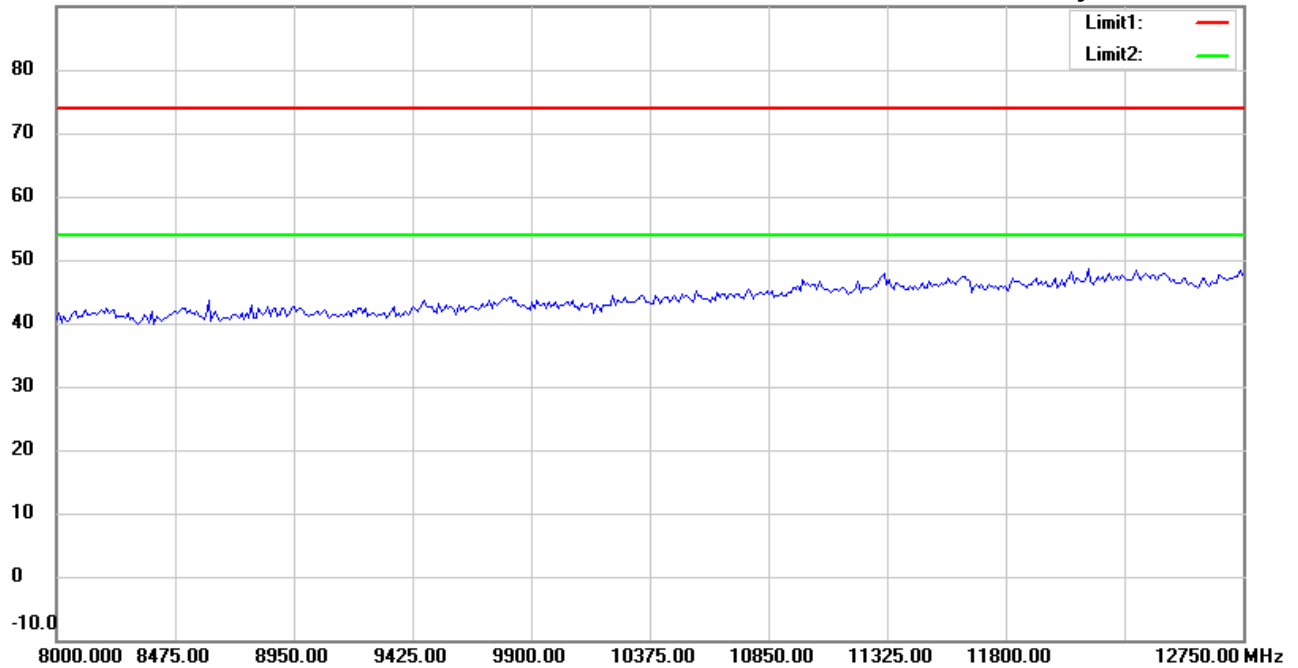

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:26:37 AM

Humidity:49.2 %

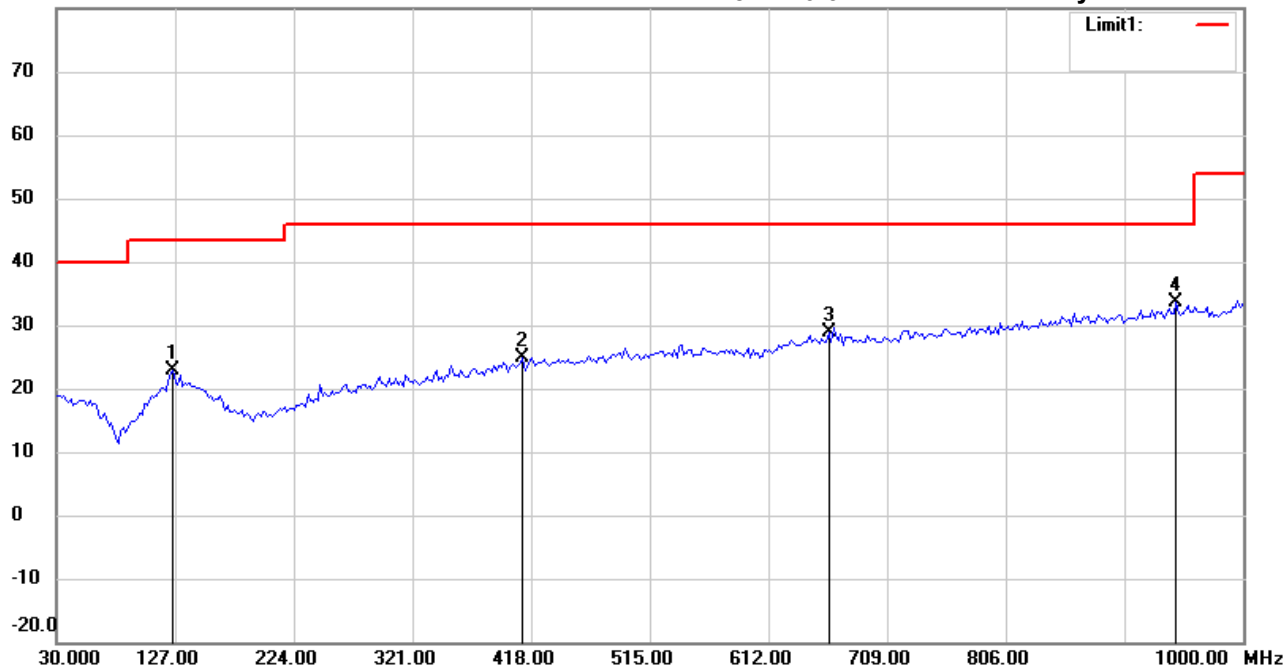

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	125.2505	29.68	peak	-6.80	22.88	43.50	100	155	-20.62	
	411.0020	27.82	peak	-3.03	24.79	46.00	143	78	-21.21	
	661.7635	28.23	peak	0.55	28.78	46.00	138	264	-17.22	
*	945.5711	28.03	peak	5.53	33.56	46.00	104	110	-12.44	



Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:27:39 AM

Humidity:49.2 %

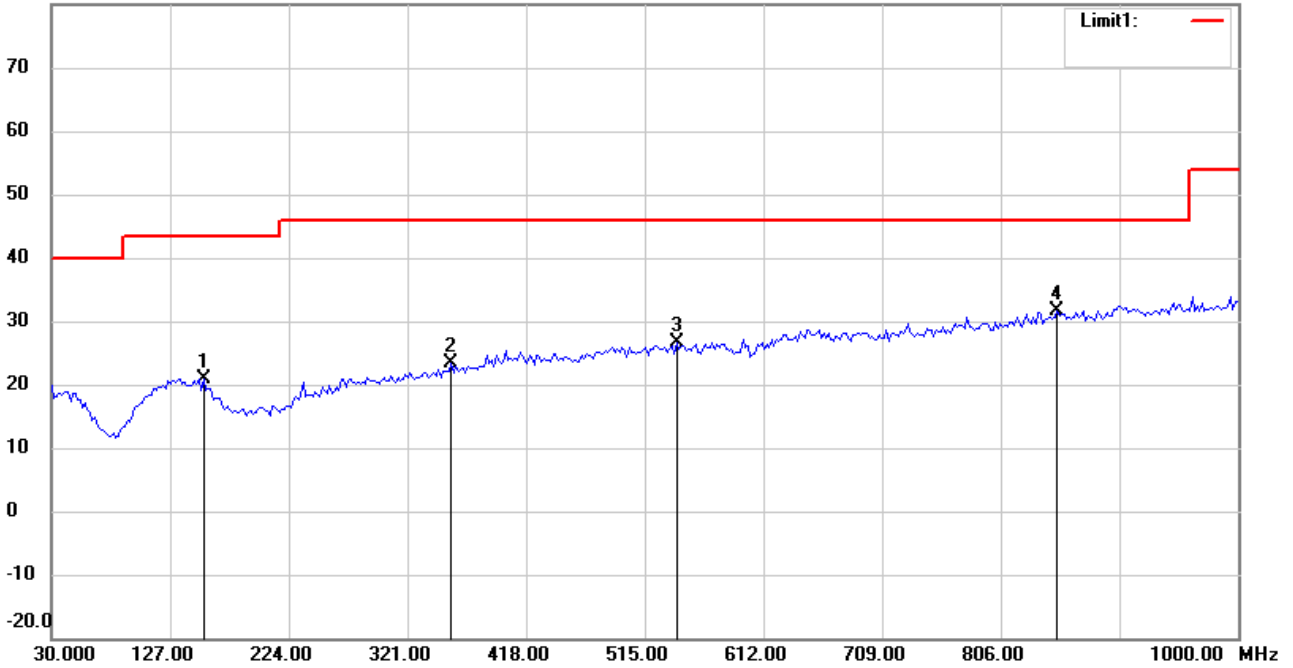

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	154.4088	28.60	peak	-7.66	20.94	43.50	150	42	-22.56	
	356.5731	27.82	peak	-4.45	23.37	46.00	135	180	-22.63	
	541.2425	28.22	peak	-1.47	26.75	46.00	116	56	-19.25	
*	852.2645	27.78	peak	3.82	31.60	46.00	107	352	-14.40	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:26:58 AM

Humidity:49.2 %

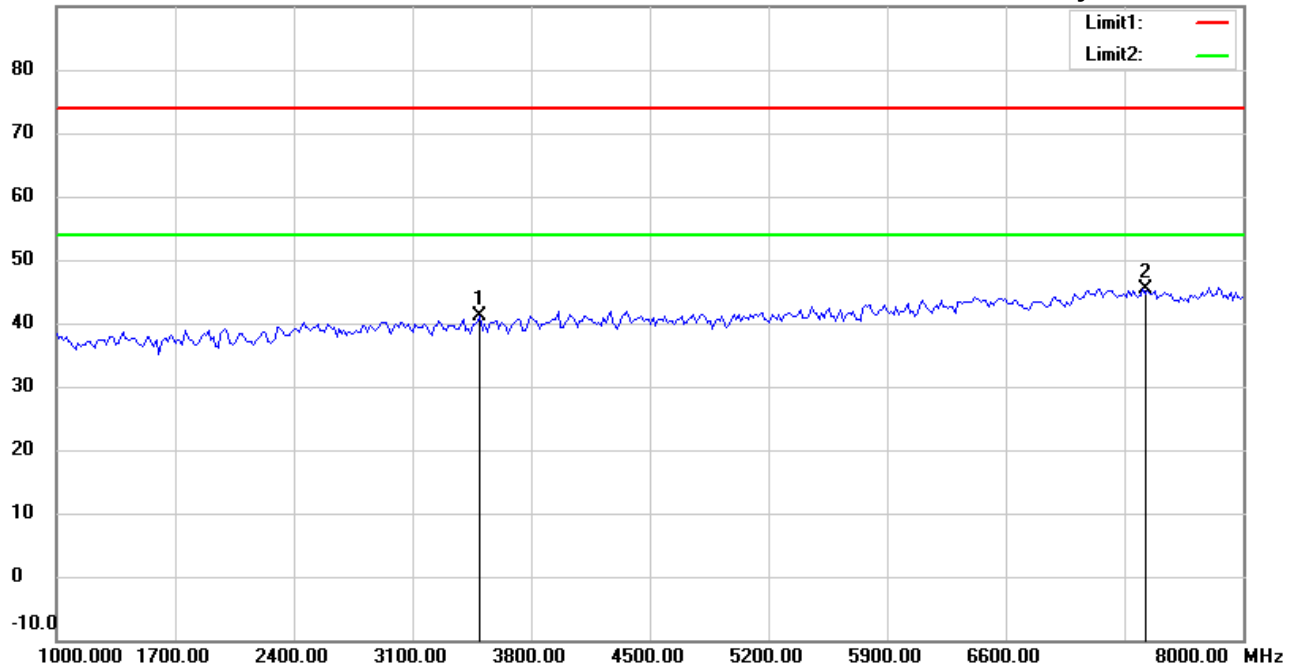

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3496.994	40.37	peak	0.67	41.04	74.00	150	103	-32.96	
*	7410.822	39.13	peak	6.33	45.46	74.00	150	255	-28.54	

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:32:05 AM

Humidity:49.2 %

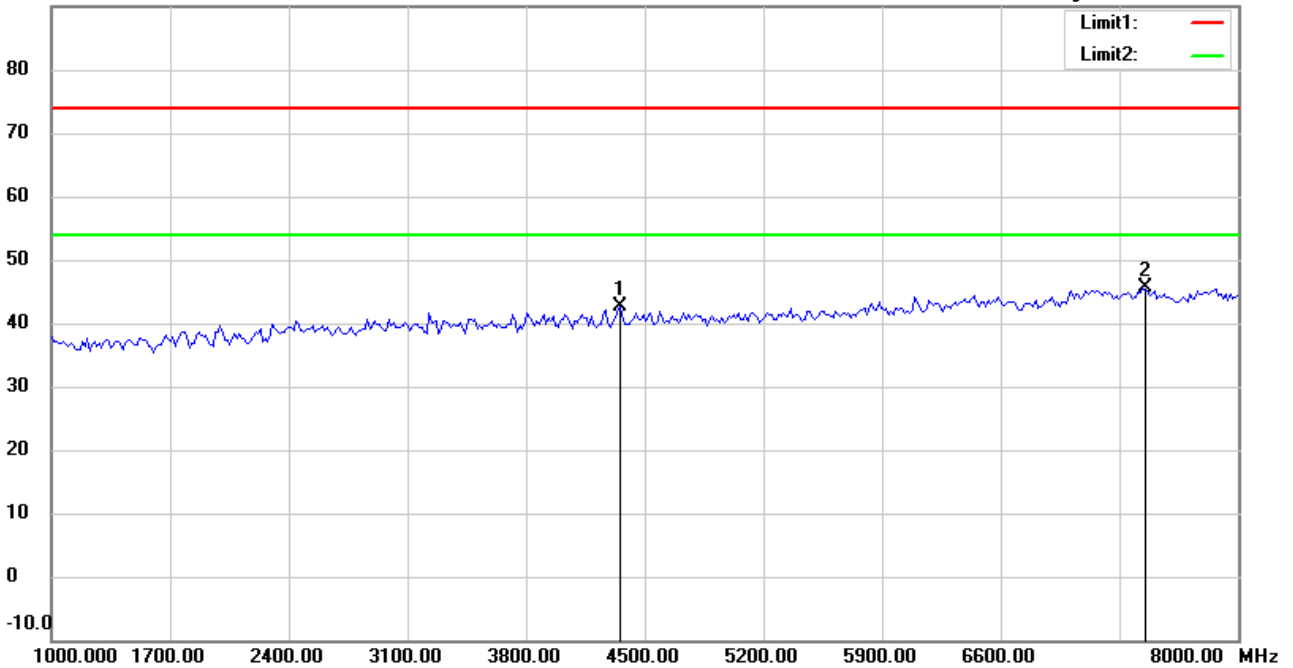

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4352.705	41.34	peak	1.21	42.55	74.00	150	20	-31.45	
*	7438.878	39.39	peak	6.27	45.66	74.00	150	72	-28.34	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:29:51 AM

Humidity:49.2 %

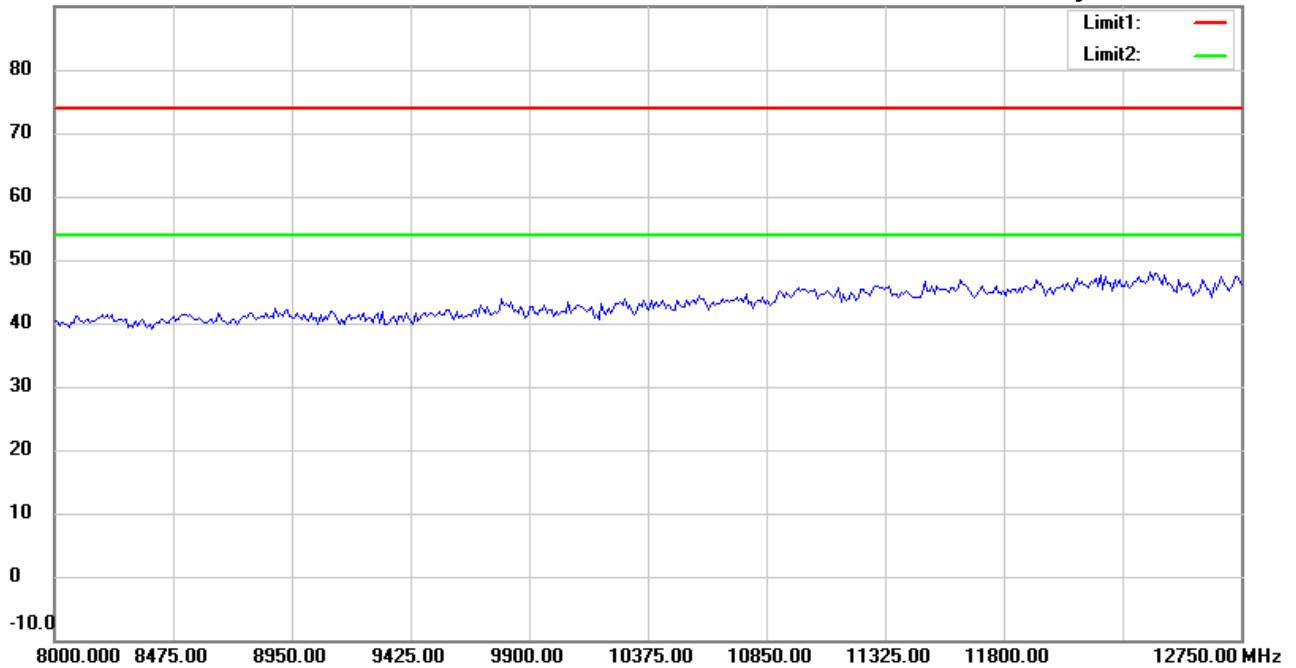

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 3:33:25 AM

Humidity:49.2 %

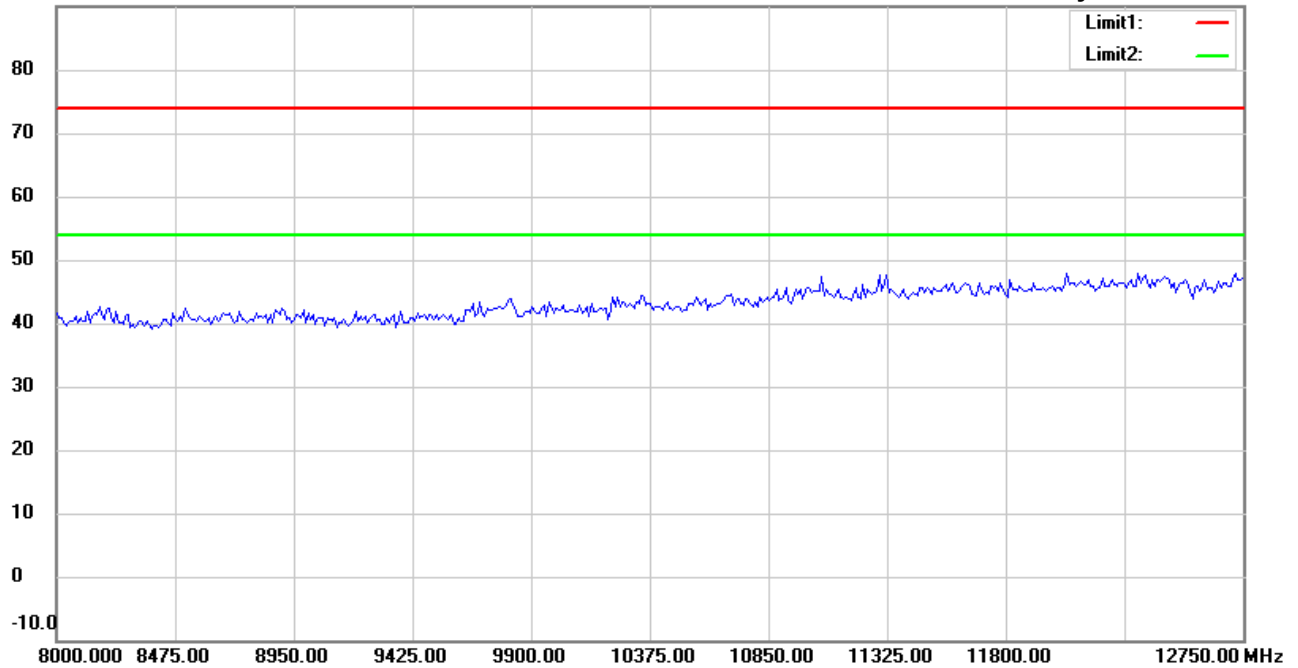

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.4MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin





Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:33:15 AM

Humidity:49.2 %

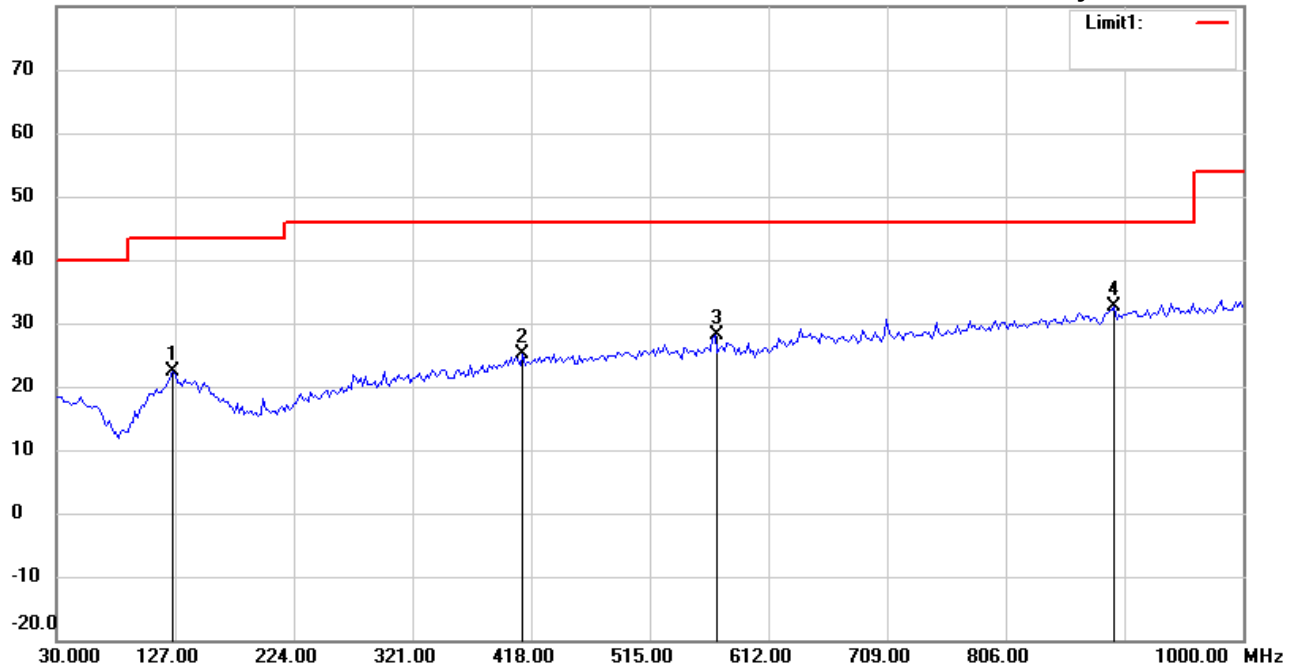

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	125.2505	29.14	peak	-6.80	22.34	43.50	130	162	-21.16	
	411.0020	28.17	peak	-3.03	25.14	46.00	102	300	-20.86	
	568.4570	29.51	peak	-1.41	28.10	46.00	128	15	-17.90	
*	895.0300	28.10	peak	4.46	32.56	46.00	108	293	-13.44	



Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:34:16 AM

Humidity:49.2 %

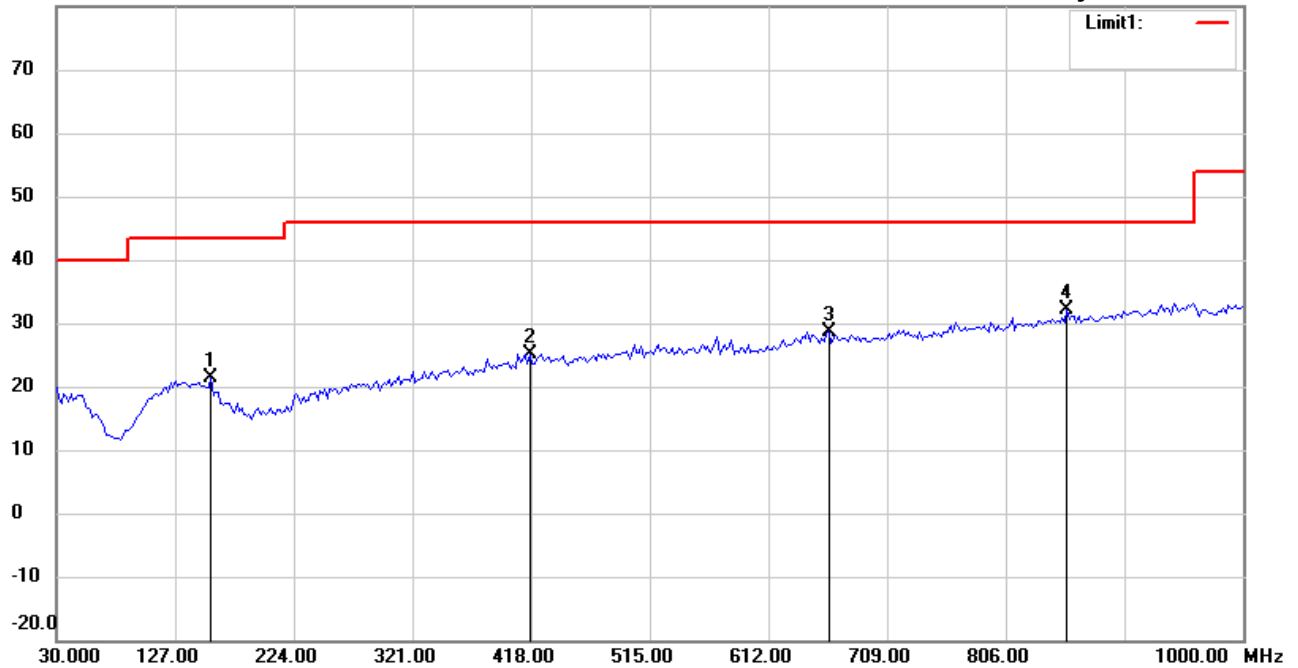

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	156.3527	29.24	peak	-7.94	21.30	43.50	107	321	-22.20	
	416.8337	28.19	peak	-2.96	25.23	46.00	136	258	-20.77	
	661.7635	28.09	peak	0.55	28.64	46.00	100	46	-17.36	
*	856.1523	28.16	peak	3.88	32.04	46.00	118	107	-13.96	



Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:22:35 AM

Humidity:49.2 %

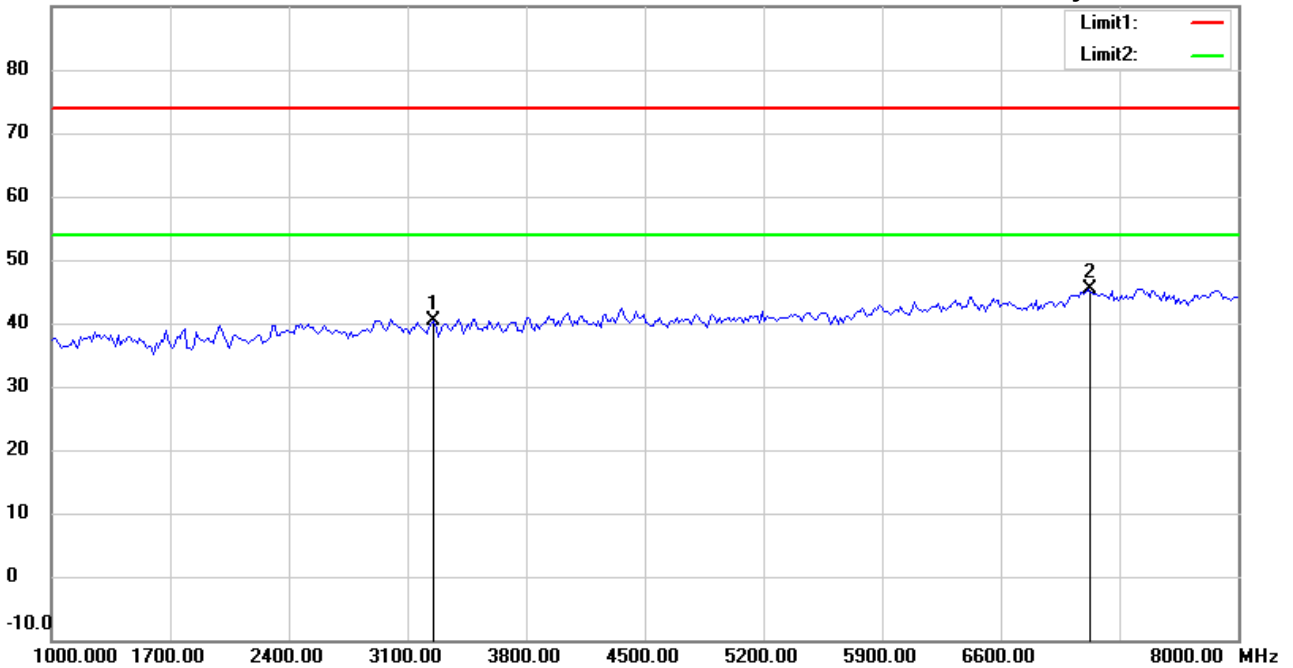

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3258.517	40.19	peak	0.30	40.49	74.00	150	300	-33.51	
*	7116.233	39.04	peak	6.23	45.27	74.00	150	166	-28.73	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:23:01 AM

Humidity:49.2 %

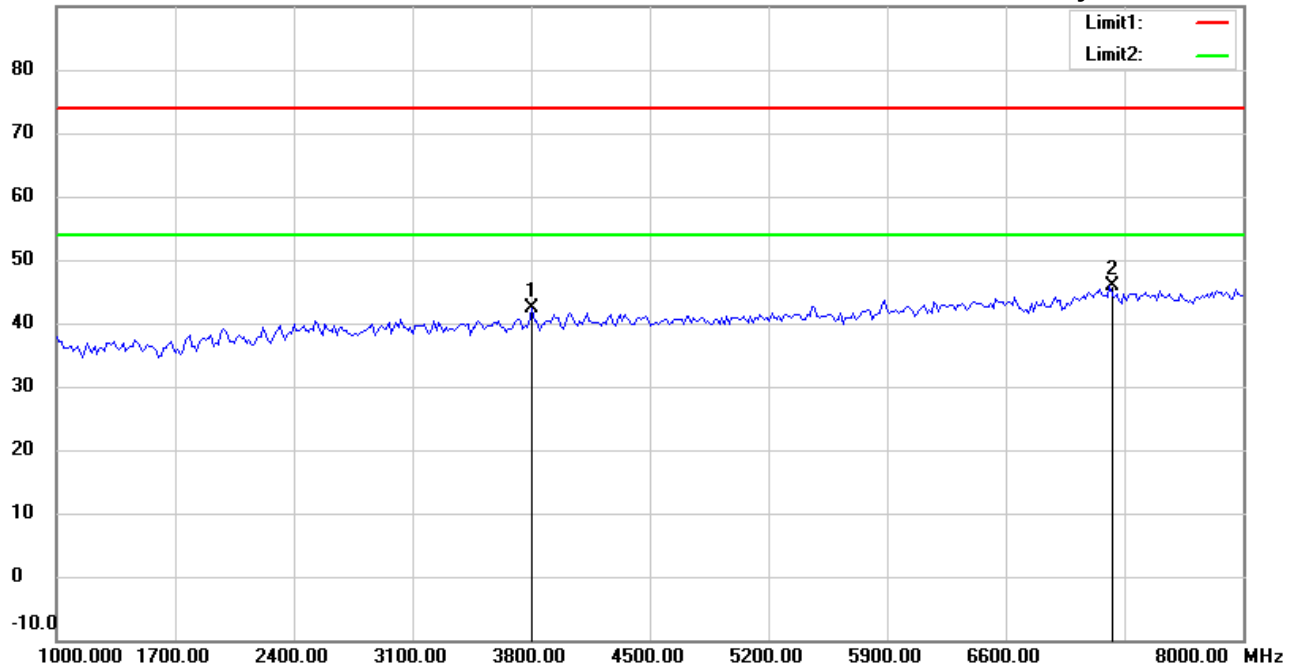

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3805.611	41.23	peak	1.22	42.45	74.00	150	92	-31.55	
*	7214.429	39.83	peak	6.00	45.83	74.00	150	160	-28.17	

\*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:22:50 AM

Humidity:49.2 %

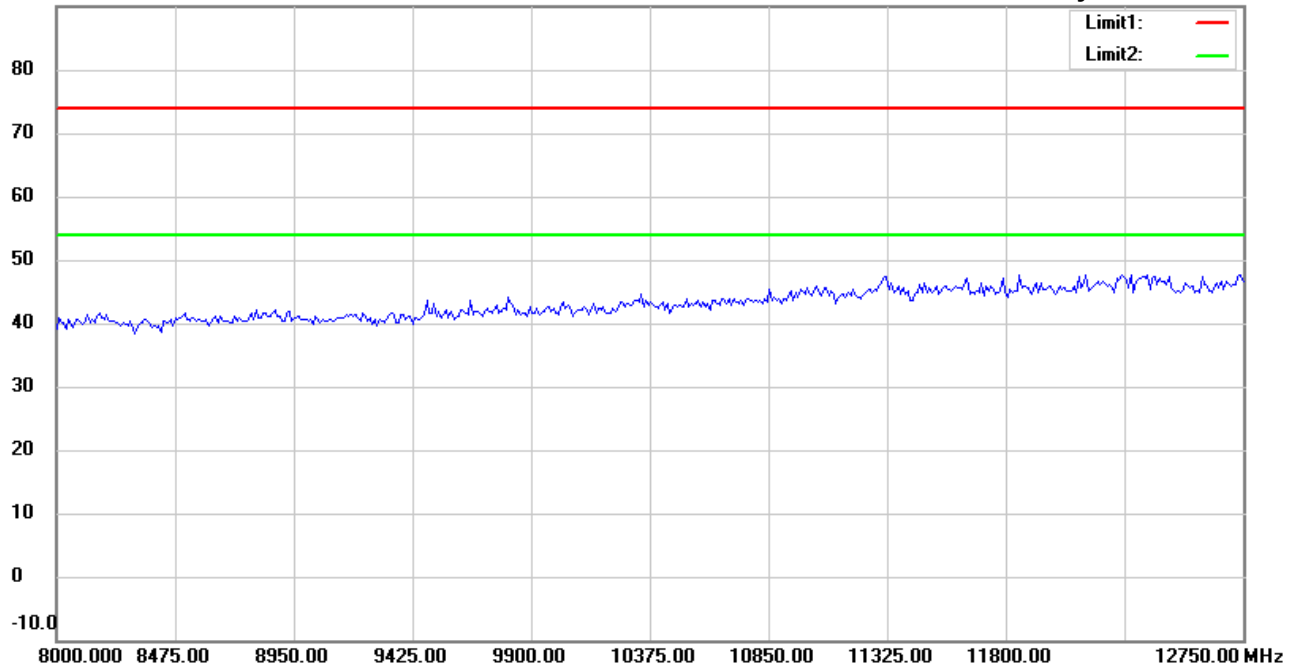

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 5:23:16 AM

Humidity:49.2 %

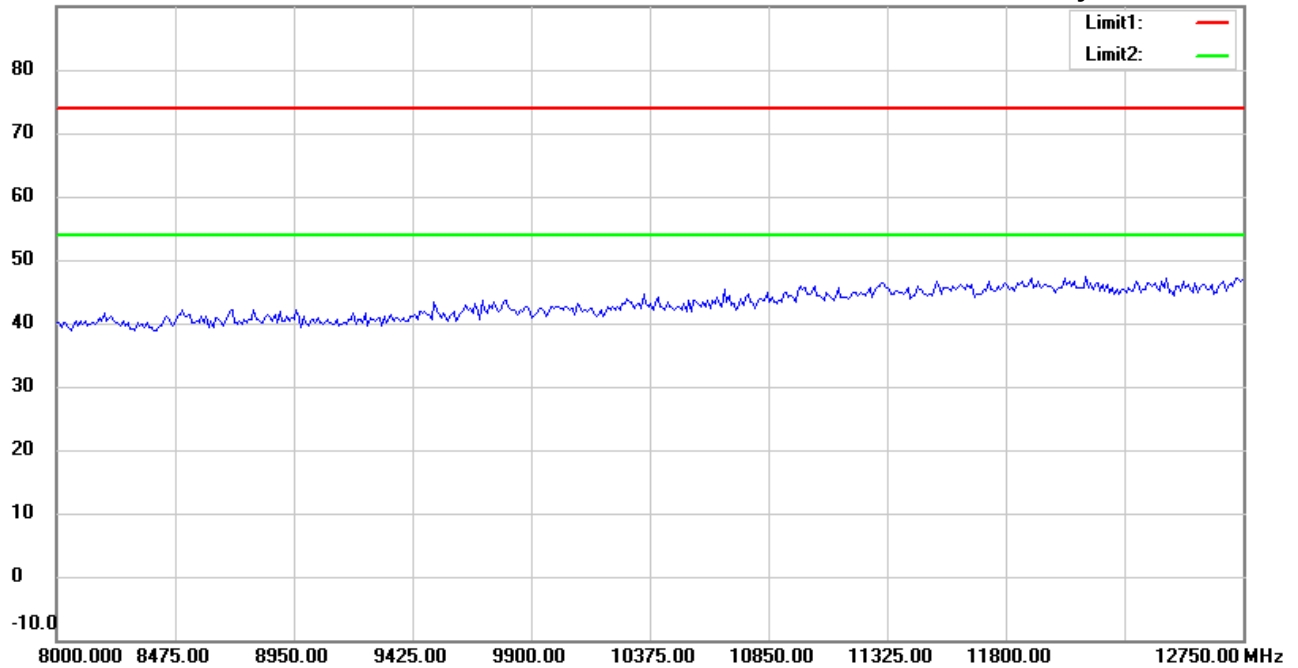

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 908.42MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:21:18 AM

Humidity:49.2 %

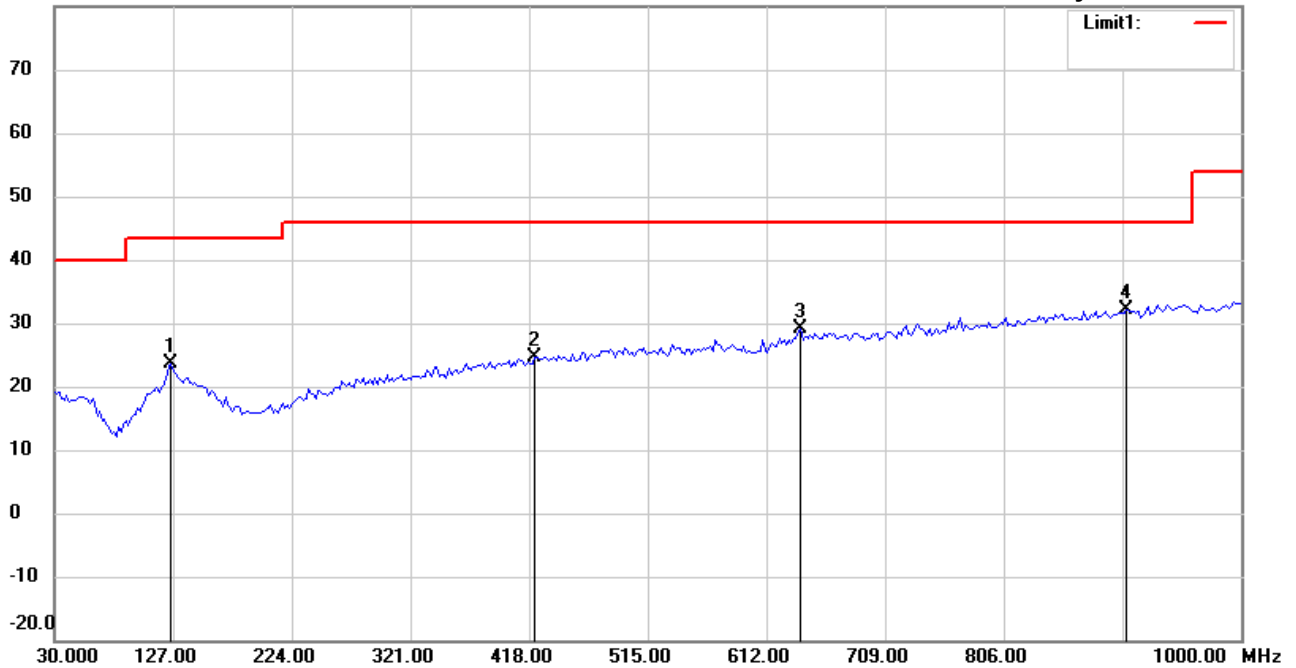

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	125.2505	30.32	peak	-6.80	23.52	43.50	100	275	-19.98	
	422.6653	27.51	peak	-2.89	24.62	46.00	128	144	-21.38	
	640.3808	28.93	peak	0.13	29.06	46.00	113	68	-16.94	
*	906.6933	27.38	peak	4.68	32.06	46.00	101	300	-13.94	



Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

80.0 dBuV/m

Time: 4:22:19 AM

Humidity:49.2 %

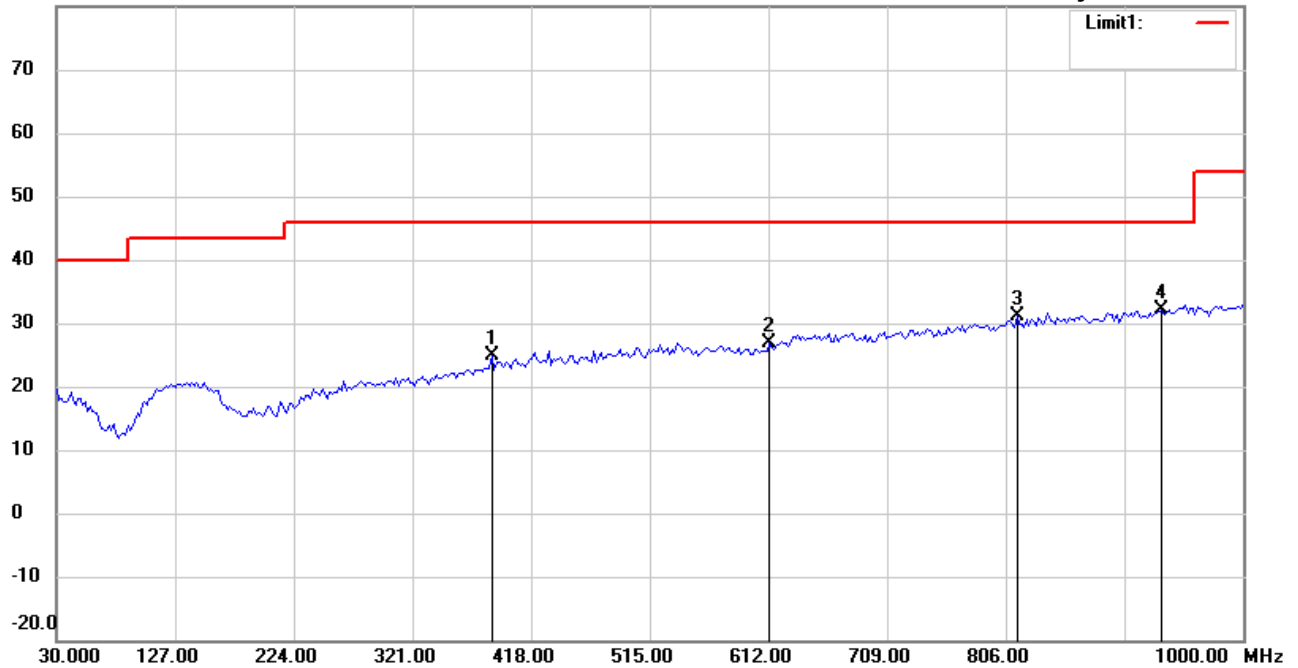

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	385.7315	28.39	peak	-3.54	24.85	46.00	114	94	-21.15	
	613.1663	27.86	peak	-0.93	26.93	46.00	100	270	-19.07	
	815.3307	28.07	peak	2.95	31.02	46.00	135	112	-14.98	
*	933.9078	26.94	peak	5.28	32.22	46.00	107	30	-13.78	





Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:22:39 AM

Humidity:49.2 %

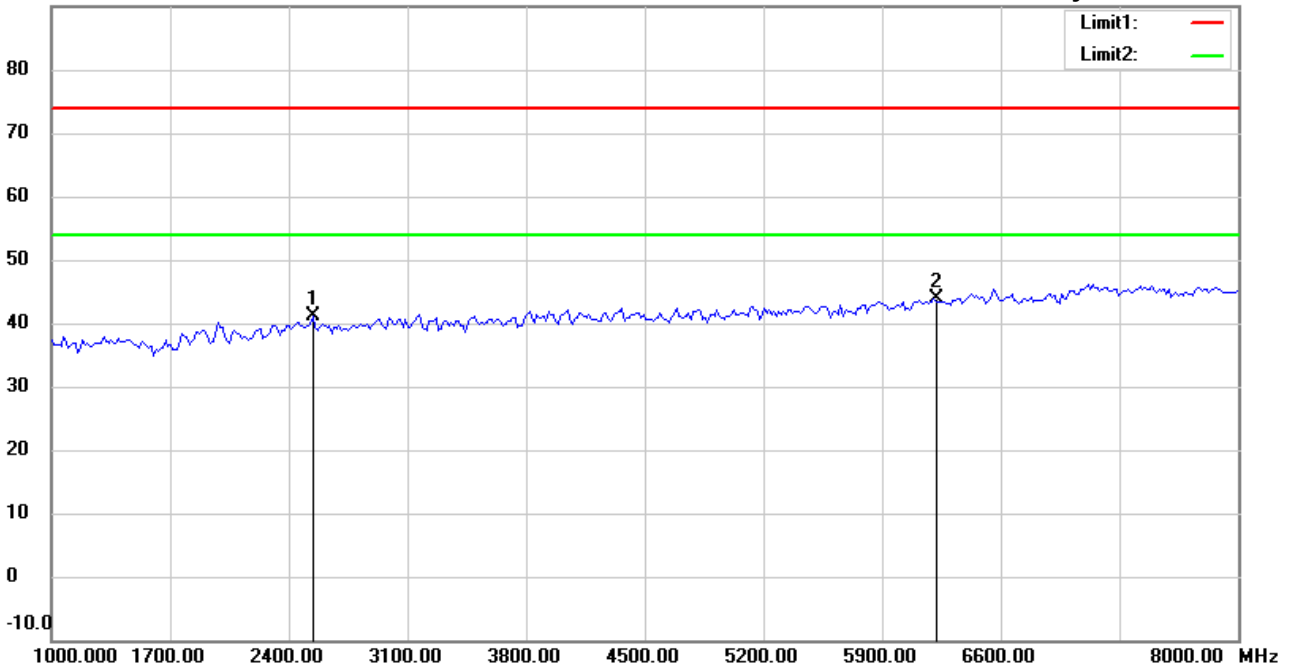

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2543.086	41.48	peak	-0.33	41.15	74.00	150	275	-32.85	
*	6204.409	39.33	peak	4.52	43.85	74.00	150	138	-30.15	

\*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:26:03 AM

Humidity:49.2 %

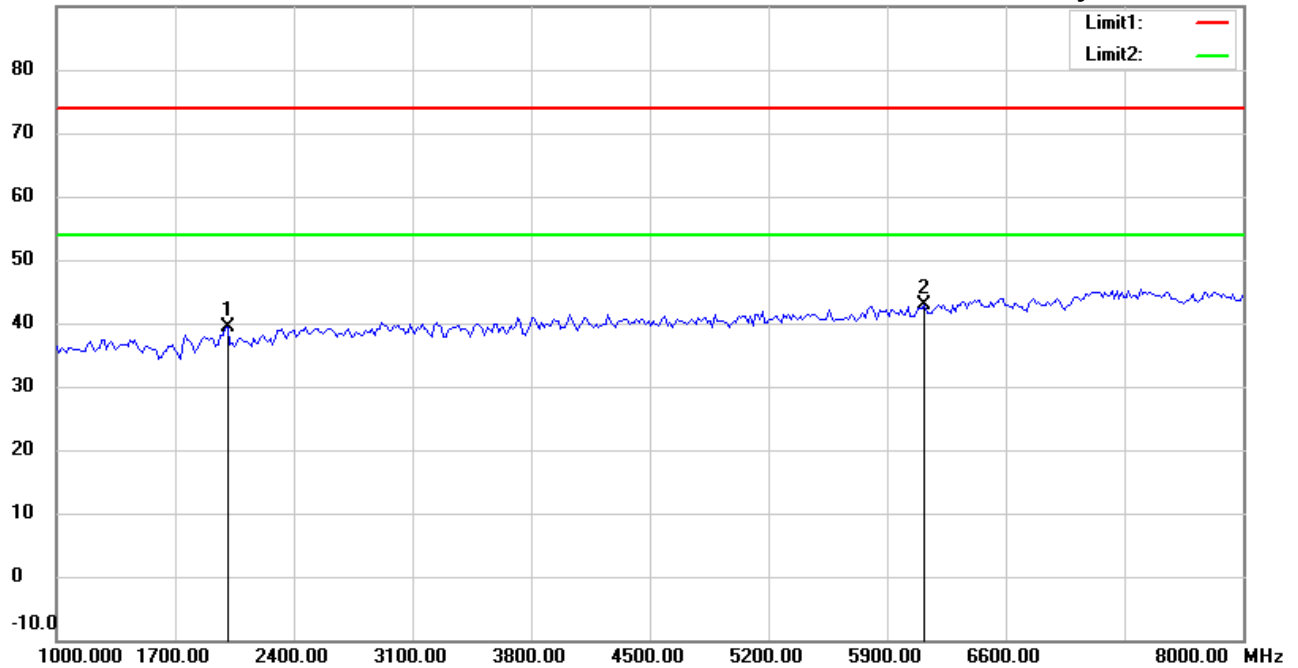

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: **Vertical**

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2010.020	41.48	peak	-2.11	39.37	74.00	150	53	-34.63	
*	6120.240	38.58	peak	4.37	42.95	74.00	150	110	-31.05	

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:25:50 AM

Humidity:49.2 %

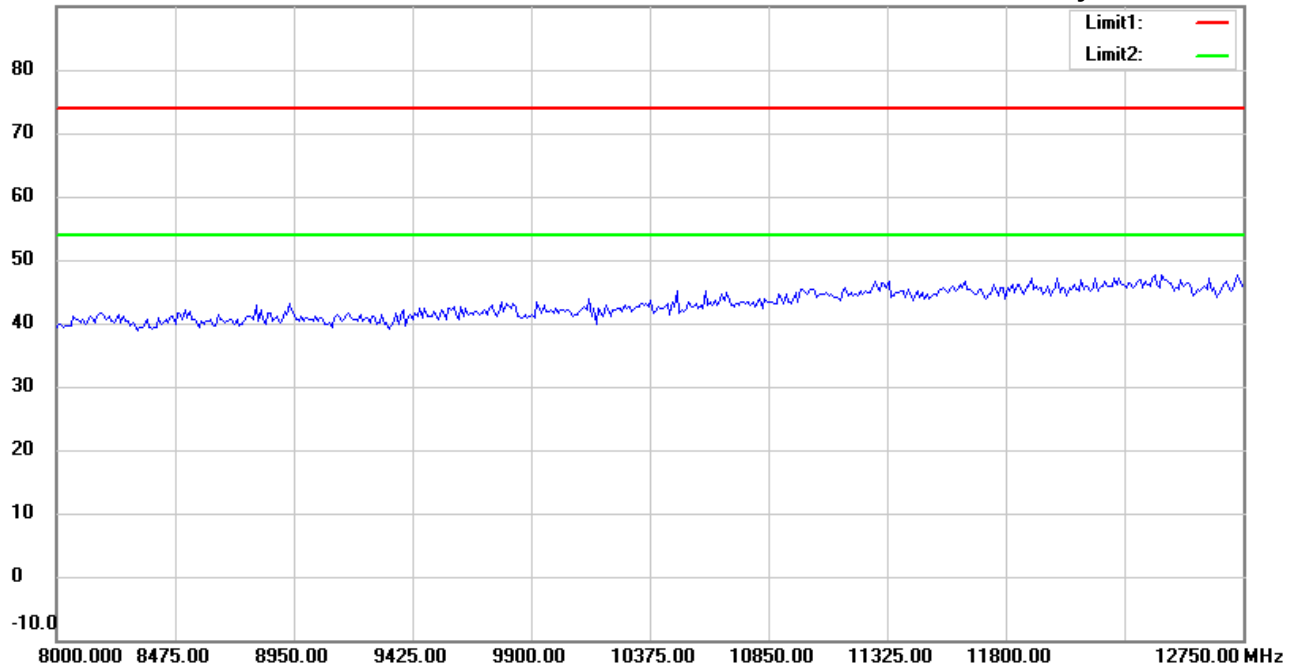

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 9/8/2021

Temperature:30.3 °C

90.0 dBuV/m

Time: 2:26:58 AM

Humidity:49.2 %

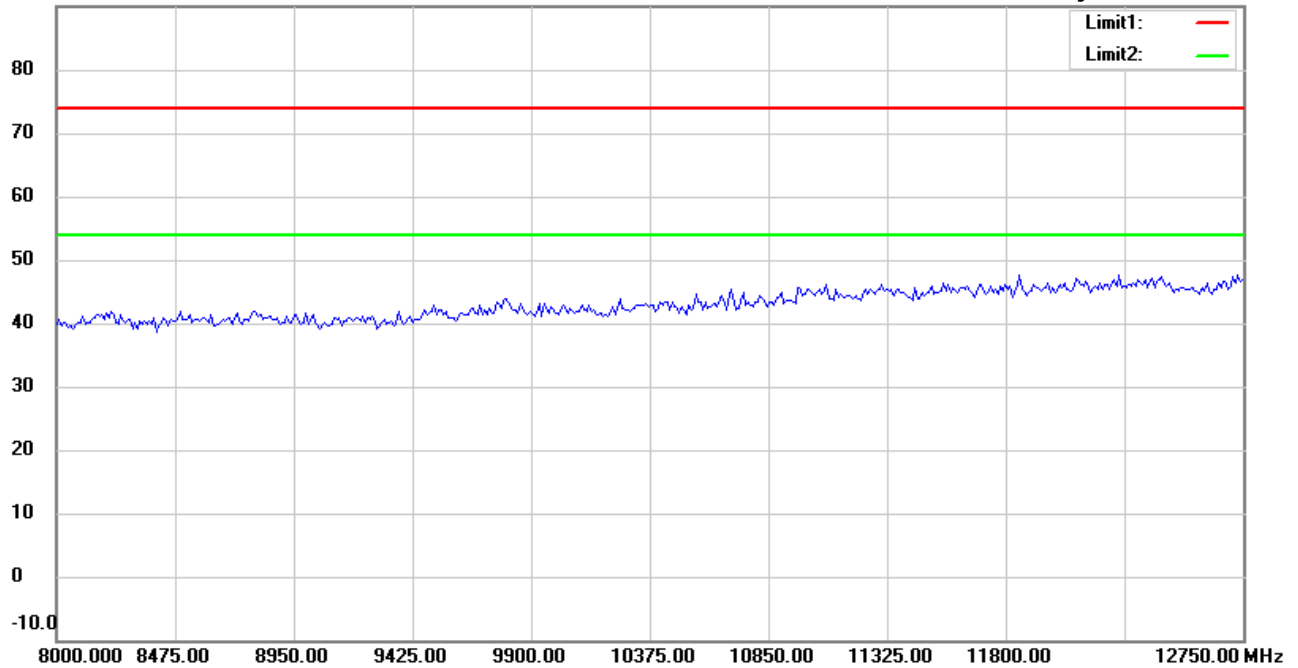

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M22108-21184

Power : 6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 916MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin