



EMC TEST REPORT FCC 47 CFR Part 15B Industry Canada ICES-003 Electromagnetic compatibility - Unintentional radiators	
Report Reference No.	G0M-1706-6624-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2</p>
Applicant's name	DewertOkin GmbH
Address	Weststr. 1 32278 Kirchlengern GERMANY
Test specification:	
Standard.....	47 CFR Part 15 Subpart B ICES-003, Issue 6:2016 ANSI C63.4:2014
Equipment under test (EUT):	
Product description	Remote Control Bluetooth
Model No.	IPROXX2/SMP/Bluetooth
Additional Models	None
Hardware version	1003323a
Firmware / Software version	1.0.0
Contains	FCC-ID: O3YIPR2SMPBT IC: 10744A-IPR2SMPBT
Test result	Passed

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2017-10-10

Date (s) of performance of tests: 2017-12-14


Compiled by : Matthias Handrik


Tested by (+ signature)..... : Matthias Handrik

Approved by (+ signature) : Jens Marquardt
Deputy Head of Lab

Date of issue : 2017-12-15

Total number of pages : 25




General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2017-12-15	Initial Release	


REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	9
1.5	Input / Output Ports	9
1.6	Operating Modes and Configurations	10
1.7	Test Equipment Used During Testing	11
1.8	Sample emission level calculation	12
2	RESULT SUMMARY	13
3	TEST CONDITIONS AND RESULTS	14
3.1	Test Conditions and Results – Radiated emissions	14
3.2	Test Conditions and Results – AC power line conducted emissions	22



1 Equipment (Test item) Description

Description	Remote Control Bluetooth	
Model	IPROXX2/SMP/Bluetooth	
Additional Models	None	
Serial number	None	
Hardware version	1003323a	
Software / Firmware version	1.0.0	
Contains FCC-ID	O3YIPR2SMPBT	
Contains IC	10744A-IPR2SMPBT	
Power supply	24 VDC	
AC/DC-Adaptor	None	
Radio module	Type	Bluetooth Low Energy
	Model	unspecified
	Manufacturer	unspecified
	HW Version	unspecified
	SW Version	unspecified
	SVN	unspecified
	FCC-ID	unspecified
	IC	unspecified
Manufacturer	DewertOkin GmbH Weststr. 1 32278 Kirchlengern GERMANY	
Highest emission frequency	> 1000 MHz (up to 5th Harm)	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	



1.1 Photos – Equipment external

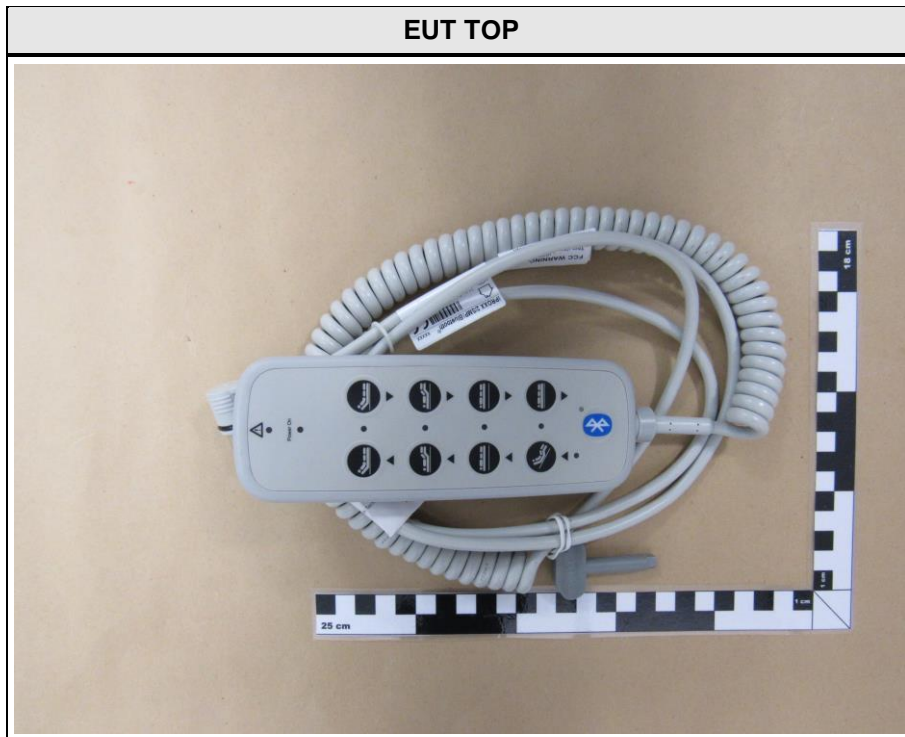

1.2 Photos – Equipment internal

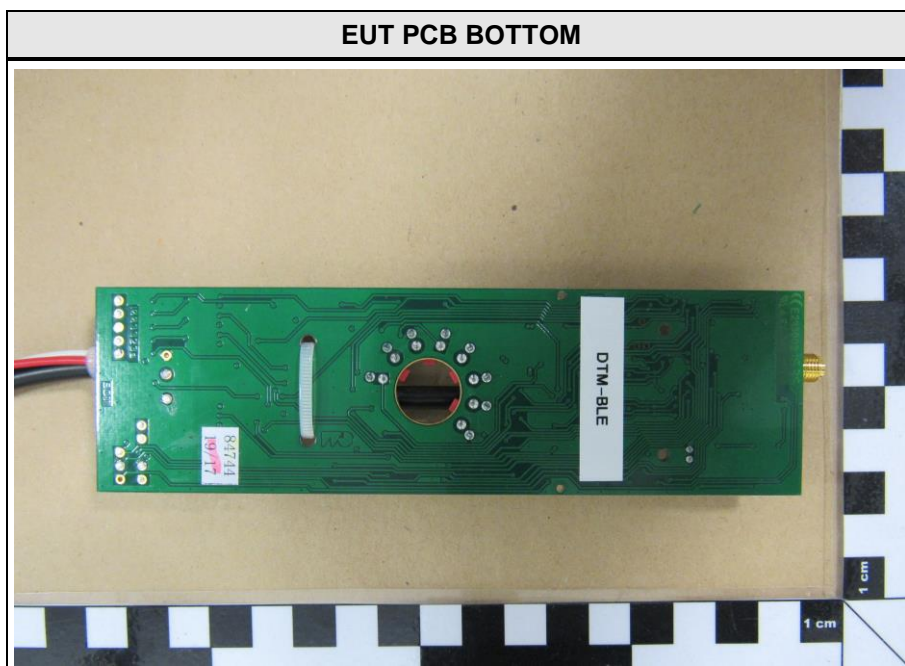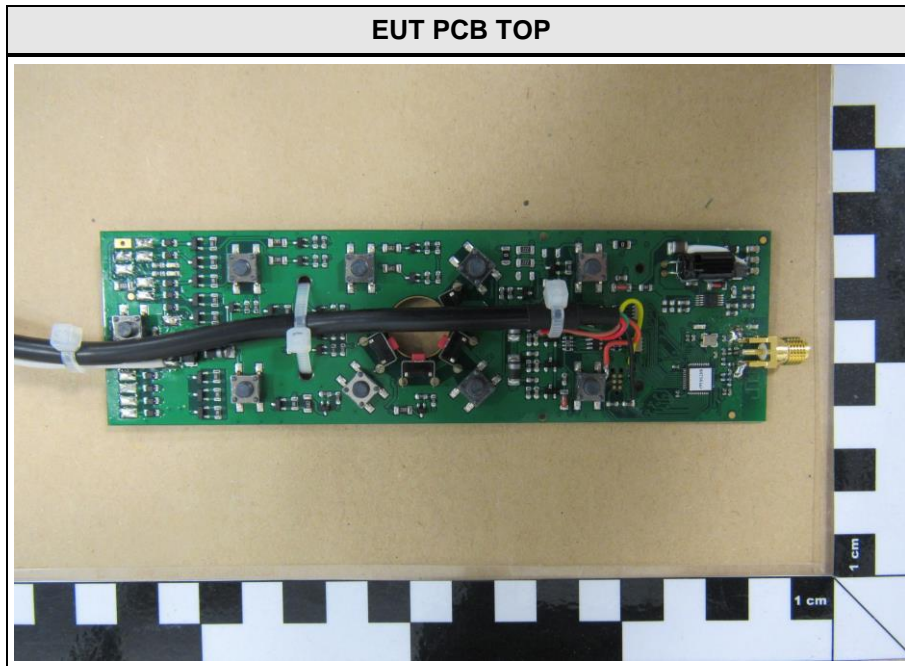

1.3 Photos – Test setup

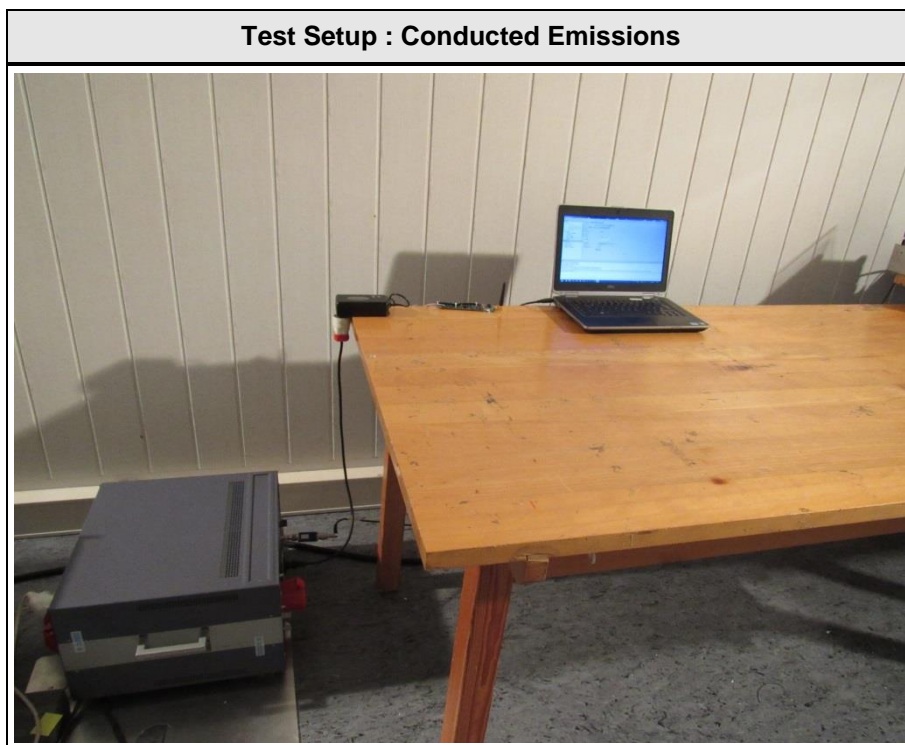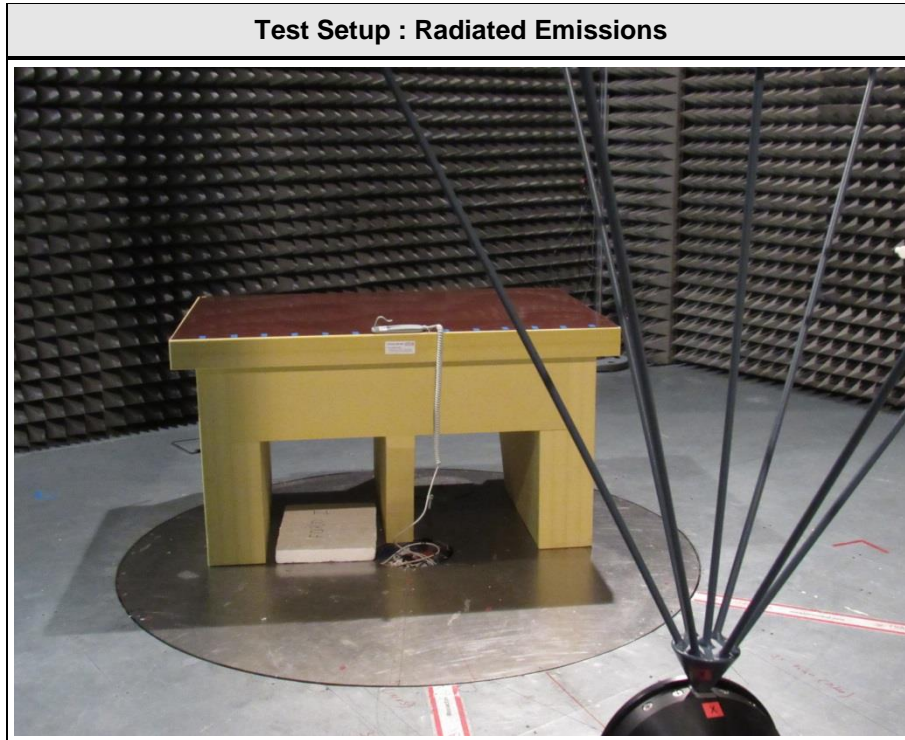

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laptop	Dell	Latitude E6420	S/N CXJ43R1
AE	nRFgo Studio	Nordic Semiconductor	Ver.: 1.21.2.10	
AE	AC/DC adaptor	Revolt	PE-3747-675	

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	USB	I/O	unspecified	No	
2	Power	DC	unspecified	No	

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	EUT powered up. Active Bluetooth Low Energy connection

Configuration #	EUT Configuration
Bluetooth	EUT is controlled via laptop in direct test mode. Bluetooth Low Energy Ch.: 0-19; PRBS

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2016.1.10

Conducted emissions SR1					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2017-01	2019-01
AMN	R&S	ESH3-Z5	EF00036	2017-01	2019-01
EMI Test Receiver	R&S	ESR7	EF00943	2017-07	2018-07
Cable	-	RG223/U	-	System Cal.	System Cal.

Radiated emissions AC1					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00030	2016-04	2019-04
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
Double-Ridged Guide Antenna	ETS-Lindgren USA	3117	EF01256	2017-07	2018-07
MXE EMI Receiver	Keysight Technologies	N9038A-526/WXP	EF01070	2017-08	2018-08
RF Cable			-	System Cal.	System Cal
RF Cable			-	System Cal.	System Cal

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		22°C		
Relative Humidity		30 to 60 %		28%		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		> 1000 MHz (up to 5th Harm)				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 13 GHz				
Operating mode		1				
Configuration		Bluetooth				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1706-6624

Applicant: Dewert Okin GmbH
 EUT Name: Remote Control Bluetooth
 Model: IPROXX2/SMP/Bluetooth
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 24V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: mode#1
 Test Date: 2017-12-14
 Note:

Index 10

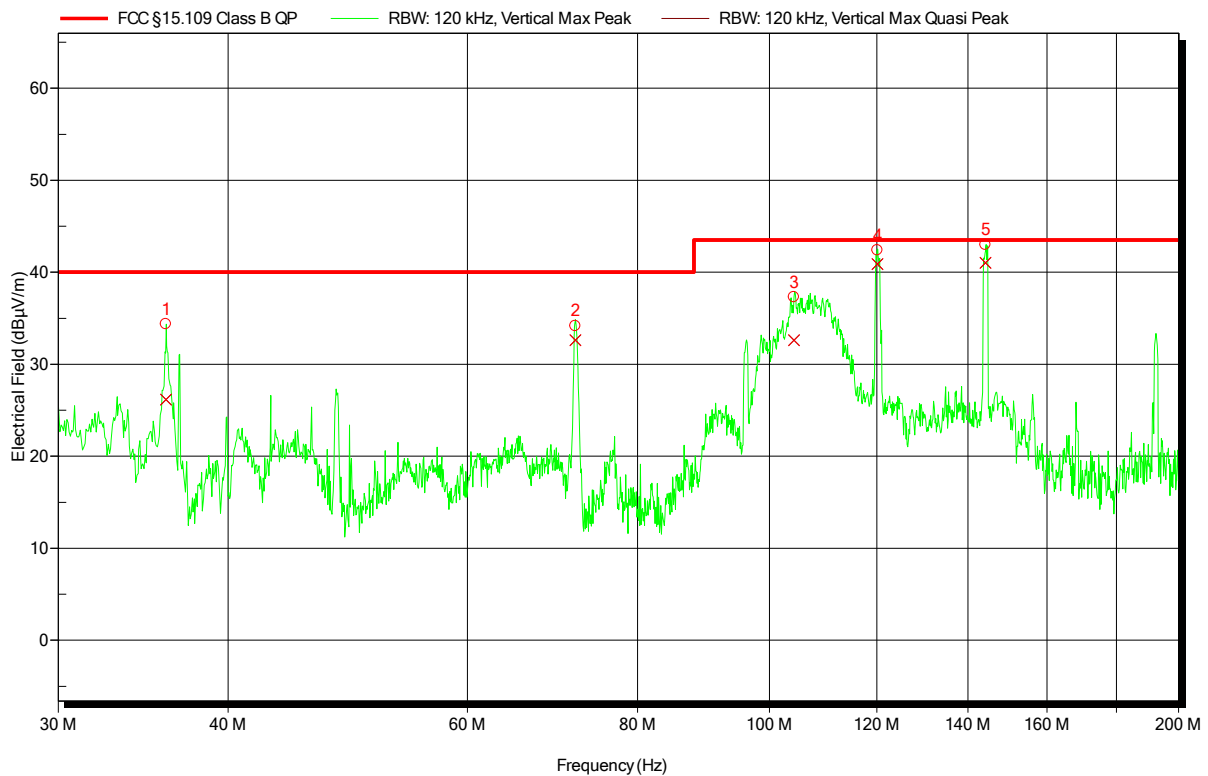

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	36.005 MHz	26.14 dBµV/m	40 dBµV/m	-13.86 dB	Pass	43 Degree	1 m
2	72.034 MHz	32.6 dBµV/m	40 dBµV/m	-7.4 dB	Pass	43 Degree	1 m
3	104.281 MHz	32.62 dBµV/m	43.52 dBµV/m	-10.9 dB	Pass	43 Degree	1 m
4	120.073 MHz	40.9 dBµV/m	43.52 dBµV/m	-2.62 dB	Pass	43 Degree	1 m
5	144.195 MHz	41.04 dBµV/m	43.52 dBµV/m	-2.48 dB	Pass	43 Degree	1 m

Test Report No.: G0M-1706-6624-EF0115B-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1706-6624

Applicant: Dewert Okin GmbH
 EUT Name: Remote Control Bluetooth
 Model: IPROXX2/SMP/Bluetooth
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 24V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: mode#1
 Test Date: 2017-12-14
 Note:

Index 11

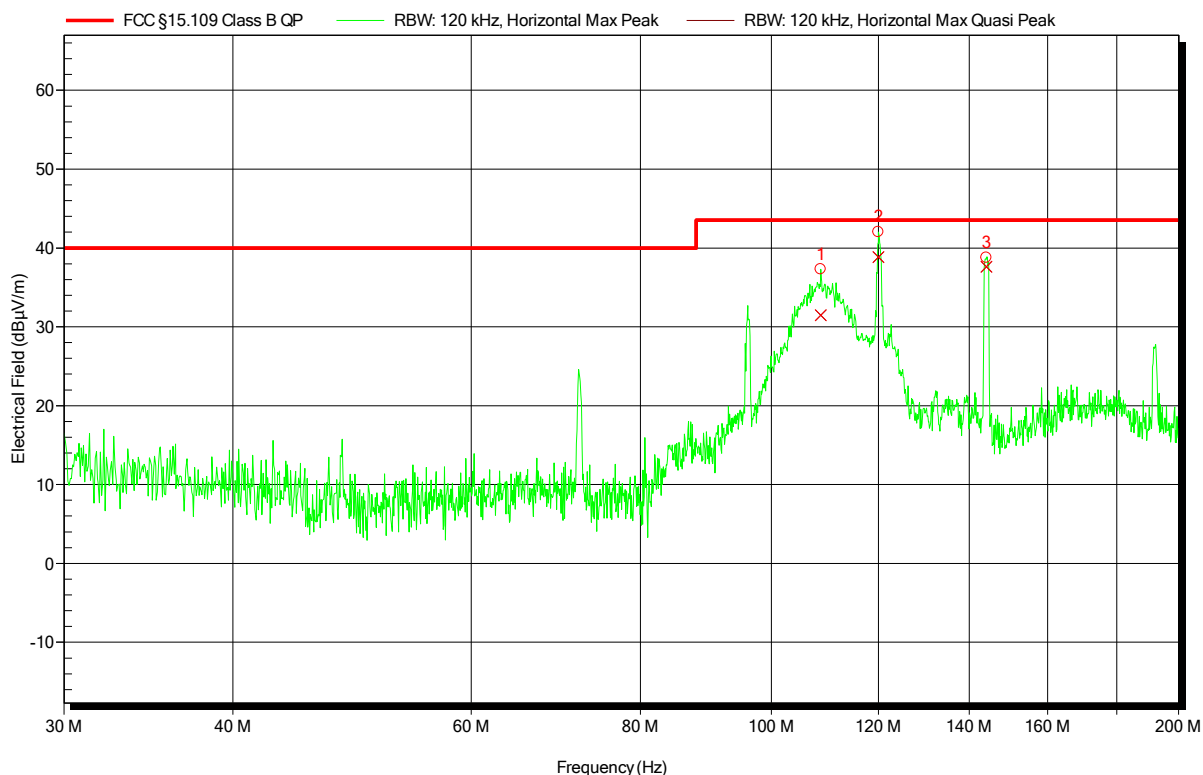

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	108.773 MHz	31.45 dBµV/m	43.52 dBµV/m	-12.07 dB	Pass	21 Degree	1.77 m
2	119.966 MHz	38.85 dBµV/m	43.52 dBµV/m	-4.68 dB	Pass	21 Degree	1.77 m
3	144.196 MHz	37.63 dBµV/m	43.52 dBµV/m	-5.89 dB	Pass	21 Degree	1.77 m

Test Report No.: G0M-1706-6624-EF0115B-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1706-6624

Applicant:	Dewert Okin GmbH
EUT Name:	Remote Control Bluetooth
Model:	IPROXX2/SMP/Bluetooth
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 24V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	mode#1
Test Date:	2017-12-14
Note:	

Index 13

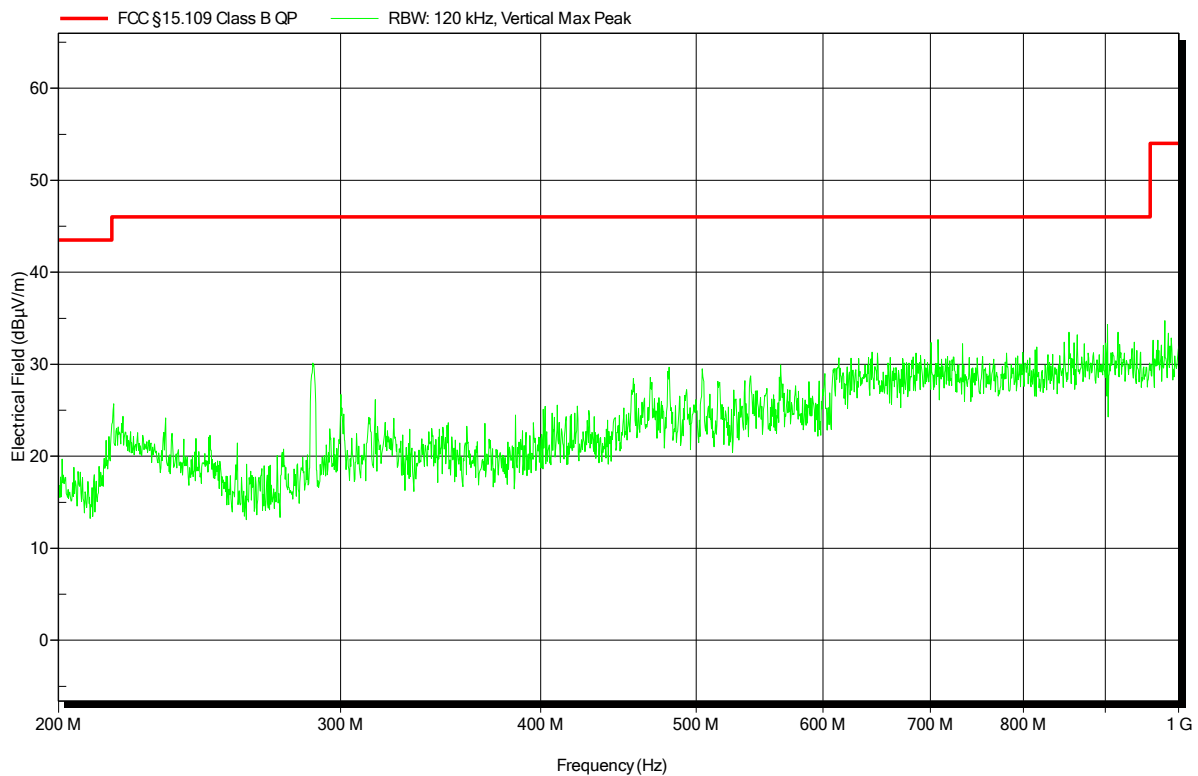


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1706-6624

Applicant:	Dewert Okin GmbH
EUT Name:	Remote Control Bluetooth
Model:	IPROXX2/SMP/Bluetooth
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 24V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	mode#1
Test Date:	2017-12-14
Note:	

Index 14

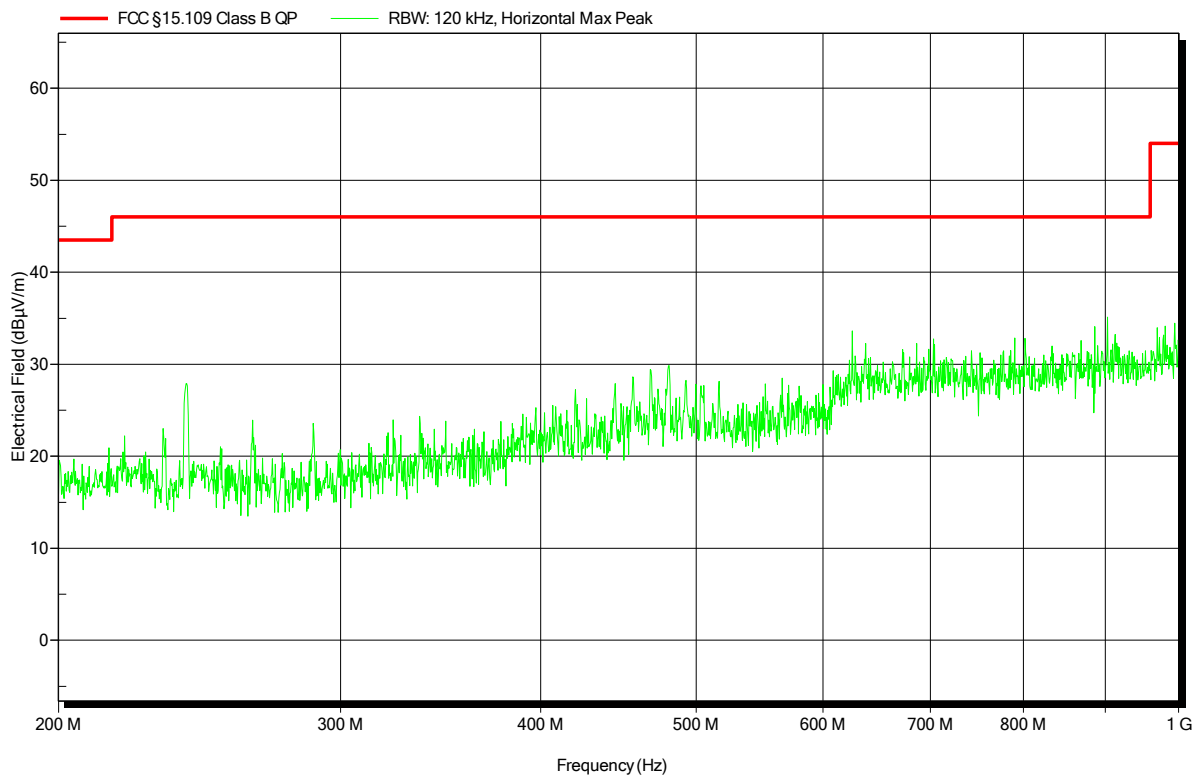


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1706-6624

Applicant: Dewert Okin GmbH
 EUT Name: Remote Control Bluetooth
 Model: IPROXX2/SMP/Bluetooth
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 24V DC
 Antenna: ETS-Lindgren 3117, Vertical
 Measurement distance: 3m
 Mode: mode#1
 Test Date: 2017-12-15
 Note:

Index 25

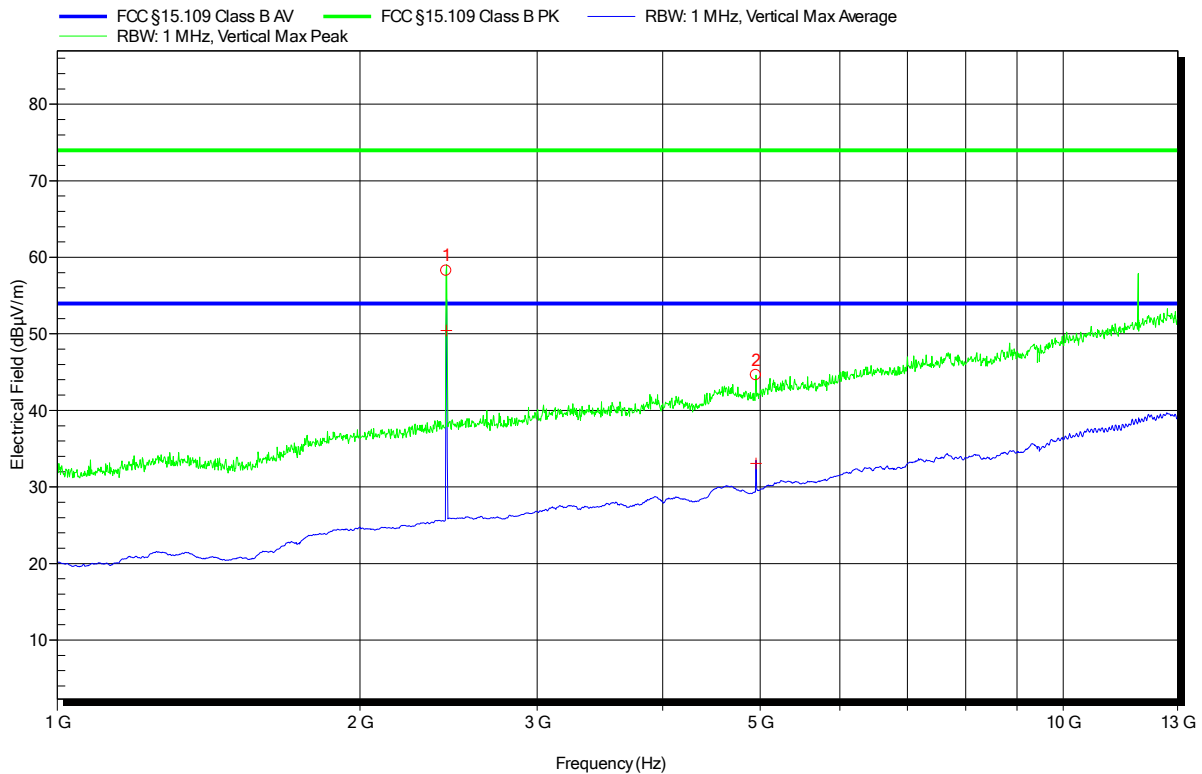


Peak Number	Frequency	Bluetooth	Low	Energy
1	2.438 GHz	Bluetooth Carrier	Low	Energy
2	4.952 GHz	Bluetooth harmonic	Low	Energy

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1706-6624

Applicant: Dewert Okin GmbH
 EUT Name: Remote Control Bluetooth
 Model: IPROXX2/SMP/Bluetooth
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 24V DC
 Antenna: ETS-Lindgren 3117, Horizontal
 Measurement distance: 3m
 Mode: mode#1
 Test Date: 2017-12-15
 Note:

Index 27

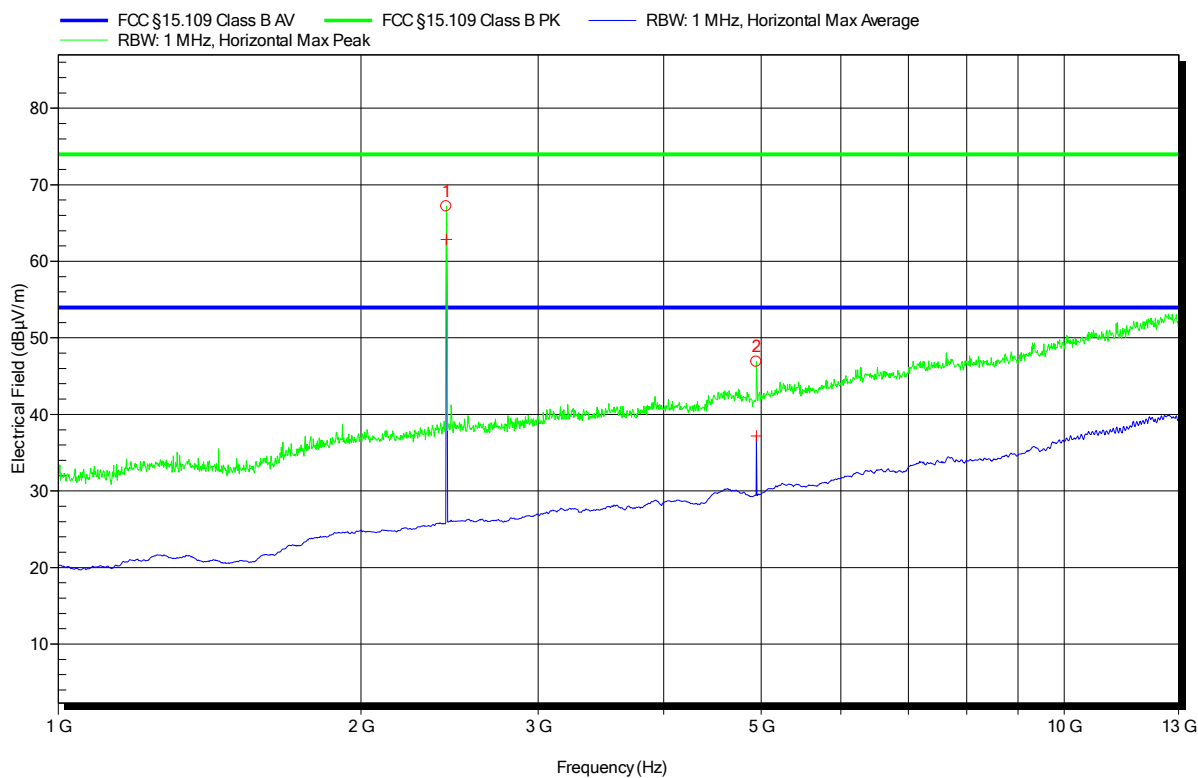

Peak Number	Frequency	Bluetooth	Low	Energy
1	2.432 GHz	Bluetooth Carrier	Low	Energy
2	4.944 GHz	Bluetooth harmonic	Low	Energy

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003		Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		22°C
Relative Humidity		30 to 60 %		31%
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		1		
Configuration		Bluetooth		
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Test Procedure:

Final measurement:


- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1706-6624

Applicant: DewertOkin GmbH
 EUT Name: Remote Control Bluetooth
 Model: IPROXX2/SMP/Bluetooth
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 22°C, Unom: 120 VAC
 LISN: ESH2-Z5 L
 Mode: mode# 1
 Test Date: 2017-11-27
 Note:

Index 3

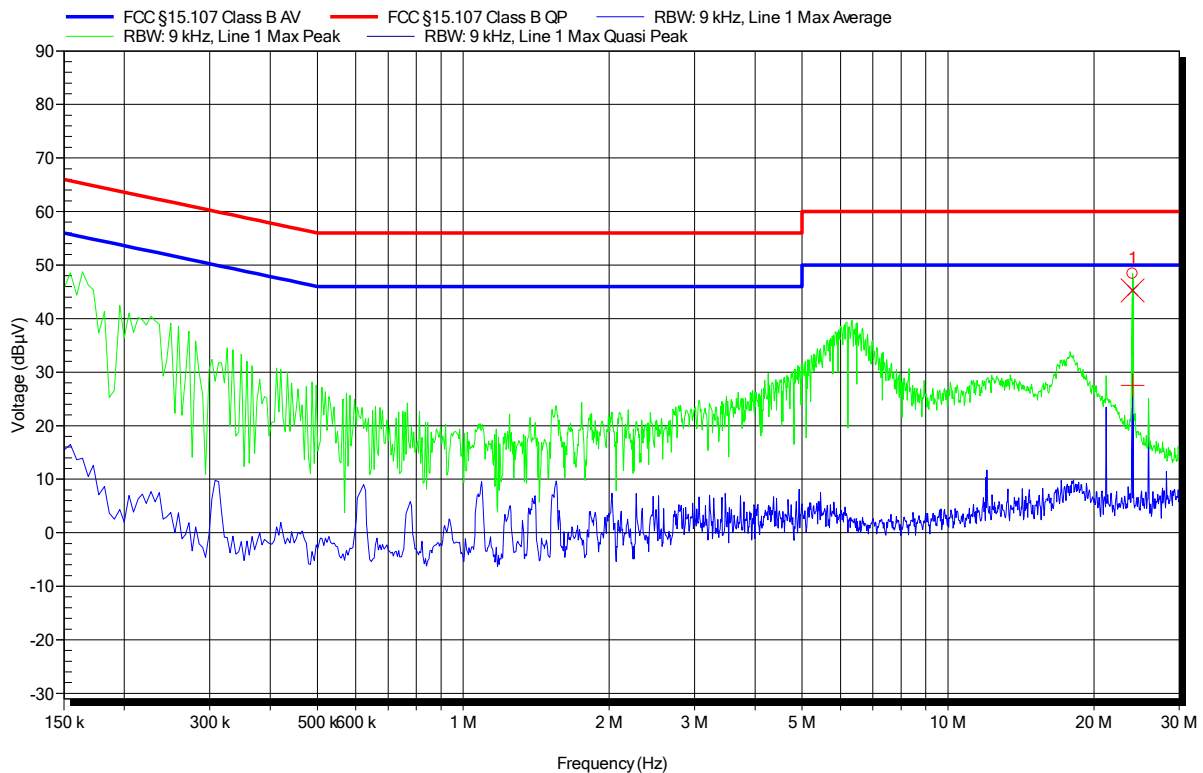

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	24.021 MHz	45.25 dBµV	60 dBµV	-14.75 dB	Pass
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	24.021 MHz	27.52 dBµV	50 dBµV	-22.48 dB	Pass

Test Report No.: G0M-1706-6624-EF0115B-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1706-6624

Applicant: DewertOkin GmbH
 EUT Name: Remote Control Bluetooth
 Model: IPROXX2/SMP/Bluetooth
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 22°C, Unom: 120 VAC
 LISN: ESH2-Z5 N
 Mode: mode#1
 Test Date: 2017-11-27
 Note:

Index 2

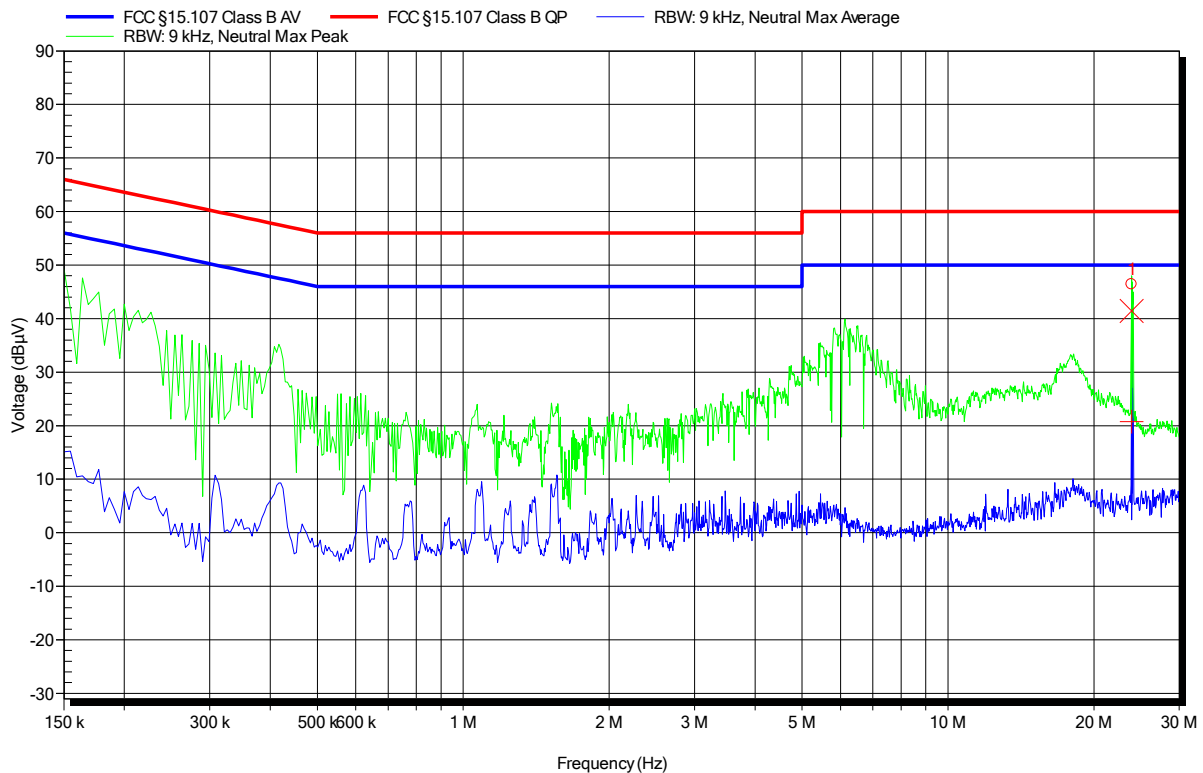

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	23.919 MHz	41.43 dBµV	60 dBµV	-18.57 dB	Pass
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	23.919 MHz	20.72 dBµV	50 dBµV	-29.28 dB	Pass

Test Report No.: G0M-1706-6624-EF0115B-V01

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany