



Hong Kong

FCC / IC – Test report

Report Number : **60/790.14.026.02** Date of Issue: November 26, 2014

Model : **QI Watch**

Product Type : **BLE Watch**

Applicant : **DAYTON INDUSTRIAL CO.,LTD**

Address : **2-12 Kwai Fat Road, Kwai Chung, New Territories, Hong Kong**

Production Facility : **KENDY ENTERPISE LTD**

Address : **2-12 Kwai Fat Road,11-A Kwai Chung, New Territories, Hong Kong**

Test Result : **Positive** **Negative**

Total pages including Appendices : **13**

TÜV SÜD Hong Kong Ltd. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Hong Kong Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Hong Kong Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Hong Kong Ltd. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 1 of 13

Rev. no.: 2.1



Hong Kong

1. Table of Contents

1. Table of Contents.....	2
2. Details about the Test Laboratory.....	3
3. Description of the Equipment Under Test.....	4
4. Summary of Test Standards.....	5
5. Summary of Test Standards and Results.....	6
6. General Remarks.....	7
7. Emission Test Results.....	8
7.1 Radiated Emission Test.....	8
7.2 20dB & 99% bandwidth measurement.....	11
8. Test Equipment List.....	12
9. System Measurement Uncertainty.....	13

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 2 of 13

Rev. no.: 2.1



Hong Kong

2. Details about the Test Laboratory

Details about the Test Laboratory

Test site 1

Company name: TÜV SÜD HONG KONG LTD.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin
HK.

Telephone: 852 2776 1323

Fax: 852 2776 1372

Test site 2

Company name: Shenzhen Academy of Metrology and Quality Inspection
No.4 TongFa Road, Xili Town Nanshan District, Shenzhen, China
Test Firm FCC Registration number:817957

National Digital Electronic Product Test
No.4 TongFa Road, Xili Town Nanshan District, Shenzhen, China
IC Assigned Code: 11177A

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 3 of 13

Rev. no.: 2.1



Hong Kong

3. Description of the Equipment Under Test

Description of the Equipment Under Test

Product:	BLE Watch
Model no.:	QI Watch
Serial number:	NIL
Options and accessories:	NIL
FCC ID:	O4GMW3
IC:	7666A-MW3
Rated Voltage:	3 VDC
Rated Current:	NIL
Rated Power:	NIL
Frequency:	2457MHz
RF Transmission Frequency:	2457MHz
Antenna gain:	0 dBi
No. of Operated Channel:	1
Modulation:	GFSK
Description of the EUT:	Battery operated – 1x 3.0V CR2032 battery

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 4 of 13

Rev. no.: 2.1



Hong Kong

4. Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C, Intentional Radiators, 10-1-12 Edition	PART 15 – RADIO FREQUENCY DEVICES Subpart C – Intentional Radiators
RSS-Gen Issue 4 November 2014	General Requirements and Information for the Certification of Radio Apparatus
RSS-210 Issue 8 December 2010	RSS-210 — Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 5 of 13

Rev. no.: 2.1



Hong Kong

5. Summary of Test Standards and Results

Emission Tests					
Test Condition	Pages	Test site	Test Result		
			Pass	Fail	N/A
Conducted Emission (47 CFR 15.207, 15.209 & RSS-GEN 7.2.4)	NIL	/	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> *
Radiated Emission (47 CFR 15.249, 15.209 & RSS-210 A2.9, GEN 7.2.5 & RSS-GEN 6.1)	8	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth (47 CFR 15.215)	12	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
99% occupied bandwidth (RSS-GEN 4.6.1)	12	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Bandedge Emission (47 CFR 15.249)	14	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark: 1. NA: Battery operated only.

2. For Spurious Radiated Emissions test, three set-up directions(X,Y,Z) were pretested, but only direction Y test data was recorded in this report for it is the worst case.

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 6 of 13

Rev. no.: 2.1



Hong Kong

6. General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: O4GMW3 complies with the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for IC: 7666A-MW3, complies with the IC RSS 210 and RSS-GEN Rules.

All the configurations of the product were tested and only the worst test results are listed in the report.

SUMMARY:

All tests according to the regulations cited on page 6 were

- Performed
- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.
- **Does not** fulfill the general approval requirements.

Sample Received Date: November 6, 2014

Testing Start Date: November 24, 2014


Testing End Date: November 26, 2014

- TÜV SÜD HONG KONG LTD. -

Reviewed by:


Edmond FUNG

Prepared by:


CHAN Kwong Ngai



Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 7 of 13

Rev. no.: 2.1



7. Emission Test Results

7.1 Radiated Emission Test

Date of test : November 24, 2014
 Test requirement : FCC Part 15
 Test method : ANSI C63.4:2009
 Operating mode : Transmit mode
 Frequency channel : 2457MHz
 Remarks : Fundamental

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Frequency (MHz)	Polarity (H/V)	Factor (dB)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
2457.000	H	31.8	79.93	114	-34.07	Peak
2457.000	V	31.8	78.74	114	-35.26	Peak

Remark: 1.The EUT was placed on the top of the turntable in test site area.
 The test shall be made in the operation mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
 For emissions measurement, the receiving antenna was placed 3 meters far away from the turntable. The antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization.
 Adjust the emission and slightly rotate the turntable to locate the position with maximum reading.
 Adjust the emission and slightly height of the antenna to locate the position with maximum reading.
 2.Average value=Peak value + duty cycle factor= Peak value-26.23



Hong Kong

Date of test : November 24, 2014
Test requirement : FCC Part 15
Test method : ANSI C63.4:2009
Operating mode : Transmit mode
Frequency channel : 2457MHz
Remarks : 9kHz-25GHz(Harmonics and spurious)

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Frequency (MHz)	Polarity (H/V)	Factor (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
58.77	H	14.0	16.7	40.00	-23.30	Quasi Peak
102.44	H	13.6	18.2	43.50	-25.30	Quasi Peak
174.23	H	11.5	16.3	43.50	-27.20	Quasi Peak
499.00	H	18.0	22.9	46.00	-23.10	Quasi Peak
687.00	H	19.2	26.8	46.00	-19.20	Quasi Peak
840.40	H	22.3	31.2	46.00	-14.80	Quasi Peak
4914.000	H	5.4	47.5	74.00	-26.50	Peak

Remark: 1.The EUT was placed on the top of the turntable in test site area.
The test shall be made in the operation mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
For emissions measurement, the receiving antenna was placed 3 meters far away from the turntable.
The antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization.
Adjust the emission and slightly rotate the turntable to locate the position with maximum reading.
Adjust the emission and slightly height of the antenna to locate the position with maximum reading.
2.Average value=Peak value + duty cycle factor= Peak value-26.2



Hong Kong

Date of test : November 24, 2014

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009

Operating mode : Transmit mode

Frequency channel : 2457MHz

Remarks : 9kHz-25GHz(Harmonics and spurious)

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Frequency (MHz)	Polarity (H/V)	Factor (dB)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
58.22	V	14.0	17.3	40.00	-22.70	Quasi Peak
94.30	V	13.6	18.9	43.50	-24.60	Quasi Peak
350.12	V	11.5	20.7	46.00	-25.30	Quasi Peak
590.14	V	18.0	26.0	46.00	-20.00	Quasi Peak
620.21	V	19.2	25.8	46.00	-20.20	Quasi Peak
806.00	V	22.3	30.2	46.00	-15.80	Quasi Peak
4914.000	V	5.4	44.6	74.00	-29.40	Peak

Remark: 1.The EUT was placed on the top of the turntable in test site area.
The test shall be made in the operation mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
For emissions measurement, the receiving antenna was placed 3 meters far away from the turntable.
The antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization.
Adjust the emission and slightly rotate the turntable to locate the position with maximum reading.
Adjust the emission and slightly height of the antenna to locate the position with maximum reading.
2.Average value=Peak value + duty cycle factor= Peak value-26.2

7.2 20dB & 99% bandwidth measurement

Date of test : November 26, 2014

Test requirement : FCC Part 15

Test method : ANSI C63.4:2009


Operating mode : Transmit mode

Frequency channel : 2457MHz

Remarks : NIL

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

20 dB Bandwidth	99% OBW	Result
kHz	kHz	
129.8	125.6	Pass

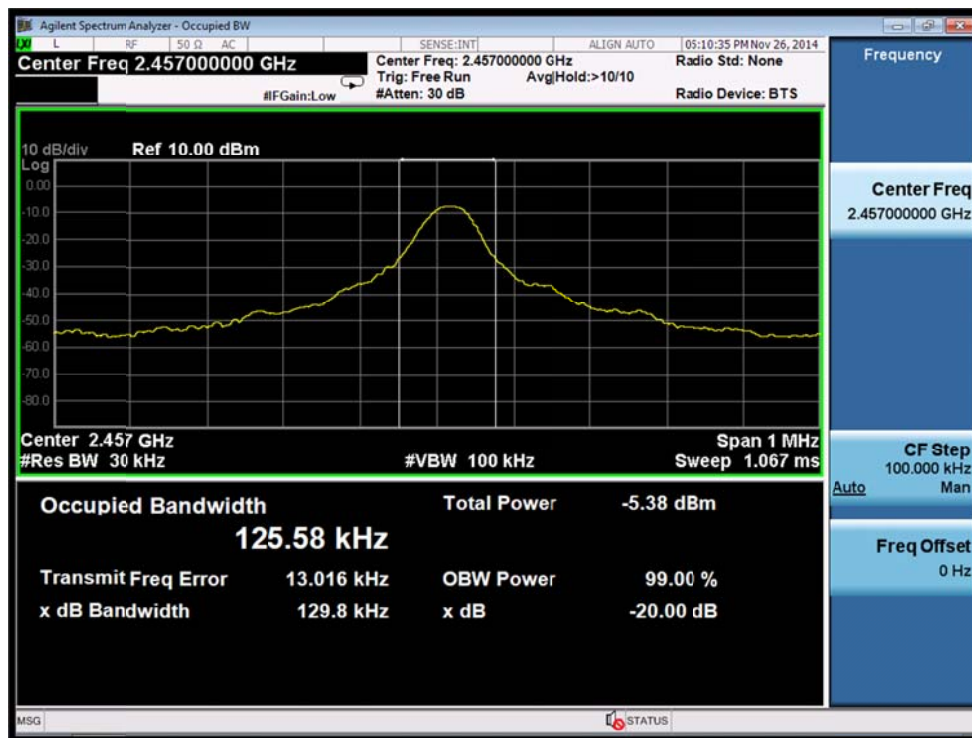



Hong Kong

8. Test Equipment List

DESCRIPTION	Type No.	Serial No.	Calibrated date	Calibrated until
Antenna	VULB9163	9163 330	2014.02.25	2015.02.24
Antenna	3117	00066577	2014.04.02	2015.04.01
Antenna	3160-09	00118388	2014.09.06	2015.09.05
Loop Antenna	6512	29604	2014.09.25	2015.09.24
Spectrum Analyzer	N9020A	MY53420615	2014.05.12	2015.05.11
Spectrum Analyzer	FSP 40	100378	2013.12.23	2014.12.22
EMI Test Receiver	ESCI	100701	2014.08.04	2015.08.03
Spectrum Analyzer	FSV40	100903	2014.01.27	2015.01.26
Spectrum Analyzer	E4445A	MY46181814	2013.12.11	2014.12.10
Test Cable	SUCOFLEX 104	MY2320/4	2014.02.18	2015.02.17
Amplifier	150A250	326446	2014.03.19	2015.03.17
Temp. & Humid. Chamber	FACT5-2.0	4166	2014.11.22	2015.11.21
EMI Test Receiver	ESI26	SB3436	2014.01.20	2015.01.19

Report Number: **60/790.14.026.02**

TÜV SÜD HONG KONG LTD., 3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, HK.
Tel: +852-2776 1323 Fax: +852-2776 1206

Page 12 of 13

Rev. no.: 2.1

9. System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items		Extended Uncertainty
RE	Field strength (dB μ V/m)	U=3.59dB (9kHz-30MHz) U=5.08dB (30MHz-1GHz) U=4.56dB (1GHz-18GHz) U=4.42dB (18GHz-25GHz)
CE	Disturbance Voltage (dB μ V)	U=2.7dB