

# TEST REPORT

Reference No..... : WTS15S1136861E  
FCC ID ..... : O55137800  
Applicant..... : SWAGTEK  
Address..... : 10205 NW19th Street,STE101, Miami, FL, 33172, USA  
Manufacturer ..... : The same as above  
Address..... : The same as above  
Product Name..... : Wireless Fixed Phone  
Model No ..... : Viva Heat 137, LOGIC F1, FIXO 800  
Brand..... : VIVA(Viva Heat 137), LOGIC(LOGIC F1), iSWAG(FIXO 800)  
Standards ..... : FCC PART15 SUBPART B: 2014  
Date of Receipt sample .... : Nov.09, 2015  
Date of Test ..... : Nov. 09, 2015 – Nov. 16, 2015  
Date of Issue..... : Nov.28, 2015  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China  
Tel :+86-755-83551033  
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhou / Manager

## 1 Test Summary

Test Item	Test Requirement	Class	Test Method	Test Result
Power Line Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2009	Pass
Radiated Emission 30MHz to 1GHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2009	Pass
Radiated Emission (Above 1GHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2009	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

## 2 Contents

	Page
<b>COVER PAGE</b> .....	<b>1</b>
<b>1 TEST SUMMARY</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 GENERAL INFORMATION</b> .....	<b>4</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	4
3.2 DETAILS OF E.U.T.....	4
3.3 STANDARDS APPLICABLE FOR TESTING .....	4
3.4 TEST FACILITY .....	5
3.5 SUBCONTRACTED .....	5
3.6 ABNORMALITIES FROM STANDARD CONDITIONS .....	5
<b>4 EQUIPMENT USED DURING TEST</b> .....	<b>6</b>
4.1 EQUIPMENT LIST.....	6
4.2 DESCRIPTION OF SUPPORT UNITS.....	7
4.3 MEASUREMENT UNCERTAINTY.....	7
<b>5 EMISSION TEST RESULTS</b> .....	<b>8</b>
5.1 POWER LINE CONDUCTED EMISSION, 150KHZ TO 30MHZ .....	8
5.2 RADIATION EMISSION, 30MHZ TO 1000MHZ.....	11
5.3 RADIATION EMISSION, ABOVE 1000MHZ.....	14
<b>6 PHOTOGRAPHS – TEST SETUP MODEL IRIS 600</b> .....	<b>17</b>
6.1 PHOTOGRAPH –POWER LINE CONDUCTED EMISSION TEST SETUP AT TEST SITE 1#.....	17
6.2 PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR 30~1000MHZ AT TEST SITE 2#.....	17
6.3 PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR ABOVE 1GHZ AT TEST SITE 1#.....	18

### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	: Wireless Fixed Phone
Model No.	: Viva Heat 137, LOGIC F1, FIXO 800
Model Description	: Only the model name and brand name are different
GSM Band(s)	: GSM 850/1900MHz
GPRS/EGPRS Class	: N/A
WCDMA Band(s)	: N/A
LTE Bnad(s)	: N/A
Wi-Fi Specification	: N/A
Bluetooth Version	: N/A
GPS	: N/A
NFC	: N/A
Hardware Version	: 6139_MB_V1.2
Software Version	: EG760_MT6261M_6139_Unitel_VIVA_V005

#### 3.2 Details of E.U.T.

Technical Data	:Battery DC 3.7V, 800mAh DC 5V,500mA, Charging form adapter (Adapter Input:100-240V~50/60Hz, 0.15A)
Adapter	:Model No.: Heat 137

#### 3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC PART 15, SUBPART B: Electronic Code of Federal Regulations- Unintentional Radiators 2014

### 3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

### 3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab:      N/A

Lab address: N/A

Test items:      N/A

### 3.6 Abnormalities from Standard Conditions

None.

## 4 Equipment Used during Test

### 4.1 Equipment List

<b>Conducted Emissions Test Site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2015	Sep.14,2016
2.	LISN	R&S	ENV216	101215	Sep.15,2015	Sep.14,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2015	Sep.14,2016
<b>Conducted Emissions Test Site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2015	Sep.14,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2015	Sep.14,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.15,2015	Sep.14,2016
4.	Cable	LARGE	RF300	-	Sep.15,2015	Sep.14,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	Apr.18,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	Apr.18,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	Apr.18,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2015	Apr.09,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	Test Receiver	R&S	ESCI	101296	Sep.15,2015	Sep.14,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2015	Sep.14,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2015	Sep.14,2016

4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2015	Sep.14,2016
<b>RF Conducted Testing</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2015	Sep.14,2016

#### 4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
MacBook Air	APPLE	A1465	C17KTQDNF5N7

#### 4.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±3.64dB	(1)
Radiation Emission	30MHz~1000MHz	±5.03dB	(1)
	1GHz~6GHz	±5.47dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 5 Emission Test Results

### 5.1 Power Line Conducted Emission, 150kHz to 30MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4  
 Test Result ..... : Pass  
 Frequency Range ..... : 150kHz to 30MHz  
 Class ..... : Class B  
 Limit ..... :

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

#### 5.1.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 23°C  
 Humidity ..... : 53.6%RH  
 Atmospheric Pressure..... : 101kPa

EUT Operation:

Input Voltage..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting  
 Remark ..... : The worse case(Data transmitting mode) is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the ANSI C63.4 .

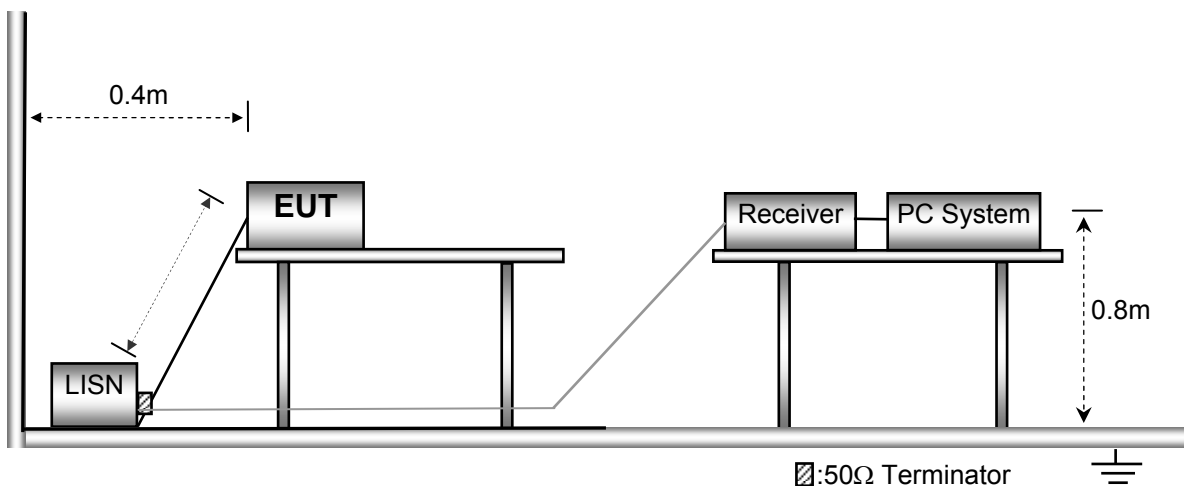




### 5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line. According to the data in section 5.1.4, the EUT complied with the FCC PART 15, SUBPART B standards.


### 5.1.4 Power Line Conducted Emission Test Data

Live Line:

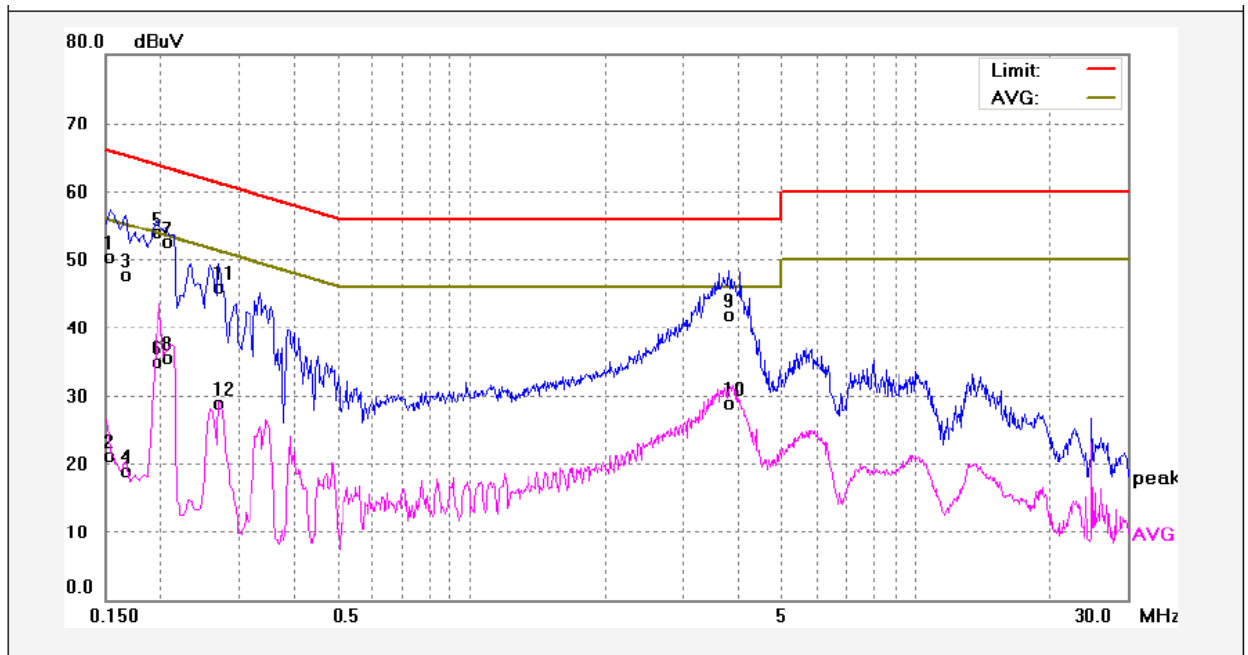

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	40.13	10.13	50.26	65.78	-15.52	QP	
2	0.1539	11.00	10.13	21.13	55.78	-34.65	AVG	
3	0.1660	37.55	10.14	47.69	65.15	-17.46	QP	
4	0.1660	8.69	10.14	18.83	55.15	-36.32	AVG	
5	0.1940	43.66	10.15	53.81	63.86	-10.05	QP	
6	0.1940	24.75	10.15	34.90	53.86	-18.96	AVG	
7	0.2060	42.39	10.15	52.54	63.36	-10.82	QP	
8	0.2060	25.40	10.15	35.55	53.36	-17.81	AVG	
9	3.8140	31.54	10.30	41.84	56.00	-14.16	QP	
10	3.8140	18.54	10.30	28.84	46.00	-17.16	AVG	
11	0.2700	35.74	10.16	45.90	61.12	-15.22	QP	
12	0.2700	18.77	10.16	28.93	51.12	-22.19	AVG	

Neutral Line:

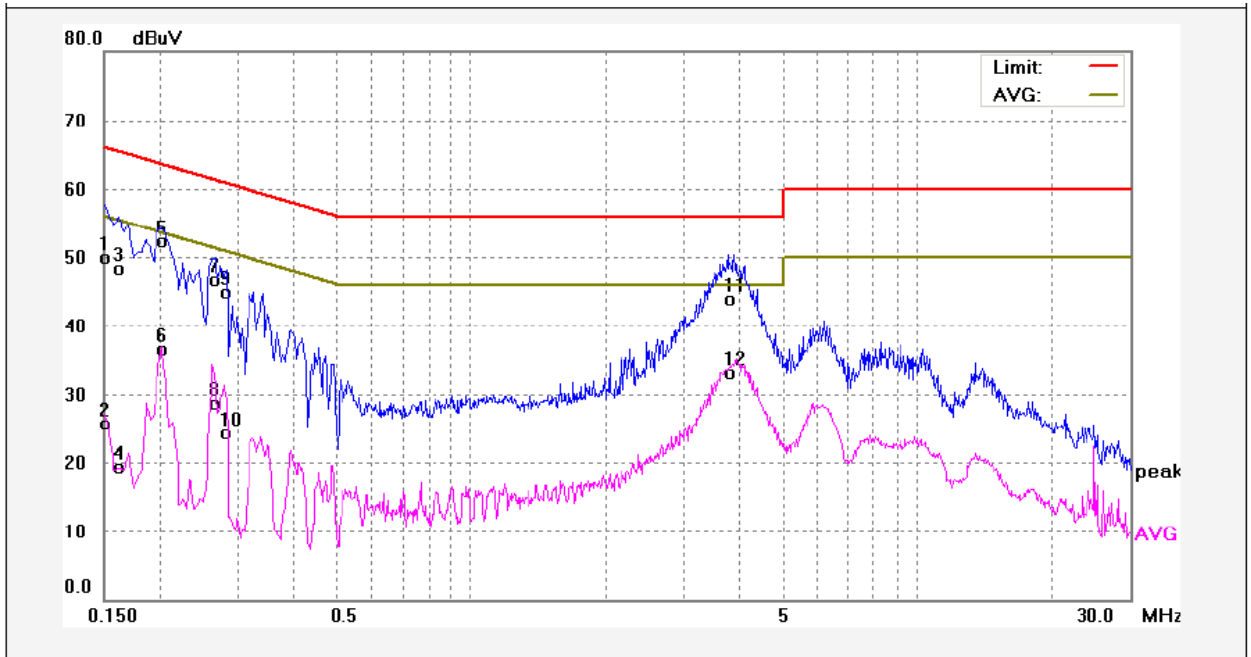

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	39.69	10.13	49.82	65.99	-16.17	QP	
2	0.1500	15.48	10.13	25.61	55.99	-30.38	AVG	
3	0.1620	38.21	10.13	48.34	65.36	-17.02	QP	
4	0.1620	9.25	10.13	19.38	55.36	-35.98	AVG	
5	0.2020	42.16	10.15	52.31	63.52	-11.21	QP	
6	0.2020	26.26	10.15	36.41	53.52	-17.11	AVG	
7	0.2660	36.47	10.16	46.63	61.24	-14.61	QP	
8	0.2660	18.49	10.16	28.65	51.24	-22.59	AVG	
9	0.2819	34.68	10.16	44.84	60.76	-15.92	QP	
10	0.2819	14.05	10.16	24.21	50.76	-26.55	AVG	
11	3.7700	33.58	10.30	43.88	56.00	-12.12	QP	
12	3.7700	22.87	10.30	33.17	46.00	-12.83	AVG	

### 5.2 Radiation Emission, 30MHz to 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4  
 Test Result ..... : Pass  
 Frequency Range ..... : 30MHz to 1000MHz  
 Class. : Class B  
 Limit..... :

Frequency (MHz)	Distance (Meter)	Limit (dB $\mu$ V/m
		Quasi-peak
30 to 88	3	40
88 to 216	3	43.5
216 to 960	3	46
960 to 1000	3	54

#### 5.2.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 22.5°C  
 Humidity ..... : 52.6%RH  
 Atmospheric Pressure..... : 101.2kPa

EUT Operation:

Input Voltage..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting  
 Remark ..... : The worse case(Data transmitting) is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 5.2.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

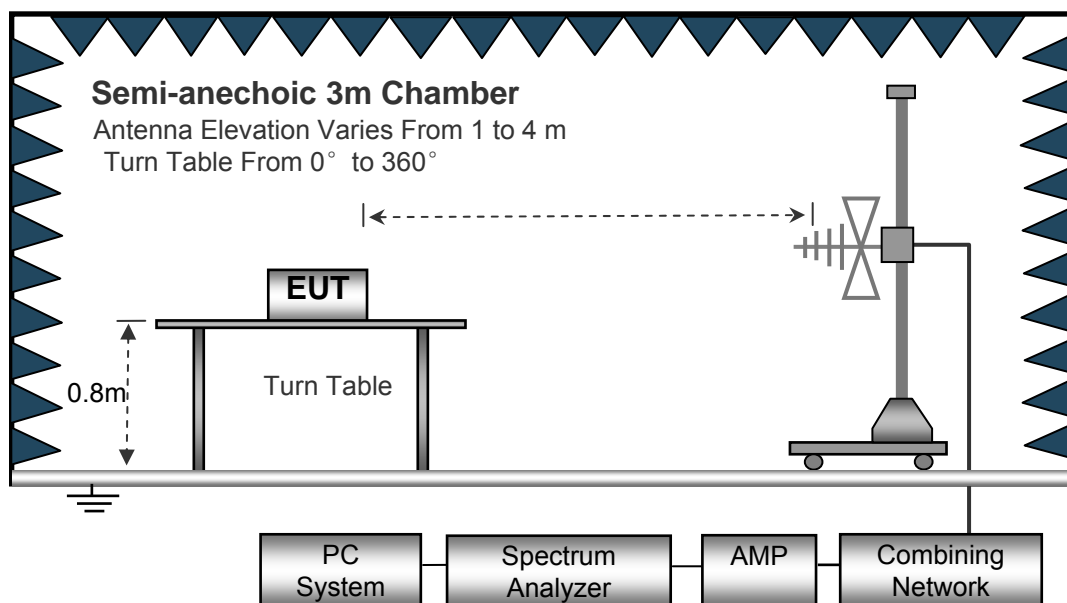


### 5.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Quasi-peak measurements were performed if peak emissions were within 6dB of the Quasi-peak limit line.


### 5.2.4 Radiated Emission Test Data, 30MHz to 1000MHz

Antenna Polarization: Vertical

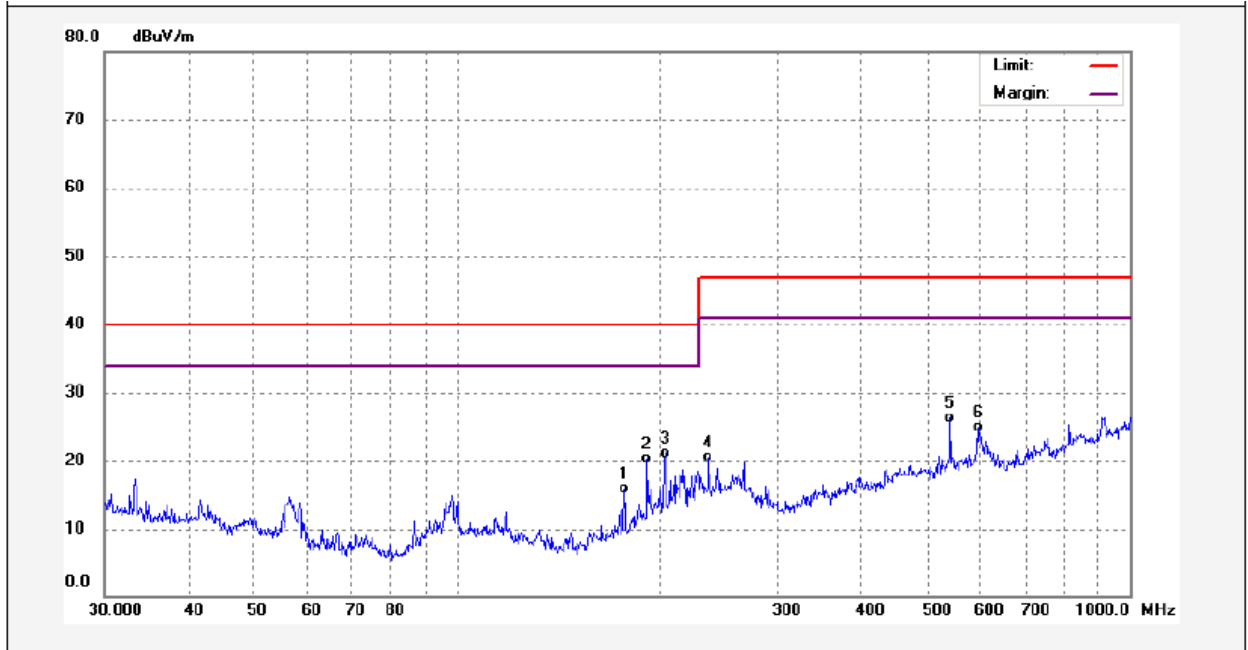

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	177.5092	34.40	-18.42	15.98	40.00	-24.02	QP	
2	191.7450	37.50	-17.24	20.26	40.00	-19.74	QP	
3	204.2377	38.57	-17.41	21.16	40.00	-18.84	QP	
4	236.6447	36.76	-16.25	20.51	47.00	-26.49	QP	
5	541.3725	36.97	-10.64	26.33	47.00	-20.67	QP	
6	595.1329	34.86	-9.93	24.93	47.00	-22.07	QP	

Antenna Polarization: Horizontal

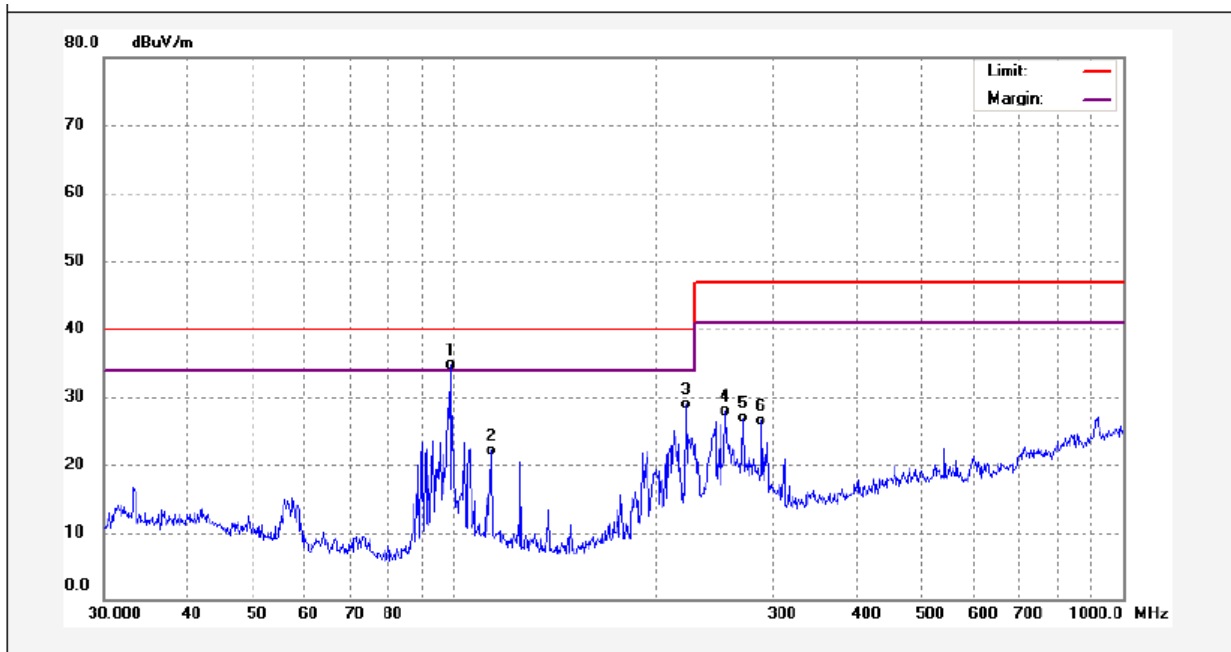

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	98.8326	52.51	-17.90	34.61	40.00	-5.39	QP	
2	113.7143	38.93	-16.90	22.03	40.00	-17.97	QP	
3	222.1698	46.03	-17.14	28.89	40.00	-11.11	QP	
4	254.7284	44.06	-16.22	27.84	47.00	-19.16	QP	
5	270.3748	42.74	-15.85	26.89	47.00	-20.11	QP	
6	287.9904	41.84	-15.26	26.58	47.00	-20.42	QP	

### 5.3 Radiation Emission, Above 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4  
 Test Result ..... : Pass  
 Frequency Range ..... : 1GHz~6GHz  
 Class. : Class B  
 Limit. .... :

Frequency Range (MHz)	Distance (Meter)	Average Limit dB(uV/m)	Peak Limit (dBUV/m)
Above 1GHz	3	54	74

#### 5.3.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 22.4°C  
 Humidity ..... : 52.3%RH  
 Atmospheric Pressure ..... : 101.3kPa

EUT Operation:

Input Voltage ..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting  
 Remark ..... : The worse case(Data transmitting mode) is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 5.3.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

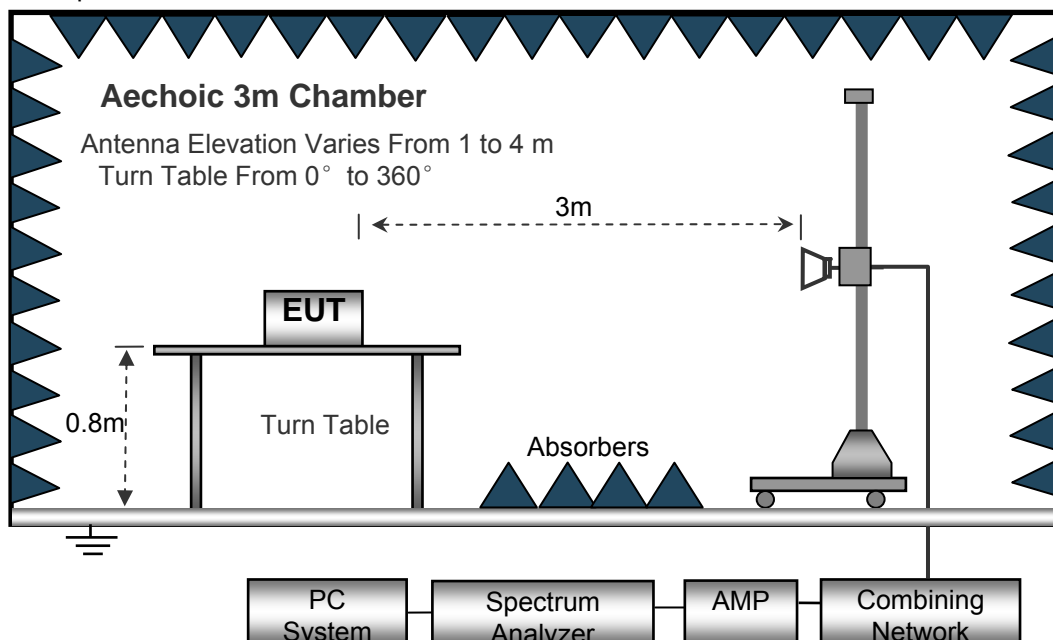


### 5.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Average measurements were performed if peak emissions were within 6dB of the average limit line


### 5.3.4 Radiated Emission Test Data, Above 1000MHz

Antenna Polarization: Vertical

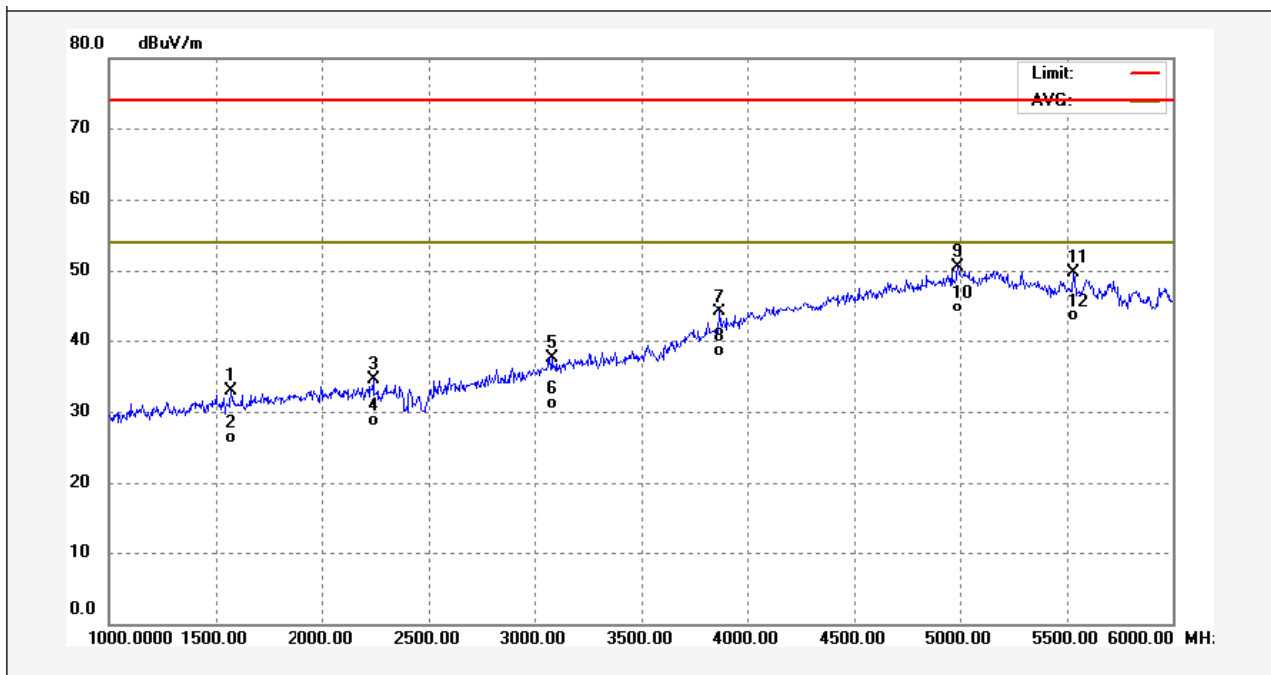

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1570.000	50.48	-17.67	32.81	74.00	-41.19	peak	
2	1570.000	44.02	-17.67	26.35	54.00	-27.65	AVG	
3	2240.000	50.71	-16.13	34.58	74.00	-39.42	peak	
4	2240.000	44.88	-16.13	28.75	54.00	-25.25	AVG	
5	3080.000	50.60	-13.10	37.50	74.00	-36.50	peak	
6	3080.000	44.30	-13.10	31.20	54.00	-22.80	AVG	
7	3870.000	51.68	-7.53	44.15	74.00	-29.85	peak	
8	3870.000	46.12	-7.53	38.59	54.00	-15.41	AVG	
9	4990.000	50.80	-0.30	50.50	74.00	-23.50	peak	
10	4990.000	44.99	-0.30	44.69	54.00	-9.31	AVG	
11	5530.000	51.43	-1.77	49.66	74.00	-24.34	peak	
12	5530.000	45.34	-1.77	43.57	54.00	-10.43	AVG	

Antenna Polarization: Horizontal

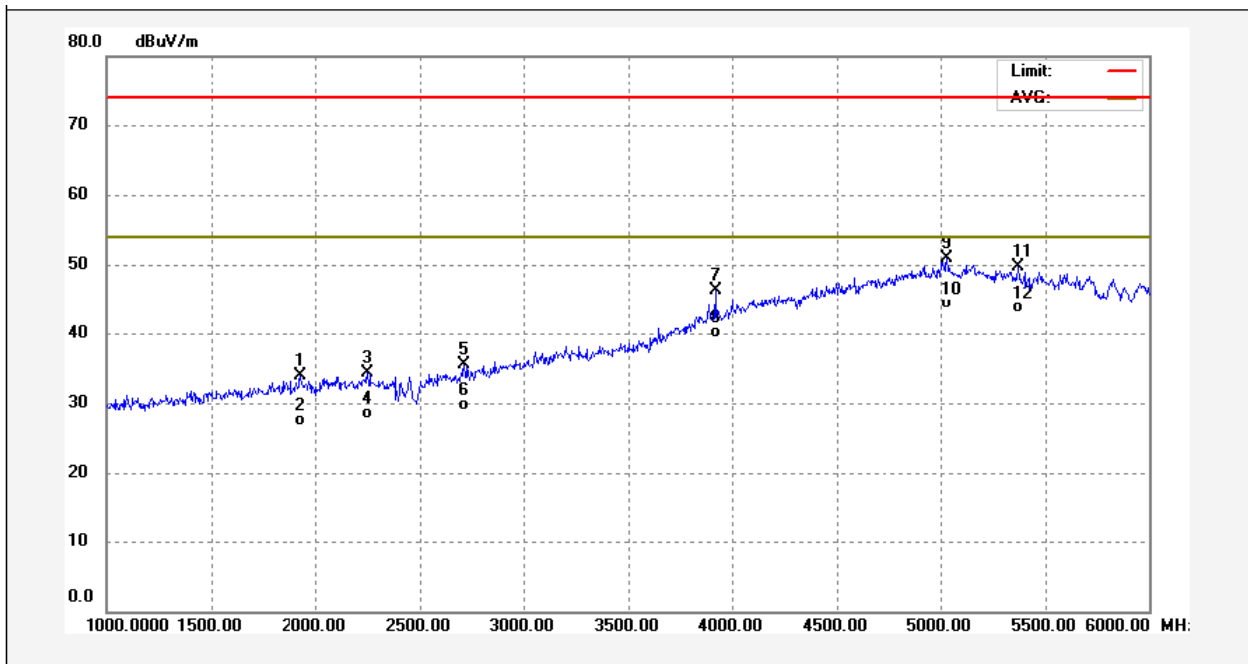


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1930.000	50.53	-16.54	33.99	74.00	-40.01	peak	
2	1930.000	43.99	-16.54	27.45	54.00	-26.55	AVG	
3	2250.000	50.46	-16.12	34.34	74.00	-39.66	peak	
4	2250.000	44.71	-16.12	28.59	54.00	-25.41	AVG	
5	2710.000	50.31	-14.87	35.44	74.00	-38.56	peak	
6	2710.000	44.55	-14.87	29.68	54.00	-24.32	AVG	
7	3920.000	53.38	-6.99	46.39	74.00	-27.61	peak	
8	3920.000	47.12	-6.99	40.13	54.00	-13.87	AVG	
9	5030.000	51.29	-0.33	50.96	74.00	-23.04	peak	
10	5030.000	44.56	-0.33	44.23	54.00	-9.77	AVG	
11	5370.000	51.07	-1.36	49.71	74.00	-24.29	peak	
12	5370.000	45.05	-1.36	43.69	54.00	-10.31	AVG	




## 6 Photographs – Test Setup model iris 600

### 6.1 Photograph –Power Line Conducted Emission Test Setup at Test Site 1#

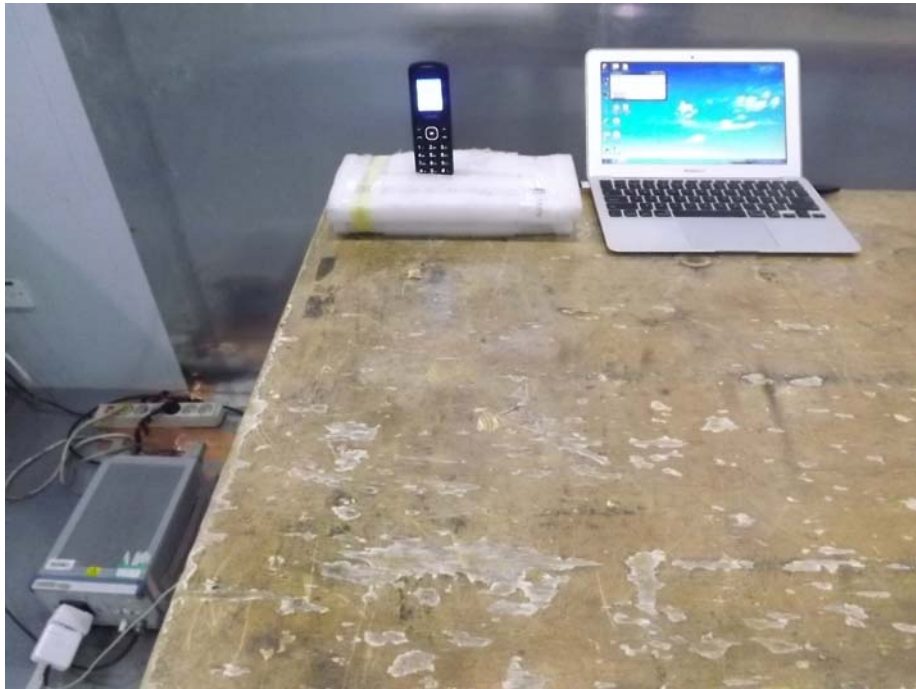

### 6.2 Photograph – Radiated Emission Test Setup for 30~1000MHz at Test Site 2#

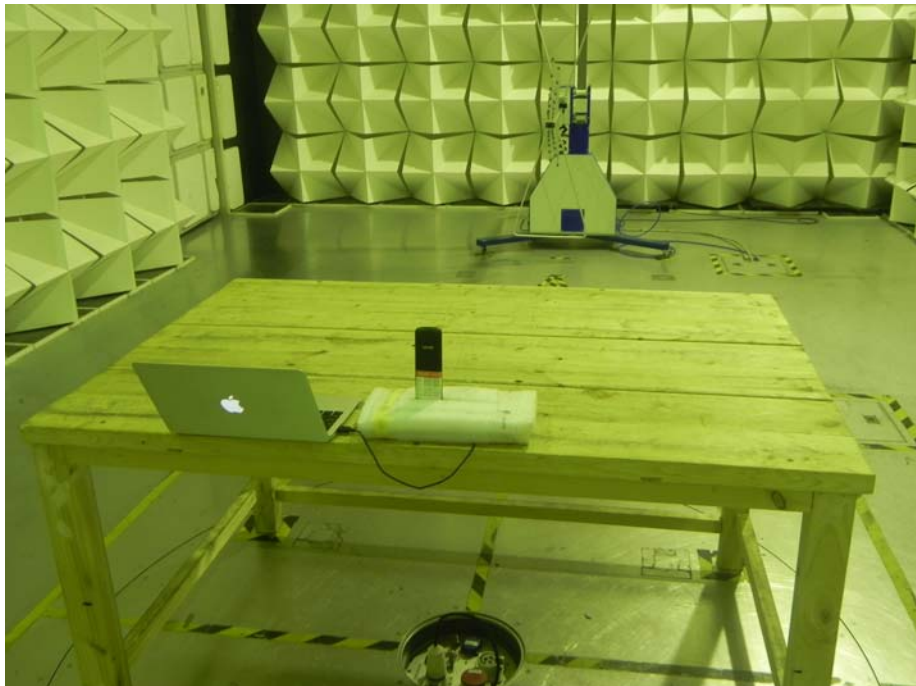

### 6.3 Photograph – Radiated Emission Test Setup for Above 1GHz at Test Site 1#



====End of Report====